

GENERAL INSTRUCTIONS:

SUPPLIER TO INSURE CORRECT REVISION LEVEL DWG FOR PRODUCTION. CONTACT SB&D PURCHASING DEPT. FOR LATEST REVISION LEVEL DWG.

CONTACT SB&D GRAPHICS DESIGN FOR ORIGINAL ARTWORK,
COLOR STANDARDS AND CORPORATE GUIDELINES.

PROOFS OF ALL REVISIONS THAT AFFECT ARTWORK AND ALL NEW COLOR FORMULATIONS MUST BE SUBMITTED TO SB&D GRAPHICS DESIGN FOR APPROVAL PRIOR TO MAKING PRODUCTION PARTS. SEE EP-1006.

**SUPPLIER TO PROVIDE SB&D GRAPHICS DESIGN WITH 6
SAMPLES OF ALL PRODUCTION PARTS. MARK SB&D PART
NO. AND REVISION LEVEL.**

COLOR VARIATIONS:

 = PMS Black

 = DEWALT Yellow

 = ANSI Orange (Pantone 172)

LABEL APPLICATION

☒ TEXTURED	☒ RULED (one curve)	☐ OUTDOOR USE
☐ NON-TEXTURED	☐ FLAT	☒ INDOOR USE
	☐ COMPOUND	

ADHESION: ☒ PERMANENT ☐ REMOVEABLE ☐ OTHER


SYNTHETIC LABEL CONSTRUCTION:

SUPPLIER NAME: **SUGGESTED LABEL MATERIAL:**

TBD	5 MIL MATTE POLYCARBONATE, SUB-SURFACED PRINTED, 2 MIL ACRYLIC ADHESIVE MATTE TEXTURED
-----	---

SPECIAL NOTES:

1. FINISHED LABEL MUST BE A "UL" AND "CSA" RECOGNIZED LABELING SYSTEM (UL STANDARD: UL969, UL CATEGORY CODE: PGDQ; CSA STANDARD: C22.2 NO. 0.15, CSA CLASS: 7921) AND APPROVED FOR THE SURFACE THAT THE LABEL WILL BE APPLIED TO UNLESS STANLEY BLACK & DECKER AGREES TO A DEVIATION.
2. LABEL MANUFACTURER IS RESPONSIBLE TO PLACE THEIR MANUFACTURER'S CODE ON LABEL. IN THE SIZE AND LOCATION INDICATED ON THIS DOCUMENT.
3. INK USED MUST BE UV STABILIZED.
4. ALL MATERIALS MUST COMPLY WITH ES100118.
5. LABELS SHALL BE LEGIBLE, SHALL NOT WORK LOOSE, AND SHALL NOT BECOME CURLED AT THE EDGES AFTER BEING RUBBED BY HAND FOR 15 SECONDS WITH A CLOTH SOAKED IN WATER AND AGAIN FOR 15 SECONDS WITH A CLOTH SOAKED IN PETROLEUM SPIRIT. THE PETROLEUM SPIRIT TO BE USED FOR THE TEST SHALL BE A REAGENT GRADE HEXANE WITH A MINIMUM OF 85% AS N-HEXANE.
6. LABEL CONSTRUCTION: WILL MEET THE DURABILITY REQUIREMENTS AND ALSO PROVIDES THE VISUAL CONSISTENCY WITH OTHER DEWALT BRAND PRODUCTS.
7. LABEL MUST SATISFY LUBRICATING OIL IMMERSION TEST PER UL969 OR CSA C22.2 # 0.15
8. LABEL MUST SATISFY 80°C MAX TEMPERATURE RATING PER UL969 OR CSA C22.2 #0.15.
9. LABEL MUST BE APPROVED FOR NON-DRY INDOOR USE PER UL969 AND CSA C22.2 NO. 0.15.
10. ALL SHIPPING BOXES AND ROLL CORES OR LABEL SHEETS MUST BE MARKED WITH VENDOR'S NAME, TRADE NAME, DATE OF MANUFACTURE AND MATERIAL IDENTIFICATION PER ES100135.

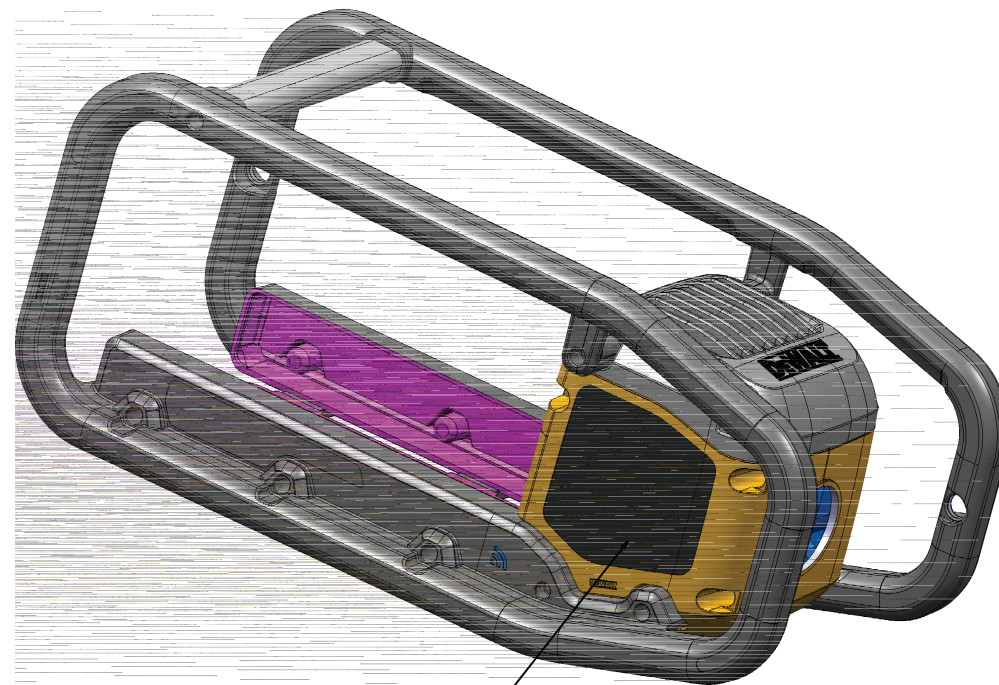

RATING LABEL

ISOMETRIC VIEW

DCPS320 POWERSHIFT POWERPACK
CONCRETE VIBRATOR

TYPE 1 **60V $\overline{=}$ (Max)**

Contains: FCC ID: YJ7-NA230951

Contains: IC: 9082A-NA230951



⚠ WARNING TO REDUCE THE RISK OF INJURY, USER MUST READ INSTRUCTION MANUAL. DO NOT USE HIGH PRESSURE CLEANING. DO NOT USE NEAR MOVING PARTS, MECHANISMS, OR RUNNING MACHINERY. ALWAYS USE PROPER EYE, EAR AND RESPIRATORY PROTECTION.

⚠ ADVERTENCIA PARA EL MANEJO SEGURO LEA EL MANUAL DE INSTRUCCIONES. NO USE LIMPIEZA A ALTA PRESIÓN. NO UTILIZAR CIRCA PIEZAS MÓVILES, MECANISMOS O MAQUINARIA EN FUNCIONAMIENTO. USE SÓLO CON ACCESORIOS APROBADOS. SIEMPRE USE PROTECCIÓN PARA LOS OJOS, AUDITIVA Y RESPIRATORIA ADECUADA.

⚠ AVERTISSEMENT AFIN DE RÉDUIRE LE RISQUE DE BLESSURE, L'UTILISATEUR DOIT LIRE LE GUIDE D'UTILISATION. NE PAS NETTOYER À HAUTE PRESSION. NE PAS UTILISER PRÈS DE PIÈCES MOBILES, DE MÉCANISMES OU DE MACHINERIE EN MARCHÉ. UTILISEZ SEULEMENT AVEC DES ACCESSOIRES APPROUVÉS. UTILISEZ TOUJOURS UNE PROTECTION OCULAIRE, AUDITIVE ET RESPIRATOIRE APPROPRIÉE.

MANUFACTURER'S CSA
IDENTIFICATION CODE
1 MM MAX.

NA411813

THIS DOCUMENT IS THE PROPERTY OF
STANLEY BLACK & DECKER INC.
THE CONTENTS OF THIS DOCUMENT
ARE CONFIDENTIAL AND CONSTITUTE
TRADE SECRETS PROPRIETARY TO
STANLEY BLACK & DECKER INC.
NEITHER THIS DOCUMENT NOR ITS'
CONTENTS SHALL BE DISCLOSED TO
ANY UNAUTHORIZED PERSON, COPIED
OR PUBLISHED WITHOUT PRIOR
WRITTEN CONSENT OF
STANLEY BLACK & DECKER INC.
COPYRIGHT © 2024
STANLEY BLACK & DECKER INC.

TOL UNLESS SPECIFIED

0 & 1 PLC DEC: ± 0.4

ANGLES: $\pm 1^\circ$

ALL DIMENSIONS mm

SIZE:



SHEET:

1 of 1

StanleyBlack&Decker

FOR ITEM DATA SEE PRINTED REPORT