



Nemko USA, Inc.
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024
Phone (858) 755-5525 Fax (858) 452-1810

CERTIFICATION TEST REPORT

In Accordance With:	FCC Part 15 Subpart C, 15.249 IC RSS-210 Issue 7 June 2007
Applicant:	Vitality, Inc. 1 Broadway 14th Floor Cambridge, MA 02142
Equipment Under Test : Model:	Reminder Light Transceiver Reminder Light
FCC ID:	YOC373200
Tested By:	Nemko USA Inc. 11696 Sorrento Valley Road, Suite F San Diego, CA 92121
Test Report:	2010 081515031 FCC
Date:	August 10, 2010
Project number:	47887-1
Nex Number:	151031
Total Number of Pages:	23

Section 1. Summary of Test Results

General

All measurements are traceable to national standards

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15; Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed:	Reminder Light Transceiver
Model:	Reminder Light
Specification:	FCC Part 15 Subpart C, 15.249 IC RSS-210 Issue 7 June 2007
Date Received in Laboratory:	August 5, 2010
Compliance Status:	Complies
Exclusions:	None
Non-compliances:	None



Report Release History

REVISION	DATE	COMMENTS
-	August 10, 2010	Prepared By: Alan Laudani
-	August 10, 2010	Initial Release: Alan Laudani

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TESTED BY:

Alan Laudani, EMC Test Engineer

Date: August 10, 2010



TABLE OF CONTENTS

Section 1. Summary of Test Results.....	2
Report Release History	3
Section 2: Equipment Under Test	5
2.1 Product Identification.....	5
2.2 Samples Submitted for Assessment.....	5
2.3 Theory of Operation	6
2.4 Technical Specifications of the EUT	6
Section 3: Test Conditions	7
3.1 Specifications	7
3.2 Deviations From Laboratory Test Procedures	7
3.3 Test Environment	7
3.4 Test Equipment	8
Section 4: Observations	9
4.1 Modifications Performed During Assessment.....	9
4.2 Record Of Technical Judgements.....	9
4.3 EUT Parameters Affecting Compliance	9
4.4 Tests Deleted	9
4.5 Additional Observations	9
Section 5: Results Summary	10
5.1 Results Summary.....	10
Appendix A: Test Results	A1
Power line Conducted Emissions	A1
Occupied Bandwidth	A3
Duty Cycle Test.....	A6
Field Strength of Emissions	A8
Emissions radiated outside of the band	A8
Fixed Point-to-Point Operation.....	A10
APPENDIX B.....	B1
B. Radiated Emissions Measurement Uncertainties.....	B1
APPENDIX C	C1
C. Nemko USA, Inc. Test Equipment & Facilities Calibration Program	C1
APPENDIX D	C3
D. NVLAP Accreditation	C3

Section 2: Equipment Under Test

2.1 Product Identification

The Equipment Under Test for compliance with FCC Part 15.249 was identified as follows:

EUT:	Reminder Light Transceiver
Model:	Reminder Light
Serial Number:	GA70054

2.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

DEVICE	MANUFACTURER MODEL # SERIAL #	POWER CABLE
EUT - Reminder Light Transceiver	Vitality, Inc. Model: Reminder Light Serial #: GA70054	2 PRONG INPUT

CONNECTION	I/O CABLE
No connections	None - wireless



2.3 Theory of Operation

The Reminder Light is a Reminder Light Transceiver to be used as a remote control. The Reminder Light works at one frequency, 907.9 MHz. . A designated test unit was provided for with continuous transmitting. As a handheld device, it was tested in all three axes.

The EUT's performance during test was evaluated against the performance criterion specified by applicable test standards. Performance results are detailed in the test results section of this report.

2.4 Technical Specifications of the EUT

Manufacturer:	Vitality, Inc.
Operating Frequency:	907.9MHz in the 902 to 928 MHz Band
Number of Operating Frequencies:	1
Measured Field Strength:	85.9 dBµV/m at 3m
Modulation:	GFSK
Antenna Data:	¼ wavelength wire soldered to circuit board
Antenna Connector:	None
Power Source:	120 Vac 60 Hz



Section 3: Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
5725-5850 MHz and 24.0-24.25 GHz bands.

IC RSS-210 Issue 7 June 2007

Low-power Licence-exempt Radio-communication Devices (All Frequency
Bands): A2.9

IC RSS-Gen Issue 2 June 2007

General Requirements and Information for the Certification of Radio-
communication Equipment

3.2 Deviations From Laboratory Test Procedures

No deviations from Laboratory Test Procedure

3.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	16 – 20 °C
Humidity range	60-66 %
Pressure range	86 - 106 kPa

3.4 Test Equipment

Nemko ID	Device	Manufacturer	Model	Serial Number	Cal Date	Cal Due Date
111	Antenna, LPA	Electrometrics	LPA-25	1382	10/20/2008	10/20/2010
114	Antenna, Bicon	EMCO	3110	2997	3/5/2010	3/5/2012
317	Preamplifier	HP	8449A	2749A00167	5/7/2010	5/7/2011
752	Antenna, DRWG	EMCO	3115	4943	11/12/2008	11/12/2010
E1018	9kHz to 7GHz Spectrum Analyzer	Rohde & Schwarz	FSP7	835363/0003	1/22/2010	1/22/2011
E1019	Two Line V-Network	Rohde & Schwarz	ENV216	101045	3/12/2010	3/12/2011
898	EMI Receiver & filter set	HP	8546A	3625A00348	6/22/2010	6/22/2011
899	Filter Section	HP	85460A	3448A00288	6/22/2010	6/22/2011
813	Multimeter	Fluke	111	78130066	9/21/2009	9/21/2010
NA	Regulating Transformer	TDGC	0-250 Vac	NA	NCR	NCR

Registration of the OATS are on file with the Federal Communications Commission, under Registration Number 90579, the VCCI under registration number R-3027, and are also registered with Industry Canada under Site Numbers 2040B-1 and 2040B-2.



Section 4: Observations

4.1 Modifications Performed During Assessment

No modifications were performed during assessment.

4.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

4.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

4.4 Tests Deleted

No Tests were deleted from this assessment.

4.5 Additional Observations

There were no additional observations made during this assessment.



Section 5: Results Summary

This section contains the following:

FCC Part 15 Subpart C: §15.249

The column headed “Required” indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No: not applicable / not relevant

Y Yes: Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See section 4.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

5.1 Results Summary

FCC	Test Description	Required	Result
15.107 (a)	Power line Conducted Emissions – Receive or Stand-by Mode	Y	Pass
15.207 (a)	Power line Conducted Emissions -- Transmit Mode	Y	Pass
15.215 (c)	Occupied Bandwidth	Y	Pass
	Duty Cycle Test	Y	Pass
15.249 (a)	Field Strength of Emissions	Y	Pass
15.249 (d)	Spurious Emissions Outside of the band	Y	Pass
15.209 (a)			
15.249 (b)	Fixed Point-to-Point Operation	N	
15.107 (a)	Receiver Spurious Emissions	Y	Pass

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A1 of 25

Appendix A: Test Results

Power line Conducted Emissions

15.207(a)

Table 2 - AC Power Lines Conducted Emission Limits

Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Test Conditions:

Sample Number:	GA70054	Temperature:	22°C
Date:	August 6, 2010	Humidity:	55%
Modulation State:		Tester:	A. Laudani
		Laboratory:	NEMKO SR2

Test Parameters:

Peak RBW: 100kHz VBW: 100kHz

Quasi-Peak: RBW 9kHz, VBW 30 kHz


Average: RBW 9kHz, VBW 30 kHz

Quasi-Peak Limit Blue Line, Average Limit Green Line


Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A2 of 25

Test Results: EUT Complies

Line Transmit

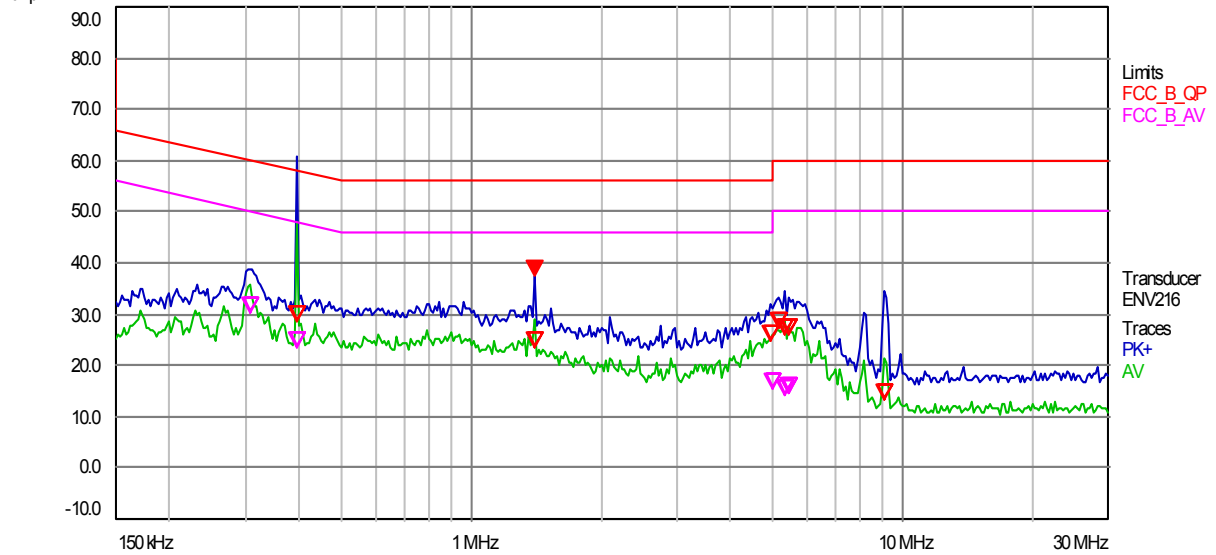

Neutral Transmit

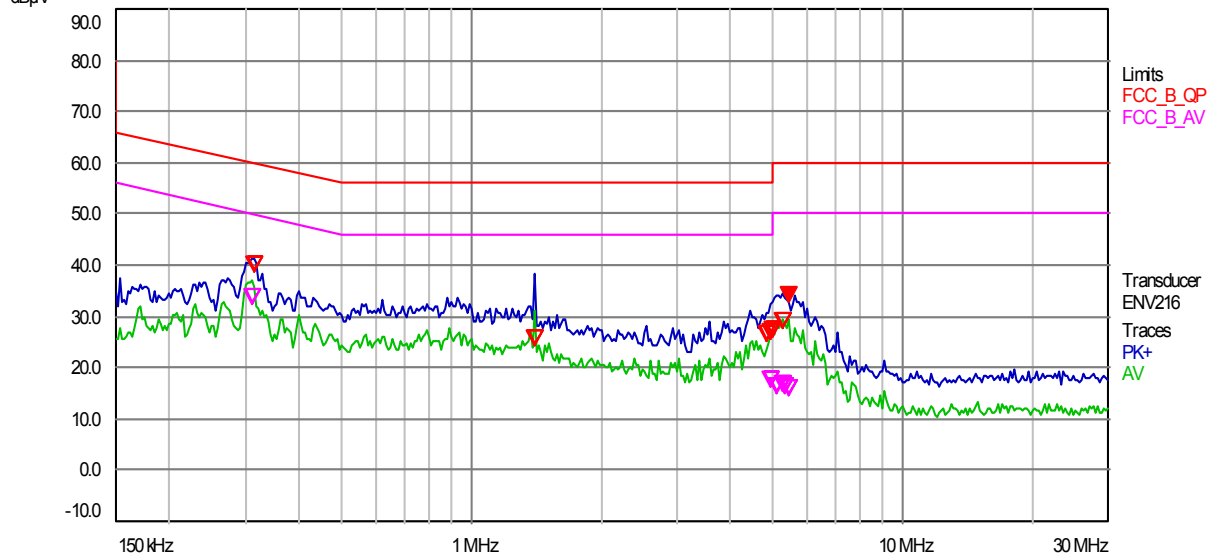

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A3 of 25

Occupied Bandwidth

4.6.1 Occupied Bandwidth

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

Clause 15.215(c); Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.



Test Conditions:

Sample Number:	GA70054	Temperature:	19 °C
Date:	August 6, 2010	Humidity:	66 %
Modulation State:	Modulated	Tester:	Alan Laudani
		Laboratory:	NOATS

Test Results: 96 kHz

- Span is wide enough to capture the channel transmission
- RBW is 1% of the span
- VBW is 3X RBW
- Sweep is auto
- Detector is Peak
- Trace is Max Hold
- A peak output max hold reading was taken, a display line was drawn 20 dB lower than peak level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.
- 99% bandwidth is determined by function within Spectrum Analyzer.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A4 of 25

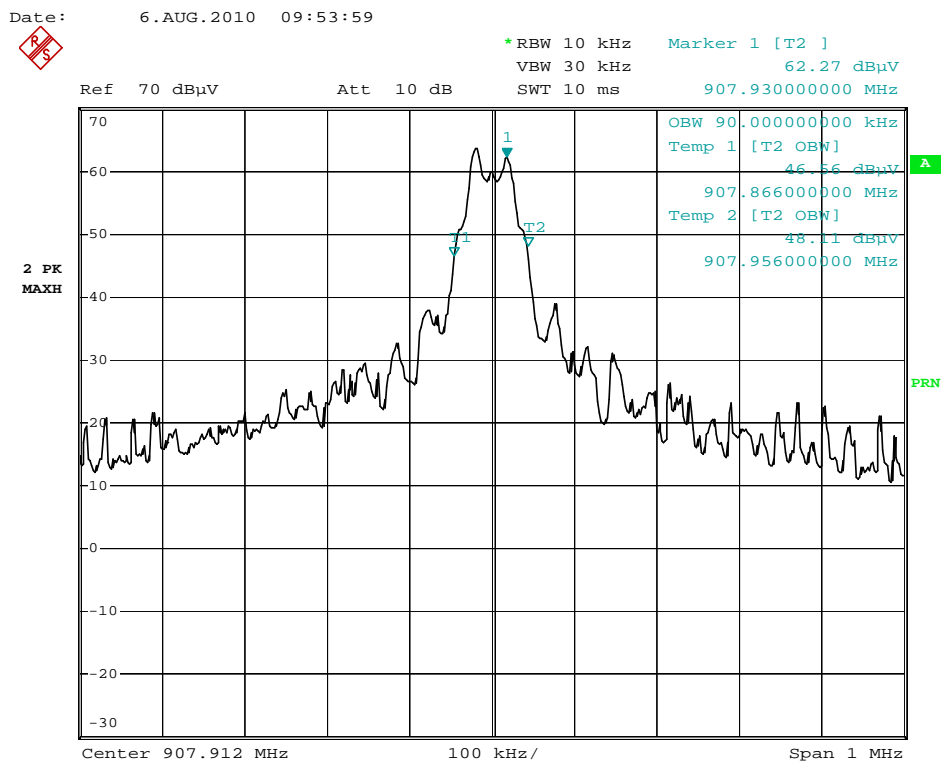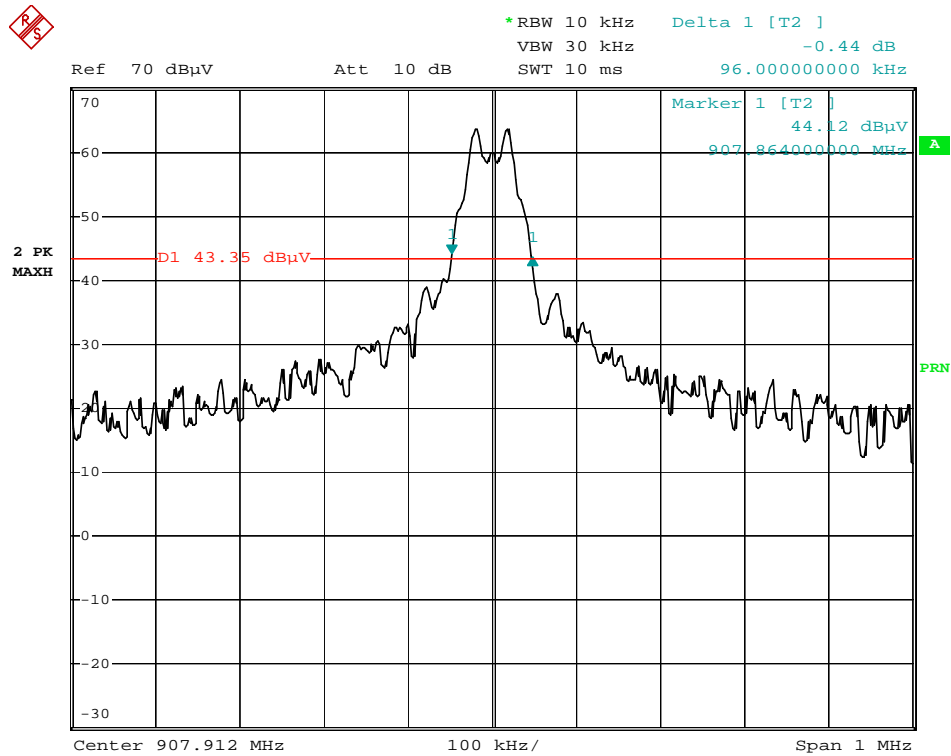

Date: 6.AUG.2010 09:54:55

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A5 of 25

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A6 of 25

Duty Cycle Test



Test Conditions:

Sample Number:	GA70054	Temperature:	19 °C
Date:	August 6, 2010	Humidity:	66 %
Modulation State:	Modulated	Tester:	Alan Laudani
		Laboratory:	NOATS

Test Results: The modulation is Frequency Shift Keying

Duty cycle = 7 ms/100ms = 7%

Therefore Duty cycle factor is $20 \times \log(.07) = -23\text{dB}$, limited to -20 dB .

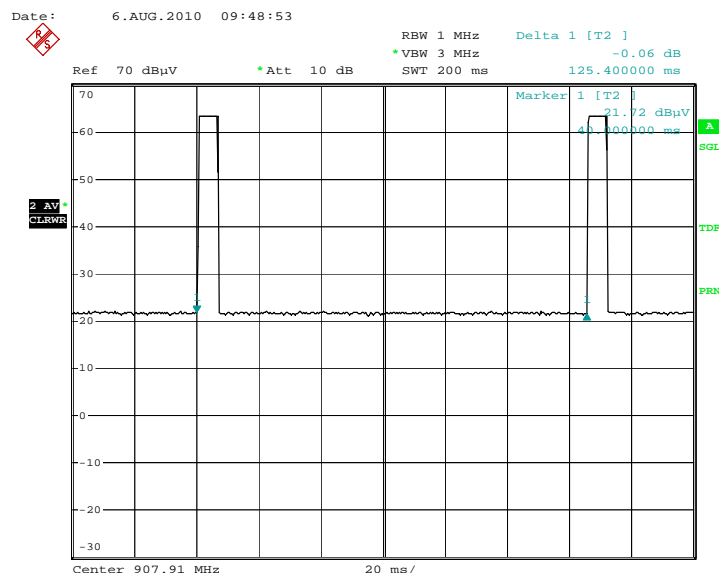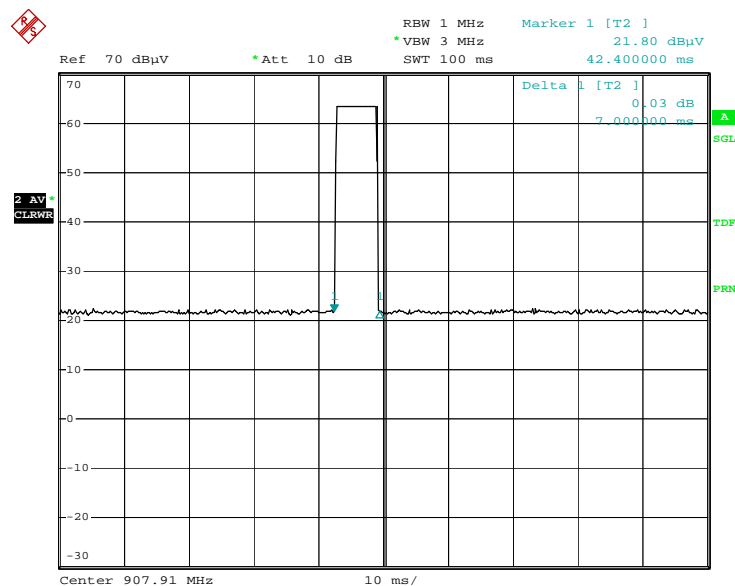

Date: 6.AUG.2010 09:49:36

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A7 of 25

no repeats within 100 ms.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A8 of 25

Field Strength of Emissions

15.249(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency (MHz)	Field strength of fundamental (mV/meter)	Field strength of harmonics (uV/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Emissions radiated outside of the band

15.249 (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Sec. 15.209, whichever is the lesser attenuation.

Test Conditions:

Sample Number:	GA70054	Temperature:	19 °C
Date:	August 6, 2010	Humidity:	66 %
Modulation State:	Modulated	Tester:	Alan Laudani
		Laboratory:	NOATS

Test Results:

See Table. EUT complies for fundamental power, band edges and spurious emissions.

Additional Observations:

- The Spectrum was searched from 30 MHz to the 10th Harmonic (9084 MHz), but no emissions within 20 dB of the limits were evident.
- All Measurements below 1 GHz were performed at 3m employing a CISPR quasi-peak detector
- Peak measurements above 1 GHz utilize a RBW of 1 MHz and a VBW of 3 MHz
- Power level investigated with varying input voltage +/- 15% of nominal voltage, no change in RF power resulted.
- The RF module was investigated in three axes, with the keyboard open and closed
- As Occupied BW = 148 kHz, to ensure output power is captured, RBW > OBW, used 200 kHz RBW, VBW = 300 kHz. Peak Hold measurements.
- Band edge emission measurements were taken against ambients and/or noise floor. The single channel emission does not affect band edges.

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A9 of 25

Limit = 50 mV/m

Measured Peak reading 56.3 dBuV + antenna factor 23.6 dB/m + Cable loss 6.0 dB =
corrected average reading = 85.9 dBuV/m

Radiated Emissions Data

Job # :	<u>47887-1</u>	Date :	<u>8-6-2010</u>
NEX #:	<u>151031</u>	Time :	<u>1300</u>
		Staff :	<u>aal</u>

Page 1 of 1

Client Name :	Vitality, Inc.
EUT Name :	REMINDER LIGHT
EUT Model # :	
EUT Serial # :	sn GA70054
EUT Config. :	Test mode

EUT Voltage :	120
EUT Frequency :	60
Phase:	1
NOATS	X
SOATS	
Distance < 1000 MHz:	3 m
Distance > 1000 MHz:	3 m

Specification :		CFR47 Part 15, Subpart C 15.249	
Loop Ant. #:	NA		
Bicon Ant.#:	114 3m	Temp. (°C) :	19
Log Ant.#:	111 3m	Humidity (%) :	66
DRG Ant. #	752	Spec Analyzer #:	898
Cable LF#:	NOATS	Analyzer Display #:	898
Cable HF#:	40ft blue	Quasi-Peak Detector #:	898
Preamp LF#:	NA	Preselector #:	899
Preamp HF#	317		Meas

Quasi-Peak	RBW: 120 kHz
	Video Bandwidth 300 kHz
Peak	RBW: 1 MHz
	Video Bandwidth 3 MHz
Average	RBW: 1 MHz
	Video Bandwidth 10 Hz

Measurements below 1 GHz are Quasi-Peak values, unless otherwise stated.

Measurements above 1 GHz are Average values, unless otherwise stated.

[illegible]

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A10 of 25

Fixed Point-to-Point Operation

15.249 (b) Fixed, point-to-point operation as referred to in this paragraph shall be limited to systems employing a fixed transmitter transmitting to a fixed remote location. Point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information are not allowed. Fixed, point-to-point operation is permitted in the 24.05–24.25 GHz band subject to the following conditions:

(1) The field strength of emissions in this band shall not exceed 2500 millivolts/meter.

(2) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.001\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(3) Antenna gain must be at least 33 dBi. Alternatively, the main lobe beamwidth must not exceed 3.5 degrees. The beamwidth limit shall apply to both the azimuth and elevation planes. At antenna gains over 33 dBi or beamwidths narrower than 3.5 degrees, power must be reduced to ensure that the field strength does not exceed 2500 millivolts/meter.

Test Conditions:

Sample Number:		Temperature:	
Date:		Humidity:	
Modification State:		Tester:	Alan Laudani
		Laboratory:	Nemko

Test Results: Not Applicable, EUT is not Point-to-Point.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A1 of 25

APPENDIX B

B. Radiated Emissions Measurement Uncertainties

1. Introduction

ISO/IEC 17025:2005 and ANSI/NCSL Z540.3: 2006 require that all measurements contained in a test report be "traceable". "Traceability" is defined in the *International Vocabulary of Basic and General Terms in Metrology* (ISO: 1993) as: "the property of the result of a measurement... whereby it can be related to stated references, usually national or international standards, through an unbroken chain of comparisons, *all having stated uncertainties*".

The purposes of this Appendix are to "state the *Measurement Uncertainties*" of the conducted emissions and radiated emissions measurements contained in Section 5 of this Test Report, and to provide a practical explanation of the meaning of these measurement uncertainties.

2. Statement of the Worst-Case Measurement Uncertainties for the Conducted and Radiated Emissions Measurements Contained in This Test Report

Table 1: Worst-Case Expanded Uncertainty "U" of Measurement for a k=2 Coverage Factor

Radiated Emissions Measurement Detection Systems	Applicable Frequency Range	"U" for a k=2 Coverage Factor
Spectrum Analyzer with QPA & Preamplifier	30 MHz - 200 MHz	+3.9 dB, -4.0 dB
Spectrum Analyzer with QPA & Preamplifier	200 MHz-1000 MHz	+/- 3.5 dB
Spectrum Analyzer with Preamplifier	1 GHz - 18 GHz	+2.5 dB, -2.6 dB
Spectrum Analyzer with Preamplifier	18 GHz - 40 GHz	+/- 3.4 dB

NOTES:

1. Applies to 3 and 10 meter measurement distances
2. Applies to all valid combinations of Transducers (i.e. LISNs, Line Voltage Probes, and Antennas, as appropriate)
3. Excludes the Repeatability of the EUT

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	A2 of 25

3. Practical Explanation of the Meaning of Radiated Emissions Measurement Uncertainties

In general, a "Statement of Measurement Uncertainty" means that with a certain (specified) confidence level, the "true" value of a measurand will be between a (stated) upper bound and a (stated) lower bound.

In the specific case of EMC Measurements in this test report, the measurement uncertainties of the conducted emissions measurements and the radiated emissions measurements have been calculated in accordance with the method detailed in the following documents:

- o *ANSI Z540.2 (2002) Guide to the Expression of Uncertainty in Measurement*
- o NIS 81:1994, *The Treatment of Uncertainty in EMC Measurements* (NAMAS, 1994)
- o NIST Technical Note 1297(1994), *Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results* (NIST, 1994)

The calculation method used in these documents requires that the stated uncertainty of the measurements be expressed as an "expanded uncertainty", U , with a $k=2$ coverage factor. The practical interpretation of this method of expressing measurement uncertainty is shown in the following example:

EXAMPLE: Assume that at 39.51 MHz, the (measured) radiated emissions level was equal to +26.5 dBuV/m, and that the +/- 2 standard deviations (i.e. 95% confidence level) measurement uncertainty was +/- 3.4 dB.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	C1 of 25

APPENDIX C

C. Nemko USA, Inc. Test Equipment & Facilities Calibration Program

Nemko USA, Inc. operates a comprehensive Periodic Calibration Program in order to ensure the validity of all test data. Nemko USA's Periodic Calibration Program is fully compliant to the requirements of NVLAP Policy Guide PG-1-1988, ANSI/NCSL Z540.3: 2006, ISO 10012:2003, ISO/IEC 17025:2005, and ISO-9000: 2000. Nemko USA, Inc.'s calibrations program therefore meets or exceeds the US national commercial and military requirements [N.B. ANSI/NCSL Z540.1-1994 replaced MIL-STD-45662A].

Specifically, all of Nemko USA's *primary reference standard devices* (e.g. vector voltmeters, multimeters, attenuators and terminations, RF power meters and their detector heads, oscilloscope mainframes and plug-ins, spectrum analyzers, RF preselectors, quasi-peak adapters, interference analyzers, impulse generators, signal generators and pulse/function generators, field-strength meters and their detector heads, etc.) and certain *secondary standard devices* (e.g. RF Preamplifiers used in CISPR 11/22 and FCC Part 15/18 tests) are periodically recalibrated by:

- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratories by NIST; or,
- A Nemko USA-approved independent (third party) metrology laboratory that uses NIST-traceable standards and that is ISO Guide 25-accredited as a calibration laboratory by another accreditation body (such as A2LA) that is mutually recognized by NIST; or,
- A manufacturer of Measurement and Test Equipment (M&TE), if the manufacturer uses NIST-traceable standards and is ISO Guide 25-accredited as calibration laboratory either by NIST or by another accreditation body (such as A2LA) that is mutually recognized by NIST; or
- A manufacturer of M&TE (or by a Nemko USA-approved independent third party metrology laboratory) that is not ISO Guide 25-accredited. (In these cases, Nemko USA conducts an annual audit of the manufacturer or metrology laboratory for the purposes of proving traceability to NIST, ensuring that adequate and repeatable calibration procedures are being applied, and verifying conformity with the other requirements of ISO Guide 25).

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
August 10, 2010	Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	2010 081515031 FCC	C2 of 25

In all cases, the entity performing the Calibration is required to furnish Nemko USA with a calibration test report and/or certificate of calibration, and a "calibration sticker" on each item of M&TE that is successfully calibrated.

Calibration intervals are normally one year, except when the manufacture advises a shorter interval or if US Government directives or client requirements demand a shorter interval. Items of instrumentation/related equipment which fail during routine use, or which suffer visible mechanical damage (during use or while in transit), are sidelined pending repair and recalibration. (Repairs are carried out either in-house [if minor] or by a Nemko USA-approved independent [third party] metrology laboratory, or by the manufacturer of the item of M&TE).

Each antenna used for CISPR 11 and CISPR 22 and FCC Part 15 and Part 18 radiated emissions testing (and for testing to the equivalent European Norms) is calibrated annually by either a NIST (or A2LA) ISO Standard 17025-Accredited third-party Antenna Calibration Laboratory or by the antenna's OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory. The antenna calibrations are performed using the methods specified in Annex G.5 of CISPR 16-1(2003) or ANSI C63.5-2004, including the "Three-Antenna Method". Certain other kinds of antennas (e.g. magnetic-shielded loop antennas) are calibrated annually by either a NIST (or A2LA) ISO Standard 17025-accredited third-party antenna calibration laboratory, or by the antenna's OEM if the OEM is NIST or A2LA ISO Standard 17025-accredited as an antenna calibration laboratory using the procedures specified in the latest version of SAE ARP-958.

In accordance with FCC and other regulations, Nemko USA recalibrates its suite of antennas used for radiated emissions tests on an annual basis. These calibrations are performed as a precursor to the FCC-required annual revalidation of the Normalized Site Attenuation properties of Nemko USA's Open Area Test Site. Nemko USA, Inc. uses the procedures given in both Sub clause 16.6 and Annex G.2 of CISPR 16-1 (2003), and, ANSI C63.4-2003 when performing the normalized site attenuation measurements.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE August 10, 2010	DOCUMENT NAME Vitality, Inc. - Reminder Light - EMC Test Report FCC ID: YOC373200	DOCUMENT # 2010 081515031 FCC	PAGE D1 of 25

APPENDIX D
D. NVLAP Accreditation

United States Department of Commerce National Institute of Standards and Technology	
	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2005 <hr/>	
NVLAP LAB CODE: 200116-0	
Nemko USA, Inc. - San Diego EMC Division San Diego, CA	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i>	
2010-01-01 through 2010-12-31 <hr/> <i>Effective dates</i>	 <div style="display: inline-block; vertical-align: bottom; text-align: right;">  <i>Sally J. Bruce</i> <hr/> <i>For the National Institute of Standards and Technology</i> </div>