

# TEST REPORT

of

FCC Part 22,24  
FCC ID : YP3-IT-109J001

Equipment Under Test : Dual Band Repeater  
Model Name : Dual Band Repeater  
Serial No. : 10270001  
Applicant : INNERTRON, INC  
Manufacturer : INNERTRON, INC  
Date of Test(s) : 2010-10-20~2010-11-12  
Date of Issue : 2010-11-15

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Feel Jeong

Date

2010-11-15

Approved By



Charles Kim

Date

2010-11-15

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

# INDEX

<u>TABLE OF CONTENTS</u>	Page
1. General Information -----	3
2. RF Output Power -----	6
3. Occupied Bandwidth 26 dB -----	16
4. Spurious Emissions At Antenna Terminal -----	24
5. Band Edge -----	37
6. Field Strength of Spurious Radiation -----	46
7. Frequency Stability -----	53
8. RF Exposure Evaluation -----	58

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General information

### 1.7. Testing laboratory

SGS Testing Korea Co., Ltd.

- 705, Dongchun-Dong Sooji-Gu, Yongin-Shi, Kyungki-Do, South Korea.
- Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

### 1.2. Details of applicant

Applicant : INNERTRON, INC

Address : 96 Block 5 Lot 663- Gojan-dong, Namdong-gu, Incheon-City 405-310, Korea

Contact Person : Jong U , Ha

Phone No. : 82 +31 816 1456

### 1.3. Description of EUT

<b>Kind of Product</b>	Dual Band Repeater
<b>Model Name</b>	Dual Band Repeater
<b>Serial Number</b>	10270001
<b>Power Supply</b>	AC 100 ~ 240 V
<b>Rated Power</b>	8 dBm(Uplink), 0 dBm(Downlink)
<b>Frequency Range</b>	824 MHz ~ 849 MHz(Uplink), 869 MHz ~ 894 MHz(Downlink) 1 850 MHz ~ 1 910 MHz(Uplink), 1 930 MHz ~ 1 990 MHz(Downlink)
<b>Antenna Gain</b>	8 dBi( 806 MHz – 894 MHz ) , 8 dBi ( 1 850 MHz – 1 990 MHz )

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.5. Test equipment list

Equipment	Manufacturer	Model	Cal Due.
Signal Generator	Agilent	E4438C	Mar. 31, 2011
Spectrum Analyzer	Agilent	E4440A	Mar. 31, 2011
Attenuator	Agilent	8498A	Apr. 01, 2011
High Pass Filter	Wainwright	WHK3.0/18G-10SS	Sep. 29, 2011
Band Reject Filter	Wainwright	WRCG824/849-814/85 960/10SS	Apr. 01, 2011
AC power Supply	KIKUSUI	PCR2000M	Jan. 07, 2011
Preamplifier	H.P.	8447F	Jun. 05, 2011
Test Receiver	R & S	ESU26	Apr. 15, 2011
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	Jun. 22, 2011
Horn Antenna	Rohde & Schwarz	HF 906	Oct. 08, 2011
Horn Antenna	SCHWARZBECK	BBH 9120D	Nov. 09, 2011
Dipole Antenna	VHAP/UHAP	975/958	Oct. 10, 2011
Antenna Master	EMCO	1050	N.C.R.
Turn Table	Daeil EMC	DI-1500	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	Jan. 27, 2011

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.6. Summary of test results

The EUT has been tested according to the following specifications:

APPLIED STANDARD : FCC Part 22,24		
Section in FCC part	Test Item	Result
§2.1053 §22.917(e) §24.238(a)	Spurious Radiated Emission	Compiled
§2.1046(a)	Conducted Output Power	Compiled
§2.1049(h) (i)	Occupied Bandwidth	Compiled
§2.1051 §22.917(e) §24.238(a)	Spurious Emission at Antenna Terminal	Compiled
§2.1055 §22.355 §24.235	Frequency Stability	Compiled
§22.917(e) §24.238(a)	Band Edge	Compiled
§1.1307(b)(1)	Maximum Permissible Exposure (Exposure of Humans to RF Fields)	Compiled

## 1.7. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL004286	Initial

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


## 2. RF Output Power

### 2.1. Limit

Requirements: CFR 47, Section §2.1046

### 2.2. Test Procedure

1. The transmitter was tested while in a continuous transmit mode.
2. The EUT was tuned to a low, middle, and high channel in both the downlink (base to mobile) and uplink (mobile to base) directions.
3. RF power output was measured with an RF input level at the point just before the compression point of the amplifier.
4. This is the point of maximum RF output power. If the RF input level is increased beyond this point, the amplifier gain (and consequently output power) is automatically reduced.



*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.3. Test Result

Ambient temperature : (24 ± 2) °C  
Relative humidity : 47 % R.H.

### Cellular band

#### Uplink mode

Test mode	Channel No.	Frequency (MHz)	Measured Channel Power	
			dB m	mW
Low	1013	824.70	8.13	6.50
Mid	363	835.89	8.91	7.78
High	777	848.31	10.73	11.83

#### Downlink mode

Test mode	Channel No.	Frequency (MHz)	Measured Channel Power	
			dB m	mW
Low	1013	869.70	0.01	1.00
Mid	363	880.89	1.02	1.26
High	777	893.31	0.22	1.05

### PCS band

#### Uplink mode

Test mode	Channel No.	Frequency (MHz)	Measured Channel Power	
			dB m	mW
Low	25	1 851.25	8.44	6.98
Mid	600	1 880.00	8.23	6.65
High	1175	1 908.75	8.65	7.33

#### Downlink mode


	Channel No.	Frequency (MHz)	Measured Channel Power	
			dB m	mW
Low	25	1 931.25	-0.46	0.90
Mid	600	1 960.00	0.39	1.09
High	1175	1 988.75	-1.39	0.73

Please refer to the following plots.


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## Cellular(Uplink)

### Low Channel

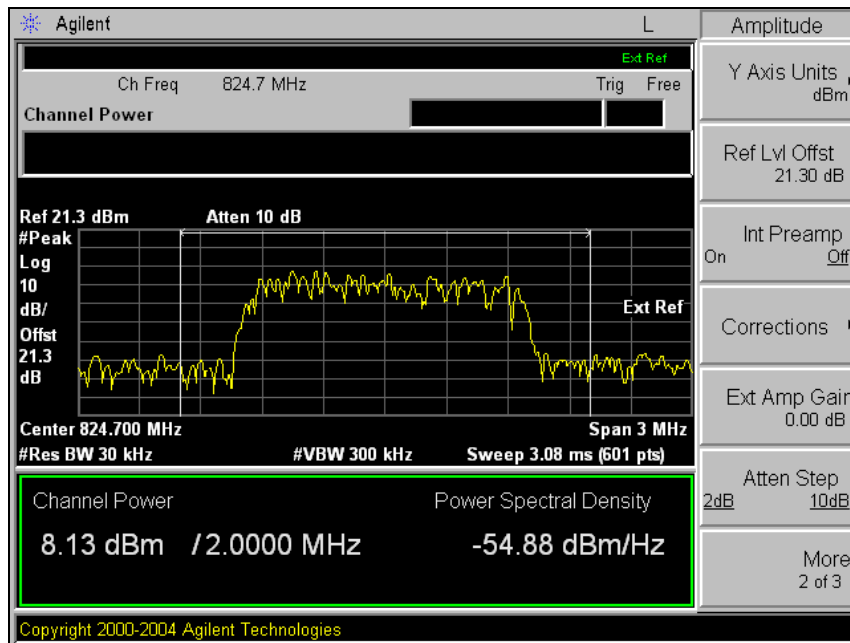


### Middle Channel

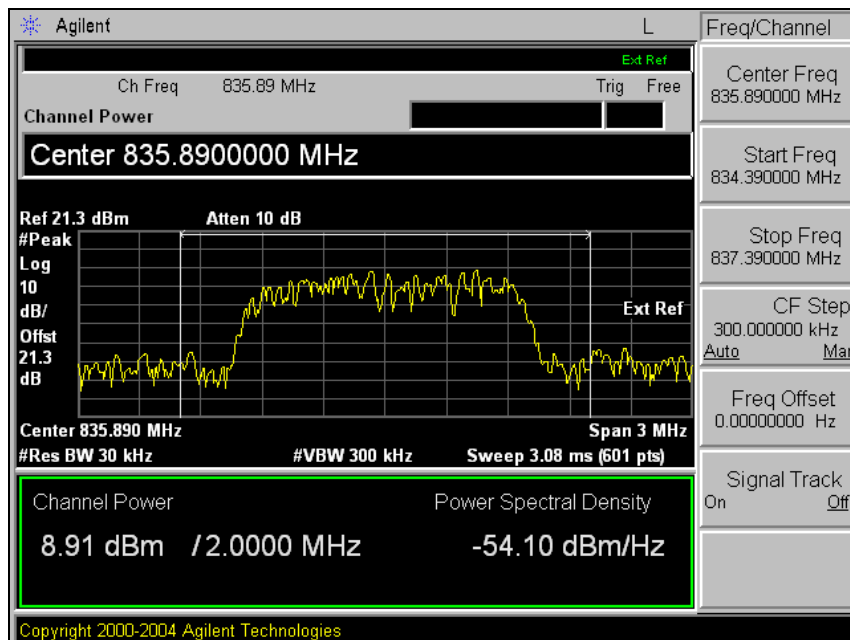

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.




## High Channel

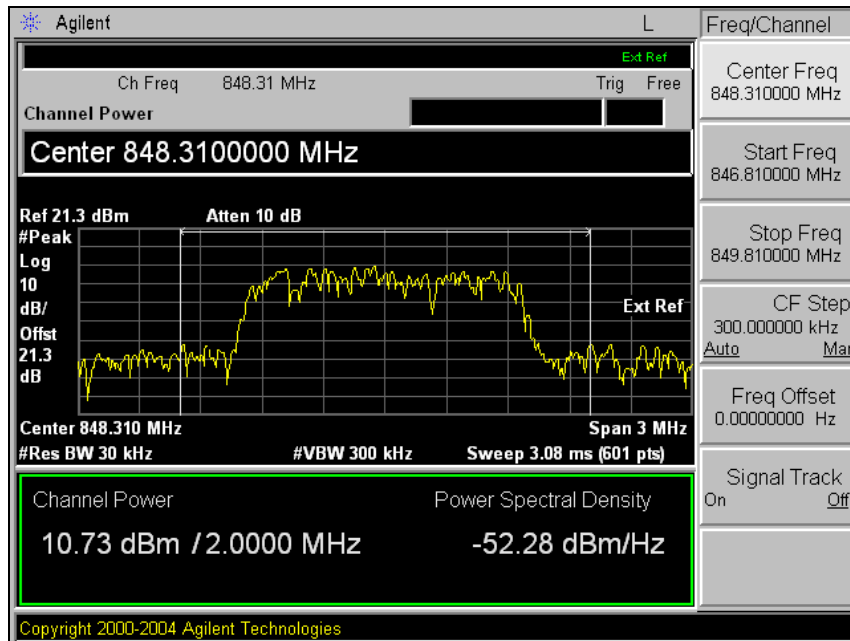


## Cellular(Downlink)

### Low Channel

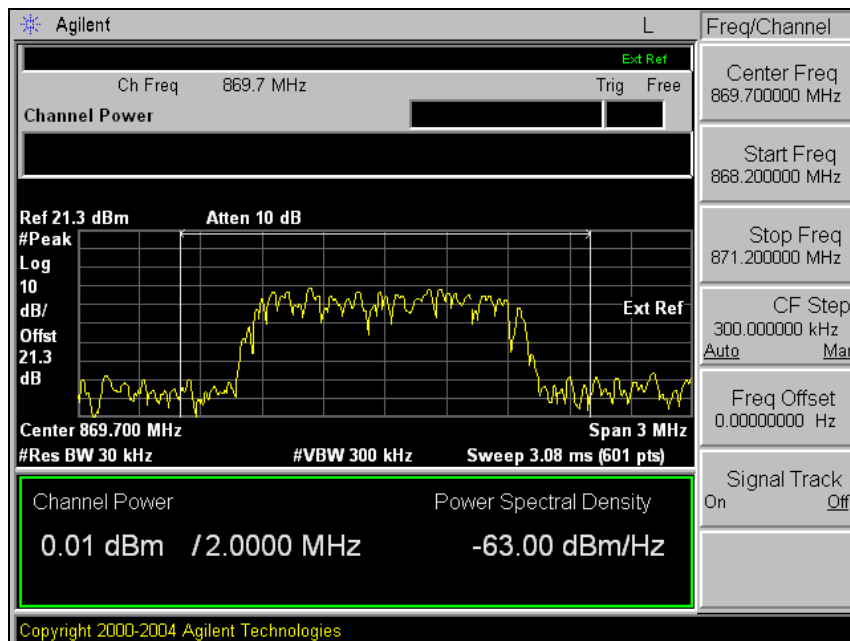


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

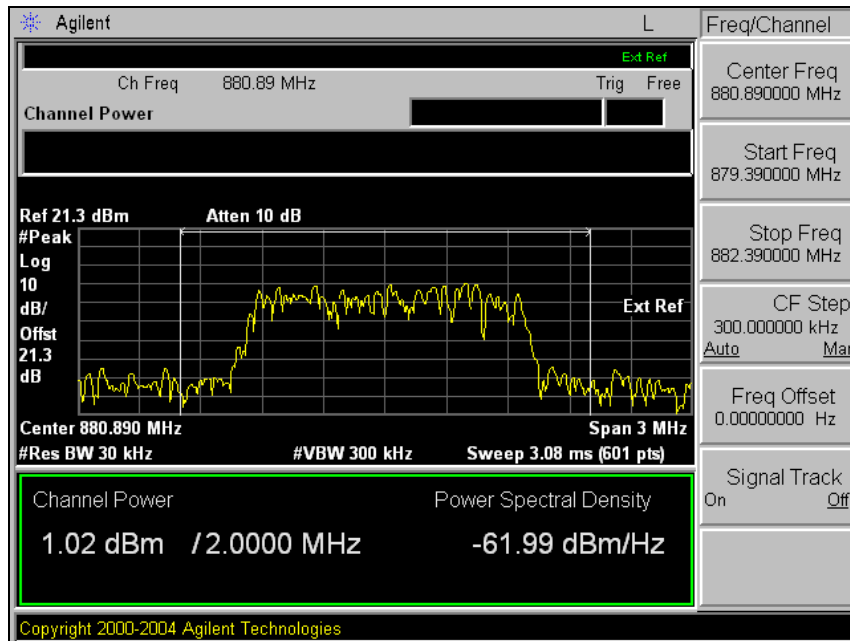


## High Channel

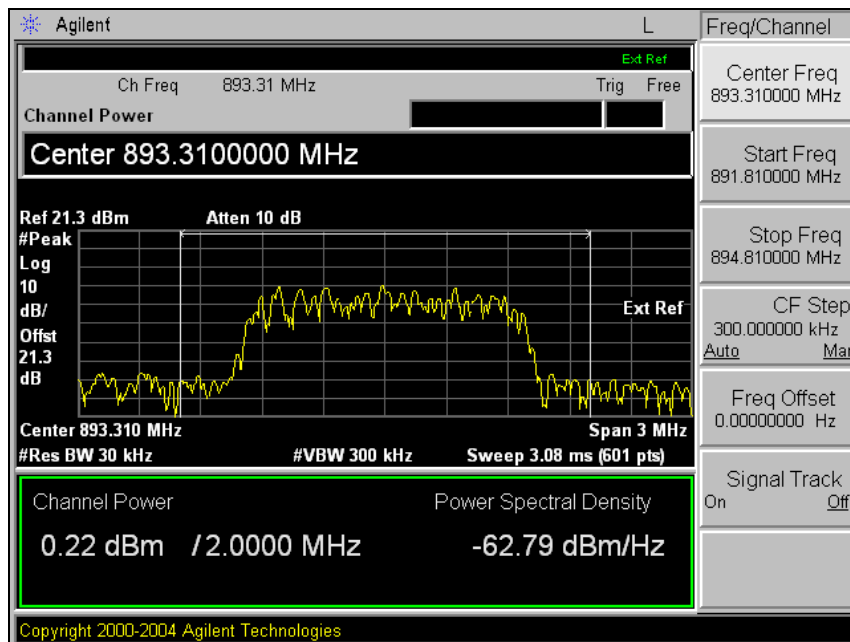


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Uplink)

### Low Channel

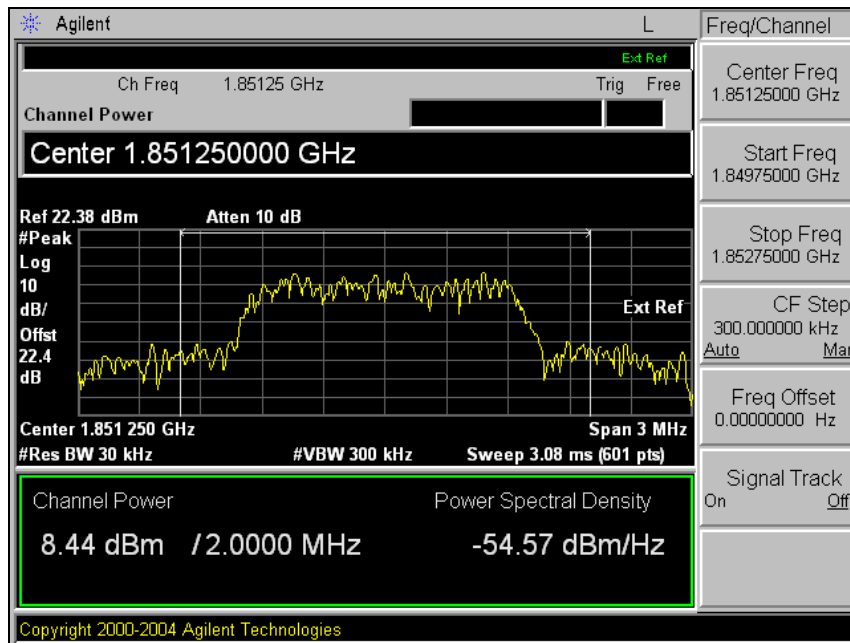


### Middle Channel

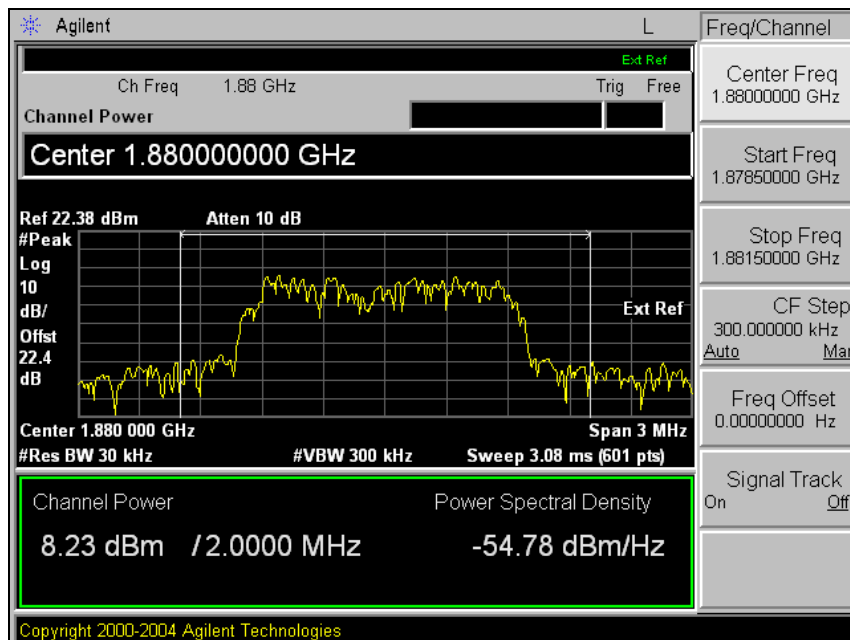


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

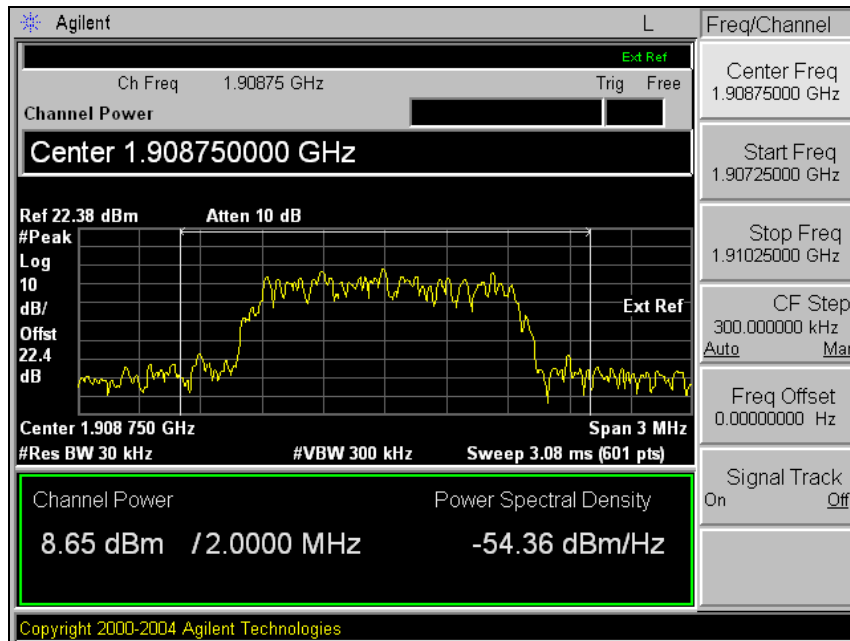


## PCS(Downlink)

### Low Channel

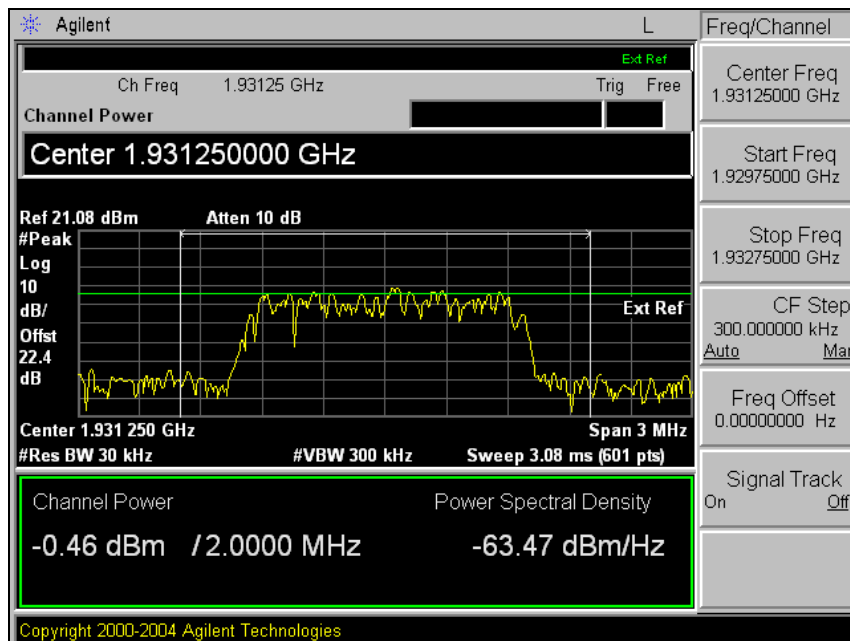


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

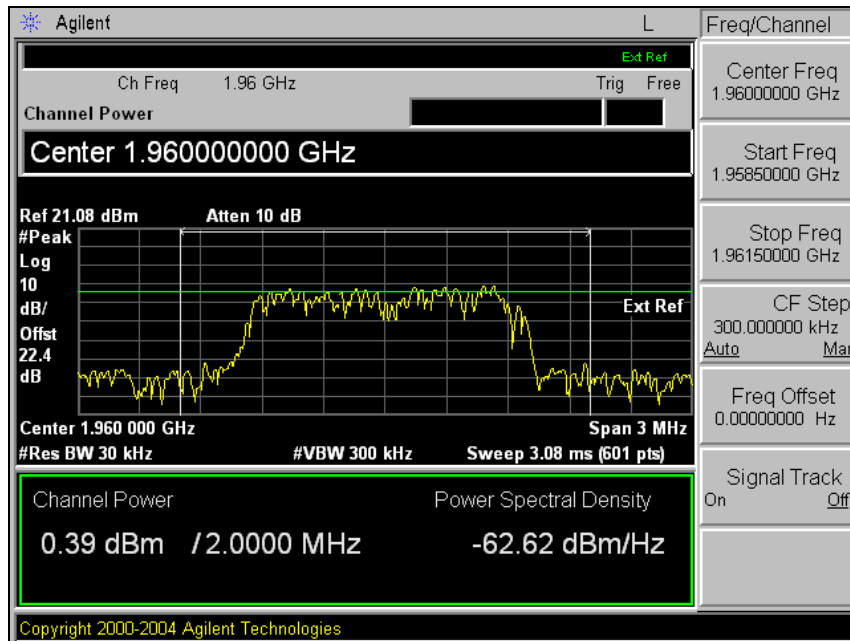

## High Channel

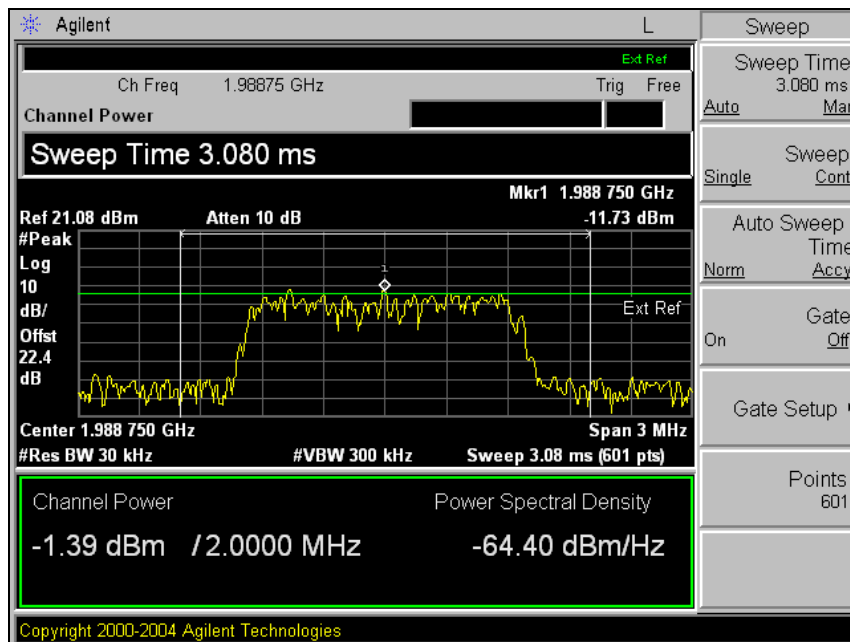


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Input Signal Output Power


### Uplink

#### Middle Channel

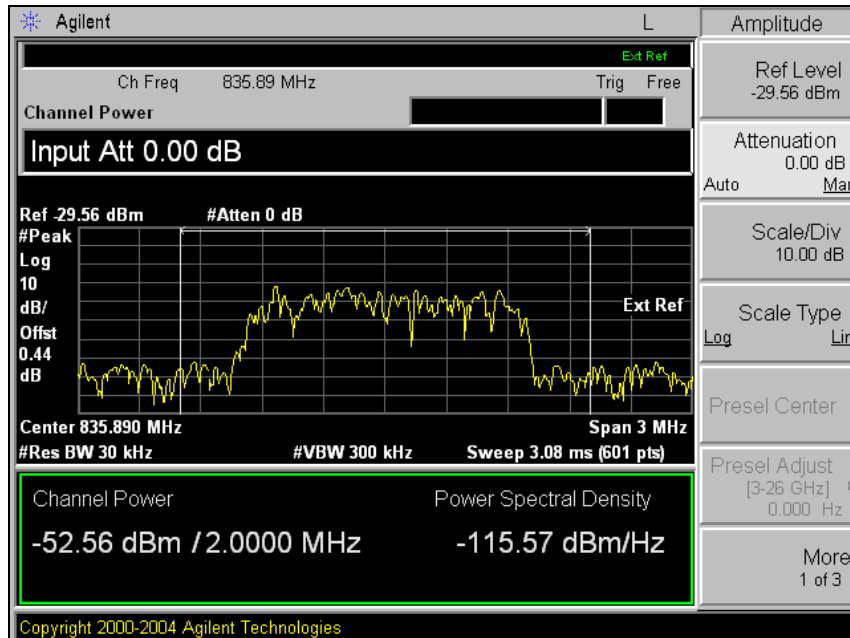

### Downlink


#### Middle Channel

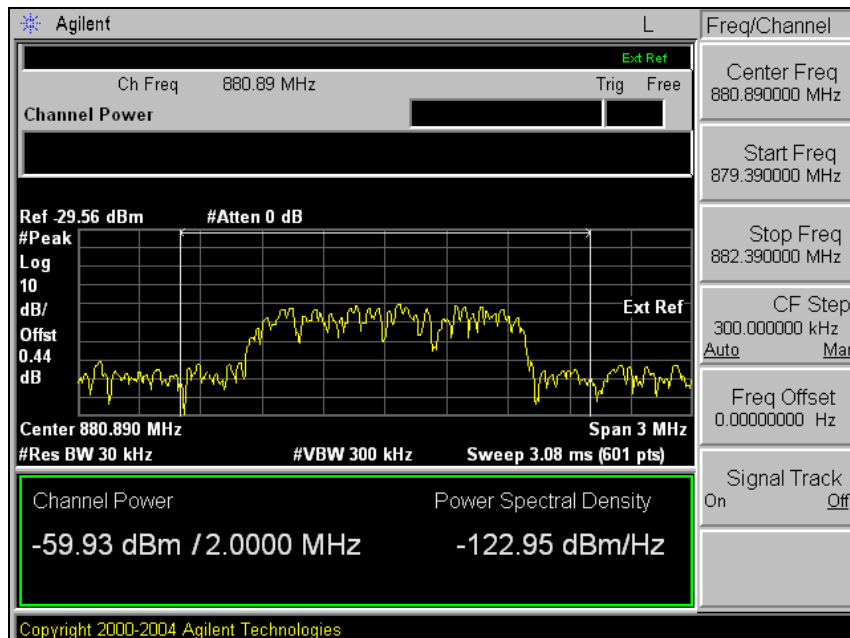

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## Uplink

### Middle Channel

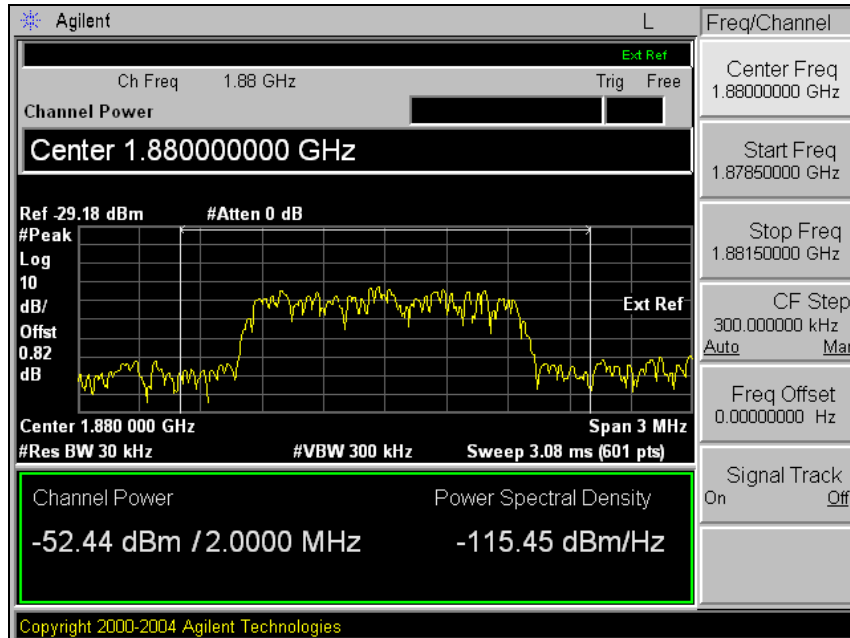

## Downlink

### Middle Channel

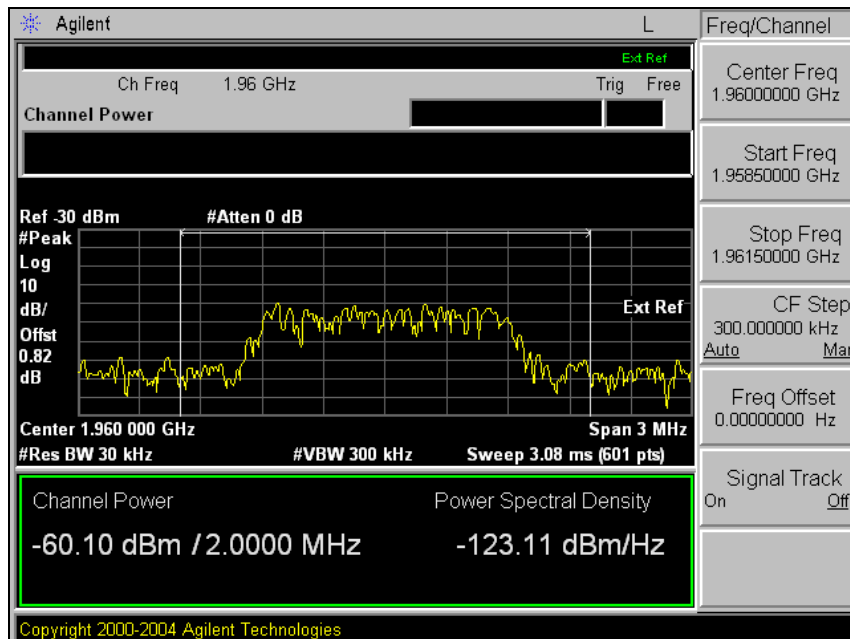

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


### 3. Occupied Bandwidth 26 dB

#### 3.1. Limit

Requirements: CFR 47, Section §2.1049.

#### 3.2. Test Procedure

1. The transmitter was tested while in a continuous transmit mode.
2. The EUT was tuned to a low, middle, and high channel in both the downlink (base to mobile) and uplink (mobile to base) directions.
3. The resolution bandwidth of the spectrum analyzer was set at 30 kHz.



*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*



### 3.3 Test Results

Ambient temperature : (24 ± 2) °C  
Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	Occupied Bandwidth 26 dB (MHz)
Cellular	Uplink	824.70	1.369
		835.89	1.378
		848.31	1.373
	Downlink	869.70	1.370
		880.89	1.372
		893.31	1.370


Band	Mode	Frequency (MHz)	Occupied Bandwidth 26 dB (MHz)
PCS	Uplink	1 851.25	1.376
		1 880.00	1.378
		1 908.75	1.364
	Downlink	1 931.25	1.378
		1 960.00	1.375
		1 988.75	1.374

Please refer to the following plots.


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## Cellular(Uplink)

### Low Channel

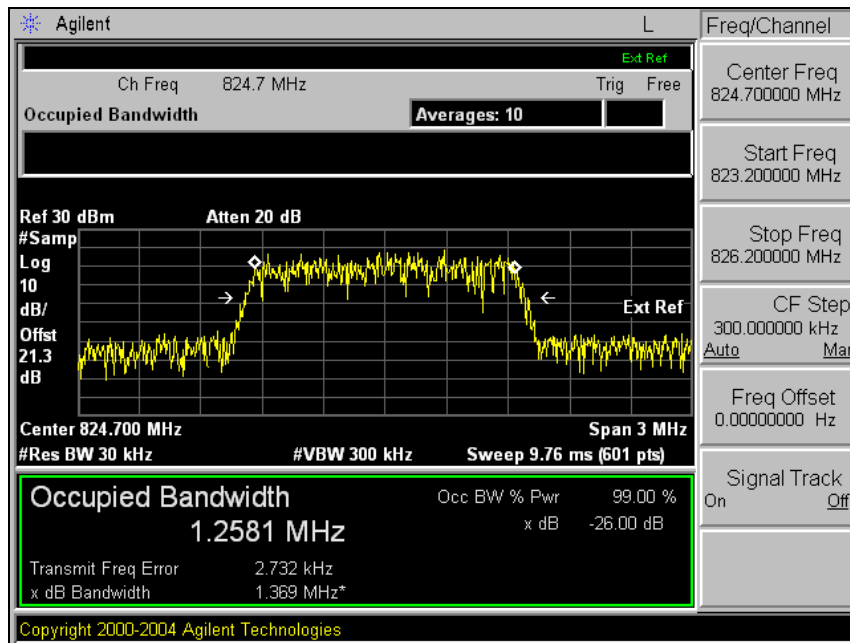


### Middle Channel

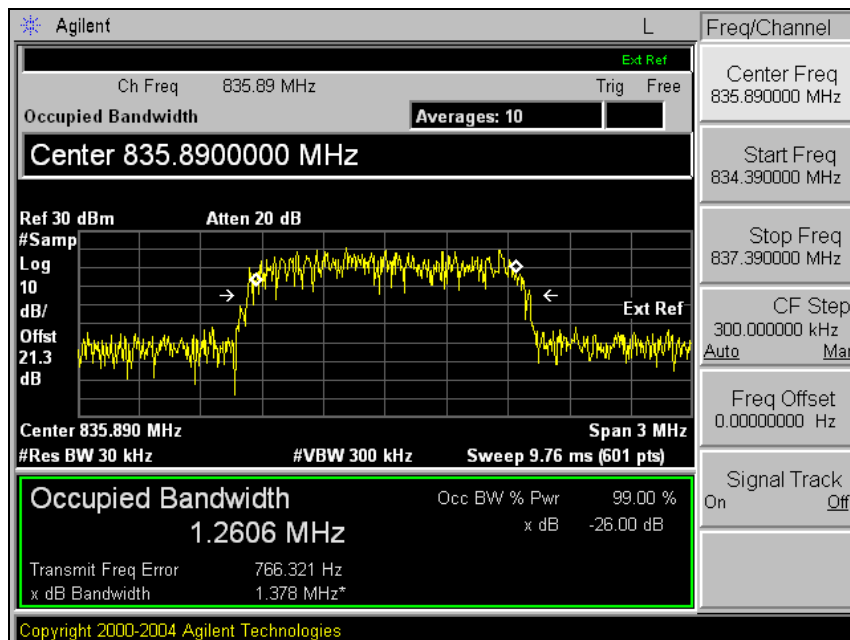


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

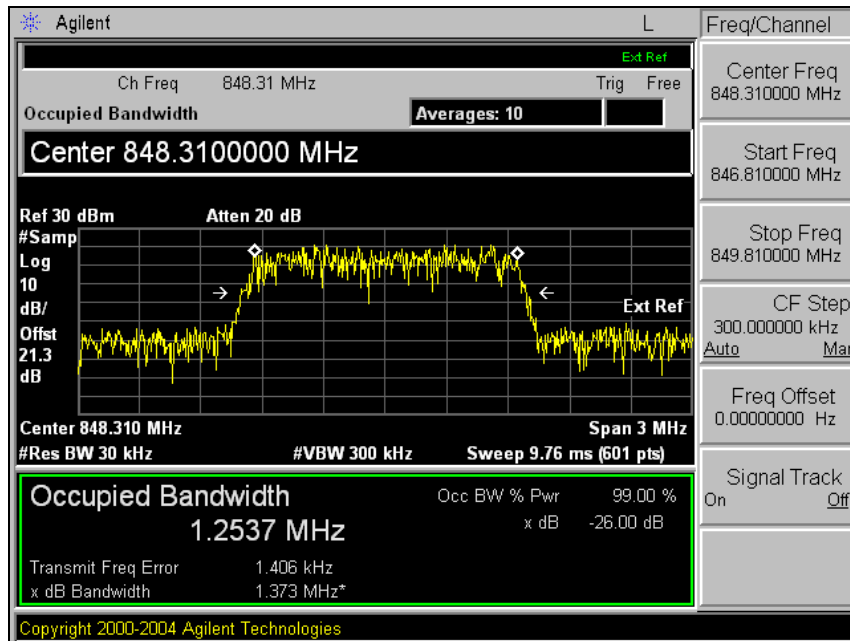


## Cellular(Downlink)

### Low Channel

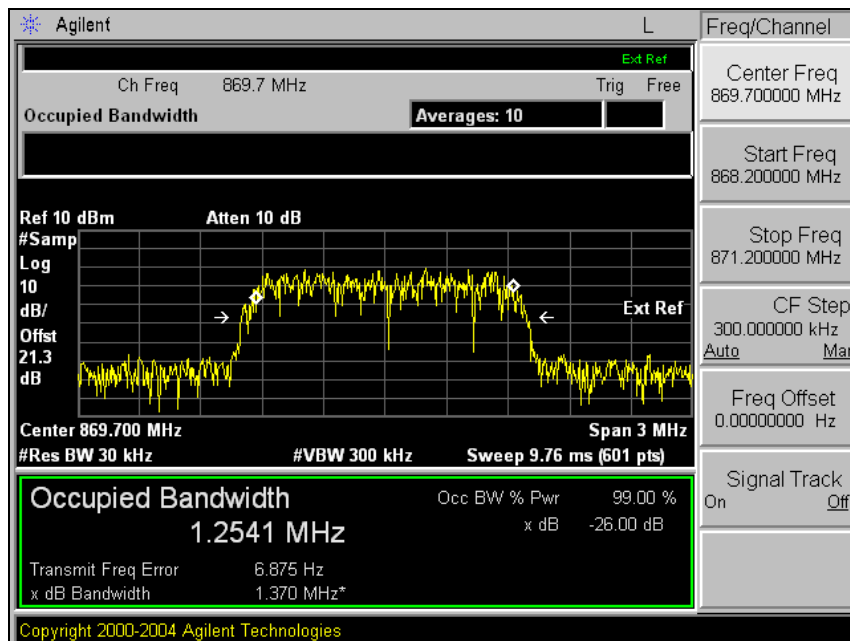


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

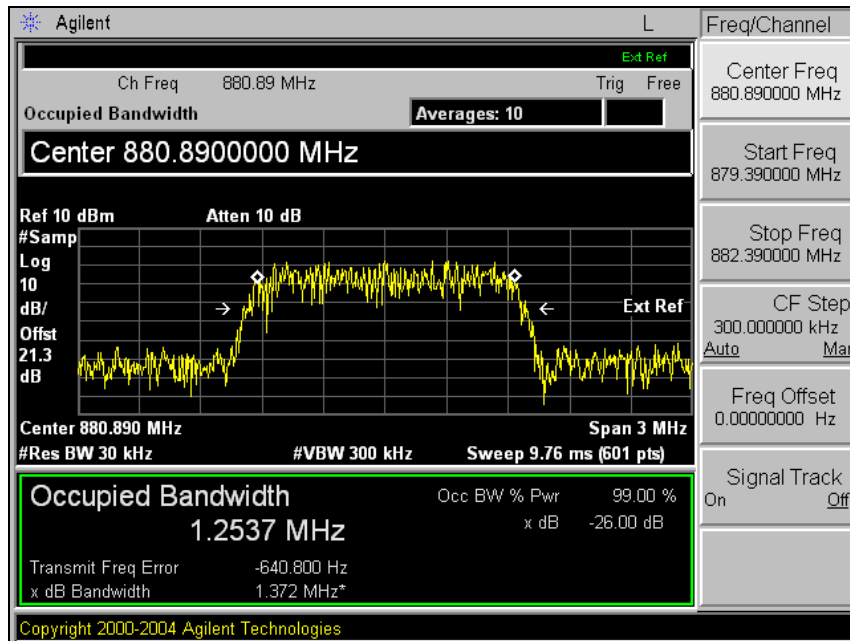


## High Channel

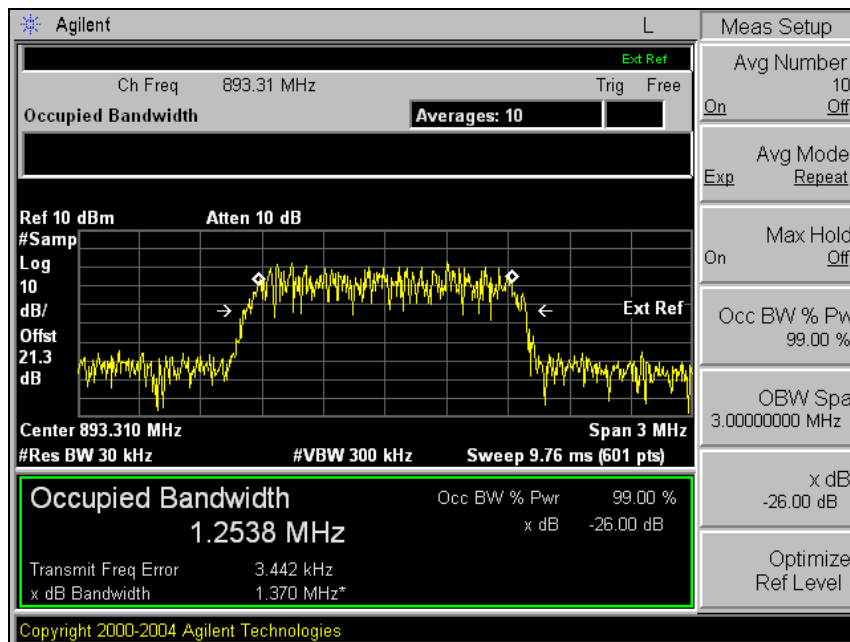


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Uplink)

### Low Channel

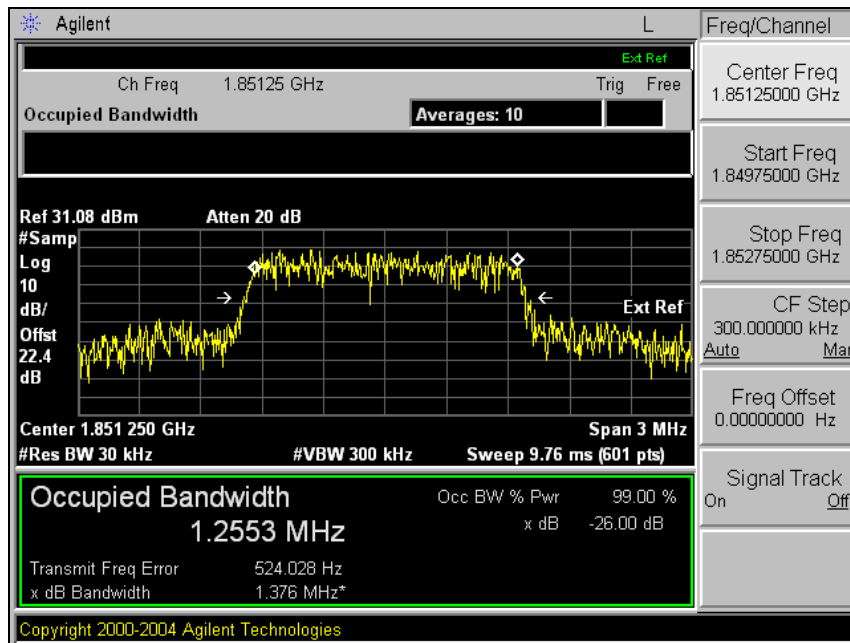


### Middle Channel

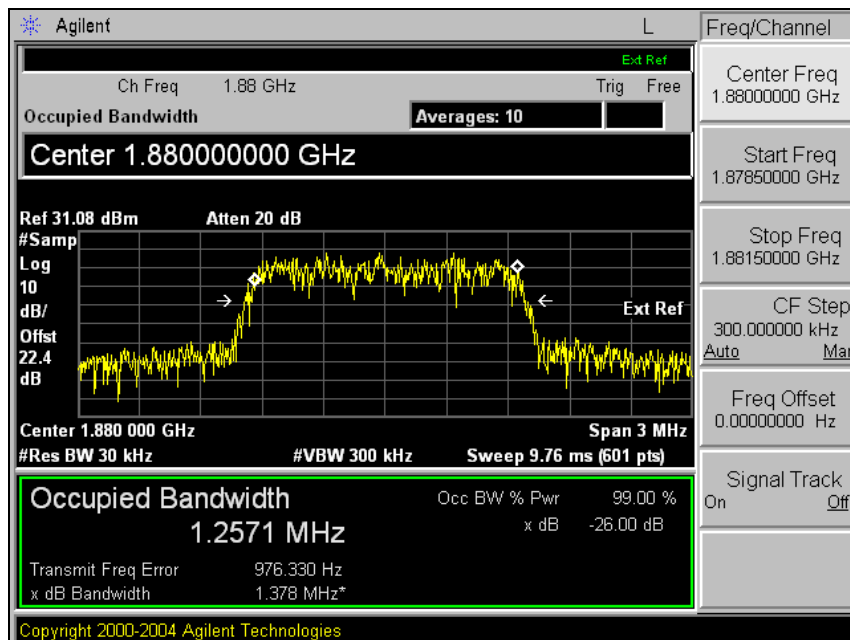


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

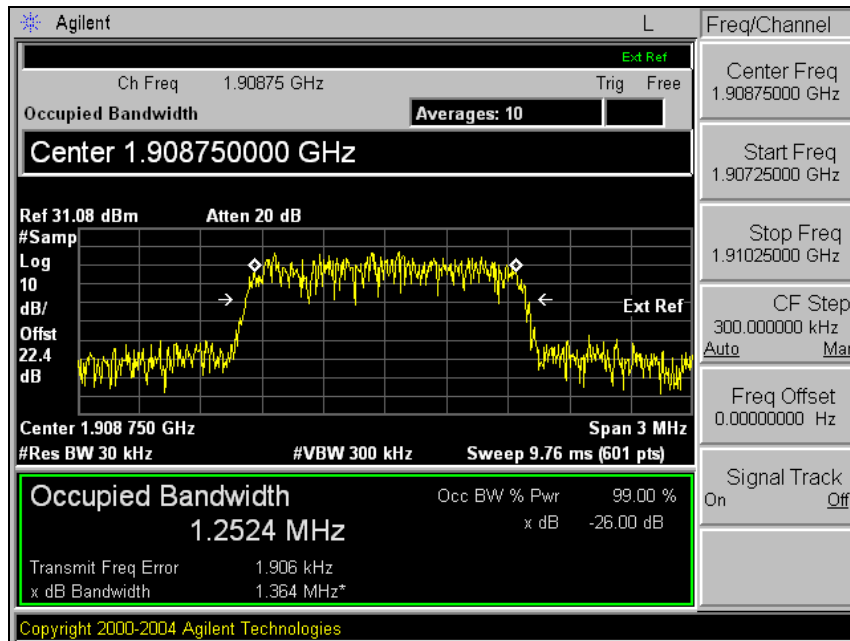


## PCS(Downlink)

### Low Channel

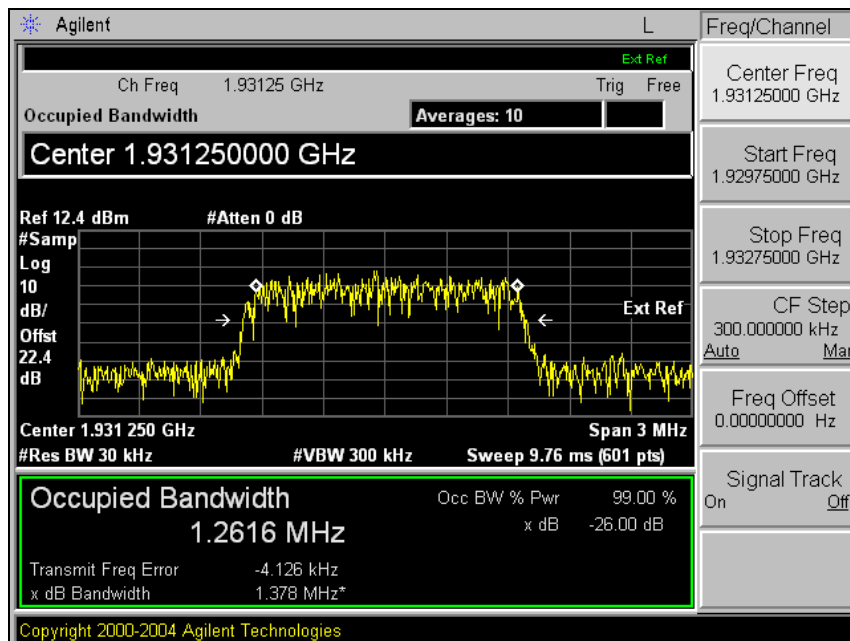


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

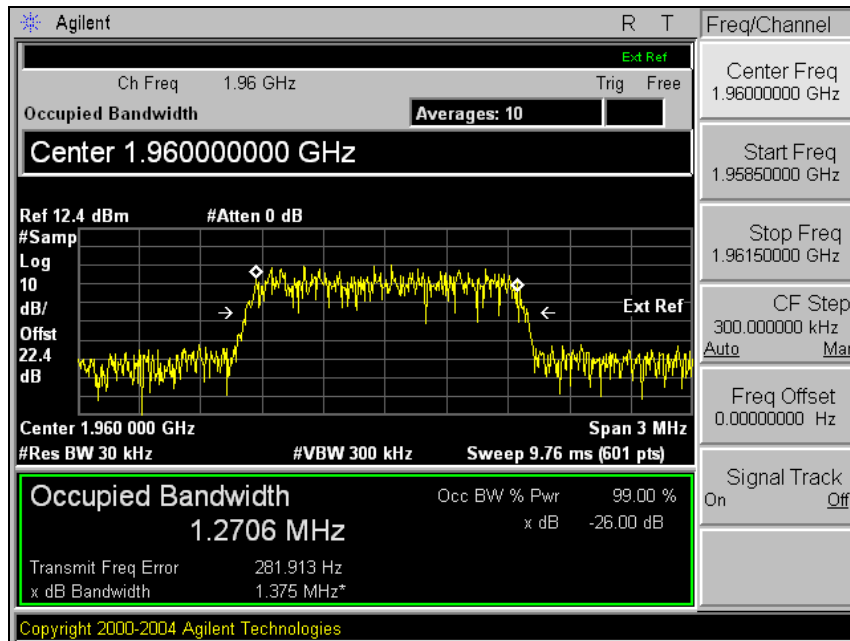

## High Channel

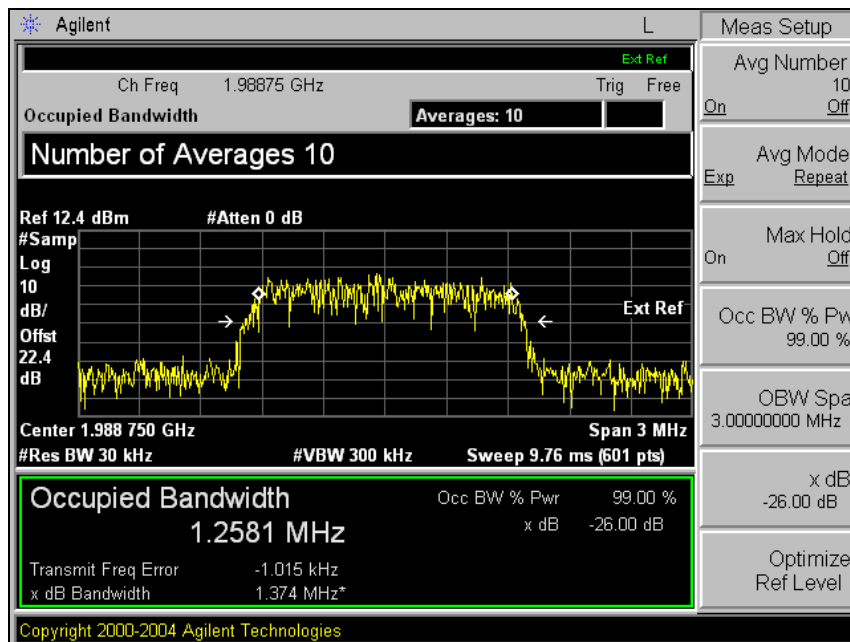

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 4. Spurious Emissions at Antenna Terminal


### 4.1. Limit

§ 22.917(e) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43 + 10\log(P)$  dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43 + 10\log(P)$  dB.

### 4.2. Test Procedure

1. The transmitter was tested while in a continuous transmit mode.
2. The EUT was tuned to a low, middle, and high channel in both the downlink (base to mobile) and uplink (mobile to base) directions.
3. Spurious Emission was tested under



### 4.3. Test Results

Ambient temperature :  $(24 \pm 2) ^\circ\text{C}$   
Relative humidity : 47 % R.H.


Please refer to the following plots.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*




## Cellular(Uplink)

Low Channel

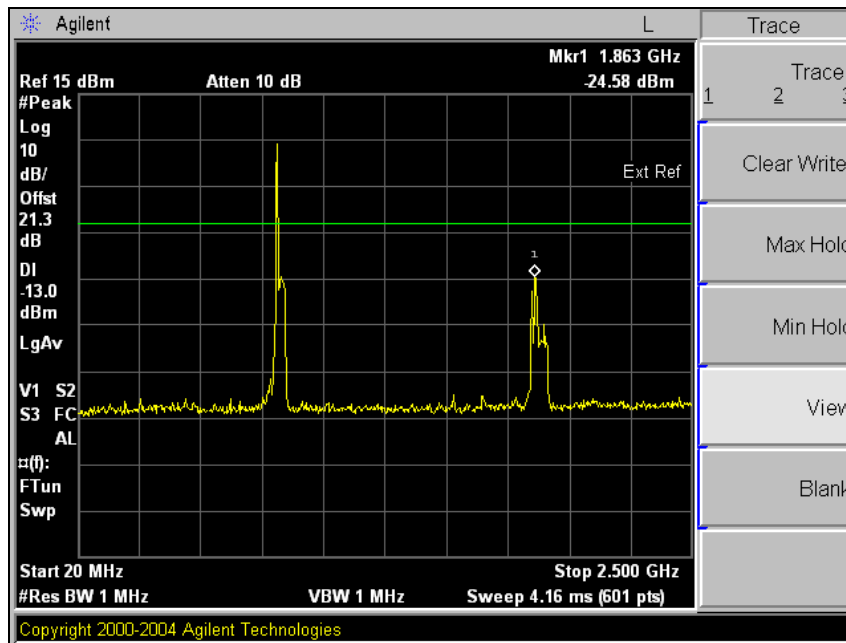


Low Channel

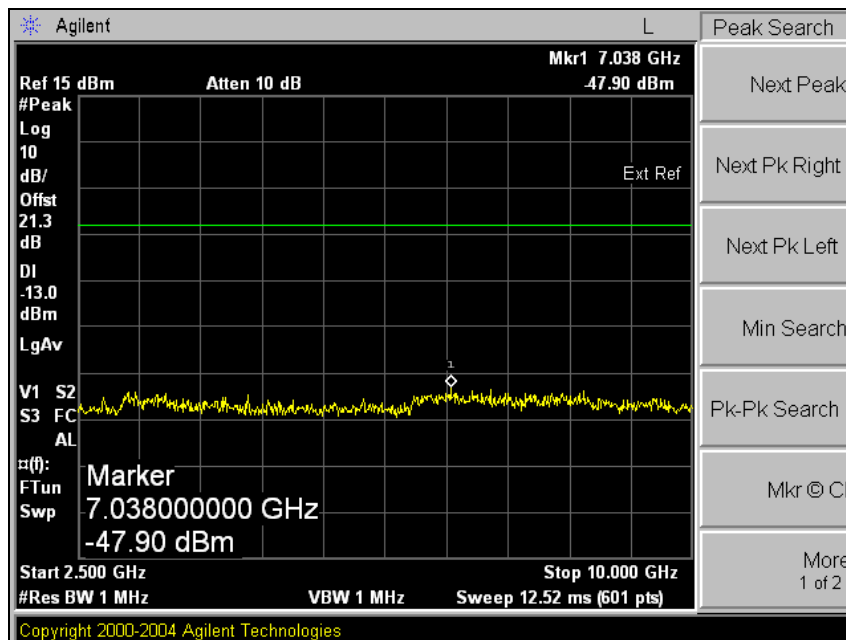


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

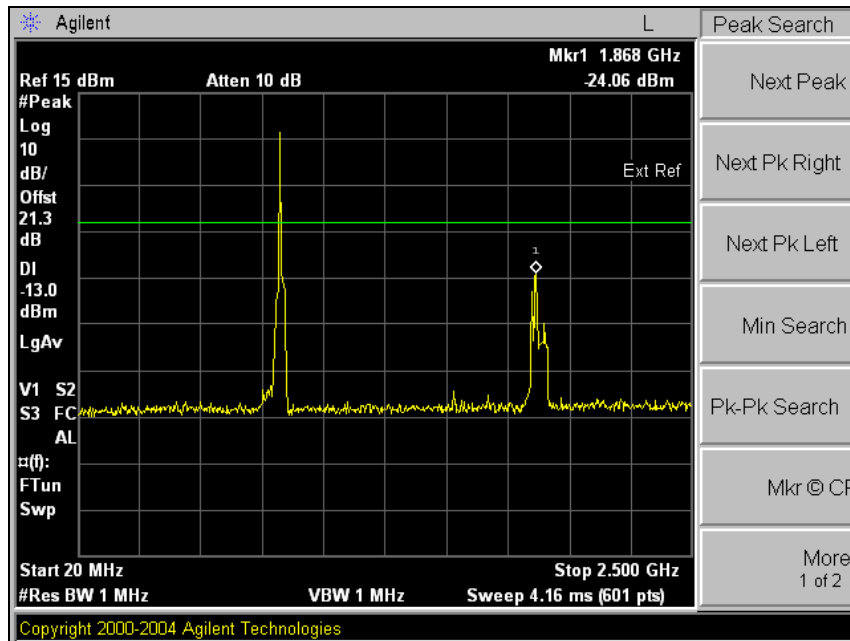


## Middle Channel

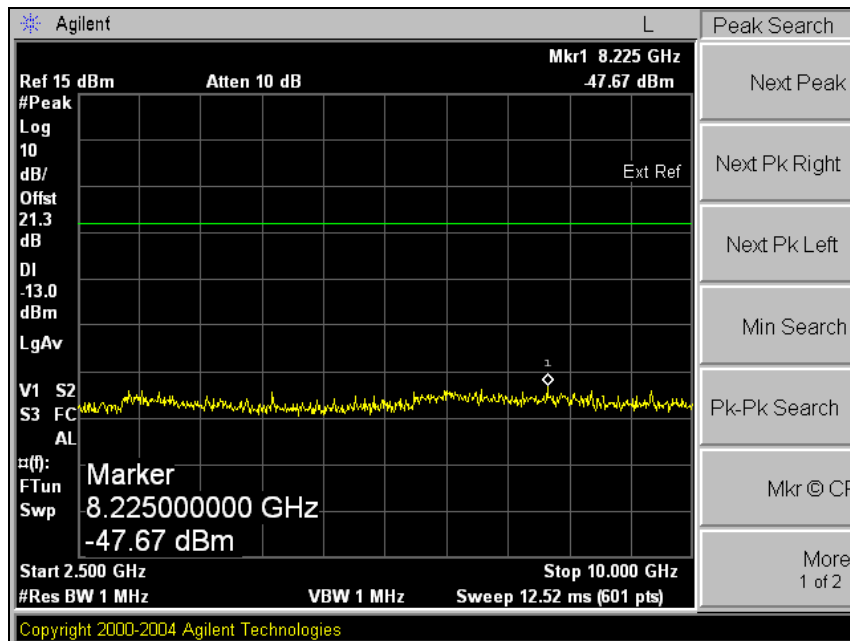


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

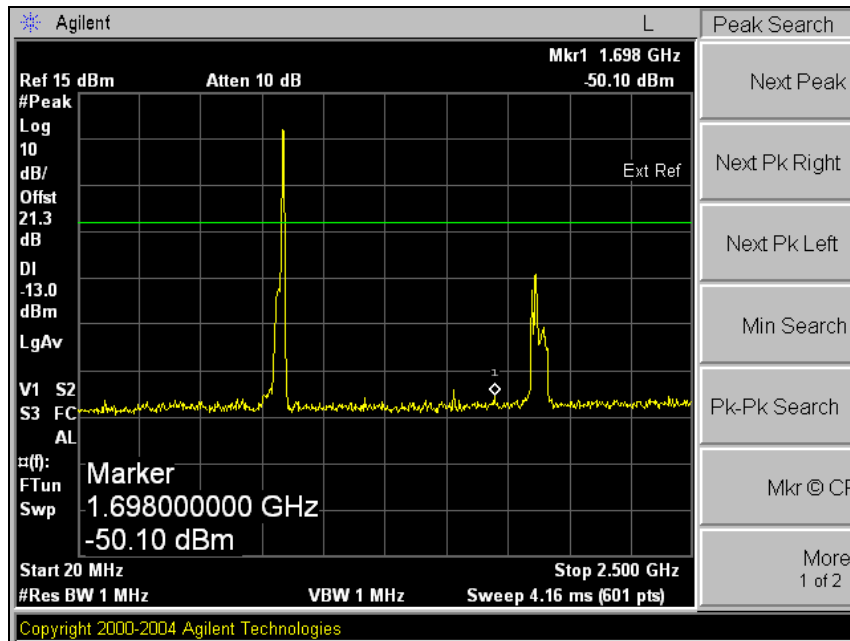


## High Channel

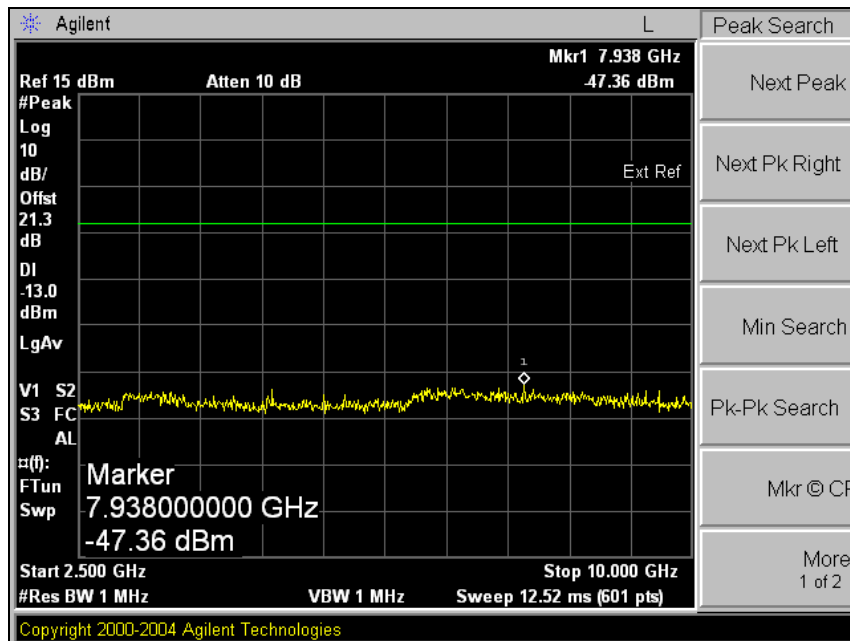


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Cellular(Downlink)

Low Channel

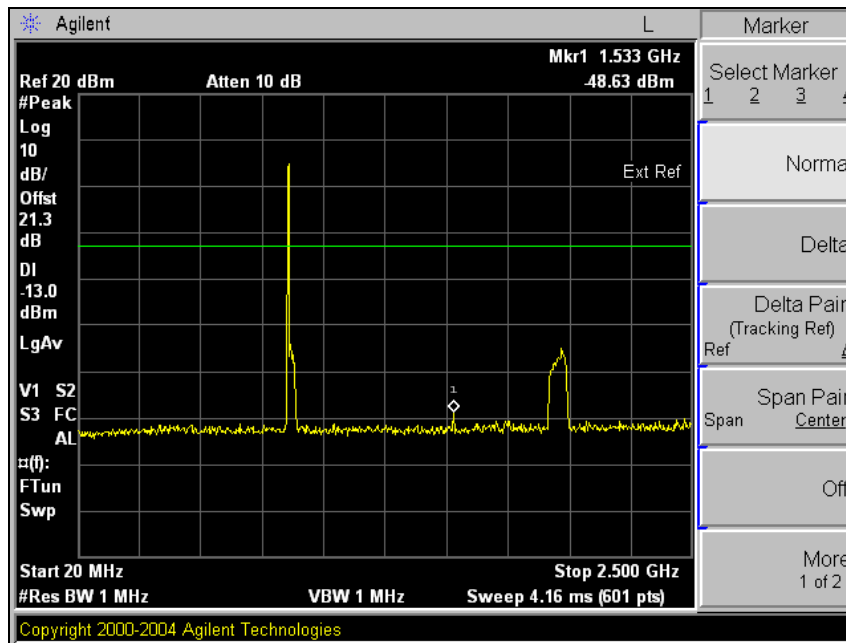


Low Channel

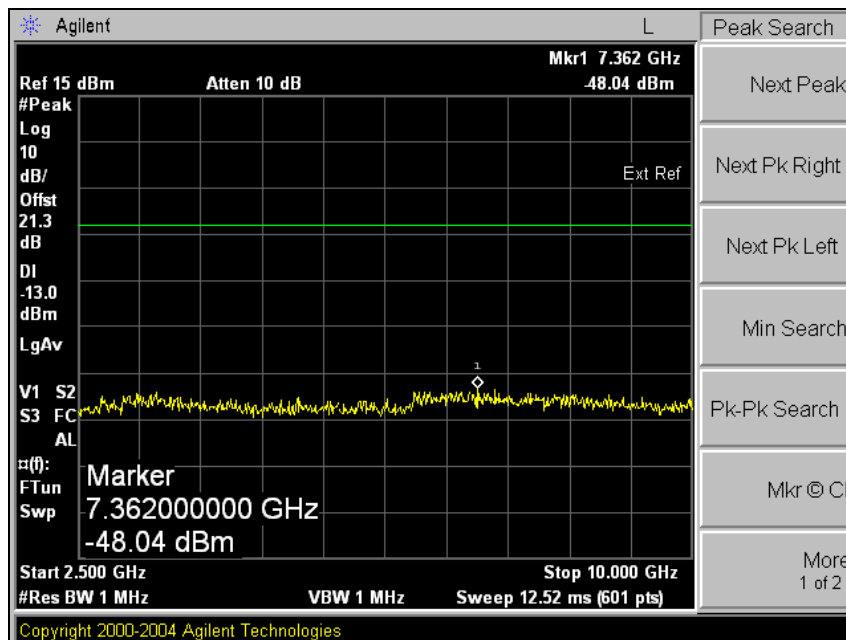


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

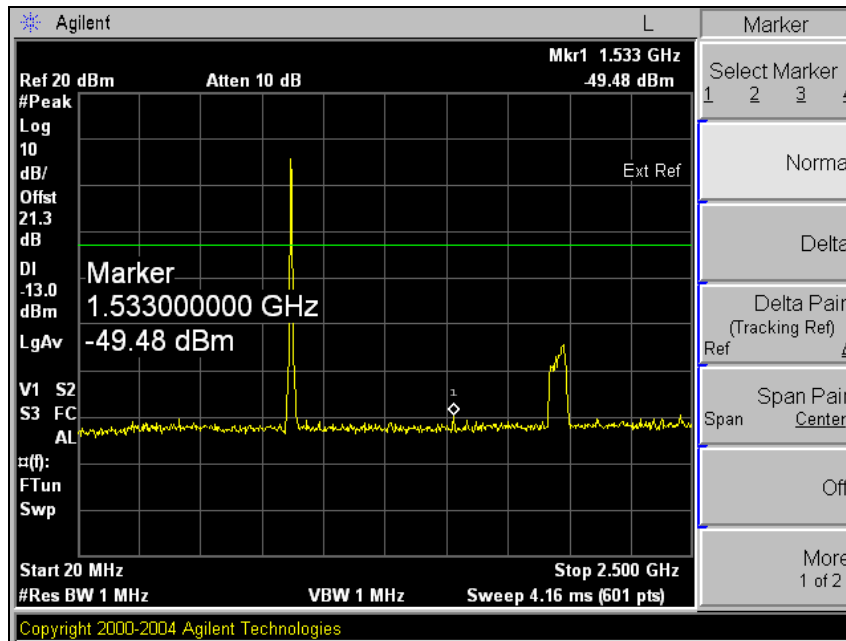


## Middle Channel

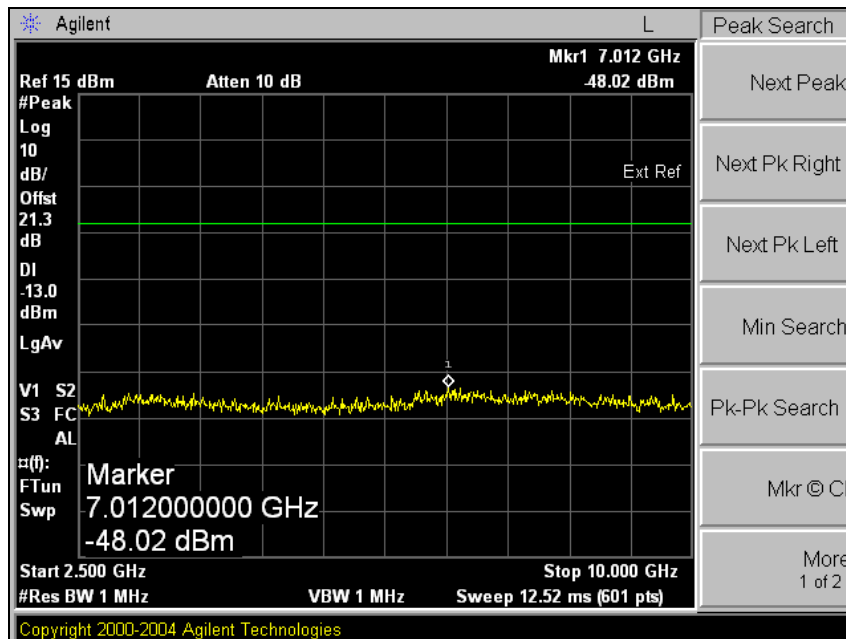


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

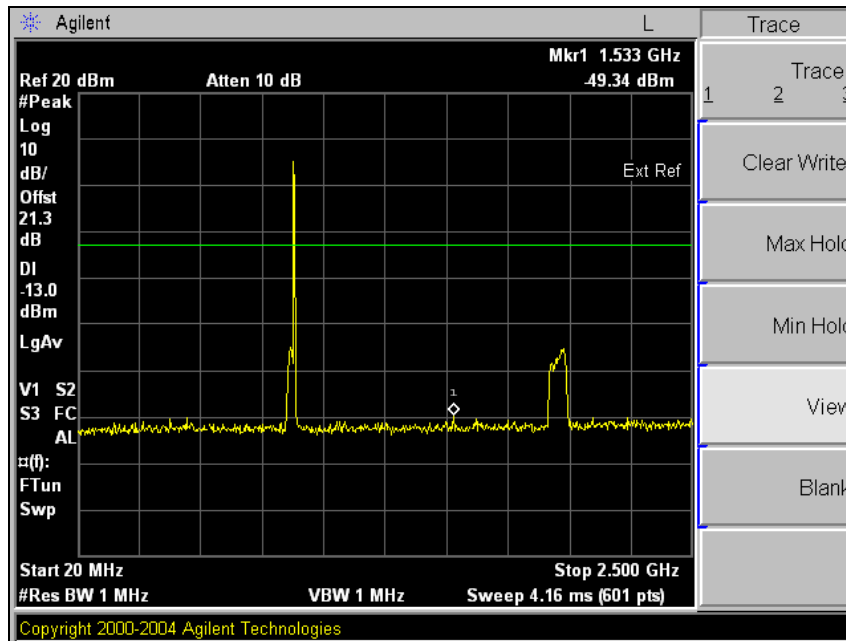


## High Channel

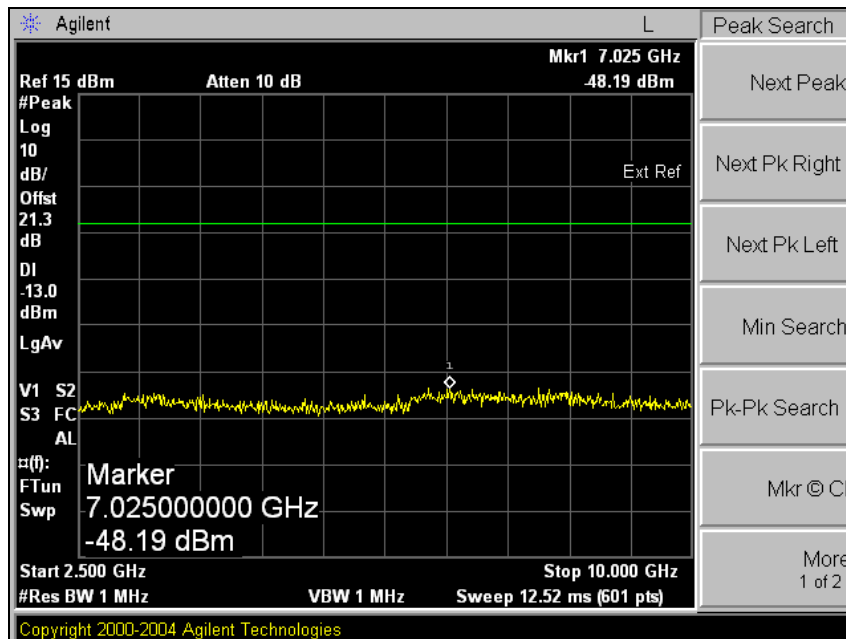


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Uplink)

### Low Channel

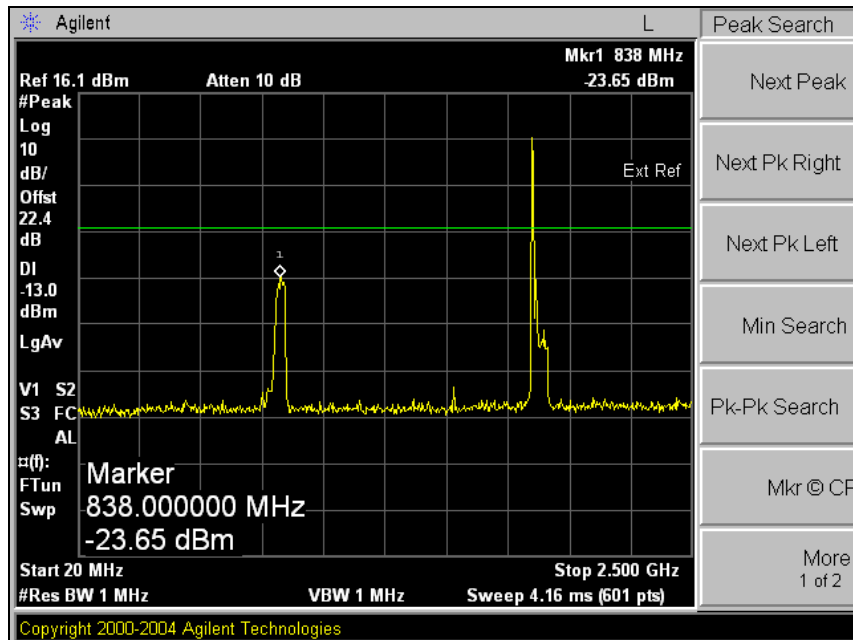


### Low Channel

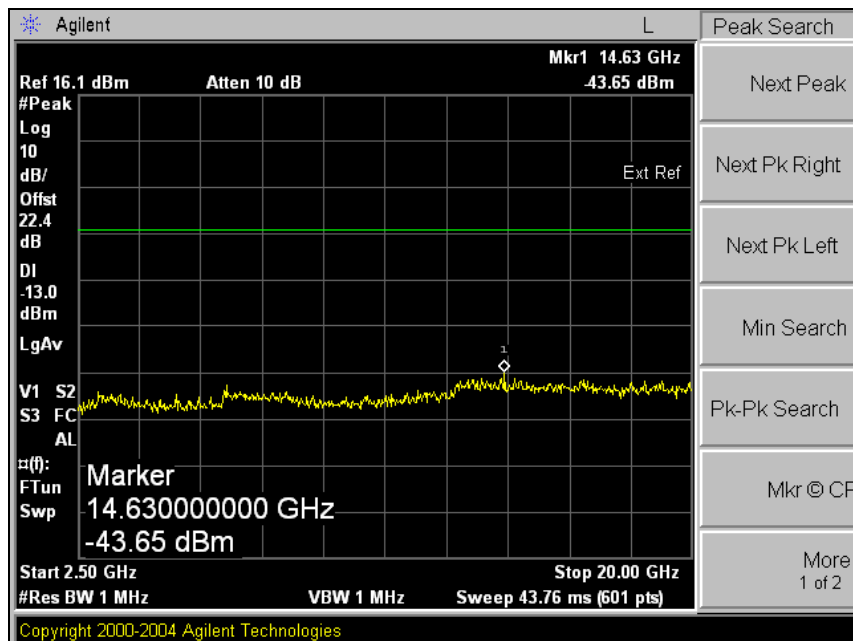


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

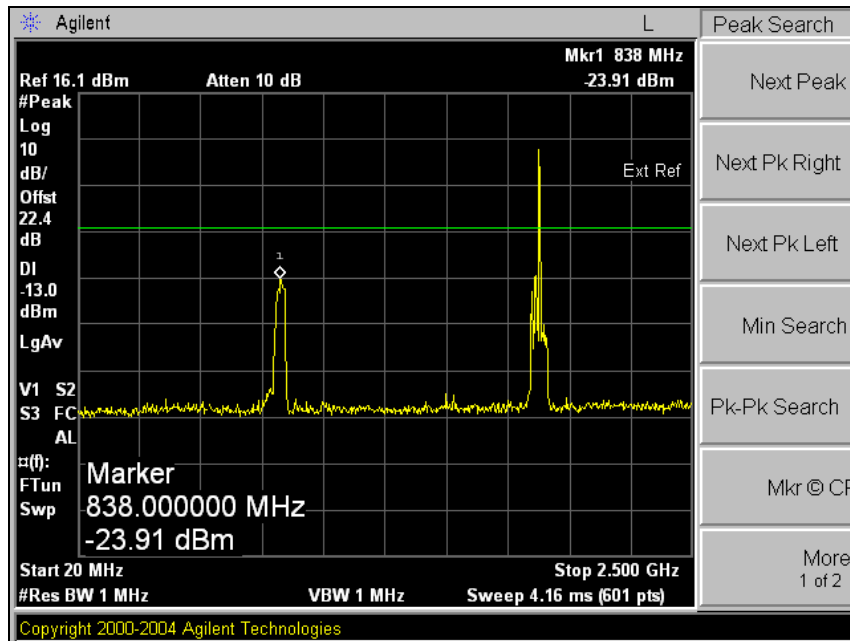


## Middle Channel

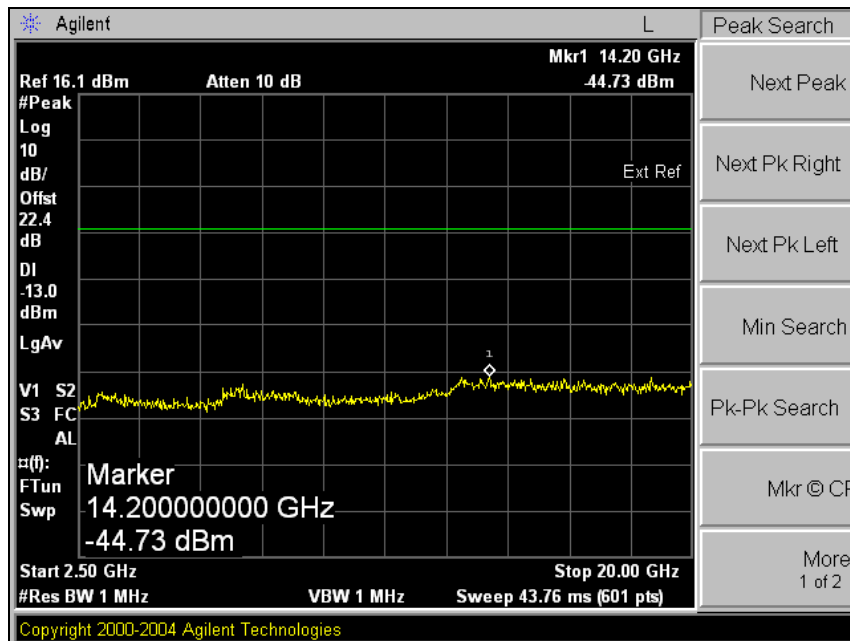


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



## High Channel

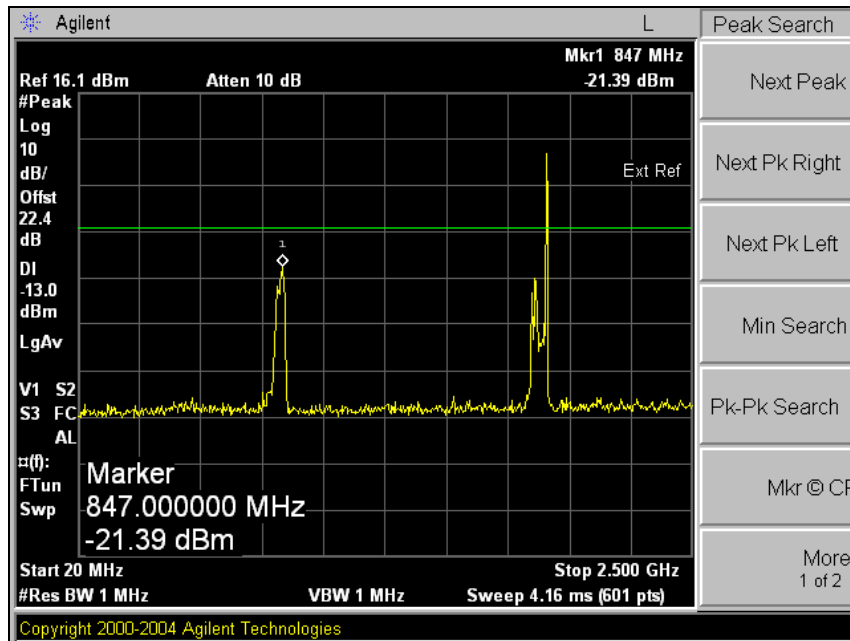


## High Channel

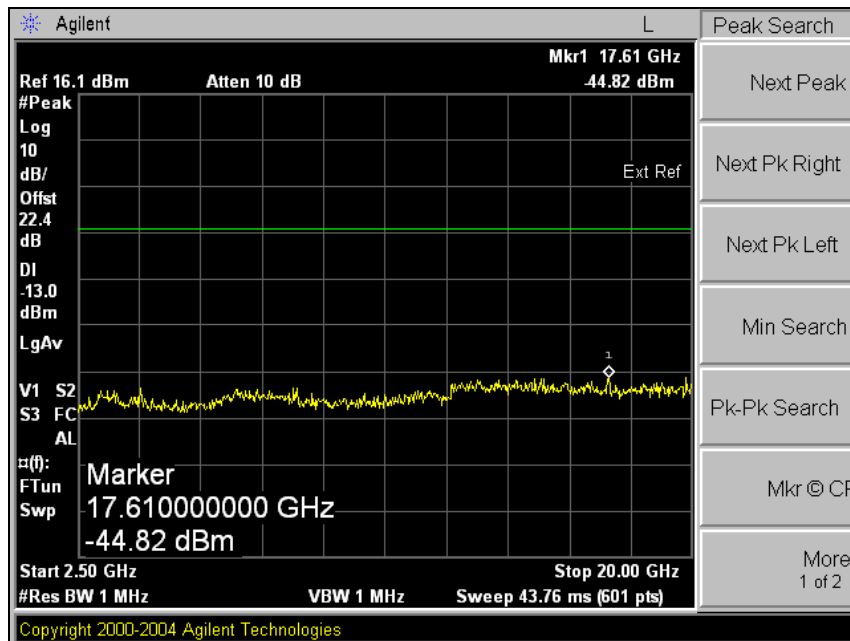


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Downlink)

Low Channel

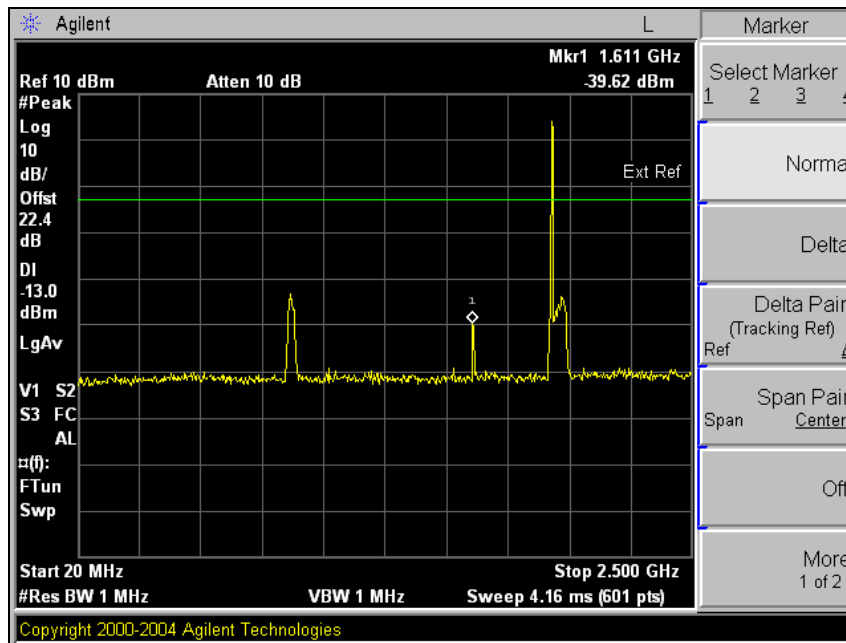


Low Channel

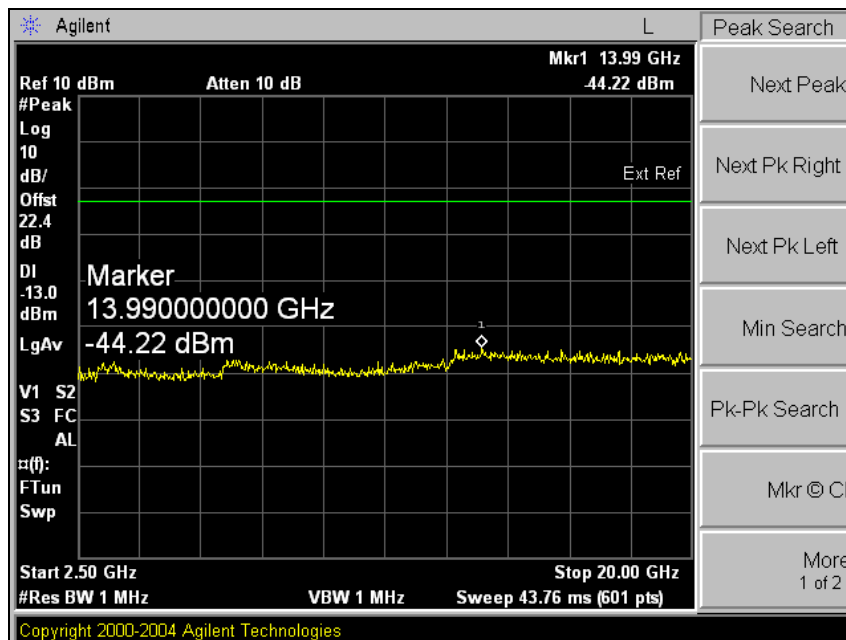


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Middle Channel

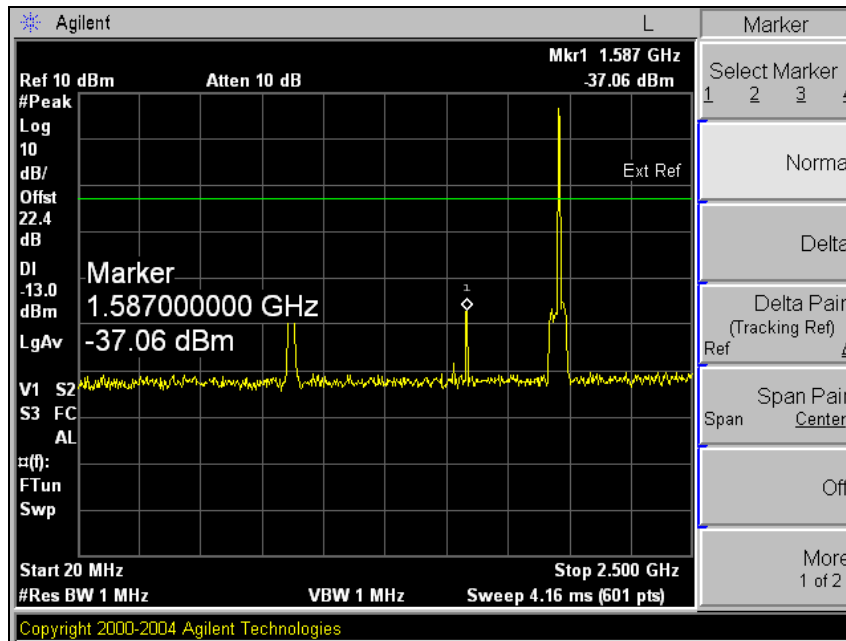


## Middle Channel

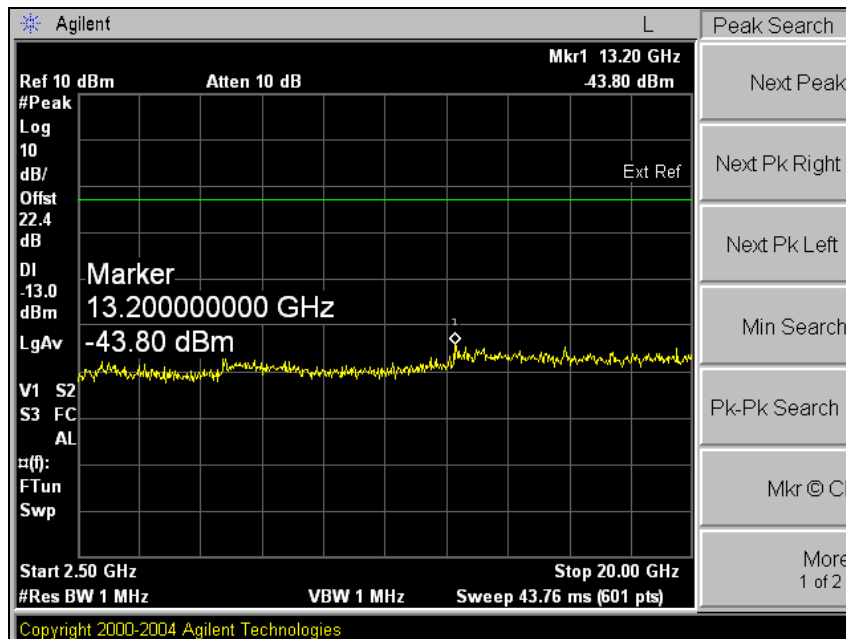


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High Channel

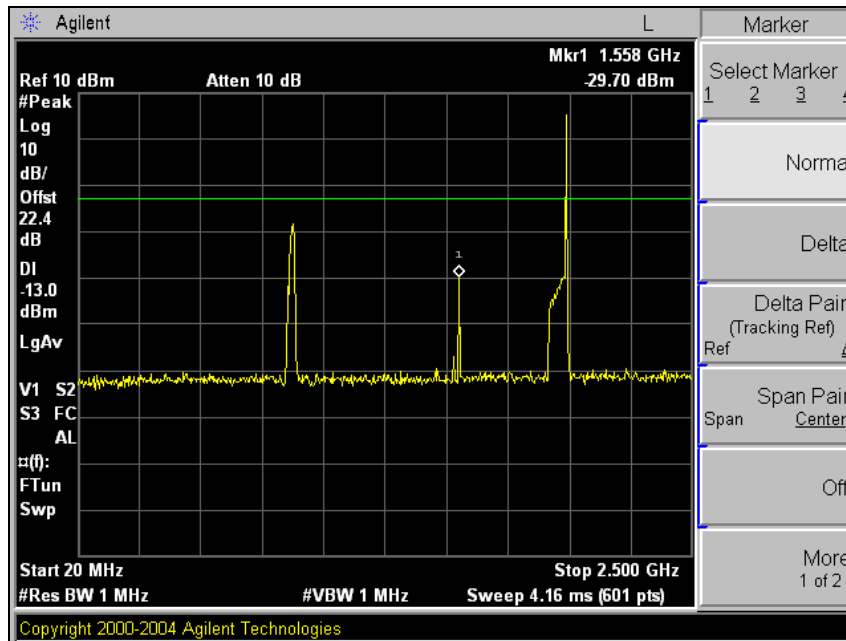

## High Channel

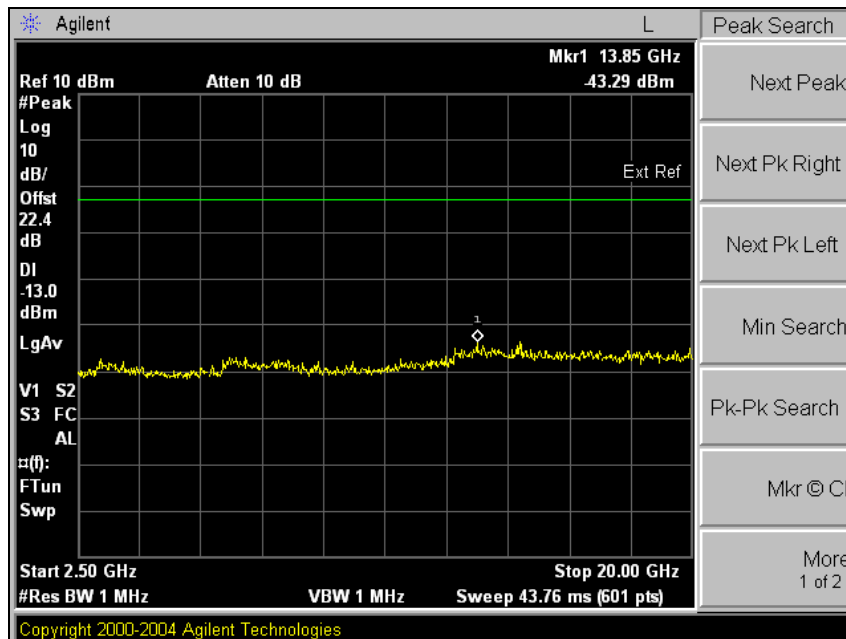

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 5. Band Edge


### 5.1. Limit

§ 22.917(e) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43+10\log(P)$ dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43+10\log(P)$ dB.

### 5.2. Test Procedure

1. The transmitter was tested while in a continuous transmit mode.
2. The EUT was tuned to a low, middle, and high channel in both the downlink (base to mobile) and uplink (mobile to base) directions.
3. Spurious Emission was tested under




### 5.3. Test Results

Ambient temperature :  $(24 \pm 2)$  °C  
Relative humidity : 47 % R.H.


Please refer to the following plots.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## Cellular(Uplink) Low Channel

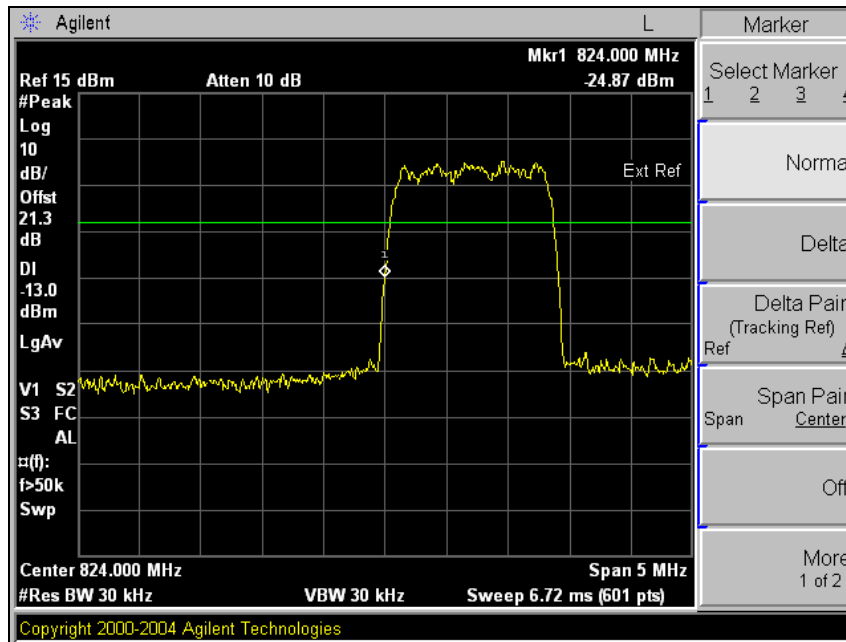


## High Channel

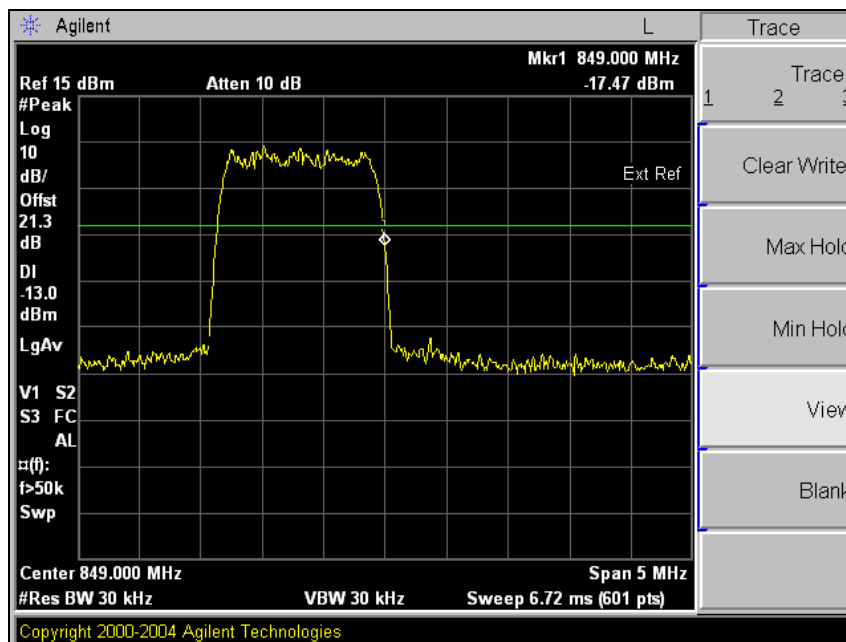


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Cellular(Downlink)

### Low Channel

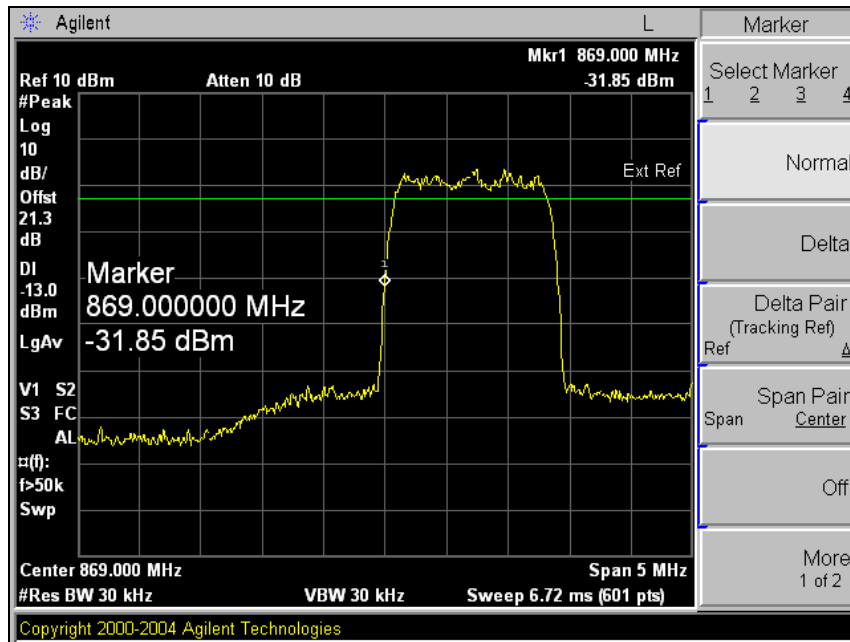


### High Channel

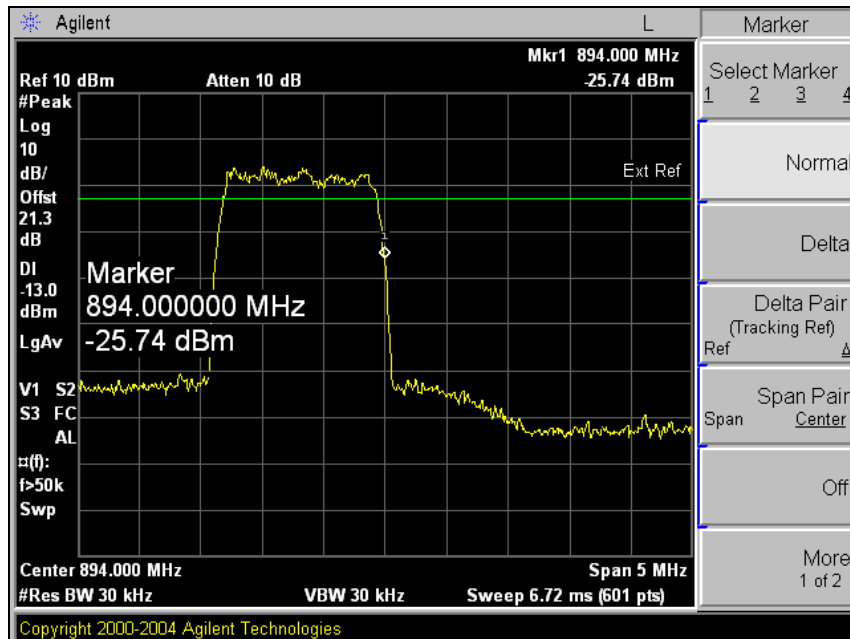


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## Cellular(Uplink)\_IMD Low Channel

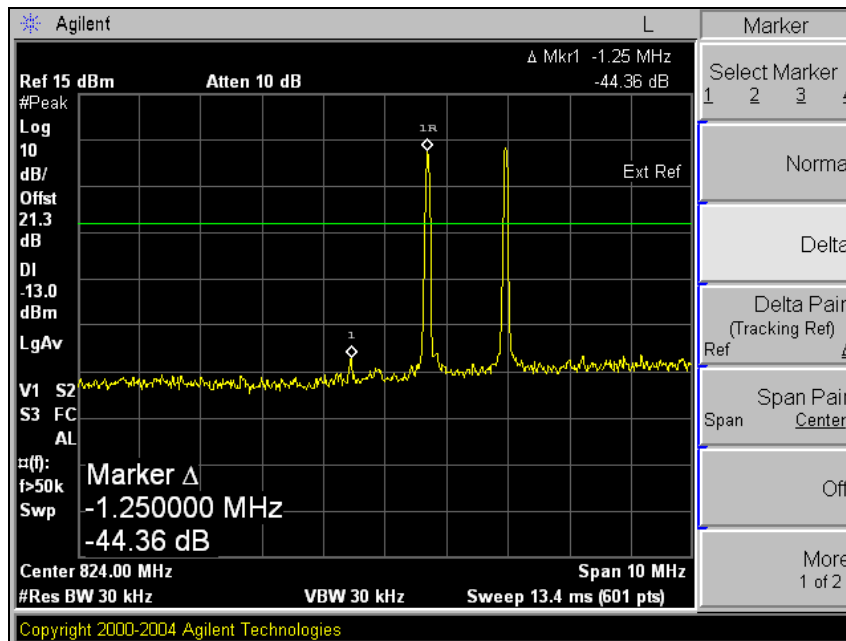

## High Channel

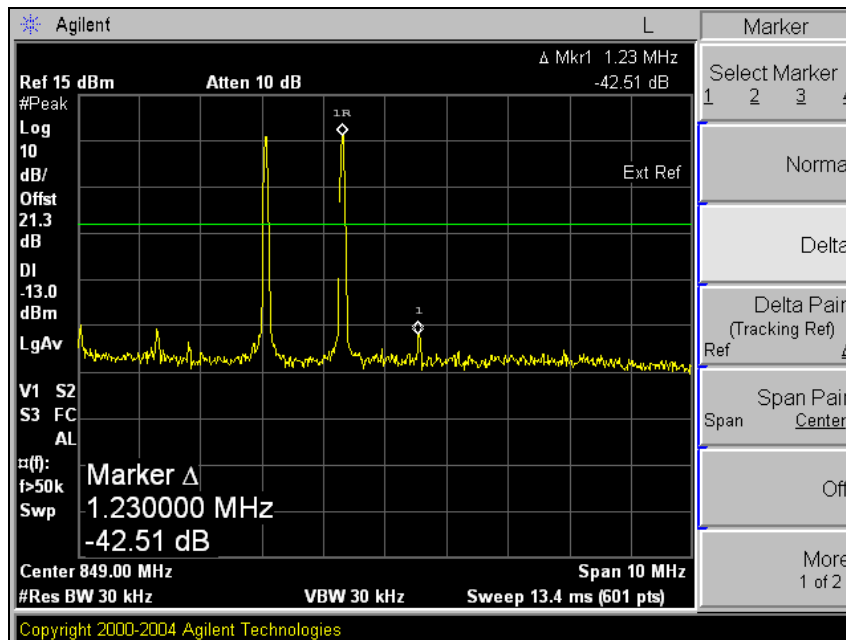


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.




## Cellular(Downlink)\_IMD

### Low Channel

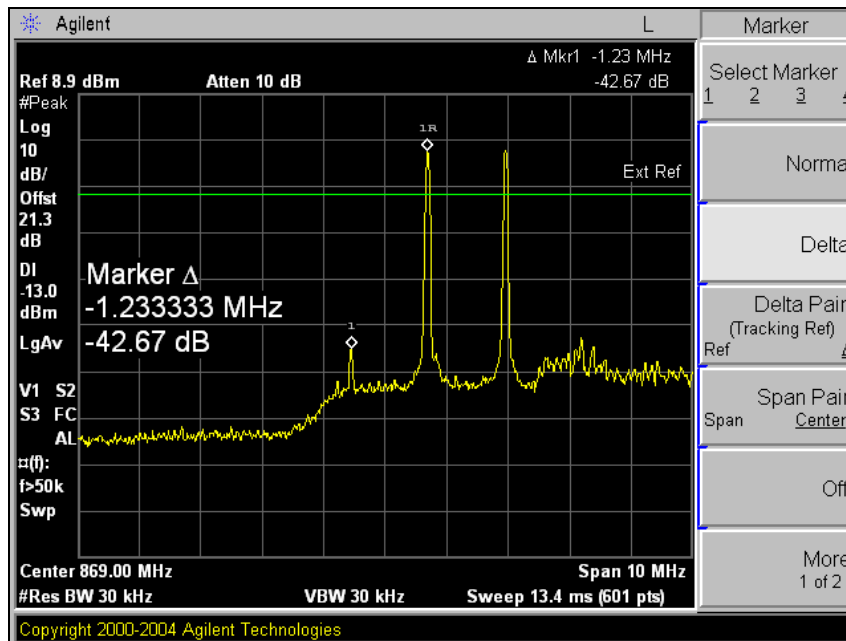


### High Channel

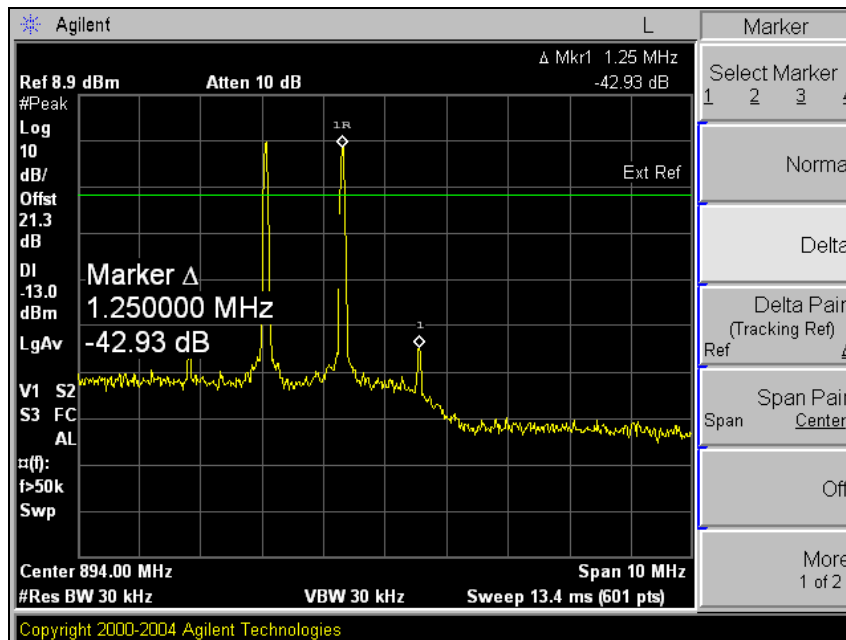


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Uplink) Low Channel

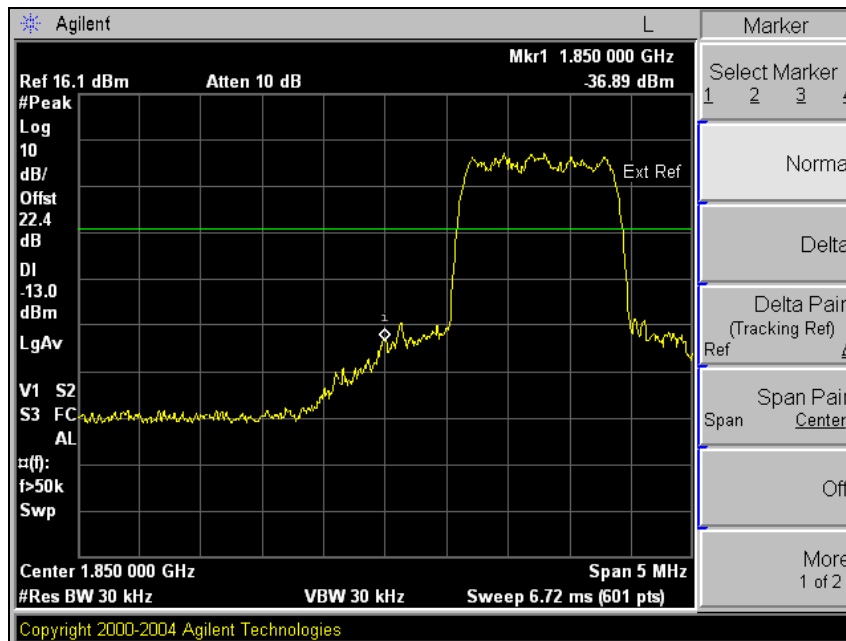


## High Channel

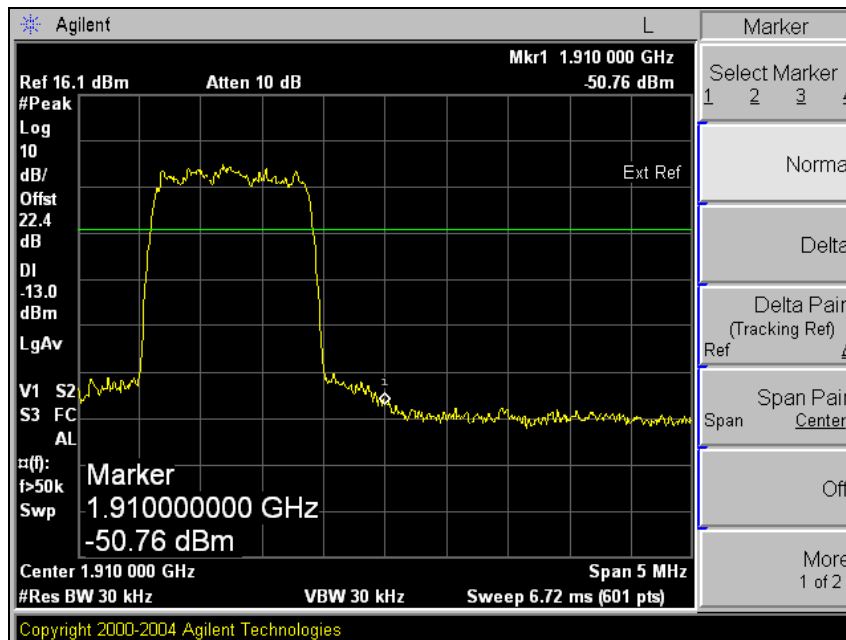


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Downlink) Low Channel

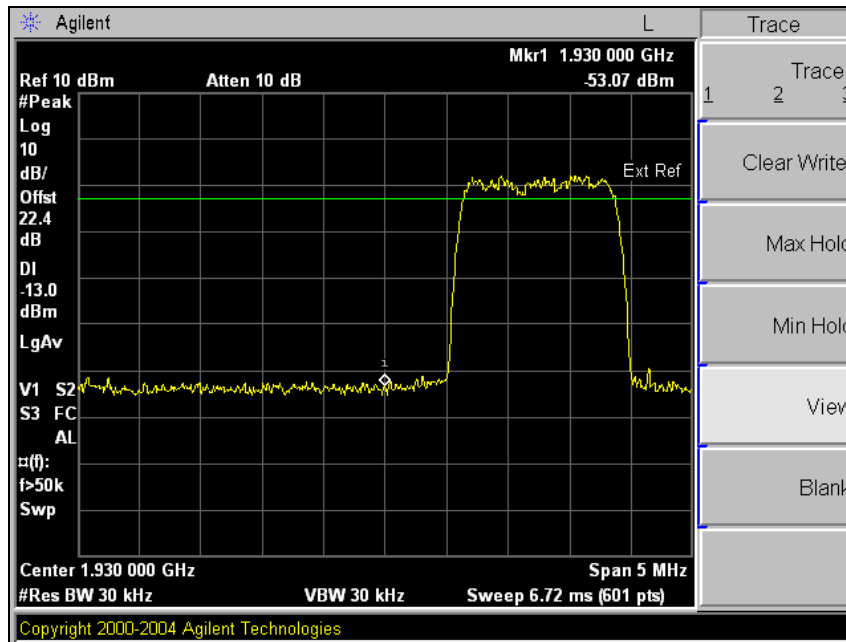


## High Channel

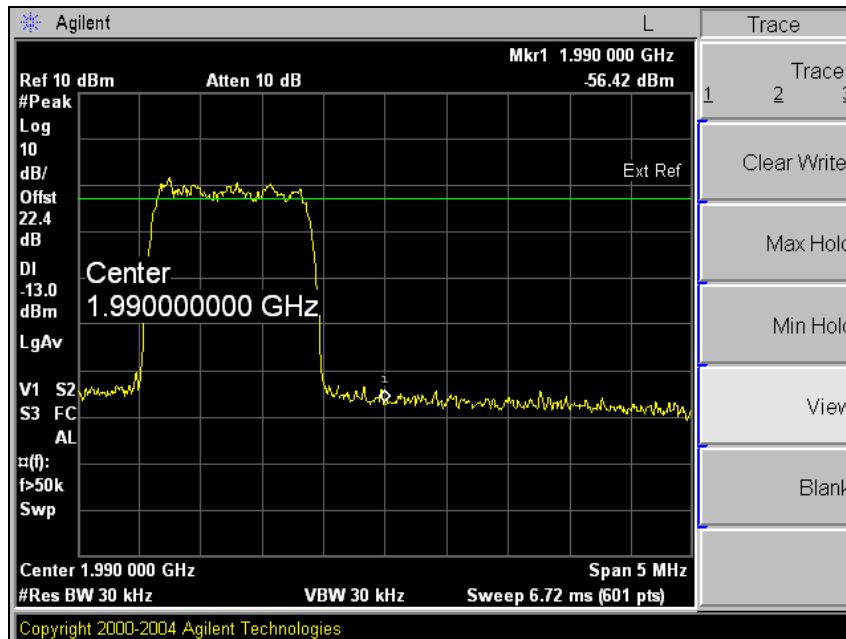


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Uplink)\_IMD Low Channel

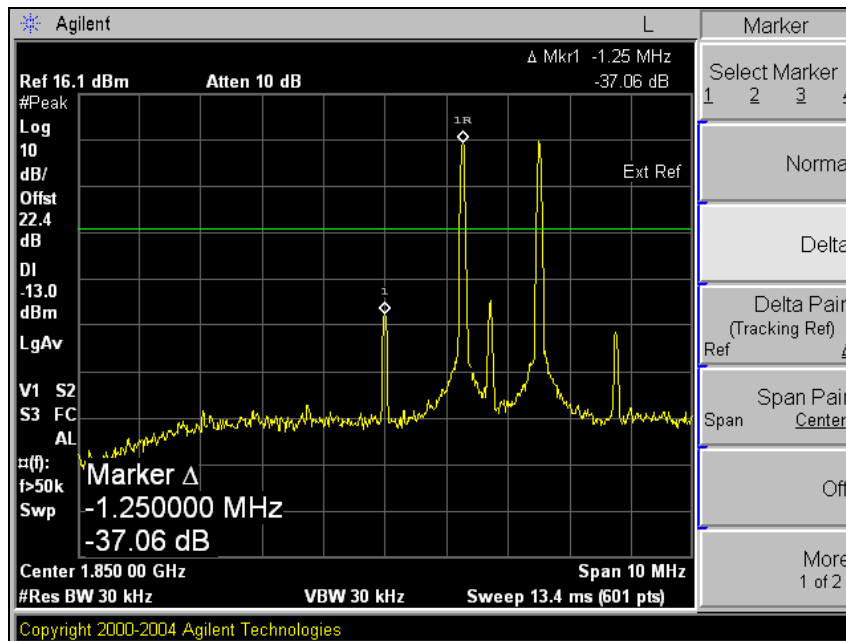


## High Channel

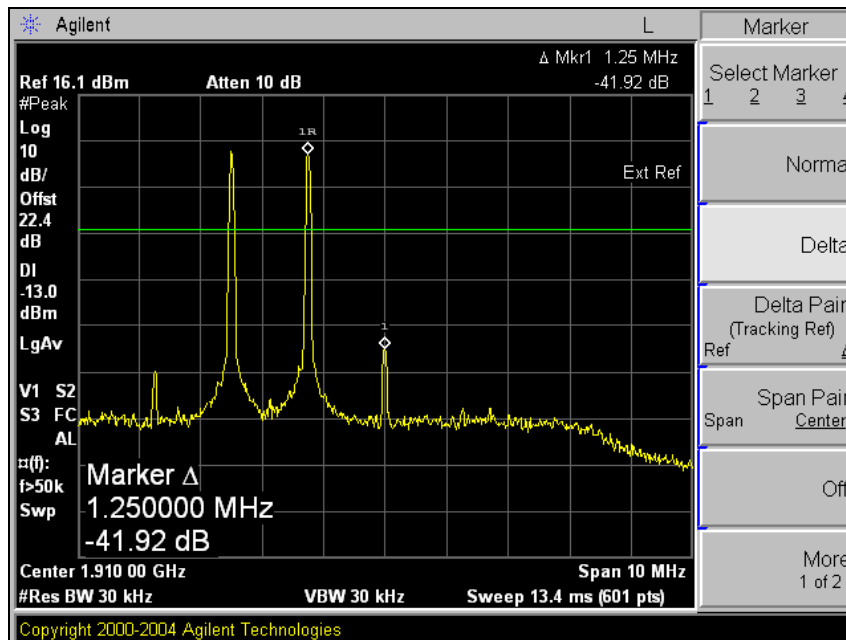


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## PCS(Downlink)\_IMD Low Channel

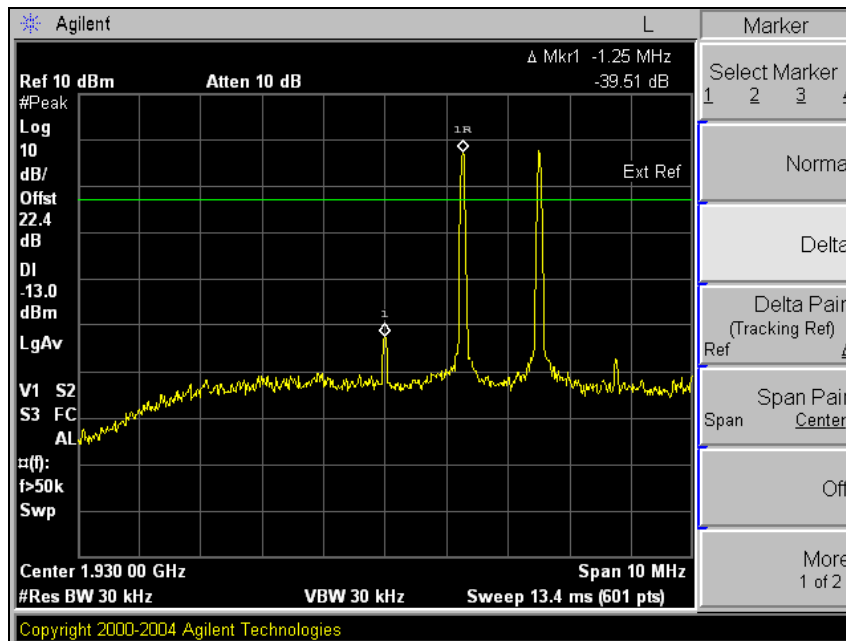


## High Channel

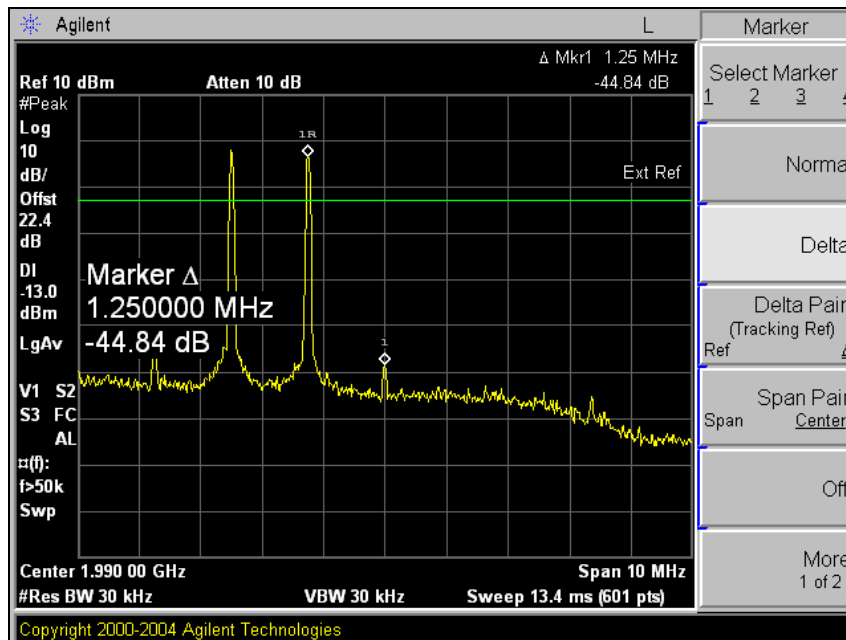

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



The diagram below shows the test setup for substituted method

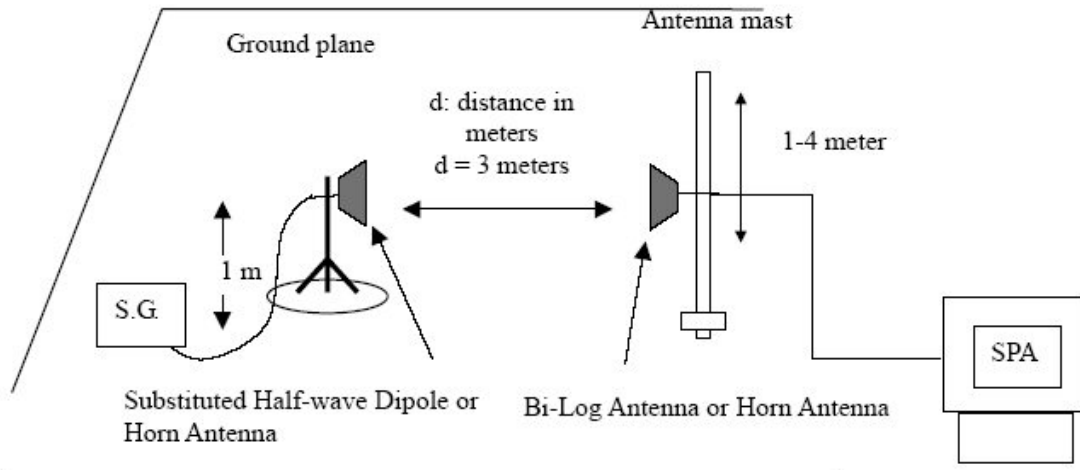

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 6.2. Limit

§ 22.917(e) Out of band emissions. The power of any emission outside of the authorized operating frequency must be attenuated below the transmitting (P) by a factor of at least  $43 + 10\log(P)$  dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency

## 6.3. Test procedure: Based on ANSI/TIA 603C: 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
7. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole or horn antenna connected to a signal generator.
11. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dB m, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*



## 6.4. Spurious radiated emission

### Cellular(Uplink)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Margin (dB)
Low Channel (824.70 MHz)						
1 649.40	V	-42.67	4.54	6.44	-40.77	53.77
1 739.40	H	-51.72	4.69	6.68	-49.74	62.74
Middle Channel (835.89 MHz)						
1 671.78	V	-42.41	4.57	6.50	-40.48	53.48
1 761.78	H	-53.34	4.74	6.74	-51.34	64.34
High Channel (848.31 MHz)						
1696.62	V	-38.82	4.61	6.57	-36.87	49.87
1786.62	H	-53.45	4.78	6.80	-51.43	64.43

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Cellular(Downlink)**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Margin (dB)
Low Channel (869.70 MHz)						
1 739.40	V	-52.66	4.69	6.68	-50.68	37.68
1 739.40	H	-58.88	4.69	6.68	-56.90	43.90
Middle Channel (880.89 MHz)						
1 761.78	V	-53.81	4.74	6.74	-51.81	38.81
1 761.78	H	-59.50	4.74	6.74	-57.50	44.50
High Channel (893.31 MHz)						
1 786.62	V	-54.74	4.78	6.80	-52.72	39.72
1 786.62	H	-60.18	4.78	6.80	-58.16	45.16

**Remark:**

1.  $E.R.P. \ \& \ E.I.R.P. = S.G \ level \ (dB \ m) - Cable \ loss \ (dB) + Ant. \ gain \ (dB \ d/dB \ i)$
2. No more spurious emissions above 1 800 MHz for all channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**PCS(Uplink)**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	Margin (dB)
Low Channel (1 851.25 MHz)						
3 702.50	V	-50.36	7.13	11.85	-45.65	32.65
3 702.50	H	-51.18	7.13	11.85	-46.47	33.47
Middle Channel (1 880.00 MHz)						
3 760.00	V	-48.95	7.23	11.85	-44.34	31.34
3 760.00	H	-52.06	7.23	11.85	-47.45	34.45
High Channel (1 908.75 MHz)						
3 817.50	V	-47.18	7.33	11.84	-42.67	29.67
3 817.50	H	-52.15	7.33	11.84	-47.64	34.64

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**PCS(Downlink)**

Frequency (MHz)	Ant. Pol. (H/V)	S.G level (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	Margin (dB)
Low Channel (1 931.25 MHz)						
3 862.50	V	-47.13	7.41	11.84	-42.70	29.70
3 862.50	H	-52.25	7.41	11.84	-47.82	34.82
Middle Channel (1 960.00 MHz)						
3 920.00	V	-47.28	7.48	11.84	-42.92	29.92
3 920.00	H	-51.88	7.48	11.84	-47.52	34.52
High Channel (1 988.75 MHz)						
3 977.50	V	-49.84	7.51	11.83	-45.52	32.52
3 977.50	H	-49.87	7.51	11.83	-45.55	32.55

**Remark:**

1.  $E.R.P. \ \& \ E.I.R.P. = S.G \ level \ (dB \ m) - Cable \ loss \ (dB) + Ant. \ gain \ (dB \ d/dB \ i)$
2. No more spurious emissions above 4 000 MHz for all channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 7. Frequency Stability

### 7.1. Limit

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:


According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is  $\pm 2.5$  ppm.

§24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 7.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed-through attenuators.
2. The EUT was placed inside the temperature chamber. The AC leads and RF output cable exited the chamber through an opening made for the purpose.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.
4. Frequency Stability vs. Voltage: An external variable AC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the AC end point. The output frequency was recorded for each AC.



*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 7.3. Test Results

Ambient temperature : (24 ± 2) °C  
Relative humidity : 47 % R.H.

#### Cellular(Uplink) mode at middle channel

Reference Frequency: 835.89 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	120	-2	-0.002
40		-1	-0.001
30		2	0.002
24		1	0.001
10		1	0.001
0		2	0.002
-10		4	0.005
-20		3	0.004
-30		4	0.005
Frequency Stability versus power Supply			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	138.0	1	0.001
	102.0	1	0.001
	45.3(End point)	1	0.001

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Cellular(Downlink) mode at middle channel**

Reference Frequency: 880.89 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	120	-1	-0.001
40		1	0.001
30		1	0.001
24		2	0.002
10		1	0.001
0		1	0.001
-10		2	0.002
-20		1	0.001
-30		2	0.002
Frequency Stability versus power Supply			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	138.0	1	0.001
	102.0	1	0.001
	45.3(End point)	2	0.002

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**PCS(Uplink) mode at middle channel**

Reference Frequency: 1 880.00 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	120	-1	-0.001
40		-1	-0.001
30		-2	-0.001
24		-1	-0.001
10		1	0.001
0		1	0.001
-10		-1	-0.001
-20		-1	-0.001
-30		-2	-0.001
Frequency Stability versus power Supply			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	138.0	1	0.001
	102.0	-1	-0.001
	45.3(End point)	-1	-0.001

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



**PCS(Downlink) mode at middle channel**

Reference Frequency: 1 960.00 MHz, Limit: 2.5 ppm			
Frequency Stability versus Temperature			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	120	-1	-0.001
40		-1	-0.001
30		-2	-0.001
24		-1	-0.001
10		1	0.001
0		-1	-0.001
-10		-1	-0.001
-20		-1	-0.001
-30		-3	-0.002
Frequency Stability versus power Supply			
Environment Temperature (℃)	Power Supplied (Vac)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
24	138.0	1	0.001
	102.0	1	0.001
	45.3(End point)	-1	-0.001

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 8. RF Exposure Evaluation

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in § 1.1307(b)

### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time
(A) Limits for Occupational /Control Exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300 – 1 500	--	--	F/1 500	6
1 500 – 100 000	--	--	1	30

#### 8.1 Friis transmission formula : $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 8.2 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

### 8.2.1 Output Power into Antenna & RF Exposure Evaluation Distance

**Cellular band**

**Uplink mode**

Test mode	Frequency (MHz)	Output Power to Antenna (dB m)	Antenna Gain (dB i)	R (cm)
Low	824.70	8.13	8	2.437
Mid	835.89	8.91	8	2.648
High	848.31	10.73	8	3.242

**Downlink mode**

Test mode	Frequency (MHz)	Output Power to Antenna (dB m)	Antenna Gain (dB i)	R (cm)
Low	869.70	0.01	8	0.932
Mid	880.89	1.02	8	1.040
High	893.31	0.22	8	0.942

**PCS band**

**Uplink mode**

Channel	Frequency (MHz)	Output Power to Antenna (dB m)	Antenna Gain (dB i)	R (cm)
Low	1 851.25	8.44	8	1.686
Mid	1 880.00	8.23	8	1.633
High	1 908.75	8.65	8	1.701

**Downlink mode**

Channel	Frequency (MHz)	Output Power to Antenna (dB m)	Antenna Gain (dB i)	R (cm)
Low	1 931.25	-0.46	8	1.288
Mid	1 960.00	0.39	8	1.307
High	1 988.75	-1.39	8	1.326

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.