



**Ke Mei Ou Lab Corp.**

E506, 5th Floor, No.39 Keji Middle 2nd Rd, Science & Technology  
Park, Nanshan District, Shenzhen, P. R. China  
Tel: + 86 755 83642690 Fax: + 86 755 83297077  
[www.kmolab.com](http://www.kmolab.com)

# FCC TEST REPORT

Under  
FCC Part 15D for Isochronous UPCS Devices

Prepared For :

**Grandstream Networks, Inc.**

4th Floor, Rainbow Technology Building #16 New West Rd, Nanshan Science & Technology Park  
(North District), Shenzhen, China 518057

**FCC ID: YZZDP750**

**EUT: DECT Cordless VoIP Phone**

**Model: DP750 (Base Unit)**

March 11, 2016

**Issue Date:**

Original Report

**Report Type:**

*Eric Guo*

**Test Engineer: Eric Guo**

*Apollo Liu*

**Review By: Apollo Liu / Manager**

The test report consists 96 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

## TABLE OF CONTENTS

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| <b>1. General Information.....</b>                                                 | <b>3</b>  |
| 1. 1 Notes .....                                                                   | 3         |
| 1. 2 Testing Laboratory .....                                                      | 3         |
| 1. 3 Details of Applicant .....                                                    | 3         |
| 1. 4 Application Details .....                                                     | 3         |
| 1. 5 Test Item .....                                                               | 3         |
| 1. 6 Test Standards .....                                                          | 3         |
| <b>2. Technical Test .....</b>                                                     | <b>4</b>  |
| 2. 1 Summary of Test Results .....                                                 | 4         |
| 2. 2 Antenna Requirement .....                                                     | 4         |
| 2. 3 Description of Tested Device .....                                            | 4         |
| 2. 4 EUT Modification .....                                                        | 4         |
| <b>3. Technical Characteristics Test.....</b>                                      | <b>4</b>  |
| 3. 1 Conducted Emission Test .....                                                 | 5         |
| 3.1.1 Test Equipment .....                                                         | 5         |
| 3.1.2 Test Procedure .....                                                         | 5         |
| 3.1.3 Test Setup .....                                                             | 5         |
| 3.1.4 Configuration of the EUT .....                                               | 6         |
| 3.1.5 EUT Operating Condition .....                                                | 7         |
| 3.1.6 Conducted Power Line Emission Limits .....                                   | 7         |
| 3.1.7 Conducted Power Line Test Result .....                                       | 8         |
| 3. 2 Occupied Bandwidth .....                                                      | 12        |
| 3.2.1 Test Equipment .....                                                         | 12        |
| 3.2.2 Test Procedure .....                                                         | 12        |
| 3.2.3 Test Setup .....                                                             | 12        |
| 3.2.4 Configuration of The EUT .....                                               | 12        |
| 3.2.5 EUT Operating Condition .....                                                | 12        |
| 3.2.6 Limit .....                                                                  | 12        |
| 3.2.7 Occupied Bandwidth Test Result .....                                         | 13        |
| 3. 3 RF Output Power .....                                                         | 18        |
| 3.3.1 Test Equipment .....                                                         | 18        |
| 3.3.2 Test Procedure .....                                                         | 18        |
| 3.3.3 Test Setup .....                                                             | 18        |
| 3.3.4 Configuration of The EUT .....                                               | 18        |
| 3.3.5 EUT Operating Condition .....                                                | 18        |
| 3.3.6 Limit .....                                                                  | 18        |
| 3.3.7 RF Output Power Test Result .....                                            | 19        |
| 3. 4 Power Spectral Density .....                                                  | 25        |
| 3.4.1 Test Equipment .....                                                         | 25        |
| 3.4.2 Test Procedure .....                                                         | 25        |
| 3.4.3 Test Setup .....                                                             | 25        |
| 3.4.4 Configuration of The EUT .....                                               | 25        |
| 3.4.5 EUT Operating Condition .....                                                | 25        |
| 3.4.6 Limit .....                                                                  | 25        |
| 3.4.7 Power Spectral Density Test Result .....                                     | 25        |
| 3.5 Emission Inside and Outside the Sub-band .....                                 | 35        |
| 3.5.1 Test Equipment .....                                                         | 35        |
| 3.5.2 Test Procedure .....                                                         | 35        |
| 3.5.3 Test Setup .....                                                             | 35        |
| 3.5.4 Configuration of The EUT .....                                               | 35        |
| 3.5.5 EUT Operating Condition .....                                                | 35        |
| 3.5.6 Limit .....                                                                  | 35        |
| 3.5.7 Emission Inside and Outside the Sub-band Test Result .....                   | 35        |
| 3. 6 Radiated Spurious Emission .....                                              | 63        |
| 3.6.1 Test Equipment .....                                                         | 63        |
| 3.6.2 Test Procedure .....                                                         | 63        |
| 3.6.3 Test Setup .....                                                             | 63        |
| 3.6.4 Configuration of The EUT .....                                               | 63        |
| 3.6.5 EUT Operating Condition .....                                                | 64        |
| 3.6.6 Limit .....                                                                  | 64        |
| 3.6.7 Radiated Spurious Emission Test Result .....                                 | 64        |
| 3. 7 Carrier Frequency Stability .....                                             | 70        |
| 3.7.1 Test Equipment .....                                                         | 70        |
| 3.7.2 Test Procedure .....                                                         | 70        |
| 3.7.3 Test Setup .....                                                             | 70        |
| 3.7.4 Configuration of The EUT .....                                               | 70        |
| 3.7.5 EUT Operating Condition .....                                                | 70        |
| 3.7.6 Limit .....                                                                  | 70        |
| 3.7.7 Frequency Stability Test Result .....                                        | 71        |
| 3. 8 FCC§15.323 (c) (e) & §15.319(f) – Specific Requirements for UPCS Device ..... | 72        |
| <b>4. Photos of Testing .....</b>                                                  | <b>80</b> |
| 4. 1 Emission test view .....                                                      | 80        |
| 4. 2 EUT Detailed Photographs .....                                                | 82        |
| <b>5. FCC ID Label.....</b>                                                        | <b>95</b> |
| <b>6. Test Equipment .....</b>                                                     | <b>96</b> |

## 1. General Information

### 1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

### 1.2 Testing Laboratory

#### Ke Mei Ou Laboratory Co., Ltd.

ANSI-ASQ National Accreditation Board/ACLASS ISO/IEC 17025 Accredited Lab for telecommunication standards. The Registration Number is AT-1532. The testing quality system meets with ISO/IEC-17025 requirements, This approval results is accepted by MRA of ILAC.

FCC Test Site Registration Number: 962205

IC Test Site Registration Number: 4986A-2

Internet: [www.kmolab.com](http://www.kmolab.com)

### 1.3 Details of Applicant

Name : Grandstream Networks, Inc.

Address : 4th Floor, Rainbow Technology Building #16 New West Rd, Nanshan Science & Technology Park (North District), Shenzhen, China 518057

### 1.4 Application Details

Date of Receipt of Application : October 28, 2015

Date of Receipt of Test Item : October 28, 2015

Date of Test : December 14, 2015~January 28, 2016

### 1.5 Test Item

Manufacturer : Same as applicant

Address : Same as applicant

Trade Name : Grandstream

Model No.(Base) : DP750

Model No.(Extension) : N/A

Description : DECT Cordless VoIP Phone

### Additional Information

Frequency : 1921.536~1928.448MHz

RF Power : PP-72.61mW; FP- Ant0: 72.61mW, Ant1:93.97mW(Conducted Peak)

Number of Channels : 5

Type of Modulation : GFSK

Power Supply : DC 5V/1A(Adapter model: F06US0500100A)

DC 5V/1A(Adapter model: NBS05B050100VU)

Antenna : PP-Internal (0dBi); FP-Internal Ant0&Ant1 (0dBi)

| UPCS Channel    | Frequency (MHz) |
|-----------------|-----------------|
| Upper Band Edge | 1930.000        |
| 0 (Highest)     | 1928.448        |
| 1               | 1926.720        |
| 2               | 1924.992        |
| 3               | 1923.264        |
| 4 (Lowest)      | 1921.536        |
| Lower Band Edge | 1920.000        |

Requirement: FCC15.303(d),(g) Within 1920~1930 MHz band for isochronous devices.

### 1.6 Test Standards

FCC Part 15D for Isochronous UPCS Devices

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

## 2. Technical Test

### 2.1 Summary of Test Results

The EUT has been tested according to the following specifications:

| FCC Rule<br>FCC Part15, Subpart D | Test Type                                                        | Result | Notes           |
|-----------------------------------|------------------------------------------------------------------|--------|-----------------|
| 15.307(b)                         | Coordination with fixed microwave                                | PASS   | Complies        |
| 15.307(b)                         | Digital Modulation Techniques                                    | PASS   | Complies        |
| 15.319(b)                         | Labeling requirements                                            | PASS   | Complies        |
| 15.19(a)(3)                       | Antenna Requirement                                              | PASS   | Complies        |
| 15.317, 15.203                    | Power Line Conducted Emission                                    | PASS   | Complies        |
| 15.107(a)/ 15.207(a)              | Emission Bandwidth                                               | PASS   | Complies        |
| 15.323(a)                         | In-band emissions                                                | PASS   | Complies        |
| 15.323(d)                         | Out-of-band emissions                                            | PASS   | Complies        |
| 15.323(d)                         | Output Power and Antenna Gain                                    | PASS   | Complies        |
| 15.319(c)(e), 15.31(e)            | Power Spectral Density                                           | PASS   | Complies        |
| 15.319(d)                         | Automatic discontinuation of transmission                        | PASS   | Complies        |
| 15.319(f)                         | Carrier frequency stability                                      | PASS   | Complies        |
| 15.323(f)                         | Frame repetition stability                                       | PASS   | Complies        |
| 15.323(e)                         | Frame period and jitter                                          | PASS   | Complies        |
| 15.323(e)                         | Monitoring threshold, Least interfered channel                   | PASS   | Complies        |
| 15.323(c)(2);(5); (9)             | Monitoring of intended transmit window and maximum reaction time | PASS   | Complies        |
| 15.323(c)(1)                      | Threshold monitoring bandwidth                                   | PASS   | Complies        |
| 15.323(c)(7)                      | Reaction time and monitoring interval                            | PASS   | Complies        |
| 15.323(c)(1);(5); (7)             | Access criteria test interval                                    | N/A    | N/A, see note 1 |
| 15.323(c)(4);(6)                  | Access Criteria functional test                                  | N/A    | N/A, see note 1 |
| 15.323(c)(4);(6)                  | Acknowledgements                                                 | PASS   | Complies        |
| 15.323(c)(4)                      | Transmission duration                                            | PASS   | Complies        |
| 15.323(c)(3)                      | Dual access criteria                                             | PASS   | Complies        |
| 15.323(c)(10)                     | Alterative monitoring interval                                   | N/A    | N/A, see note 2 |

1. Only applies for equipment that transmits unacknowledged control and signaling information

2. The client declares that the tested equipment does not implement this provision

3. Not required if the Conducted Out-of-Band Emissions test is Passed

### 2.2 Antenna Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT no antenna connector for internal antenna. This is permanently attached antenna and meets the requirements of this section.

### 2.3 Description of Tested Device

The DP720 is a DECT cordless VoIP phone that allows users to mobilize their VoIP network throughout any business, warehouse, retail store and residential environment. It is supported by Grandstream's DP750 DECT VoIP base station and delivers a combination of mobility and top-notch telephony performance. Up to five DP720 handsets are supported on each DP750 while each DP720 supports a range of up to 300 meters outdoors and 50 meters indoors from the base station. The DP720 touts a suite of top-notch telephony features including support for up to 10 SIP accounts per handset, full HD audio, a 3.5mm headset jack, multi-language support, a speakerphone and more. When paired with Grandstream's DP750 DECT Base Station, the DP720 offers a powerful DECT VoIP handset that allows any business or residential user to create a cordless VoIP solution.

The EUT an responding device as described in ANSI C63.17 and is designed to operate together with a DECT fixed part (i.e. a base station), which is the initiating device.

### 2.4 EUT Modification

No modification by test lab.

### 3. Technical Characteristics Test

#### 3.1 Conducted Emission Test

##### 3.1.1 Test Equipment


Please refer to Section 6 this report.

##### 3.1.2 Test Procedure

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m (W) x 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

##### 3.1.3 Test Setup

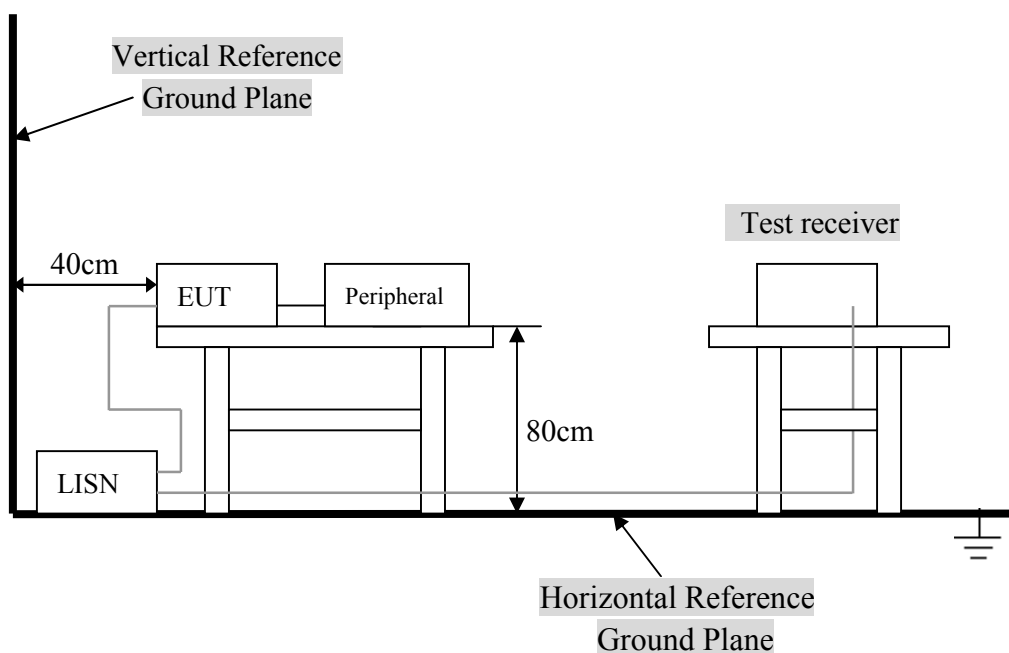

For the actual test configuration, Please refer to the related items – Photos of Testing.

### 3.1.4 Configuration of the EUT

For emissions testing, the equipment under test (EUT) was set up to transmit continuously in burst mode with pseudo-random data to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst-case emissions.

\* Associated Antenna Descriptions: The antenna used in this product is embedded antenna.

#### A. EUT

| Device                   | Manufacturer      | Model # | FCC ID   |
|--------------------------|-------------------|---------|----------|
| DECT Cordless VoIP Phone | Same as applicant | DP750   | YZZDP750 |

#### B. Internal Devices

| Device | Manufacturer | Model # | FCC ID |
|--------|--------------|---------|--------|
| N/A    |              |         |        |
|        |              |         |        |
|        |              |         |        |
|        |              |         |        |
|        |              |         |        |
|        |              |         |        |


#### C. Peripherals

| Device   | Manufacturer | Model #<br>Serial # | FCC ID/<br>DoC | Cable                                                     |
|----------|--------------|---------------------|----------------|-----------------------------------------------------------|
| Printer  | HP           | HP930C              | DoC            | 1.5m unshielded power cord<br>1.2m unshielded data cable. |
| Modem    | GVC          | N/A                 | DoC            | 1.5m unshielded power cord<br>1.2m unshielded data cable. |
| Notebook | DELL         | PP10L               | DoC            | 1.5m unshielded power cord                                |
| PC       | Dell         | 2400n               | DoC            | 1.5m unshielded power cord                                |

### 3.1.5 EUT Operating Condition

Operating condition is according to ANSI C63.10:2013.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

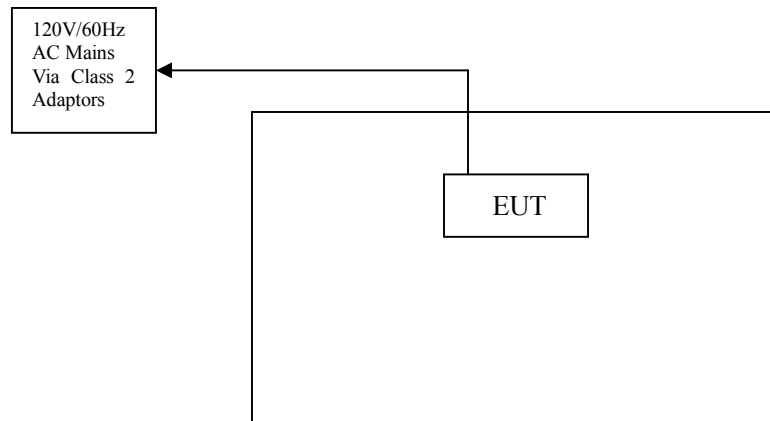

### 3.1.6 Conducted Power Line Emission Limits

| FCC Part 15 Paragraph 15.207 (dBuV) |               |               |
|-------------------------------------|---------------|---------------|
| Frequency Range (MHz)               | Class A QP/AV | Class B QP/AV |
| 0.15 – 0.5                          | 79/66         | 66-56/56-46   |
| 0.5 – 5.0                           | 73/60         | 56/46         |
| 5.0 – 30                            | 73/60         | 60/50         |

**NOTE** : In the above table, the tighter limit applies at the band edges.

### 3.1.7 Conducted Power Line Test Result

|              |                            |             |          |
|--------------|----------------------------|-------------|----------|
| Product      | : DECT Cordless VoIP Phone | Test Mode   | : Normal |
| Test Item    | : Conducted Emission Data  | Temperature | : 25 °C  |
| Test Voltage | : DC 5V                    | Humidity    | : 56%RH  |
| Test Result  | : <b>PASS</b>              |             |          |

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

· Temperature : 26 °C

· Humidity : 53 % RH

**PP**

**Adapter model: F06US0500100A**

| FCC Part 15 Paragraph 15.207 |                 |       |               |              |       |             |        |
|------------------------------|-----------------|-------|---------------|--------------|-------|-------------|--------|
| Frequency (MHz)              | Emission (dBuV) |       | LINE/ NEUTRAL | Limit (dBuV) |       | Margin (dB) |        |
|                              | QP              | AV    |               | QP           | AV    | QP          | AV     |
| 0.154                        | 45.95           | 32.42 | Line          | 65.78        | 55.78 | -19.83      | -23.36 |
| 0.154                        | 44.67           | 31.59 | Neutral       | 65.78        | 55.78 | -21.11      | -24.19 |
| 0.162                        | 44.53           | 31.14 | Line          | 65.36        | 55.36 | -20.83      | -24.22 |
| 0.170                        | 42.91           | 30.78 | Neutral       | 64.96        | 54.96 | -22.05      | -24.18 |
| 0.182                        | 42.08           | 30.22 | Line          | 64.39        | 54.39 | -22.31      | -24.17 |
| 0.178                        | 42.98           | 30.84 | Neutral       | 64.58        | 54.58 | -21.60      | -23.74 |

Note: NF = No Significant Peak was Found.

**Adapter model: NBS05B050100VU**

| FCC Part 15 Paragraph 15.207 |                 |       |               |              |       |             |        |
|------------------------------|-----------------|-------|---------------|--------------|-------|-------------|--------|
| Frequency (MHz)              | Emission (dBuV) |       | LINE/ NEUTRAL | Limit (dBuV) |       | Margin (dB) |        |
|                              | QP              | AV    |               | QP           | AV    | QP          | AV     |
| 0.170                        | 38.55           | 29.13 | Line          | 64.96        | 54.96 | -26.41      | -25.83 |
| 0.154                        | 40.78           | 29.63 | Neutral       | 65.78        | 55.78 | -25.00      | -26.15 |
| 0.182                        | 39.61           | 30.04 | Line          | 64.39        | 54.39 | -24.78      | -24.35 |
| 0.166                        | 40.43           | 29.55 | Neutral       | 65.16        | 55.16 | -24.73      | -25.61 |
| 0.494                        | 42.42           | 35.22 | Line          | 56.10        | 46.10 | -13.68      | -10.88 |
| 0.198                        | 38.33           | 28.94 | Neutral       | 63.69        | 53.69 | -25.36      | -24.75 |

Note: NF = No Significant Peak was Found.



**FP****Adapter model: F06US0500100A**

| FCC Part 15 Paragraph 15.207 |                 |       |              |              |       |             |        |
|------------------------------|-----------------|-------|--------------|--------------|-------|-------------|--------|
| Frequency (MHz)              | Emission (dBuV) |       | LINE/NEUTRAL | Limit (dBuV) |       | Margin (dB) |        |
|                              | QP              | AV    |              | QP           | AV    | QP          | AV     |
| 0.154                        | 43.45           | 30.52 | Line         | 65.78        | 55.78 | -22.33      | -25.26 |
| 0.530                        | 42.78           | 34.91 | Neutral      | 56.00        | 46.00 | -13.22      | -11.09 |
| 0.166                        | 41.43           | 29.72 | Line         | 65.16        | 55.16 | -23.73      | -25.44 |
| 11.270                       | 48.51           | 36.43 | Neutral      | 60.00        | 50.00 | -11.49      | -13.57 |
| 0.534                        | 43.34           | 37.45 | Line         | 56.00        | 46.00 | -12.66      | -8.55  |
| 12.678                       | 48.98           | 37.67 | Neutral      | 60.00        | 50.00 | -11.02      | -12.33 |

**Note: NF = No Significant Peak was Found.****Adapter model: NBS05B050100VU**

| FCC Part 15 Paragraph 15.207 |                 |       |              |              |       |             |        |
|------------------------------|-----------------|-------|--------------|--------------|-------|-------------|--------|
| Frequency (MHz)              | Emission (dBuV) |       | LINE/NEUTRAL | Limit (dBuV) |       | Margin (dB) |        |
|                              | QP              | AV    |              | QP           | AV    | QP          | AV     |
| 0.154                        | 43.43           | 30.69 | Line         | 65.78        | 55.78 | -22.35      | -25.09 |
| 0.166                        | 41.15           | 30.09 | Neutral      | 65.16        | 55.16 | -24.01      | -25.07 |
| 0.166                        | 41.48           | 30.01 | Line         | 65.16        | 55.16 | -23.68      | -25.15 |
| 0.210                        | 38.65           | 29.84 | Neutral      | 63.21        | 53.21 | -24.56      | -23.37 |
| 0.178                        | 40.07           | 29.98 | Line         | 64.58        | 54.58 | -24.51      | -24.60 |
| 0.498                        | 40.98           | 30.83 | Neutral      | 56.03        | 46.03 | -15.05      | -15.20 |

**Note: NF = No Significant Peak was Found.****Note:**

- 1.Uncertainty in conducted emission measured is  $\leq \pm 2$ dB.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.All Reading Levels are Quasi-Peak and Average value.
- 4.Emission = Meter Reading + Factor; Factor = Insertion Loss + Cable Loss.
- 5.Margin Value = Emission Level - Limit Value.


**Conducted Emission****FCC 15.207**

Test Specification: LINE&amp;NEUTRAL

Comment:


PP:

Adapter model: F06US0500100A

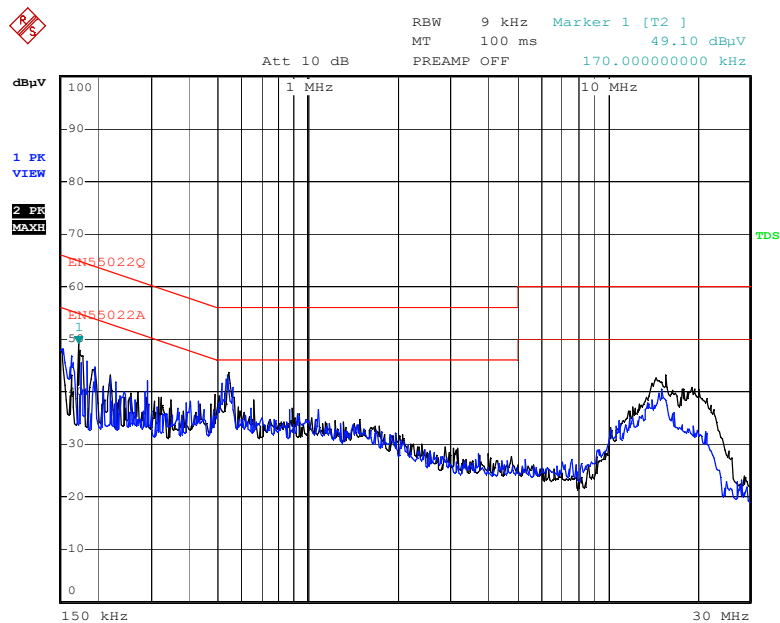


Date: 15.DEC.2015 13:27:18

Adapter model: NBS05B050100VU

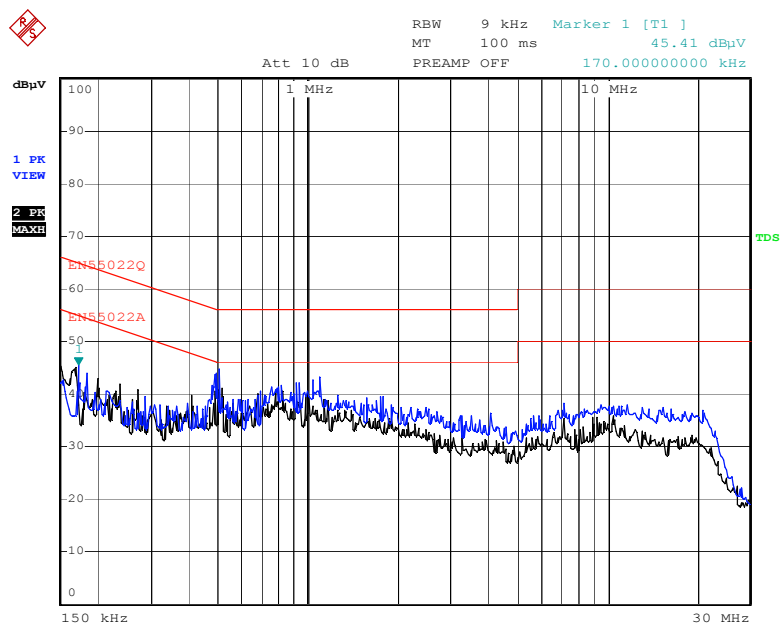


Date: 15.DEC.2015 13:43:53

FP:  
Adapter model: F06US0500100A

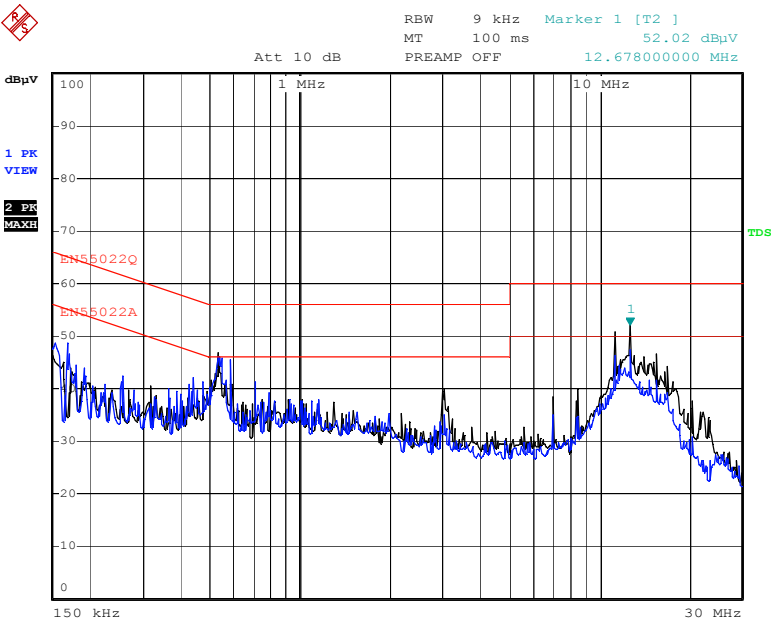

Date: 15.DEC.2015 13:53:00

Adapter model: NBS05B050100VU

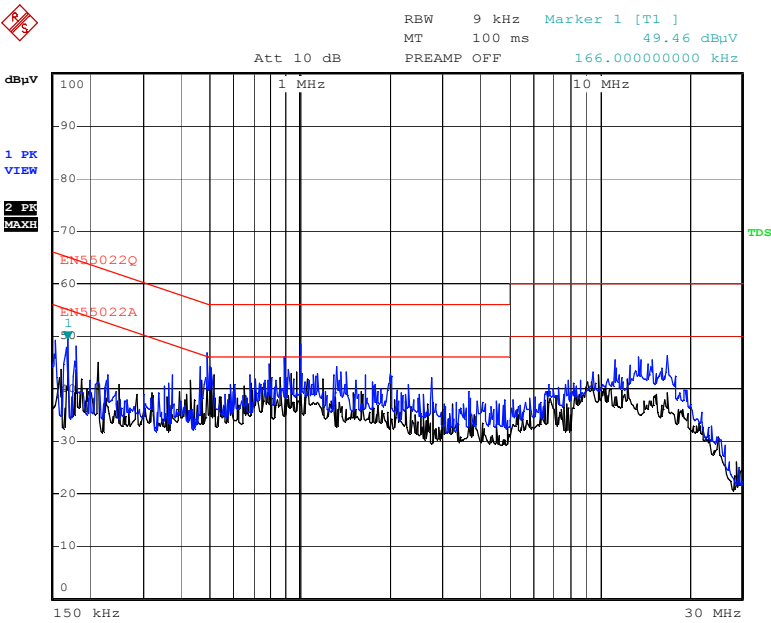

Date: 15.DEC.2015 14:00:00

## 3.2 Occupied Bandwidth

### 3.2.1 Test Equipment


Please refer to section 6 this report.

### 3.2.2 Test Procedure

The width, in Hz, of the signal between two points, one below the carrier center frequency and one below the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 CFR 15, subpart D, 15.303 (C)].

### 3.2.3 Test Setup

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:

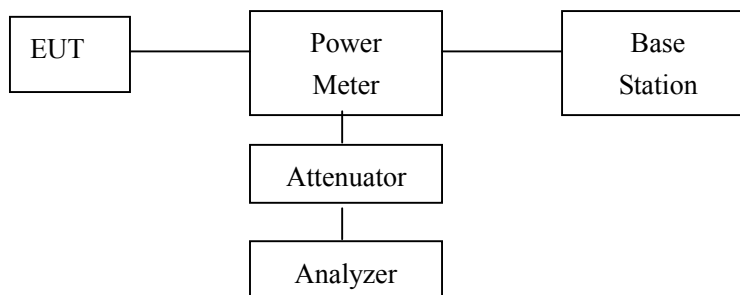

### 3.2.4 Configuration of The EUT

Same as section 3.1.4 of this report

### 3.2.5 EUT Operating Condition

Same as section 3.1.5 of this report

### 3.2.6 Limit

Requirements, FCC 15.323(a)

The 26 dB Bandwidth B shall be larger than 50 kHz and less than 2.5 MHz.

Requirements, RSS-213 Issue 2, clause 6.4

The 99% Bandwidth shall be larger than 50 kHz and less than 2.5 MHz.


No requirements for 6 and 12 dB Bandwidth, these values are only used for testing Monitoring Bandwidth if the Simple Compliance test fails (ANSI C63.17, clause 7.4).

3.2.7 Occupied Bandwidth Test Result


PP

| Channel | Center Frequency (MHz) | 26 dB Emission Bandwidth (MHz) | Limit                  |
|---------|------------------------|--------------------------------|------------------------|
| Low     | 1921.536               | 1.734                          | 50 kHz < OBW < 2.5 MHz |
| Middle  | 1924.992               | 1.734                          | 50 kHz < OBW < 2.5 MHz |
| High    | 1928.448               | 1.734                          | 50 kHz < OBW < 2.5 MHz |


Low Channel

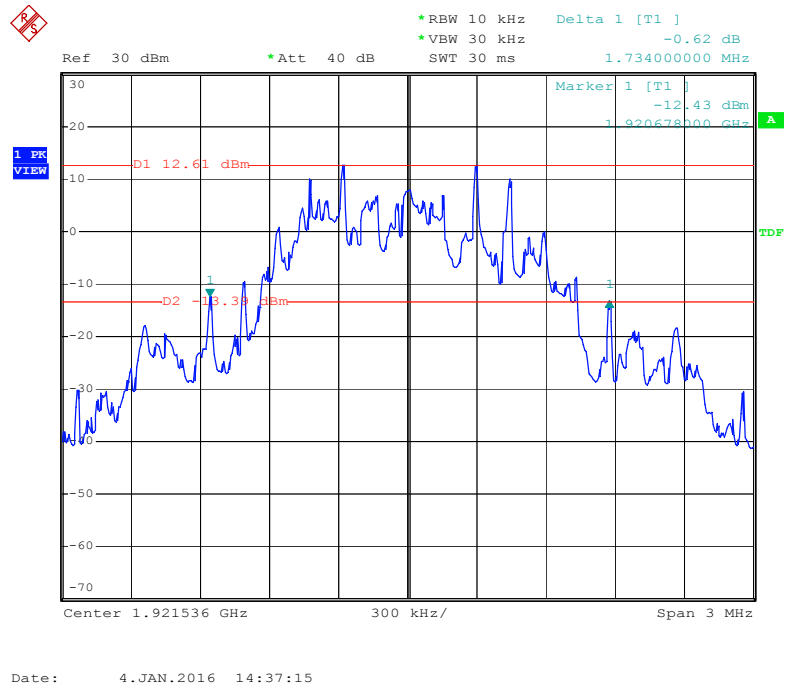

Mid Channel

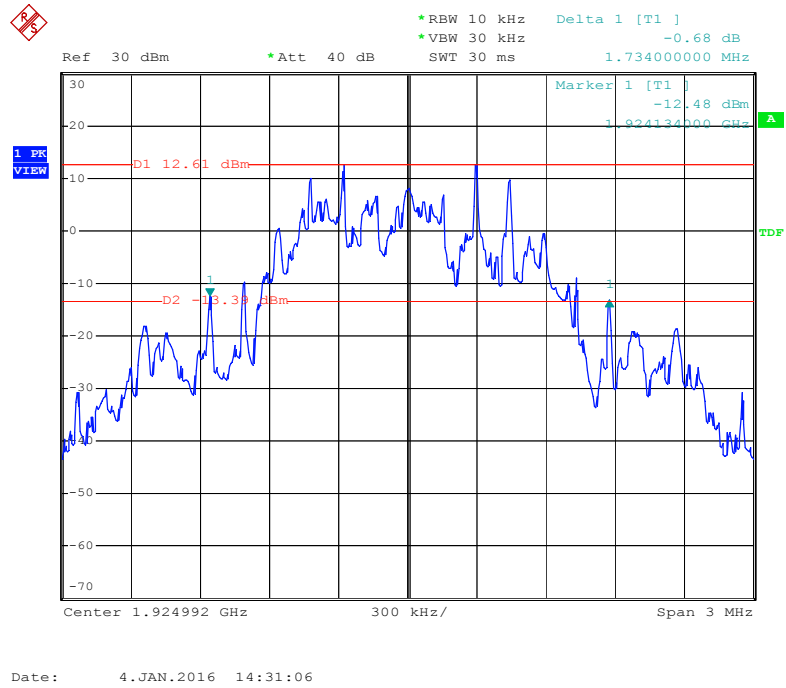

High Channel

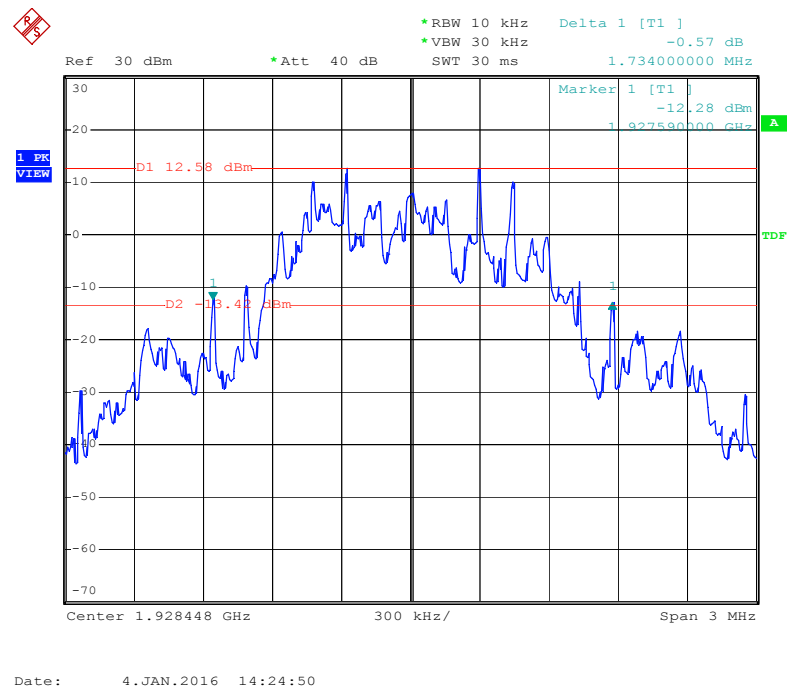


FP

Ant 0


| Channel | Center Frequency (MHz) | 26 dB Emission Bandwidth (MHz) | Limit                  |
|---------|------------------------|--------------------------------|------------------------|
| Low     | 1921.536               | 1.458                          | 50 kHz < OBW < 2.5 MHz |
| Middle  | 1924.992               | 1.458                          | 50 kHz < OBW < 2.5 MHz |
| High    | 1928.448               | 1.458                          | 50 kHz < OBW < 2.5 MHz |

Low Channel

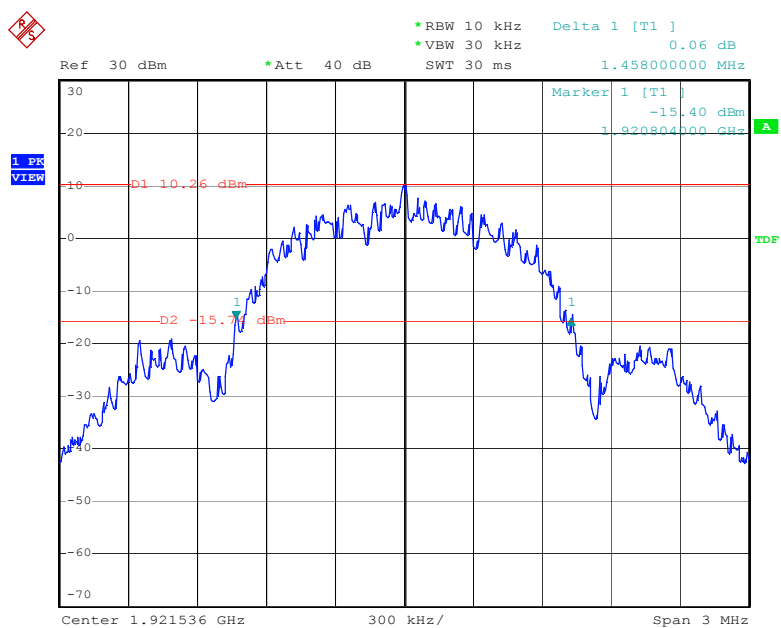


Date: 26.JAN.2016 14:31:10

Mid Channel

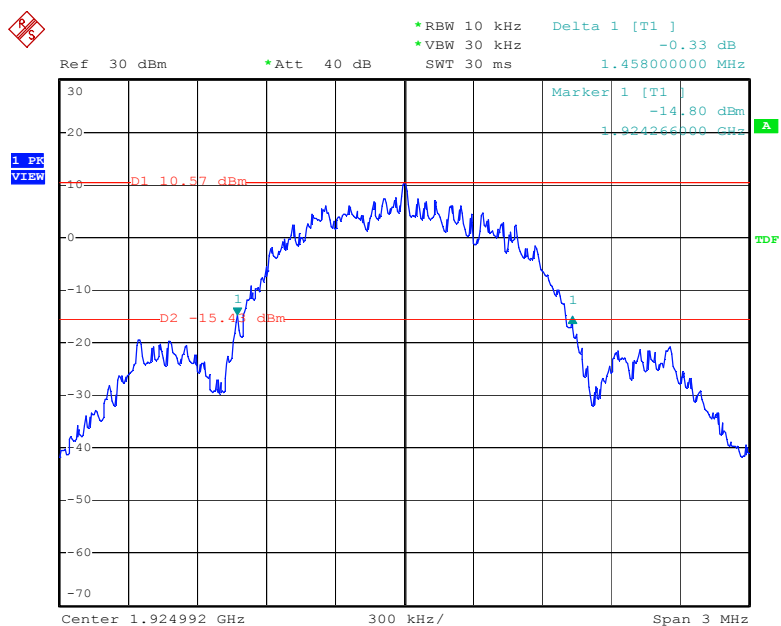

Date: 26.JAN.2016 14:29:35

High Channel

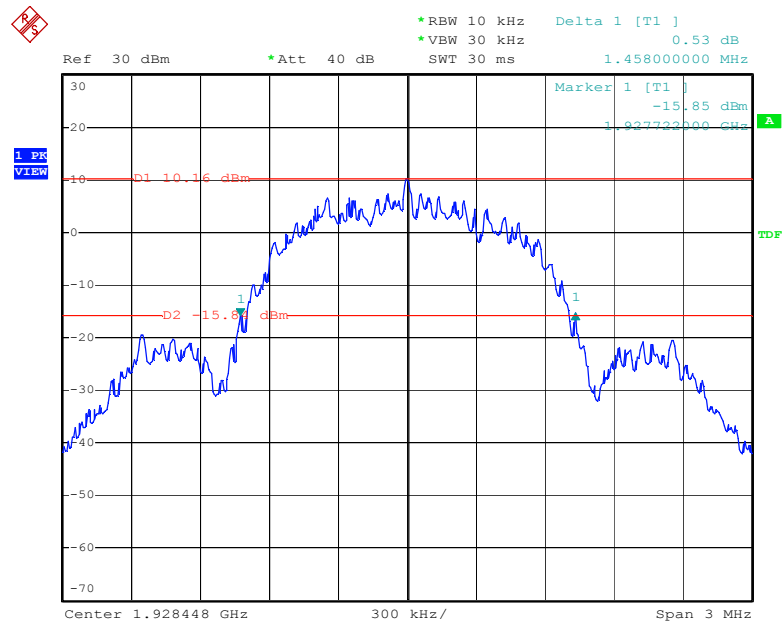


Date: 26.JAN.2016 14:27:41

Ant 1

| Channel | Center Frequency (MHz) | 26 dB Emission Bandwidth (MHz) | Limit                  |
|---------|------------------------|--------------------------------|------------------------|
| Low     | 1921.536               | 1.458                          | 50 kHz < OBW < 2.5 MHz |
| Middle  | 1924.992               | 1.458                          | 50 kHz < OBW < 2.5 MHz |
| High    | 1928.448               | 1.458                          | 50 kHz < OBW < 2.5 MHz |


Low Channel

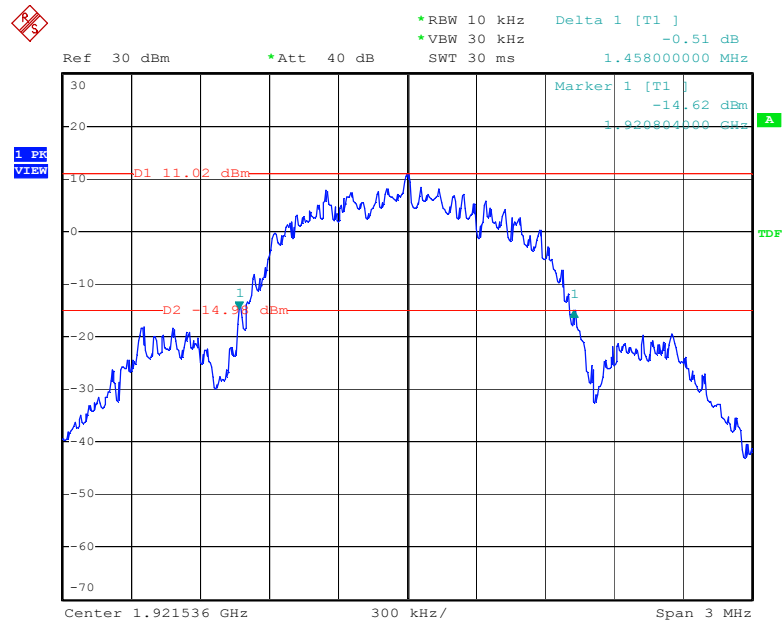


Date: 26.JAN.2016 10:32:54



Mid Channel

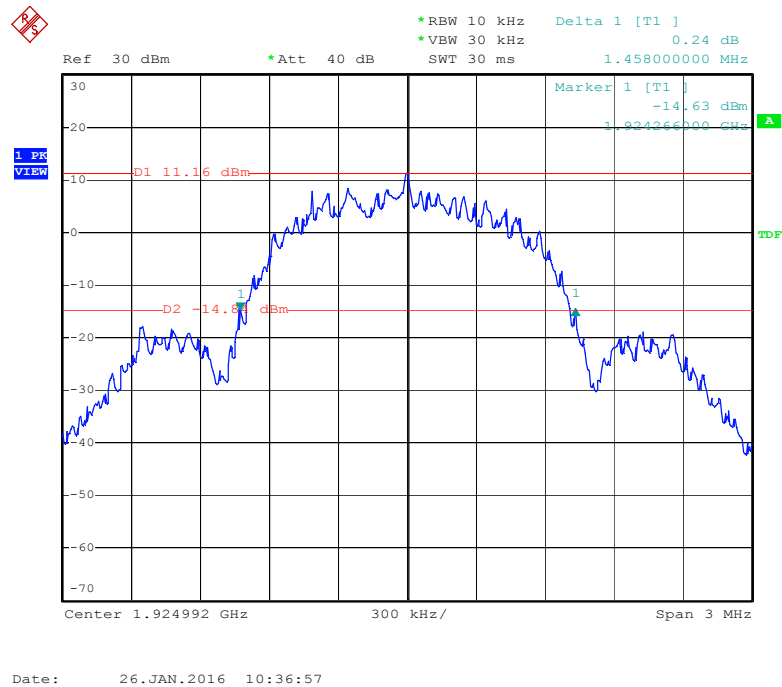

High Channel

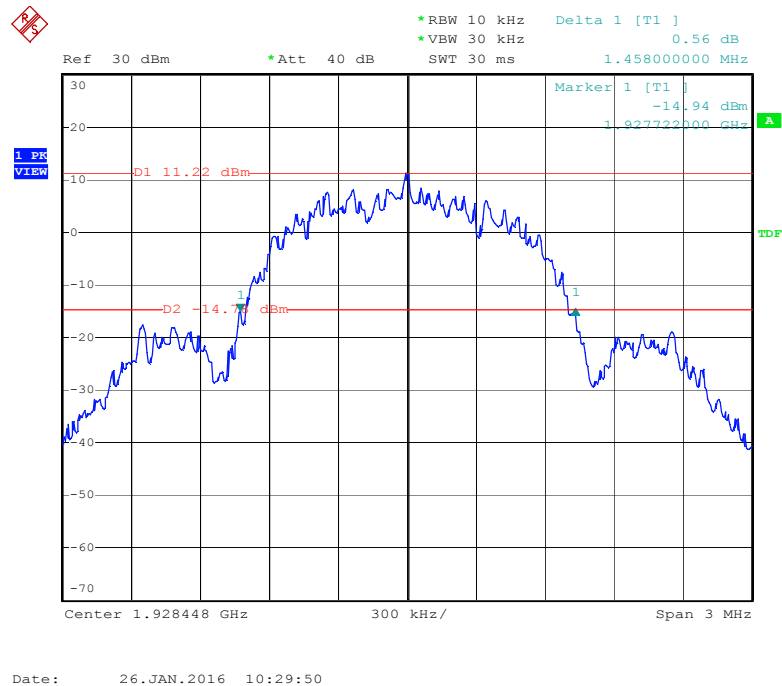

### 3.3 RF Output Power

#### 3.3.1 Test Equipment


Please refer to section 6 this report.

#### 3.3.2 Test Procedure

The peak power output as measured over an interval of time equal to the frame rate or transmission burst of the device under all conditions of modulation. Usually this parameter is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used [47 CFR 15, subpart D, 15.303].

The peak transmit power is according to ANSI C63.17-2006 §6.1.2

#### 3.3.3 Test Setup

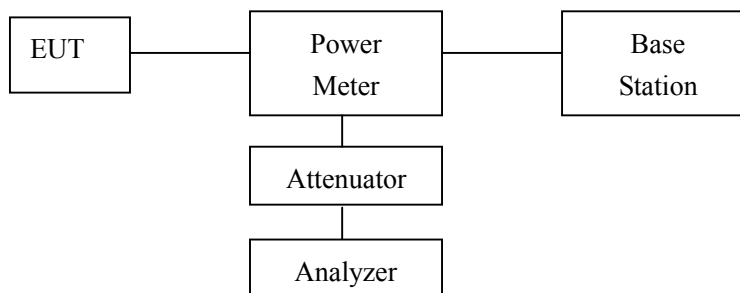

#### 3.3.4 Configuration of The EUT

Same as section 3.1.4 of this report

#### 3.3.5 EUT Operating Condition

Same as section 3.1.5 of this report

#### 3.3.6 Limit

Conducted:  $100 \text{ UW} \times \text{SQRT}(B)$  where B is measured Emission Bandwidth in Hz

The antenna gain is below 3 dBi, no reduction in transmit power is necessary.

Requirements, FCC 15.319(c)(e), RSS-213, Issue 2

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in Hertz.

Calculation of Peak Transmit Power Limit:

$$\text{Peak Transmit Power Limit} = 100 \mu\text{W} \times (\text{EBW})^{1/2}$$

EBW is the transmit emission bandwidth in Hz determined in the other test item:

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

### 3.3.7 RF Output Power Test Result

Product : DECT Cordless VoIP Phone  
 Test Item : RF Output Power  
 Test Voltage : DC 2.8V/5V  
 Test Result : **PASS**


Test Mode : CH Low ~ CH High  
 Temperature : 25 °C  
 Humidity : 56%RH

PP

| Channel | Frequency (MHz) | Peak Transmit Power (dBm) | Limit (dBm) |
|---------|-----------------|---------------------------|-------------|
| Low     | 1921.536        | 18.61                     | 21.20       |
| Middle  | 1924.992        | 18.18                     | 21.20       |
| High    | 1928.448        | 18.21                     | 21.20       |


EBW Low channel = 1734000 Hz, EBW Middle channel = 1734000 Hz, EBW High channel = 1734000 Hz  
 Peak Transmit Power Limit =  $100\mu\text{W} * (\text{EBW}) = 21.20\text{dBm}$

Low Channel

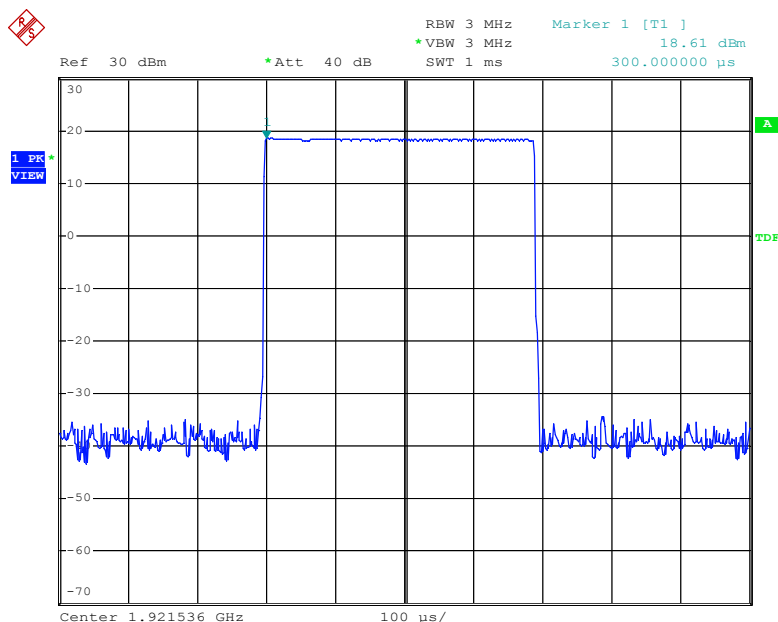


Date: 4.JAN.2016 14:15:08

Mid Channel

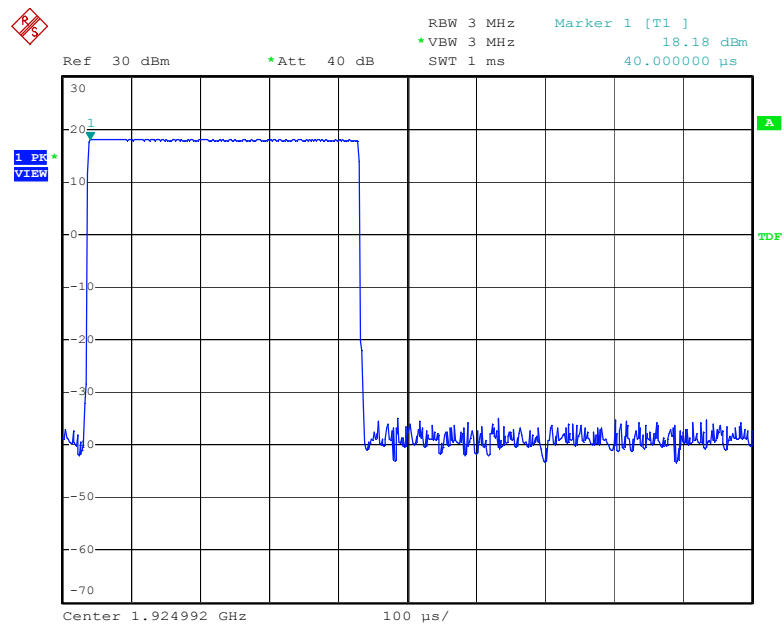

Date: 26.JAN.2016 15:30:21


High Channel

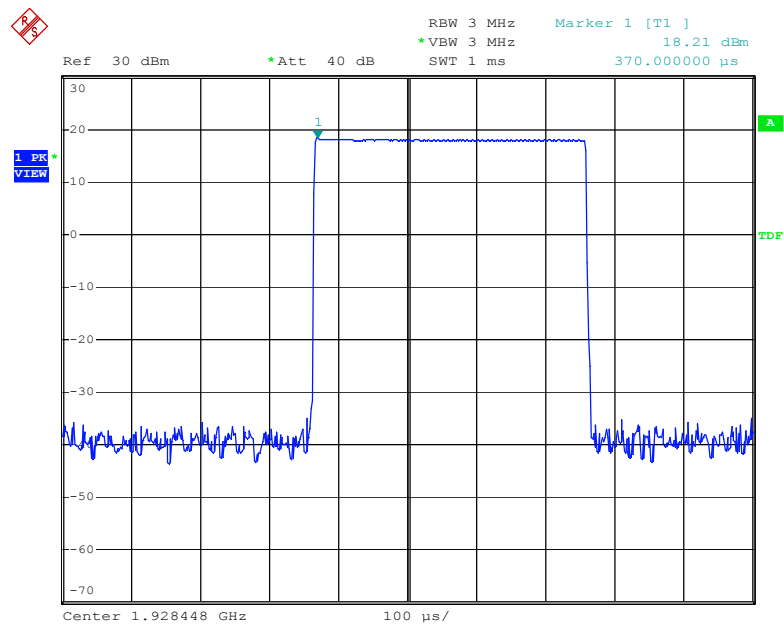

Date: 4.JAN.2016 14:17:52


**FP**  
**Ant0**

| Channel                                                                                                                                                                       | Frequency (MHz) | Peak Transmit Power (dBm) | Limit (dBm) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|-------------|
| Low                                                                                                                                                                           | 1921.536        | 18.61                     | 20.82       |
| Middle                                                                                                                                                                        | 1924.992        | 18.52                     | 20.82       |
| High                                                                                                                                                                          | 1928.448        | 18.33                     | 20.82       |
| EBW Low channel = 1458000 Hz, EBW Middle channel = 1458000 Hz, EBW High channel = 1458000 Hz<br>Peak Transmit Power Limit = $100\mu\text{W} * (\text{EBW}) = 20.83\text{dBm}$ |                 |                           |             |

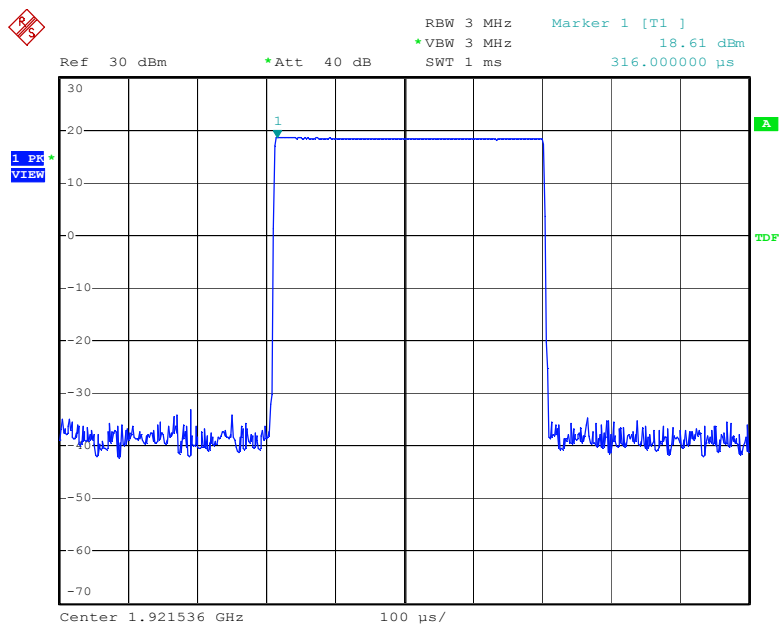**Low Channel**


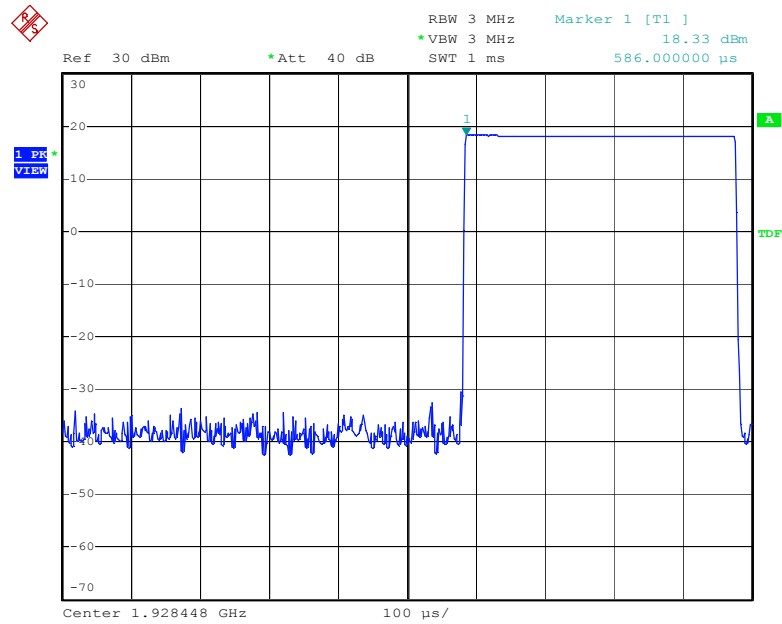
Date: 26.JAN.2016 14:22:39

Mid Channel

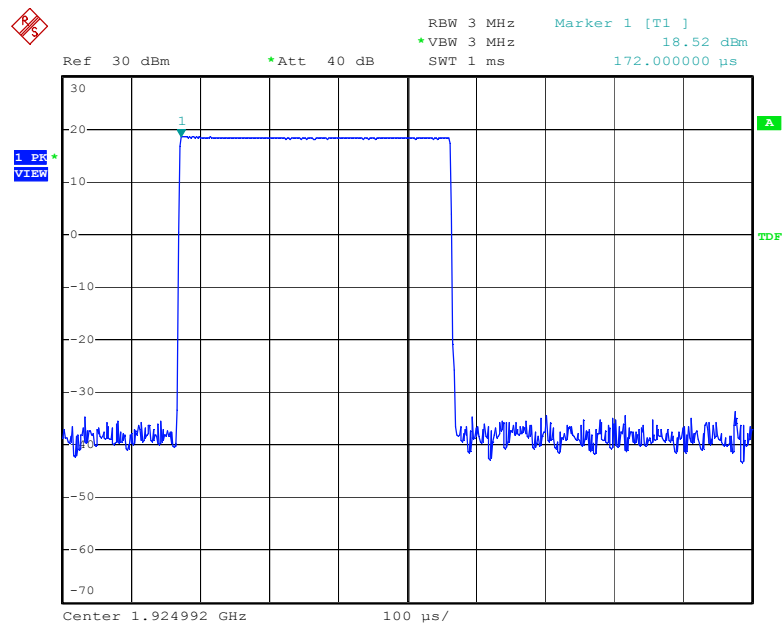

High Channel

Date: 26.JAN.2016 14:23:50




Date: 26.JAN.2016 14:24:47


Ant1

| Channel                                                                                                                                             | Frequency (MHz) | Peak Transmit Power (dBm) | Limit (dBm) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|-------------|
| Low                                                                                                                                                 | 1921.536        | 19.73                     | 20.82       |
| Middle                                                                                                                                              | 1924.992        | 19.63                     | 20.82       |
| High                                                                                                                                                | 1928.448        | 19.53                     | 20.82       |
| EBW Low channel = 1458000 Hz, EBW Middle channel = 1458000 Hz, EBW High channel = 1458000 Hz<br>Peak Transmit Power Limit = 100μW *(EBW) = 20.82dBm |                 |                           |             |

Low Channel

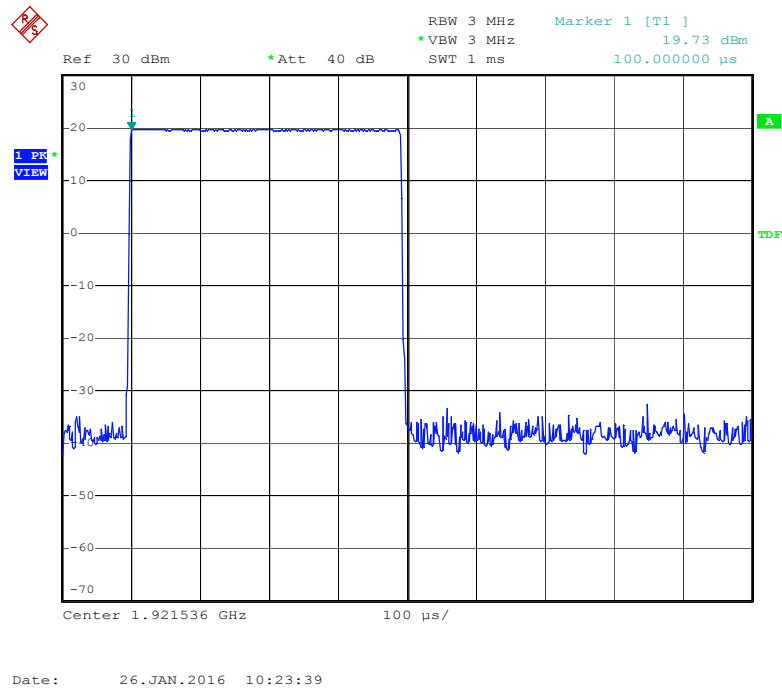


Mid Channel

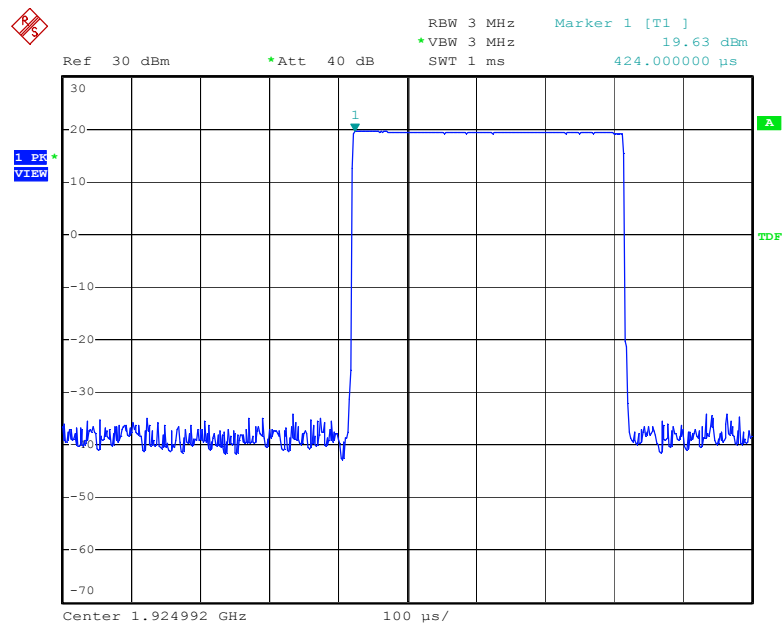

High Channel

Date: 26.JAN.2016 10:24:45

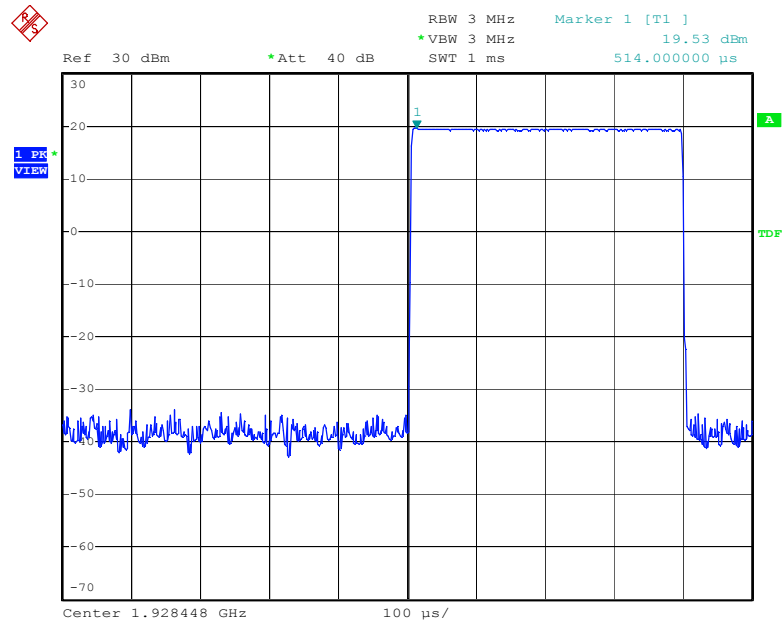

Date: 26.JAN.2016 10:26:41



### 3.4 Power Spectral Density


#### 3.4.1 Test Equipment

Please refer to section 6 this report.

#### 3.4.2 Test Procedure

The power spectral density is measured in accordance with ANSI C63.17.2006 Clause 6.1.5.

#### 3.4.3 Test Setup



#### 3.4.4 Configuration of The EUT

Same as section 3.1.4 of this report

#### 3.4.5 EUT Operating Condition

Same as section 3.1.5 of this report

#### 3.4.6 Limit

Power spectral density shall not exceed 3 mW (4.8dBm) in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.


#### 3.4.7 Power Spectral Density Test Result

|              |                              |             |                    |
|--------------|------------------------------|-------------|--------------------|
| Product      | : DECT Cordless VoIP Phone   | Test Mode   | : CH Low ~ CH High |
| Test Item    | : Radiated Spurious Emission | Temperature | : 25 °C            |
| Test Voltage | : DC 2.8V/5V                 | Humidity    | : 56%RH            |
| Test Result  | : <b>PASS</b>                |             |                    |


PP

| Channel | Frequency (MHz) | Power Spectral Density |           | Limit (mW/3kHz) | Result |
|---------|-----------------|------------------------|-----------|-----------------|--------|
|         |                 | (dBm/3kHz)             | (mW/3kHz) |                 |        |
| Low     | 1921.536        | 11.33                  | 0.0203    | 3               | Pass   |
| Middle  | 1924.992        | 11.21                  | 0.0184    | 3               | Pass   |
| High    | 1928.448        | 11.29                  | 0.0178    | 3               | Pass   |

Low Channel

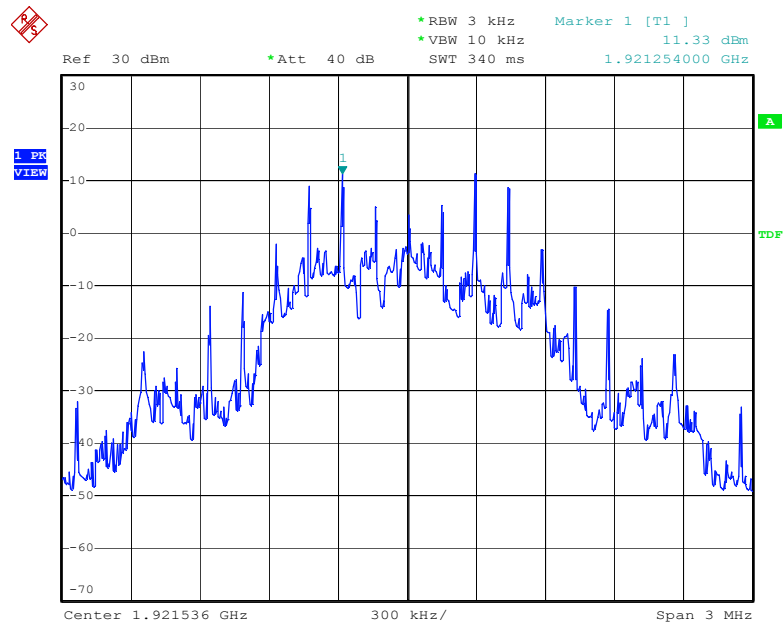


Date: 4.JAN.2016 16:32:31

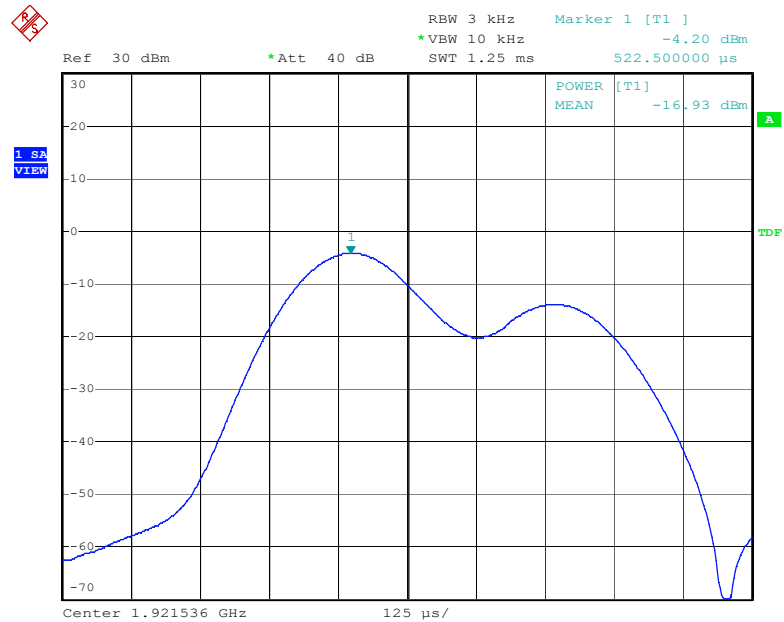


Date: 4.JAN.2016 16:49:57

Mid Channel

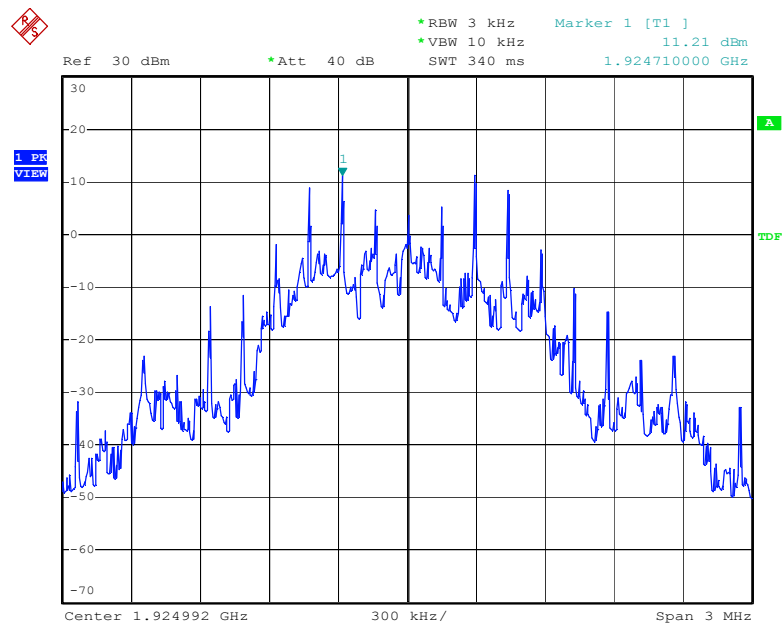


Date: 4.JAN.2016 16:56:15

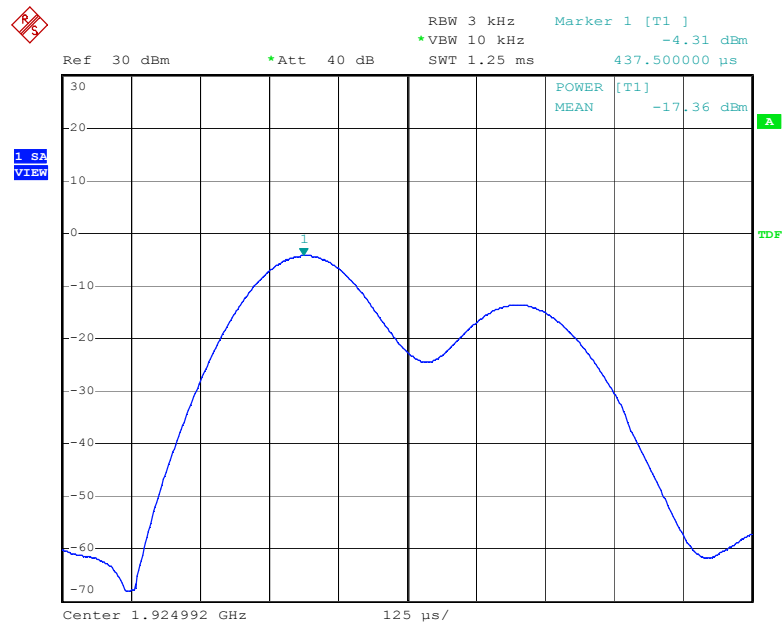


Date: 4.JAN.2016 16:51:01

High Channel

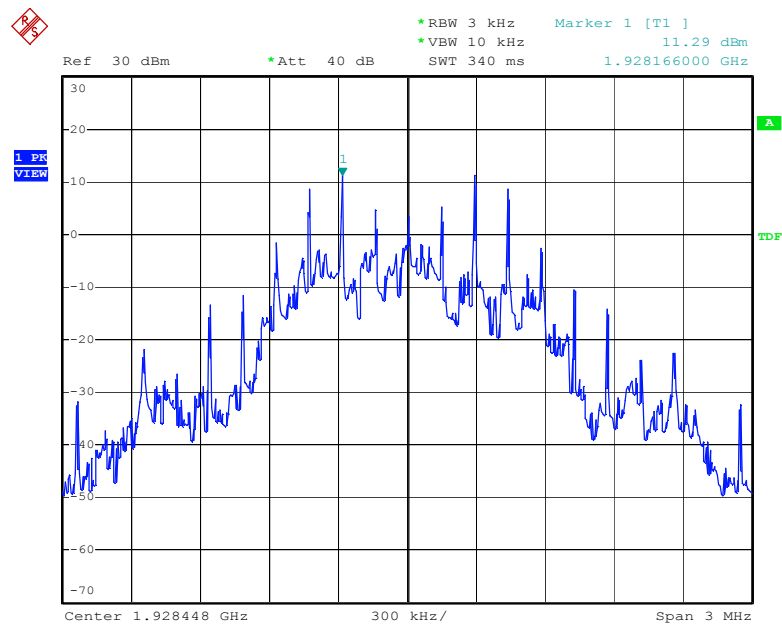

Date: 4.JAN.2016 16:57:44

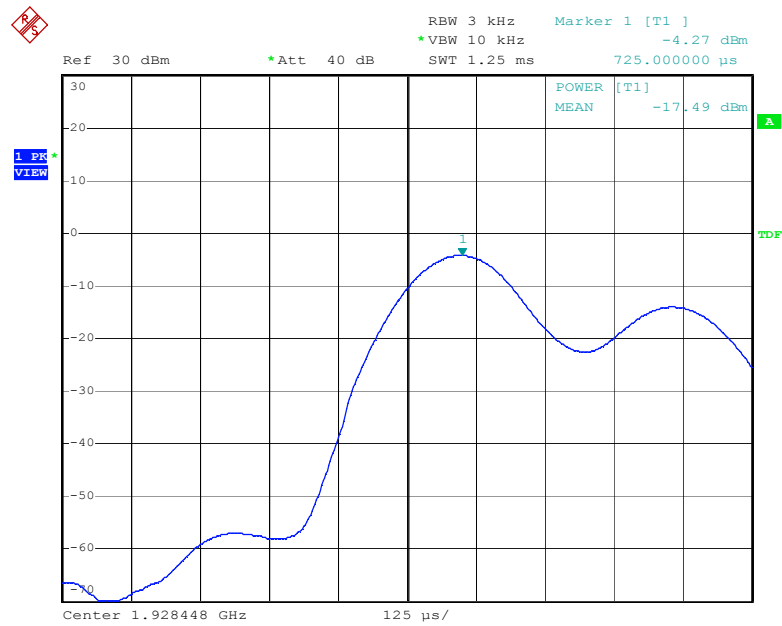


Date: 4.JAN.2016 16:58:30


FP  
Ant0

| Channel | Frequency (MHz) | Power Spectral Density |           | Limit (mW/3kHz) | Result |
|---------|-----------------|------------------------|-----------|-----------------|--------|
|         |                 | (dBm/3kHz)             | (mW/3kHz) |                 |        |
| Low     | 1921.536        | 3.69                   | 0.0652    | 3               | Pass   |
| Middle  | 1924.992        | 2.92                   | 0.0700    | 3               | Pass   |
| High    | 1928.448        | 3.10                   | 0.0695    | 3               | Pass   |

Low Channel

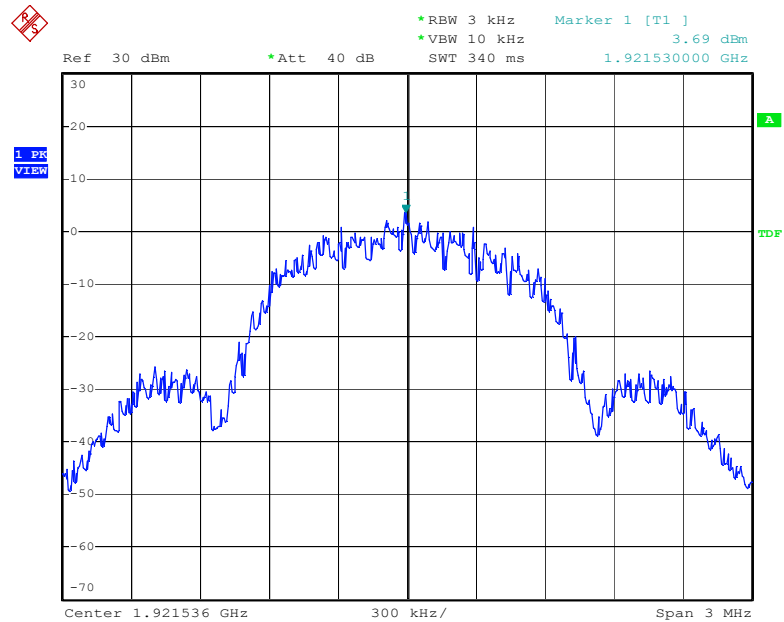


Date: 26.JAN.2016 14:35:27

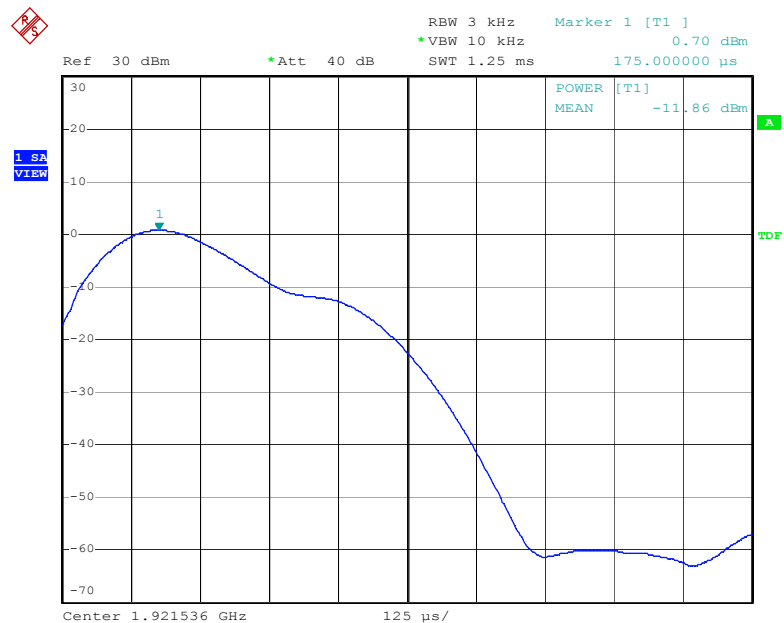


Date: 26.JAN.2016 14:44:12

Mid Channel

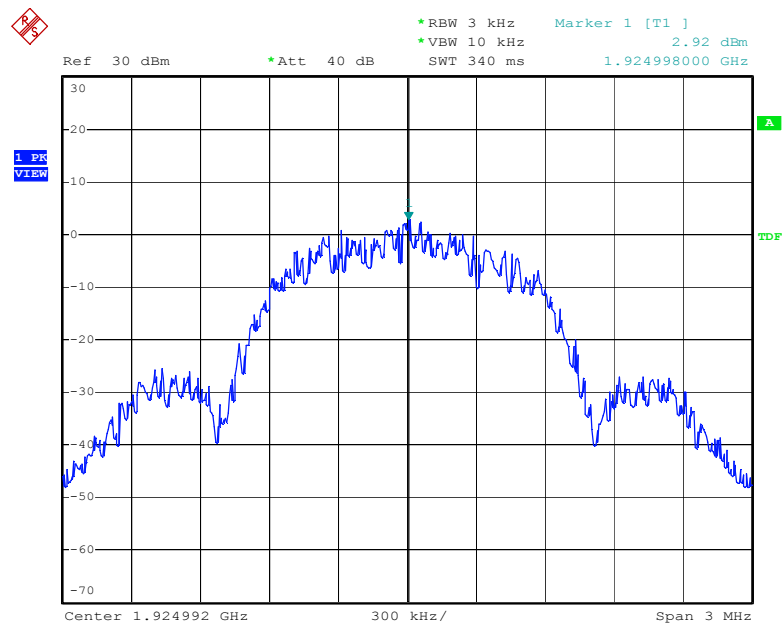


Date: 26.JAN.2016 14:40:10

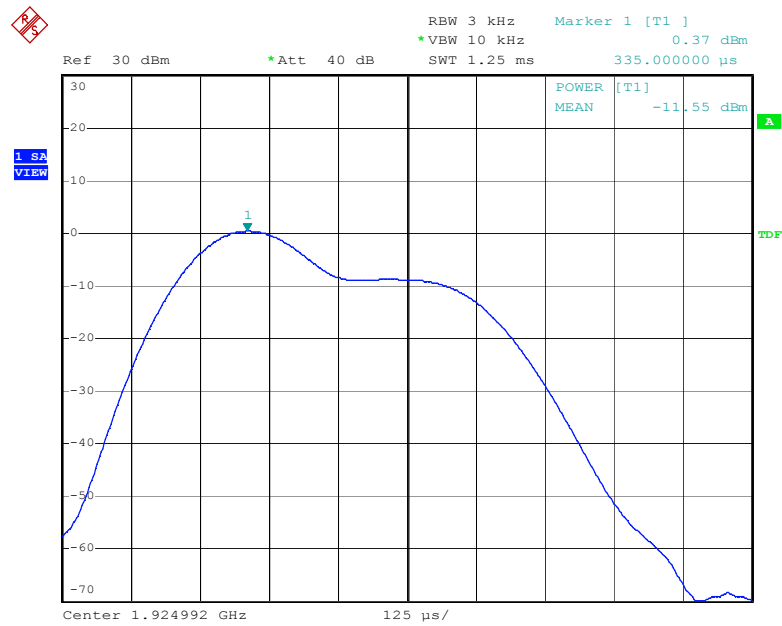


Date: 26.JAN.2016 14:42:52

High Channel

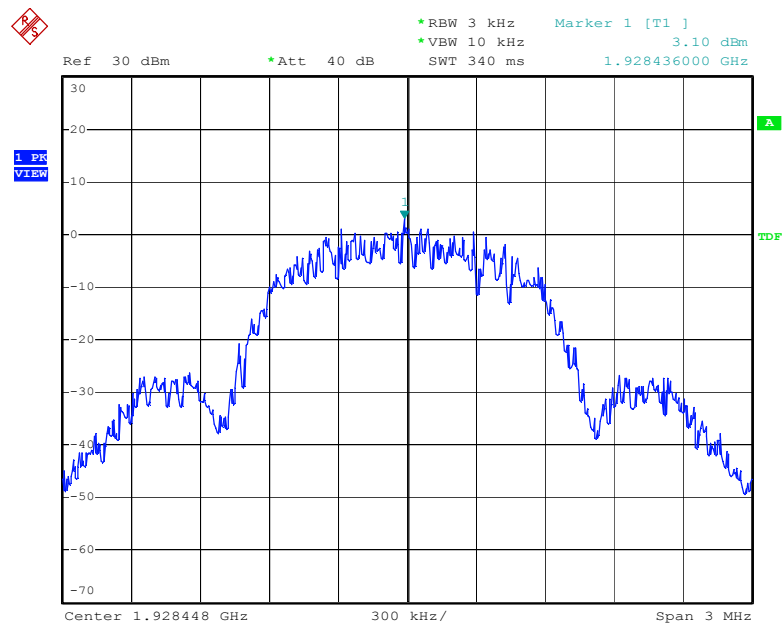

Date: 26.JAN.2016 14:38:11

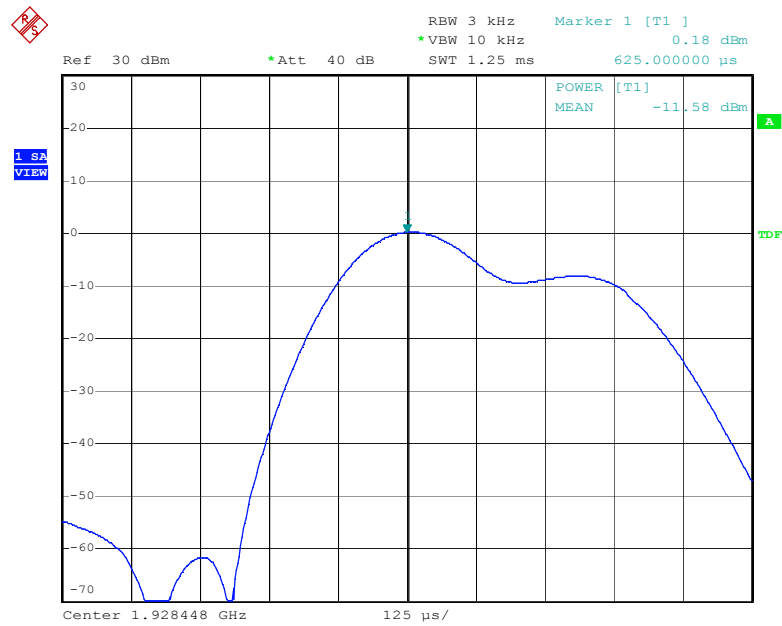


Date: 26.JAN.2016 14:46:01


Ant1

| Channel | Frequency (MHz) | Power Spectral Density |           | Limit (mW/3kHz) | Result |
|---------|-----------------|------------------------|-----------|-----------------|--------|
|         |                 | (dBm/3kHz)             | (mW/3kHz) |                 |        |
| Low     | 1921.536        | 4.28                   | 0.0502    | 3               | Pass   |
| Middle  | 1924.992        | 3.77                   | 0.0621    | 3               | Pass   |
| High    | 1928.448        | 3.42                   | 0.0488    | 3               | Pass   |

Low Channel

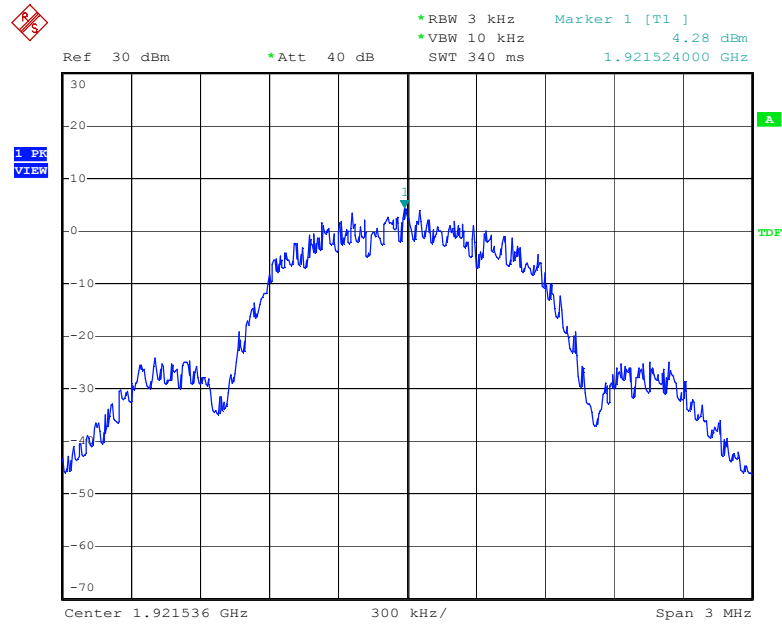


Date: 26.JAN.2016 10:51:36

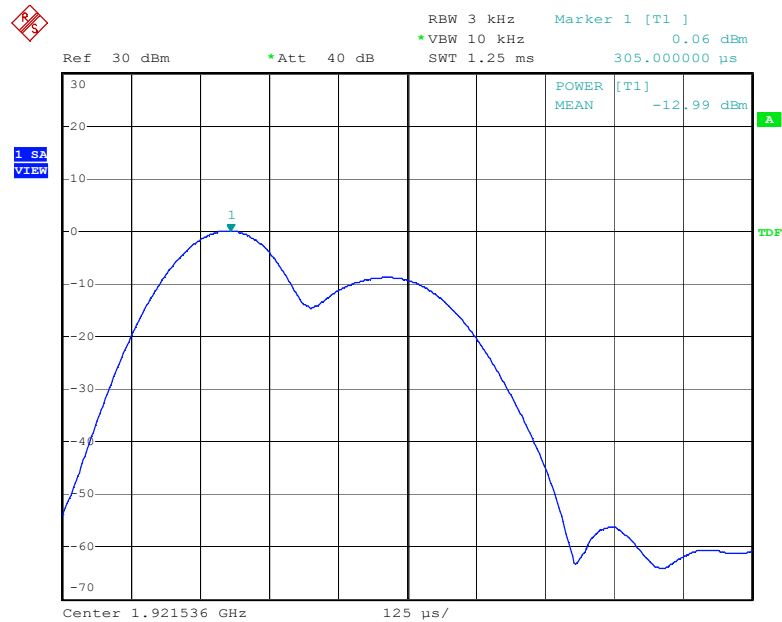


Date: 26.JAN.2016 10:57:38



Mid Channel

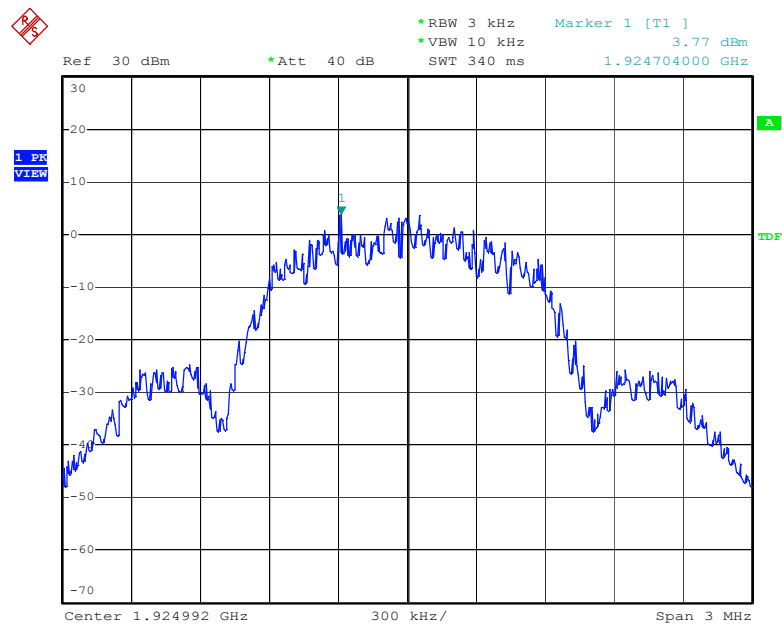


Date: 26.JAN.2016 10:45:20

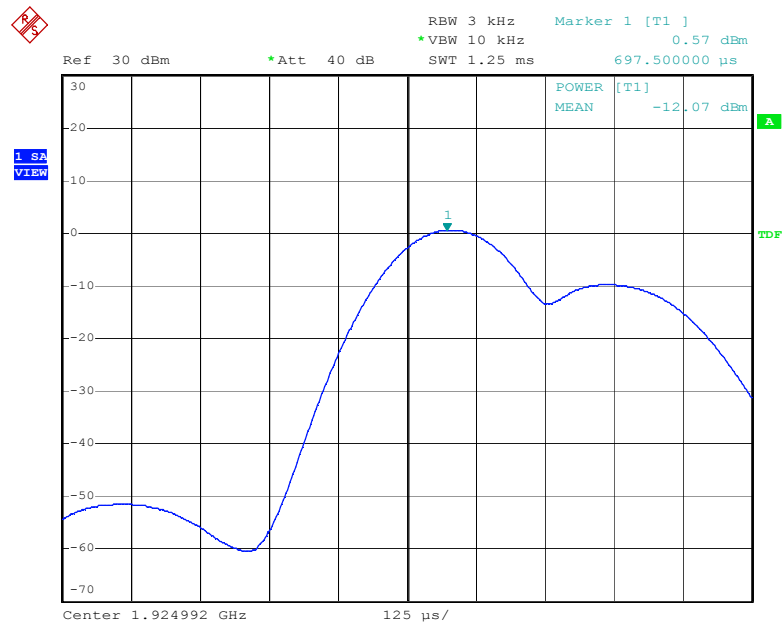


Date: 26.JAN.2016 14:49:16

High Channel

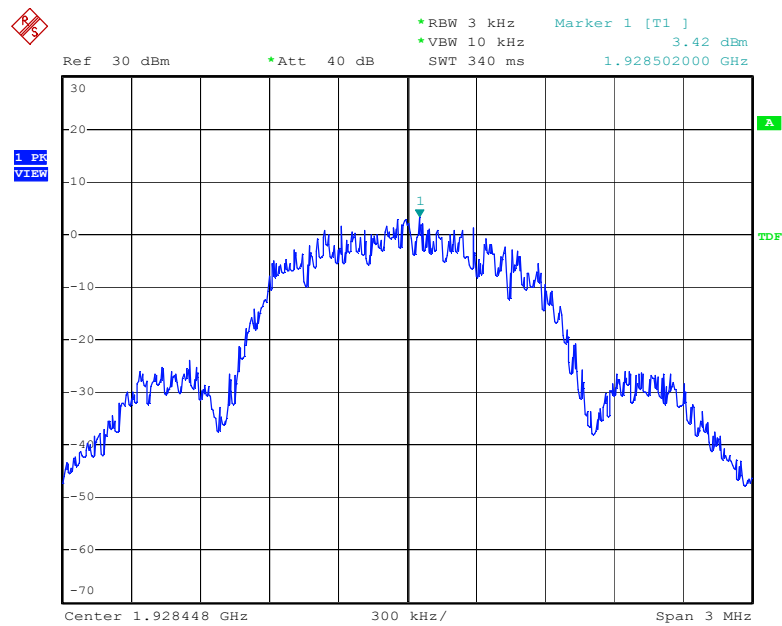

Date: 26.JAN.2016 10:52:57

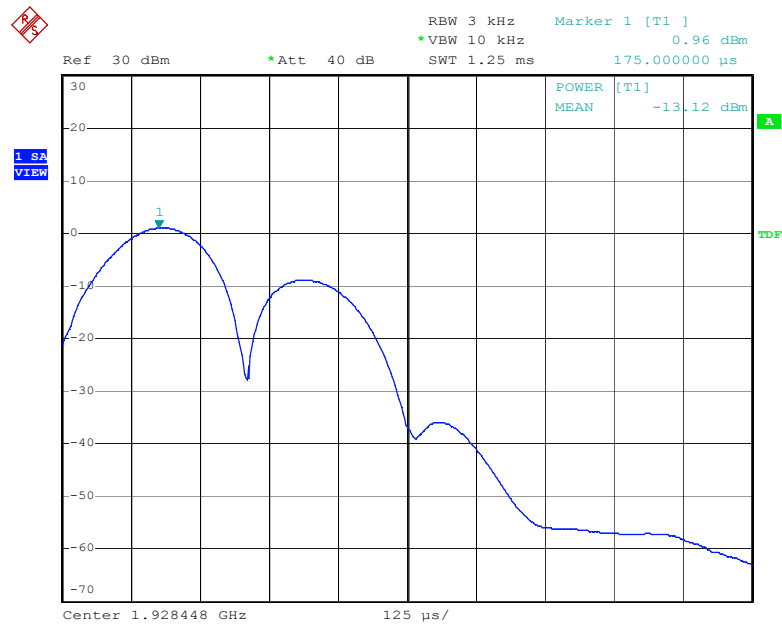

Date: 26.JAN.2016 10:56:50

### 3.5 Emission Inside and Outside the Sub-band


#### 3.5.1 Test Equipment

Please refer to section 6 this report.

#### 3.5.2 Test Procedure

According to ANSI C63.17.2006 Clause 6.1.6.

#### 3.5.3 Test Setup



#### 3.5.4 Configuration of The EUT

Same as section 3.1.4 of this report

#### 3.5.5 EUT Operating Condition

Same as section 3.1.5 of this report

#### 3.5.6 Limit

Emissions inside the sub-band must comply with the following emission mask:

- a. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
- b. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator;
- c. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mw (20.5dBm) as follows:


- a. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
- b. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
- c. 60 dB at 2.5 MHz or greater above or below the sub-band.

#### 3.5.7 Emission Inside and Outside the Sub-band Test Result

|              |                              |             |                    |
|--------------|------------------------------|-------------|--------------------|
| Product      | : DECT Cordless VoIP Phone   | Test Mode   | : CH Low ~ CH High |
| Test Item    | : Radiated Spurious Emission | Temperature | : 25 °C            |
| Test Voltage | : DC 2.8V/5V                 | Humidity    | : 56%RH            |
| Test Result  | : <b>PASS</b>                |             |                    |


PP

Low Channel (Unwanted Emission inside the Sub-band)

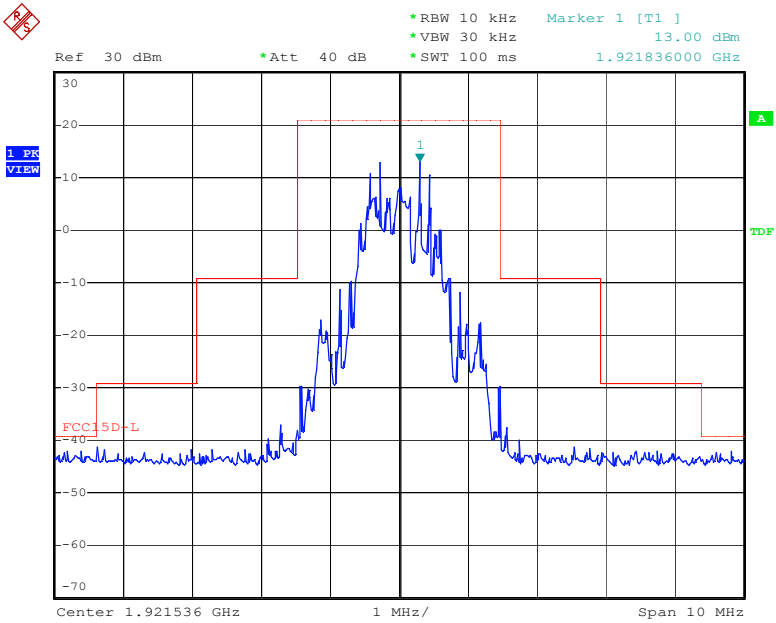


Date: 5.JAN.2016 09:18:35

Middle Channel (Unwanted Emission inside the Sub-band)

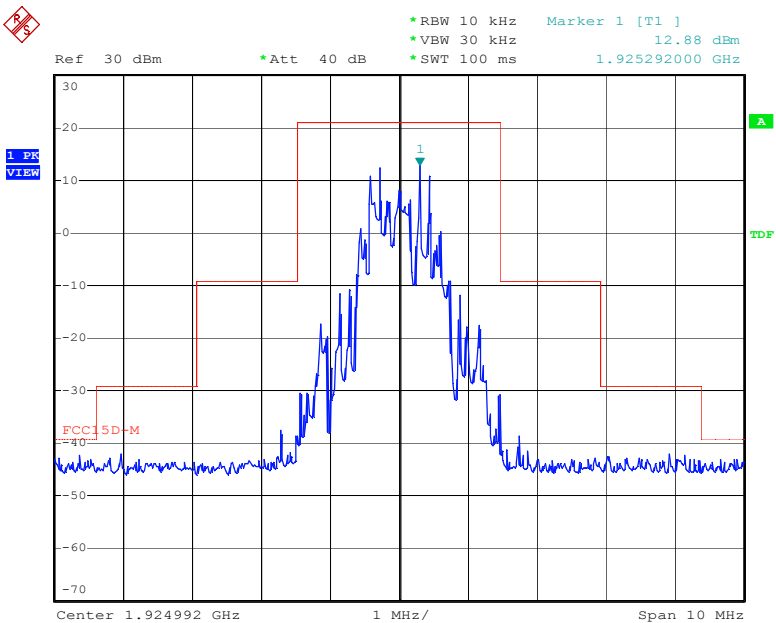


Date: 5.JAN.2016 09:19:32

High Channel (Unwanted Emission inside the Sub-band)

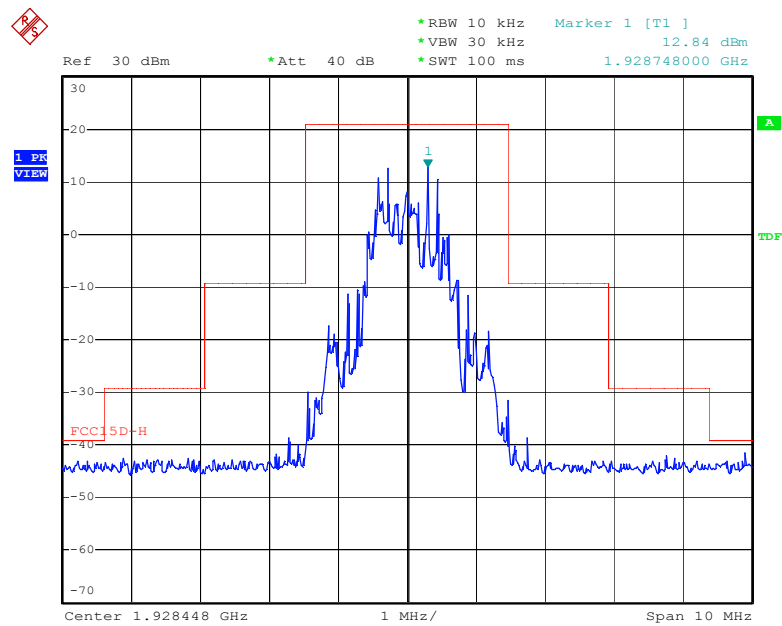


Date: 5.JAN.2016 09:20:42


Low Channel (Unwanted Emission outside the Sub-band)

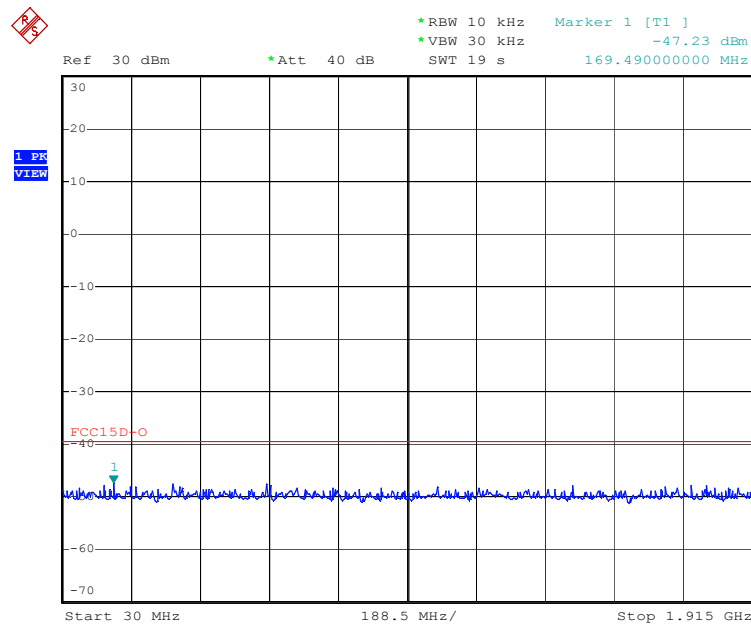


Date: 5.JAN.2016 09:24:02

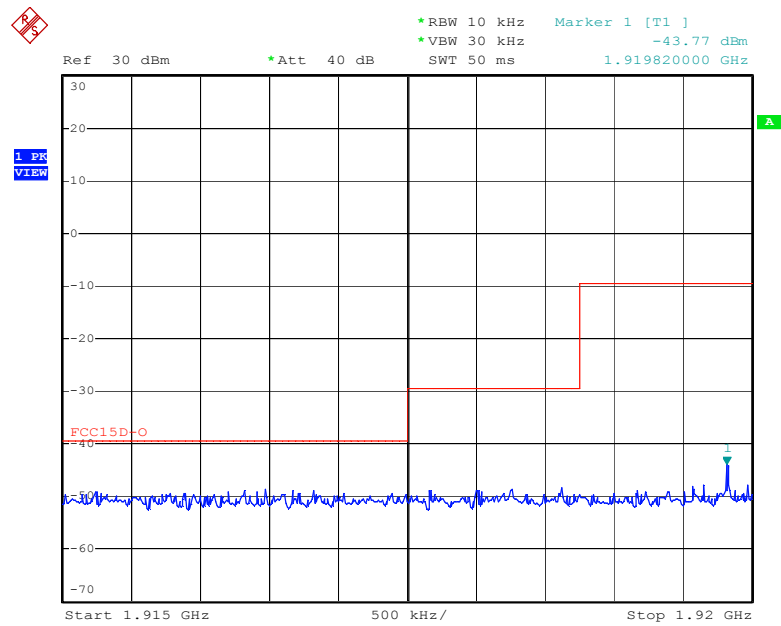


Date: 5.JAN.2016 09:25:06

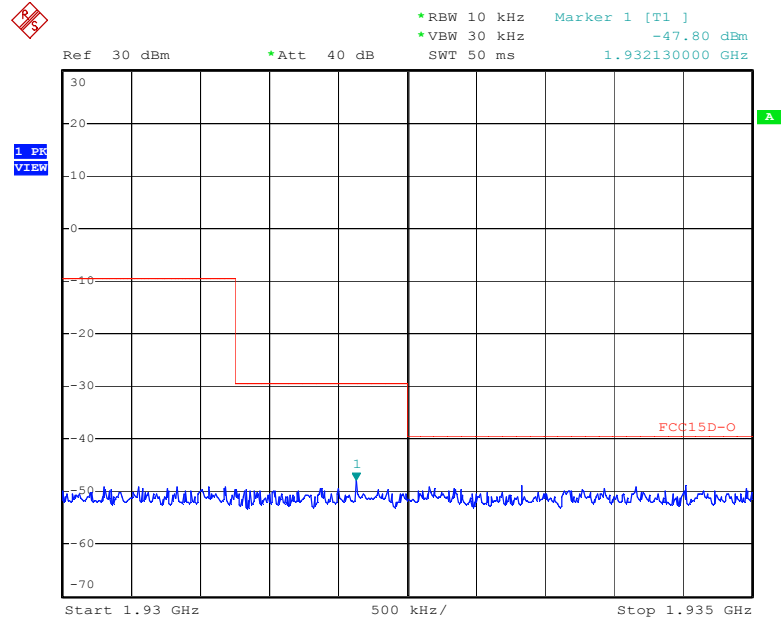

Date: 5.JAN.2016 09:25:38

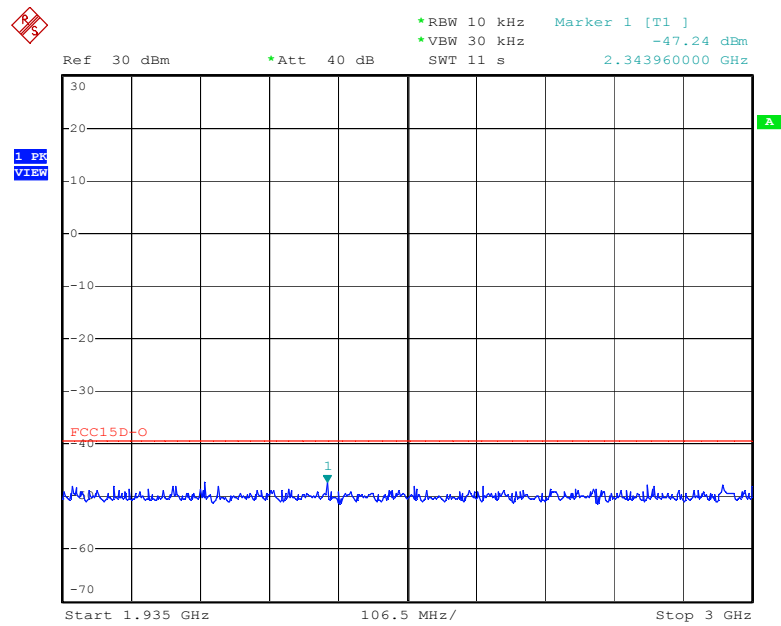


Date: 5.JAN.2016 09:27:02

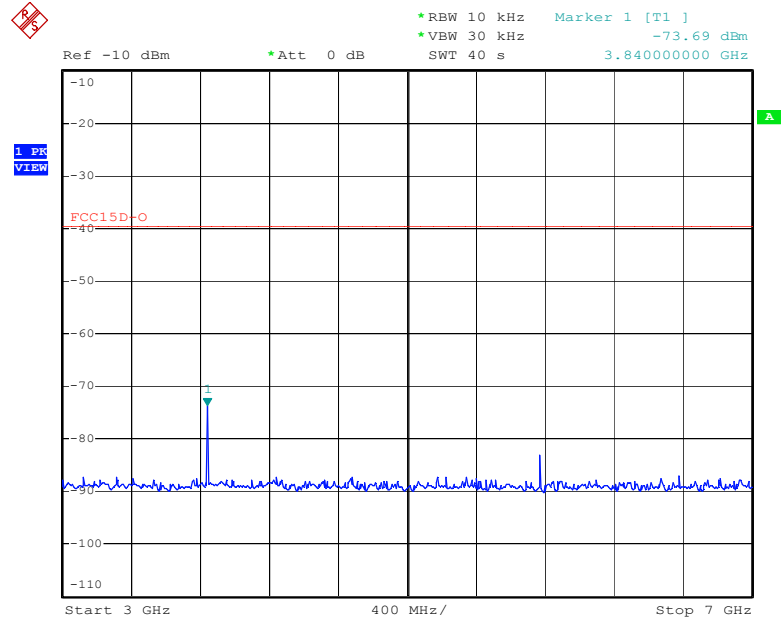


Date: 5.JAN.2016 09:33:22

Middle Channel (Unwanted Emission outside the Sub-band)

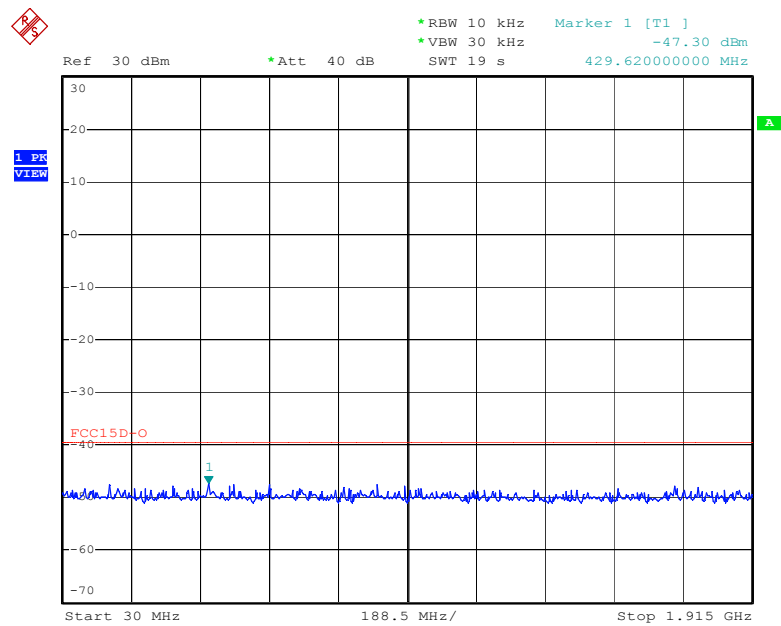


Date: 5.JAN.2016 09:46:05

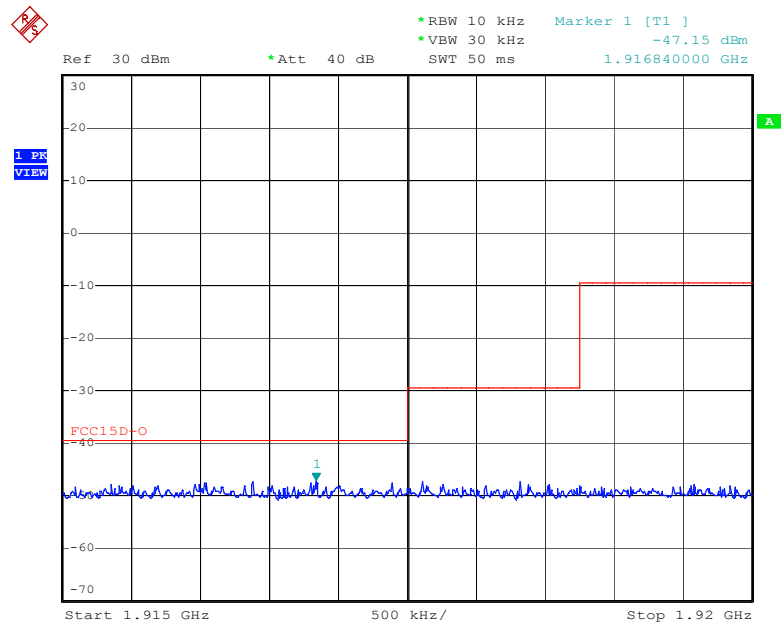


Date: 5.JAN.2016 09:47:54




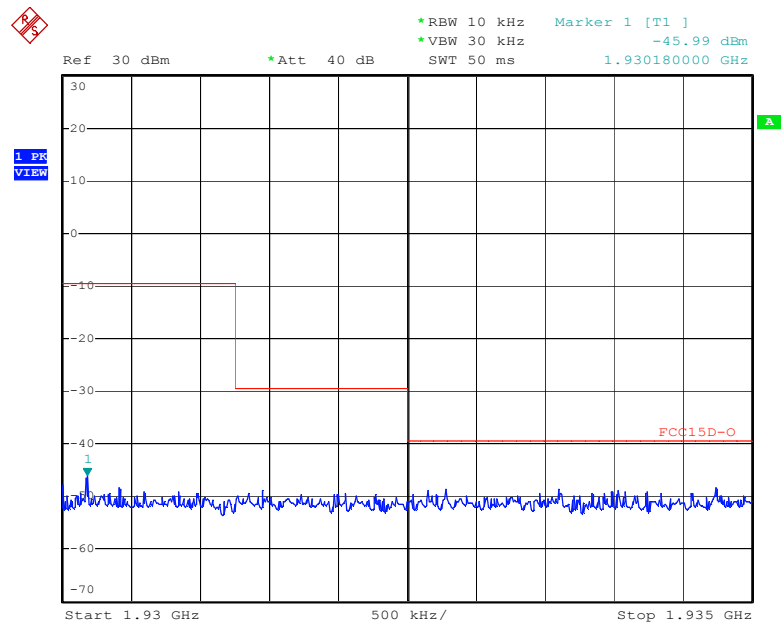

Date: 5.JAN.2016 09:51:02

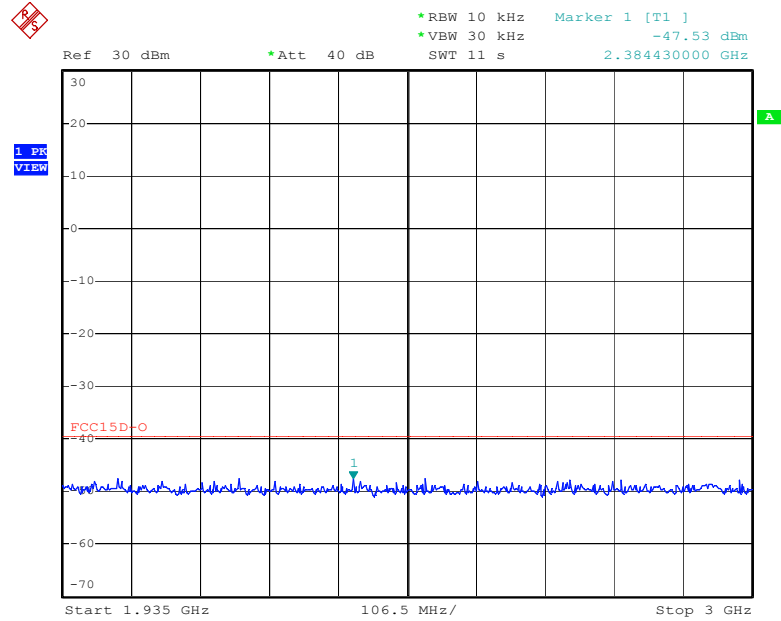


Date: 5.JAN.2016 09:52:23


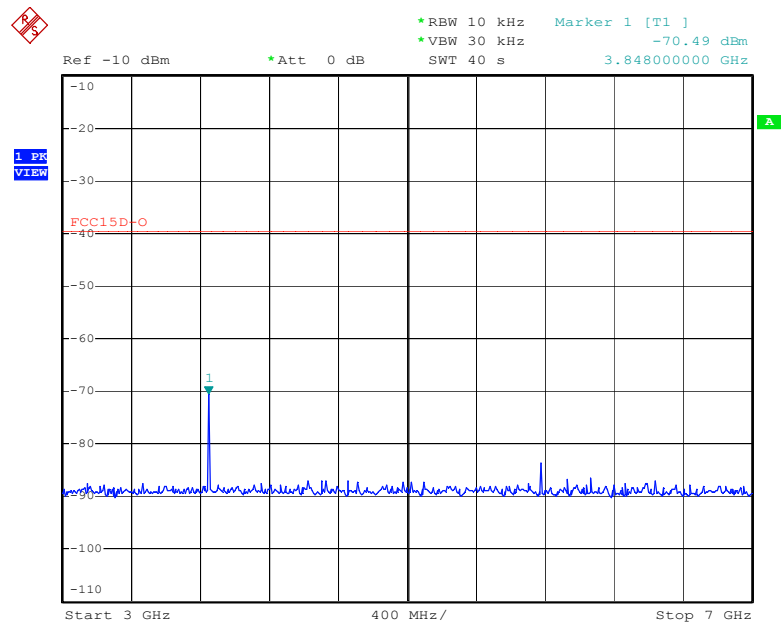



Date: 5.JAN.2016 09:37:03

High Channel (Unwanted Emission outside the Sub-band)

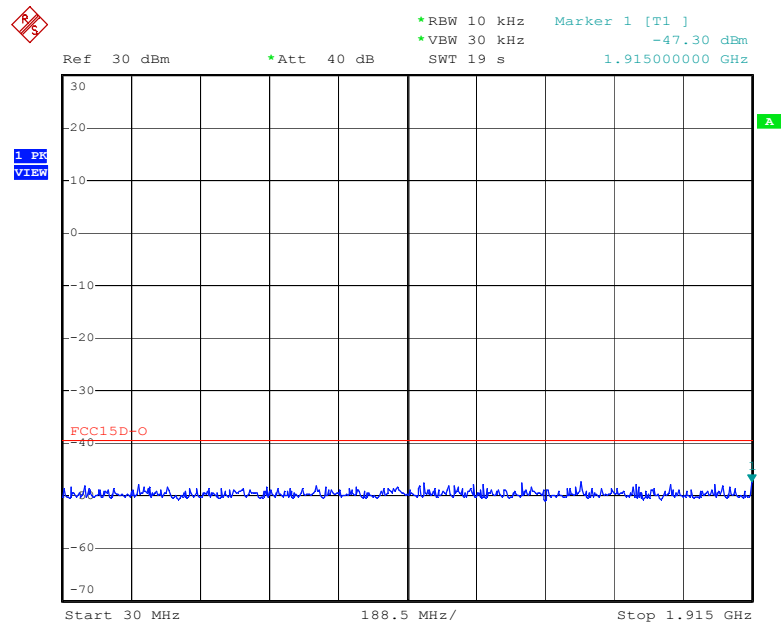


Date: 5.JAN.2016 09:42:51

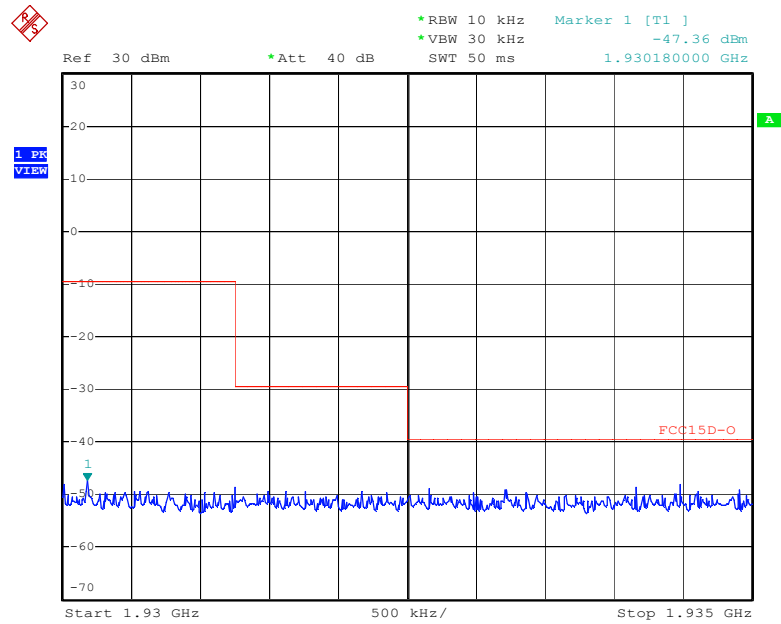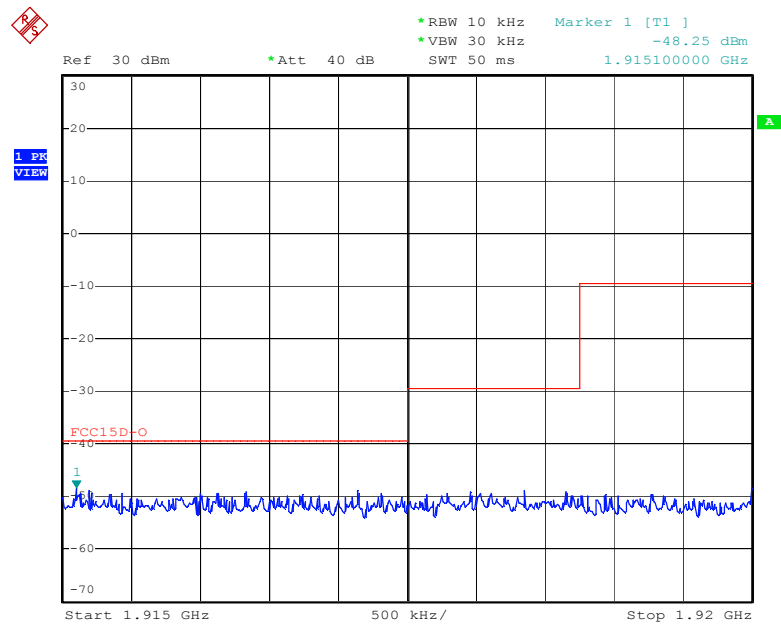

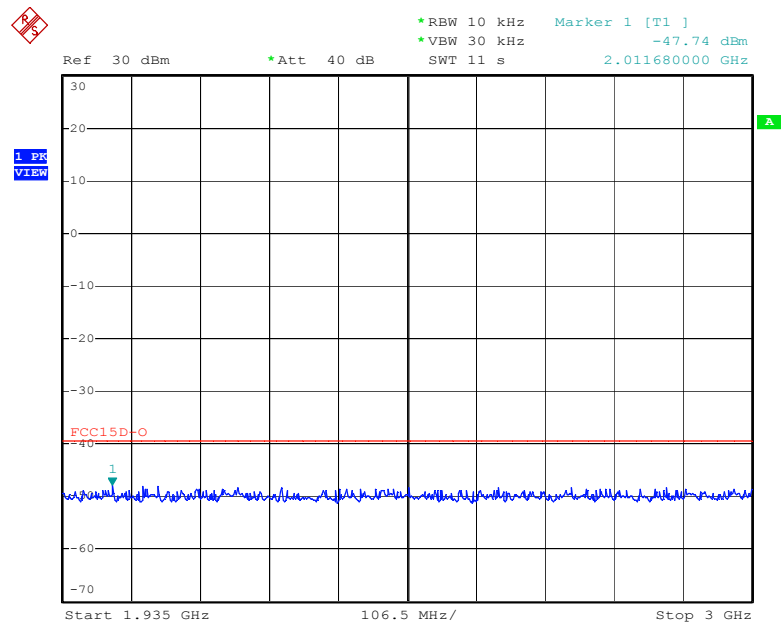


Date: 5.JAN.2016 09:44:45

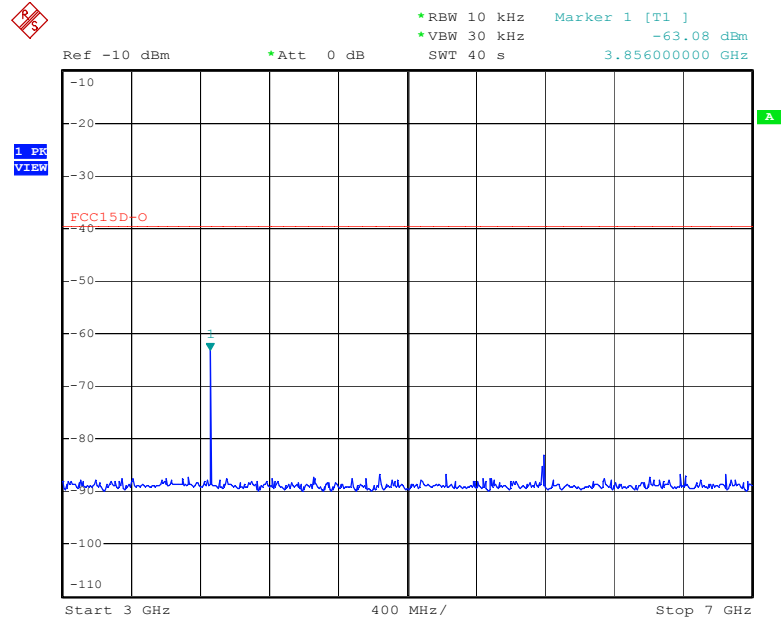

Date: 5.JAN.2016 09:40:48


FP  
Ant0

## Low Channel (Unwanted Emission inside the Sub-band)

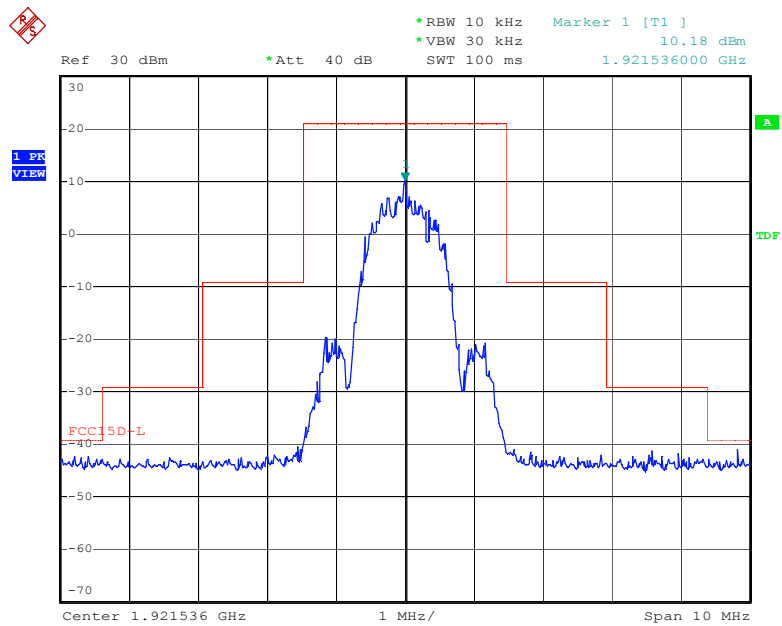


Date: 26.JAN.2016 14:56:55

## Middle Channel (Unwanted Emission inside the Sub-band)

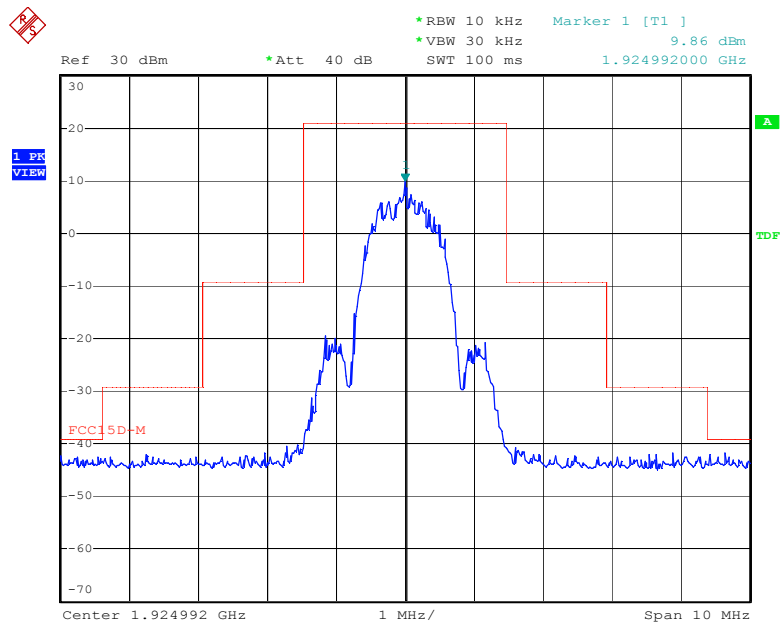


Date: 26.JAN.2016 14:58:37

High Channel (Unwanted Emission inside the Sub-band)

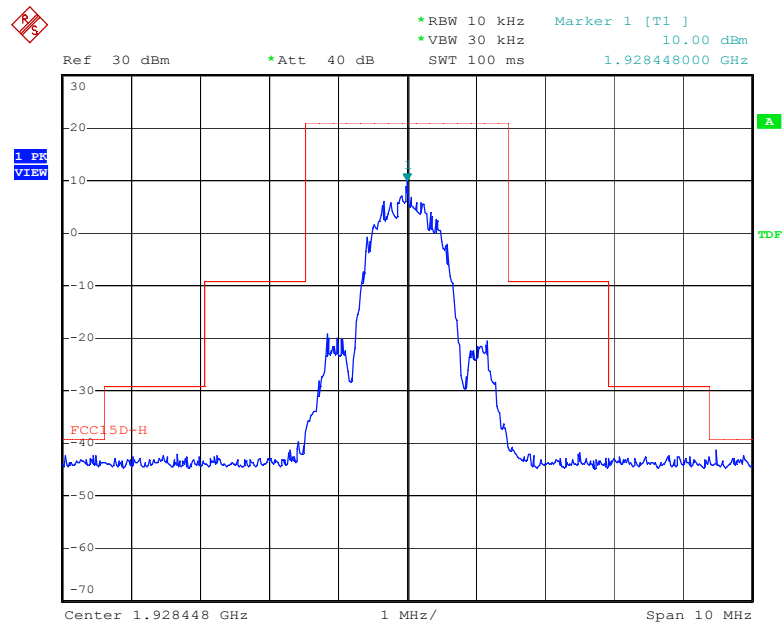


Date: 26.JAN.2016 15:00:24


Low Channel (Unwanted Emission outside the Sub-band)

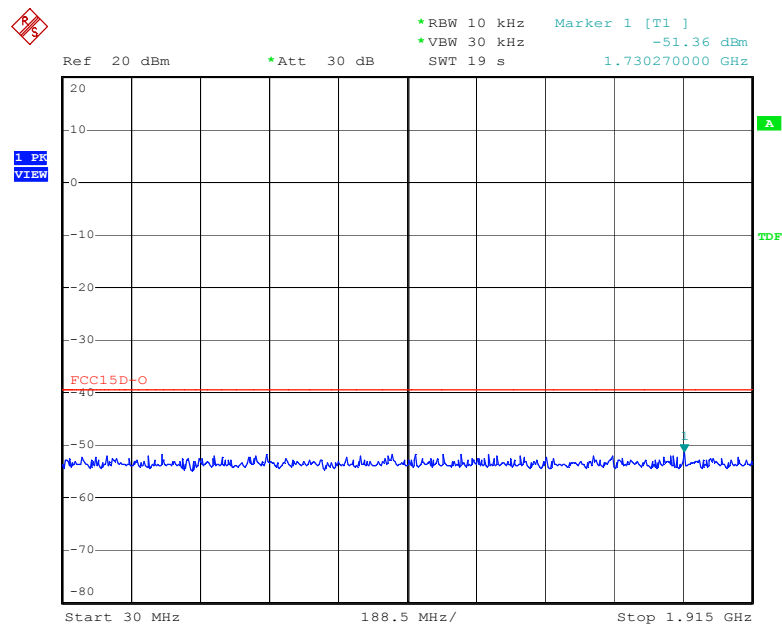


Date: 26.JAN.2016 15:03:32

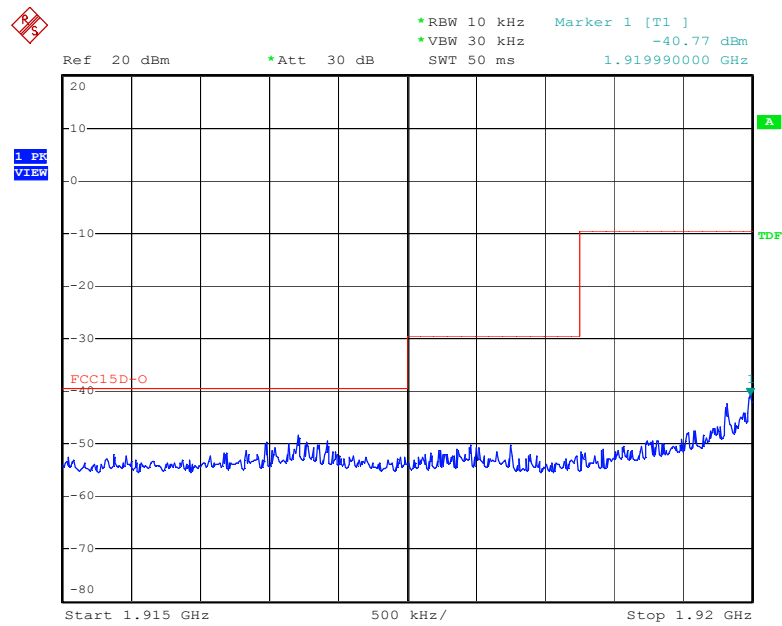


Date: 26.JAN.2016 15:04:25

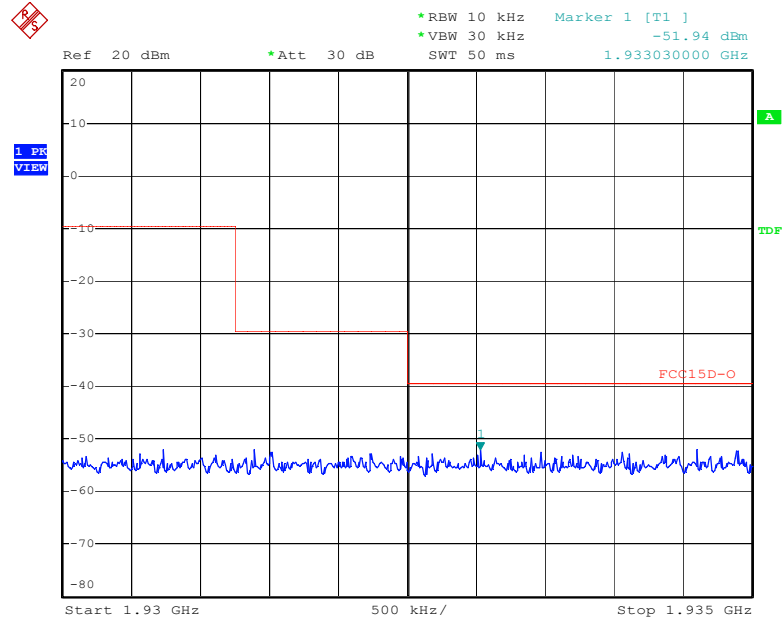

Date: 26.JAN.2016 15:04:58

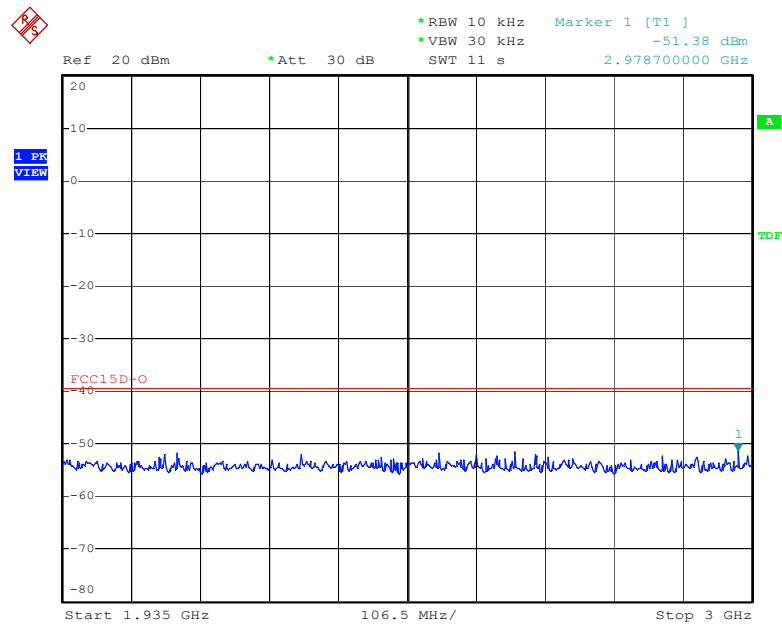


Date: 26.JAN.2016 15:06:08

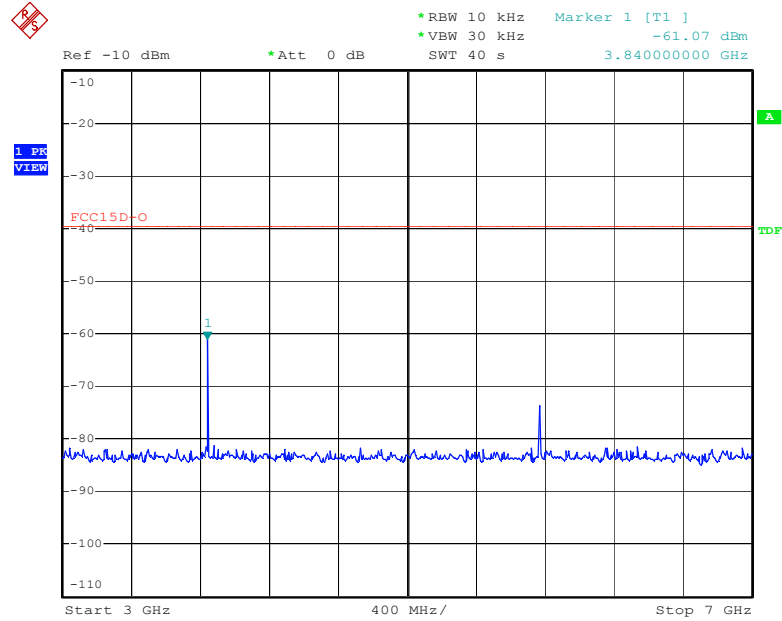


Date: 26.JAN.2016 15:08:08





Middle Channel (Unwanted Emission outside the Sub-band)

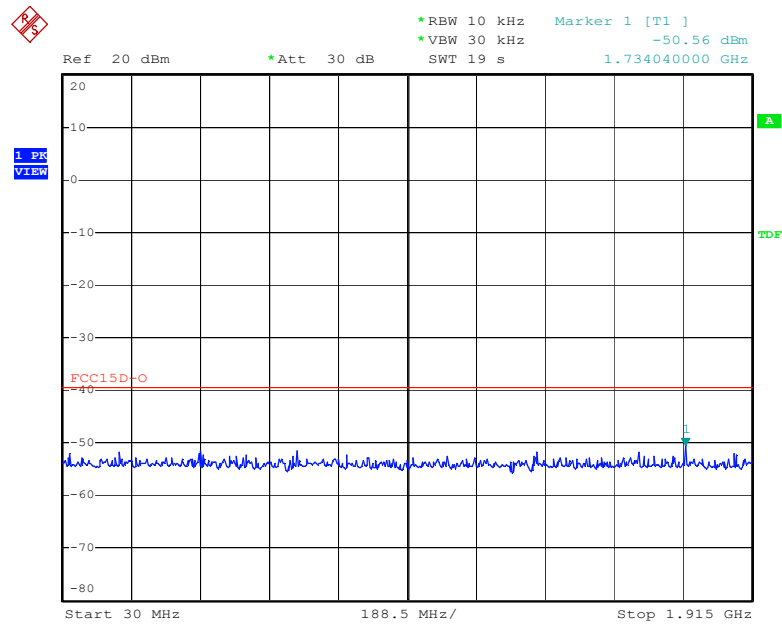


Date: 26.JAN.2016 15:11:33

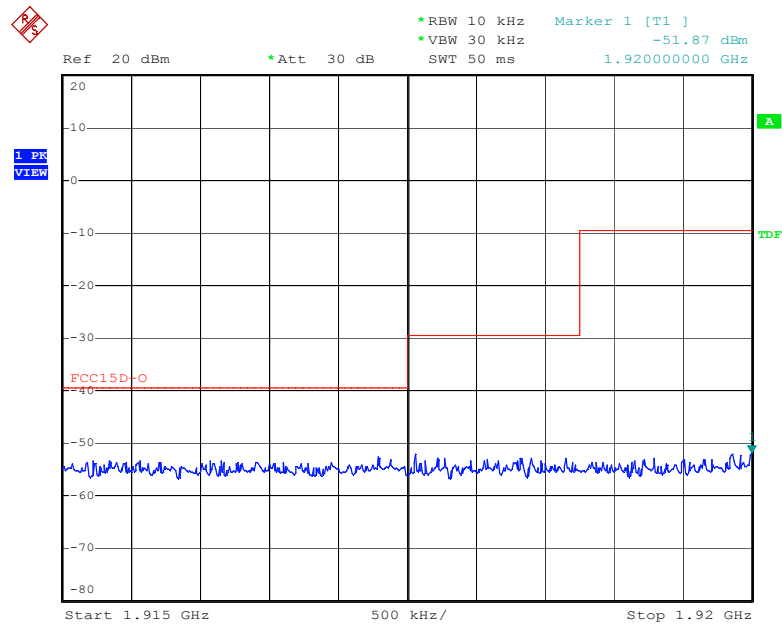


Date: 26.JAN.2016 15:12:05

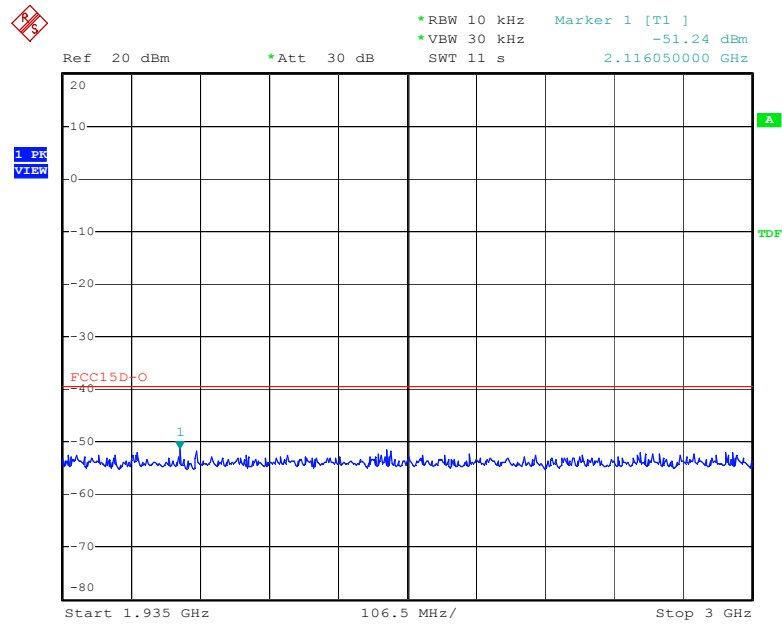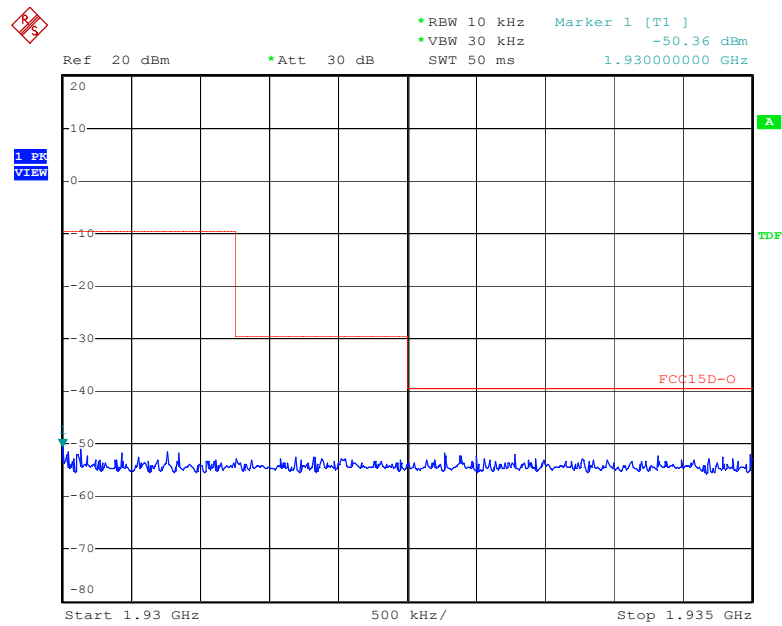

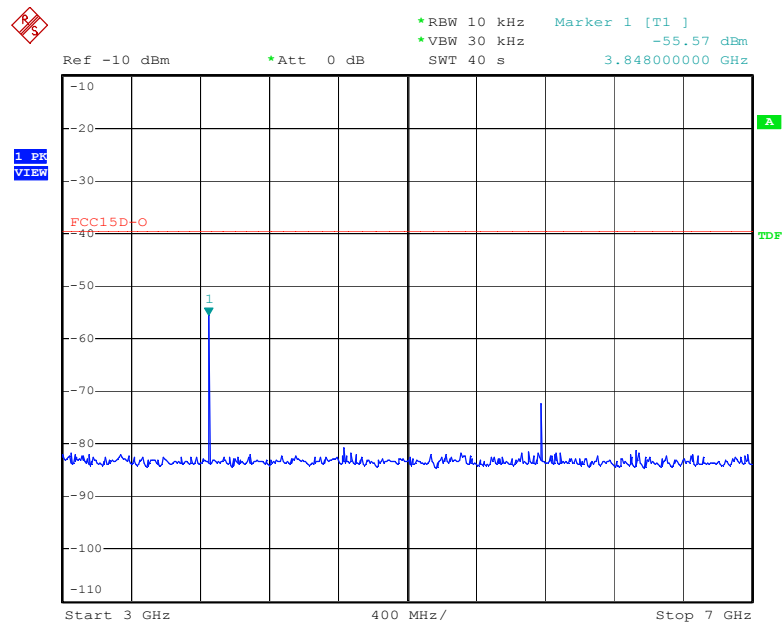


Date: 26.JAN.2016 15:10:15


High Channel (Unwanted Emission outside the Sub-band)

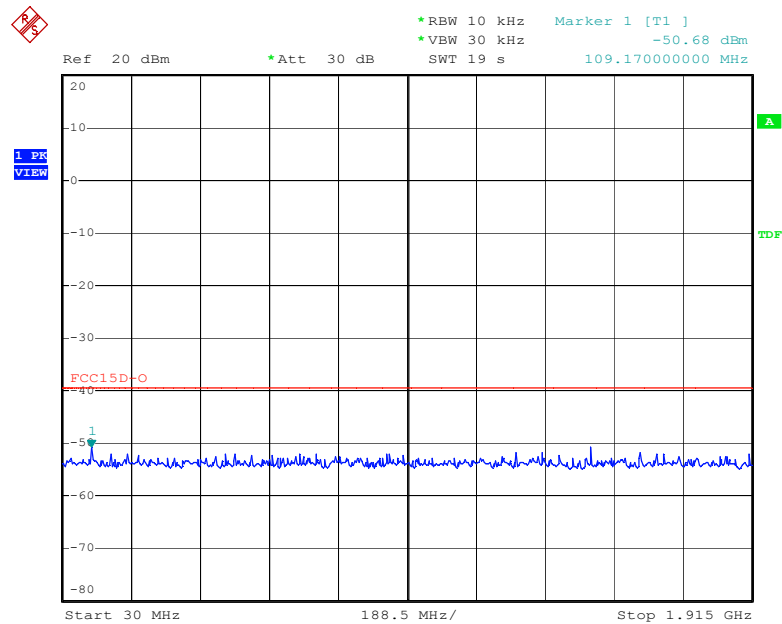


Date: 26.JAN.2016 15:16:05

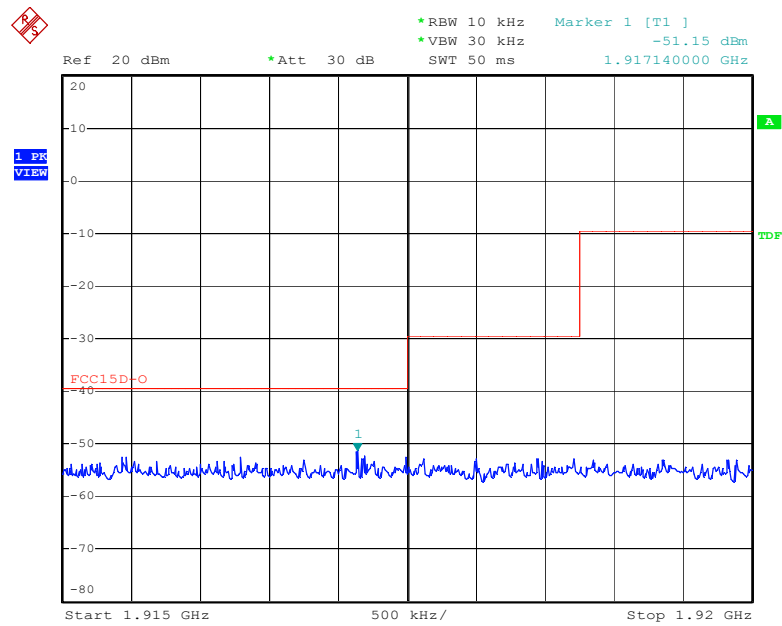


Date: 26.JAN.2016 15:16:33

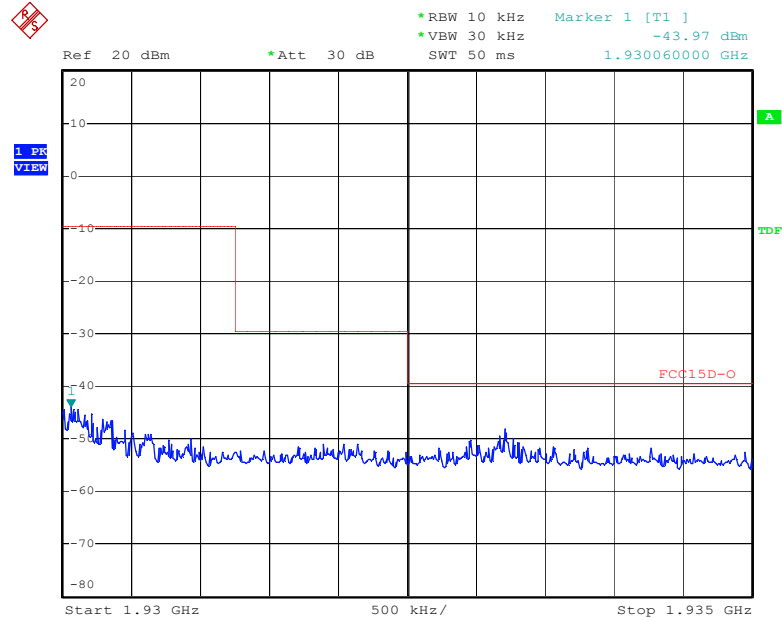

Date: 26.JAN.2016 15:17:22

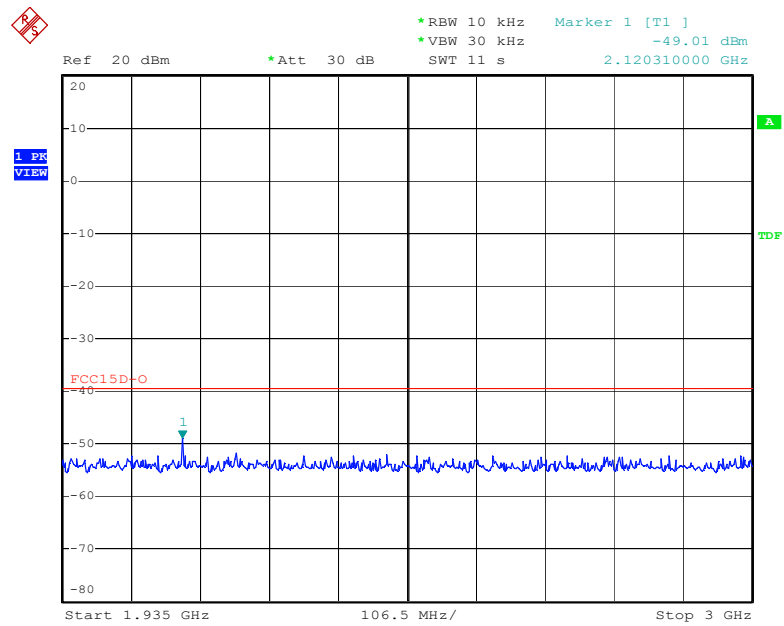


Date: 26.JAN.2016 15:18:15

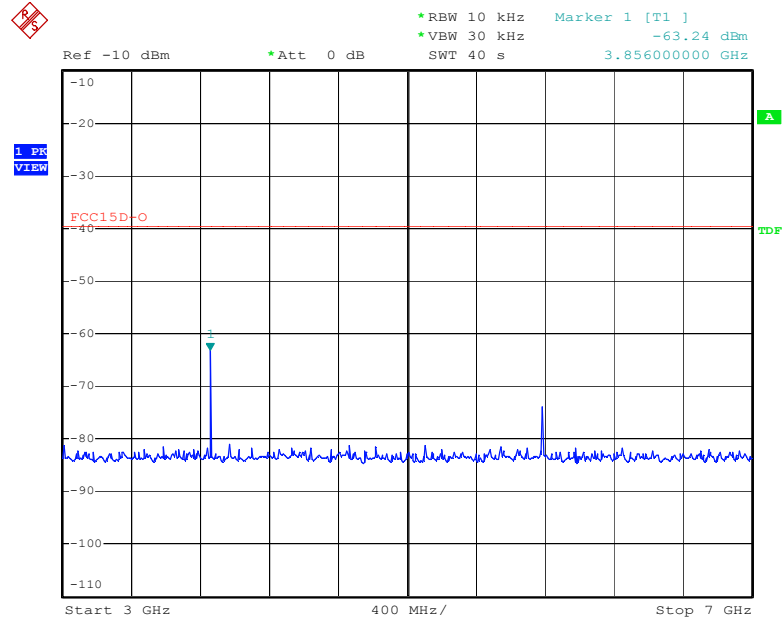

Date: 26.JAN.2016 15:20:13


## Ant1

## Low Channel (Unwanted Emission inside the Sub-band)

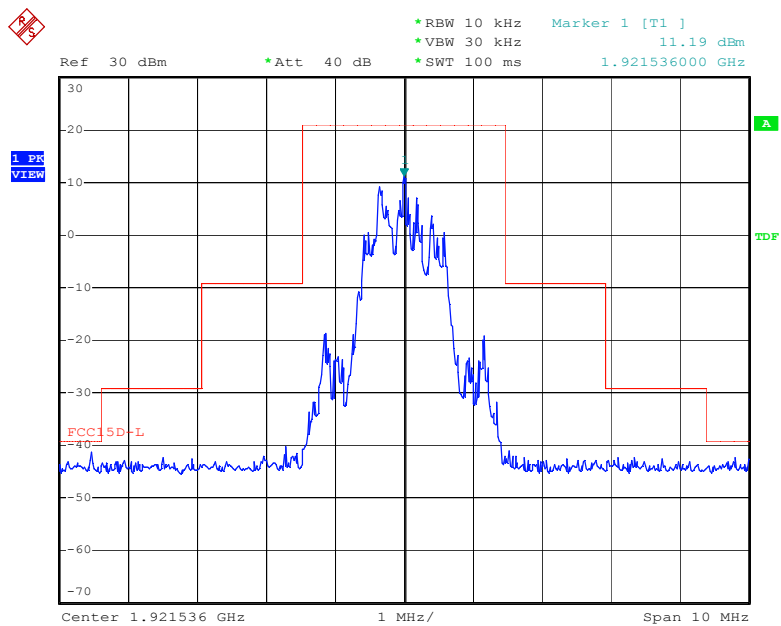


Date: 26.JAN.2016 13:04:21

## Middle Channel (Unwanted Emission inside the Sub-band)

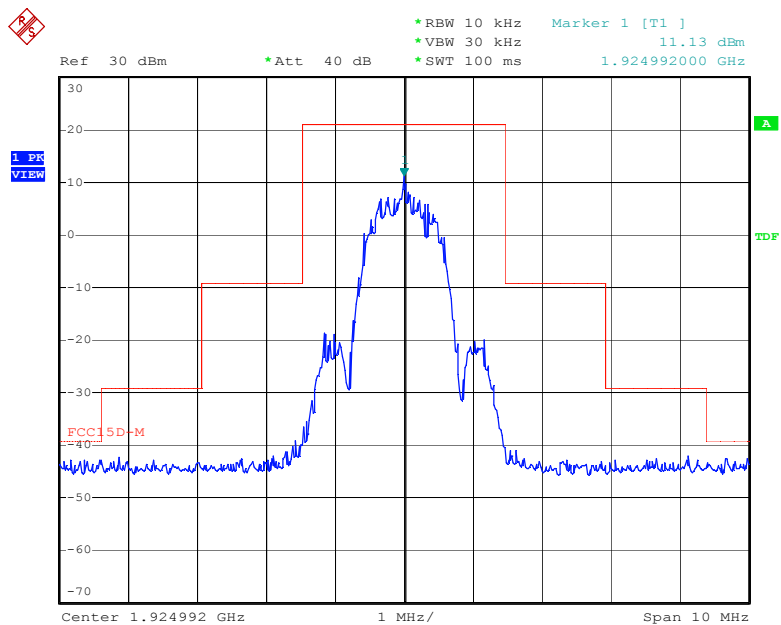



Date: 26.JAN.2016 13:05:46

## High Channel (Unwanted Emission inside the Sub-band)

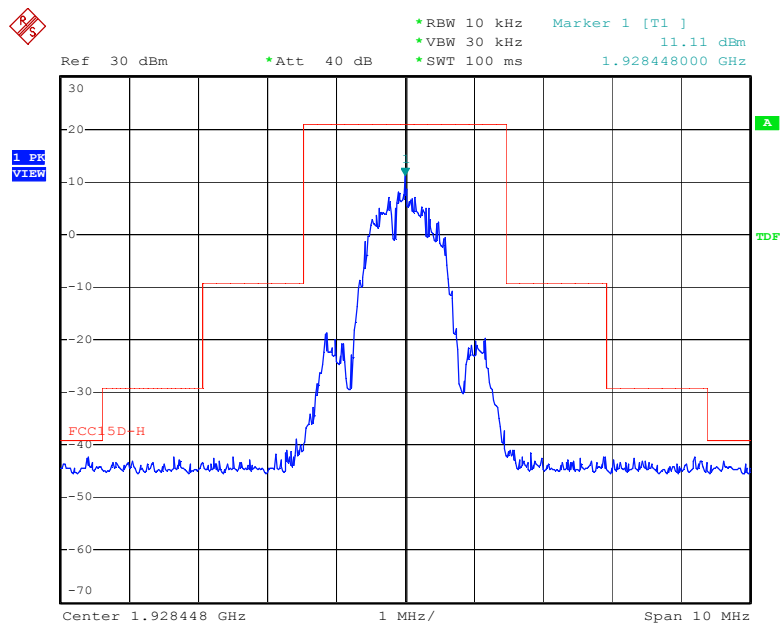


## Low Channel (Unwanted Emission outside the Sub-band)

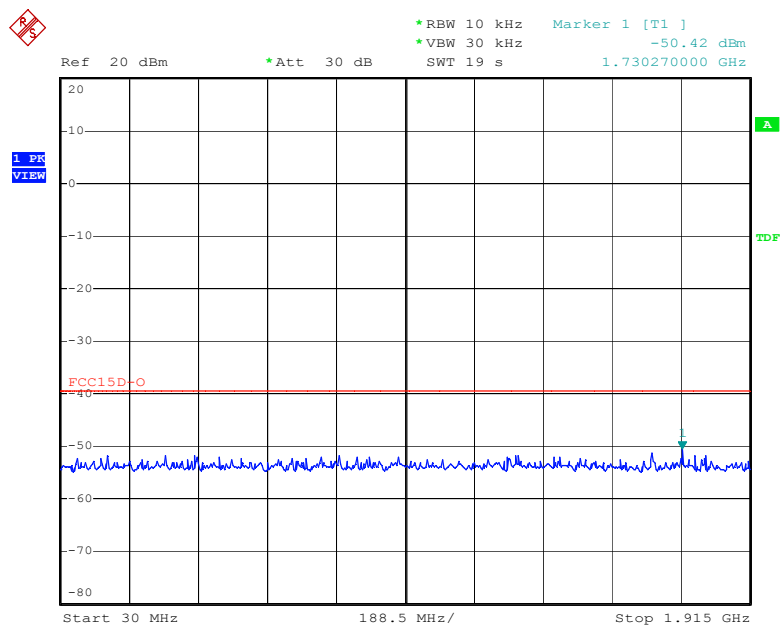

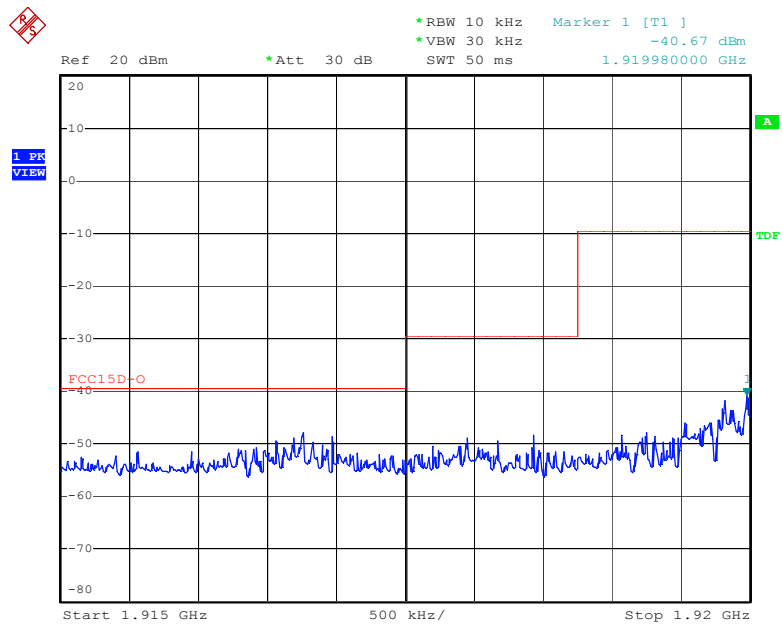


Date: 26.JAN.2016 13:20:58

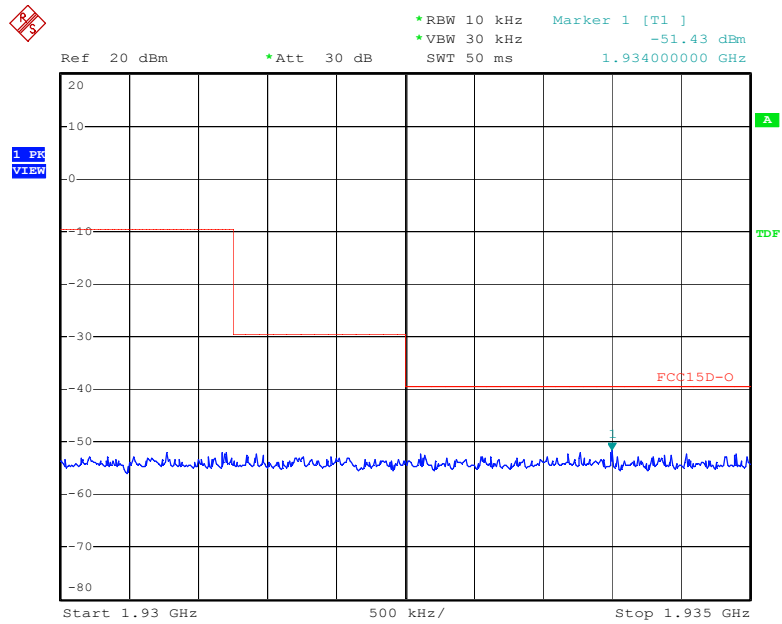


Date: 26.JAN.2016 13:22:02



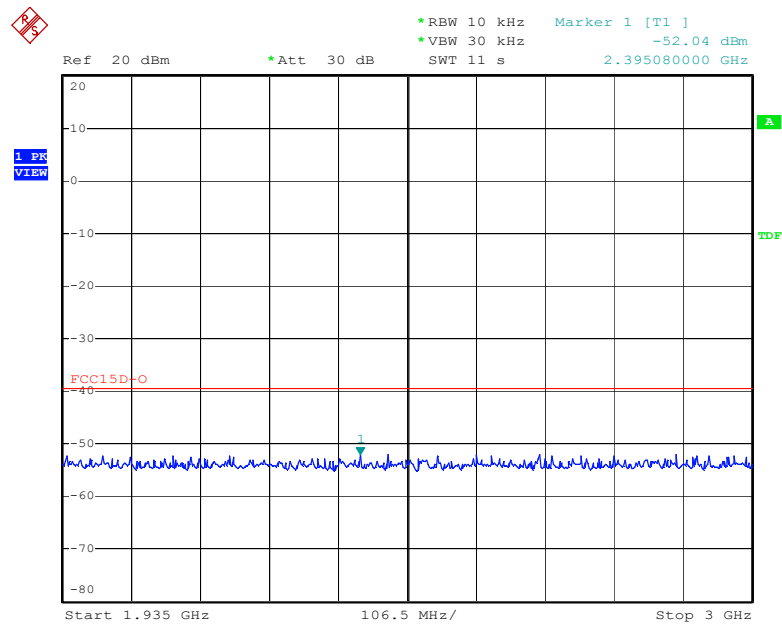


Date: 26.JAN.2016 13:23:24

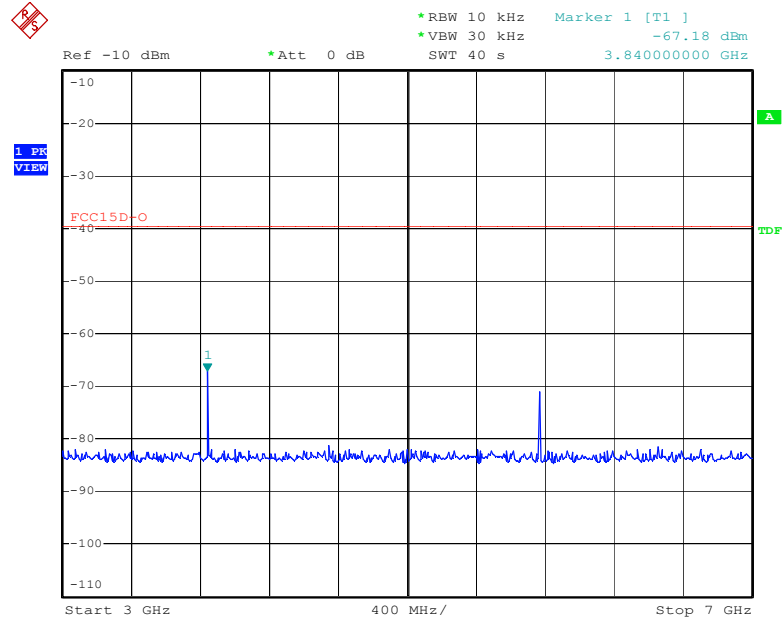


Date: 26.JAN.2016 13:26:27


Middle Channel (Unwanted Emission outside the Sub-band)

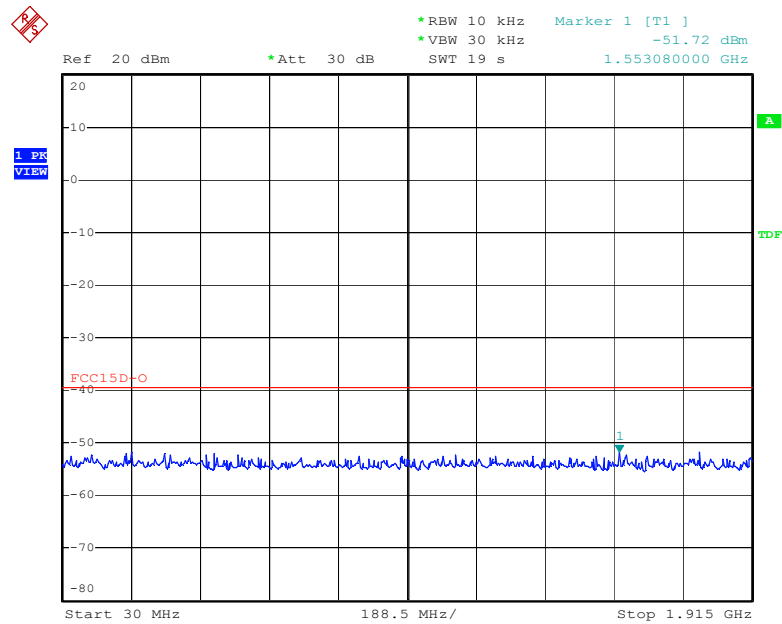


Date: 26.JAN.2016 13:31:21

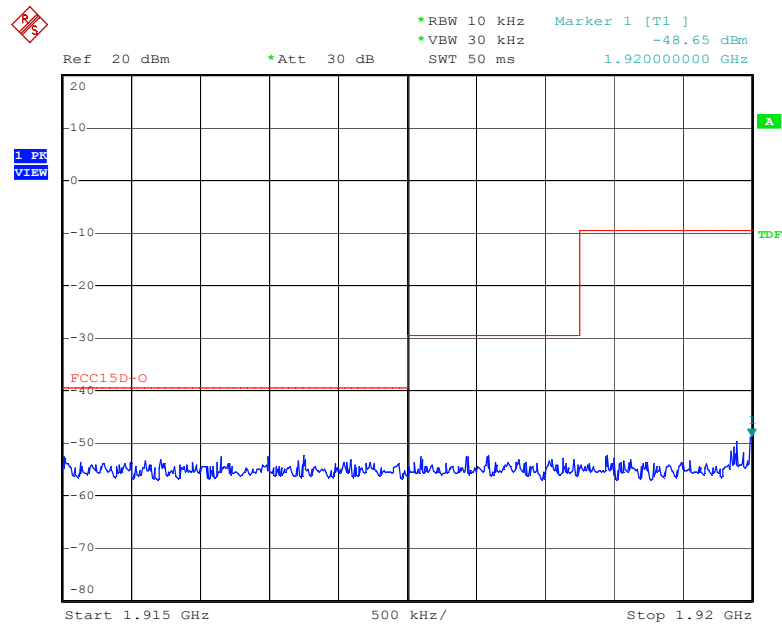


Date: 26.JAN.2016 13:31:58

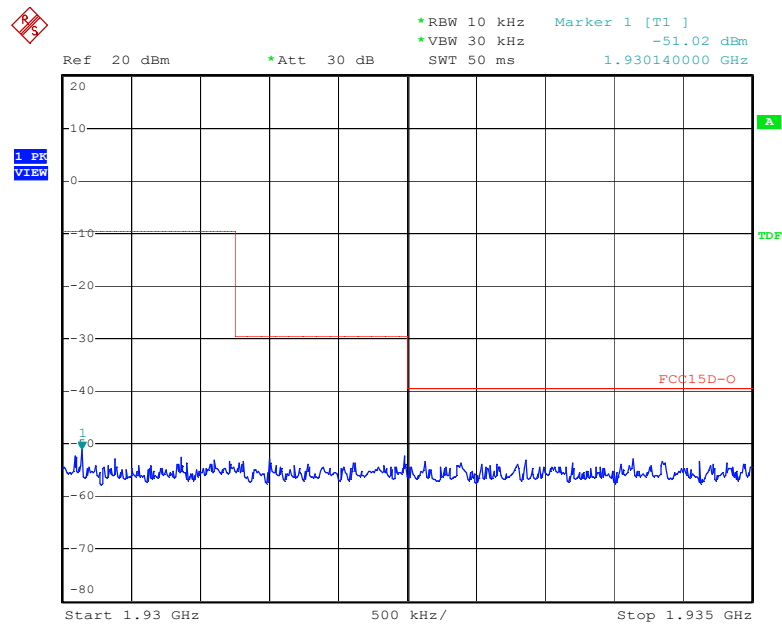

Date: 26.JAN.2016 13:32:55

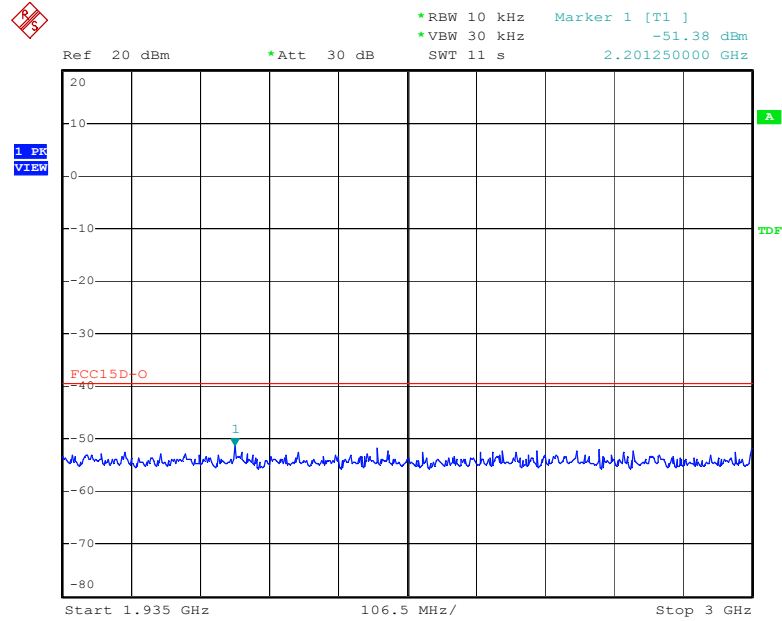


Date: 26.JAN.2016 13:33:48

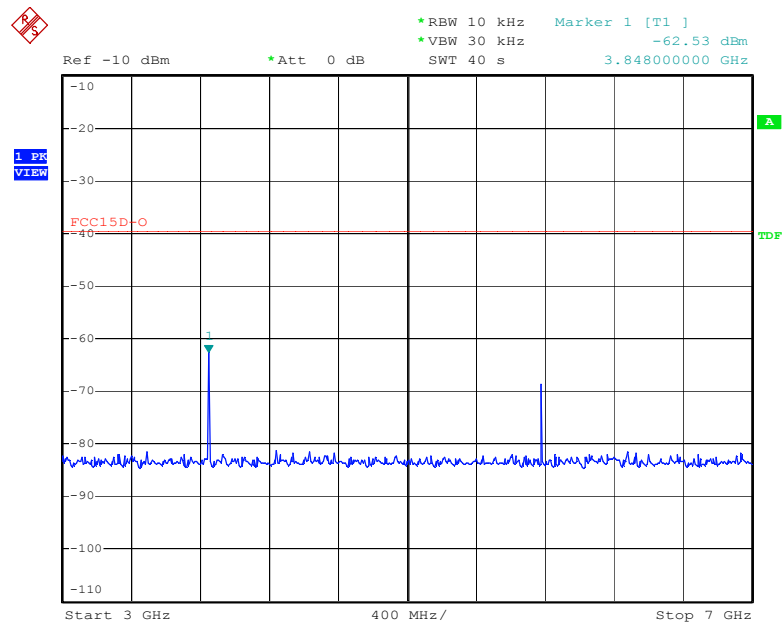


Date: 26.JAN.2016 13:29:45


High Channel (Unwanted Emission outside the Sub-band)

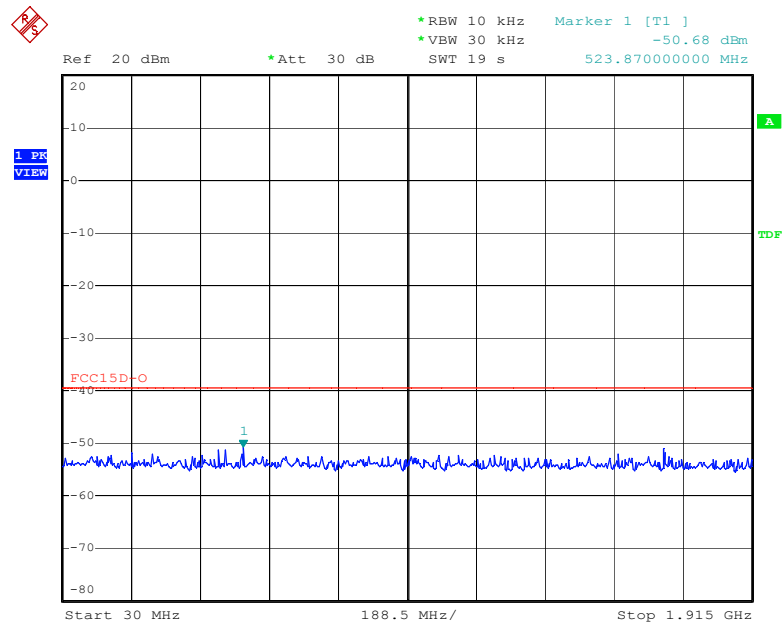


Date: 26.JAN.2016 13:09:33

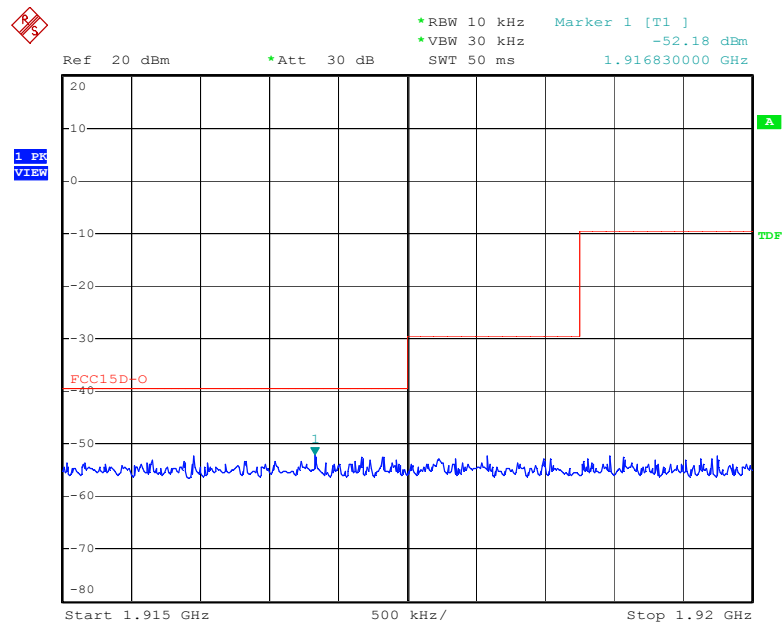


Date: 26.JAN.2016 13:10:29

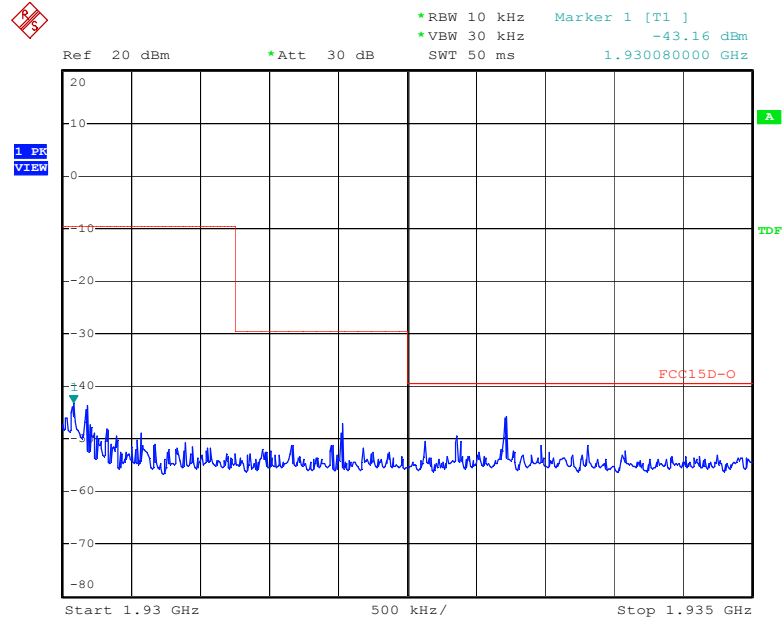

Date: 26.JAN.2016 13:11:23

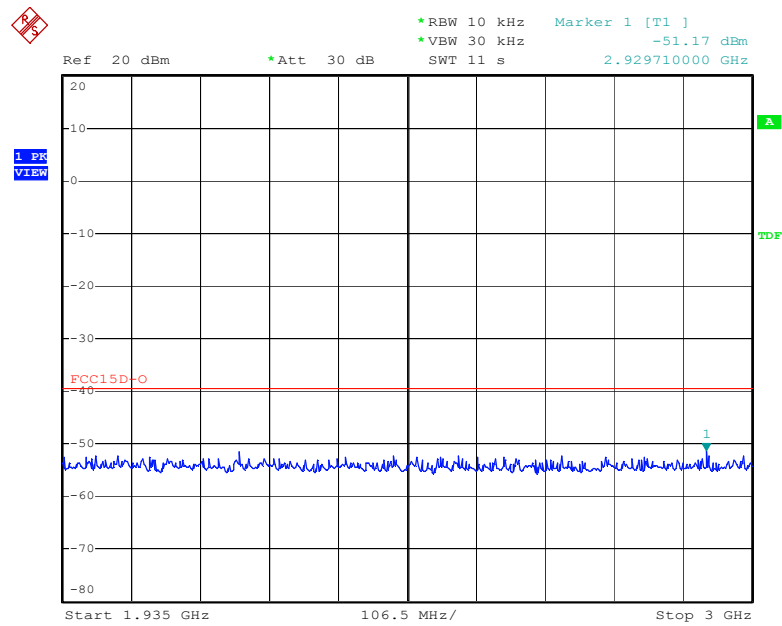

Date: 26.JAN.2016 13:16:31

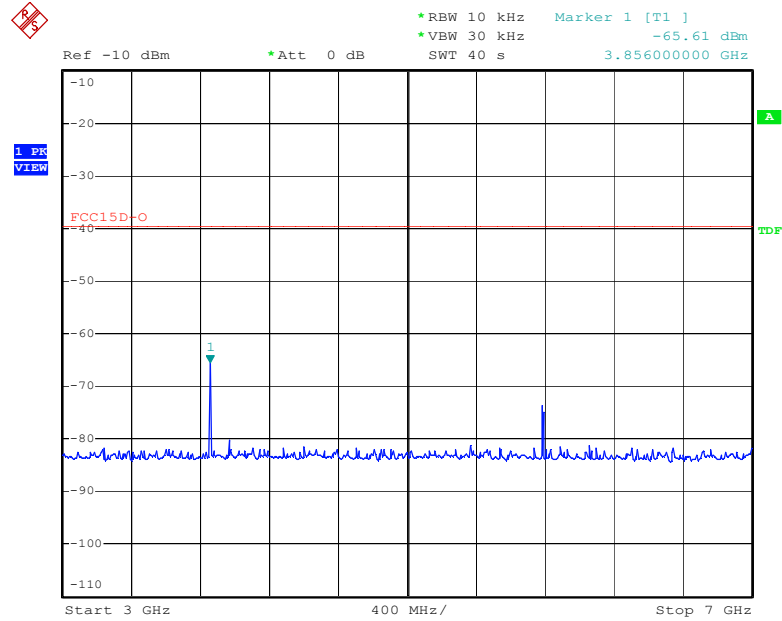

Date: 26.JAN.2016 13:15:23

### 3.6 Radiated Spurious Emission

#### 3.6.1 Test Equipment

Please refer to section 6 this report.

#### 3.6.2 Test Procedure

The transmitter was placed on a wooden turntable and was transmitting in a non radiating dummy load which was directly connected to the antenna connector. The battery was replaced by monitored voltage source. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna was height and polarization as well as the EUT azimuth where varied in orders to identify the maximum level of emission from the EUT. The test was performed by placing the EUT on 3 orthogonal axis. The frequency range up to tenth harmonic of the fundamental frequency was investigated. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. All tests was performed for the lower, the middle and the highest frequency.


The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.17 - 2006. The specification used was the FCC 15 § 15.319(g).

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RWB    | Video B/W | IF B/W | Detector |
|-----------------|--------|-----------|--------|----------|
| 30~1000MHz      | 100kHz | 300kHz    | 120kHz | QP       |
| Above 1GHz      | 1MHz   | 1MHz      | /      | PK       |
|                 | 1MHz   | 30Hz      | /      | AV       |

#### 3.6.3 Test Setup

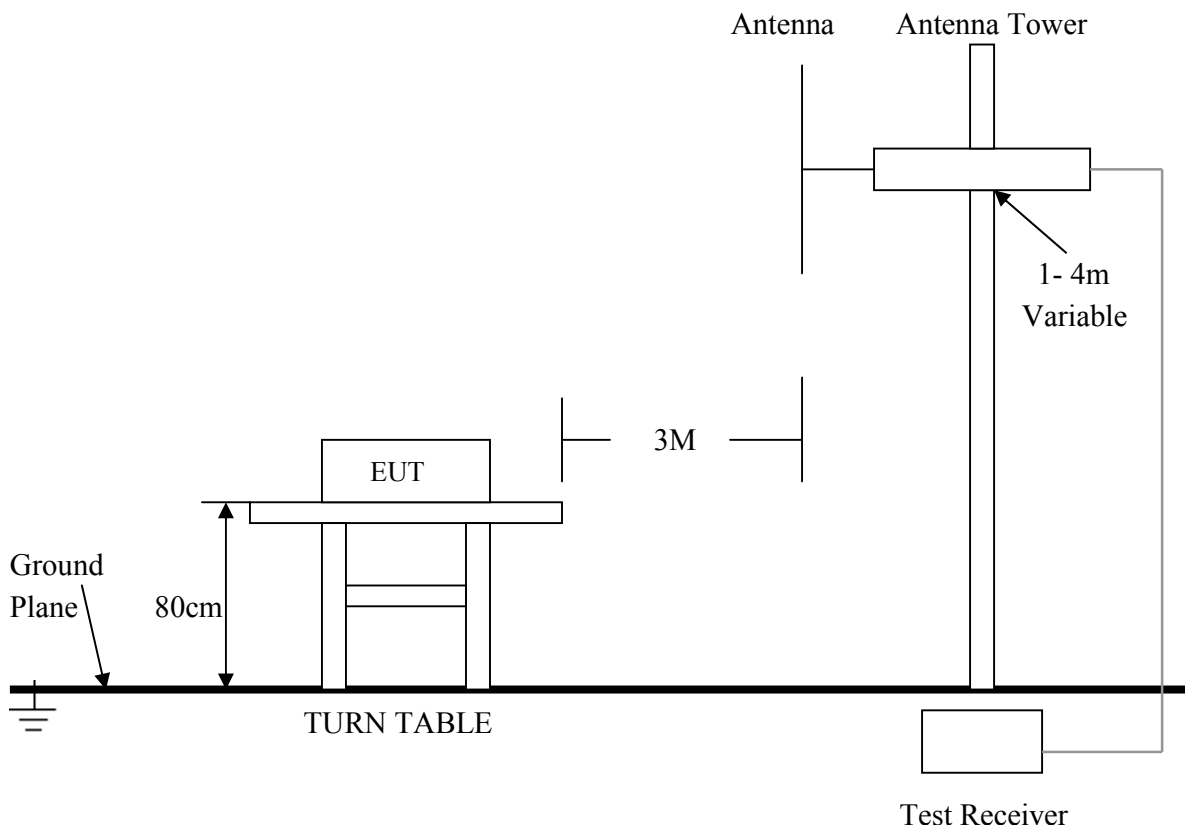

For the actual test configuration, please refer to the related items – Photos of Testing.

#### 3.6.4 Configuration of The EUT

Same as section 3.1.4 of this report

### 3.6.5 EUT Operating Condition

Same as section 3.1.5 of this report

### 3.6.6 Limit

According to FCC§15.319(g), notwithstanding other technical requirements specified in this subpart, attenuation of emissions below the general emission limits in §15.209 is not required.

### 3.6.7 Radiated Spurious Emission Test Result

|              |                              |             |                    |
|--------------|------------------------------|-------------|--------------------|
| Product      | : DECT Cordless VoIP Phone   | Test Mode   | : CH Low ~ CH High |
| Test Item    | : Radiated Spurious Emission | Temperature | : 25 °C            |
| Test Voltage | : DC 2.8V/5V                 | Humidity    | : 56%RH            |
| Test Result  | : <b>PASS</b>                |             |                    |

PP

Channel: Low (1921.536 MHz)

| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1921.40        | 112.89            | -       | HORZ            | -               | -       | -           | -       |
| 1921.40        | 111.65            | -       | VERT            | -               | -       | -           | -       |
| 3843.10        | 67.66             | 43.79   | HORZ            | 74.0            | 54.0    | -6.34       | -10.21  |
| 3843.10        | 64.13             | 40.26   | VERT            | 74.0            | 54.0    | -9.87       | -13.74  |
| 5764.60        | 53.32             | -       | HORZ            | 74.0            | 54.0    | -20.68      | -       |
| 5764.60        | 49.88             | -       | VERT            | 74.0            | 54.0    | -24.12      | -       |
| 7686.30        | 59.45             | 35.58   | HORZ            | 74.0            | 54.0    | -14.55      | -18.42  |
| 7686.30        | 57.61             | 33.74   | VERT            | 74.0            | 54.0    | -16.39      | -20.26  |

Channel: Mid (1924.992 MHz)

| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1924.90        | 112.34            | -       | HORZ            | -               | -       | -           | -       |
| 1924.90        | 111.02            | -       | VERT            | -               | -       | -           | -       |
| 3849.80        | 66.13             | 42.26   | HORZ            | 74.0            | 54.0    | -7.87       | -11.74  |
| 3849.80        | 63.55             | 39.68   | VERT            | 74.0            | 54.0    | -10.45      | -14.32  |
| 5774.90        | 53.02             | -       | HORZ            | 74.0            | 54.0    | -20.98      | -       |
| 5774.90        | 49.26             | -       | VERT            | 74.0            | 54.0    | -24.74      | -       |
| 7699.60        | 58.88             | 35.01   | HORZ            | 74.0            | 54.0    | -15.12      | -18.99  |
| 7699.60        | 56.95             | 33.08   | VERT            | 74.0            | 54.0    | -17.05      | -20.92  |

Channel: High (1928.448 MHz)


| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1928.40        | 112.36            | -       | HORZ            | -               | -       | -           | -       |
| 1928.40        | 111.10            | -       | VERT            | -               | -       | -           | -       |
| 3856.80        | 66.08             | 42.21   | HORZ            | 74.0            | 54.0    | -7.92       | -11.79  |
| 3856.80        | 63.67             | 39.80   | VERT            | 74.0            | 54.0    | -10.33      | -14.20  |
| 5785.20        | 52.98             | -       | HORZ            | 74.0            | 54.0    | -21.02      | -       |
| 5785.20        | 49.23             | -       | VERT            | 74.0            | 54.0    | -24.77      | -       |
| 7713.60        | 59.01             | 35.14   | HORZ            | 74.0            | 54.0    | -14.99      | -18.86  |
| 7713.60        | 57.05             | 33.18   | VERT            | 74.0            | 54.0    | -16.95      | -20.82  |

**Note:**

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss – Amplifier Factor
- (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
- (6)  $AV = PK + 20 \cdot \lg(\text{Duty Cycle})$   
 Duty Cycle =  $Ton / Tp \cdot 100\%$ ,  
 $Ton = 650\mu s$ ,  
 $Tp = 10.15ms$   
 Duty Cycle = Duty cycle factor =  $20 \lg(\text{Duty Cycle}) = -23.87$



Duty Cycle

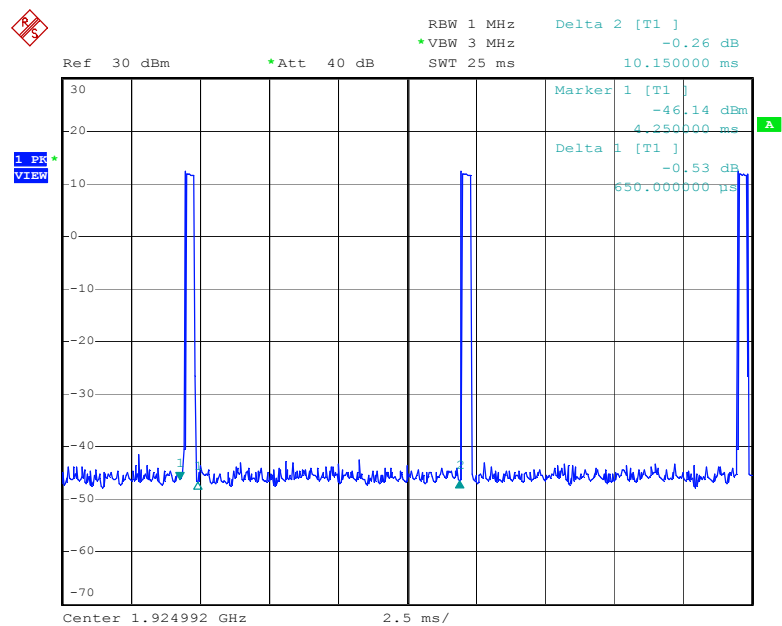

Date: 5.JAN.2016 10:17:56

FP

Ant0

Channel: Low (1921.536 MHz)

| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1921.40        | 112.44            | -       | HORZ            | -               | -       | -           | -       |
| 1921.40        | 111.21            | -       | VERT            | -               | -       | -           | -       |
| 3843.10        | 66.35             | 40.82   | HORZ            | 74.0            | 54.0    | -7.65       | -13.18  |
| 3843.10        | 63.23             | 37.70   | VERT            | 74.0            | 54.0    | -10.77      | -16.30  |
| 7686.30        | 52.67             | -       | HORZ            | 74.0            | 54.0    | -21.33      | -       |
| 7686.30        | 49.02             | -       | VERT            | 74.0            | 54.0    | -24.98      | -       |
| 5764.60        | 58.95             | 33.42   | HORZ            | 74.0            | 54.0    | -15.05      | -20.58  |
| 5764.60        | 57.13             | 31.60   | VERT            | 74.0            | 54.0    | -16.87      | -22.40  |

Channel: Mid (1924.992 MHz)


| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1924.90        | 112.02            | -       | HORZ            | -               | -       | -           | -       |
| 1924.90        | 110.89            | -       | VERT            | -               | -       | -           | -       |
| 3849.80        | 66.22             | 40.69   | HORZ            | 74.0            | 54.0    | -7.78       | -13.31  |
| 3849.80        | 63.13             | 37.60   | VERT            | 74.0            | 54.0    | -10.87      | -16.40  |
| 7699.60        | 52.55             | -       | HORZ            | 74.0            | 54.0    | -21.45      | -       |
| 7699.60        | 49.34             | -       | VERT            | 74.0            | 54.0    | -24.66      | -       |
| 5774.90        | 59.05             | 33.52   | HORZ            | 74.0            | 54.0    | -14.95      | -20.48  |
| 5774.90        | 56.89             | 31.36   | VERT            | 74.0            | 54.0    | -17.11      | -22.64  |

Channel: High (1928.448 MHz)

| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1928.40        | 111.93            | -       | HORZ            | -               | -       | -           | -       |
| 1928.40        | 109.99            | -       | VERT            | -               | -       | -           | -       |
| 3856.80        | 66.34             | 40.81   | HORZ            | 74.0            | 54.0    | -7.66       | -13.19  |
| 3856.80        | 63.25             | 37.72   | VERT            | 74.0            | 54.0    | -10.75      | -16.28  |
| 5785.20        | 52.59             | -       | HORZ            | 74.0            | 54.0    | -21.41      | -       |
| 5785.20        | 49.11             | -       | VERT            | 74.0            | 54.0    | -24.89      | -       |
| 7713.60        | 59.24             | 33.71   | HORZ            | 74.0            | 54.0    | -14.76      | -20.29  |
| 7713.60        | 57.06             | 31.53   | VERT            | 74.0            | 54.0    | -16.94      | -22.47  |

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss – Amplifier Factor
  - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
  - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
  - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
  - (6)  $AV = PK + 20 \cdot \lg(\text{Duty Cycle})$   
Duty Cycle =  $Ton / Tp \cdot 100\%$ ,  
 $Ton = 550\mu s$ ,  
 $Tp = 10.400ms$   
Duty Cycle = Duty cycle factor =  $20 \lg(\text{Duty Cycle}) = -25.53$

Duty Cycle

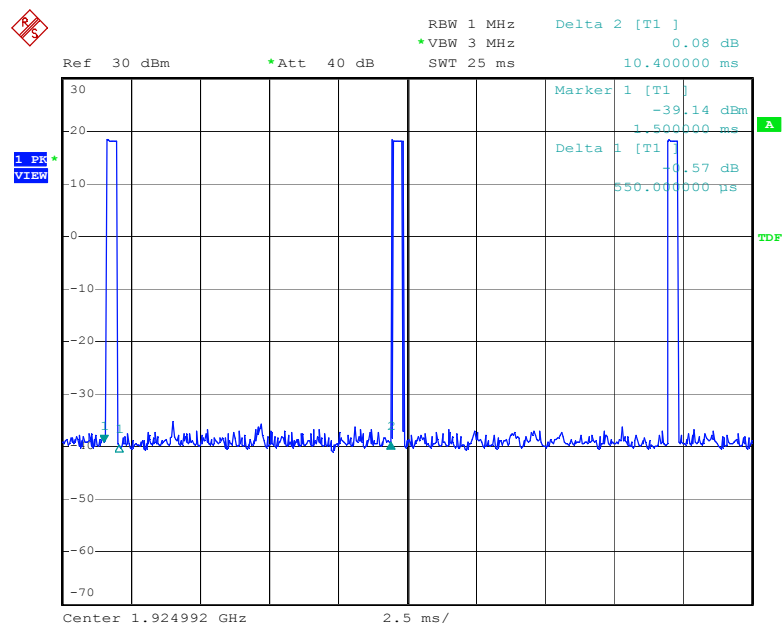

Date: 26.JAN.2016 15:39:05

## Ant1

## Channel: Low (1921.536 MHz)

| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1921.40        | 113.11            | -       | HORZ            | -               | -       | -           | -       |
| 1921.40        | 111.56            | -       | VERT            | -               | -       | -           | -       |
| 3843.10        | 67.46             | 35.35   | HORZ            | 74.0            | 54.0    | -6.54       | -18.65  |
| 3843.10        | 64.54             | 32.43   | VERT            | 74.0            | 54.0    | -9.46       | -21.57  |
| 7686.30        | 53.19             | -       | HORZ            | 74.0            | 54.0    | -20.81      | -       |
| 7686.30        | 49.66             | -       | VERT            | 74.0            | 54.0    | -24.34      | -       |
| 5764.60        | 59.32             | 27.21   | HORZ            | 74.0            | 54.0    | -14.68      | -26.79  |
| 5764.60        | 57.11             | 25.00   | VERT            | 74.0            | 54.0    | -16.89      | -29.00  |

## Channel: Mid (1924.992 MHz)


| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1924.90        | 112.98            | -       | HORZ            | -               | -       | -           | -       |
| 1924.90        | 111.33            | -       | VERT            | -               | -       | -           | -       |
| 3849.80        | 67.25             | 35.14   | HORZ            | 74.0            | 54.0    | -6.75       | -18.86  |
| 3849.80        | 64.56             | 32.45   | VERT            | 74.0            | 54.0    | -9.44       | -21.55  |
| 7699.60        | 53.79             | -       | HORZ            | 74.0            | 54.0    | -20.21      | -       |
| 7699.60        | 49.22             | -       | VERT            | 74.0            | 54.0    | -24.78      | -       |
| 5774.90        | 59.87             | 27.76   | HORZ            | 74.0            | 54.0    | -14.13      | -26.24  |
| 5774.90        | 57.03             | 24.92   | VERT            | 74.0            | 54.0    | -16.97      | -29.08  |

## Channel: High (1928.448 MHz)

| Freq.<br>(MHz) | Emission (dBuV/m) |         | HORIZ /<br>VERT | Limits (dBuV/m) |         | Margin (dB) |         |
|----------------|-------------------|---------|-----------------|-----------------|---------|-------------|---------|
|                | Peak              | Average |                 | Peak            | Average | Peak        | Average |
| 1928.40        | 112.66            | -       | HORZ            | -               | -       | -           | -       |
| 1928.40        | 111.02            | -       | VERT            | -               | -       | -           | -       |
| 3856.80        | 67.38             | 35.27   | HORZ            | 74.0            | 54.0    | -6.62       | -18.73  |
| 3856.80        | 63.95             | 31.84   | VERT            | 74.0            | 54.0    | -10.05      | -22.16  |
| 5785.20        | 52.89             | -       | HORZ            | 74.0            | 54.0    | -21.11      | -       |
| 5785.20        | 49.14             | -       | VERT            | 74.0            | 54.0    | -24.86      | -       |
| 7713.60        | 58.88             | 26.77   | HORZ            | 74.0            | 54.0    | -15.12      | -27.23  |
| 7713.60        | 57.24             | 25.13   | VERT            | 74.0            | 54.0    | -16.76      | -28.87  |

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss – Amplifier Factor
  - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
  - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
  - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
  - (6)  $AV = PK + 20 \cdot \lg(\text{Duty Cycle})$   
Duty Cycle =  $Ton / Tp \cdot 100\%$ ,  
 $Ton = 249\mu s$ ,  
 $Tp = 10.049ms$   
Duty Cycle = Duty cycle factor =  $20 \lg(\text{Duty Cycle}) = -32.11$

Duty Cycle

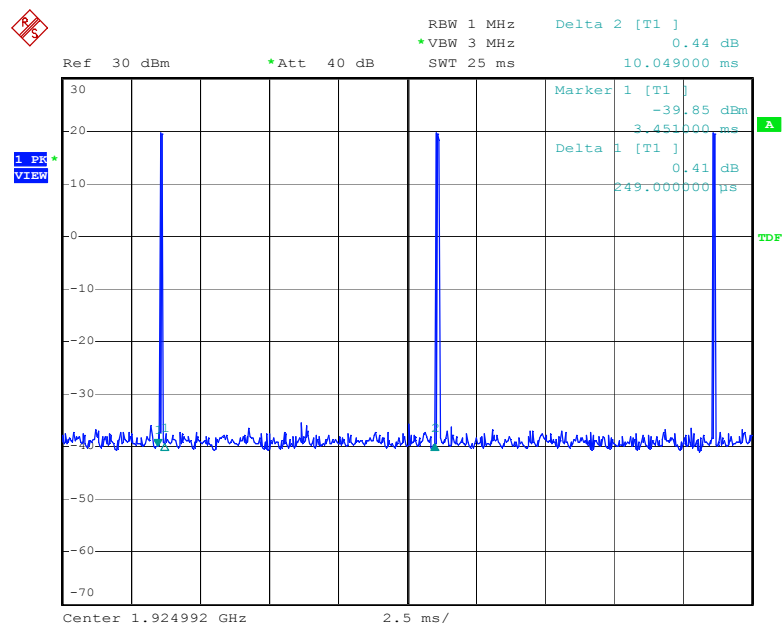

Date: 26.JAN.2016 13:44:34

### 3.7 Carrier Frequency Stability

#### 3.7.1 Test Equipment

Please refer to section 6 this report.

#### 3.7.2 Test Procedure


ANSI C63.17, clause 6.2.1. The Frequency Stability is measured with the CMD60. The CMD60 was logged by a computer programmed to get new readings as fast as possible (about 3 readings per second) over the noted time period or number of readings. The peak-to-peak difference was recorded and the mean value and deviation in ppm was calculated.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

| Temperature | Supply Voltage           |
|-------------|--------------------------|
| 20°C        | 85-115% or new batteries |
| -20°C       | Normal                   |
| +50°C       | Normal                   |

Note: Use the lowest temperature at which the EUT is specified to operate if it is above -20 °C.

#### 3.7.3 Test Setup

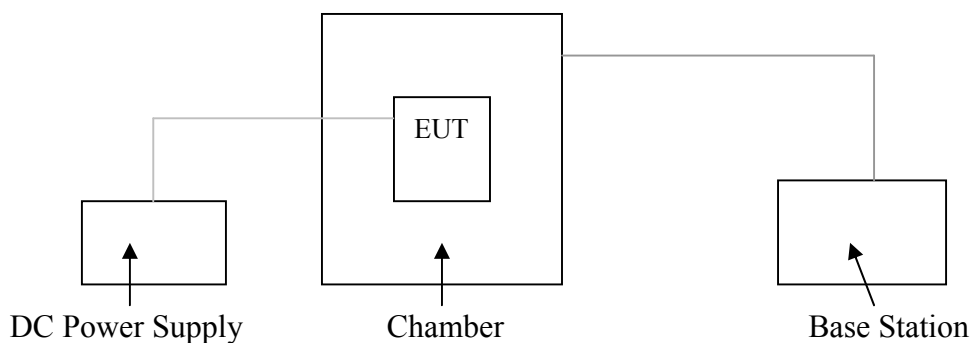

#### 3.7.4 Configuration of The EUT

Same as section 3.1.4 of this report

#### 3.7.5 EUT Operating Condition

Same as section 3.1.5 of this report

#### 3.7.6 Limit

Per §15.323(f), the frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of  $20^{\circ}\text{C}$ . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage

### 3.7.7 Frequency Stability Test Result

Product : DECT Cordless VoIP Phone  
 Test Item : Radiated Spurious Emission  
 Test Voltage : DC 2.8V/5V  
 Test Result : **PASS**

Test Mode : CH Low ~ CH High  
 Temperature : 25 °C  
 Humidity : 56%RH

PP

| Temperature (°C) | Voltage (V <sub>DC</sub> ) | Channel Frequency (MHz) | Measured Frequency Offset (kHz) | Measured Frequency Offset (ppm) | Limit (ppm) |
|------------------|----------------------------|-------------------------|---------------------------------|---------------------------------|-------------|
| 20               | 2.38                       | 1924.992                | 6.0                             | 3.12                            | ±10         |
| 20               | 3.22                       | 1924.992                | 6.0                             | 3.12                            | ±10         |
| -20              | 2.8                        | 1924.992                | 6.0                             | 3.12                            | ±10         |
| 50               | 2.8                        | 1924.992                | 7.0                             | 3.64                            | ±10         |

FP

Ant0

| Temperature (°C) | Voltage (V <sub>DC</sub> ) | Channel Frequency (MHz) | Measured Frequency Offset (kHz) | Measured Frequency Offset (ppm) | Limit (ppm) |
|------------------|----------------------------|-------------------------|---------------------------------|---------------------------------|-------------|
| 20               | 4.25                       | 1924.992                | 2                               | 1.04                            | ±10         |
| 20               | 5.75                       | 1924.992                | 2                               | 1.04                            | ±10         |
| -20              | 5                          | 1924.992                | 2                               | 1.04                            | ±10         |
| 50               | 5                          | 1924.992                | 3                               | 1.56                            | ±10         |

Ant1

| Temperature (°C) | Voltage (V <sub>DC</sub> ) | Channel Frequency (MHz) | Measured Frequency Offset (kHz) | Measured Frequency Offset (ppm) | Limit (ppm) |
|------------------|----------------------------|-------------------------|---------------------------------|---------------------------------|-------------|
| 20               | 4.25                       | 1924.992                | 9                               | 4.68                            | ±10         |
| 20               | 5.75                       | 1924.992                | 9                               | 4.68                            | ±10         |
| -20              | 5                          | 1924.992                | 9                               | 4.68                            | ±10         |
| 50               | 5                          | 1924.992                | 10                              | 5.19                            | ±10         |

### 3. 8 FCC§15.323 (c) (e) & §15.319(f) – Specific Requirements for UPCS Device

#### 3.8.1 Frame Repetition Stability Part15 .323 (e)

##### Test Procedure

According to ANSI C63.17, clause 6.2.2., The envelope of the RF signal from the EUT is detected with a Crystal Detector and the mean and standard deviation of the frame repetition frequency is then gated over 100 frames and measured with a Frequency Domain Analyzer. The frame repetition stability is 3 times the standard deviation.

##### Limit

|                            |                     |
|----------------------------|---------------------|
| Frame Repetition Stability | $\pm 10$ ppm (TDMA) |
|----------------------------|---------------------|

Ref. FCC 15.323(e), ANSI C63.17, clause 6.2.2

##### Test Result

###### PP

| Frame Repetition Stability (ppm) | Limit (ppm) | Result (Pass/Fail) |
|----------------------------------|-------------|--------------------|
| -0.35                            | $\pm 10$    | Pass               |

###### FP

###### Ant0

| Frame Repetition Stability (ppm) | Limit (ppm) | Result (Pass/Fail) |
|----------------------------------|-------------|--------------------|
| 3.74                             | $\pm 10$    | Pass               |

###### Ant1

| Frame Repetition Stability (ppm) | Limit (ppm) | Result (Pass/Fail) |
|----------------------------------|-------------|--------------------|
| 3.58                             | $\pm 10$    | Pass               |

#### 3.8.2 Frame Period and Jitter Part15 .323 (e)

##### Test Procedure

According to ANSI C63.17, clause 6.2.3.

##### Limit

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number.

|                          |              |
|--------------------------|--------------|
| Frame Period             | 20 or 10 ms  |
| Max Jitter               | 25 $\mu$ s   |
| 3 times St.Dev of Jitter | 12.5 $\mu$ s |

##### Test Result

###### PP

| Max.pos. Jitter (us) | Max. neg. Jitter (us) | Frame period (us) | Limit             |                   |
|----------------------|-----------------------|-------------------|-------------------|-------------------|
|                      |                       |                   | Frame Period (ms) | Jitter ( $\mu$ s) |
| 0.15                 | -0.08                 | 10.00000          | 20 or10/X         | 25                |

###### FP

###### Ant0

| Max.pos. Jitter (us) | Max. neg. Jitter (us) | Frame period (us) | Limit             |                   |
|----------------------|-----------------------|-------------------|-------------------|-------------------|
|                      |                       |                   | Frame Period (ms) | Jitter ( $\mu$ s) |
| 0.01                 | -0.04                 | 10.00000          | 20 or10/X         | 25                |

###### Ant1

| Max.pos. Jitter (us) | Max. neg. Jitter (us) | Frame period (us) | Limit             |                   |
|----------------------|-----------------------|-------------------|-------------------|-------------------|
|                      |                       |                   | Frame Period (ms) | Jitter ( $\mu$ s) |
| 0.01                 | -0.04                 | 10.00000          | 20 or10/X         | 25                |

Note: X is a positive whole number.



**3.8.3 Lower Monitoring Threshold Part15.323 (c) (2)****Test Procedure**

Measurement method according to ANSI C63.17 2006 clause 7.3.1

**Limit**

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

The Lower Threshold is applicable for systems which have defined less than 40 duplex system access channels. The Upper Threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

**Test Result**

Not Applicable. For the EUT which support LIC there is no need to measure lower threshold because it is automatically met by LIC procedure.

**3.8.4 Least Interfered Channel (LIC) Selection, FCC Part15.323 (c) (5)****Test Procedure**

Measurement method according to ANSI C63.17 clause 7.3.2, 7.3.3, 7.3.4

If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold:  $T_L = -174 + 10\log_{10}B + M_u + P_{MAX} - P_{EUT}$  (dBm)

Upper threshold:  $T_U = -174 + 10\log_{10}B + M_u + P_{MAX} - P_{EUT}$  (dBm)

Where: B=Emission bandwidth (Hz)

$M_u$  =dB the threshold may exceed thermal noise (30 for  $T_L$  & 50 for  $T_U$ )

$P_{MAX} = 5\log_{10}B - 10$  (dBm)

$P_{EUT}$  =Transmitted power (dBm)

**Limit****PP**

| Monitor Threshold | B (MHz) | $M_u$ (dB) | $P_{MAX}$ (dBm) | $P_{EUT}$ (dBm) | Threshold (dBm) |
|-------------------|---------|------------|-----------------|-----------------|-----------------|
| $T_L$             | 1.734   | 30         | 21.20           | 18.61           | -79.02          |
| $T_U$             | 1.734   | 50         | 21.20           | 18.61           | -59.02          |

**FP****Ant0**

| Monitor Threshold | B (MHz) | $M_u$ (dB) | $P_{MAX}$ (dBm) | $P_{EUT}$ (dBm) | Threshold (dBm) |
|-------------------|---------|------------|-----------------|-----------------|-----------------|
| $T_L$             | 1.458   | 30         | 20.82           | 18.61           | -81.15          |
| $T_U$             | 1.458   | 50         | 20.82           | 18.61           | -61.15          |

**Ant1**

| Monitor Threshold | B (MHz) | $M_u$ (dB) | $P_{MAX}$ (dBm) | $P_{EUT}$ (dBm) | Threshold (dBm) |
|-------------------|---------|------------|-----------------|-----------------|-----------------|
| $T_L$             | 1.458   | 30         | 20.82           | 19.73           | -81.27          |
| $T_U$             | 1.458   | 50         | 20.82           | 19.73           | -61.27          |

The EUT must not transmit until the interference level is less than or equal to:

Measured Threshold Level  $\leq T_U$

Where:  $T_U$  =Upper threshold level

**Test Result****PP**

| Monitor threshold     | Measured Threshold Level | Limit (dBm) |
|-----------------------|--------------------------|-------------|
| Lower Threshold (dBm) | N/A                      | -79.02      |
| Upper Threshold (dBm) | N/A                      | -59.02      |

**FP****Ant0**

| Monitor threshold     | Measured Threshold Level | Limit (dBm) |
|-----------------------|--------------------------|-------------|
| Lower Threshold (dBm) | N/A                      | -81.15      |
| Upper Threshold (dBm) | N/A                      | -61.15      |

**Ant1**

| Monitor threshold     | Measured Threshold Level | Limit (dBm) |
|-----------------------|--------------------------|-------------|
| Lower Threshold (dBm) | N/A                      | -81.27      |
| Upper Threshold (dBm) | N/A                      | -61.27      |

Note: N/A Not applicable- EUT which supports at least of 40 duplex system access channels and implements Least Interfered Channel (LIC) algorithm is permitted to use an upper monitoring threshold. Please refer to the section 4.16.2 for more details.

**3.8.5 Monitoring Bandwidth, FCC Part 15.323 (c) (7)****Test Procedure**

Simple Compliance Test, ANSI C63.17, clause 7.4.1

More Detailed Test, ANSI C63.17, clause 7.4.2

The test is passed if either the Simple Compliance Test or the More Detailed test is passed.

During this test the spectrum analyzer is observed visually to see if the EUT transmits or not.

**Limit**

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission.

**Test Result****PP**

| Test performed                               | Observation      | Verdict |
|----------------------------------------------|------------------|---------|
| Simple Compliance test, at $\pm 30\%$ of $B$ | No transmissions | Pass    |
| More Detailed Test, at -6 dB points          | N/A              | N/A     |
| More Detailed Test, at -12 dB points         | N/A              | N/A     |

**FP****Ant0 & Ant1**

| Test performed                               | Observation      | Verdict |
|----------------------------------------------|------------------|---------|
| Simple Compliance test, at $\pm 30\%$ of $B$ | No transmissions | Pass    |
| More Detailed Test, at -6 dB points          | N/A              | N/A     |
| More Detailed Test, at -12 dB points         | N/A              | N/A     |

### 3.8.6 Reaction Time and Monitoring Interval

#### Test Procedure

ANSI C63.17, clause 7.5

#### Limit

The maximum reaction time must be less than  $50 \times \sqrt{1.25/\text{emission bandwidth in MHz}}$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35 \times \sqrt{1.25/\text{emission bandwidth in MHz}}$  microseconds but shall not be required to be less than 35 microseconds.

#### Test Result

By administrative commands and out-of-operating region interference, the EUT is restricted to operate on a single carrier frequency.

Time-synchronized pulsed interference was then applied on the carrier at pulsed levels TU + UM to check that the EUT does not transmit at all. The level was raised 6 dB for part d) with 35  $\mu$ s pulses.

The pulses are synchronized with the EUT timeslots and applied centered within all timeslots

#### PP

| Pulse Width, ref. to ANSI C63.17 clause 7.5                                                        | Observation      | Verdict |
|----------------------------------------------------------------------------------------------------|------------------|---------|
| c) > largest of 50 $\mu$ s and $50 \times \sqrt{1.25/B}$                                           | No transmissions | Pass    |
| d) > largest of 35 $\mu$ s and $35 \times \sqrt{1.25/B}$ , and with interference level raised 6 dB | No transmissions | Pass    |

#### FP

##### Ant0 & Ant1

| Pulse Width, ref. to ANSI C63.17 clause 7.5                                                        | Observation      | Verdict |
|----------------------------------------------------------------------------------------------------|------------------|---------|
| c) > largest of 50 $\mu$ s and $50 \times \sqrt{1.25/B}$                                           | No transmissions | Pass    |
| d) > largest of 35 $\mu$ s and $35 \times \sqrt{1.25/B}$ , and with interference level raised 6 dB | No transmissions | Pass    |

Note:: Since B is larger than 1.25 MHz the test was performed with pulse lengths of 50  $\mu$ s and 35  $\mu$ s

### 3.8.7 Time and Spectrum Window Access Procedure

#### Test Procedure

This requirement is only for EUTs which transmit unacknowledged control and signaling information.  
Timing for EUTs using control and signaling channel type transmissions: ANSI C63.17, clause 8.1

#### Limit

FCC 15.323(c)(4):

Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.

FCC 15.323(c)(6):

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available

#### Test Result

| Access Criteria, ref. to ANSI C63.17 clause 8.1.1                                                                                                                                             | Observation | Verdict |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|
| b) Check that the EUT transmits on the interference free time-slot                                                                                                                            | N/A         | N/A     |
| b) The EUT must terminate or pause in its repetitive transmission of the control and signalling channel on the open channel to repeat the access criteria not less frequently than every 30 s | N/A         | N/A     |

If FCC 15.323(c)(6) option, **If Random Waiting Interval is NOT implemented**

| Access Criteria, ref. to ANSI C63.17 clause 8.1.2                                                                  | Observation | Verdict |
|--------------------------------------------------------------------------------------------------------------------|-------------|---------|
| b) Check that the EUT changes to an interference-free slot when interference is introduced on the time slot in use | N/A         | N/A     |

If FCC 15.323(c)(6) option, **Only if Random Waiting Interval is implemented**

| Access Criteria, ref. to ANSI C63.17 clause 8.1.3                                                              | Observation | Verdict |
|----------------------------------------------------------------------------------------------------------------|-------------|---------|
| b-d) Check that the EUT uses random waiting interval before continuing transmission on an interfered time slot | N/A         | N/A     |

Note: The tested EUT does not transmit unacknowledged control and signaling information.

### 3.8.8 Acknowledgements and Transmission Duration FCC Part 15.323 (c) (3) & (c) (4)

#### Test Procedure

Acknowledgements: ANSI C63.17, clause 8.2.1

Transmission Duration: ANSI C63.17, clause 8.2.2

During the test Initial transmission without acknowledgements the signal from the EUT to the companion device is blocked by circulators in addition to the tunable attenuator.

The test Transmission time after loss of acknowledgements is performed by cutting-off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting..

The Transmission Duration test is performed by monitoring the slot in use and measuring the time until the EUT changes to a different slot.

#### Limit, FCC 15.323 (c)(3) and (4)

Occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria. Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated

**Test Result****PP**

## Acknowledgements

| Test ref. to ANSI C63.17 clause 8.2.1               | Observation | Verdict |
|-----------------------------------------------------|-------------|---------|
| a) Initial transmission without acknowledgements    | 35 ms       | Pass    |
| c) Transmission time after loss of acknowledgements | 5.0 sec     | Pass    |

## Transmission Duration

| Test ref. to ANSI C63.17 clause 8.2.2                      | Observation                                                      | Verdict |
|------------------------------------------------------------|------------------------------------------------------------------|---------|
| b) Transmission duration on same time and frequency window | Only for initiating device that controls which time slot is used | N/A     |

**FP****Ant0 & Ant1**

## Acknowledgements

| Test ref. to ANSI C63.17 clause 8.2.1               | Observation | Verdict |
|-----------------------------------------------------|-------------|---------|
| a) Initial transmission without acknowledgements    | 35 ms       | Pass    |
| c) Transmission time after loss of acknowledgements | 5.0 sec     | Pass    |

## Transmission Duration

| Test ref. to ANSI C63.17 clause 8.2.2                      | Observation                                                      | Verdict |
|------------------------------------------------------------|------------------------------------------------------------------|---------|
| b) Transmission duration on same time and frequency window | Only for initiating device that controls which time slot is used | N/A     |

**3.8.9 Dual Access Criteria Check, FCC Part15.323 (c) (10)****Test Procedure**

EUTs that does not implement the Upper Threshold: ANSI C63.17, clause 8.3.1

EUTs that implement the Upper Threshold: ANSI C63.17, clause 8.3.2

This test is required for equipment that uses the access criteria in FCC 15.323(c)(10).

**Limit, FCC 15.323(c)(10)**

An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

**Test Result****EUTs that implements the Upper Threshold:**

| Test ref. to ANSI C63.17 clause 8.3.2                                                              | Observation | Verdict |
|----------------------------------------------------------------------------------------------------|-------------|---------|
| b) EUT is restricted to a single carrier fl for TDMA systems. The Test is Pass if EUT can transmit | N/A         | N/A     |
| c) d) Transmission on interference-free receive time/spectrum window                               | N/A         | N/A     |
| e) f) Transmission on interference-free transmit time/spectrum window                              | N/A         | N/A     |
| g) Transmission not possible on any time/spectrum window                                           | N/A         | N/A     |

**3.8.10 Alternative monitoring interval for co-located devices, FCC Part 15.323 (c) (11)**

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

**Test Procedure**

Measurement method according to ANSI C63.17 2006 clause 8.4

**Test Result**

The manufacturer declares that this provision is not utilized by the EUT.

**3.8.11 Automatic Discontinuation of Transmission, FCC Part 15.319(f)****Test Procedure**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

**Test Result**

Meet the requirement; please refer to the declaration provided by manufacturer.

**3.8.12 Monitoring Time FCC 15.323 (c) (1)**

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

**Test Procedure**

Measurement method according to ANSI C63.17 2006 clause 7.3.4

**Test Result**

PP

EUT monitors the combined time and spectrum window prior to initiation of transmission. Test result is following

| Interference (Refer to ANSI C63.17 clause 7.3.4)                                                                                                                    | Reaction of EUT     | Results |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------|
| 1) Apply the interference on f1 at level TU+UM, and no interference on f2. Initiate transmission and verify the transmission on f2.                                 | EUT transmits on f2 | Pass    |
| 2) Apply the interference on f2 at level TU+UM, at the same time, no interference on f1. After about 20ms, initiate transmission and verify the transmission on f1. | EUT transmits on f1 | Pass    |

FP

Ant0 & Ant1

EUT monitors the combined time and spectrum window prior to initiation of transmission. Test result is following

| Interference (Refer to ANSI C63.17 clause 7.3.4)                                                                                                                    | Reaction of EUT     | Results |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------|
| 1) Apply the interference on f1 at level TU+UM, and no interference on f2. Initiate transmission and verify the transmission on f2.                                 | EUT transmits on f2 | Pass    |
| 2) Apply the interference on f2 at level TU+UM, at the same time, no interference on f1. After about 20ms, initiate transmission and verify the transmission on f1. | EUT transmits on f1 | Pass    |

**3.8.13 Monitoring Antenna, FCC Part 15.323 (c) (8)**

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

**Test Procedure**

Measurement method according to ANSI C63.17 2006 paragraph 4

**Test Result**

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

**3.8.14 Monitoring threshold relation FCC 15.323(c) (9)**

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

**Test Procedure**

Measurement method according to ANSI C63.17 2006 paragraph 4

**Test Result**

Not apply based on 15.323 (c) (5)

**3.8.15 Fair Access, FCC Part 15.323 (c) (12)**

The provisions of FCC Part 15.323(c)(10) or (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

**Test Result**

The manufacturer declares that this device does not use any mechanisms as provided by Part 15.323 (c) (10) or (c) (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

## 4. Photos of Testing


### 4.1 Emission Test View

FP Conducted Emission test view






FP - Radiated Emission test view (Frequency from 30MHz to 1GHz)

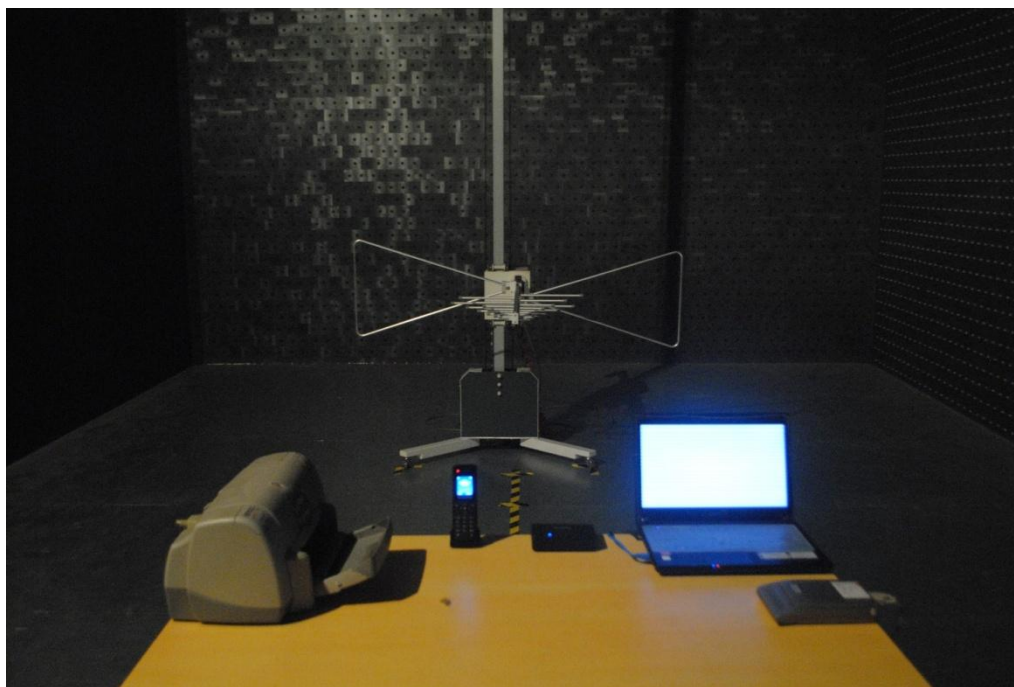


FP - Radiated Emission test view (Frequency above 1GHz)

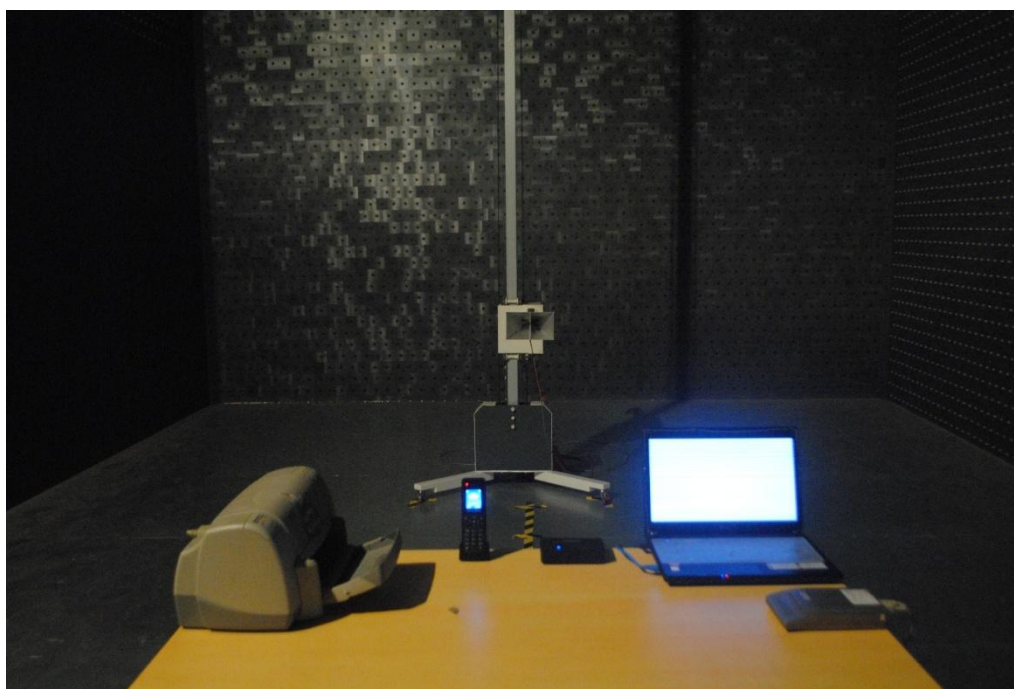


## 4.2 EUT Detailed Photographs

FP EUT top view

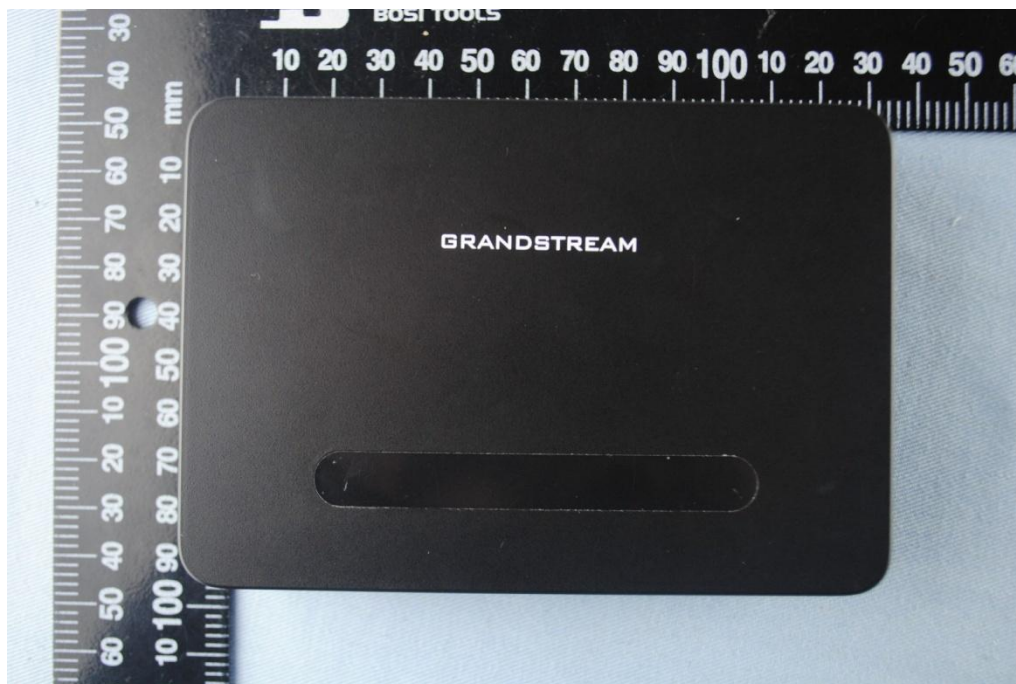





EUT bottom view

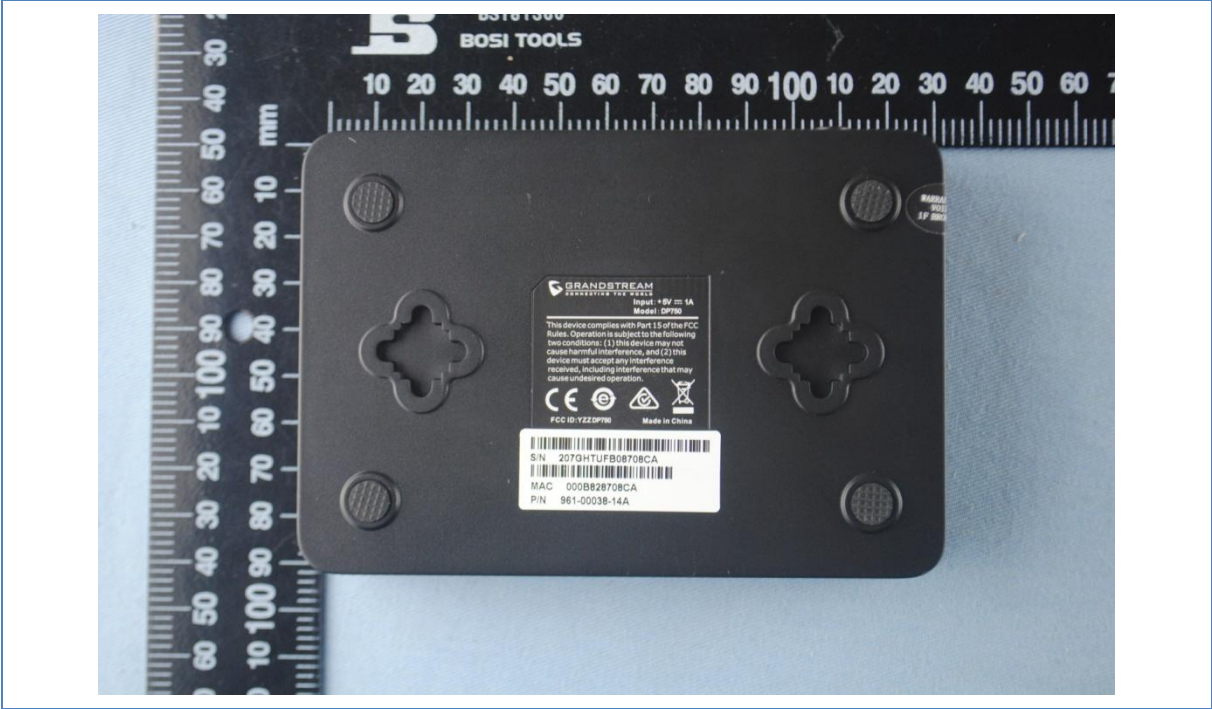




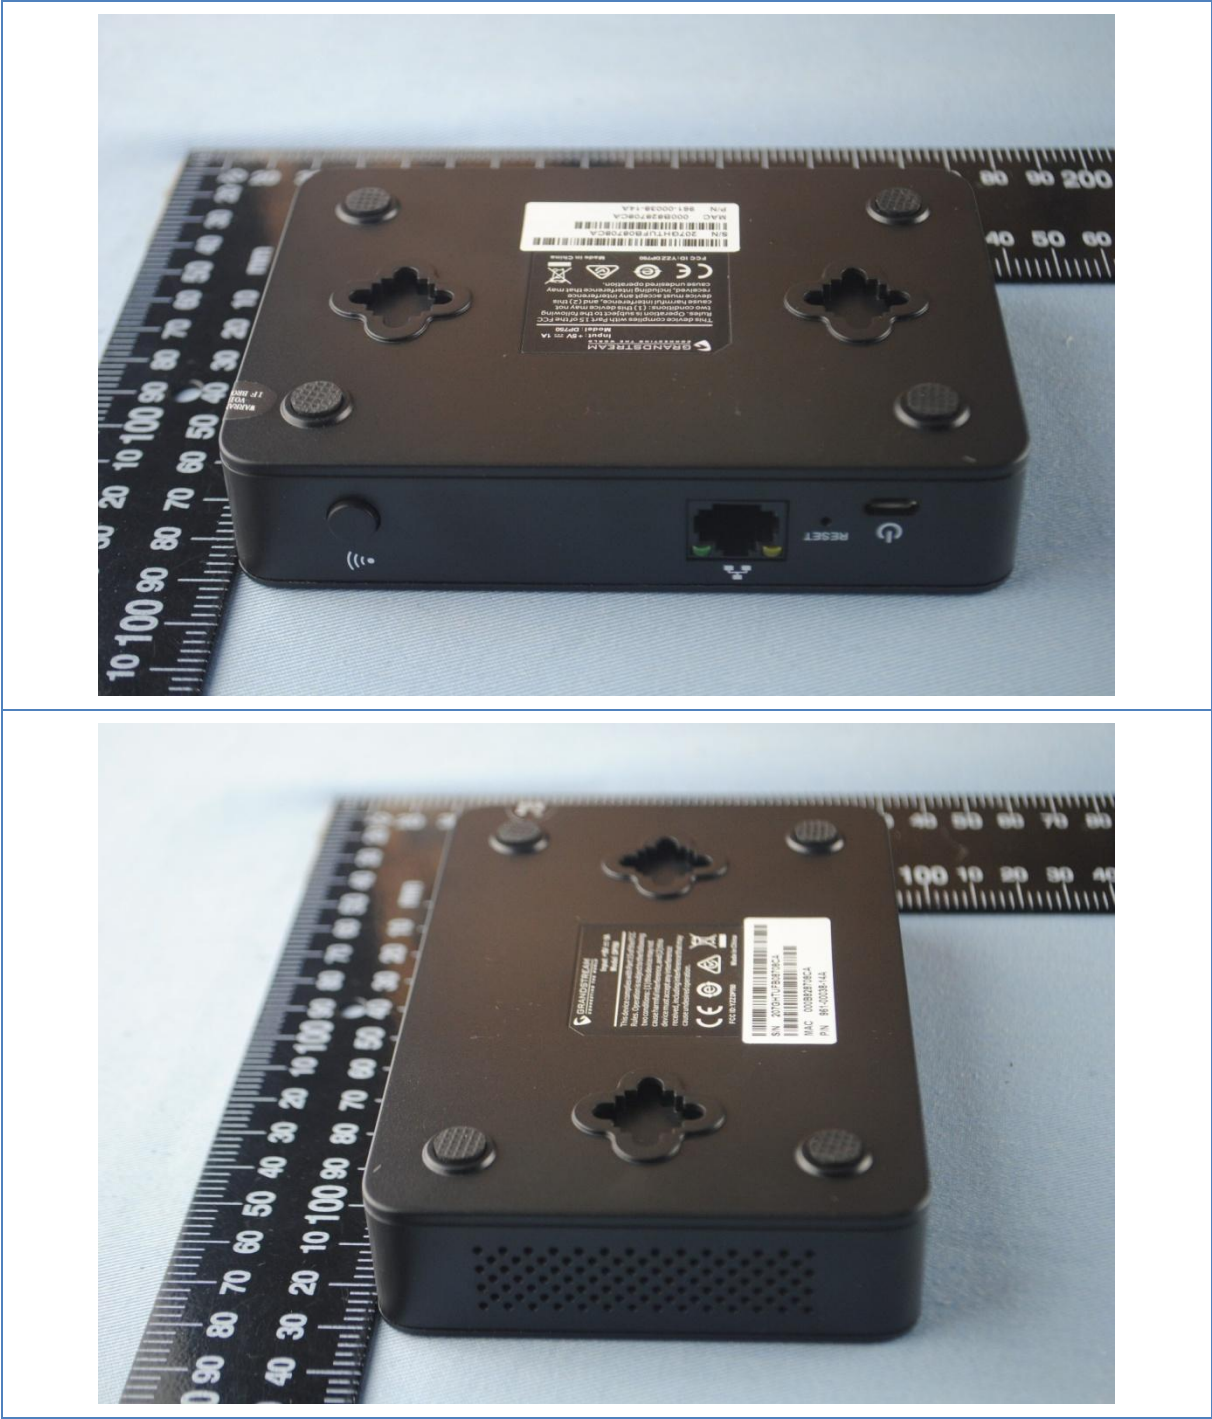


EUT inside whole view

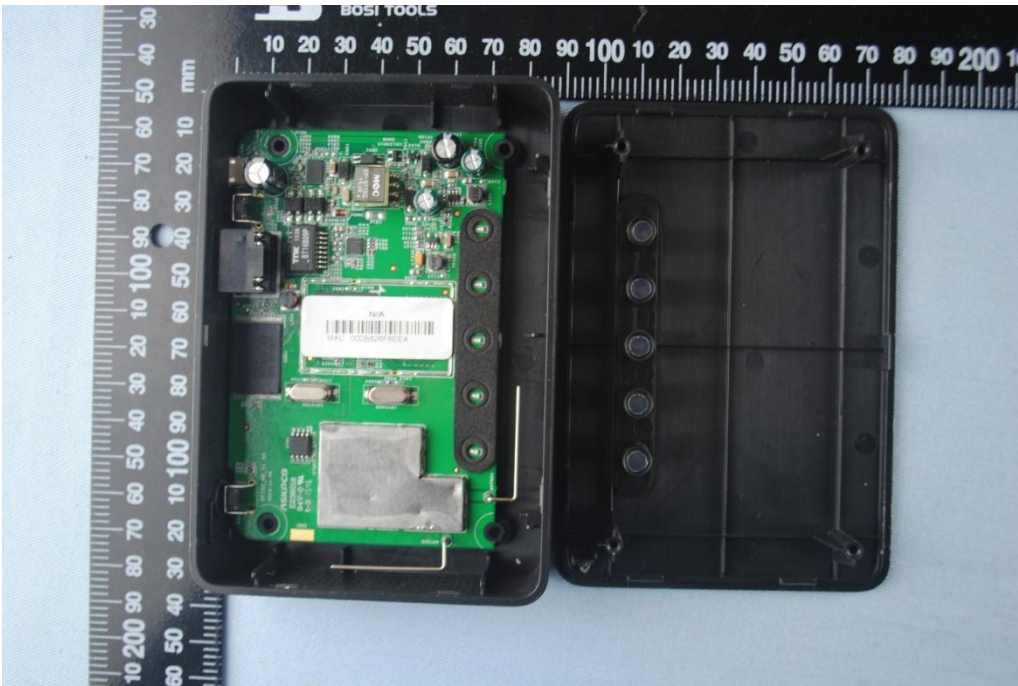


Main board component side

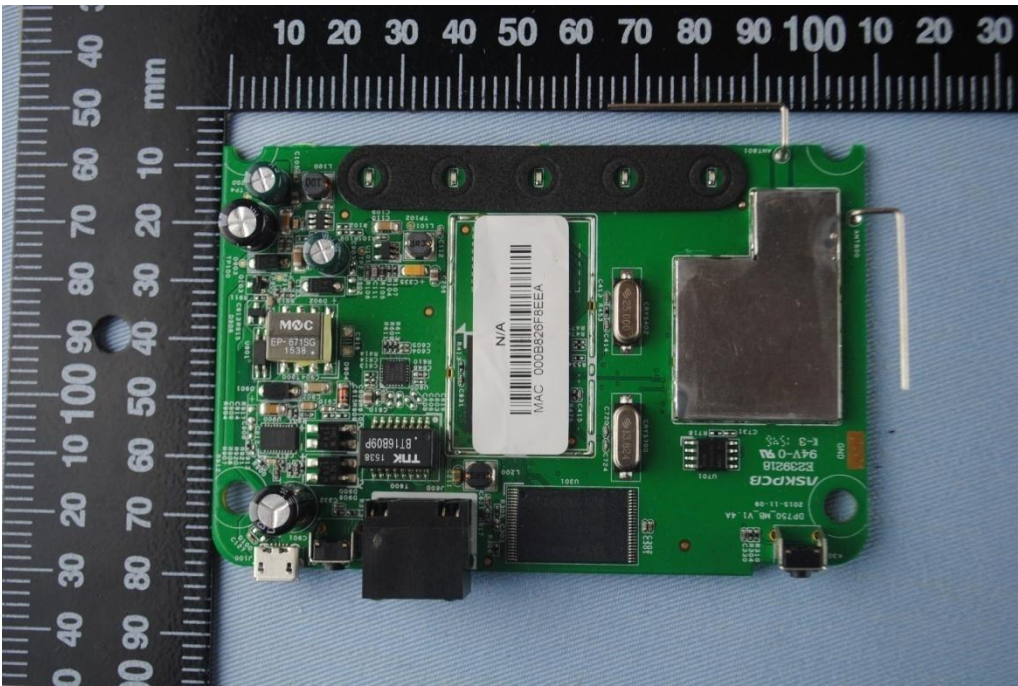



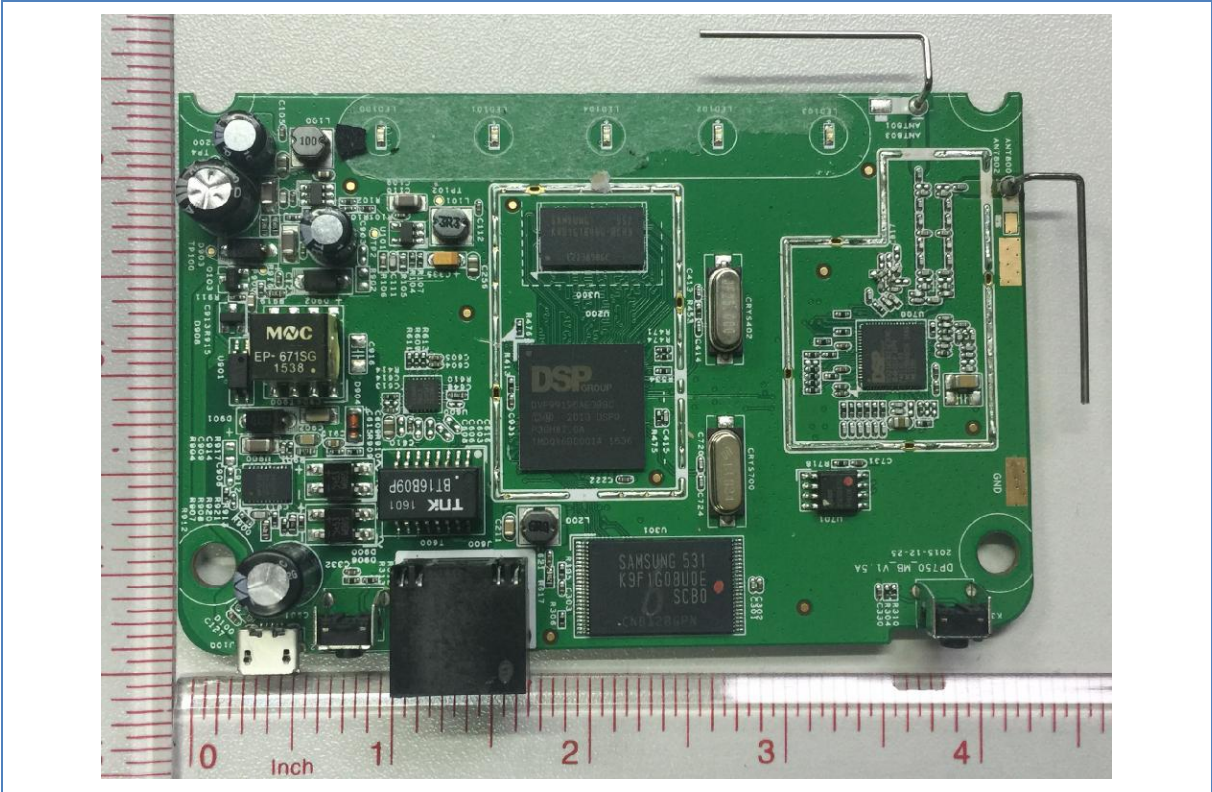

Main board solder side

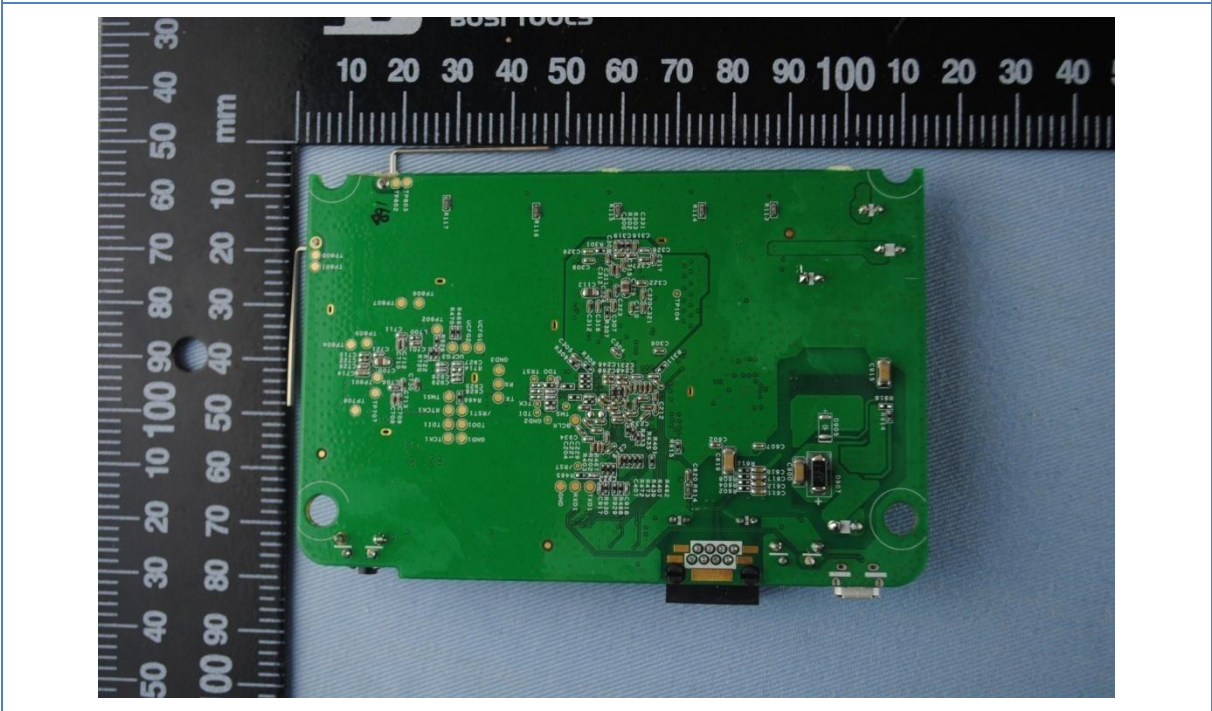

PP EUT top view








EUT bottom view









EUT inside whole view

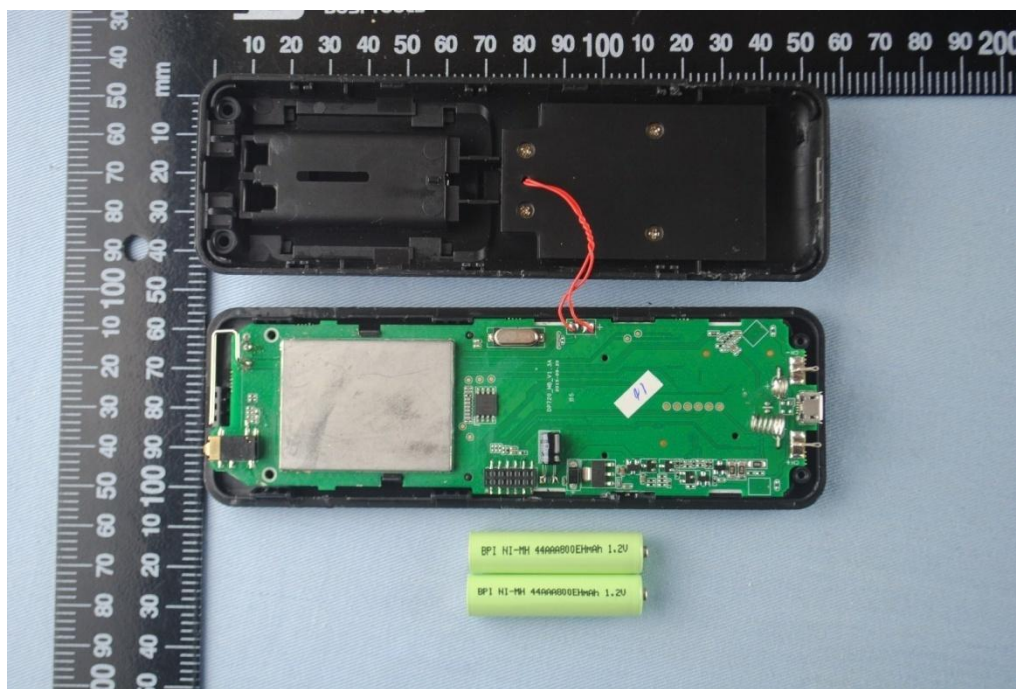


Main board component side

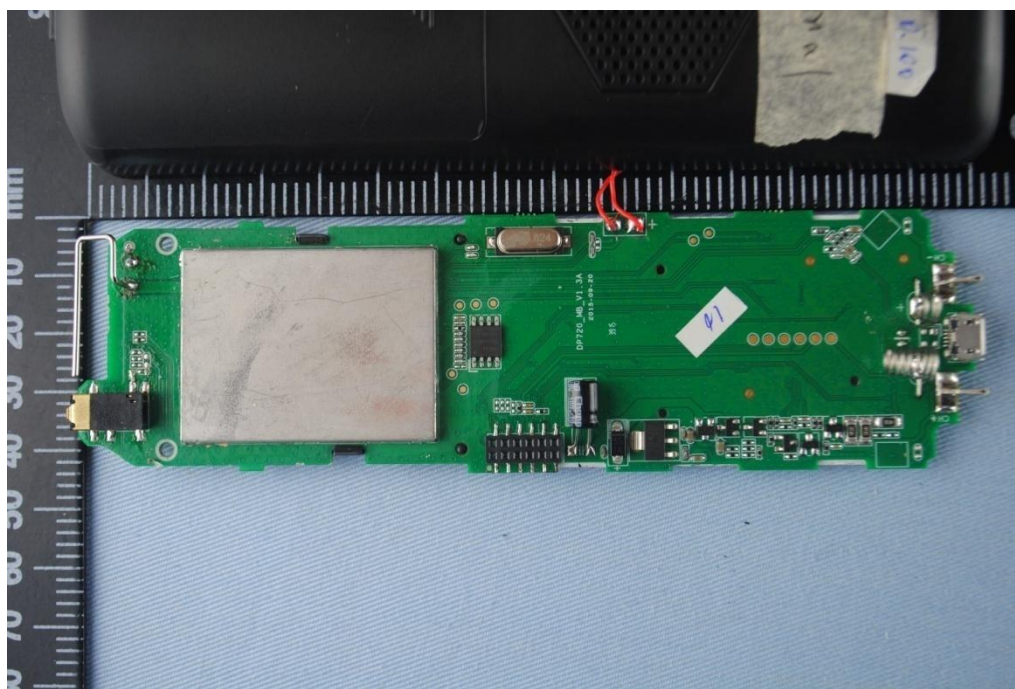




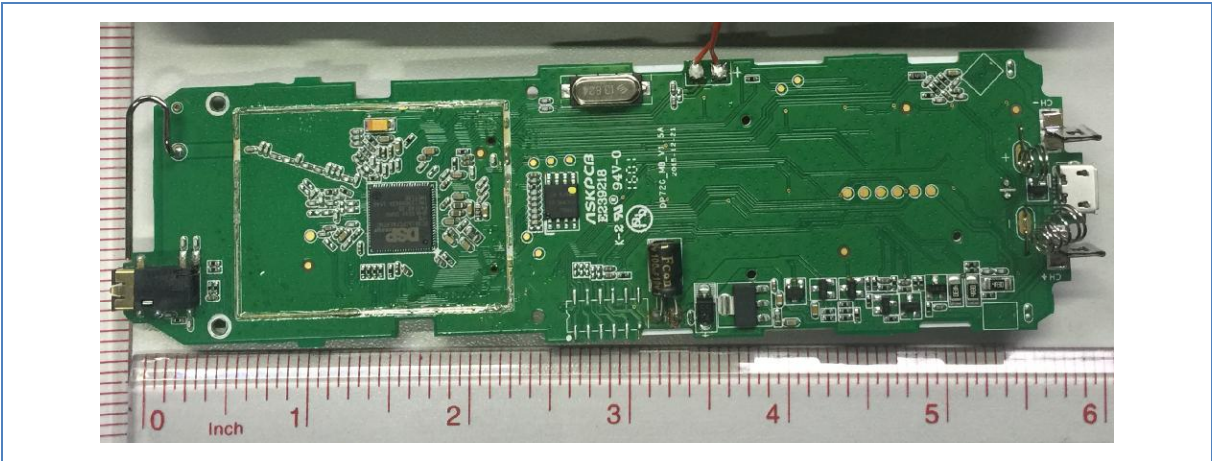

Main board solder side

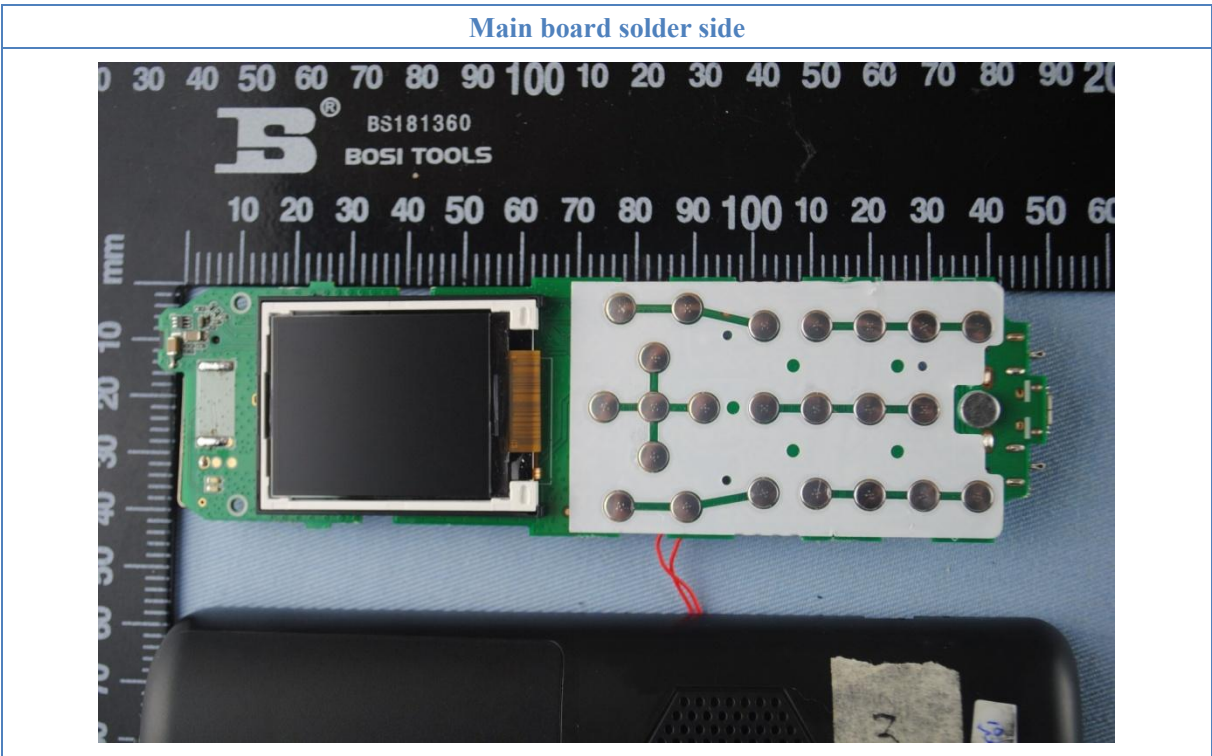

FCC Adapter top view SUNLIGHT

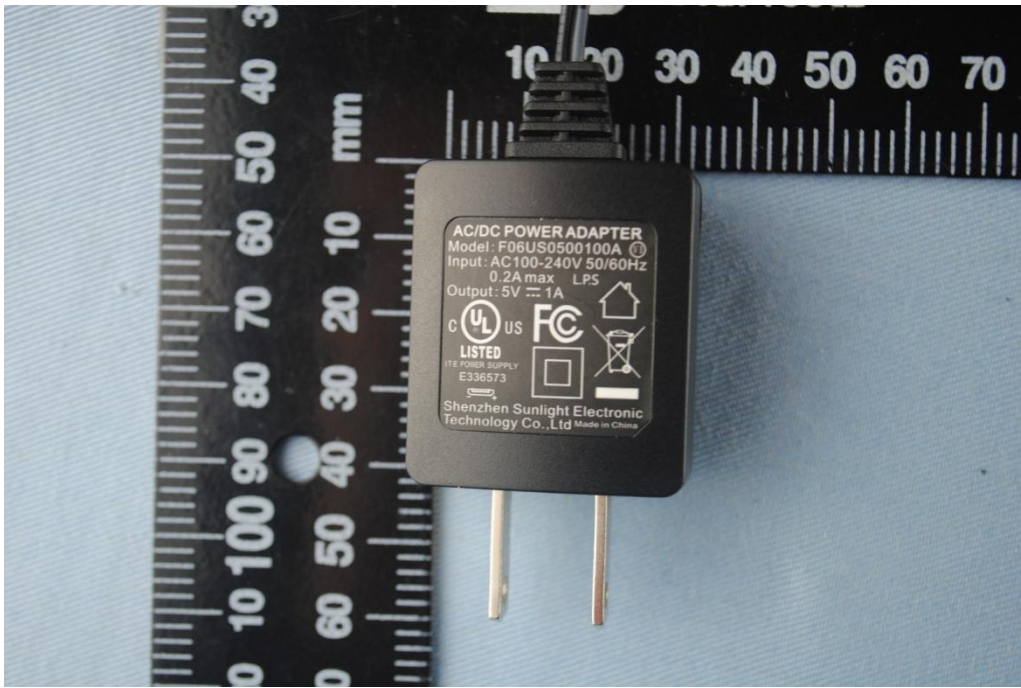


Adapter side view





FCC Adapter top view MASS

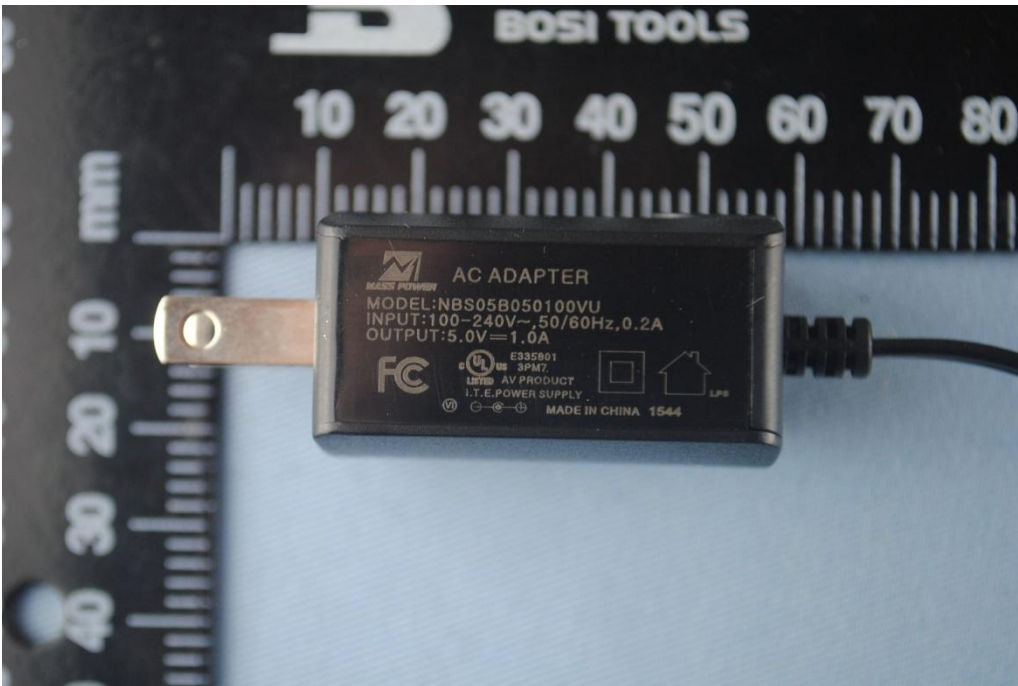


Adapter side view



Charger Base top view



Charger Base bottom view

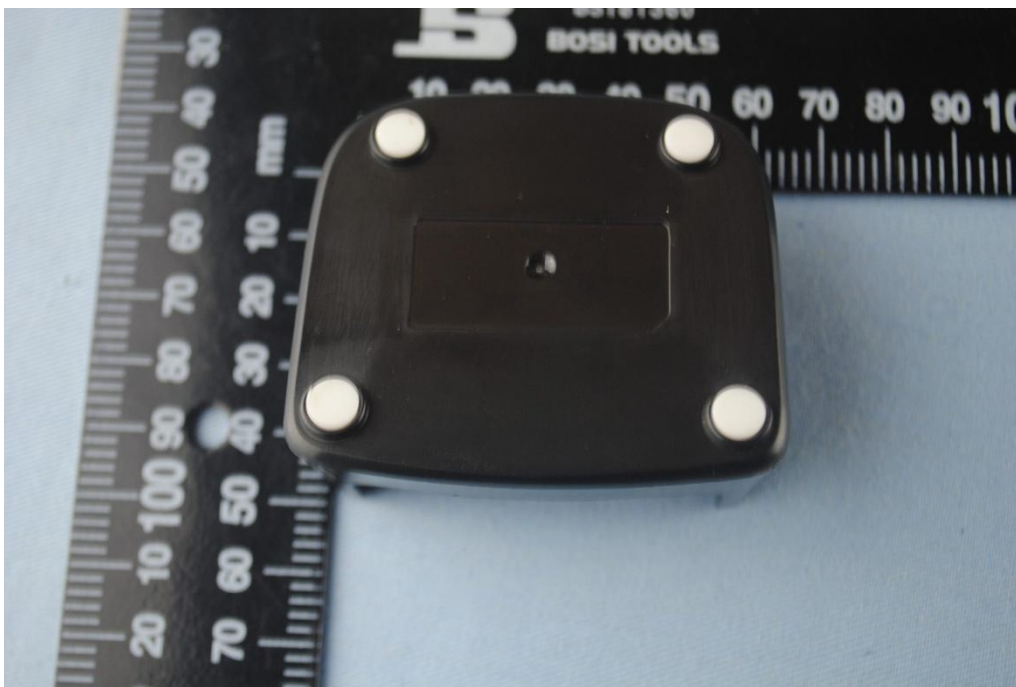


5. FCC ID Label



The following note shall be conspicuously placed in the users manual: “Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.”

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

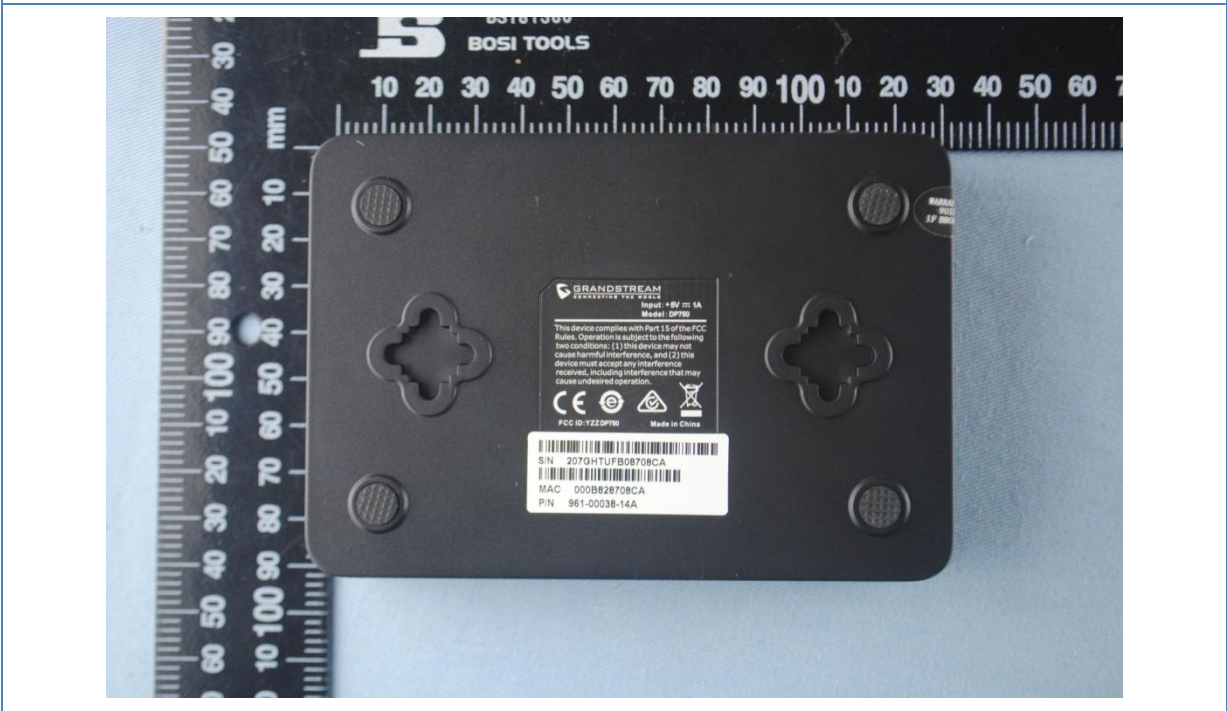

## 6. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

| Equipment/<br>Facilities                | Manufacturer       | Model #        | Serial No. | Due Date        |
|-----------------------------------------|--------------------|----------------|------------|-----------------|
| Turntable                               | Innco systems GmbH | CT-0801        | KMO-SZ114  | NCR             |
| Antenna Tower                           | Innco systems GmbH | MM4000-PP      | KMO-SZ115  | NCR             |
| Controller                              | Innco systems GmbH | CO2000         | KMO-SZ116  | NCR             |
| Pre-Amplifier                           | Agilent            | 87405C         | KMO-SZ155  | Dec.6, 2016     |
| Pre-Amplifier                           | Com-Power          | PAM-840        | KMO-SZ156  | Dec.6, 2016     |
| Horn Antenna                            | Com-Power          | AH-840         | KMO-SZ157  | Dec.6, 2016     |
| EMI Test Receiver                       | Rohde & Schwarz    | ESPI7          | KMO-SZ002  | June 27, 2016   |
| Spectrum Analyzer                       | Rohde & Schwarz    | FSP40          | KMO-SZ003  | June 27, 2016   |
| Signal Generator                        | FLUKE              | PM5418+Y/C     | KMO-SZ020  | May 27, 2016    |
| Loop Antenna                            | Rohde & Schwarz    | HFH2-Z2        | KMO-SZ004  | August 19, 2018 |
| Trilog-Super Broadband Antenna          | SCHWARZBECK        | VULB9161       | KMO-SZ005  | August 27, 2018 |
| Trilog-Super Broadband Antenna          | SCHWARZBECK        | VULB9161       | KMO-SZ006  | August 19, 2018 |
| Broad-Band Horn Antenna                 | SCHWARZBECK        | BBHA 9120D     | KMO-SZ007  | August 19, 2018 |
| Broad-Band Horn Antenna                 | SCHWARZBECK        | BBHA 9120D     | KMO-SZ008  | August 19, 2018 |
| AMN                                     | Rohde & Schwarz    | ESH3-Z5        | KMO-SZ009  | June 27, 2016   |
| Pulse Limiter                           | SCHWARZBECK        | VTSD 9561-F    | KMO-SZ077  | Nov.29, 2016    |
| ISN                                     | SCHWARZBECK        | NTFM 8158 CAT3 | KMO-SZ070  | Nov.19, 2016    |
| ISN                                     | SCHWARZBECK        | NTFM 8158 CAT5 | KMO-SZ071  | Nov.19, 2016    |
| ISN                                     | SCHWARZBECK        | NTFM 8158 CAT6 | KMO-SZ072  | Nov.19, 2016    |
| KMO Shielded Room                       | KMO                | KMO-001        | KMO-SZ036  | NCR             |
| Coaxial Cable with N-Connectors         | SCHWARZBECK        | AK9515H        | KMO-SZ037  | Sep.18, 2016    |
| AC Power Source / Analyzer              | Agilent            | 6813B          | KMO-SZ166  | July 22, 2016   |
| Power Meter                             | Rohde & Schwarz    | OSP-B157       | KMO-HK015  | Nov.6, 2016     |
| Digital Radio Communication Tester      | Rohde & Schwarz    | CMD60          | KMO-SZ169  | April 10, 2016  |
| Universal Radio Communication Tester    | Rohde & Schwarz    | CMU200         | KMO-SZ170  | April 10, 2016  |
| Regulatory Test System 30 MHz to 40 GHz | Rohde & Schwarz    | TS8997         | KMO-HK015  | Nov.6, 2016     |
| Program Control Telephone Exchanger     | Excelltel          | CDX8000-M      | KMO-SZ221  | NCR             |
| 3m Anechoic Chamber                     | KMO                | KMO-3AC        | KMO-3AC-1  | Nov.12, 2016    |
| Temperature Chamber                     | TABAI              | PSL-4GTW       | N/A        | Feb.10, 2016    |