



www.ecmg-global.net

## EMI TEST REPORT

Model Name: Hemispheric HD IP Video Door Phone

Model Number: GDS3710

Brand Name: Grandstream

Prepared for Grandstream Networks, Inc.

FCC ID Number: YZZGDS3710

Classification: Part 15 Class B Computing Device  
Peripheral(JBP)

According to FCC 47 CFR Part 15, Subpart B  
Test Procedure: ANSI C63.4:2014

*Test Report #: SHE-1608-11568-FCC*

Prepared by: Nancy ECMG  
Nancy Han /Assistant Company Name

Reviewed by: Jawen Yin ECMG  
Jawen Yin/ Senior Engineer Company Name

QC Manager: Swall Zhang ECMG  
Swall Zhang/QC Manager Company Name

Test Report Released by Swall Zhang February 8<sup>th</sup>, 2017  
Swall Zhang Date



## Verdict

<b>Test Result :</b>	<b>Pass*</b>
----------------------	--------------

\*:In the configuration, the EUT complied with the standard specified above.

## Revision History

<i>Rev.</i>	<i>Issue date</i>	<i>Revision</i>	<i>Revised by</i>
01	02/08/2017	Initial review	Jawen Yin
/	/	/	/

## ***Test Location***

*Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.*

***Test Site Location:*** *Shenzhen General Testing & Inspection Technology Co., Ltd.*

*1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China.*

***Tel:*** *(86)-755- 27559792*

***Fax:*** *(86)-755- 86116468*

## ***Accreditation Bodies***

*The test facility was recognized, certified, or accredited by the following organizations:*

### ***IC Registration No.: 9783A***

*The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.*

### ***FCC-Registration No.: 214666***

*Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011*

# *Table of Contents*

---

<i>VERDICT</i>	2
<i>GOVERNMENT DISCLAIMER NOTICE</i>	2
<i>REPRODUCTION CLAUSE</i>	2
<i>OPINIONS AND INTERPRETATIONS</i>	2
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	2
<i>ADMINISTRATIVE DATA</i>	3
<i>EUT DESCRIPTION</i>	4
<i>FREQUENCY RANGE OF RADIATED MEASUREMENTS</i>	4
<i>TEST SUMMARY</i>	5
<i>TEST MODE JUSTIFICATION</i>	5
<i>EUT EXERCISE SOFTWARE</i>	6
<i>EQUIPMENT MODIFICATION</i>	6
<i>EUT SAMPLE PHOTOS</i>	7
<i>TEST SYSTEM DETAILS</i>	15
<i>CONFIGURATION OF TESTED SYSTEM</i>	16
<i>ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS</i>	17
<i>ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT</i>	22

### List Attached Files

<i>Exhibit Type</i>	<i>File Description</i>	<i>File Name</i>
<i>Test Report</i>	<i>Test Report</i>	<i>YZZGDS3710 _Test Report.pdf</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>YZZGDS3710 _Operation description.pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>YZZGDS3710 _External Photos</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>YZZGDS3710 _Internal Photos</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>YZZGDS3710 _Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>YZZGDS3710 _Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>YZZGDS3710 _Label &amp; Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>YZZGDS3710 _User Manual.pdf</i>
<i>Test setup photos</i>	<i>Test set-up photos</i>	<i>YZZGDS3710 _Test Set-up Photos</i>

### ***Government Disclaimer Notice***

*When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

### ***Reproduction Clause***

*Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).*

### ***Opinions and Interpretations***

*This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.*

### ***Statement of Measurement Uncertainty***

*The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.*

## Administrative Data

*Test Sample* : Hemispheric HD IP Video Door Phone

*Model Numbers* : GDS3710

*Model Tested* : GDS3710

*Date of Receipt* : September 10<sup>th</sup>, 2016

*Date Tested* : September 14<sup>th</sup>, 2016 & February 6<sup>th</sup>, 2017

*Applicant* : Grandstream Networks, Inc.

*Address* : 126 Brookline Ave, 3<sup>rd</sup> Floor Boston, MA 02215, USA

*Telephone* : +1 (617) 566-9300

*Fax* : +1 (617) 249-1987

*Manufacturer* : Grandstream Networks, Inc.

*Address* : 126 Brookline Ave, 3<sup>rd</sup> Floor Boston, MA 02215, USA

*Telephone* : +1 (617) 566-9300

*Fax* : +1 (617) 249-1987

*Factory* : Grandstream Networks, Inc.

*Address* : 126 Brookline Ave, 3<sup>rd</sup> Floor Boston, MA 02215, USA

*Telephone* : +1 (617) 566-9300

*Fax* : +1 (617) 249-1987

## ***EUT Description***

*Grandstream Networks, Inc. Model Tested GDS3710 (referred to as the EUT in this report) is an Hemispheric HD IP Video Door Phone.*

***Rating(s) of EUT:*** *Powered by PoE or DC 12V, 1.0A*

*For other informations &features please refer to user's manual of EUT.*

## ***Frequency Range Of Radiated Measurements***

*(b) For unintentional radiators:*

*(1) Except as otherwise indicated in paragraphs (b)(2) or (b)(3) of this section, for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:*

<i>Highest frequency generated or used in the device or on which the device operates or tunes (MHz)</i>	<i>Upper frequency of measurement range (MHz)</i>
<i>Below 1.705</i>	<i>30.</i>
<i>1.705-108</i>	<i>1000.</i>
<i>108-500</i>	<i>2000.</i>
<i>500-1000</i>	<i>5000.</i>
<i>Above 1000</i>	<i>5<sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower.</i>

*Note: Since the highest frequency operated of the EUT is 530MHz, so upper frequency of radiated emission test is up to 5GHz as per §15.33(b)(1).*

## Test Summary

The Electromagnetic Compatibility requirements on model GDS3710 for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 15.107 ANSI C63.4 - 2014	Conducted Emission	Passed	AC Input Port	Attachment 1
FCC Part 15.109 ANSI C63.4 - 2014	Radiated Emission	Passed	Enclosure	Attachment 2

## Test Mode Justification

Pre-Scan has been conducted to determine the worst-case from all possible combination between available operation mode .Following mode(s) was (were) selected for the final test as listed below:

Pre-Test Mode	
EMI Test Mode	Mode 1: Communication with PC +PoE
	Mode 2: Communication with PC +Mass Power
Final Test Mode: Mode 1,2	

### ***EUT Exercise Software***

*No Exercise software support this test.*

### ***Equipment Modification***

*Any modifications installed previous to testing by Grandstream Networks, Inc. will be incorporated in each production model sold or leased in United States.*

*There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen).*

*EUT Sample Photos*


*EUT Exterior View*





*EUT Internal View*



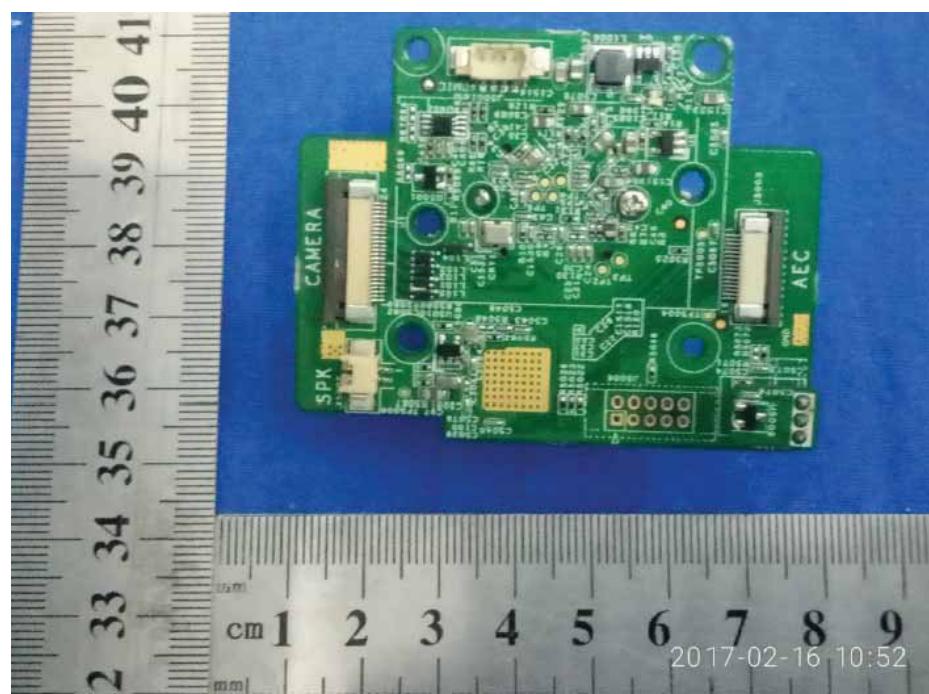


FCC Test Report #: SHE-1608-11568-FCC

Prepared for Grandstream Networks, Inc.

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen)

Page 10 of 35

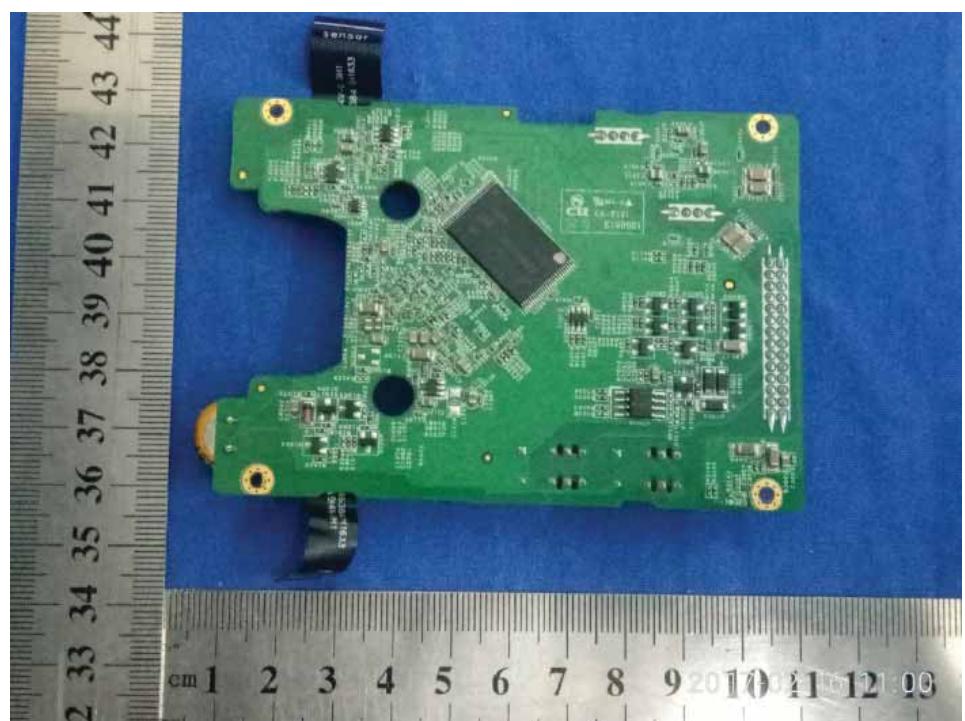


FCC Test Report #: SHE-1608-11568-FCC

Prepared for Grandstream Networks, Inc.

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen)

Page 11 of 35

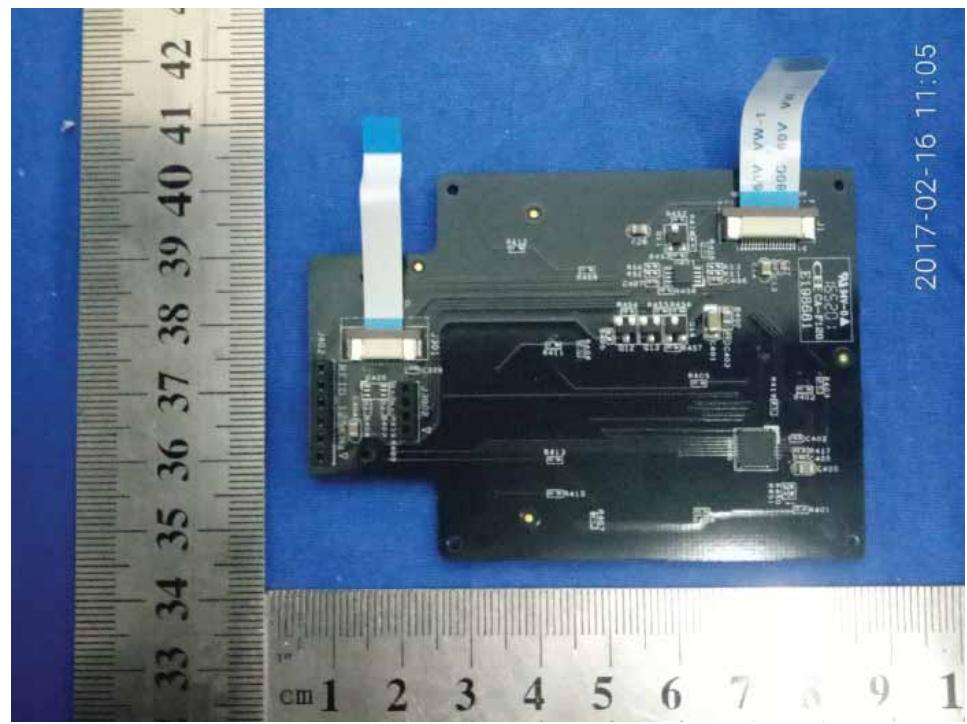




FCC Test Report #: SHE-1608-11568-FCC

Prepared for Grandstream Networks, Inc.

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen)

Page 12 of 35

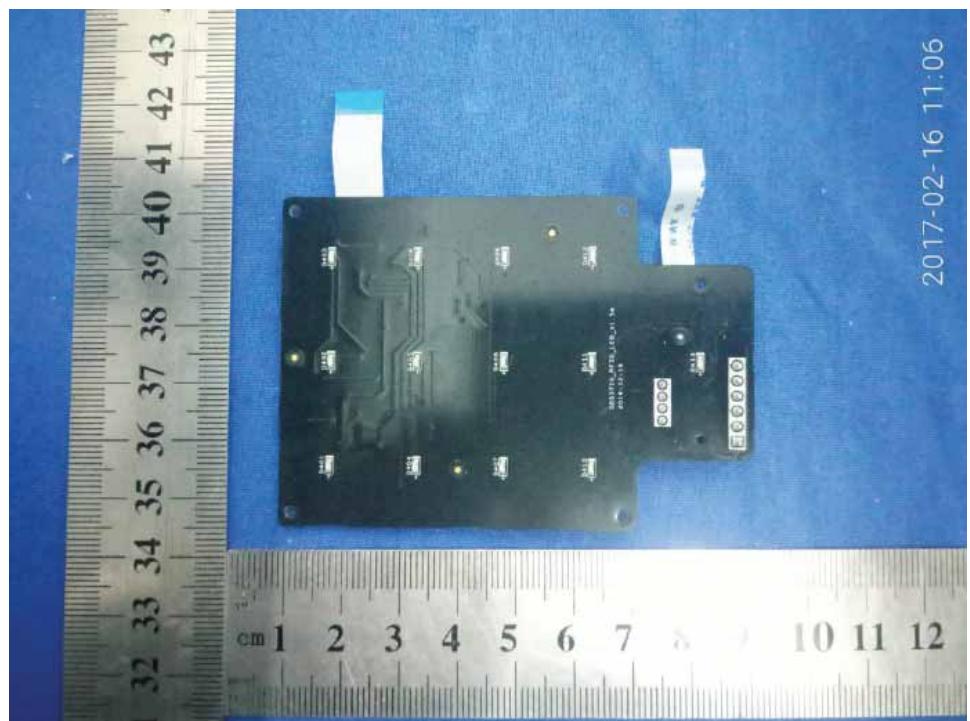

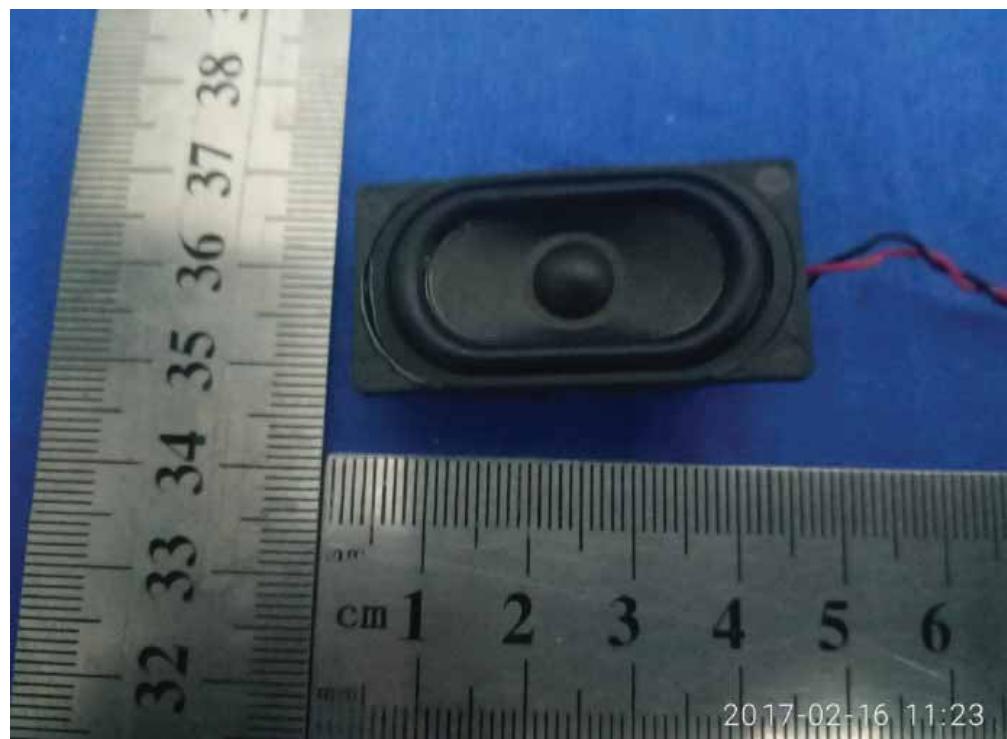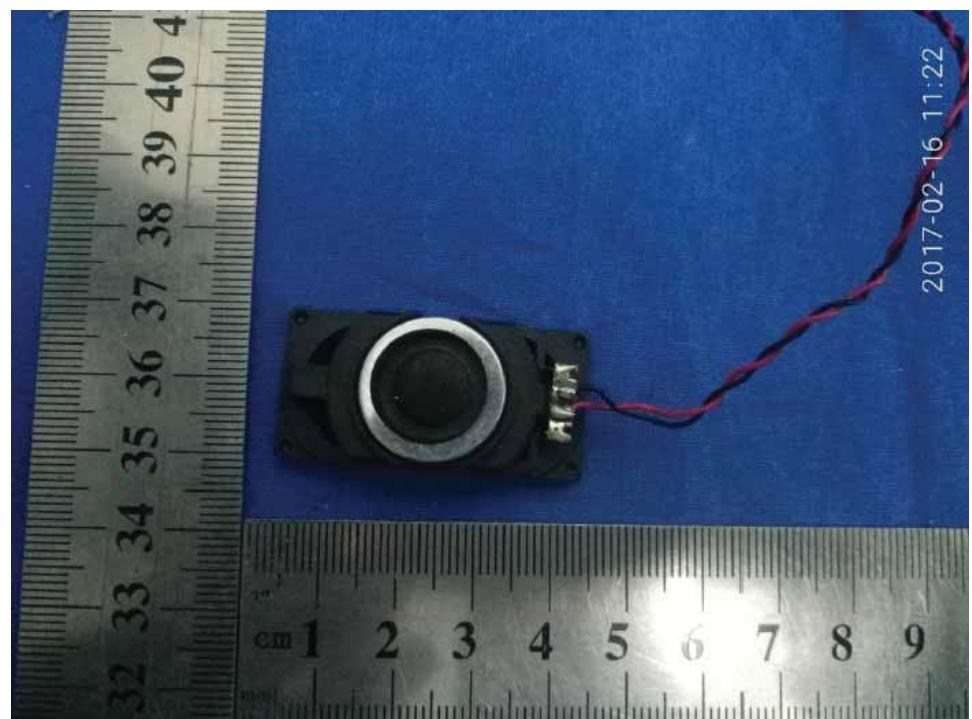

## Test System Details

<b>EUT</b>				
<i>Model Number:</i>	<i>GDS3710</i>			
<i>Description:</i>	<i>Hemispheric HD IP Video Door Phone</i>			
<i>Manufacturer:</i>	<i>Grandstream Networks, Inc.</i>			
<i>Input Voltage:</i>	<i>Powered by PoE or DC12V</i>			
<b>Support Equipment</b>				
<i>Description</i>	<i>Model Number</i>	<i>Serial Number</i>	<i>FCC Certificate</i>	<i>Manufacturer</i>
PC	FV39JY1	34531671097	DoC	Dell
Monitor	U2142M	/	DoC	DELL
Printer	LBP2900	/	DoC	Canon
Keyboard	KH-0225	0683207	DoC	Lenovo
Mouse	N889	44AC107	DoC	DELL
Compact PoE switch	TL-POE160S	1164065000056	VoC	TP-Link
Power Adapter	SFF1200150A1BY	/	VoC	Mass Power

<b>Cable Description</b>						
<i>Cable No.</i>	<i>Type of Cable</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
1	Network Cable	EUT	PC	1.5	N	N
2	Power cable	EUT	Plug	1.8	N	N
3	Printer Cable	EUT	Printer	1.2	Y	Y
4	VGA Cable	Monitor	PC	1.5	Y	Y
5	Keyboard Cable	Keyboard	PC	1.2	N	Y
6	Mouse Cable	Mouse	PC	1.2	N	Y

**Note:** The EUT has been tested as an independent unit together with other necessary accessories or support units. the above support units or accessories were used to form a representative test configuration during the test tests.


FCC Test Report #: SHE-1608-11568-FCC

Prepared for Grandstream Networks, Inc.

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen)

Page 15 of 35


## *Configuration of Tested System*

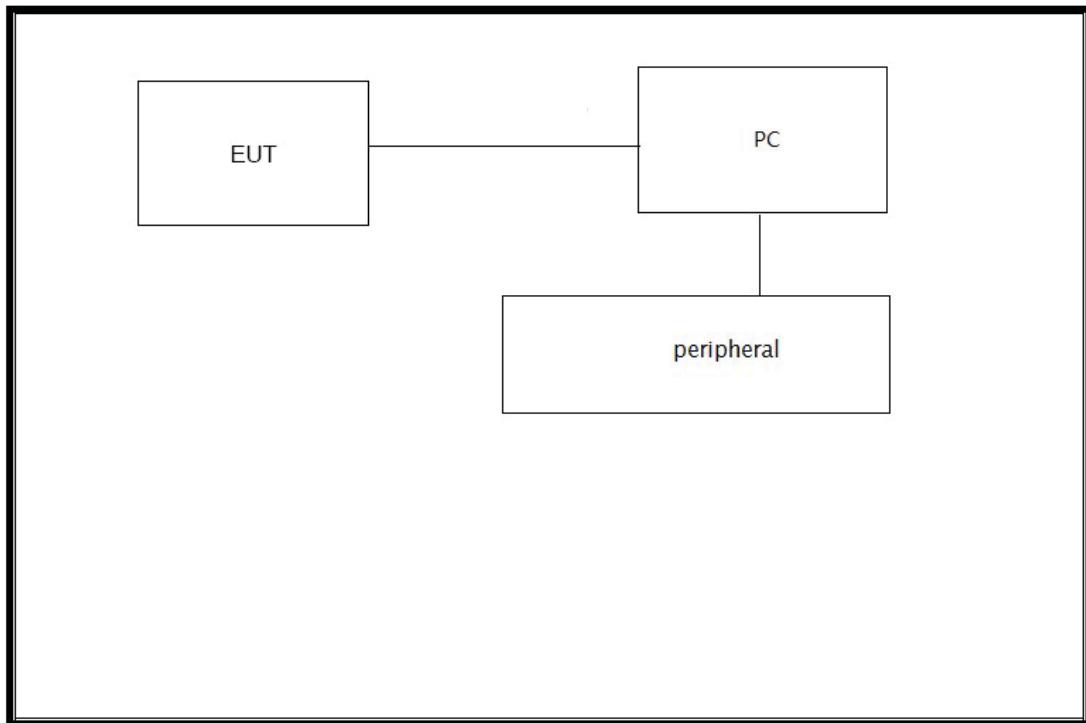

**ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS**

<b>CLIENT:</b>	Grandstream Networks, Inc.	<b>TEST STANDERD:</b>	Section 15.107
<b>MODEL NUMBERS:</b>	GDS3710	<b>PRODUCT:</b>	Hemispheric HD IP Video Door Phone
<b>MODEL TESTED:</b>	GDS3710	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22° C	<b>HUMIDITY:</b>	48%
<b>ATM PRESSURE:</b>	103kPa	<b>GROUNDING:</b>	None
<b>TESTED BY:</b>	Alex Yu	<b>DATE OF TEST:</b>	September 14 <sup>th</sup> , 2016
<b>TEST REFERENCE:</b>	ANSI C63.4- 2014		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2014 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged.</p> <p>The frequency range investigated was from 150KHz to 30MHz.</p> <p>Corrected Amplitude &amp; Over Limit Calculation.</p> <p>The basic equation as follow:</p> $VC = VR + AC + VDF;$ <p>Herein,</p> <p>VC: corrected voltage amplitude</p> <p>VR: reading voltage amplitude</p> <p>AC: attenuation caused by cable loss</p> <p>VDF: voltage division factor of AMN or ISN.</p> <p>The "Over Limit" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a Over Limit of 7dB means the emission is 7dB below the maximum limit.</p> <p>The equation for Over Limit calculation is as follows:</p> $\text{Over Limit} = \text{Limit} - \text{Corrected Amplitude}.$		
<b>TEST MODE:</b>	Mode 2		
<b>TESTED RANGE:</b>	150kHz to 30MHz		
<b>TEST VOLTAGE:</b>	AC 120V/60Hz by Power Adapter		
<b>RESULTS:</b>	The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp(Shenzhen) test personnel.		
<b>M. UNCERTAINTY:</b>	The maximum measurement uncertainty is evaluated as: 150KHz~30MHz: 3.2dB. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.		

Continue on to next page...

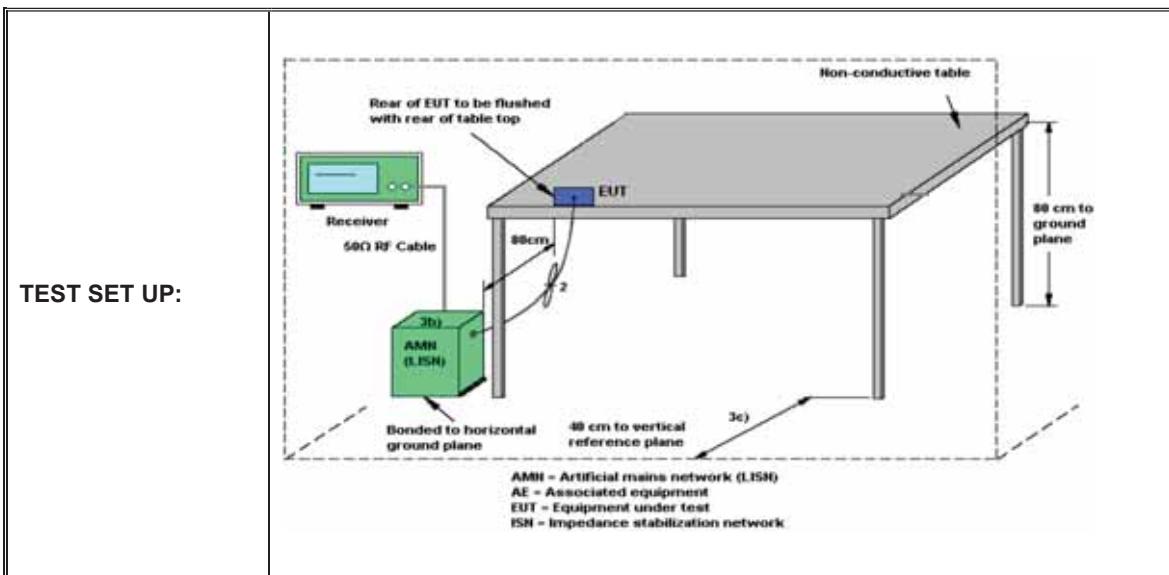

### EMI Receiver Set-up:


Frequency [MHz]	IF B/W
0.15 - 30	9KHz

### Conducted Emission Limit:


Frequency [MHz]	Field strength [dBuV]	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

*120VAC/60Hz Input*

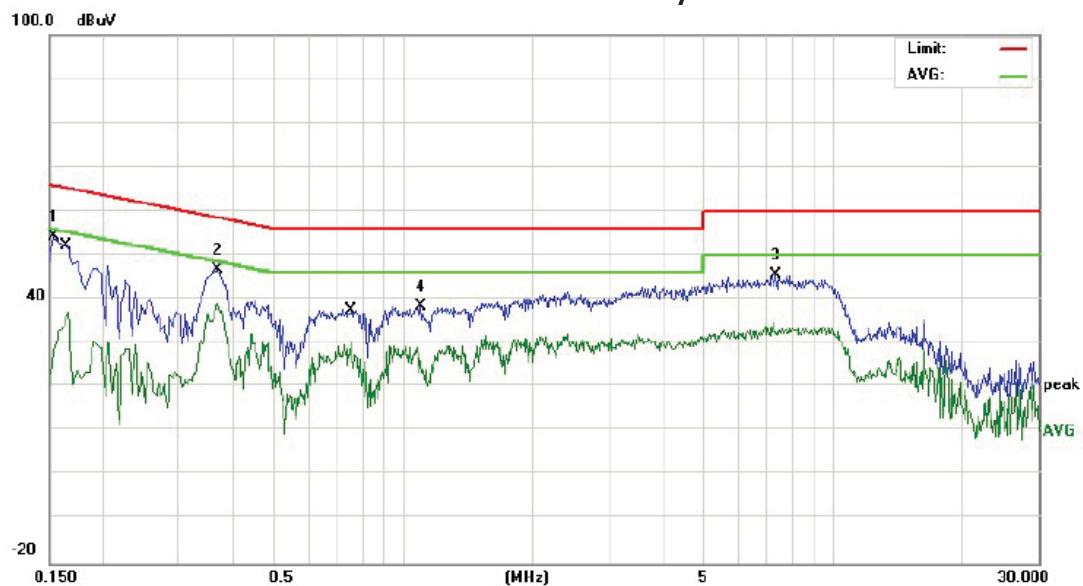

*Line L Conducted Emission Graph*

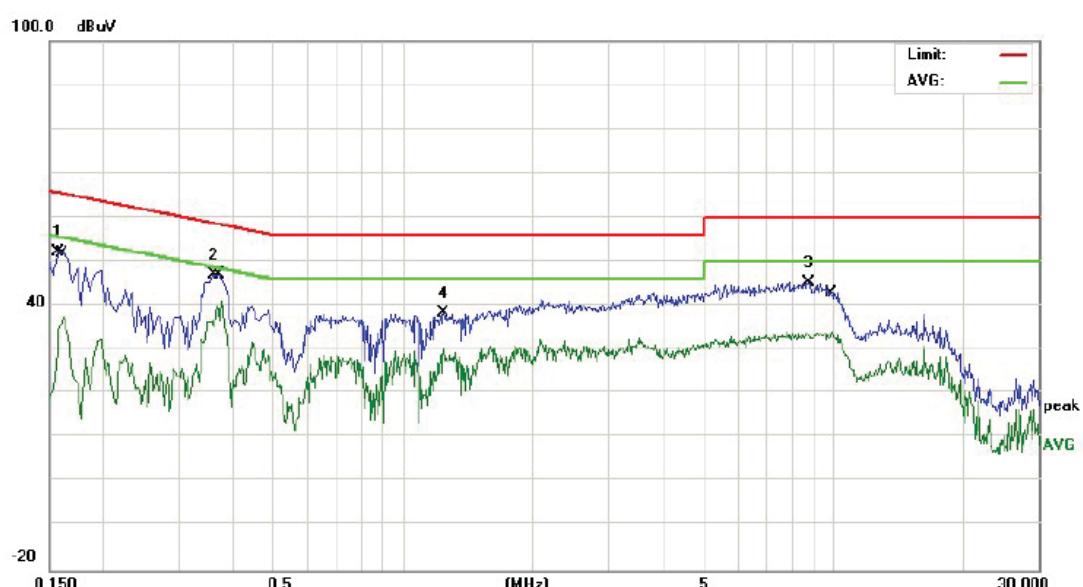

*Line N Conducted Emission Graph*

**Test Data:**

Lines	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Over Limit QP (dB)	Frequency (MHz)	Corrected AVE Level (dBuV)	Limits AVE (dBuV)	Over Limit AVE (dB)
L	0.154	54.26	65.78	-11.52	0.166	37.11	55.15	-18.04
L	0.370	46.65	58.50	-11.85	0.370	38.88	48.50	-9.62
L	7.334	45.63	60.00	-14.37	0.754	30.26	46.00	-15.74
L	/	/	/	/	/	/	/	/
L	/	/	/	/	/	/	/	/
N	0.158	52.14	65.56	-13.42	0.162	37.49	55.36	-17.87
N	0.362	47.10	58.68	-11.58	0.378	41.05	48.32	-7.27
N	8.738	45.29	60.00	-14.71	1.242	30.34	46.00	-15.66
N	/	/	/	/	/	/	/	/
N	/	/	/	/	/	/	/	/

**Note:**

1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.

**Test Equipment List:**

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ECSI	R&S	100920	2017.01.05	2018.01.04
Line impedance stabilization network	ENV216	R&S	101112	2017.01.05	2018.01.04

**Note:** All testing were performed using internationally recognized standards. All test instruments were calibrated.

TESTED BY:




ENGINEER

REVIEWED BY:



SENIOR ENGINEER

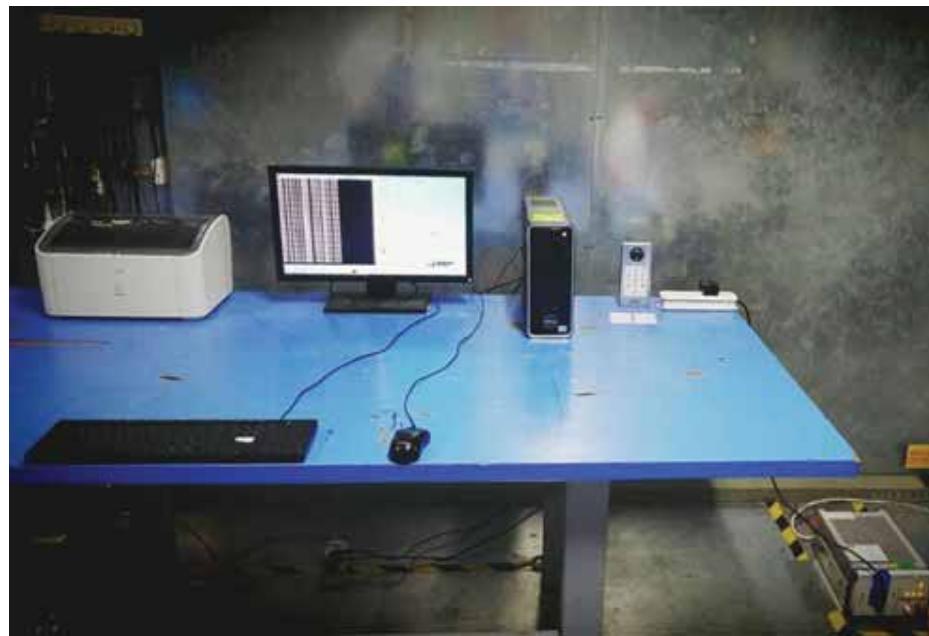

*Conducted Emission Test Set-up -Front view*



*Conducted Emission Test Set-up -Back view*

## **ATTACHMENT 2 – RADIATED EMISSION MEASUREMENT**

<b>CLIENT:</b>	Grandstream Networks, Inc.	<b>TEST STANDERD:</b>	Section 15.109
<b>MODEL NUMBERS:</b>	GDS3710	<b>PRODUCT:</b>	Hemispheric HD IP Video Door Phone
<b>EUT MODEL:</b>	GDS3710	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	47%RH
<b>ATM PRESSURE:</b>	103.0kPa	<b>GROUNDING:</b>	None
<b>TESTED BY:</b>	Alex Yu	<b>DATE OF TEST:</b>	September 14 <sup>th</sup> , 2016&Feb 6 <sup>th</sup> ,2017
<b>TEST REFERENCE:</b>	ANSI C63.4: 2014		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2014 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. signal discrimination was then performed and the significant peaks marked. these peaks were then average and peak in the frequency range of 9KHz to 30MHz at an anechoic chamber, quasi-peaked in the frequency range of 30 MHz to 1GHz and average and peak in the frequency range of 1GHz to 5GHz at an anechoic chamber.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
<b>TEST MODE:</b>	Mode 1,Mode 2		
<b>TESTED RANGE:</b>	9KHz to 30MHz and 30 to 5000MHz (Please see page 2 of 16)		
<b>TEST VOLTAGE:</b>	120VAC/60Hz and Powered by PoE		
<b>RESULTS:</b>	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). Test personnel.		
<b>M. UNCERTAINTY:</b>	<p>The maximum measurement uncertainty is evaluated as : 30~1000MHz: 4.7dB; 1~2GHz: 4.5dB.</p> <p>This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.</p>		

Continue on to next page...

### EMI Receiver Set-up:

Frequency [MHz]	RBW	VBW	Detector
0.009-0.015	200Hz	1KHz	Quasi-peak
0.015-30	9KHz	30KHz	Quasi-peak
30-1000	120KHz	300KHz	Quasi-peak
Above 1GHz	1MHz	3MHz	Peak
	1MHz	10Hz	PK detector is for AV

*Note 1: In the emission table above, the tighter limit applies at the band edges.*

*Note 2: (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz.*

*Radiated emission limits in these three bands are based on measurements employing an average detector.*

### Radiated Emission Limit:


FCC Part 15 Subpart B&C Paragraph 15.109&15.209			
Frequency [MHz]	Field strength [uV/m]	Limit@3m (dB $\mu$ V/m)	Distance [Meters]
0.009-0.490	2400/F(KHz)	128.5~93.8	300
0.490-1.705	24000/F(KHz)	73.8~63.0	30
1.705-30	30	69.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

*Note 1: The lower limit shall apply at the transition frequency.*


*Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.*

*Note 3: E field strength (dB $\mu$ V/m) = 20 log E field strength (uV/m)*


*Frequency measured at 9KHz to 30MHz:*

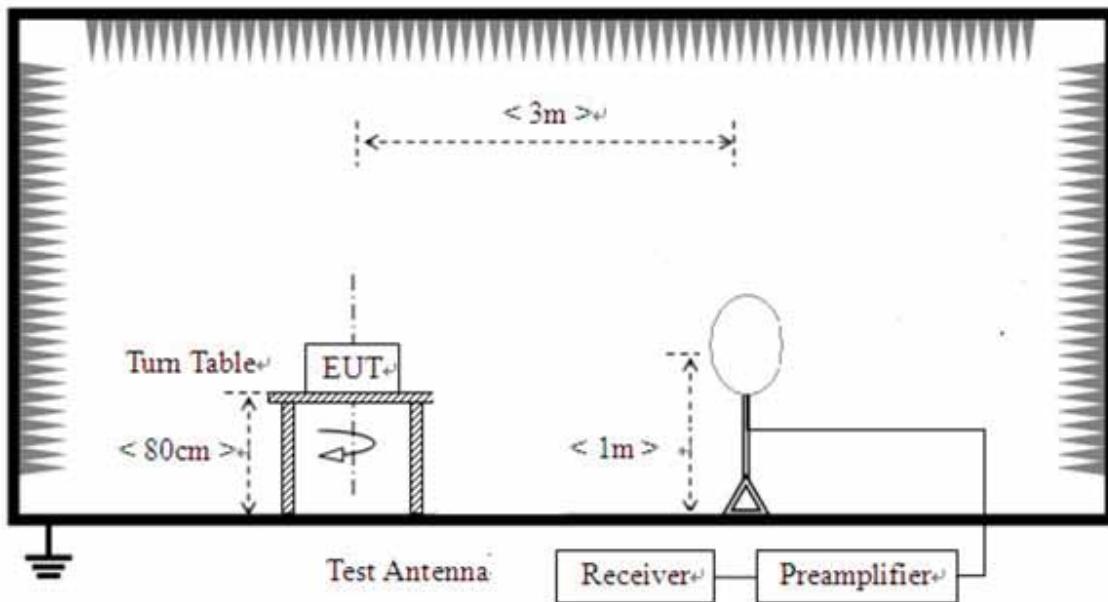

*Frequency measured at 30MHz to 1000MHz:*

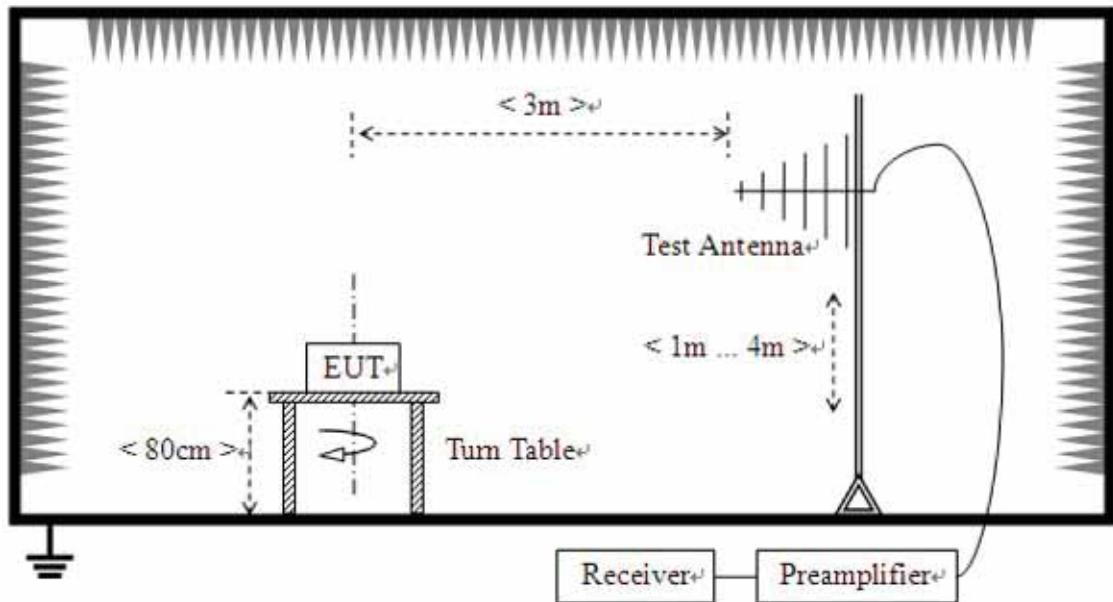

Continue on to next page...

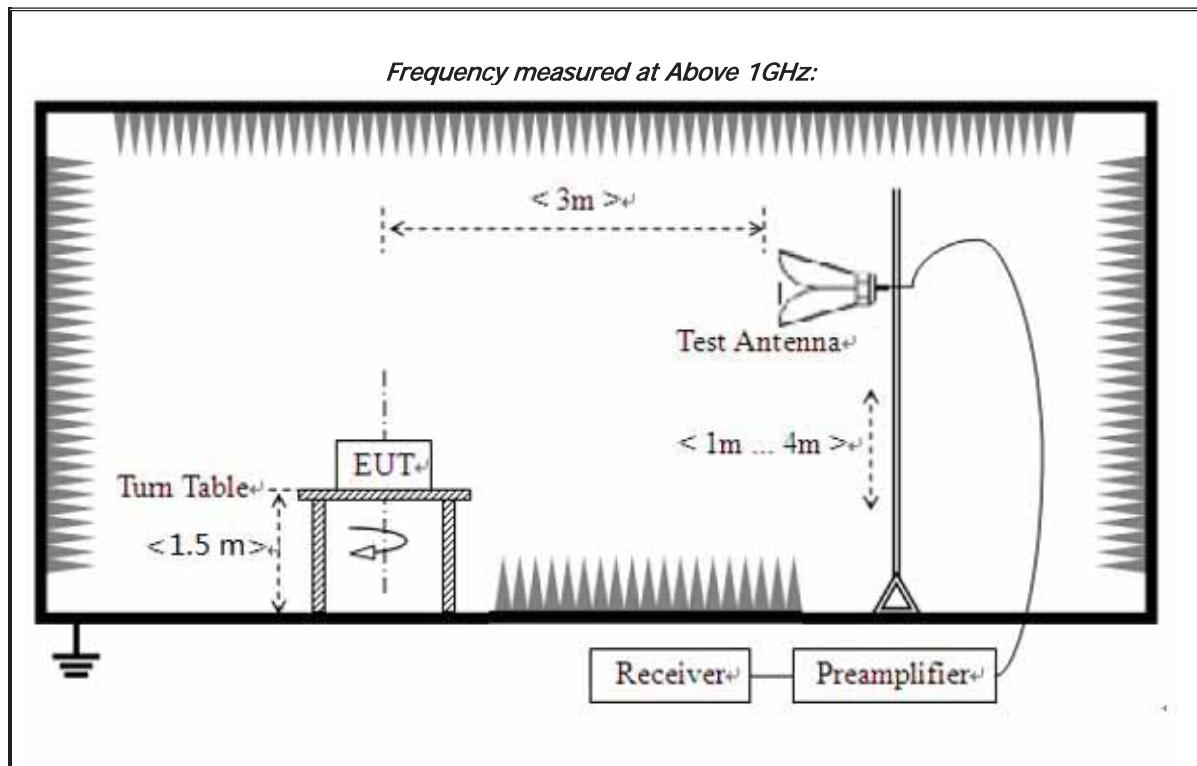

**Radiated Emission Test Result For 9KHz to 30MHz:**



The 120VAC/60Hz input mode was selected for final testing for 9KHz to 30MHz:

Test No. #:	Frequency (MHz)	Factor (dB)	Reading Level QP/AV (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	/	/	/	/	/	/
2	/	/	/	/	/	/
3	/	/	/	/	/	/
4	/	/	/	/	/	/
5	/	/	/	/	/	/
6	/	/	/	/	/	/

*Note:*

1. The field strength is calculated by adding the antenna factor, cable factor. The basic equation with a sample calculation is as follows:  
Emission Level = Reading Level + Factor.
2. The limits shown are based on quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. the bandwidth of Test Receiver was set at 200Hz in frequency range of 9KHz to 150KHz, 9kHz in the frequency range of 150KHz to 30MHz.
3. All emission levels in the frequency range of 9KHz to 30MHz are 20dB below the official limits that are not reported.

30-1000MHz:  
AC 120V/60Hz :

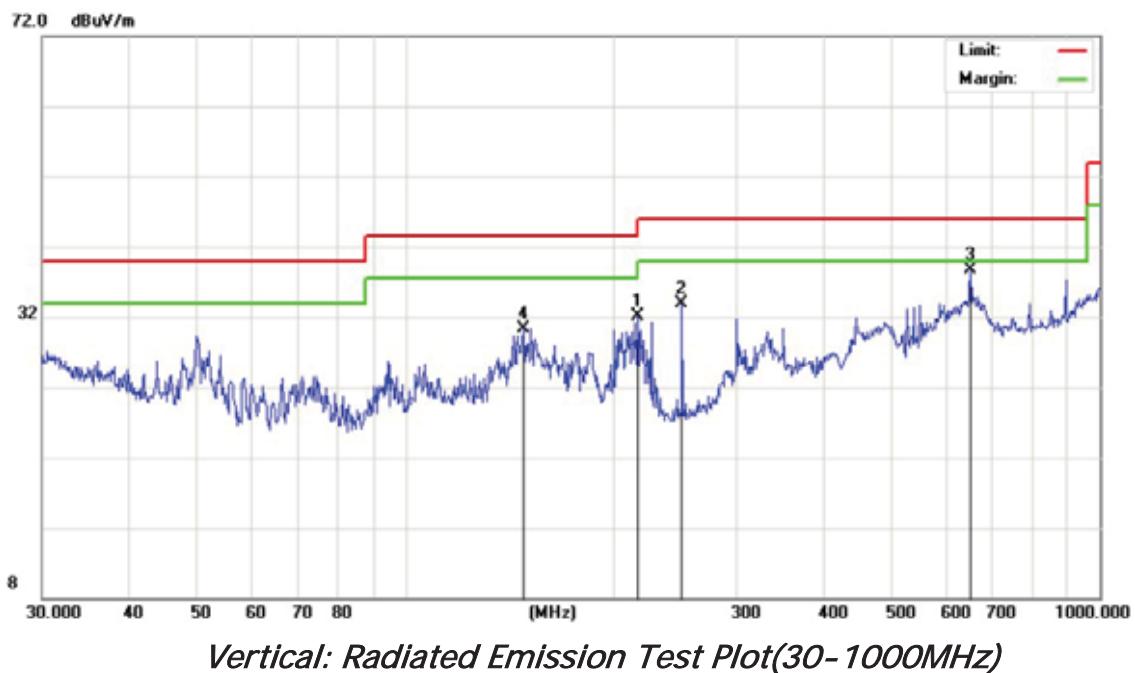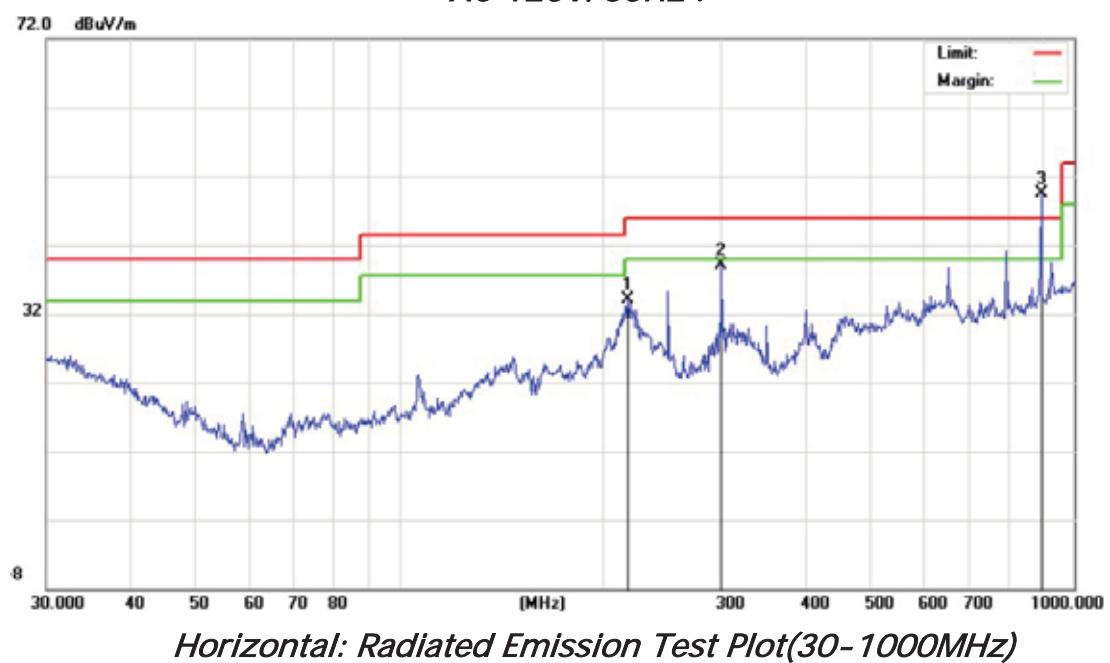

*PoE Mode:*





*Horizontal: Radiated Emission Test Plot(30-1000MHz)*



*Vertical: Radiated Emission Test Plot(30-1000MHz)*

1 to 5GHz:

*The PoE mode was selected for final testing for above 1GHz:*

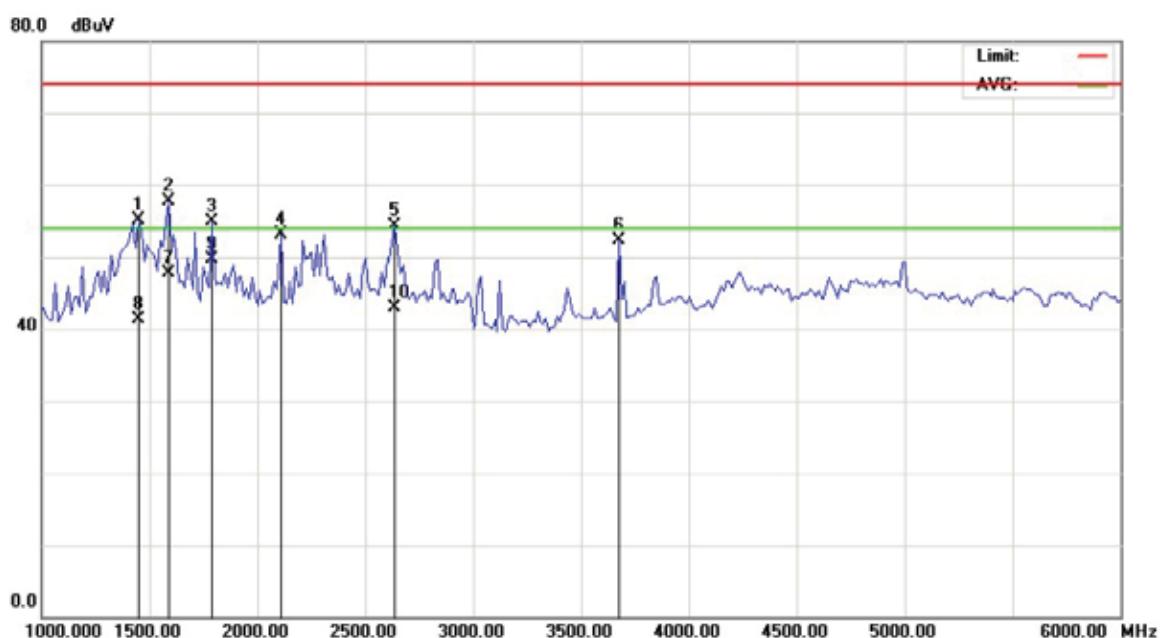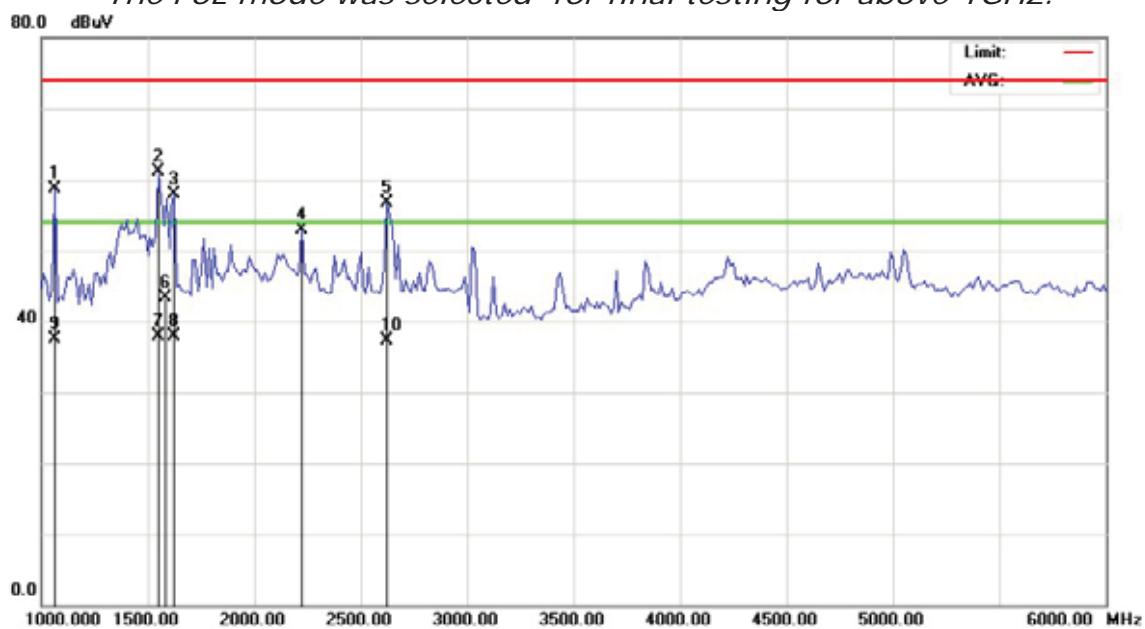

NOTE:POE is the worse case

FCC Test Report #: SHE-1608-11568-FCC

Prepared for Grandstream Networks, Inc.

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen)

Page 29 of 35

**Radiated Emission Test Data(30-1000MHz):**  
**AC120V/60Hz Input:**

Frequency (MHz)	Polarization (H/V)	Factor (dB)	Reading Level QP (dBuV/m)	Emission Level QP (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
218.3085	H	12.18	21.94	34.12	46	-11.88
893.8567	H	25.43	18.7	44.13	46	-1.87
/	/	/	/	/	/	/
/	/	/	/	/	/	/
/	/	/	/	/	/	/
/	/	/	/	/	/	/
48.451	V	10.50	27.80	38.30	40	-1.70
58.613	V	6.94	30.50	37.44	40	-2.56
38.888	V	15.85	22.14	37.99	40	-2.01
893.8567	V	25.43	18.7	35.13	46	-10.87
/	/	/	/	/	/	/
/	/	/	/	/	/	/

*Note:*

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

**PoE Mode:**

Frequency (MHz)	Polarization (H/V)	Factor (dB)	Reading Level QP (dBuV/m)	Emission Level QP (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)
218.3085	H	12.18	21.88	34.06	46	-11.94
300.3672	H	13.84	25.17	39.01	46	-6.99
893.8567	H	25.13	19.70	44.83	46	-1.17
/	/	/	/	/	/	/
/	/	/	/	/	/	/
/	/	/	/	/	/	/
147.9214	V	12.65	17.58	30.23	43.5	-13.27
250.3012	V	12.12	21.82	33.94	46	-12.06
651.9417	V	21.63	17.06	38.69	46	-7.31
893.8567	V	25.43	16.7	33.13	46	-12.87
/	/	/	/	/	/	/
/	/	/	/	/	/	/

*Note:*

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

**PoE Mode&Above 1GHz:**

Frequency (MHz)	Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Antenna Polarization (H/V)
<b>Peak Measurement</b>						
1555.000	-13.29	74.42	61.13	74	-12.87	H
2625.000	-9.71	66.41	56.70	74	-17.30	H
/	/	/	/	/	/	/
/	/	/	/	/	/	/
1450.000	-13.10	68.12	55.02	74	-19.98	V
1587.500	-13.03	70.78	57.75	74	-16.25	V
/	/	/	/	/	/	/
/	/	/	/	/	/	/
<b>Average Measurement</b>						
1550.000	-13.29	51.29	38.00	54	-16.00	H
1583.300	-13.07	56.38	43.31	54	-10.69	H
/	/	/	/	/	/	/
/	/	/	/	/	/	/
1450.000	-13.10	54.40	41.30	54	-12.70	V
1587.500	-13.03	60.69	47.66	54	-6.34	V
1787.500	-12.10	61.90	49.80	54	-4.20	V
/	/	/	/	/	/	/

*Note:*

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

**Test Equipment List:**

<i>Test Equipment</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Cal. Interval</i>	<i>Serial No.</i>	<i>Cal. Due Date</i>
<i>EMI Test Receiver</i>	<i>R&amp;S</i>	<i>ESCI</i>	<i>1 year</i>	<i>100967</i>	<i>2018.01.04</i>
<i>Loop Antenna</i>	<i>Schwarzbeck</i>	<i>FMZB1519</i>	<i>1 year</i>	<i>1519-037</i>	<i>2018.01.04</i>
<i>Bilog Antenna</i>	<i>Schwarzbeck</i>	<i>CBL6141A</i>	<i>1 year</i>	<i>4180</i>	<i>2018.01.04</i>
<i>Horn Antenna</i>	<i>Schwarzbeck</i>	<i>BBHA 9120D</i>	<i>1 year</i>	<i>647</i>	<i>2018.01.04</i>
<i>Low Noise Pre-Amplifier</i>	<i>HP</i>	<i>8447D</i>	<i>1 year</i>	<i>1937A03050</i>	<i>2018.01.04</i>

TESTED BY:




ENGINEER

REVIEWED BY:




SENIOR ENGINEER

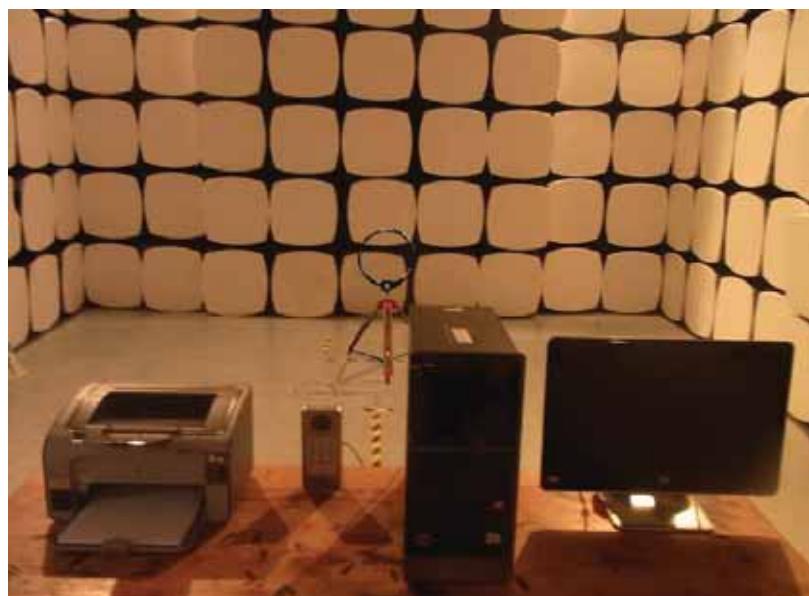

*Radiated Emission Test Set-up(9KHz-30MHz)*



*Radiated Emission Test Set-up(30- 1000MHz)*

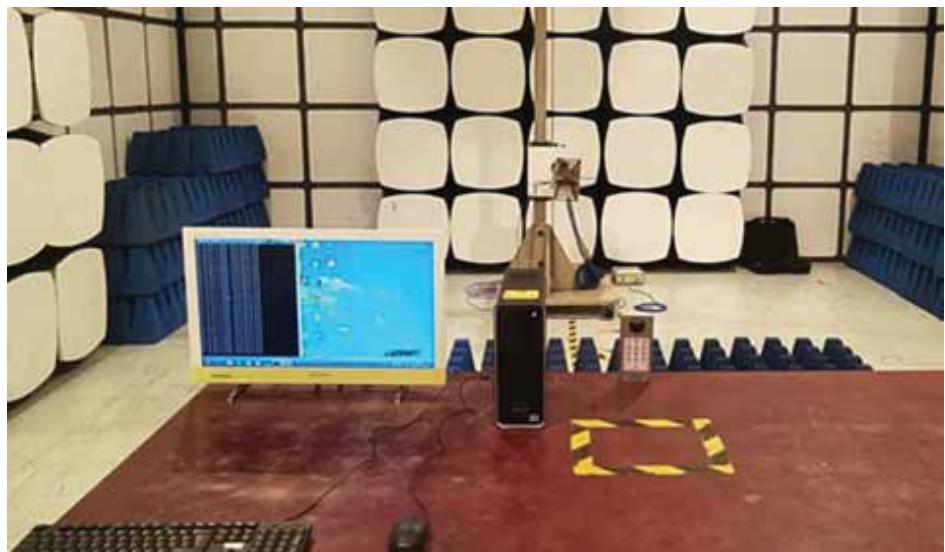

*Radiated Emission Test Set-up(1-5GHz)*



*Radiated Emission Test Set-up-Rear View*

※※※ *End Of Report* ※※※