

TEST REPORT



Certificate #4312.01

Product Name: IP Phone
Trade Mark: GRANDSTREAM
Model No. / HVIN: GRP2650
Add. Model No. / HVIN: N/A
Report Number: 220218001RFC-3
Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-247 Issue 2
RSS-Gen Issue 5
FCC ID: YZZGRP2650
IC: 11964A-GRP2650
Test Result: PASS
Date of Issue: June 28, 2022

Prepared for:

Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888**FAX: +86-755-2823 0886**

Prepared by:

Calvin Chen

Senior Project Engineer

Reviewed by:

Eric Yu

Project Supervisor

Approved by:

Kevin Liang

Assistant Manager

Date:

June 28, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Version

Version No.	Date	Description
V1.0	June 28, 2022	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	6
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	14
4.6 SYSTEM TEST CONFIGURATION	14
4.7 DUTY CYCLE	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	18
5.1 REFERENCE DOCUMENTS FOR TESTING	18
5.2 ANTENNA REQUIREMENT	18
5.3 CONDUCTED PEAK OUTPUT POWER	19
5.4 6 dB BANDWIDTH & OCCUPIED BANDWIDTH	20
5.5 POWER SPECTRAL DENSITY	25
5.6 CONDUCTED OUT OF BAND EMISSION	28
5.7 RADIATED SPURIOUS EMISSIONS	37
5.8 BAND EDGE MEASUREMENTS (RADIATED)	44
5.9 CONDUCTED EMISSION	53
APPENDIX 1 PHOTOS OF TEST SETUP	56
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	56

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	IP Phone		
Model No. / HVIN:	GRP2650		
Add. Model No. / HVIN:	N/A		
Trade Mark:	GRANDSTREAM		
DUT Stage:	Production Unit		
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth 5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
Software Version:	1.0.7.9 (Provided by the customer)		
Hardware Version:	V1.1 (Provided by the customer)		
Sample Received Date:	February 18, 2022		
Sample Tested Date:	March 8, 2022 to May 27, 2022		
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.			

1.2.2 Description of Accessories

Adapter (1)	
Model No.:	F12US1200100A
Input:	100-240 V~50/60 Hz 0.5A max
Output:	12 V $\equiv$ 1.0 A
DC Cable:	2.5 Meter, Unshielded without ferrite

Adapter (2)	
Model No.:	GQ12-120100-AU
Input:	100-240 V~50/60 Hz 0.4A Max
Output:	12 V $\equiv$ 1.0 A
DC Cable:	2.5 Meter, Unshielded without ferrite

Adapter (3)	
Model No.:	DSA-12PFU-12 FUS 120100
Input:	100-240 V~50/60 Hz 0.5A
Output:	12 V $\equiv$ 1.0 A 12.0W
DC Cable:	2.5 Meter, Unshielded without ferrite

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Cable (1)	
Connector:	Ethernet Cable
Cable Type:	Unshielded without ferrite
Length:	1.5 Meter

Cable (2)	
Connector:	Phone Cord
Cable Type:	Unshielded without ferrite
Length:	3.5 Meter

Others	
1x Handset, 1x Phone Stand	

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2412 MHz to 2462 MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7
Number of Channels:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11 IEEE 802.11n-HT40: 7
Channel Separation:	5 MHz
Antenna Type: (Provided by the customer)	Dipole Antenna
Antenna Gain: (Provided by the customer)	4.5 dBi
Maximum Peak Power:	IEEE 802.11b: 20.27dBm IEEE 802.11g: 18.47 dBm IEEE 802.11n-HT20: 17.59 dBm IEEE 802.11n-HT40: 16.70 dBm
Maximum e.i.r.p	IEEE 802.11b: 24.77 dBm IEEE 802.11g: 22.97 dBm IEEE 802.11n-HT20: 22.09 dBm IEEE 802.11n-HT40: 21.20 dBm
Normal Test Voltage:	120V~60Hz

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust
Headset	YEY	VE120-MV	N/A	UnionTrust
IP Phone	GRANDSTREAM	GRP2614	N/A	Applicant

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Ethernet Cable	RJ45	1.5 Unshielded without ferrite	UnionTrust
2	Ethernet Cable	RJ45	2.0 Unshielded without ferrite	UnionTrust
3	Ethernet Cable	RJ45	5.0 Unshielded without ferrite	UnionTrust
4	Antenna Cable	SMA	0.5 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 x 10 ⁻⁸
12	Transmission Time	± 0.19 %

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b) (4) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3) RSS-247 Issue 2, Section 5.4(d)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2) RSS-247 Issue 2, Section 5.2(a)	ANSI C63.10-2013 Clause 11.8.1	PASS
Occupied Bandwidth	RSS-Gen Issue 5, Section 6.7	RSS-Gen Issue 5, Section 6.7	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 2, Section 5.2(b)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Clause 11.13	PASS
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
☒	Receiver	R&S	ESIB26	100114	5-Nov-2021	4-Nov-2022
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	11-Nov-2021	10-Nov-2023
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	11-Nov-2021	10-Nov-2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021	10-Nov-2023
☒	Preamplifier	HP	8447F	2805A02960	5-Nov-2021	4-Nov-2022
☒	Horn Antenna	ETS-LINDGREN	3117	00164202	11-Nov-2021	10-Nov-2023
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	17-Apr-2022	16-Apr-2024
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	6-Nov-2021	5-Nov-2022
☒	Horn Antenna	ETS-LINDGREN	3116C	00200180	17-Apr-2022	16-Apr-2024
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	14-Nov-2020	13-Nov-2022
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	17-Nov-2020	16-Nov-2022
☒	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	6-Nov-2021	5-Nov-2022
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESR7	101181	5-Nov-2021	4-Nov-2022
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	5-Nov-2021	4-Nov-2022
☒	LISN	R&S	ESH2-Z5	860014/024	5-Nov-2021	4-Nov-2022
☒	Test Software	Audix	e3	Software Version: 9 20151119i		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	5-Nov-2021	4-Nov-2022

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	120V~60Hz	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	25.2	49	101.1	220218001-A03/5	David Zhang
Conducted Peak Output Power	25.3	54	103.5	220218001-A01/5	Rain Wang
6dB Bandwidth & Occupied Bandwidth					
Power Spectral Density					
Conducted Out of Band Emission	21.3	52	100.2	220218001-A02/5	Fire Huo
Radiated Spurious Emissions Band Edge Measurements (Radiated)					

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT40	2422 MHz to 2452 MHz	Channel 3	Channel 7	Channel 9
		2422 MHz	2437 MHz	2452 MHz

4.3 EUT TEST STATUS

Mode	Tx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11n-HT40	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.

Power Setting (Provided by the customer)	
Mode	Channel 1 -11
IEEE 802.11b	20
IEEE 802.11g	15
IEEE 802.11n-HT20	14
IEEE 802.11n-HT40	12

Test Software (Provided by the customer)
Test software name: QRCT 4.exe

4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

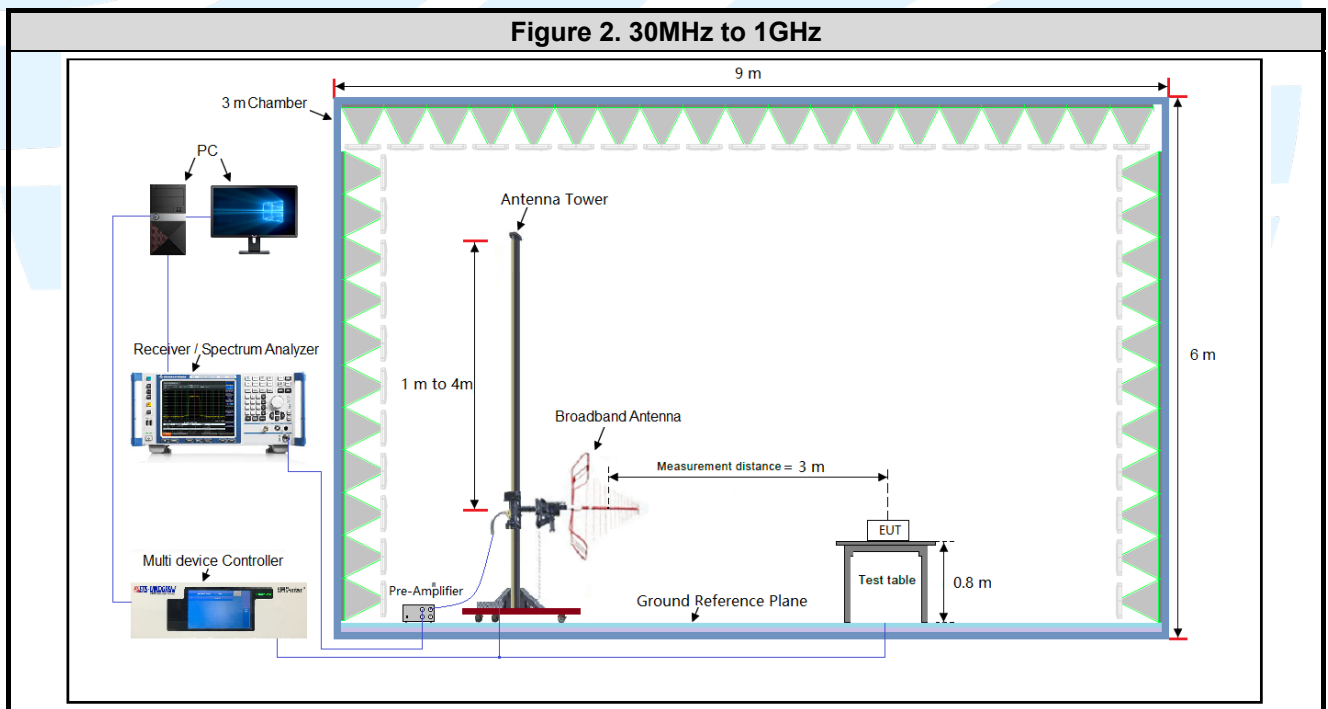
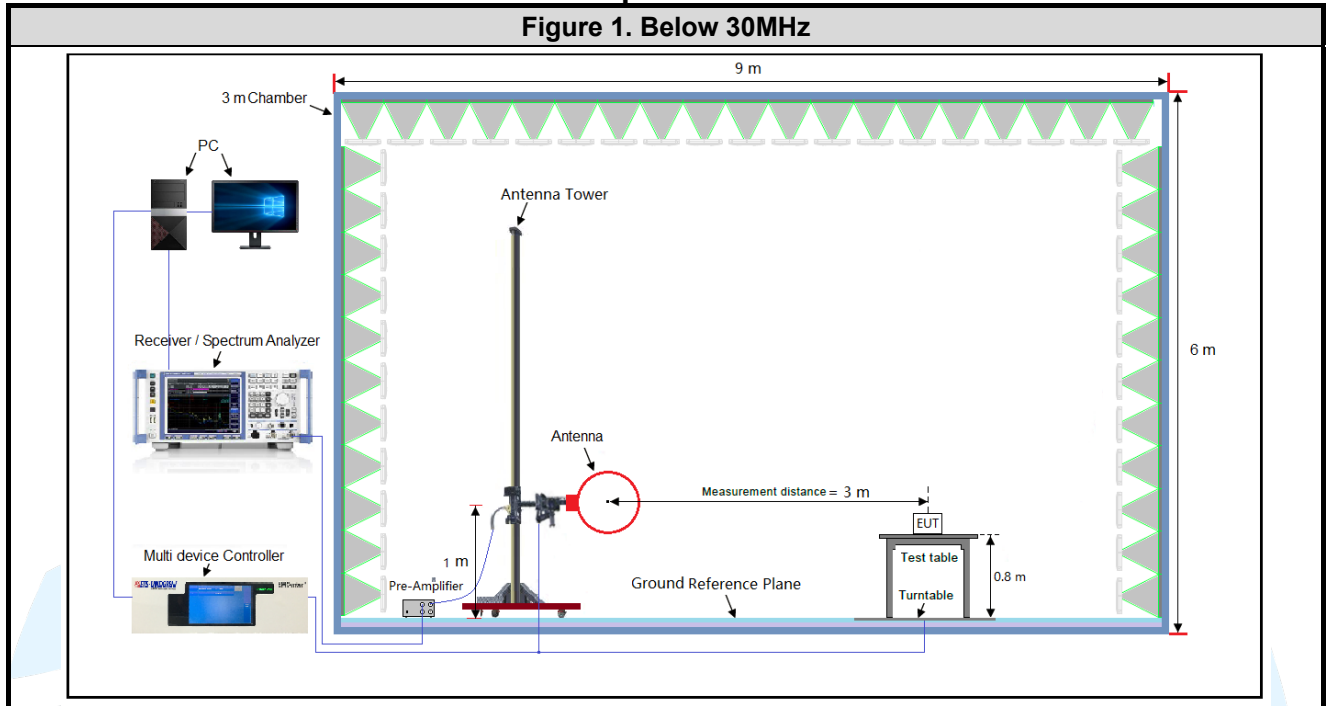


Figure 3. Above 1GHz

3 m Chamber

9 m

6 m

1 m to 4 m

Antenna Tower

Measurement distance = 3 m

Horn Antenna

Pre-Amplifier

Ground Reference Plane

Receiver / Spectrum Analyzer

PC

Multi device Controller

EUT


Test table

Turntable

1.5 m

The schematic diagram illustrates the experimental setup within a Shielding Room. On the left, a workstation includes a PC, a Receiver, and a Pulse Limiter, all connected via cables to LISN 1. A Ground Reference Plane is indicated below the workstation. The test area features a Test table supported by two vertical posts. Two EUT/AE units are placed on the table, separated by 10 cm from each other and from the edges. A PSU is also present. Below the table, AC Mains are connected to LISN 2. The distance between LISN 1 and the Test table is 80 cm, and between LISN 2 and the Test table is 80 cm. The height of the Test table above the floor is 40 cm. Insulation is specified as ≤ 0.15 m.

4.5.3 For Conducted RF test setup

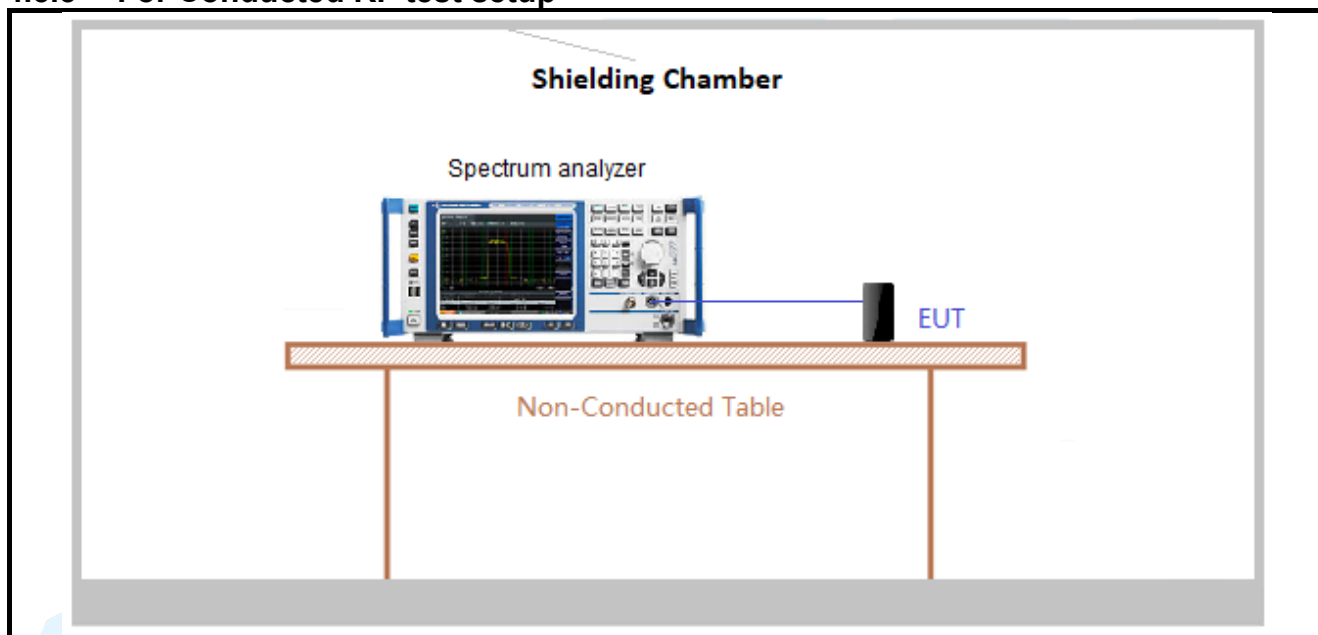

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	100.00	100.00	1.00	100.00	0.00	0.01	0.00
IEEE 802.11g	6	2.070	2.240	0.92	92.41	0.34	0.48	-0.69
IEEE 802.11n-HT20	MCS0	1.920	2.050	0.94	93.66	0.28	0.52	-0.57
IEEE 802.11n-HT40	MCS0	0.945	1.115	0.85	84.75	0.72	1.06	-1.44

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

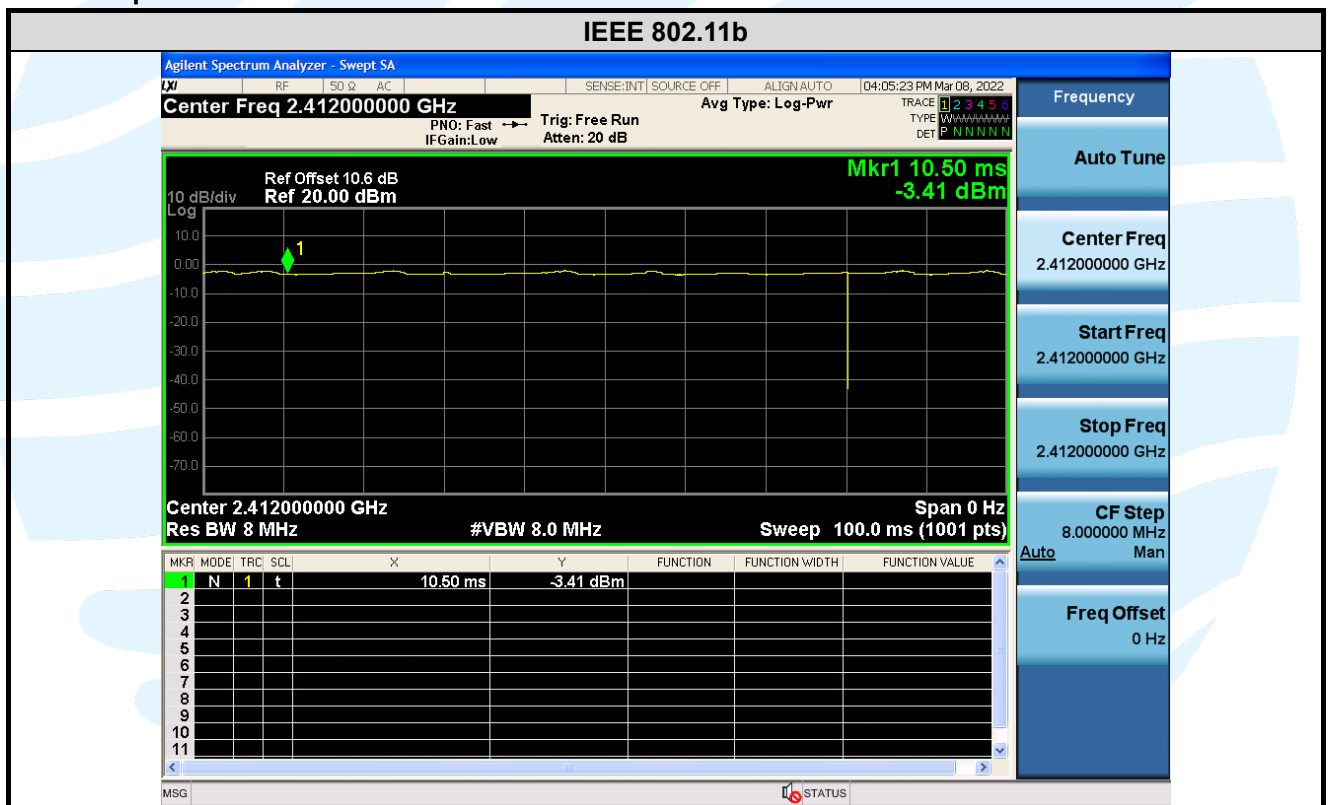

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

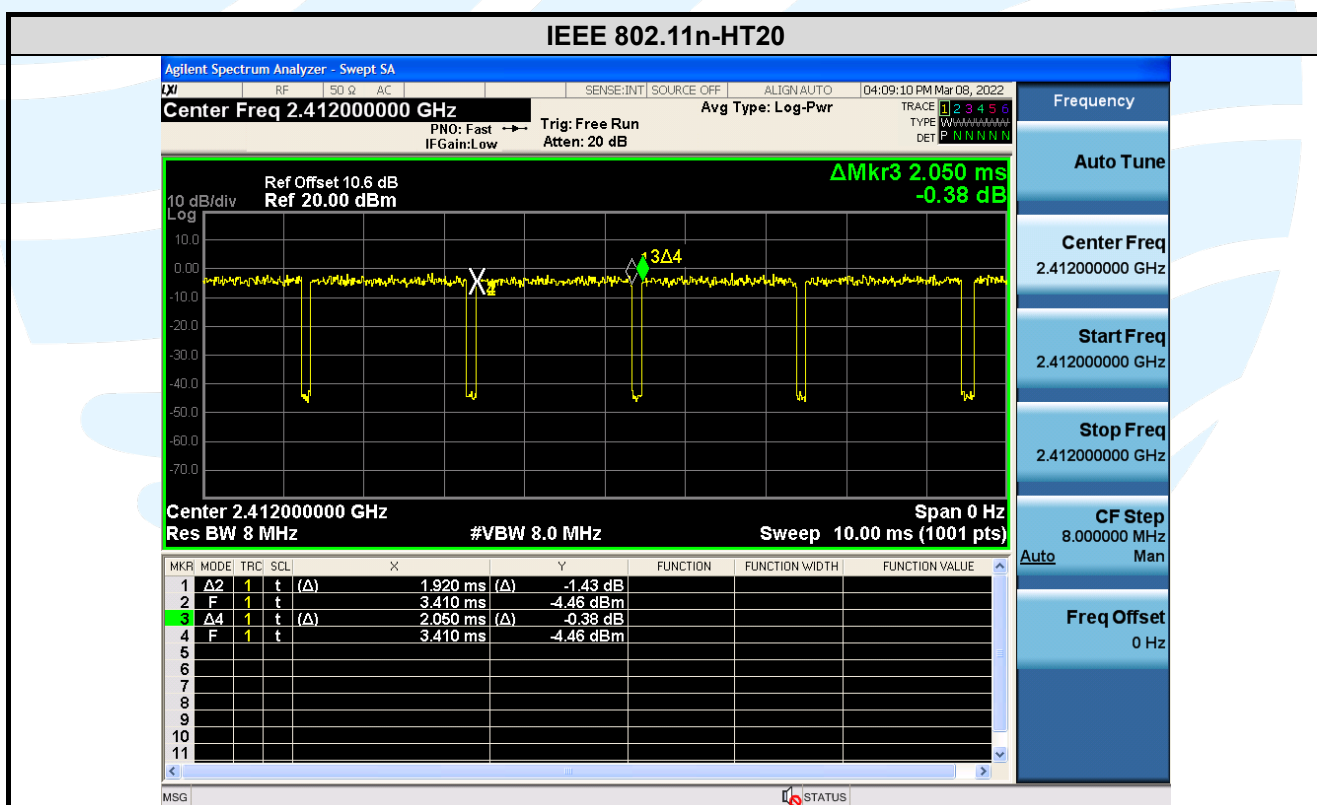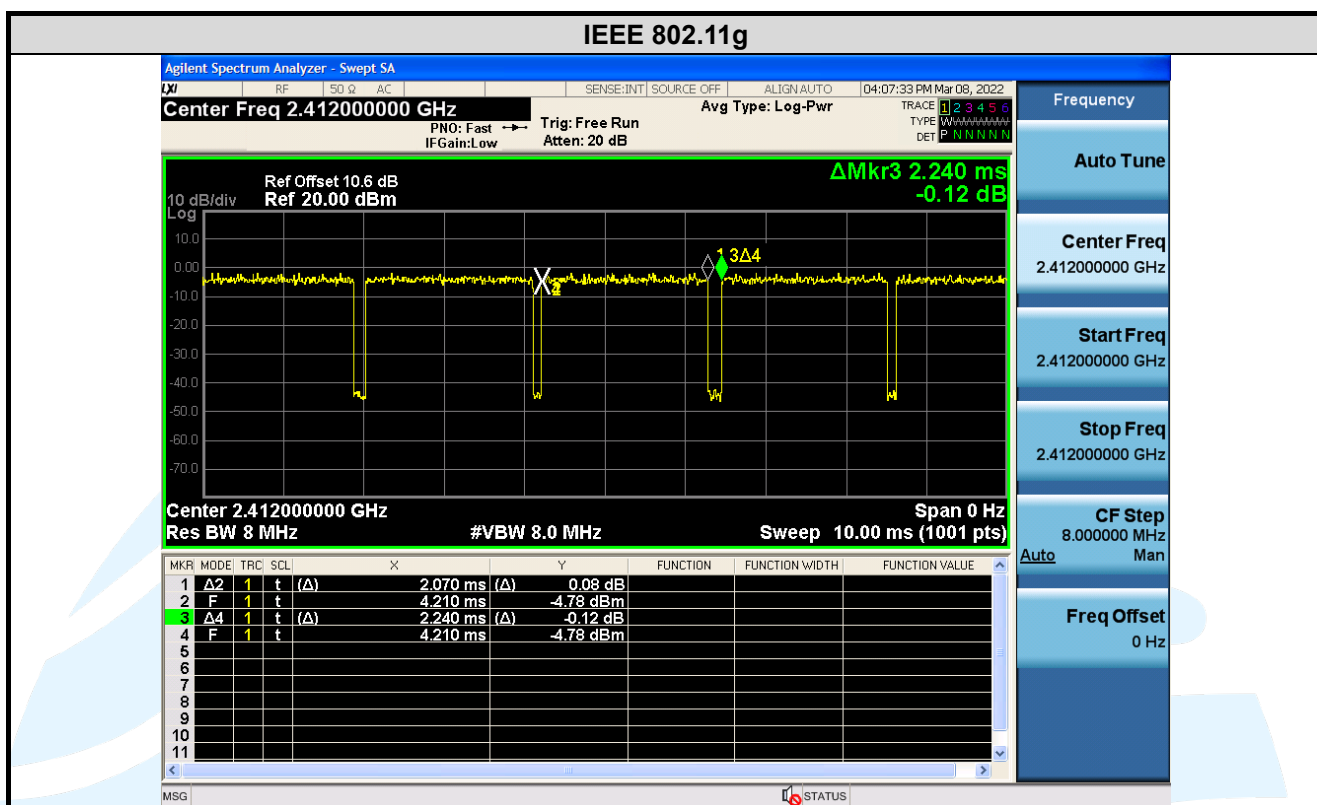

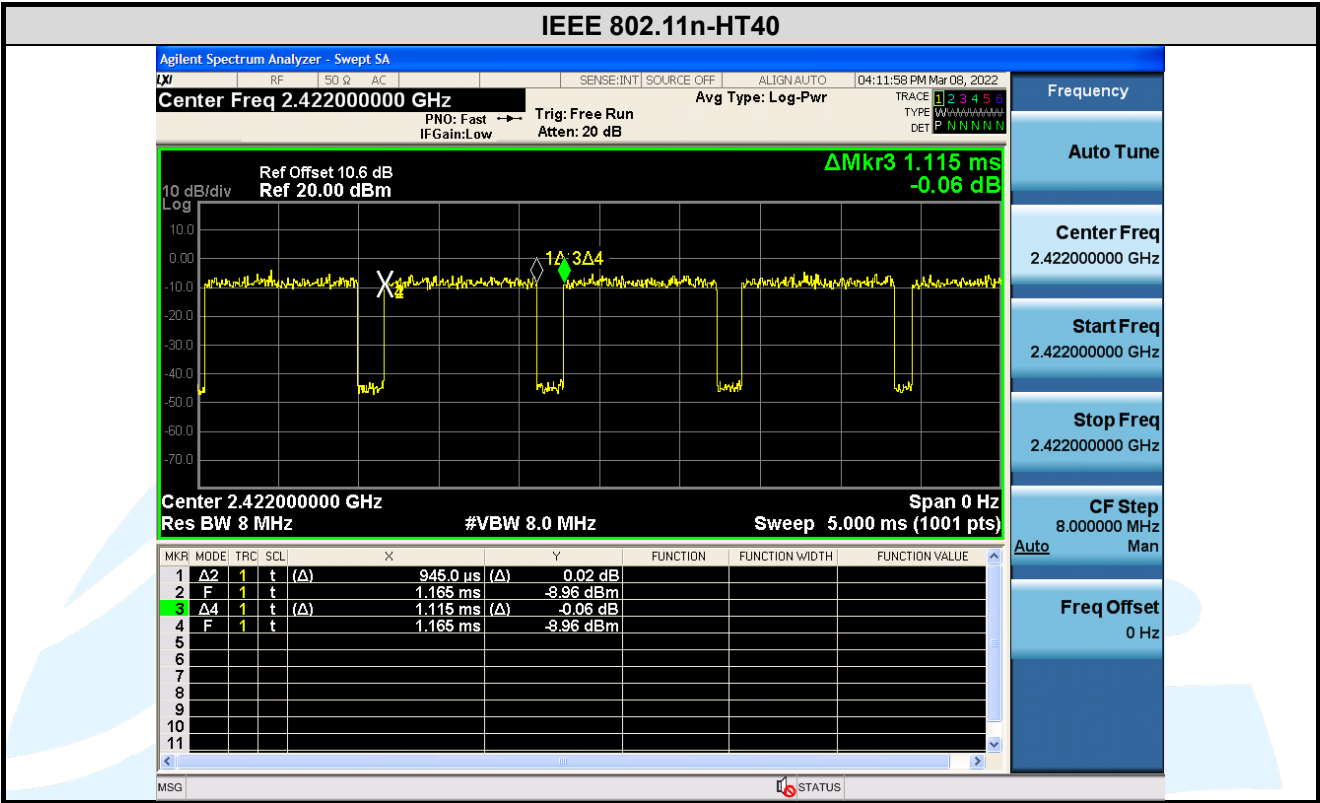

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.
EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 4.5 dBi.

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3) RSS-247 Issue 2, Section 5.4(d)
Test Method:	ANSI C63.10-2013 Clause 11.9.1.3
Limit:	For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.
Test Procedure:	1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter. 2. Measure out each test modes' peak or average output power, record the power level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Power (dBm)	Maximum e.i.r.p. (dBm)	Limit (dBm)	Verdict
IEEE 802.11b	1(2412)	20.27	24.77	30	PASS
	6(2437)	20.23	24.73	30	PASS
	11(2462)	19.84	24.34	30	PASS
IEEE 802.11g	1(2412)	18.47	22.97	30	PASS
	6(2437)	18.07	22.57	30	PASS
	11(2462)	17.78	22.28	30	PASS
IEEE 802.11n-HT20	1(2412)	17.59	22.09	30	PASS
	6(2437)	17.09	21.59	30	PASS
	11(2462)	16.93	21.43	30	PASS
IEEE 802.11n-HT40	3(2422)	16.70	21.20	30	PASS
	6(2437)	16.49	20.99	30	PASS
	9(2452)	16.26	20.76	30	PASS

- Note: 1. The antenna gain of 4.5 dBi less than 6dBi maximum permission antenna gain value based on 1 watt (30dBm) peak output power limit.
2. Note: The maximum ERP/EIRP is calculated from max output power and antenna gain, the antenna gain provided by the customer, and the customer takes all the responsibilities for the accuracy of antenna gain.

5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
RSS-247 Issue 2, Section 5.2(a)
RSS-Gen Issue 5, Section 6.7

Test Method: ANSI C63.10-2013 Clause 11.8.1
RSS-Gen Issue 5, Section 6.7

Limit: For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

6dB Bandwidth

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set RBW = 1% to 5% of the occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.


Instruments Used: Refer to section 3 for details

Test Results:

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
IEEE 802.11b	1(2412)	8.104	13.227	> 500 kHz	Pass
	6(2437)	8.104	13.227	> 500 kHz	Pass
	11(2462)	8.104	13.225	> 500 kHz	Pass
IEEE 802.11g	1(2412)	15.18	16.300	> 500 kHz	Pass
	6(2437)	15.17	16.284	> 500 kHz	Pass
	11(2462)	15.18	16.302	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	15.18	17.406	> 500 kHz	Pass
	6(2437)	15.18	17.406	> 500 kHz	Pass
	11(2462)	15.18	17.412	> 500 kHz	Pass
IEEE 802.11n-HT40	3(2422)	35.18	35.894	> 500 kHz	Pass
	6(2437)	35.17	35.900	> 500 kHz	Pass
	9(2452)	35.15	35.921	> 500 kHz	Pass

The test plots as follows:

6 dB Bandwidth

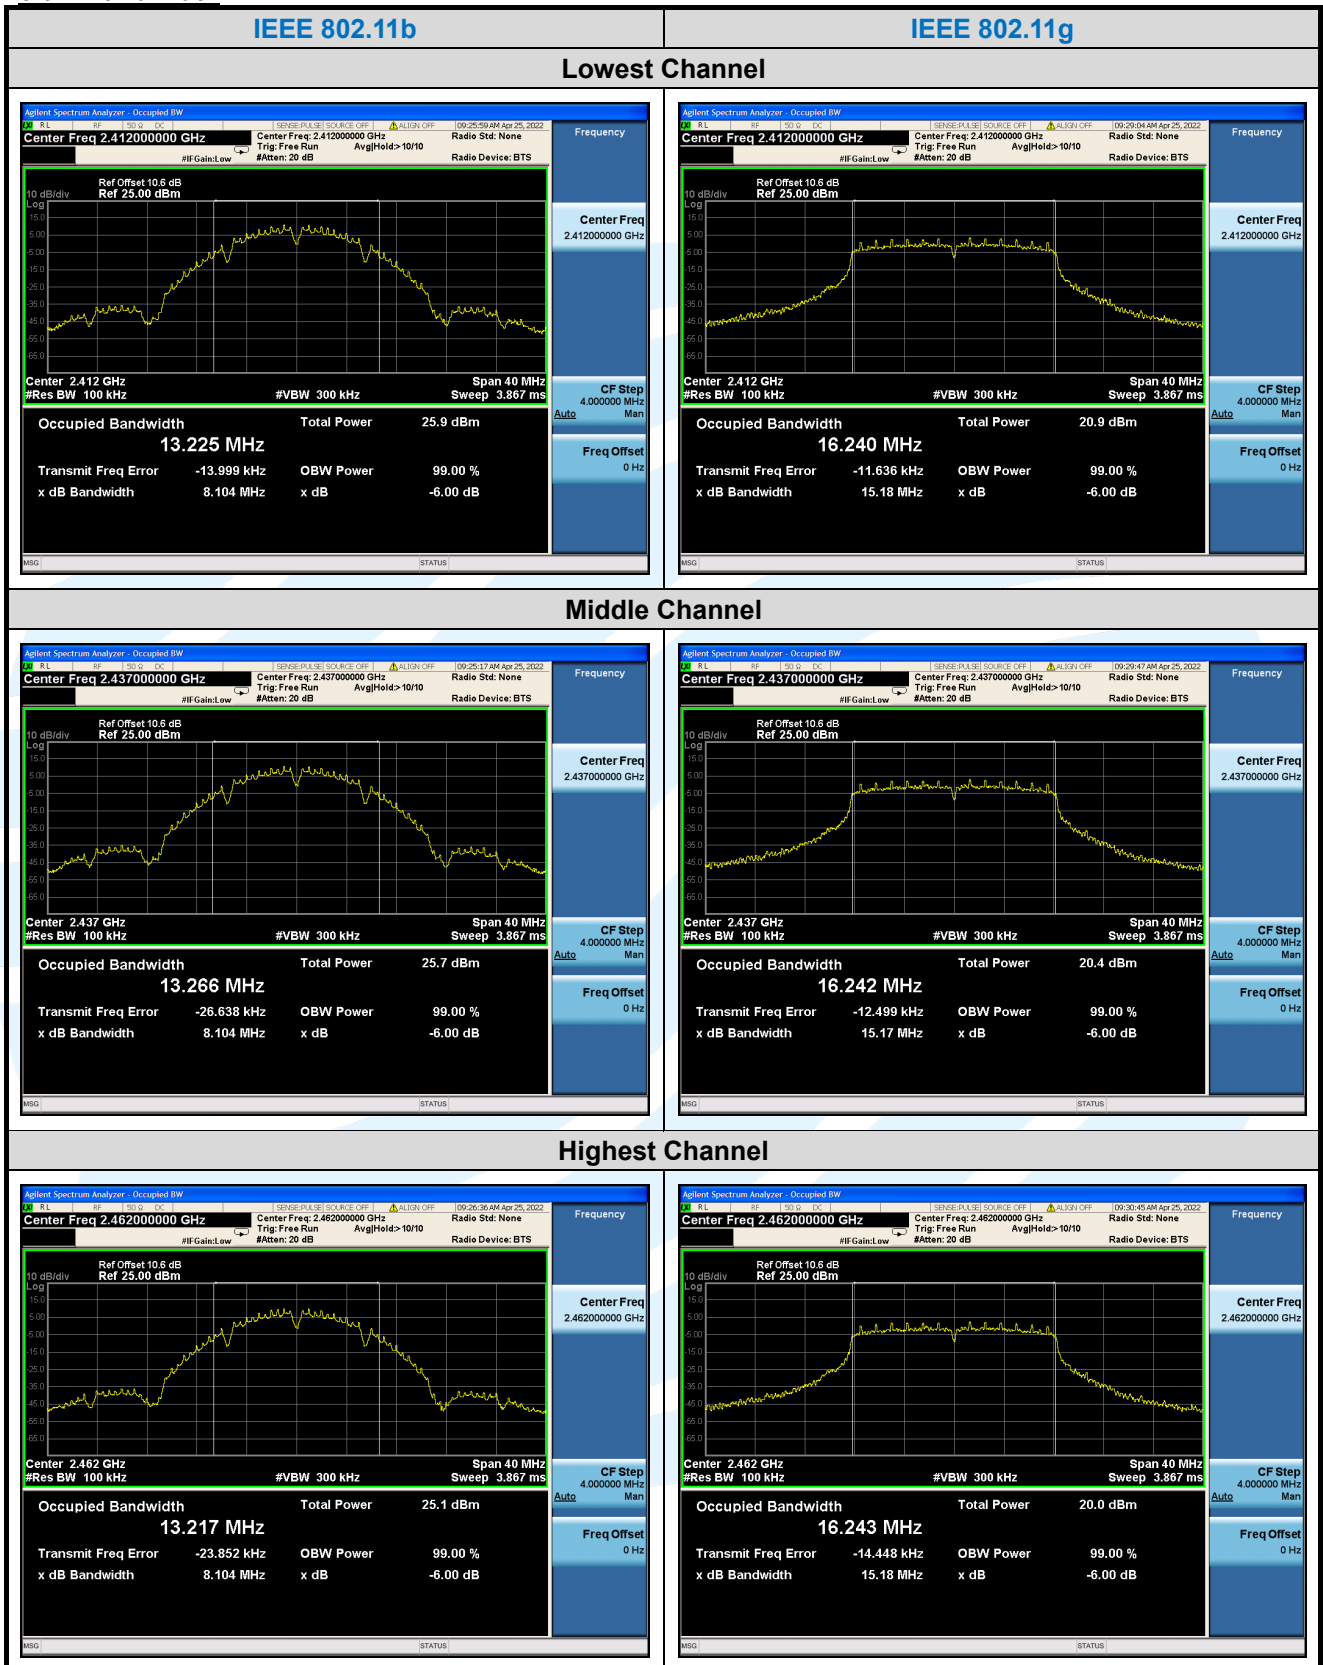

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

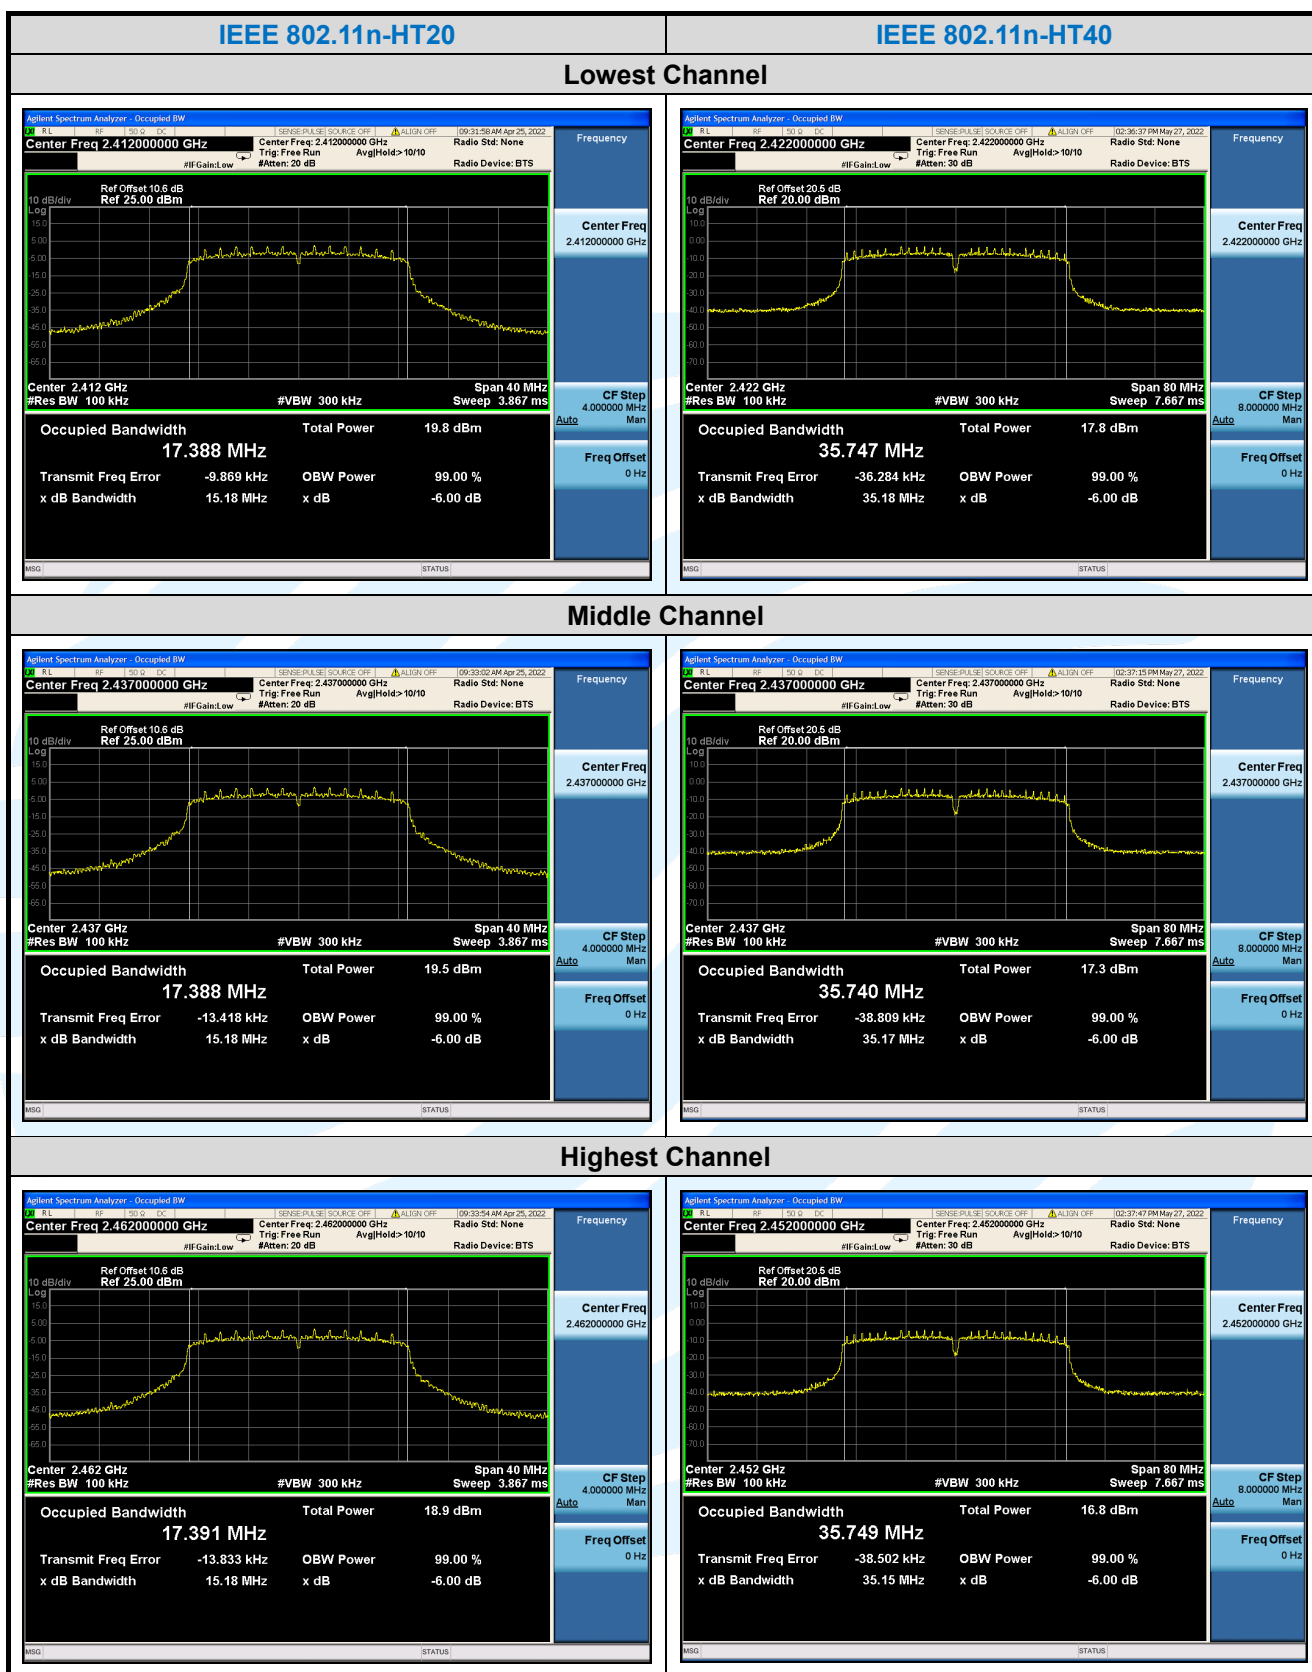

Occupied Bandwidth

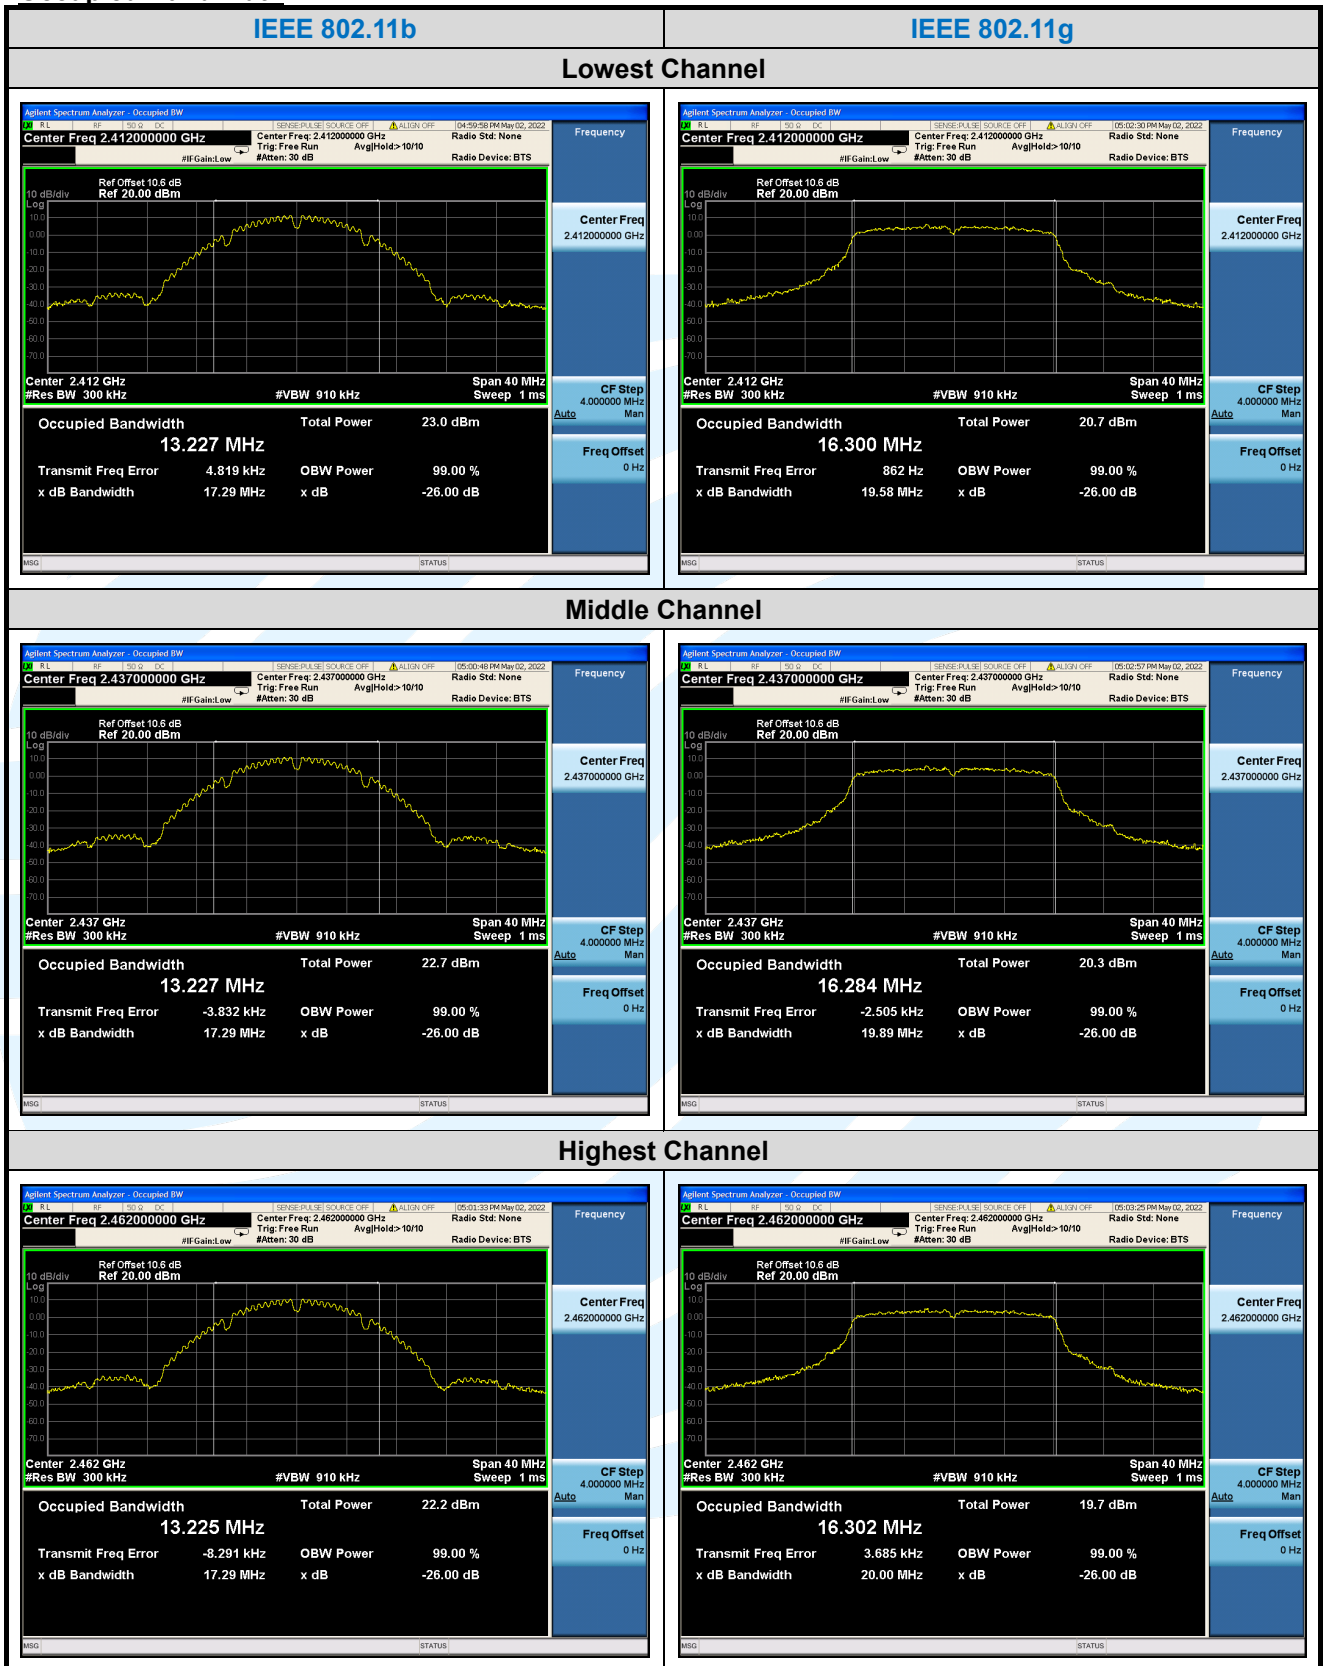

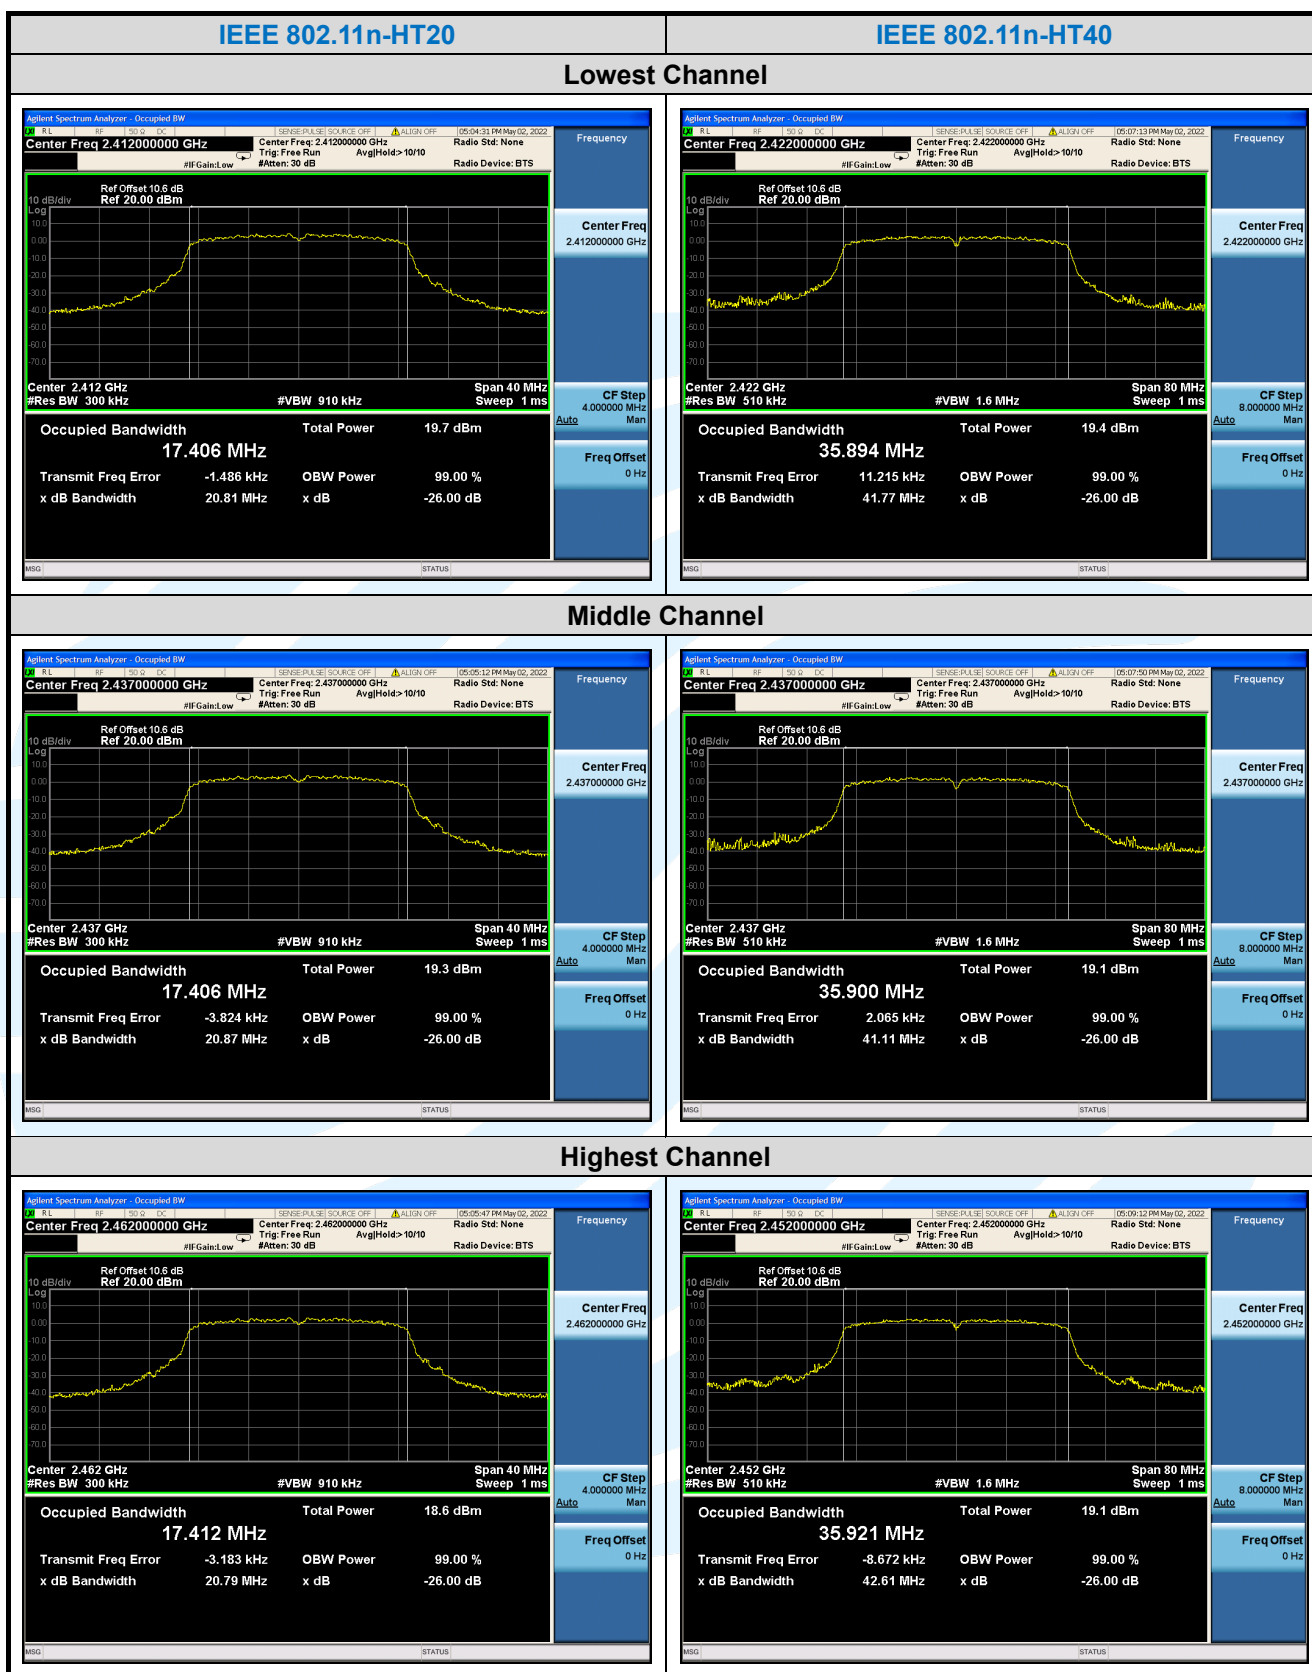


5.5 POWER SPECTRAL DENSITY

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 2, Section 5.2(b)
Test Method:	ANSI C63.10-2013 Clause 11.10.2
Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	

Mode	Channel/ Frequency (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
IEEE 802.11b	1(2412)	-5.364	8	Pass
	6(2437)	-5.138	8	Pass
	11(2462)	-7.624	8	Pass
IEEE 802.11g	1(2412)	-13.101	8	Pass
	6(2437)	-13.630	8	Pass
	11(2462)	-14.302	8	Pass
IEEE 802.11n-HT20	1(2412)	-15.152	8	Pass
	6(2437)	-15.255	8	Pass
	11(2462)	-15.462	8	Pass
IEEE 802.11n-HT40	3(2422)	-18.752	8	Pass
	6(2437)	-18.874	8	Pass
	9(2452)	-18.595	8	Pass

The test plots as follows:

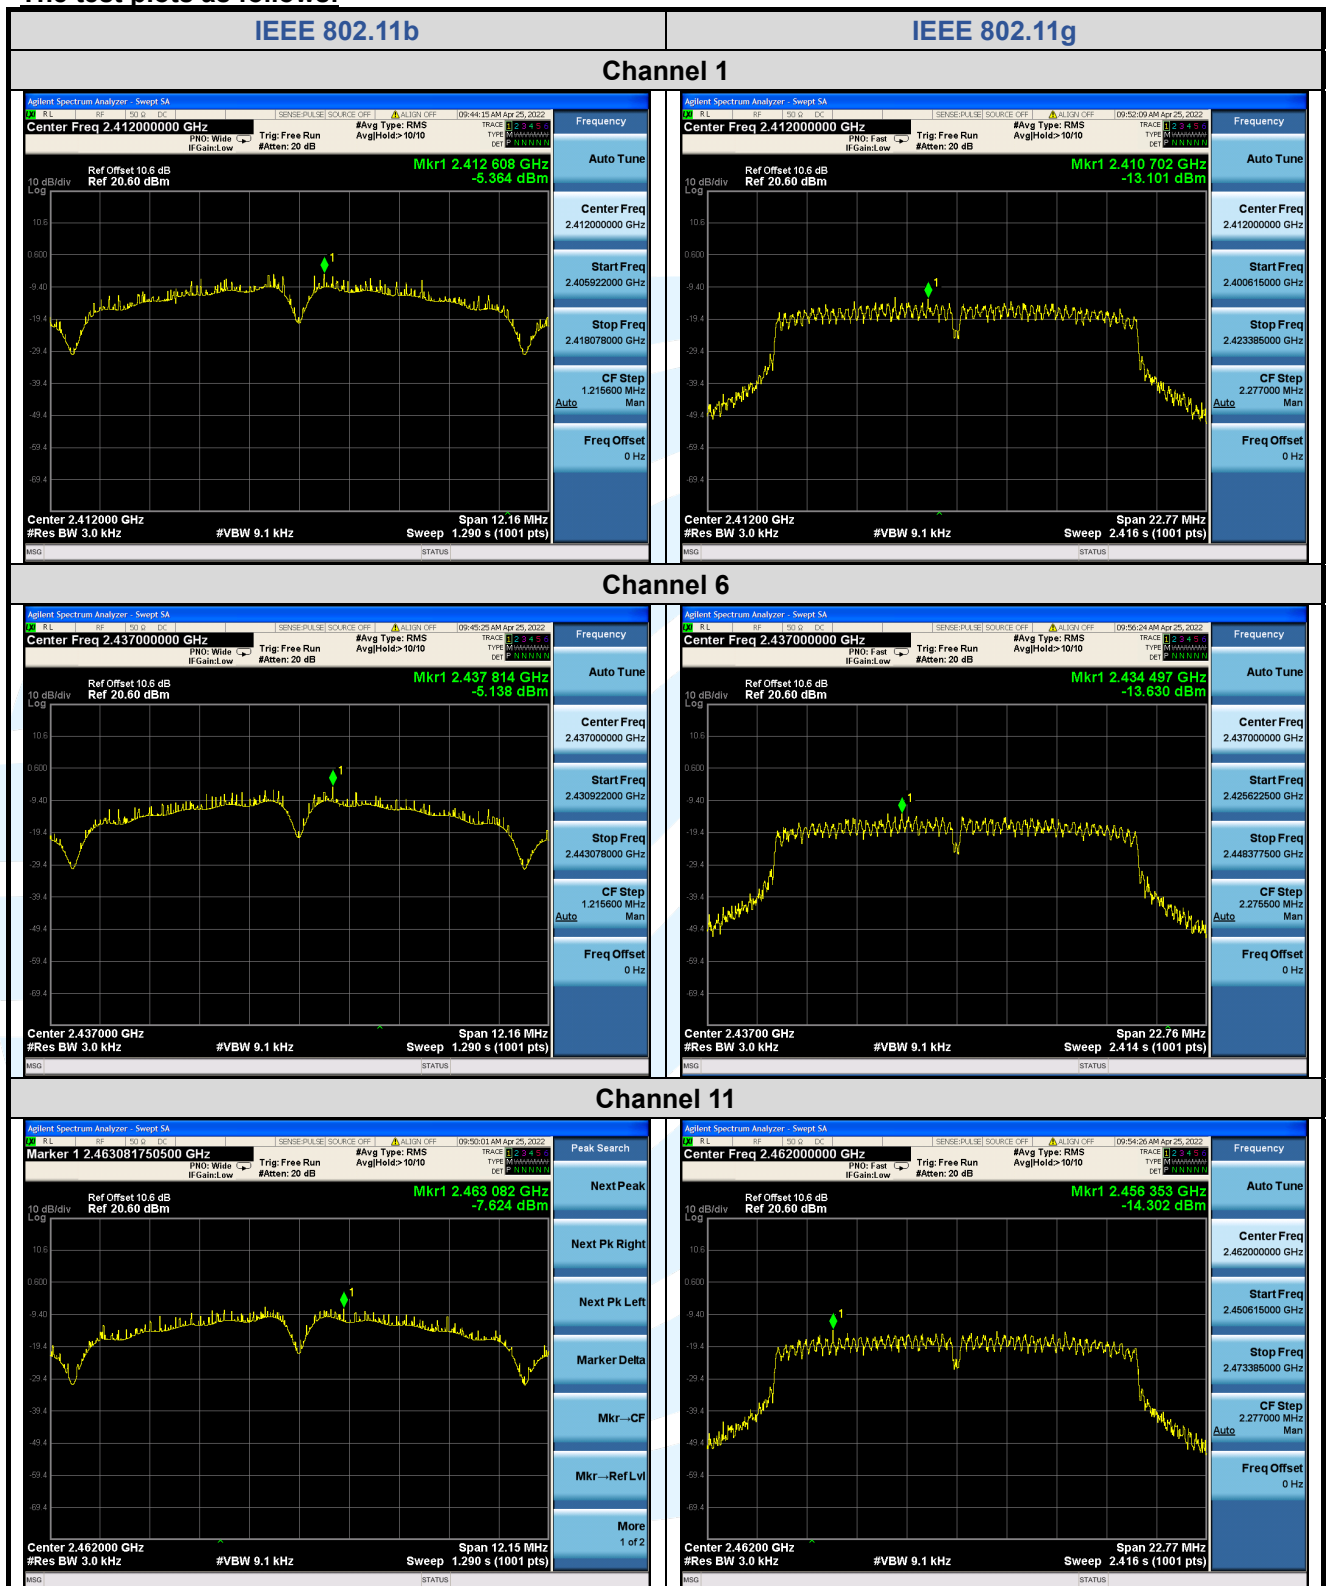

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-RSS247-V1.1

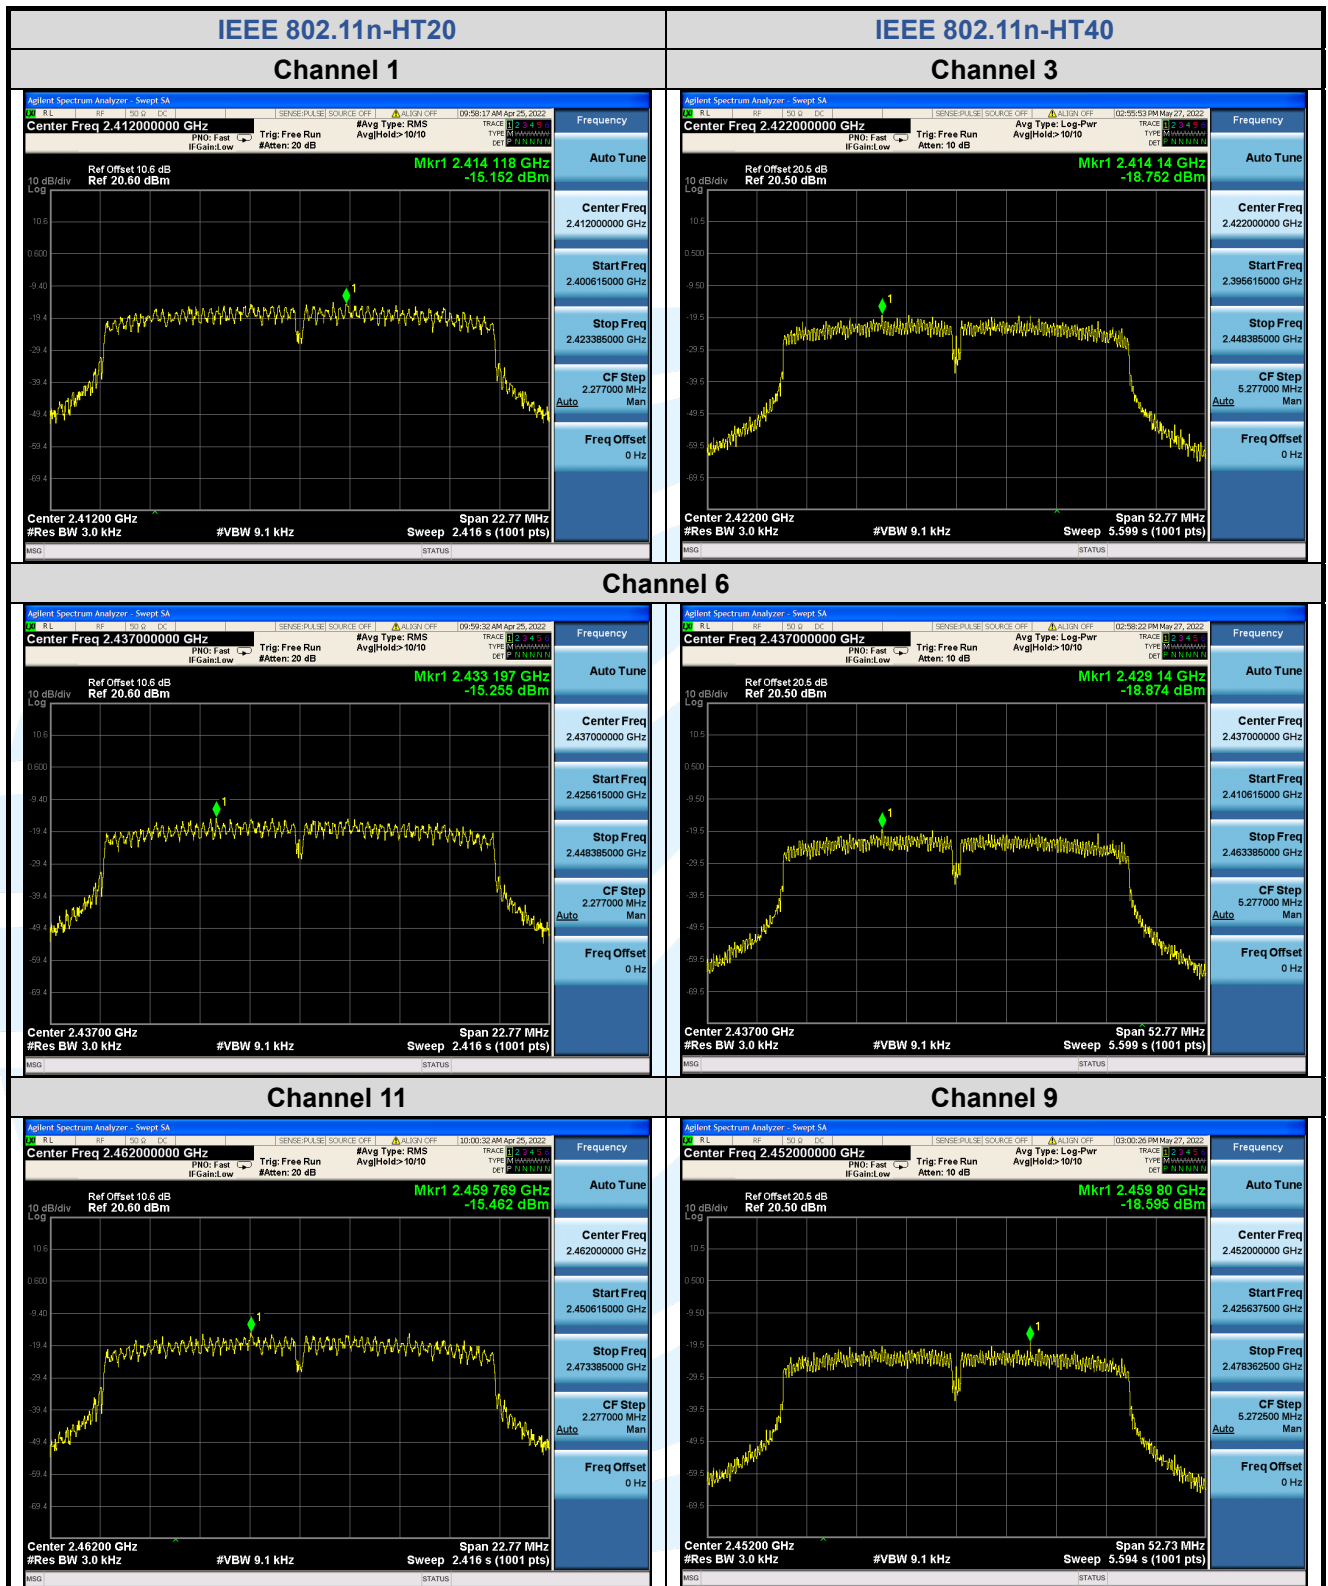

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Clause 11.11
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: Step 1: Measurement Procedure REF a) Set instrument center frequency to DTS channel center frequency. b) Set the span to ≥ 1.5 times the DTS bandwidth. c) Set the RBW = 100 kHz. d) Set the VBW $\geq 3 \times$ RBW. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum PSD level. j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level. Step 2: Measurement Procedure OOB a) Set RBW = 100 kHz. b) Set VBW ≥ 300 kHz. c) Detector = peak. d) Sweep = auto couple. e) Trace Mode = max hold. f) Allow trace to fully stabilize. g) Use the peak marker function to determine the maximum amplitude level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

The test plots as follows:

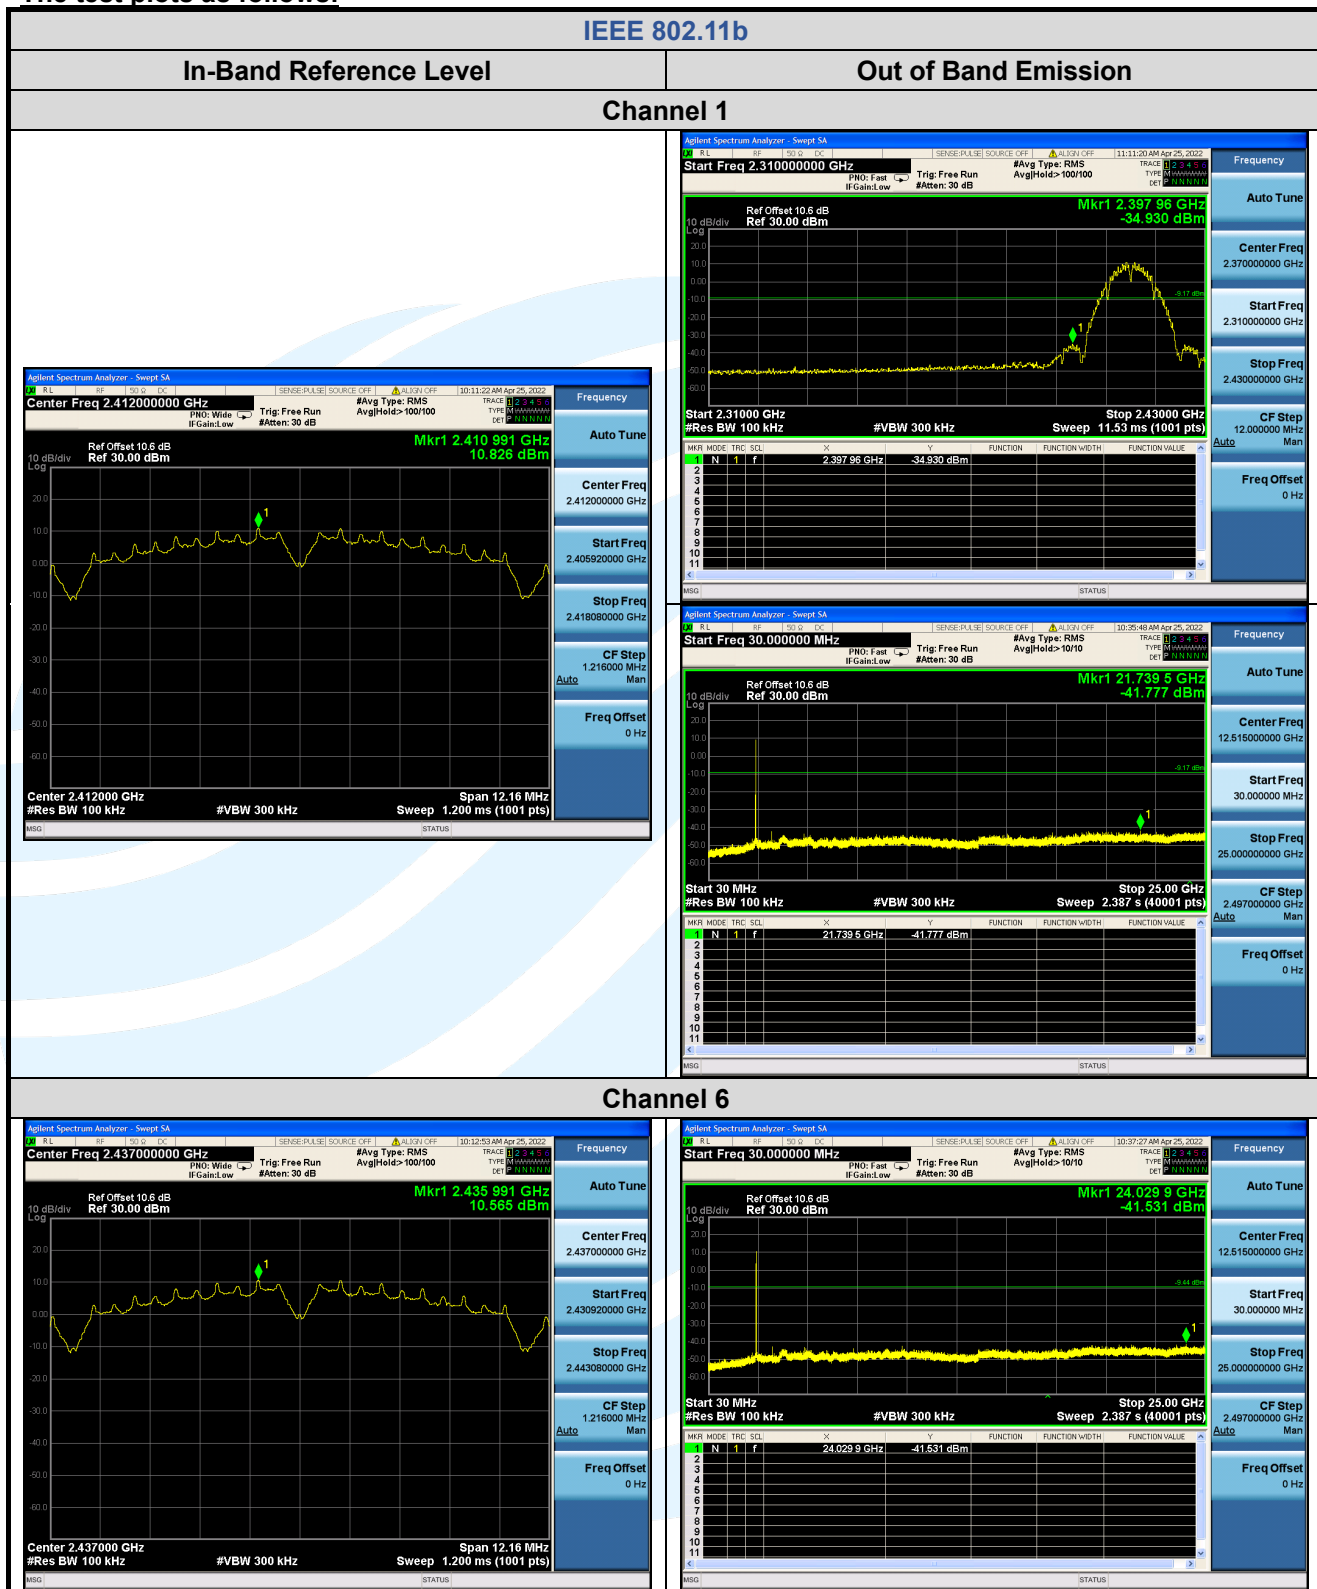

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

