

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2401U28582E-RF-00A
FCC ID: YZZGWN7604

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: Mid-Tier AX3000 Wi-Fi 6 Access Point
Model No.: GWN7604
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2024/06/17
Issue Date: 2024/08/23

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Andy Yu

Andy Yu
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	9
EQUIPMENT MODIFICATIONS	11
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	12
SUMMARY OF TEST RESULTS	14
TEST EQUIPMENT LIST	15
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	17
APPLICABLE STANDARD	17
RESULT	17
FCC §15.203 - ANTENNA REQUIREMENT.....	19
APPLICABLE STANDARD	19
ANTENNA CONNECTOR CONSTRUCTION	19
FCC §15.407 (B) (6) §15.207 (A) - CONDUCTED EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	20
FACTOR & OVER LIMIT CALCULATION.....	21
TEST DATA	21
§15.205 & §15.209 & §15.407(B) - UNDESIRABLE EMISSION.....	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	26
TEST PROCEDURE	26
FACTOR & OVER LIMIT/MARGIN CALCULATION	27
TEST DATA	27
FCC §15.407(A), (E) - 26 DB & 6DB EMISSION BANDWIDTH	115
APPLICABLE STANDARD	115
TEST PROCEDURE	115
TEST DATA	116

FCC §15.407(A)&(H)(1) - CONDUCTED TRANSMITTER OUTPUT POWER & TRANSMIT POWER CONTROL (TPC)	130
APPLICABLE STANDARD	130
TEST PROCEDURE	131
TEST DATA	131
FCC §15.407(A) - POWER SPECTRAL DENSITY	133
TEST PROCEDURE	133
TEST DATA	134
EUT PHOTOGRAPHS	154
TEST SETUP PHOTOGRAPHS	155
APPENDIX	156
APPENDIX A: EMISSION BANDWIDTH	156
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	240
APPENDIX C: MIN EMISSION BANDWIDTH	346
APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER	370
APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY	384
APPENDIX F: DUTY CYCLE	494

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401U28582E-RF-00A	Original Report	2024/08/23

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mid-Tier AX3000 Wi-Fi 6 Access Point
Tested Model	GWN7604
Multiple Model(s)	N/A
Frequency Range	5G Wi-Fi: 5150-5250MHz;5250-5350MHz;5470-5725MHz;5725-5850MHz; 5850-5895MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80/ac160/ax20/ax40/ax80/ax160
Maximum Conducted Average Output Power	5150-5250MHz: 25.71dBm 5250-5350MHz: 21.56dBm 5470-5725MHz: 21.38dBm 5725-5850MHz: 24.55dBm 5850-5895MHz: 23.88dBm
Modulation Technique	OFDM, OFDMA
TPC Function	Support
Beam-Forming	Support
Antenna Specification [#]	Antenna gain: ANT0: 4.55 dBi, ANT1: 3.54 dBi, ANT2: 4.84 dBi Beamforming gain: 0dBi (only for n/ac/ax mode) (It is provided by the manufacturer)
Voltage Range	DC 12V/2A from adapter or DC 48V from POE
Sample serial number	2N32-2 for Conducted and Radiated Emissions 2N32-3 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.94dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device support 802.11a/n20/n40/ac20/ac40/ac80/ac160/ax20/ax40/ax80/ax160 modes.

For 5150-5350MHz Band, 15 channels are provided to test:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260
38	5190	54	5270
40	5200	56	5280
42	5210	58	5290
44	5220	60	5300
46	5230	62	5310
48	5240	64	5320
50	5250	/	/

5150-5250MHz Band,

For 802.11a/ac/ax20 mode: channel 36, 40, 48 were tested;

For 802.11ac/ax40 mode: channel 38, 46 were tested;

For 802.11ac/ax80 mode: channel 42 was tested.

5250-5350MHz Band,

For 802.11a/ac/ax20 mode: channel 52, 56, 64 were tested;

For 802.11ac/ax40 mode: channel 54, 62 were tested;

For 802.11ac/ax80 mode: channel 58 was tested.

Cross Channel, 802.11ac/ax160, channel 50 was tested

For 5470-5725MHz Band, 19channels are provided to testing:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
100	5500	120	5600
102	5510	122	5610
104	5520	124	5620
106	5530	126	5630
108	5540	128	5640
110	5550	132	5660
112	5560	134	5670
114	5570	136	5680
116	5580	140	5700
118	5590	/	/

For 802.11a/ac20/ax20 mode: channel 100, 116, 140 were tested;

For 802.11ac40/ax40 mode: channel 102, 110, 134 were tested;

For 802.11ac80/ax80 mode, channel 106, 122 was tested.

For 802.11ac160/ax160 mode, channel 114 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20/ax20 mode: channel 149, 157, 165 were tested;

For 802.11ac40/ax40 mode: channel 151, 159 were tested;

For 802.11ac80/ax80 mode, channel 155 was tested.

For 5850-5895MHz band, 5725-5850MHz & 5850-5895MHz bands span channels: 7 channels are provided to testing:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
163	5815	173	5865
167	5835	175	5875
169	5845	177	5885
171	5855	/	/

For 802.11a/ac20/ax20 mode: channel 169, 173, 177 were tested;

For 802.11ac40/ax40 mode: channel 167, 175 were tested;

For 802.11ac80/ax80 mode, channel 171 was tested

For 802.11ac160/ax160 mode, channel 163 was tested.

EUT Exercise Software

“QATool_Dbg.exe[#]” exercise software was used. The software and power level was provided by the applicant. The device was tested with the worst case was performed as below:

5150-5250MHz:

U-NII	Mode	ANT	Power Level [#]		
			Low Channel	Middle Channel	High Channel
5150 – 5250MHz	A	ANT0	20.5	20.5	20.5
		ANT1	18	17.5	15
		ANT2	17.5	17	14.5
	802.11ac20	MIMO	18	18.5	16
	802.11ac40	MIMO	19	/	19
	802.11ac80	MIMO	/	13.5	/
	802.11ac160	MIMO	/	15	/
	802.11AX20	MIMO	18	18.5	16
	802.11AX40	MIMO	18.5	/	19
	802.11AX80	MIMO	/	13.5	/
	802.11AX160	MIMO	/	15	/

5250-5350MHz:

U-NII	Mode	ANT	TPC	Power Level [#]		
				Low Channel	Middle Channel	High Channel
5250 – 5350MHz	A	ANT0	P _H /P _L	19/12	18.5/11.5	18.5/11.5
		ANT1	P _H /P _L	14.5/7.5	14/7	13/6
		ANT2	P _H /P _L	14.5/7.5	13.5/6.5	13/6
	802.11ac20	MIMO	P _H /P _L	12/5.5	12/5.5	12/5.5
	802.11ac40	MIMO	P _H /P _L	14/7.5	/	14/7.5
	802.11ac80	MIMO	P _H /P _L	/	13.5/7	/
	802.11ac160	MIMO	P _H /P _L	/	/	/
	802.11AX20	MIMO	P _H /P _L	12/5.5	12/5.5	12/5.5
	802.11AX40	MIMO	P _H /P _L	13.5/7	/	13.5/7
	802.11AX80	MIMO	P _H /P _L	/	13.5/7	/

5470-5725MHz:

U-NII	Mode	ANT	TPC	Power Level [#]		
				Low Channel	Middle Channel	High Channel
5470 – 5725MHz	A	ANT0	P _H /P _L	19/12	19/12	13.5/6.5
		ANT1	P _H /P _L	15/8	17/10	13.5/6.5
		ANT2	P _H /P _L	14/7	15.5/8.5	13/6
	802.11ac20	MIMO	P _H /P _L	12/5.5	12/5.5	13/6.5
	802.11ac40	MIMO	P _H /P _L	14.5/8	14.5/8	14.5/8
	802.11ac80	MIMO	P _H /P _L	14.5/8	/	14.5/8
	802.11ac160	MIMO	P _H /P _L	/	17/10.5	/
	802.11AX20	MIMO	P _H /P _L	12.5/6	12.5/6	13.5/7
	802.11AX40	MIMO	P _H /P _L	13.5/7	13.5/7	13.5/7
	802.11AX80	MIMO	P _H /P _L	14.5/8	/	14.5/8
	802.11AX160	MIMO	P _H /P _L	/	16/9.5	/

5725-5850MHz:

U-NII	Mode	ANT	Power Level [#]		
			Low Channel	Middle Channel	High Channel
5725 – 5850MHz	A	ANT0	13	13	16
		ANT1	12	12	15
		ANT2	12	12	15
	802.11ac20	MIMO	14	14	17
	802.11ac40	MIMO	17	/	16.5
	802.11ac80	MIMO	/	19	/
	802.11ac160	MIMO	/	/	/
	802.11AX20	MIMO	14.5	14.5	17.5
	802.11AX40	MIMO	17	/	16.5
	802.11AX80	MIMO	/	19	/

5850– 5895MHz:

U-NII	Mode	ANT	Power Level [#]		
			Low Channel	Middle Channel	High Channel
5850– 5895MHz	A	ANT0	20.5	20.5	20.5
		ANT1	16	16	16
		ANT2	20.5	20.5	20.5
	802.11ac20	MIMO	17.5	17.5	17.5
	802.11ac40	MIMO	18	/	19
	802.11ac80	MIMO	/	20.5	/
	802.11ac160	MIMO	/	18	/
	802.11AX20	MIMO	17.5	17.5	17.5
	802.11AX40	MIMO	19	/	19
	802.11AX80	MIMO	/	20.5	/
	802.11AX160	MIMO	/	17	/

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
DELL	PC1	Latitude E6520	DL0ZCS1
DELL	PC2	Latitude E5430	JG3NLV1
TP-LINK	POE	TL-POE4824G	N/A
MASS POWER	Adapter	NBS24J120200HU	N/A
N/A	POE load	N/A	N/A
N/A	Dummy load	N/A	N/A

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded un-detachable AC cable	1.2	LISN/ AC mains	Socket
Unshielded detachable AC cable	0.3	Socket	POE
Shielded Un-detachable DC cable	2.5	Adapter	EUT
Shielded detachable RJ45 cable	8.0	EUT	POE load
Shielded detachable RJ45 cable	8.0	EUT	PC1
Shielded detachable RJ45 cable	8.0	EUT	PC2
Shielded detachable RJ45 cable	8.0	EUT	Dummy load
Shielded detachable RJ45 cable	8.0	POE	PC2
Unshielded detachable AC cable	0.3	Mains	POE

Block Diagram of Test Setup


For conducted emission:

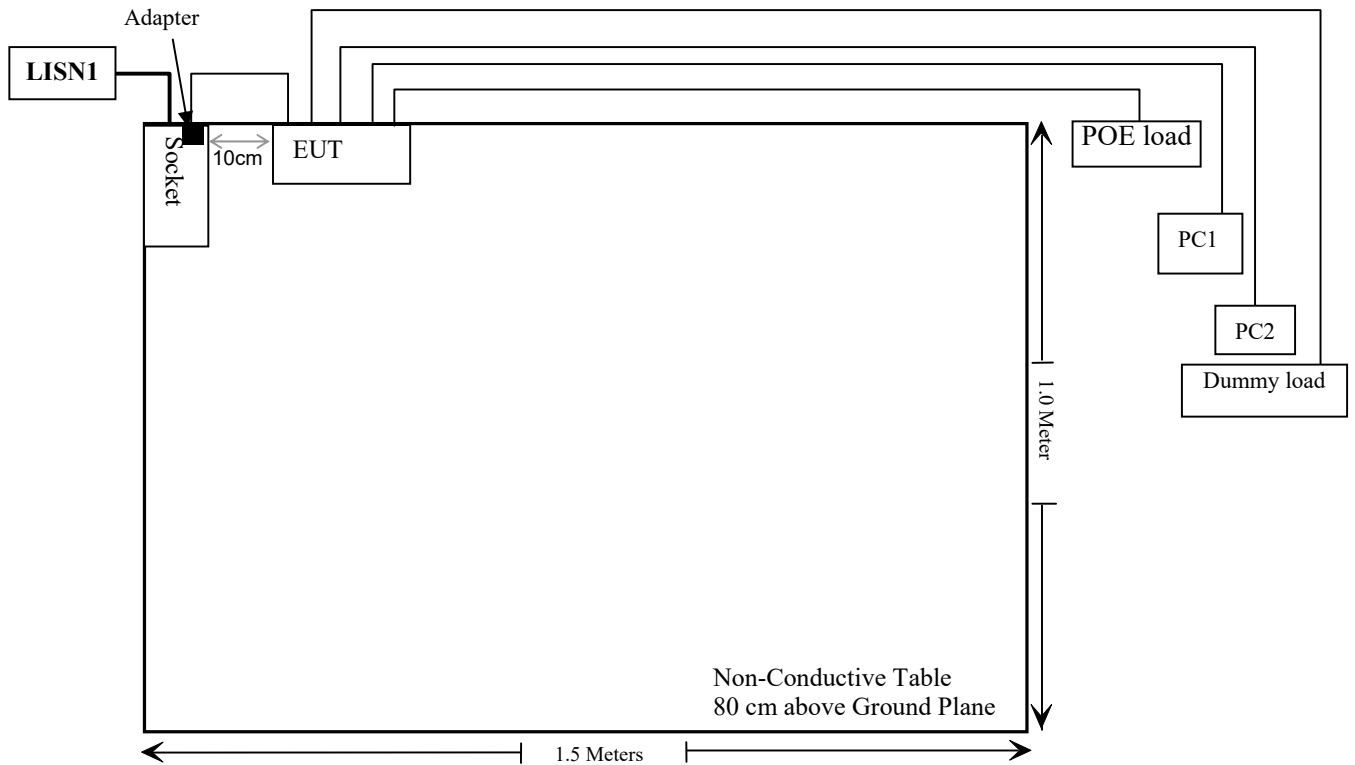

For radiated emission (Below 1GHz):

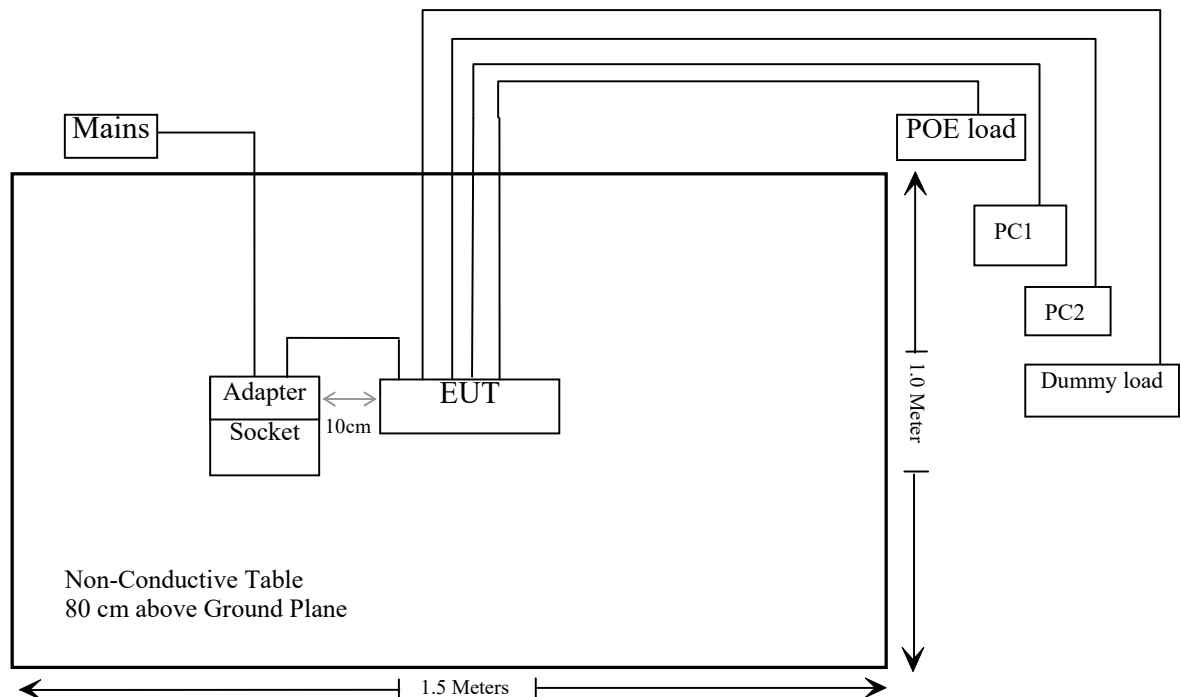

For radiated emission (Above 1GHz):

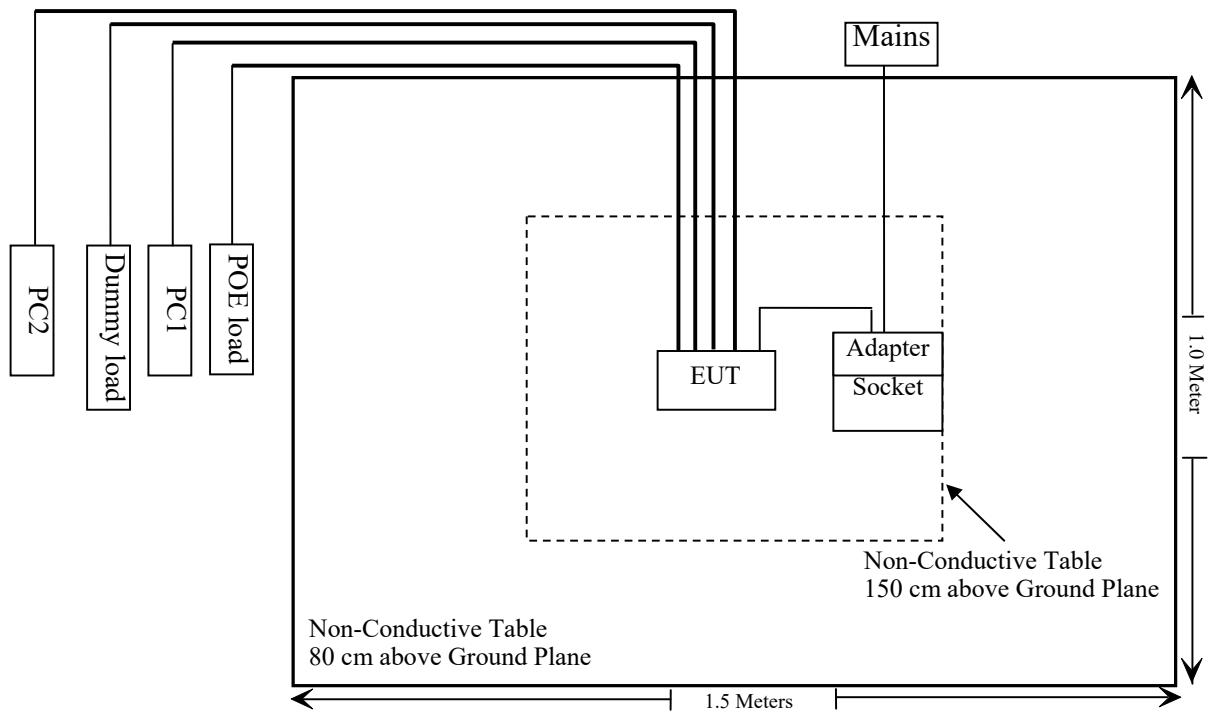

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Compliant
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*

Compliant*: Please refer to the DFS report 2401U28582E-RFC.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	2026	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
R&S	SPECTRUM ANALYZER	FSV40-N	102259	2024/01/16	2025/01/15
Tonscend	RF control Unit	JS0806-2	19D8060154	2023/09/06	2024/09/05
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM065	2024/06/27	2025/06/26
Narda	20dB Attenuator	99899	0107	2024/06/27	2025/06/26
Micro-Tronics	RF Cable	8082135	W1113	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Result

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

For worst case:

Mode	Frequency (MHz)	Antenna Gain [#]		Max Tune-up Power [#]		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2462	6.97	4.98	29.0	794.33	28	0.402	1.0
5.2G Wi-Fi	5180-5240	9.61	9.14	26.0	398.11	28	0.370	1.0
5.3G Wi-Fi	5260-5320	9.61	9.14	22.0	158.49	28	0.147	1.0
5.6G Wi-Fi	5500-5700	9.61	9.14	22.0	158.49	28	0.147	1.0
5.8G Wi-Fi	5745-5825	9.61	9.14	25.0	316.23	28	0.294	1.0
5.9G Wi-Fi	5845-5885	9.61	9.14	24.0	251.19	28	0.233	1.0

Note:

- 1) The tune up conducted power and antenna gain was declared by the applicant.
- 2) For the Wi-Fi mode, the antenna gain would be the directional gain.
- 3) The 2.4G Wi-Fi and 5G Wi-Fi can transmit simultaneously.

The ratio= $MPE_{2.4G\ Wi-Fi}/limit + MPE_{5G\ Wi-Fi}/limit = 0.402/1.0 + 0.370/1.0 = 0.772 < 1.0$, simultaneous exposure is not required.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 28cm from nearby persons.

Result: Compliant

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has three internal antennas which was permanently attached, and the maximum antenna gain[#] as below table, fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Antenna Type	Antenna Gain [#]	Impedance
ANT0	Dipole	4.55dBi	50Ω
ANT1	Dipole	3.54dBi	50Ω
ANT2	Dipole	4.84dBi	50Ω


Result: Compliant

FCC §15.407 (b) (6) §15.207 (a) - CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

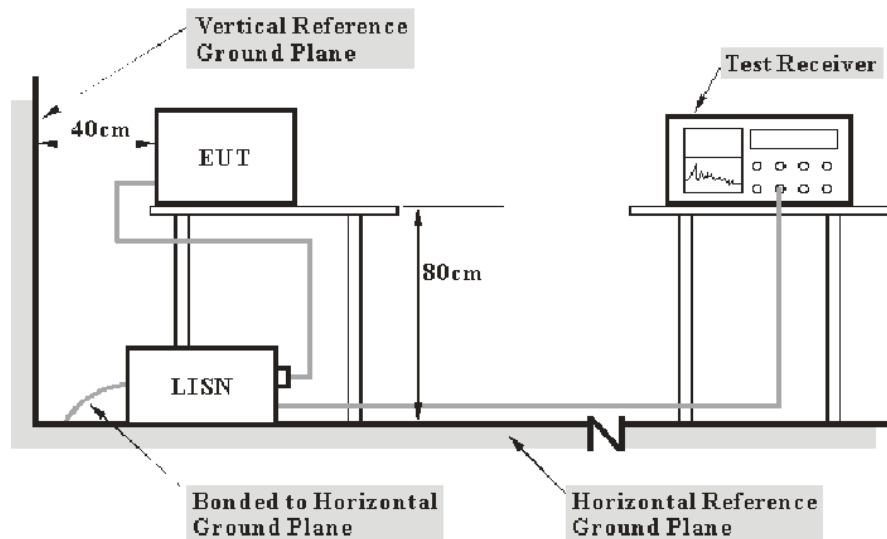

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	70 %
ATM Pressure:	101 kPa

The testing was performed by Macy Shi on 2024-07-25.

EUT operation mode: Transmitting (Maximum output power mode, 802.11 ax40, 5230MHz)

Note: according to the test result of 2.4G Wi-Fi report, the POE power was the worst case, so POE power mode was select to test in this report.

AC 120V/60 Hz, Line

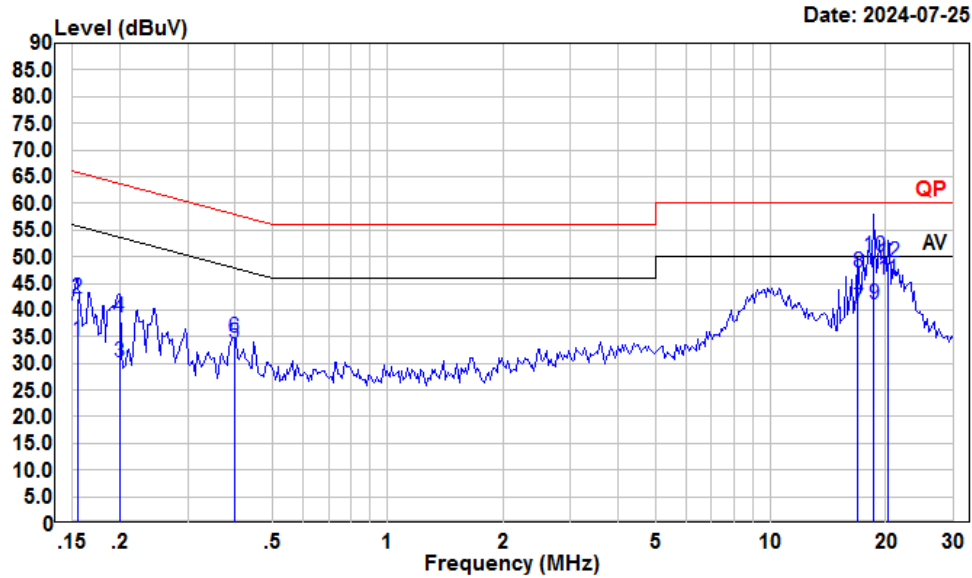

Condition: Line


Project : 2401U28582E-RF

tester : Macy.shi

Note : 5G WIFI

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	13.27	34.28	10.89	10.12	55.74	-21.46	Average
2	0.15	21.13	42.14	10.89	10.12	65.74	-23.60	QP
3	0.20	9.28	30.17	10.80	10.09	53.62	-23.45	Average
4	0.20	17.64	38.53	10.80	10.09	63.62	-25.09	QP
5	0.40	13.07	33.75	10.58	10.10	47.90	-14.15	Average
6	0.40	14.24	34.92	10.58	10.10	57.90	-22.98	QP
7	16.93	19.30	40.23	10.73	10.20	50.00	-9.77	Average
8	16.93	26.10	47.03	10.73	10.20	60.00	-12.97	QP
9	18.62	19.93	40.94	10.83	10.18	50.00	-9.06	Average
10	18.62	29.15	50.16	10.83	10.18	60.00	-9.84	QP
11	20.27	24.50	45.56	10.89	10.17	50.00	-4.44	Average
12	20.27	28.00	49.06	10.89	10.17	60.00	-10.94	QP

AC 120V/60 Hz, Neutral

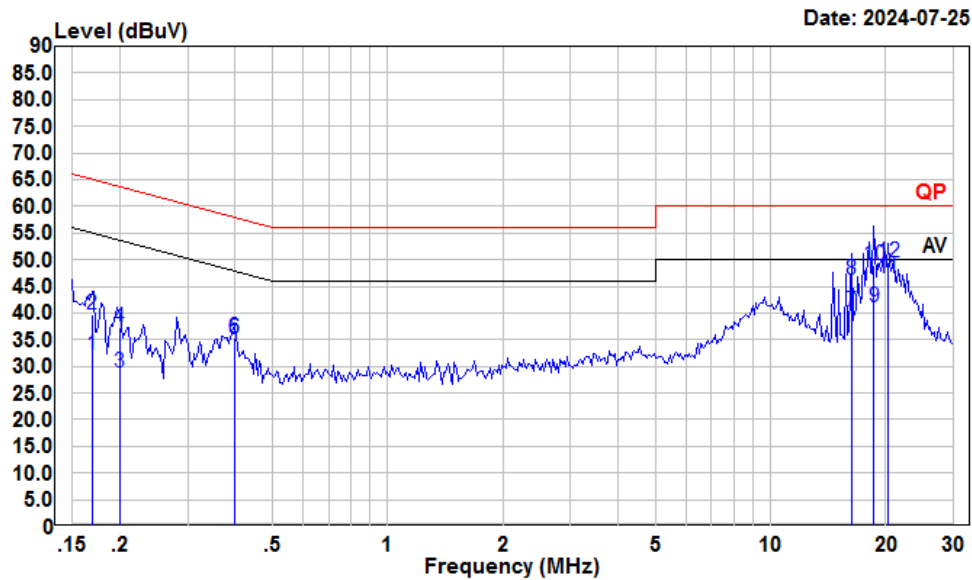

Condition: Neutral
Project : 2401U28582E-RF
tester : Macy.shi
Note : 5G WIFI

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	11.47	32.09	10.52	10.10	55.03	-22.94	Average
2	0.17	19.13	39.75	10.52	10.10	65.03	-25.28	QP
3	0.20	8.35	28.84	10.40	10.09	53.62	-24.78	Average
4	0.20	16.83	37.32	10.40	10.09	63.62	-26.30	QP
5	0.40	14.49	35.21	10.62	10.10	47.90	-12.69	Average
6	0.40	14.75	35.47	10.62	10.10	57.90	-22.43	QP
7	16.23	19.30	40.28	10.77	10.21	50.00	-9.72	Average
8	16.23	25.30	46.28	10.77	10.21	60.00	-13.72	QP
9	18.62	20.09	40.99	10.72	10.18	50.00	-9.01	Average
10	18.62	28.14	49.04	10.72	10.18	60.00	-10.96	QP
11	20.27	25.60	46.46	10.69	10.17	50.00	-3.54	Average
12	20.27	28.50	49.36	10.69	10.17	60.00	-10.64	QP

§15.205 & §15.209 & §15.407(B) - UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz:
 - (i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.
 - (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

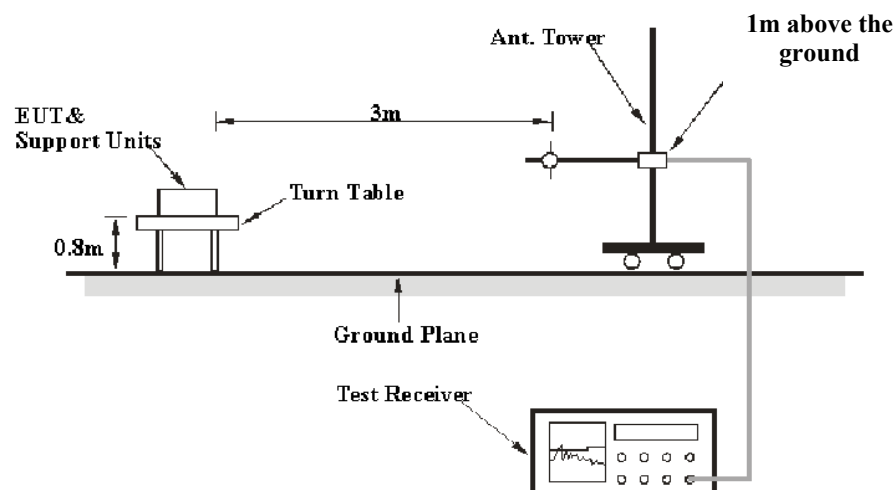

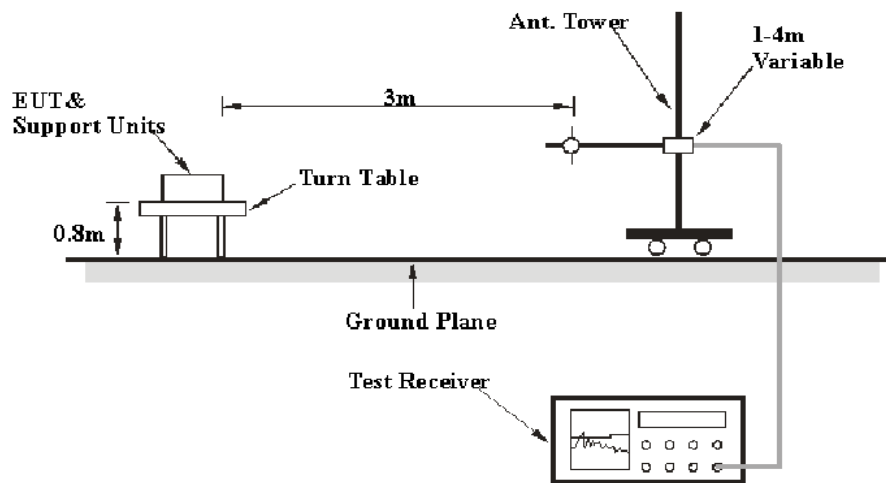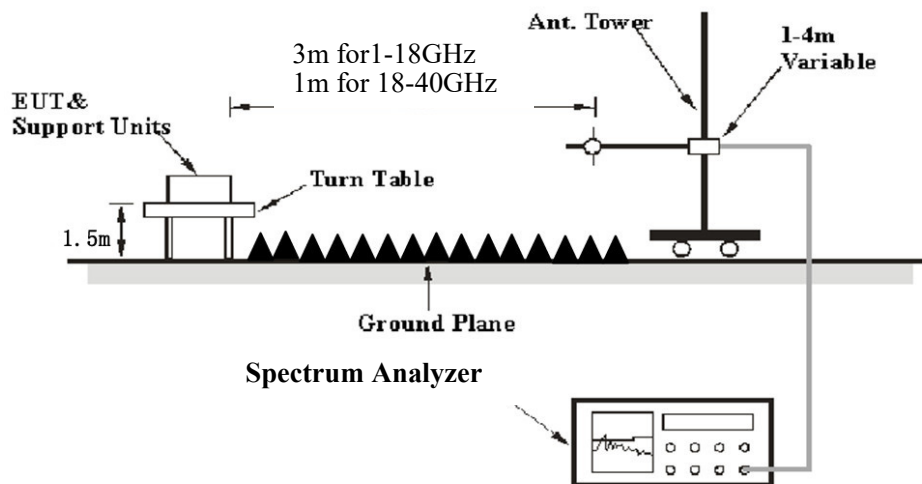30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~25 °C
Relative Humidity:	50~55 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-07-25 for below 1GHz and Zenos Qiao and Dylan Yang from 2024-07-10 to 2024-07-25 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case of orientation was recorded.


Note: for below 1GHz range, according to the test result of 2.4G Wi-Fi report, the adapter power was the worst case, so adapter mode was select to test in this report.

9 kHz-30MHz: *(Maximum output power mode, 802.11ax 40, 5230MHz)*

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30 MHz–1 GHz: (Maximum output power mode, 802.11ax 40, 5230MHz)


Horizontal

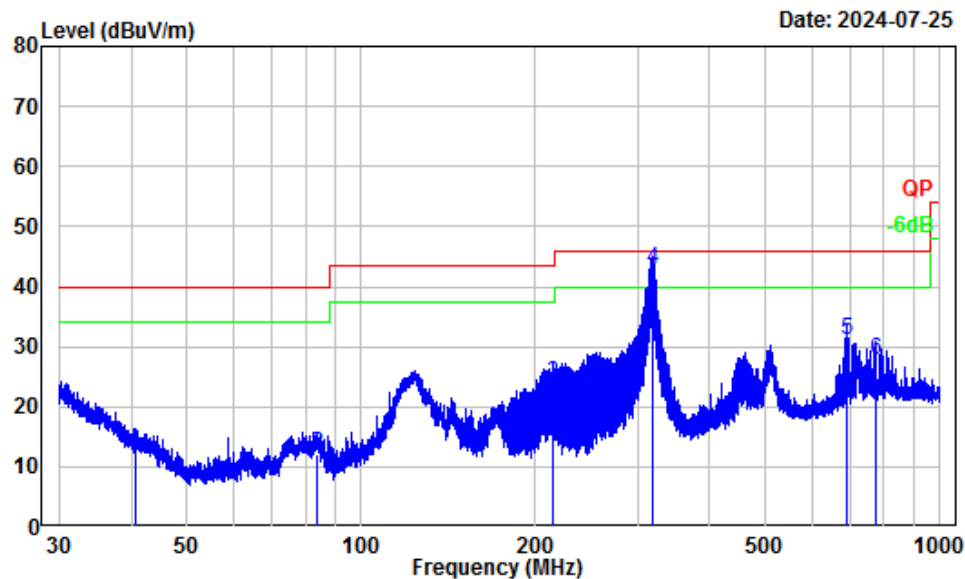

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401U28582E-RF
Test Mode : 5G WIFI
Tester : Anson Su

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.63	-11.92	24.23	12.31	40.00	-27.69 QP
2	83.71	-18.18	30.34	12.16	40.00	-27.84 QP
3	213.67	-13.77	37.67	23.90	43.50	-19.60 QP
4	318.82	-12.48	55.45	42.97	46.00	-3.03 QP
5	692.90	-6.24	37.25	31.01	46.00	-14.99 QP
6	773.82	-5.43	33.25	27.82	46.00	-18.18 QP

Vertical

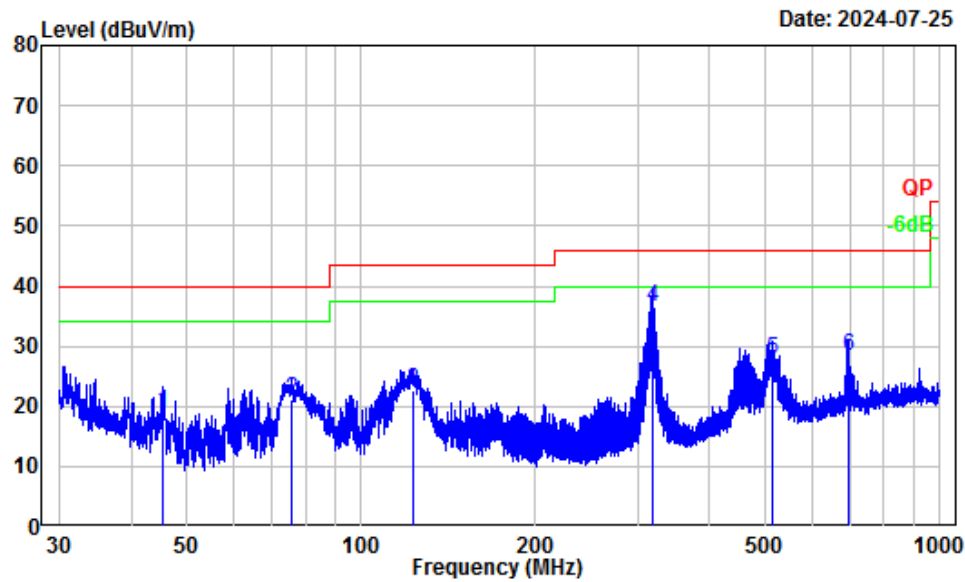

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401U28582E-RF
Test Mode : 5G WIFI
Tester : Anson Su

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.26	-15.99	35.08	19.09	40.00	-20.91 QP
2	75.65	-18.69	39.70	21.01	40.00	-18.99 QP
3	123.05	-12.71	35.48	22.77	43.50	-20.73 QP
4	317.98	-12.85	49.24	36.39	46.00	-9.61 QP
5	512.96	-8.42	36.30	27.88	46.00	-18.12 QP
6	693.20	-6.63	34.99	28.36	46.00	-17.64 QP

Above 1GHz:
5150-5250 MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT0							
802.11a							
5180MHz							
5149.89	62.33	PK	H	2.71	65.04	74	-8.96
5149.89	47.48	AV	H	2.71	50.19	54	-3.81
5149.68	60.87	PK	V	2.71	63.58	74	-10.42
5149.68	46.69	AV	V	2.71	49.40	54	-4.60
10360.00	49.45	PK	H	13.07	62.52	68.2	-5.68
10360.00	50.28	PK	V	13.07	63.35	68.2	-4.85
5200MHz							
10400.00	49.97	PK	H	13.12	63.09	68.2	-5.11
10400.00	50.69	PK	V	13.12	63.81	68.2	-4.39
5240MHz							
5356.92	56.47	PK	H	3.07	59.54	74	-14.46
5356.92	44.65	AV	H	3.07	47.72	54	-6.28
5361.54	55.89	PK	V	3.07	58.96	74	-15.04
5361.54	44.24	AV	V	3.07	47.31	54	-6.69
10480.00	52.14	PK	H	13.07	65.21	68.2	-2.99
10480.00	52.81	PK	V	13.07	65.88	68.2	-2.32

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT1							
802.11a							
5180MHz							
5149.24	59.05	PK	H	2.71	61.76	74	-12.24
5149.24	45.79	AV	H	2.71	48.50	54	-5.50
5149.53	57.87	PK	V	2.71	60.58	74	-13.42
5149.53	45.16	AV	V	2.71	47.87	54	-6.13
10360	53.56	PK	H	13.07	66.63	68.2	-1.57
10360	53.93	PK	V	13.07	67.00	68.2	-1.20
5200MHz							
10400	53.54	PK	H	13.12	66.66	68.2	-1.54
10400	53.96	PK	V	13.12	67.08	68.2	-1.12
5240MHz							
5370.77	56.62	PK	H	3.07	59.69	74	-14.31
5370.77	43.38	AV	H	3.07	46.45	54	-7.55
5368.24	55.96	PK	V	3.07	59.03	74	-14.97
5368.24	42.85	AV	V	3.07	45.92	54	-8.08
10480	53.58	PK	H	13.07	66.65	68.2	-1.55
10480	53.87	PK	V	13.07	66.94	68.2	-1.26

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT2							
802.11a							
5180MHz							
5149.72	58.25	PK	H	2.71	60.96	74	-13.04
5149.72	45.54	AV	H	2.71	48.25	54	-5.75
5149.49	57.09	PK	V	2.71	59.80	74	-14.2
5149.49	44.97	AV	V	2.71	47.68	54	-6.32
10360	53.49	PK	H	13.07	66.56	68.2	-1.64
10360	53.92	PK	V	13.07	66.99	68.2	-1.21
5200MHz							
10400	53.38	PK	H	13.12	66.50	68.2	-1.70
10400	53.86	PK	V	13.12	66.98	68.2	-1.22
5240MHz							
5359.78	55.75	PK	H	3.07	58.82	74	-15.18
5359.78	44.12	AV	H	3.07	47.19	54	-6.81
5357.55	55.27	PK	V	3.07	58.34	74	-15.66
5357.55	43.63	AV	V	3.07	46.70	54	-7.30
10480.00	53.77	PK	H	13.07	66.84	68.2	-1.36
10480.00	54.08	PK	V	13.07	67.15	68.2	-1.05

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac20							
5180MHz							
5149.59	58.94	PK	H	2.71	61.65	74	-12.35
5149.59	45.42	AV	H	2.71	48.13	54	-5.87
5149.36	57.87	PK	V	2.71	60.58	74	-13.42
5149.36	44.68	AV	V	2.71	47.39	54	-6.61
10360.00	53.79	PK	H	13.07	66.86	68.2	-1.34
10360.00	54.04	PK	V	13.07	67.11	68.2	-1.09
5200MHz							
10400.00	53.39	PK	H	13.12	66.51	68.2	-1.69
10400.00	53.94	PK	V	13.12	67.06	68.2	-1.14
5240MHz							
5398.50	55.78	PK	H	3.07	58.85	74	-15.15
5398.50	43.85	AV	H	3.07	46.92	54	-7.08
5387.64	55.19	PK	V	3.07	58.26	74	-15.74
5387.64	43.37	AV	V	3.07	46.44	54	-7.56
10480.00	53.51	PK	H	13.07	66.58	68.2	-1.62
10480.00	54.08	PK	V	13.07	67.15	68.2	-1.05

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac40							
5190MHz							
5149.02	64.83	PK	H	2.71	67.54	74	-6.46
5149.02	50.28	AV	H	2.71	52.99	54	-1.01
5149.25	63.42	PK	V	2.71	66.13	74	-7.87
5149.25	50.25	AV	V	2.71	52.96	54	-1.04
10380.00	51.69	PK	H	13.09	64.78	68.2	-3.42
10380.00	52.98	PK	V	13.09	66.07	68.2	-2.13
5230MHz							
5352.95	59.47	PK	H	3.07	62.54	74	-11.46
5352.95	44.78	AV	H	3.07	47.85	54	-6.15
5353.86	58.19	PK	V	3.07	61.26	74	-12.74
5353.86	44.21	AV	V	3.07	47.28	54	-6.72
10460.00	53.53	PK	H	13.09	66.62	68.2	-1.58
10460.00	53.86	PK	V	13.09	66.95	68.2	-1.25
802.11ac80							
5210MHz							
5149.46	61.15	PK	H	2.71	63.86	74	-10.14
5149.46	50.11	AV	H	2.71	52.82	54	-1.18
5149.63	59.03	PK	V	2.71	61.74	74	-12.26
5149.63	49.84	AV	V	2.71	52.55	54	-1.45
5356.84	56.15	PK	H	3.07	59.22	74	-14.78
5356.84	43.76	AV	H	3.07	46.83	54	-7.17
5358.57	55.44	PK	V	3.07	58.51	74	-15.49
5358.57	43.19	AV	V	3.07	46.26	54	-7.74
10420.00	46.28	PK	H	13.12	59.40	68.2	-8.80
10420.00	46.99	PK	V	13.12	60.11	68.2	-8.09

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac160							
5250MHz							
5144.48	62.12	PK	H	2.71	64.83	74	-9.17
5144.48	50.35	AV	H	2.71	53.06	54	-0.94
5145.69	60.79	PK	V	2.71	63.50	74	-10.50
5145.69	49.56	AV	V	2.71	52.27	54	-1.73
5353.90	61.27	PK	H	3.07	64.34	74	-9.66
5353.90	49.84	AV	H	3.07	52.91	54	-1.09
5355.66	59.89	PK	V	3.07	62.96	74	-11.04
5355.66	49.78	AV	V	3.07	52.85	54	-1.15
10500.00	46.74	PK	H	13.07	59.81	68.2	-8.39
10500.00	47.89	PK	V	13.07	60.96	68.2	-7.24
802.11ax20							
5180MHz							
5149.32	58.45	PK	H	2.71	61.16	74	-12.84
5149.32	45.32	AV	H	2.71	48.03	54	-5.97
5149.55	57.27	PK	V	2.71	59.98	74	-14.02
5149.55	44.78	AV	V	2.71	47.49	54	-6.51
10360.00	53.57	PK	H	13.07	66.64	68.2	-1.56
10360.00	54.00	PK	V	13.07	67.07	68.2	-1.13
5200MHz							
10400.00	53.65	PK	H	13.12	66.77	68.2	-1.43
10400.00	53.97	PK	V	13.12	67.09	68.2	-1.11
5240MHz							
5357.24	56.59	PK	H	3.07	59.66	74	-14.34
5357.24	43.87	AV	H	3.07	46.94	54	-7.06
5354.73	55.94	PK	V	3.07	59.01	74	-14.99
5354.73	43.25	AV	V	3.07	46.32	54	-7.68
10480.00	53.38	PK	H	13.07	66.45	68.2	-1.75
10480.00	54.07	PK	V	13.07	67.14	68.2	-1.06

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax40							
5190MHz							
5149.69	62.99	PK	H	2.71	65.70	74	-8.30
5149.69	50.13	AV	H	2.71	52.84	54	-1.16
5149.56	61.54	PK	V	2.71	64.25	74	-9.75
5149.56	49.86	AV	V	2.71	52.57	54	-1.43
10380.00	52.27	PK	H	13.09	65.36	68.2	-2.84
10380.00	53.56	PK	V	13.09	66.65	68.2	-1.55
5230MHz							
5353.26	58.58	PK	H	3.07	61.65	74	-12.35
5353.26	44.84	AV	H	3.07	47.91	54	-6.09
5352.87	57.69	PK	V	3.07	60.76	74	-13.24
5352.87	44.05	AV	V	3.07	47.12	54	-6.88
10460.00	53.64	PK	H	13.09	66.73	68.2	-1.47
10460.00	54.10	PK	V	13.09	67.19	68.2	-1.01
802.11ax80							
5210MHz							
5149.89	61.61	PK	H	2.71	64.32	74	-9.68
5149.89	50.07	AV	H	2.71	52.78	54	-1.22
5149.73	60.34	PK	V	2.71	63.05	74	-10.95
5149.73	50.18	AV	V	2.71	52.89	54	-1.11
5369.98	56.22	PK	H	3.07	59.29	74	-14.71
5369.98	44.13	AV	H	3.07	47.20	54	-6.80
5360.75	55.57	PK	V	3.07	58.64	74	-15.36
5360.75	43.64	AV	V	3.07	46.71	54	-7.29
10420.00	46.45	PK	H	13.12	59.57	68.2	-8.63
10420.00	47.23	PK	V	13.12	60.35	68.2	-7.85

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax160							
5250MHz							
5145.15	61.64	PK	H	2.71	64.35	74	-9.65
5145.15	49.47	AV	H	2.71	52.18	54	-1.82
5144.87	60.35	PK	V	2.71	63.06	74	-10.94
5144.87	49.71	AV	V	2.71	52.42	54	-1.58
5353.29	62.39	PK	H	3.07	65.46	74	-8.54
5353.29	49.78	AV	H	3.07	52.85	54	-1.15
5352.36	61.02	PK	V	3.07	64.09	74	-9.91
5352.36	49.96	AV	V	3.07	53.03	54	-0.97
10500.00	46.75	PK	H	13.07	59.82	68.2	-8.38
10500.00	47.64	PK	V	13.07	60.71	68.2	-7.49

5250-5350MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT0							
802.11a							
5260MHz							
5099.78	56.95	PK	H	3.07	60.02	74	-13.98
5099.78	45.53	AV	H	3.07	48.60	54	-5.40
5102.57	56.06	PK	V	2.77	58.83	74	-15.17
5102.57	44.87	AV	V	2.77	47.64	54	-6.36
10520.00	52.45	PK	H	13.05	65.50	68.2	-2.70
10520.00	53.12	PK	V	13.05	66.17	68.2	-2.03
5280MHz							
10560.00	54.18	PK	H	13.02	67.20	68.2	-1.00
10560.00	54.85	PK	V	13.02	67.87	68.2	-0.33
5320MHz							
5350.40	60.53	PK	H	3.07	63.60	74	-10.40
5350.40	45.86	AV	H	3.07	48.93	54	-5.07
5350.87	59.37	PK	V	3.07	62.44	74	-11.56
5350.87	45.05	AV	V	3.07	48.12	54	-5.88
10640.00	52.24	PK	H	13.19	65.43	74	-8.57
10640.00	39.72	AV	H	13.19	52.91	54	-1.09
10640.00	53.35	PK	V	13.19	66.54	74	-7.46
10640.00	39.79	AV	V	13.19	52.98	54	-1.02

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT1							
802.11a							
5260MHz							
5132.31	55.92	PK	H	2.77	58.69	74	-15.31
5132.31	44.05	AV	H	2.77	46.82	54	-7.18
5125.52	55.24	PK	V	2.77	58.01	74	-15.99
5125.52	43.53	AV	V	2.77	46.30	54	-7.70
10520.00	53.99	PK	H	13.05	67.04	68.2	-1.16
10520.00	54.02	PK	V	13.05	67.07	68.2	-1.13
5280MHz							
10560.00	53.77	PK	H	13.02	66.79	68.2	-1.41
10560.00	54.16	PK	V	13.02	67.18	68.2	-1.02
5320MHz							
5352.38	57.57	PK	H	3.07	60.64	74	-13.36
5352.38	43.19	AV	H	3.07	46.26	54	-7.74
5353.26	56.84	PK	V	3.07	59.91	74	-14.09
5353.26	42.68	AV	V	3.07	45.75	54	-8.25
10640.00	52.39	PK	H	13.19	65.58	74	-8.42
10640.00	39.08	AV	H	13.19	52.27	54	-1.73
10640.00	53.27	PK	V	13.19	66.46	74	-7.54
10640.00	39.64	AV	V	13.19	52.83	54	-1.17

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT2							
802.11a							
5260MHz							
5119.07	55.78	PK	H	2.77	58.55	74	-15.45
5119.07	44.14	AV	H	2.77	46.91	54	-7.09
5140.12	55.05	PK	V	2.77	57.82	74	-16.18
5140.12	43.57	AV	V	2.77	46.34	54	-7.66
10520.00	53.20	PK	H	13.05	66.25	68.2	-1.95
10520.00	53.88	PK	V	13.05	66.93	68.2	-1.27
5280MHz							
10560.00	53.34	PK	H	13.02	66.36	68.2	-1.84
10560.00	54.09	PK	V	13.02	67.11	68.2	-1.09
5320MHz							
5350.98	57.55	PK	H	3.07	60.62	74	-13.38
5350.98	44.21	AV	H	3.07	47.28	54	-6.72
5351.37	56.78	PK	V	3.07	59.85	74	-14.15
5351.37	43.64	AV	V	3.07	46.71	54	-7.29
10640.00	53.87	PK	H	13.19	67.06	74	-6.94
10640.00	39.14	AV	H	13.19	52.33	54	-1.67
10640.00	54.68	PK	V	13.19	67.87	74	-6.13
10640.00	39.71	AV	V	13.19	52.90	54	-1.10

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac20							
5260MHz							
5131.47	55.89	PK	H	2.77	58.66	74	-15.34
5131.47	44.54	AV	H	2.77	47.31	54	-6.69
5127.68	55.08	PK	V	2.77	57.85	74	-16.15
5127.68	43.97	AV	V	2.77	46.74	54	-7.26
10520.00	53.84	PK	H	13.05	66.89	68.2	-1.31
10520.00	54.11	PK	V	13.05	67.16	68.2	-1.04
5280MHz							
10560.00	53.91	PK	H	13.02	66.93	68.2	-1.27
10560.00	54.16	PK	V	13.02	67.18	68.2	-1.02
5320MHz							
5354.38	57.49	PK	H	3.07	60.56	74	-13.44
5354.38	43.46	AV	H	3.07	46.53	54	-7.47
5352.75	56.65	PK	V	3.07	59.72	74	-14.28
5352.75	42.84	AV	V	3.07	45.91	54	-8.09
10640.00	53.48	PK	H	13.19	66.67	74	-7.33
10640.00	39.13	AV	H	13.19	52.32	54	-1.68
10640.00	54.27	PK	V	13.19	67.46	74	-6.54
10640.00	39.69	AV	V	13.19	52.88	54	-1.12

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac40							
5270MHz							
5135.23	56.56	PK	H	2.77	59.33	74	-14.67
5135.23	45.43	AV	H	2.77	48.20	54	-5.80
5140.45	55.78	PK	V	2.77	58.55	74	-15.45
5140.45	44.81	AV	V	2.77	47.58	54	-6.42
10540.00	53.58	PK	H	13.03	66.61	68.2	-1.59
10540.00	54.06	PK	V	13.03	67.09	68.2	-1.11
5310MHz							
5353.90	60.74	PK	H	3.07	63.81	74	-10.19
5353.90	46.51	AV	H	3.07	49.58	54	-4.42
5352.67	59.69	PK	V	3.07	62.76	74	-11.24
5352.67	45.87	AV	V	3.07	48.94	54	-5.06
10620.00	52.89	PK	H	13.09	65.98	74	-8.02
10620.00	38.96	AV	H	13.09	52.05	54	-1.95
10620.00	53.67	PK	V	13.09	66.76	74	-7.24
10620.00	39.58	AV	V	13.09	52.67	54	-1.33
802.11ac80							
5290MHz							
5135.47	55.94	PK	H	2.77	58.71	74	-15.29
5135.47	44.21	AV	H	2.77	46.98	54	-7.02
5130.54	55.18	PK	V	2.77	57.95	74	-16.05
5130.54	43.65	AV	V	2.77	46.42	54	-7.58
5350.08	60.96	PK	H	3.07	64.03	74	-9.97
5350.08	49.75	AV	H	3.07	52.82	54	-1.18
5350.24	59.68	PK	V	3.07	62.75	74	-11.25
5350.24	49.89	AV	V	3.07	52.96	54	-1.04
10580.00	48.54	PK	H	13	61.54	68.2	-6.66
10580.00	49.39	PK	V	13	62.39	68.2	-5.81

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax20							
5260MHz							
5140.34	56.35	PK	H	2.77	59.12	74	-14.88
5140.34	44.42	AV	H	2.77	47.19	54	-6.81
5139.91	55.74	PK	V	2.77	58.51	74	-15.49
5139.91	43.86	AV	V	2.77	46.63	54	-7.37
10520.00	53.87	PK	H	13.05	66.92	68.2	-1.28
10520.00	54.03	PK	V	13.05	67.08	68.2	-1.12
5280MHz							
10560.00	53.95	PK	H	13.02	66.97	68.2	-1.23
10560.00	54.15	PK	V	13.02	67.17	68.2	-1.03
5320MHz							
5350.56	57.24	PK	H	3.07	60.31	74	-13.69
5350.56	43.49	AV	H	3.07	46.56	54	-7.44
5351.27	56.52	PK	V	3.07	59.59	74	-14.41
5351.27	42.78	AV	V	3.07	45.85	54	-8.15
10640.00	53.25	PK	H	13.19	66.44	74	-7.56
10640.00	39.72	AV	H	13.19	52.91	54	-1.09
10640.00	54.16	PK	V	13.19	67.35	74	-6.65
10640.00	39.73	AV	V	13.19	52.92	54	-1.08
802.11ax40							
5270MHz							
5127.10	56.87	PK	H	2.77	59.64	74	-14.36
5127.10	45.65	AV	H	2.77	48.42	54	-5.58
5131.25	56.08	PK	V	2.77	58.85	74	-15.15
5131.25	45.99	AV	V	2.77	48.76	54	-5.24
10540.00	53.26	PK	H	13.03	66.29	68.2	-1.91
10540.00	54.15	PK	V	13.03	67.18	68.2	-1.02
5310MHz							
5354.06	61.16	PK	H	3.07	64.23	74	-9.77
5354.06	47.03	AV	H	3.07	50.10	54	-3.90
5353.45	59.87	PK	V	3.07	62.94	74	-11.06
5353.45	46.34	AV	V	3.07	49.41	54	-4.59
10620.00	53.26	PK	H	13.09	66.35	74	-7.65
10620.00	38.94	AV	H	13.09	52.03	54	-1.97
10620.00	54.05	PK	V	13.09	67.14	74	-6.86
10620.00	39.69	AV	V	13.09	52.78	54	-1.22

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax80							
5290MHz							
5129.92	56.39	PK	H	2.77	59.16	74	-14.84
5129.92	44.27	AV	H	2.77	47.04	54	-6.96
5131.73	55.66	PK	V	2.77	58.43	74	-15.57
5131.73	43.71	AV	V	2.77	46.48	54	-7.52
5350.40	62.06	PK	H	3.07	65.13	74	-8.87
5350.40	49.87	AV	H	3.07	52.94	54	-1.06
5350.56	60.91	PK	V	3.07	63.98	74	-10.02
5350.56	49.12	AV	V	3.07	52.19	54	-1.81
10580.00	49.19	PK	H	13	62.19	68.2	-6.01
10580.00	50.06	PK	V	13	63.06	68.2	-5.14

5470-5725MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT0							
802.11a							
5500MHz							
5460.00	57.18	PK	H	3.59	60.77	74	-13.23
5460.00	44.82	AV	H	3.59	48.41	54	-5.59
5460.00	56.57	PK	V	3.59	60.16	74	-13.84
5460.00	44.43	AV	V	3.59	48.02	54	-5.98
5469.50	59.84	PK	H	3.69	63.53	68.2	-4.67
5469.27	58.69	PK	V	3.69	62.38	68.2	-5.82
11000.00	51.05	PK	H	13.98	65.03	74	-8.97
11000.00	38.94	AV	H	13.98	52.92	54	-1.08
11000.00	49.83	PK	V	13.98	63.81	74	-10.19
11000.00	37.78	AV	V	13.98	51.76	54	-2.24
5580MHz							
11160.00	49.69	PK	H	13.62	63.31	74	-10.69
11160.00	37.12	AV	H	13.62	50.74	54	-3.26
11160.00	48.45	PK	V	13.62	62.07	74	-11.93
11160.00	36.04	AV	V	13.62	49.66	54	-4.34
5700MHz							
5729.29	55.86	PK	H	4.09	59.95	68.2	-8.25
5727.56	55.32	PK	V	4.09	59.41	68.2	-8.79
11400.00	51.39	PK	H	14.08	65.47	74	-8.53
11400.00	38.90	AV	H	14.08	52.98	54	-1.02
11400.00	50.15	PK	V	14.08	64.23	74	-9.77
11400.00	37.82	AV	V	14.08	51.90	54	-2.10

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT1							
802.11a							
5500MHz							
5460.00	55.51	PK	H	3.59	59.10	74	-14.90
5460.00	42.76	AV	H	3.59	46.35	54	-7.65
5460.00	55.04	PK	V	3.59	58.63	74	-15.37
5460.00	42.32	AV	V	3.59	45.91	54	-8.09
5469.93	57.63	PK	H	3.69	61.32	68.2	-6.88
5469.66	56.45	PK	V	3.69	60.14	68.2	-8.06
11000.00	50.05	PK	H	13.98	64.03	74	-9.97
11000.00	37.48	AV	H	13.98	51.46	54	-2.54
11000.00	51.27	PK	V	13.98	65.25	74	-8.75
11000.00	38.52	AV	V	13.98	52.50	54	-1.50
5580MHz							
11160.00	50.64	PK	H	13.62	64.26	74	-9.74
11160.00	38.27	AV	H	13.62	51.89	54	-2.11
11160.00	51.82	PK	V	13.62	65.44	74	-8.56
11160.00	39.31	AV	V	13.62	52.93	54	-1.07
5700MHz							
5727.44	55.85	PK	H	4.09	59.94	68.2	-8.26
5726.07	55.19	PK	V	4.09	59.28	68.2	-8.92
11400.00	51.29	PK	H	14.08	65.37	74	-8.63
11400.00	37.78	AV	H	14.08	51.86	54	-2.14
11400.00	51.57	PK	V	14.08	65.65	74	-8.35
11400.00	38.83	AV	V	14.08	52.91	54	-1.09

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT2							
802.11a							
5500MHz							
5460.00	55.62	PK	H	3.59	59.21	74	-14.79
5460.00	43.56	AV	H	3.59	47.15	54	-6.85
5460.00	55.17	PK	V	3.59	58.76	74	-15.24
5460.00	43.08	AV	V	3.59	46.67	54	-7.33
5468.94	57.89	PK	H	3.69	61.58	68.2	-6.62
5469.27	56.74	PK	V	3.69	60.43	68.2	-7.77
11000.00	50.38	PK	H	13.98	64.36	74	-9.64
11000.00	37.75	AV	H	13.98	51.73	54	-2.27
11000.00	51.64	PK	V	13.98	65.62	74	-8.38
11000.00	38.87	AV	V	13.98	52.85	54	-1.15
5580MHz							
11160.00	50.12	PK	H	13.62	63.74	74	-10.26
11160.00	38.25	AV	H	13.62	51.87	54	-2.13
11160.00	51.46	PK	V	13.62	65.08	74	-8.92
11160.00	39.37	AV	V	13.62	52.99	54	-1.01
5700MHz							
5728.52	56.26	PK	H	4.09	60.35	68.2	-7.85
5727.15	55.47	PK	V	4.09	59.56	68.2	-8.64
11400.00	50.36	PK	H	14.08	64.44	74	-9.56
11400.00	37.59	AV	H	14.08	51.67	54	-2.33
11400.00	51.72	PK	V	14.08	65.80	74	-8.20
11400.00	38.68	AV	V	14.08	52.76	54	-1.24

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac20							
5500MHz							
5460.00	55.88	PK	H	3.59	59.47	74	-14.53
5460.00	43.53	AV	H	3.59	47.12	54	-6.88
5460.00	55.37	PK	V	3.59	58.96	74	-15.04
5460.00	43.12	AV	V	3.59	46.71	54	-7.29
5468.45	58.39	PK	H	3.69	62.08	68.2	-6.12
5469.06	57.24	PK	V	3.69	60.93	68.2	-7.27
11000.00	50.35	PK	H	13.98	64.33	74	-9.67
11000.00	37.97	AV	H	13.98	51.95	54	-2.05
11000.00	51.69	PK	V	13.98	65.67	74	-8.33
11000.00	38.98	AV	V	13.98	52.96	54	-1.04
5580MHz							
11160.00	51.45	PK	H	13.62	65.07	74	-8.93
11160.00	38.29	AV	H	13.62	51.91	54	-2.09
11160.00	52.68	PK	V	13.62	66.30	74	-7.70
11160.00	39.36	AV	V	13.62	52.98	54	-1.02
5700MHz							
5727.64	56.86	PK	H	4.09	60.95	68.2	-7.25
5725.89	56.09	PK	V	4.09	60.18	68.2	-8.02
11400.00	50.63	PK	H	14.08	64.71	74	-9.29
11400.00	37.79	AV	H	14.08	51.87	54	-2.13
11400.00	51.96	PK	V	14.08	66.04	74	-7.96
11400.00	38.87	AV	V	14.08	52.95	54	-1.05

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac40							
5510MHz							
5460.00	56.87	PK	H	3.59	60.46	74	-13.54
5460.00	44.53	AV	H	3.59	48.12	54	-5.88
5460.00	56.25	PK	V	3.59	59.84	74	-14.16
5460.00	44.08	AV	V	3.59	47.67	54	-6.33
5469.24	63.19	PK	H	3.69	66.88	68.2	-1.32
5468.86	61.66	PK	V	3.69	65.35	68.2	-2.85
11020.00	49.98	PK	H	13.89	63.87	74	-10.13
11020.00	38.05	AV	H	13.89	51.94	54	-2.06
11020.00	50.84	PK	V	13.89	64.73	74	-9.27
11020.00	38.73	AV	V	13.89	52.62	54	-1.38
5550MHz							
11100.00	49.56	PK	H	13.53	63.09	74	-10.91
11100.00	36.27	AV	H	13.53	49.80	54	-4.20
11100.00	50.49	PK	V	13.53	64.02	74	-9.98
11100.00	37.04	AV	V	13.53	50.57	54	-3.43
5670MHz							
5725.48	61.81	PK	H	4.09	65.90	68.2	-2.30
5725.87	60.56	PK	V	4.09	64.65	68.2	-3.55
11340.00	49.82	PK	H	13.99	63.81	74	-10.19
11340.00	37.98	AV	H	13.99	51.97	54	-2.03
11340.00	50.45	PK	V	13.99	64.44	74	-9.56
11340.00	38.59	AV	V	13.99	52.58	54	-1.42

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac80							
5530MHz							
5460.00	58.45	PK	H	3.59	62.04	74	-11.96
5460.00	46.23	AV	H	3.59	49.82	54	-4.18
5460.00	57.98	PK	V	3.59	61.57	74	-12.43
5460.00	45.84	AV	V	3.59	49.43	54	-4.57
5469.35	63.32	PK	H	3.69	67.01	68.2	-1.19
5469.54	62.01	PK	V	3.69	65.70	68.2	-2.50
5730.11	55.56	PK	H	4.09	59.65	68.2	-8.55
5728.68	55.05	PK	V	4.09	59.14	68.2	-9.06
11060.00	46.38	PK	H	13.71	60.09	74	-13.91
11060.00	34.17	AV	H	13.71	47.88	54	-6.12
11060.00	47.43	PK	V	13.71	61.14	74	-12.86
11060.00	34.96	AV	V	13.71	48.67	54	-5.33
5610MHz							
5727.93	62.64	PK	H	4.09	66.73	68.2	-1.47
5726.86	61.27	PK	V	4.09	65.36	68.2	-2.84
11220.00	47.05	PK	H	13.73	60.78	74	-13.22
11220.00	34.87	AV	H	13.73	48.60	54	-5.40
11220.00	48.14	PK	V	13.73	61.87	74	-12.13
11220.00	35.69	AV	V	13.73	49.42	54	-4.58

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac160							
5570MHz							
5460.00	58.57	PK	H	3.59	62.16	74	-11.84
5460.00	47.92	AV	H	3.59	51.51	54	-2.49
5460.00	58.05	PK	V	3.59	61.64	74	-12.36
5460.00	47.41	AV	V	3.59	51.00	54	-3.00
5464.74	63.38	PK	H	3.59	66.97	68.2	-1.23
5465.37	61.84	PK	V	3.59	65.43	68.2	-2.77
5725.05	59.56	PK	H	4.09	63.65	68.2	-4.55
5725.58	58.73	PK	V	4.09	62.82	68.2	-5.38
11140.00	45.96	PK	H	13.53	59.49	74	-14.51
11140.00	34.02	AV	H	13.53	47.55	54	-6.45
11140.00	46.75	PK	V	13.53	60.28	74	-13.72
11140.00	34.54	AV	V	13.53	48.07	54	-5.93

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax20							
5500MHz							
5460.00	55.93	PK	H	3.59	59.52	74	-14.48
5460.00	43.60	AV	H	3.59	47.19	54	-6.81
5460.00	55.37	PK	V	3.59	58.96	74	-15.04
5460.00	43.18	AV	V	3.59	46.77	54	-7.23
5469.28	58.21	PK	H	3.69	61.90	68.2	-6.30
5469.55	57.04	PK	V	3.69	60.73	68.2	-7.47
11000.00	51.13	PK	H	13.98	65.11	74	-8.89
11000.00	37.95	AV	H	13.98	51.93	54	-2.07
11000.00	52.36	PK	V	13.98	66.34	74	-7.66
11000.00	39.01	AV	V	13.98	52.99	54	-1.01
5580MHz							
11160.00	50.64	PK	H	13.62	64.26	74	-9.74
11160.00	38.18	AV	H	13.62	51.80	54	-2.20
11160.00	51.89	PK	V	13.62	65.51	74	-8.49
11160.00	39.35	AV	V	13.62	52.97	54	-1.03
5700MHz							
5727.82	57.70	PK	H	4.09	61.79	68.2	-6.41
5726.63	56.96	PK	V	4.09	61.05	68.2	-7.15
11400.00	50.32	PK	H	14.08	64.40	74	-9.60
11400.00	37.81	AV	H	14.08	51.89	54	-2.11
11400.00	51.69	PK	V	14.08	65.77	74	-8.23
11400.00	38.78	AV	V	14.08	52.86	54	-1.14

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax40							
5510MHz							
5460.00	58.06	PK	H	3.59	61.65	74	-12.35
5460.00	45.47	AV	H	3.59	49.06	54	-4.94
5460.00	57.54	PK	V	3.59	61.13	74	-12.87
5460.00	45.02	AV	V	3.59	48.61	54	-5.39
5469.70	63.48	PK	H	3.69	67.17	68.2	-1.03
5469.54	62.25	PK	V	3.69	65.94	68.2	-2.26
11020.00	49.89	PK	H	13.89	63.78	74	-10.22
11020.00	38.17	AV	H	13.89	52.06	54	-1.94
11020.00	51.21	PK	V	13.89	65.10	74	-8.90
11020.00	39.05	AV	V	13.89	52.94	54	-1.06
5550MHz							
11100.00	49.23	PK	H	13.53	62.76	74	-11.24
11100.00	36.32	AV	H	13.53	49.85	54	-4.15
11100.00	50.06	PK	V	13.53	63.59	74	-10.41
11100.00	37.17	AV	V	13.53	50.70	54	-3.30
5670MHz							
5725.89	63.02	PK	H	4.09	67.11	68.2	-1.09
5726.11	61.75	PK	V	4.09	65.84	68.2	-2.36
11340.00	49.76	PK	H	13.99	63.75	74	-10.25
11340.00	38.01	AV	H	13.99	52.00	54	-2.00
11340.00	50.64	PK	V	13.99	64.63	74	-9.37
11340.00	38.85	AV	V	13.99	52.84	54	-1.16

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax80							
5530MHz							
5460.00	58.08	PK	H	3.59	61.67	74	-12.33
5460.00	46.16	AV	H	3.59	49.75	54	-4.25
5460.00	57.59	PK	V	3.59	61.18	74	-12.82
5460.00	45.64	AV	V	3.59	49.23	54	-4.77
5469.56	63.35	PK	H	3.69	67.04	68.2	-1.16
5469.25	62.02	PK	V	3.69	65.71	68.2	-2.49
5730.86	55.47	PK	H	4.09	59.56	68.2	-8.64
5733.37	55.01	PK	V	4.19	59.20	68.2	-9.00
11060.00	45.81	PK	H	13.71	59.52	74	-14.48
11060.00	33.63	AV	H	13.71	47.34	54	-6.66
11060.00	46.46	PK	V	13.71	60.17	74	-13.83
11060.00	34.32	AV	V	13.71	48.03	54	-5.97
5610MHz							
5733.98	62.38	PK	H	4.19	66.57	68.2	-1.63
5731.67	61.05	PK	V	4.19	65.24	68.2	-2.96
11220.00	47.68	PK	H	13.73	61.41	74	-12.59
11220.00	34.74	AV	H	13.73	48.47	54	-5.53
11220.00	48.39	PK	V	13.73	62.12	74	-11.88
11220.00	35.45	AV	V	13.73	49.18	54	-4.82

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax160							
5570MHz							
5460.00	57.98	PK	H	3.59	61.57	74	-12.43
5460.00	46.86	AV	H	3.59	50.45	54	-3.55
5460.00	57.45	PK	V	3.59	61.04	74	-12.96
5460.00	46.39	AV	V	3.59	49.98	54	-4.02
5464.30	63.27	PK	H	3.59	66.86	68.2	-1.34
5465.15	62.03	PK	V	3.59	65.62	68.2	-2.58
5725.26	59.44	PK	H	4.09	63.53	68.2	-4.67
5725.59	58.27	PK	V	4.09	62.36	68.2	-5.84
11140.00	45.72	PK	H	13.53	59.25	74	-14.75
11140.00	34.04	AV	H	13.53	47.57	54	-6.43
11140.00	46.39	PK	V	13.53	59.92	74	-14.08
11140.00	34.41	AV	V	13.53	47.94	54	-6.06

5725-5850 MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT0							
802.11a							
5745MHz							
5650.00	55.28	PK	H	3.59	58.87	68.20	-9.33
5700.00	55.72	PK	H	4.09	59.81	105.20	-45.39
5720.00	56.45	PK	H	4.09	60.54	110.80	-50.26
5725.00	57.57	PK	H	4.09	61.66	122.20	-60.54
5650.00	54.96	PK	V	3.59	58.55	68.20	-9.65
5700.00	55.14	PK	V	4.09	59.23	105.20	-45.97
5720.00	55.89	PK	V	4.09	59.98	110.80	-50.82
5725.00	56.71	PK	V	4.09	60.80	122.20	-61.40
11490.00	50.72	PK	H	14.31	65.03	74	-8.97
11490.00	38.63	AV	H	14.31	52.94	54	-1.06
11490.00	49.38	PK	V	14.31	63.69	74	-10.31
11490.00	37.57	AV	V	14.31	51.88	54	-2.12
5785MHz							
11570.00	51.42	PK	H	14.05	65.47	74	-8.53
11570.00	38.70	AV	H	14.05	52.75	54	-1.25
11570.00	50.14	PK	V	14.05	64.19	74	-9.81
11570.00	37.81	AV	V	14.05	51.86	54	-2.14
5825MHz							
5850.00	57.23	PK	H	4.09	61.32	122.20	-60.88
5855.00	56.52	PK	H	4.09	60.61	110.80	-50.19
5875.00	55.84	PK	H	4.19	60.03	105.20	-45.17
5925.00	54.97	PK	H	4.69	59.66	68.20	-8.54
5850.00	56.68	PK	V	4.09	60.77	122.20	-61.43
5855.00	56.09	PK	V	4.09	60.18	110.80	-50.62
5875.00	55.31	PK	V	4.19	59.50	105.20	-45.70
5925.00	54.72	PK	V	4.69	59.41	68.20	-8.79
11650.00	51.61	PK	H	13.83	65.44	74	-8.56
11650.00	38.85	AV	H	13.83	52.68	54	-1.32
11650.00	50.32	PK	V	13.83	64.15	74	-9.85
11650.00	37.76	AV	V	13.83	51.59	54	-2.41

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT1							
802.11a							
5745MHz							
5650.00	55.29	PK	H	3.59	58.88	68.20	-9.32
5700.00	55.98	PK	H	4.09	60.07	105.20	-45.13
5720.00	56.46	PK	H	4.09	60.55	110.80	-50.25
5725.00	57.37	PK	H	4.09	61.46	122.20	-60.74
5650.00	55.05	PK	V	3.59	58.64	68.20	-9.56
5700.00	55.52	PK	V	4.09	59.61	105.20	-45.59
5720.00	56.01	PK	V	4.09	60.10	110.80	-50.70
5725.00	56.88	PK	V	4.09	60.97	122.20	-61.23
11490.00	51.49	PK	H	14.31	65.80	74	-8.20
11490.00	38.58	AV	H	14.31	52.89	54	-1.11
11490.00	50.24	PK	V	14.31	64.55	74	-9.45
11490.00	37.61	AV	V	14.31	51.92	54	-2.08
5785MHz							
11570.00	51.68	PK	H	14.05	65.73	74	-8.27
11570.00	38.91	AV	H	14.05	52.96	54	-1.04
11570.00	50.37	PK	V	14.05	64.42	74	-9.58
11570.00	37.84	AV	V	14.05	51.89	54	-2.11
5825MHz							
5850.00	57.84	PK	H	4.09	61.93	122.20	-60.27
5855.00	56.57	PK	H	4.09	60.66	110.80	-50.14
5875.00	56.18	PK	H	4.19	60.37	105.20	-44.83
5925.00	55.62	PK	H	4.69	60.31	68.20	-7.89
5850.00	57.33	PK	V	4.09	61.42	122.20	-60.78
5855.00	56.05	PK	V	4.09	60.14	110.80	-50.66
5875.00	55.64	PK	V	4.19	59.83	105.20	-45.37
5925.00	55.41	PK	V	4.69	60.10	68.20	-8.10
11650.00	52.06	PK	H	13.83	65.89	74	-8.11
11650.00	39.14	AV	H	13.83	52.97	54	-1.03
11650.00	50.78	PK	V	13.83	64.61	74	-9.39
11650.00	38.25	AV	V	13.83	52.08	54	-1.92

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT2							
802.11a							
5745MHz							
5650.00	55.73	PK	H	3.59	59.32	68.20	-8.88
5700.00	56.39	PK	H	4.09	60.48	105.20	-44.72
5720.00	56.91	PK	H	4.09	61.00	110.80	-49.80
5725.00	57.84	PK	H	4.09	61.93	122.20	-60.27
5650.00	55.48	PK	V	3.59	59.07	68.20	-9.13
5700.00	55.93	PK	V	4.09	60.02	105.20	-45.18
5720.00	56.32	PK	V	4.09	60.41	110.80	-50.39
5725.00	57.19	PK	V	4.09	61.28	122.20	-60.92
11490.00	51.48	PK	H	14.31	65.79	74	-8.21
11490.00	38.51	AV	H	14.31	52.82	54	-1.18
11490.00	50.22	PK	V	14.31	64.53	74	-9.47
11490.00	37.63	AV	V	14.31	51.94	54	-2.06
5785MHz							
11570.00	51.75	PK	H	14.05	65.80	74	-8.20
11570.00	38.70	AV	H	14.05	52.75	54	-1.25
11570.00	51.36	PK	V	14.05	65.41	74	-8.59
11570.00	37.59	AV	V	14.05	51.64	54	-2.36
5825MHz							
5850.00	58.47	PK	H	4.09	62.56	122.20	-59.64
5855.00	57.76	PK	H	4.09	61.85	110.80	-48.95
5875.00	56.85	PK	H	4.19	61.04	105.20	-44.16
5925.00	55.92	PK	H	4.69	60.61	68.20	-7.59
5850.00	57.91	PK	V	4.09	62.00	122.20	-60.20
5855.00	57.14	PK	V	4.09	61.23	110.80	-49.57
5875.00	56.27	PK	V	4.19	60.46	105.20	-44.74
5925.00	55.69	PK	V	4.69	60.38	68.20	-7.82
11650.00	51.37	PK	H	13.83	65.20	74	-8.80
11650.00	38.86	AV	H	13.83	52.69	54	-1.31
11650.00	50.09	PK	V	13.83	63.92	74	-10.08
11650.00	37.94	AV	V	13.83	51.77	54	-2.23

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac20							
5745MHz							
5650.00	55.45	PK	H	3.59	59.04	68.20	-9.16
5700.00	56.64	PK	H	4.09	60.73	105.20	-44.47
5720.00	57.39	PK	H	4.09	61.48	110.80	-49.32
5725.00	59.71	PK	H	4.09	63.80	122.20	-58.40
5650.00	55.22	PK	V	3.59	58.81	68.20	-9.39
5700.00	56.05	PK	V	4.09	60.14	105.20	-45.06
5720.00	56.87	PK	V	4.09	60.96	110.80	-49.84
5725.00	58.44	PK	V	4.09	62.53	122.20	-59.67
11490.00	52.36	PK	H	14.31	66.67	74	-7.33
11490.00	38.51	AV	H	14.31	52.82	54	-1.18
11490.00	51.05	PK	V	14.31	65.36	74	-8.64
11490.00	37.44	AV	V	14.31	51.75	54	-2.25
5785MHz							
11570.00	51.41	PK	H	14.05	65.46	74	-8.54
11570.00	38.78	AV	H	14.05	52.83	54	-1.17
11570.00	50.19	PK	V	14.05	64.24	74	-9.76
11570.00	37.65	AV	V	14.05	51.70	54	-2.30
5825MHz							
5850.00	59.36	PK	H	4.09	63.45	122.20	-58.75
5855.00	58.19	PK	H	4.09	62.28	110.80	-48.52
5875.00	57.58	PK	H	4.19	61.77	105.20	-43.43
5925.00	56.23	PK	H	4.69	60.92	68.20	-7.28
5850.00	58.75	PK	V	4.09	62.84	122.20	-59.36
5855.00	57.67	PK	V	4.09	61.76	110.80	-49.04
5875.00	56.84	PK	V	4.19	61.03	105.20	-44.17
5925.00	55.93	PK	V	4.69	60.62	68.20	-7.58
11650.00	51.21	PK	H	13.83	65.04	74	-8.96
11650.00	38.88	AV	H	13.83	52.71	54	-1.29
11650.00	50.04	PK	V	13.83	63.87	74	-10.13
11650.00	37.79	AV	V	13.83	51.62	54	-2.38

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac40							
5755MHz							
5650.00	56.64	PK	H	3.59	60.23	68.20	-7.97
5700.00	58.05	PK	H	4.09	62.14	105.20	-43.06
5720.00	61.87	PK	H	4.09	65.96	110.80	-44.84
5725.00	64.19	PK	H	4.09	68.28	122.20	-53.92
5650.00	56.28	PK	V	3.59	59.87	68.20	-8.33
5700.00	57.54	PK	V	4.09	61.63	105.20	-43.57
5720.00	60.39	PK	V	4.09	64.48	110.80	-46.32
5725.00	62.66	PK	V	4.09	66.75	122.20	-55.45
11510.00	50.87	PK	H	14.29	65.16	74	-8.84
11510.00	38.59	AV	H	14.29	52.88	54	-1.12
11510.00	49.64	PK	V	14.29	63.93	74	-10.07
11510.00	37.48	AV	V	14.29	51.77	54	-2.23
5795MHz							
5850.00	64.08	PK	H	4.09	68.17	122.20	-54.03
5855.00	62.75	PK	H	4.09	66.84	110.80	-43.96
5875.00	57.99	PK	H	4.19	62.18	105.20	-43.02
5925.00	56.01	PK	H	4.69	60.70	68.20	-7.50
5850.00	62.64	PK	V	4.09	66.73	122.20	-55.47
5855.00	61.23	PK	V	4.09	65.32	110.80	-45.48
5875.00	57.36	PK	V	4.19	61.55	105.20	-43.65
5925.00	55.71	PK	V	4.69	60.40	68.20	-7.80
11590.00	50.75	PK	H	13.97	64.72	74	-9.28
11590.00	38.99	AV	H	13.97	52.96	54	-1.04
11590.00	49.58	PK	V	13.97	63.55	74	-10.45
11590.00	37.87	AV	V	13.97	51.84	54	-2.16

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac80							
5775MHz							
5650.00	62.91	PK	H	3.59	66.50	68.20	-1.70
5700.00	75.45	PK	H	4.09	79.54	105.20	-25.66
5720.00	80.22	PK	H	4.09	84.31	110.80	-26.49
5725.00	82.07	PK	H	4.09	86.16	122.20	-36.04
5650.00	61.43	PK	V	3.59	65.02	68.20	-3.18
5700.00	74.05	PK	V	4.09	78.14	105.20	-27.06
5720.00	78.78	PK	V	4.09	82.87	110.80	-27.93
5725.00	80.59	PK	V	4.09	84.68	122.20	-37.52
5850.00	75.77	PK	H	4.09	79.86	122.20	-42.34
5855.00	72.54	PK	H	4.09	76.63	110.80	-34.17
5875.00	69.38	PK	H	4.19	73.57	105.20	-31.63
5925.00	61.69	PK	H	4.69	66.38	68.20	-1.82
5850.00	74.35	PK	V	4.09	78.44	122.20	-43.76
5855.00	71.06	PK	V	4.09	75.15	110.80	-35.65
5875.00	67.84	PK	V	4.19	72.03	105.20	-33.17
5925.00	60.17	PK	V	4.69	64.86	68.20	-3.34
11550.00	51.44	PK	H	14.13	65.57	74	-8.43
11550.00	38.79	AV	H	14.13	52.92	54	-1.08
11550.00	49.37	PK	V	14.13	63.50	74	-10.50
11550.00	37.86	AV	V	14.13	51.99	54	-2.01

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax20							
5745MHz							
5650.00	55.89	PK	H	3.59	59.48	68.20	-8.72
5700.00	56.95	PK	H	4.09	61.04	105.20	-44.16
5720.00	58.52	PK	H	4.09	62.61	110.80	-48.19
5725.00	60.87	PK	H	4.09	64.96	122.20	-57.24
5650.00	55.54	PK	V	3.59	59.13	68.20	-9.07
5700.00	56.06	PK	V	4.09	60.15	105.20	-45.05
5720.00	57.85	PK	V	4.09	61.94	110.80	-48.86
5725.00	59.39	PK	V	4.09	63.48	122.20	-58.72
11490.00	51.71	PK	H	14.31	66.02	74	-7.98
11490.00	38.38	AV	H	14.31	52.69	54	-1.31
11490.00	50.56	PK	V	14.31	64.87	74	-9.13
11490.00	37.44	AV	V	14.31	51.75	54	-2.25
5785MHz							
11570.00	52.09	PK	H	14.05	66.14	74	-7.86
11570.00	38.67	AV	H	14.05	52.72	54	-1.28
11570.00	50.86	PK	V	14.05	64.91	74	-9.09
11570.00	37.72	AV	V	14.05	51.77	54	-2.23
5825MHz							
5850.00	63.17	PK	H	4.09	67.26	122.20	-54.94
5855.00	59.78	PK	H	4.09	63.87	110.80	-46.93
5875.00	57.96	PK	H	4.19	62.15	105.20	-43.05
5925.00	56.35	PK	H	4.69	61.04	68.20	-7.16
5850.00	62.73	PK	V	4.09	66.82	122.20	-55.38
5855.00	59.02	PK	V	4.09	63.11	110.80	-47.69
5875.00	57.14	PK	V	4.19	61.33	105.20	-43.87
5925.00	55.95	PK	V	4.69	60.64	68.20	-7.56
11650.00	51.76	PK	H	13.83	65.59	74	-8.41
11650.00	38.98	AV	H	13.83	52.81	54	-1.19
11650.00	50.54	PK	V	13.83	64.37	74	-9.63
11650.00	38.05	AV	V	13.83	51.88	54	-2.12

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax40							
5755MHz							
5650.00	57.38	PK	H	3.59	60.97	68.20	-7.23
5700.00	58.56	PK	H	4.09	62.65	105.20	-42.55
5720.00	62.09	PK	H	4.09	66.18	110.80	-44.62
5725.00	64.64	PK	H	4.09	68.73	122.20	-53.47
5650.00	56.91	PK	V	3.59	60.50	68.20	-7.70
5700.00	57.75	PK	V	4.09	61.84	105.20	-43.36
5720.00	60.52	PK	V	4.09	64.61	110.80	-46.19
5725.00	63.17	PK	V	4.09	67.26	122.20	-54.94
11510.00	50.63	PK	H	14.29	64.92	74	-9.08
11510.00	38.44	AV	H	14.29	52.73	54	-1.27
11510.00	49.39	PK	V	14.29	63.68	74	-10.32
11510.00	37.57	AV	V	14.29	51.86	54	-2.14
5795MHz							
5850.00	67.89	PK	H	4.09	71.98	122.20	-50.22
5855.00	63.76	PK	H	4.09	67.85	110.80	-42.95
5875.00	58.95	PK	H	4.19	63.14	105.20	-42.06
5925.00	56.42	PK	H	4.69	61.11	68.20	-7.09
5850.00	66.38	PK	V	4.09	70.47	122.20	-51.73
5855.00	62.21	PK	V	4.09	66.30	110.80	-44.50
5875.00	57.87	PK	V	4.19	62.06	105.20	-43.14
5925.00	56.16	PK	V	4.69	60.85	68.20	-7.35
11590.00	50.78	PK	H	13.97	64.75	74	-9.25
11590.00	38.84	AV	H	13.97	52.81	54	-1.19
11590.00	49.51	PK	V	13.97	63.48	74	-10.52
11590.00	37.97	AV	V	13.97	51.94	54	-2.06

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax80							
5775MHz							
5650.00	62.03	PK	H	3.59	65.62	68.20	-2.58
5700.00	75.19	PK	H	4.09	79.28	105.20	-25.92
5720.00	79.78	PK	H	4.09	83.87	110.80	-26.93
5725.00	80.64	PK	H	4.09	84.73	122.20	-37.47
5650.00	60.87	PK	V	3.59	64.46	68.20	-3.74
5700.00	73.65	PK	V	4.09	77.74	105.20	-27.46
5720.00	78.22	PK	V	4.09	82.31	110.80	-28.49
5725.00	79.18	PK	V	4.09	83.27	122.20	-38.93
5850.00	74.89	PK	H	4.09	78.98	122.20	-43.22
5855.00	71.96	PK	H	4.09	76.05	110.80	-34.75
5875.00	69.48	PK	H	4.19	73.67	105.20	-31.53
5925.00	60.27	PK	H	4.69	64.96	68.20	-3.24
5850.00	73.42	PK	V	4.09	77.51	122.20	-44.69
5855.00	70.56	PK	V	4.09	74.65	110.80	-36.15
5875.00	68.05	PK	V	4.19	72.24	105.20	-32.96
5925.00	59.13	PK	V	4.69	63.82	68.20	-4.38
11550.00	50.54	PK	H	14.13	64.67	74	-9.33
11550.00	38.80	AV	H	14.13	52.93	54	-1.07
11550.00	49.63	PK	V	14.13	63.76	74	-10.24
11550.00	37.92	AV	V	14.13	52.05	54	-1.95

5850-5895 MHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT0							
802.11a							
5845MHz							
11690.00	50.49	PK	H	13.83	64.32	74	-9.68
11690.00	37.95	AV	H	13.83	51.78	54	-2.22
11690.00	48.64	PK	V	13.83	62.47	74	-11.53
11690.00	36.41	AV	V	13.83	50.24	54	-3.76
5865MHz							
11730.00	50.21	PK	H	13.63	63.84	74	-10.16
11730.00	37.33	AV	H	13.63	50.96	54	-3.04
11730.00	49.64	PK	V	13.63	63.27	74	-10.73
11730.00	36.22	AV	V	13.63	49.85	54	-4.15
5885MHz							
11770.00	50.58	PK	H	13.63	64.21	74	-9.79
11770.00	37.51	AV	H	13.63	51.14	54	-2.86
11770.00	49.68	PK	V	13.63	63.31	74	-10.69
11770.00	36.96	AV	V	13.63	50.59	54	-3.41
ANT1							
802.11a							
5845MHz							
11690.00	52.96	PK	H	13.83	66.79	74	-7.21
11690.00	38.56	AV	H	13.83	52.39	54	-1.61
11690.00	50.48	PK	V	13.83	64.31	74	-9.69
11690.00	36.74	AV	V	13.83	50.57	54	-3.43
5865MHz							
11730.00	53.63	PK	H	13.63	67.26	74	-6.74
11730.00	38.45	AV	H	13.63	52.08	54	-1.92
11730.00	51.72	PK	V	13.63	65.35	74	-8.65
11730.00	36.58	AV	V	13.63	50.21	54	-3.79
5885MHz							
11770.00	52.01	PK	H	13.63	65.64	74	-8.36
11770.00	39.26	AV	H	13.63	52.89	54	-1.11
11770.00	50.84	PK	V	13.63	64.47	74	-9.53
11770.00	37.04	AV	V	13.63	50.67	54	-3.33

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
ANT2							
802.11a							
5845MHz							
11690.00	46.37	PK	H	13.83	60.20	74	-13.80
11690.00	34.29	AV	H	13.83	48.12	54	-5.88
11690.00	47.26	PK	V	13.83	61.09	74	-12.91
11690.00	34.52	AV	V	13.83	48.35	54	-5.65
5865MHz							
11730.00	47.39	PK	H	13.63	61.02	74	-12.98
11730.00	34.91	AV	H	13.63	48.54	54	-5.46
11730.00	48.82	PK	V	13.63	62.45	74	-11.55
11730.00	35.23	AV	V	13.63	48.86	54	-5.14
5885MHz							
11770.00	47.59	PK	H	13.63	61.22	74	-12.78
11770.00	34.57	AV	H	13.63	48.20	54	-5.80
11770.00	48.62	PK	V	13.63	62.25	74	-11.75
11770.00	35.45	AV	V	13.63	49.08	54	-4.92
802.11ac20							
5845MHz							
11690.00	53.03	PK	H	13.83	66.86	74	-7.14
11690.00	38.56	AV	H	13.83	52.39	54	-1.61
11690.00	52.46	PK	V	13.83	66.29	74	-7.71
11690.00	37.37	AV	V	13.83	51.20	54	-2.80
5865MHz							
11730.00	52.41	PK	H	13.63	66.04	74	-7.96
11730.00	38.45	AV	H	13.63	52.08	54	-1.92
11730.00	51.69	PK	V	13.63	65.32	74	-8.68
11730.00	37.28	AV	V	13.63	50.91	54	-3.09
5885MHz							
11770.00	52.91	PK	H	13.63	66.54	74	-7.46
11770.00	39.26	AV	H	13.63	52.89	54	-1.11
11770.00	51.27	PK	V	13.63	64.90	74	-9.10
11770.00	37.93	AV	V	13.63	51.56	54	-2.44

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ac40							
5835MHz							
11670.00	50.28	PK	H	13.83	64.11	74	-9.89
11670.00	38.31	AV	H	13.83	52.14	54	-1.86
11670.00	48.69	PK	V	13.83	62.52	74	-11.48
11670.00	36.35	AV	V	13.83	50.18	54	-3.82
5875MHz							
11750.00	51.64	PK	H	13.63	65.27	74	-8.73
11750.00	38.39	AV	H	13.63	52.02	54	-1.98
11750.00	50.81	PK	V	13.63	64.44	74	-9.56
11750.00	37.75	AV	V	13.63	51.38	54	-2.62
802.11ac-VHT80							
5855MHz							
11710.00	49.39	PK	H	13.63	63.02	74	-10.98
11710.00	38.01	AV	H	13.63	51.64	54	-2.36
11710.00	48.75	PK	V	13.63	62.38	74	-11.62
11710.00	36.98	AV	V	13.63	50.61	54	-3.39
802.11ac160							
5815MHz							
11630.00	46.56	PK	H	13.83	60.39	74	-13.61
11630.00	35.58	AV	H	13.83	49.41	54	-4.59
11630.00	45.84	PK	V	13.83	59.67	74	-14.33
11630.00	34.99	AV	V	13.83	48.82	54	-5.18

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax20							
5845MHz							
11690.00	51.33	PK	H	13.83	65.16	74	-8.84
11690.00	38.64	AV	H	13.83	52.47	54	-1.53
11690.00	51.21	PK	V	13.83	65.04	74	-8.96
11690.00	38.23	AV	V	13.83	52.06	54	-1.94
5865MHz							
11730.00	51.49	PK	H	13.63	65.12	74	-8.88
11730.00	38.62	AV	H	13.63	52.25	54	-1.75
11730.00	51.08	PK	V	13.63	64.71	74	-9.29
11730.00	38.07	AV	V	13.63	51.70	54	-2.30
5885MHz							
11770.00	53.09	PK	H	13.63	66.72	74	-7.28
11770.00	38.67	AV	H	13.63	52.30	54	-1.70
11770.00	52.48	PK	V	13.63	66.11	74	-7.89
11770.00	37.92	AV	V	13.63	51.55	54	-2.45
802.11ax40							
5835MHz							
11670.00	49.47	PK	H	13.83	63.30	74	-10.70
11670.00	38.99	AV	H	13.83	52.82	54	-1.18
11670.00	48.24	PK	V	13.83	62.07	74	-11.93
11670.00	38.11	AV	V	13.83	51.94	54	-2.06
5875MHz							
11750.00	50.99	PK	H	13.63	64.62	74	-9.38
11750.00	39.31	AV	H	13.63	52.94	54	-1.06
11750.00	49.65	PK	V	13.63	63.28	74	-10.72
11750.00	38.82	AV	V	13.63	52.45	54	-1.55

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11ax80							
5855MHz							
11710.00	49.08	PK	H	13.63	62.71	74	-11.29
11710.00	37.45	AV	H	13.63	51.08	54	-2.92
11710.00	49.26	PK	V	13.63	62.89	74	-11.11
11710.00	37.01	AV	V	13.63	50.64	54	-3.36
802.11ax160							
5815MHz							
11630.00	46.67	PK	H	13.83	60.50	74	-13.50
11630.00	35.78	AV	H	13.83	49.61	54	-4.39
11630.00	46.63	PK	V	13.83	60.46	74	-13.54
11630.00	35.17	AV	V	13.83	49.00	54	-5.00

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


Test plots for Band Edge Measurements (Radiated)


5150~5250 MHz:

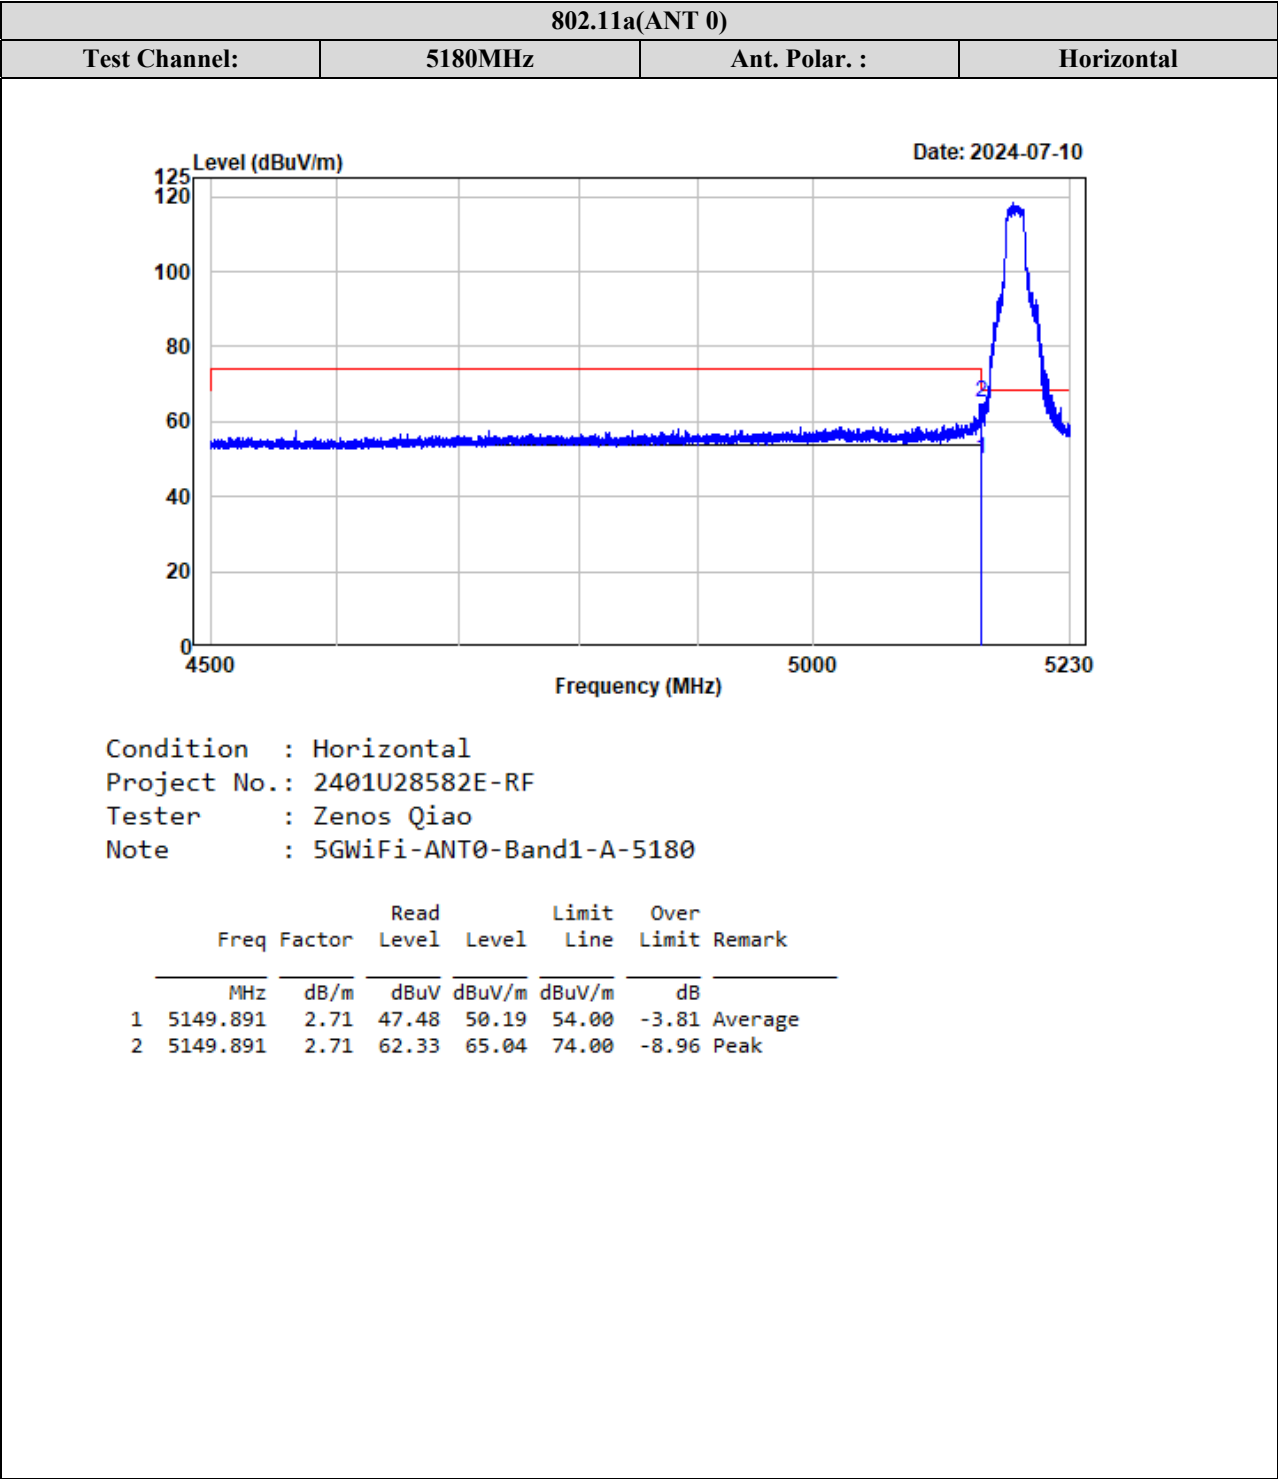

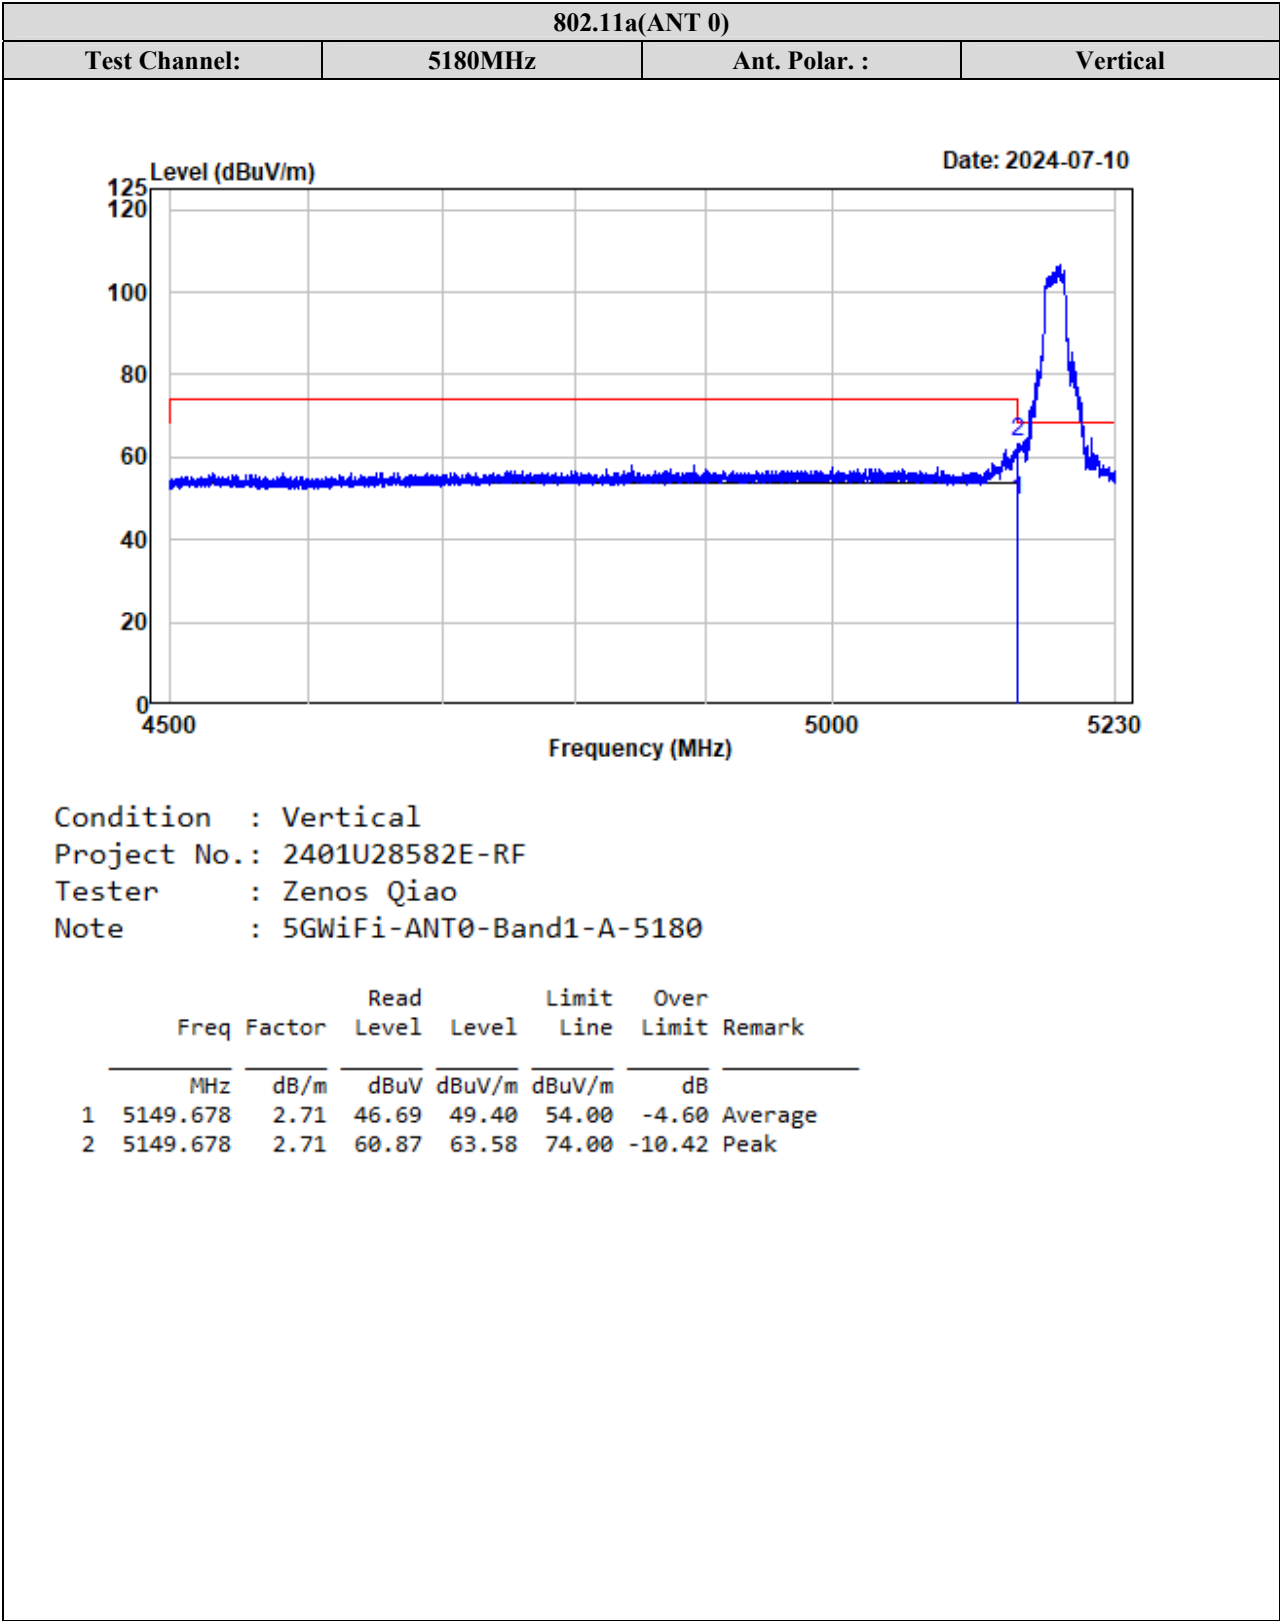

5850~5895 MHz:

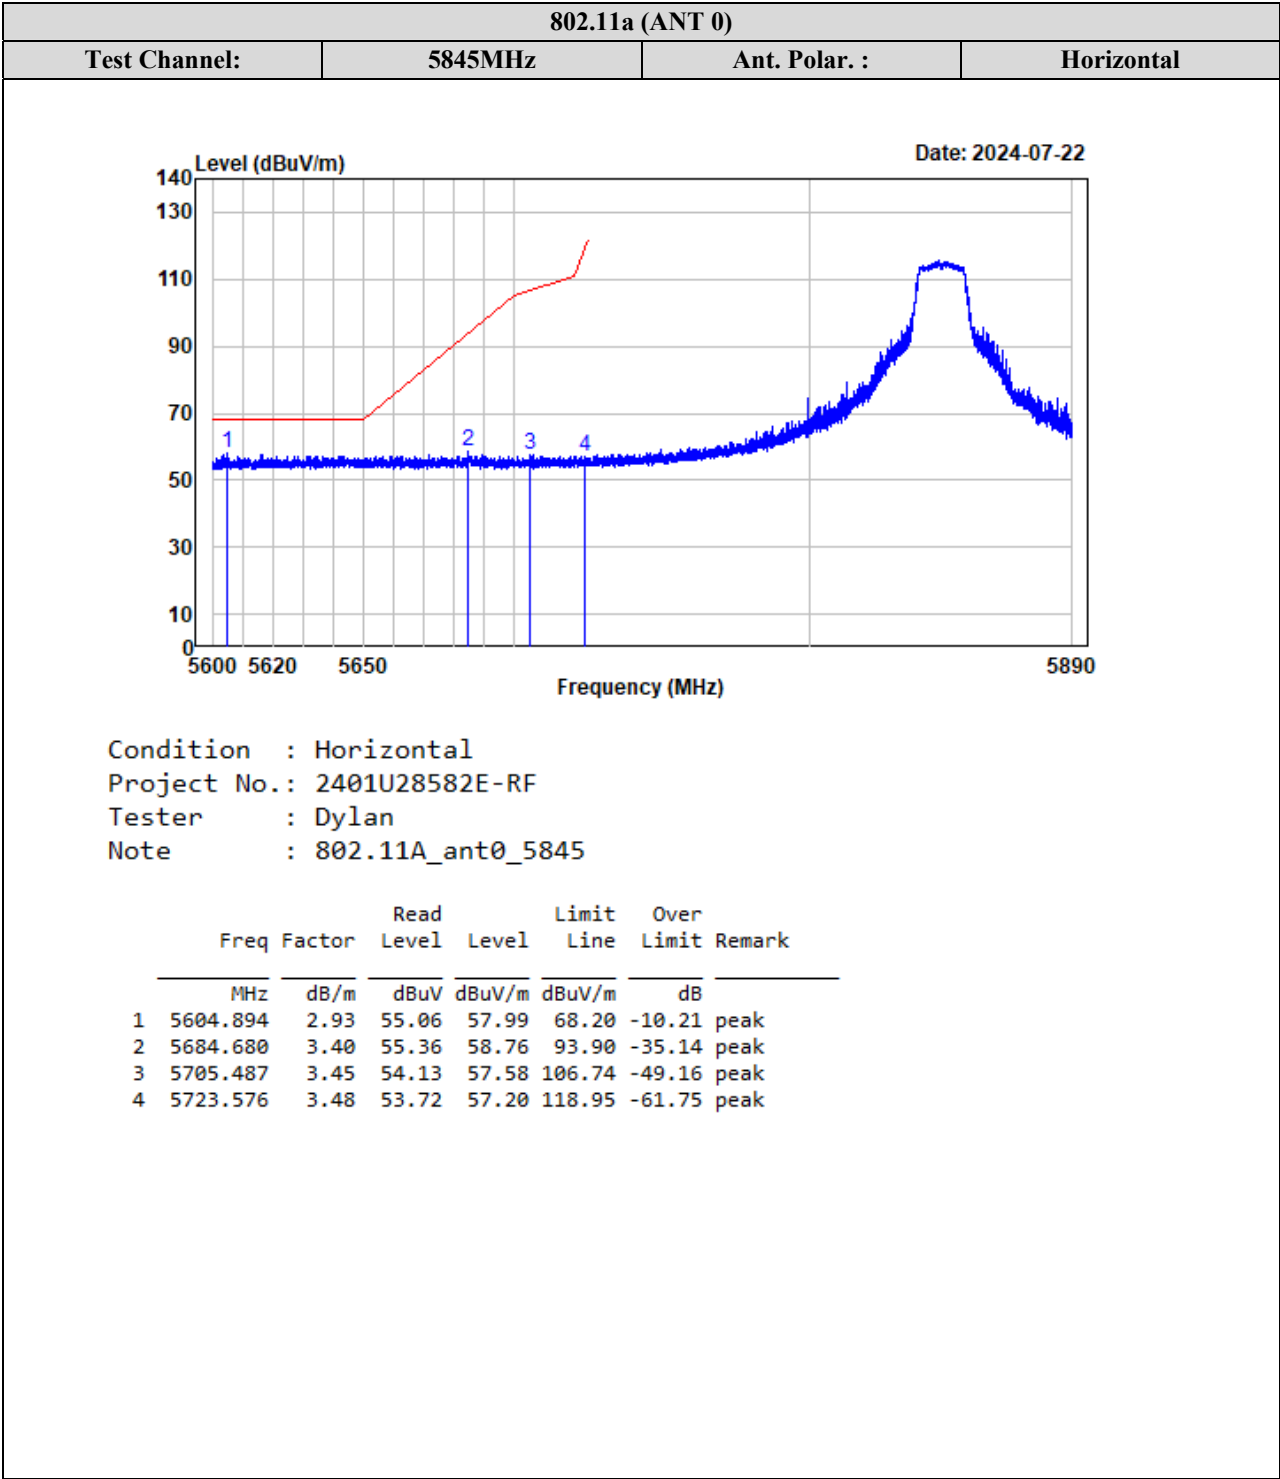


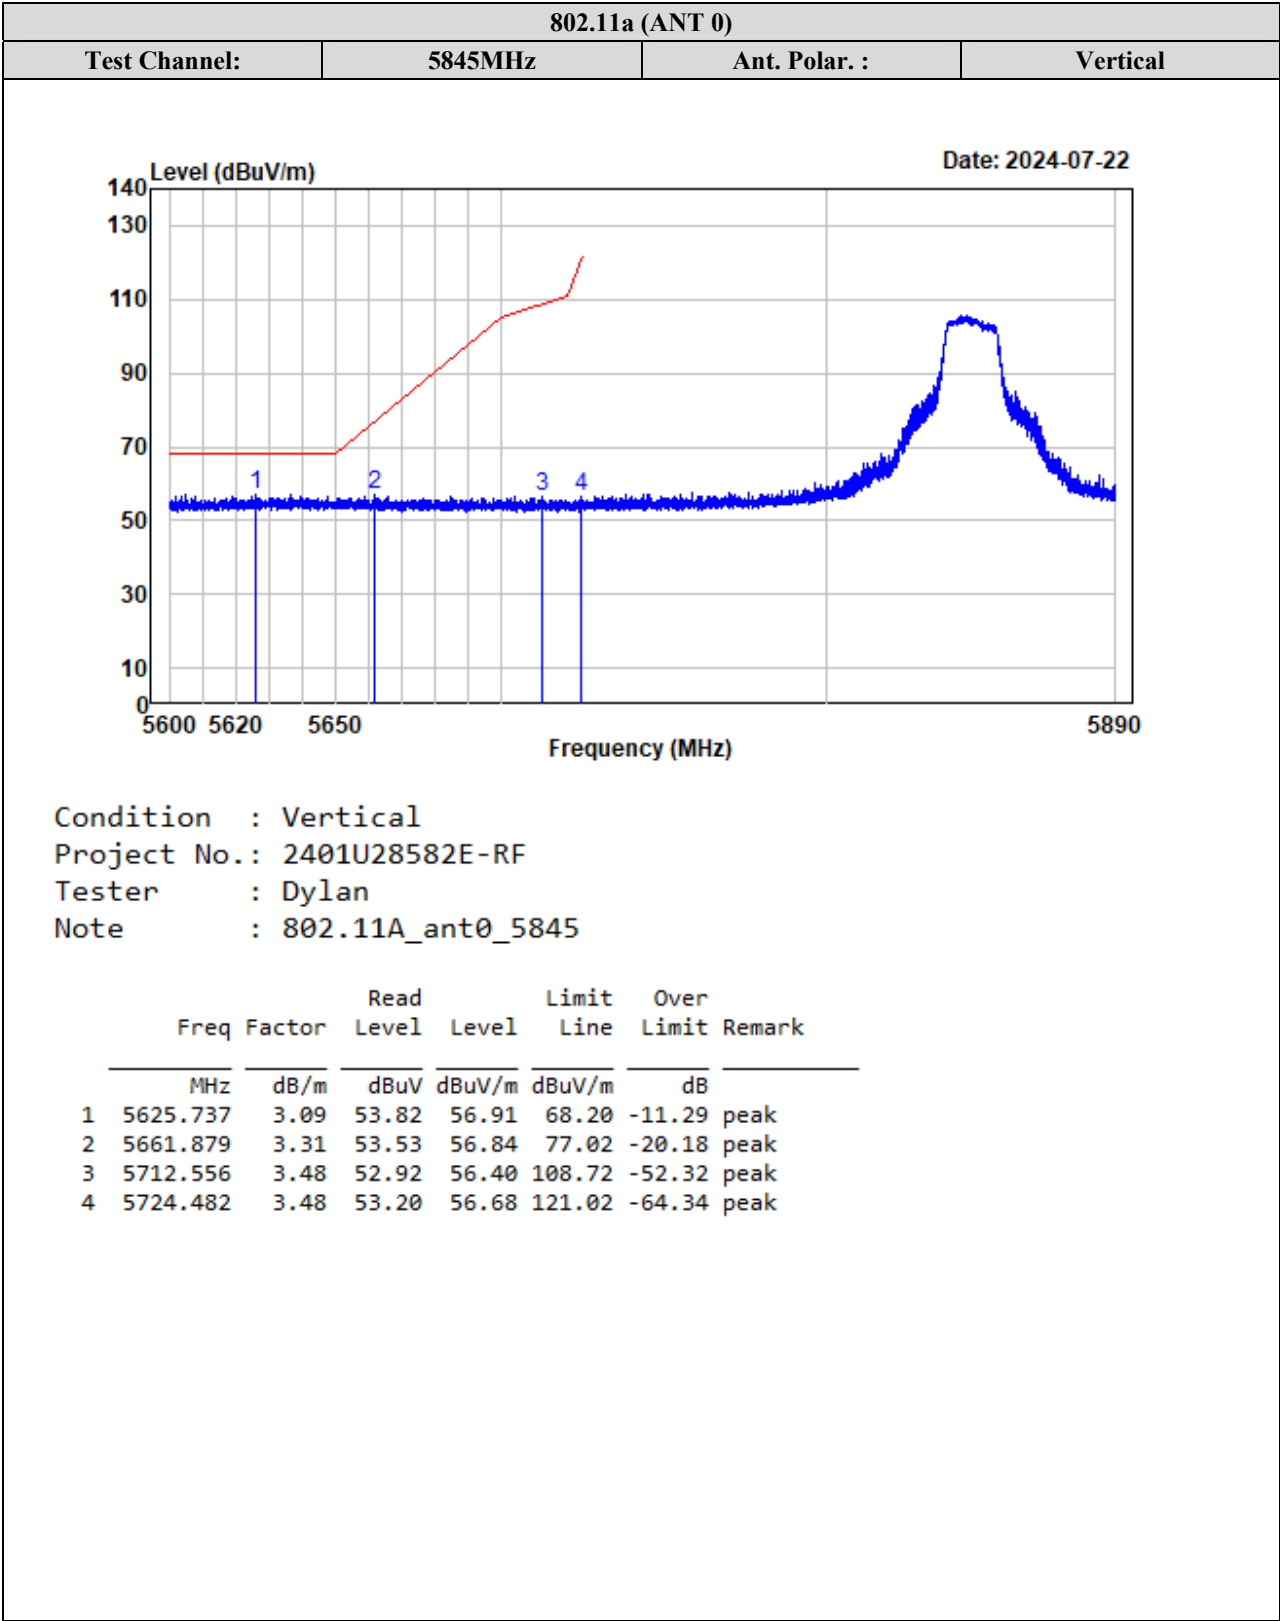



TR-EM-RF015


Page 74 of 628


Version 3.0

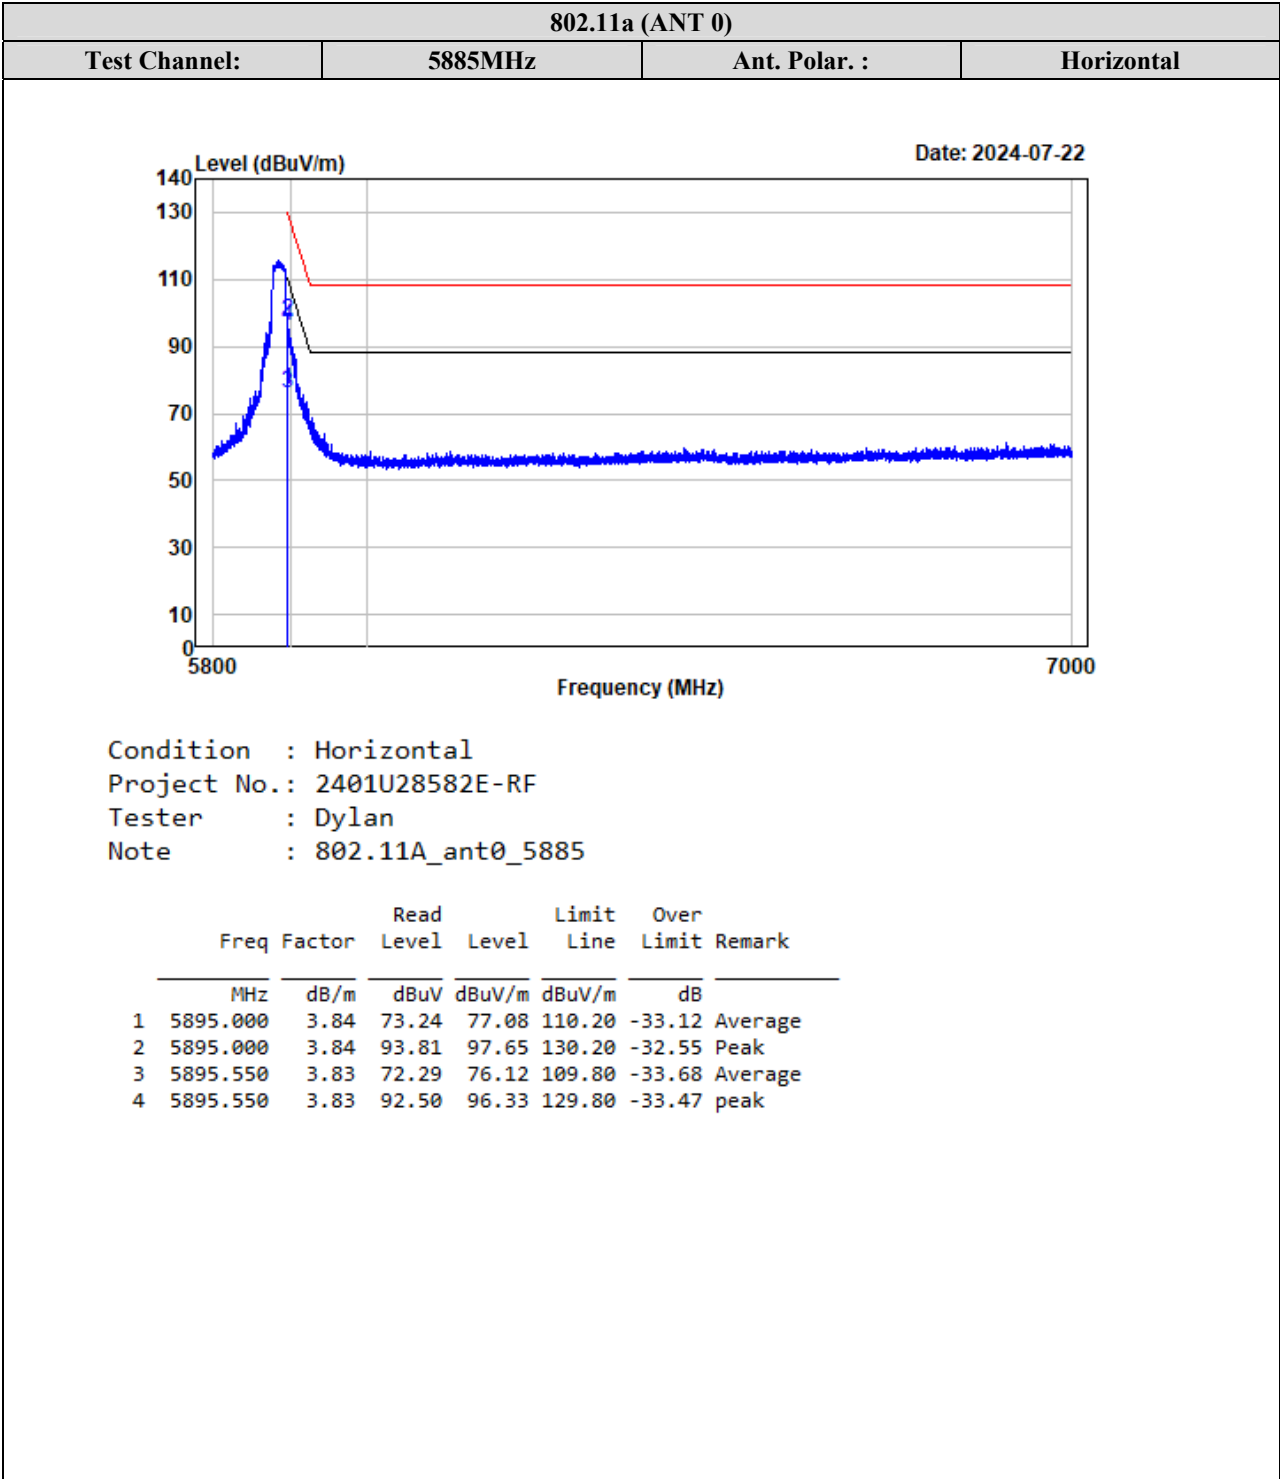


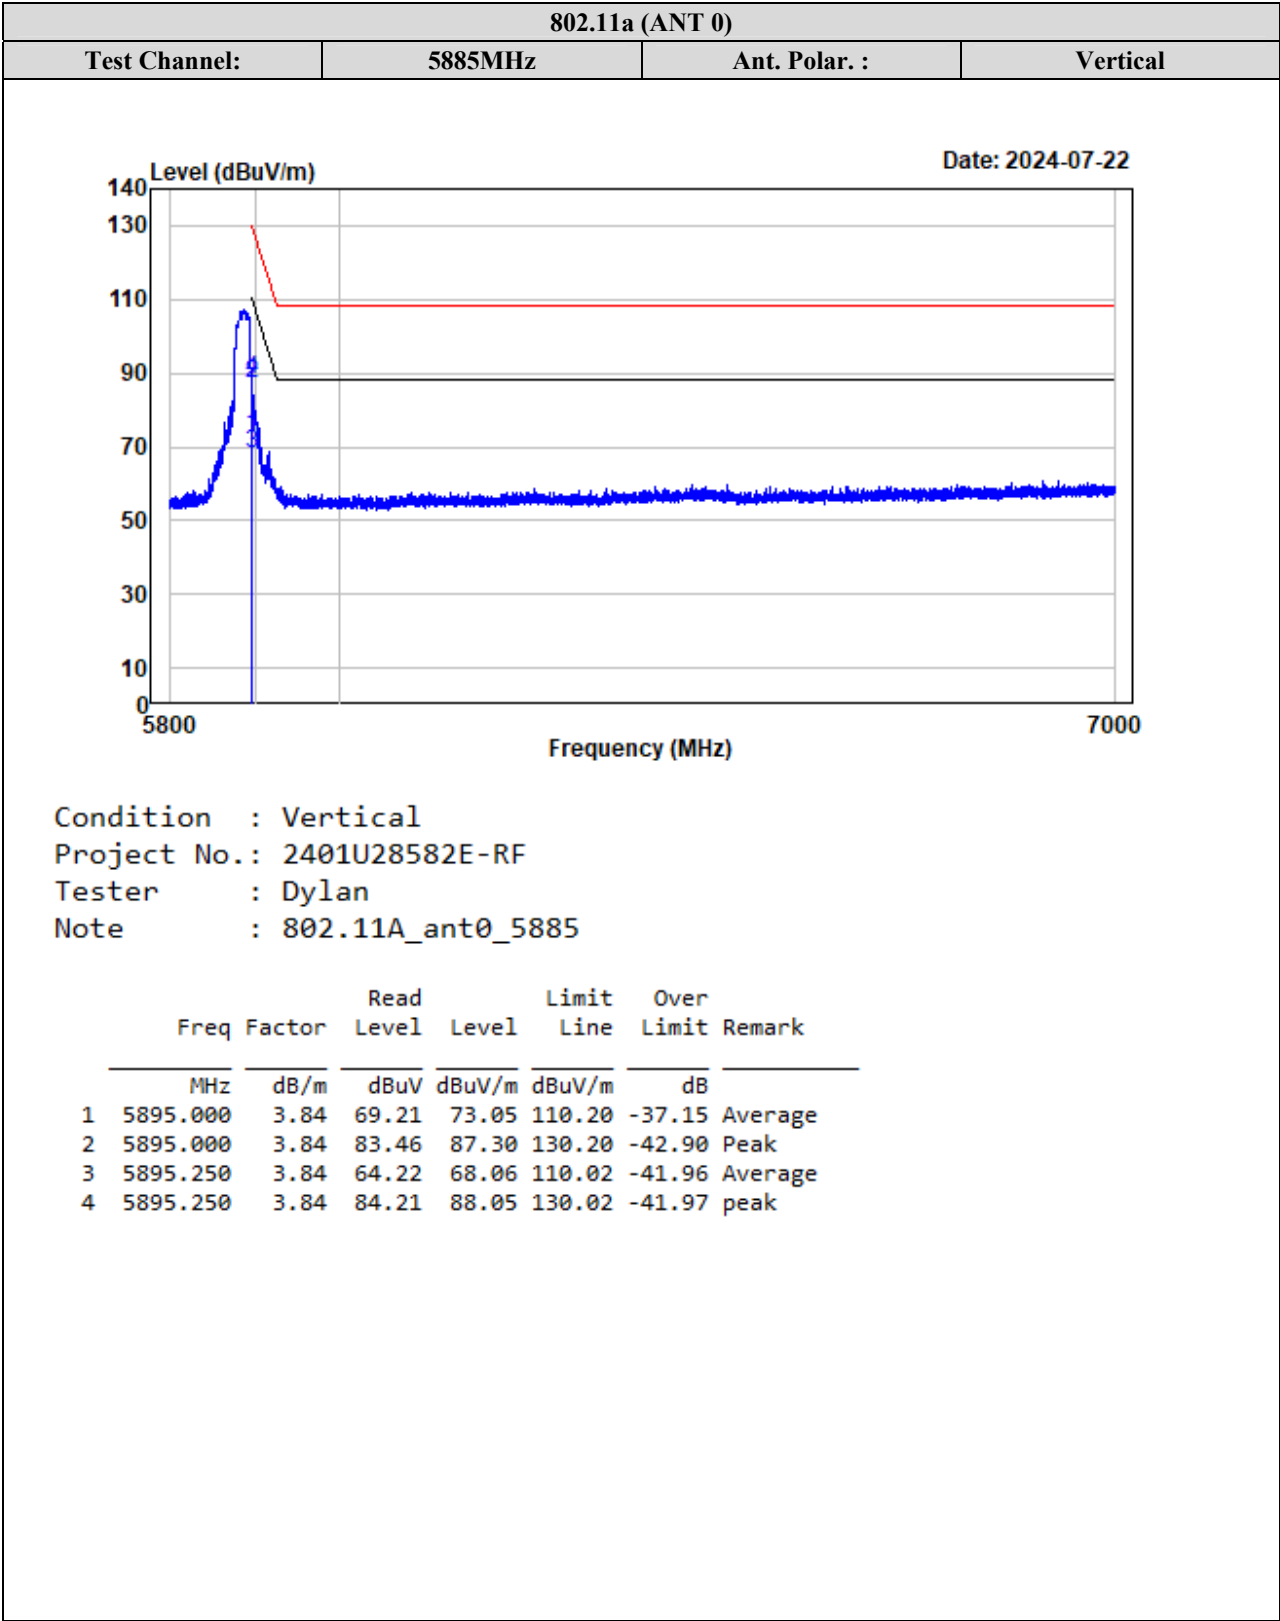


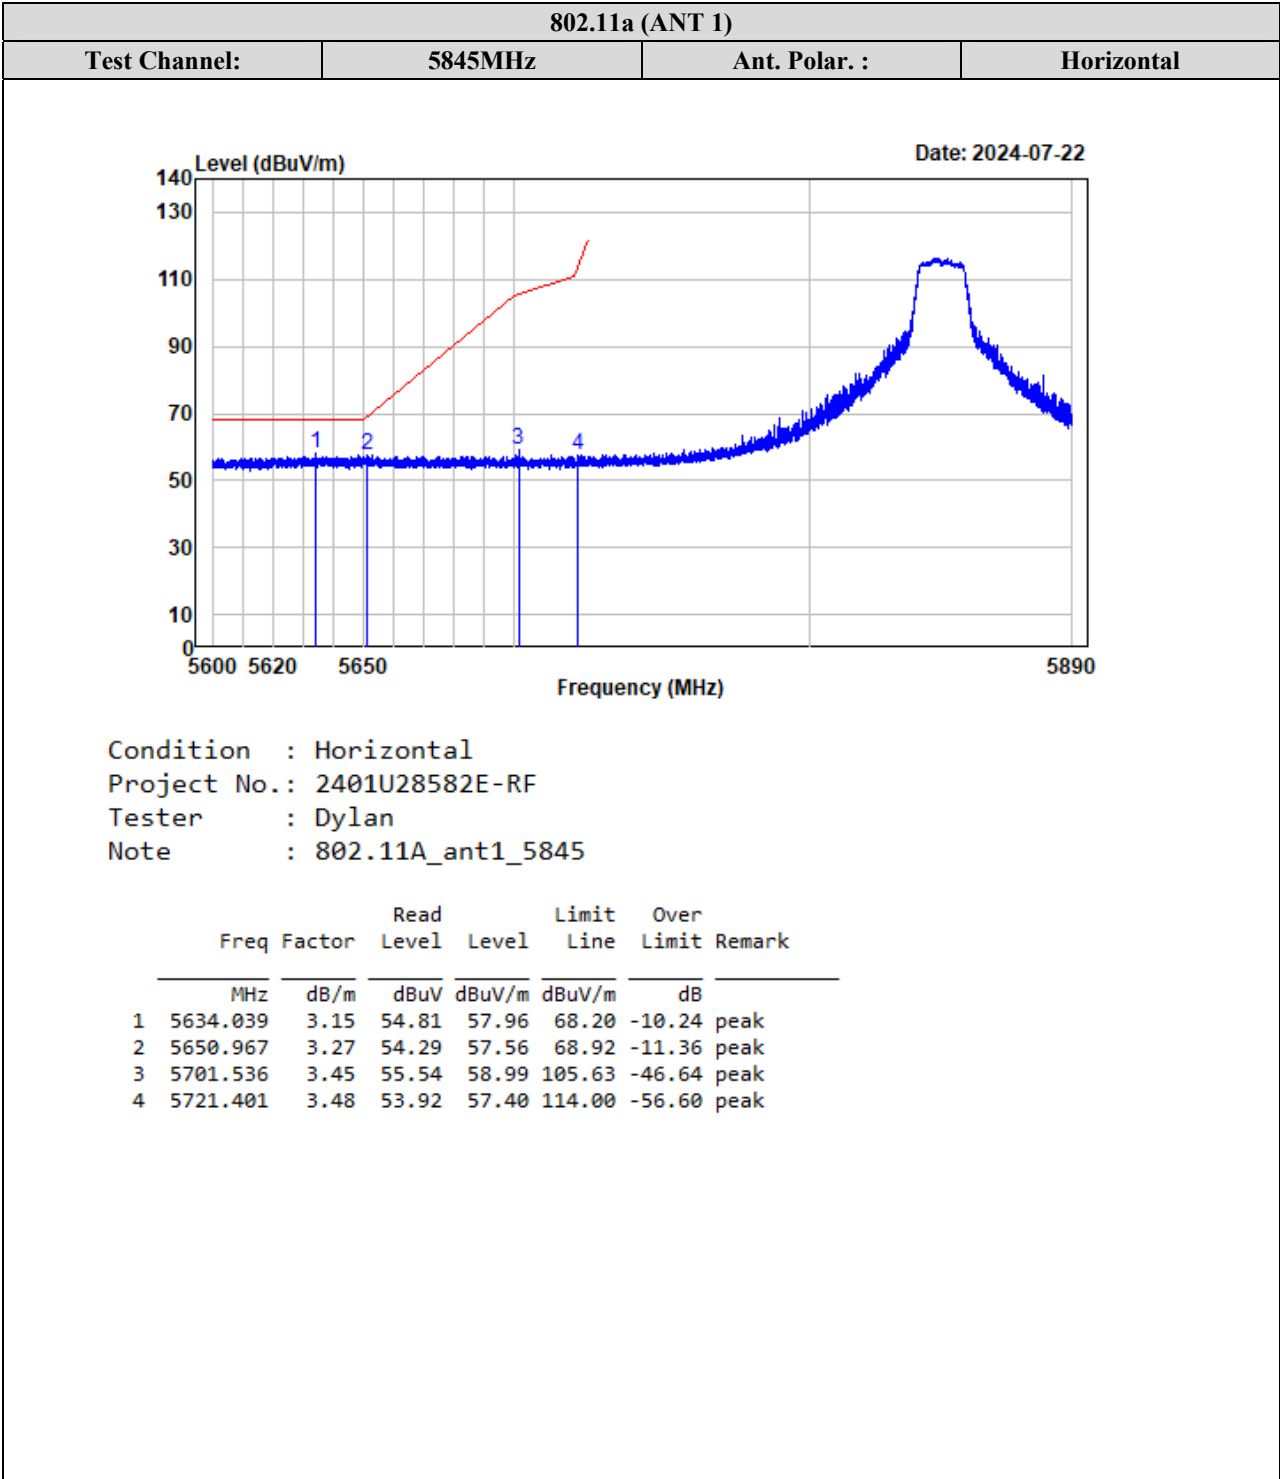


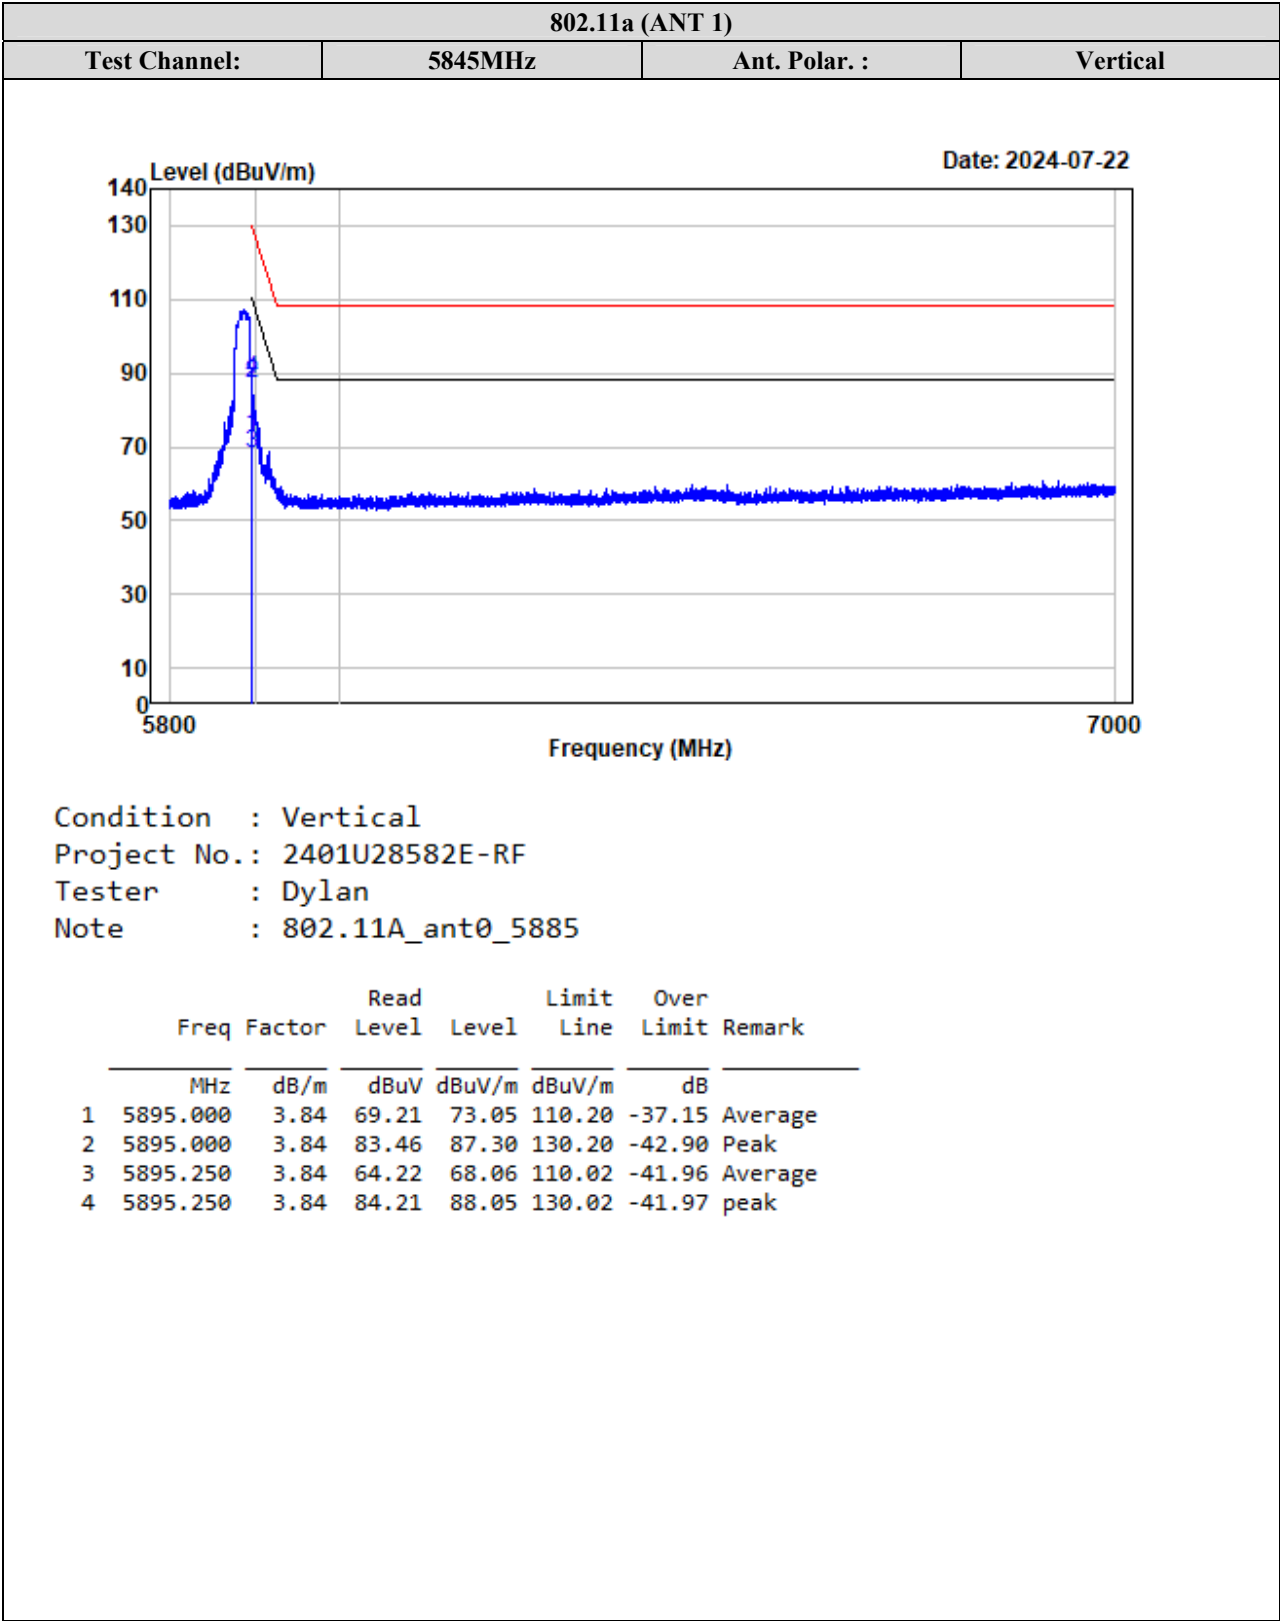


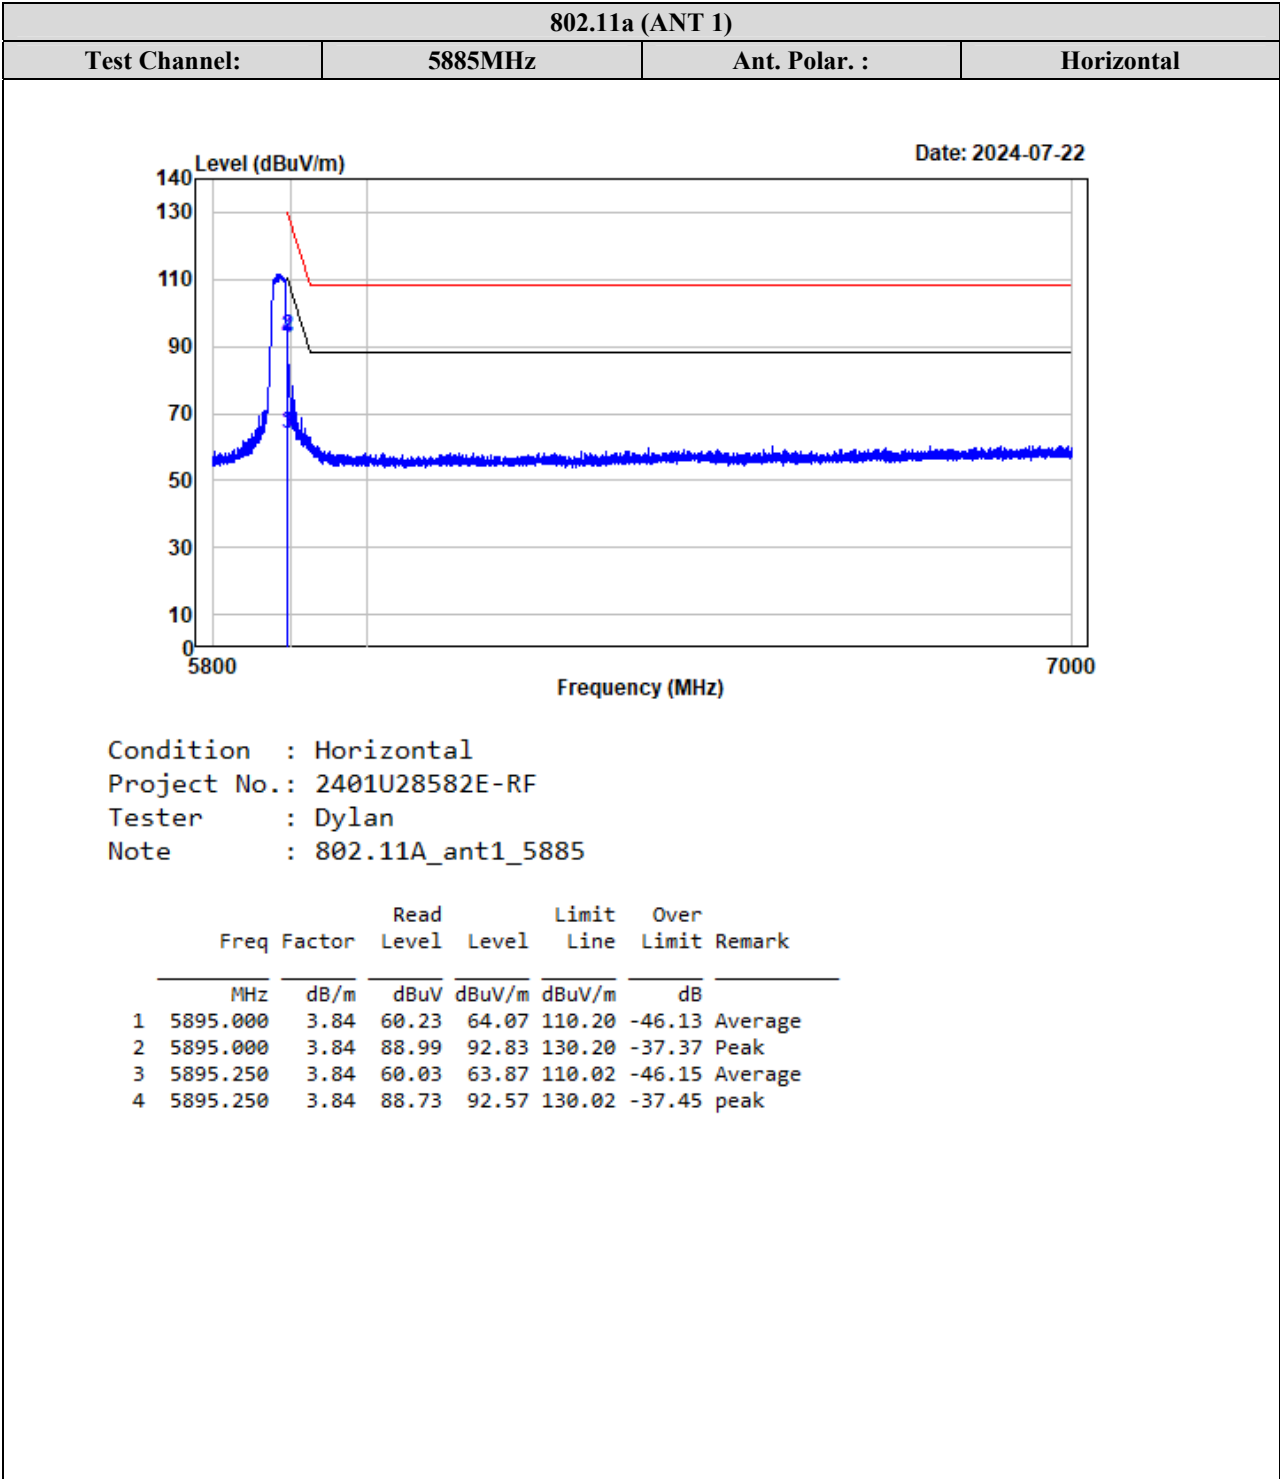


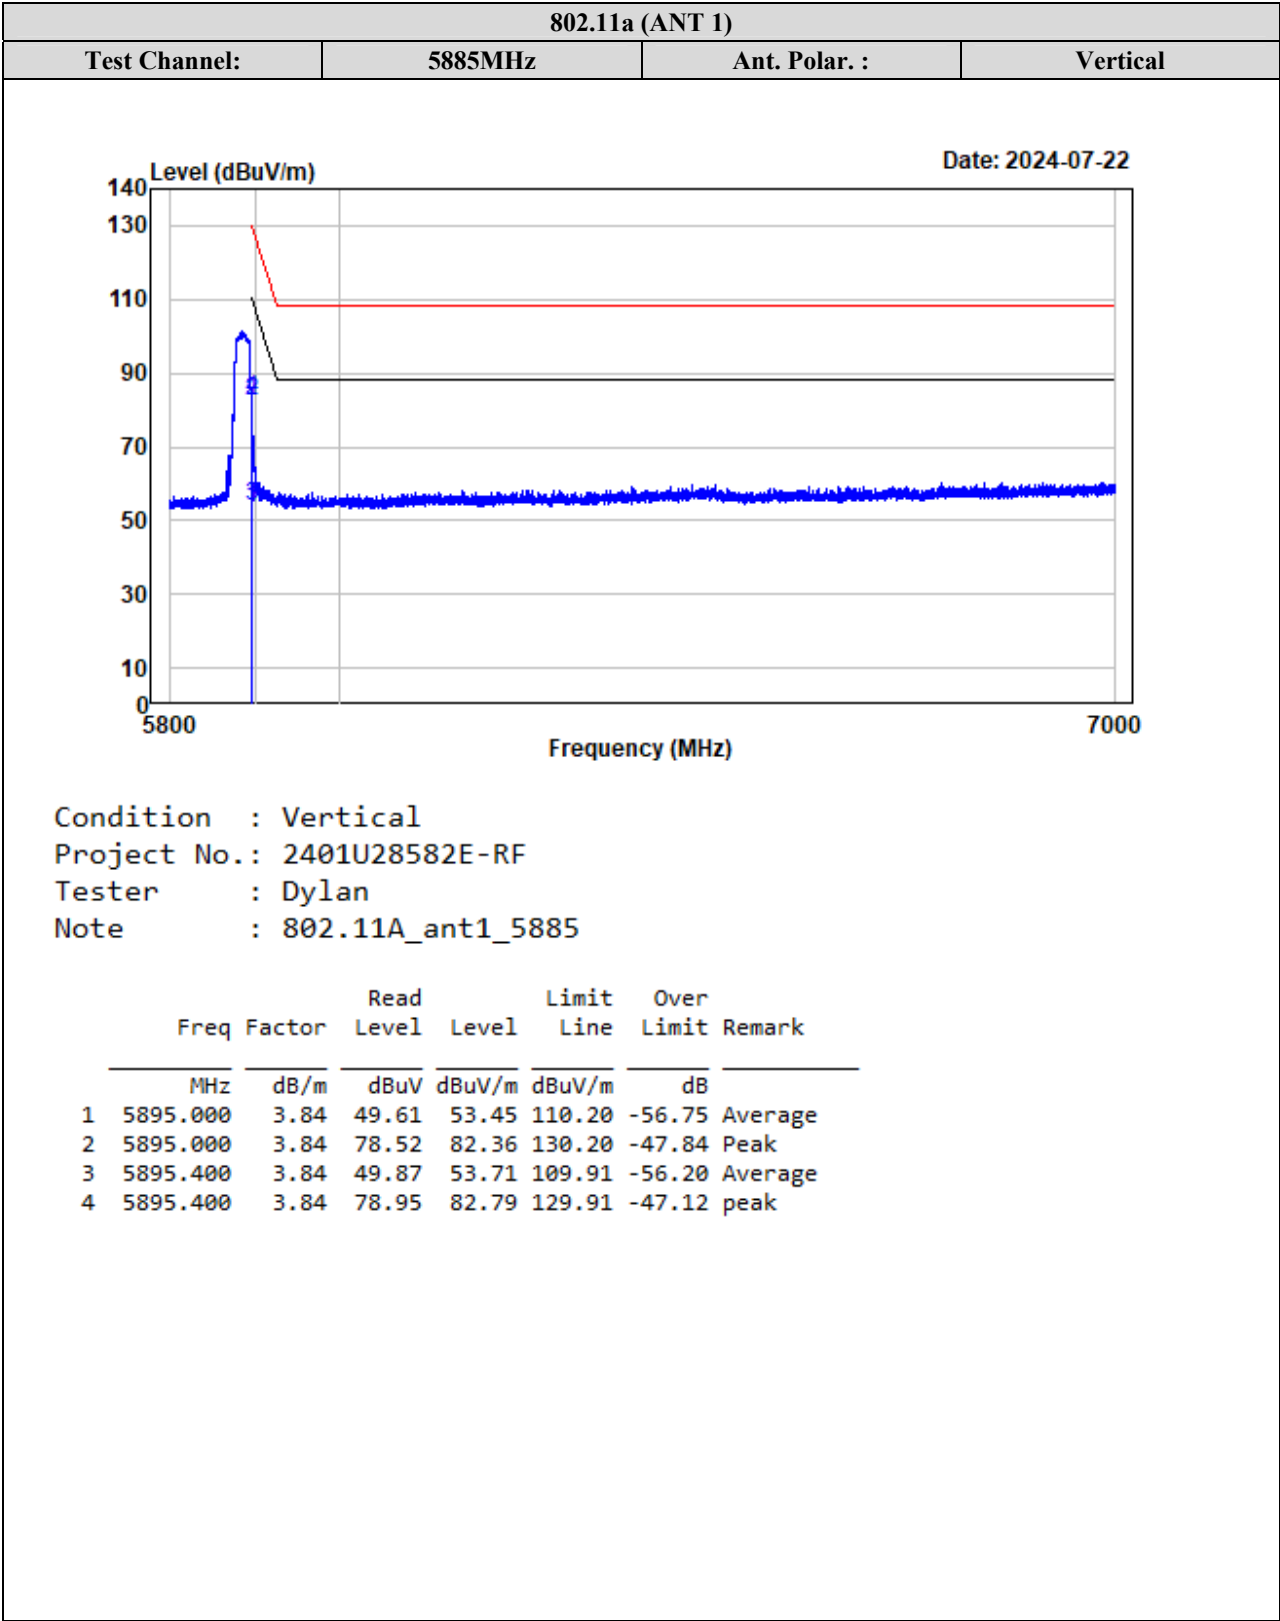


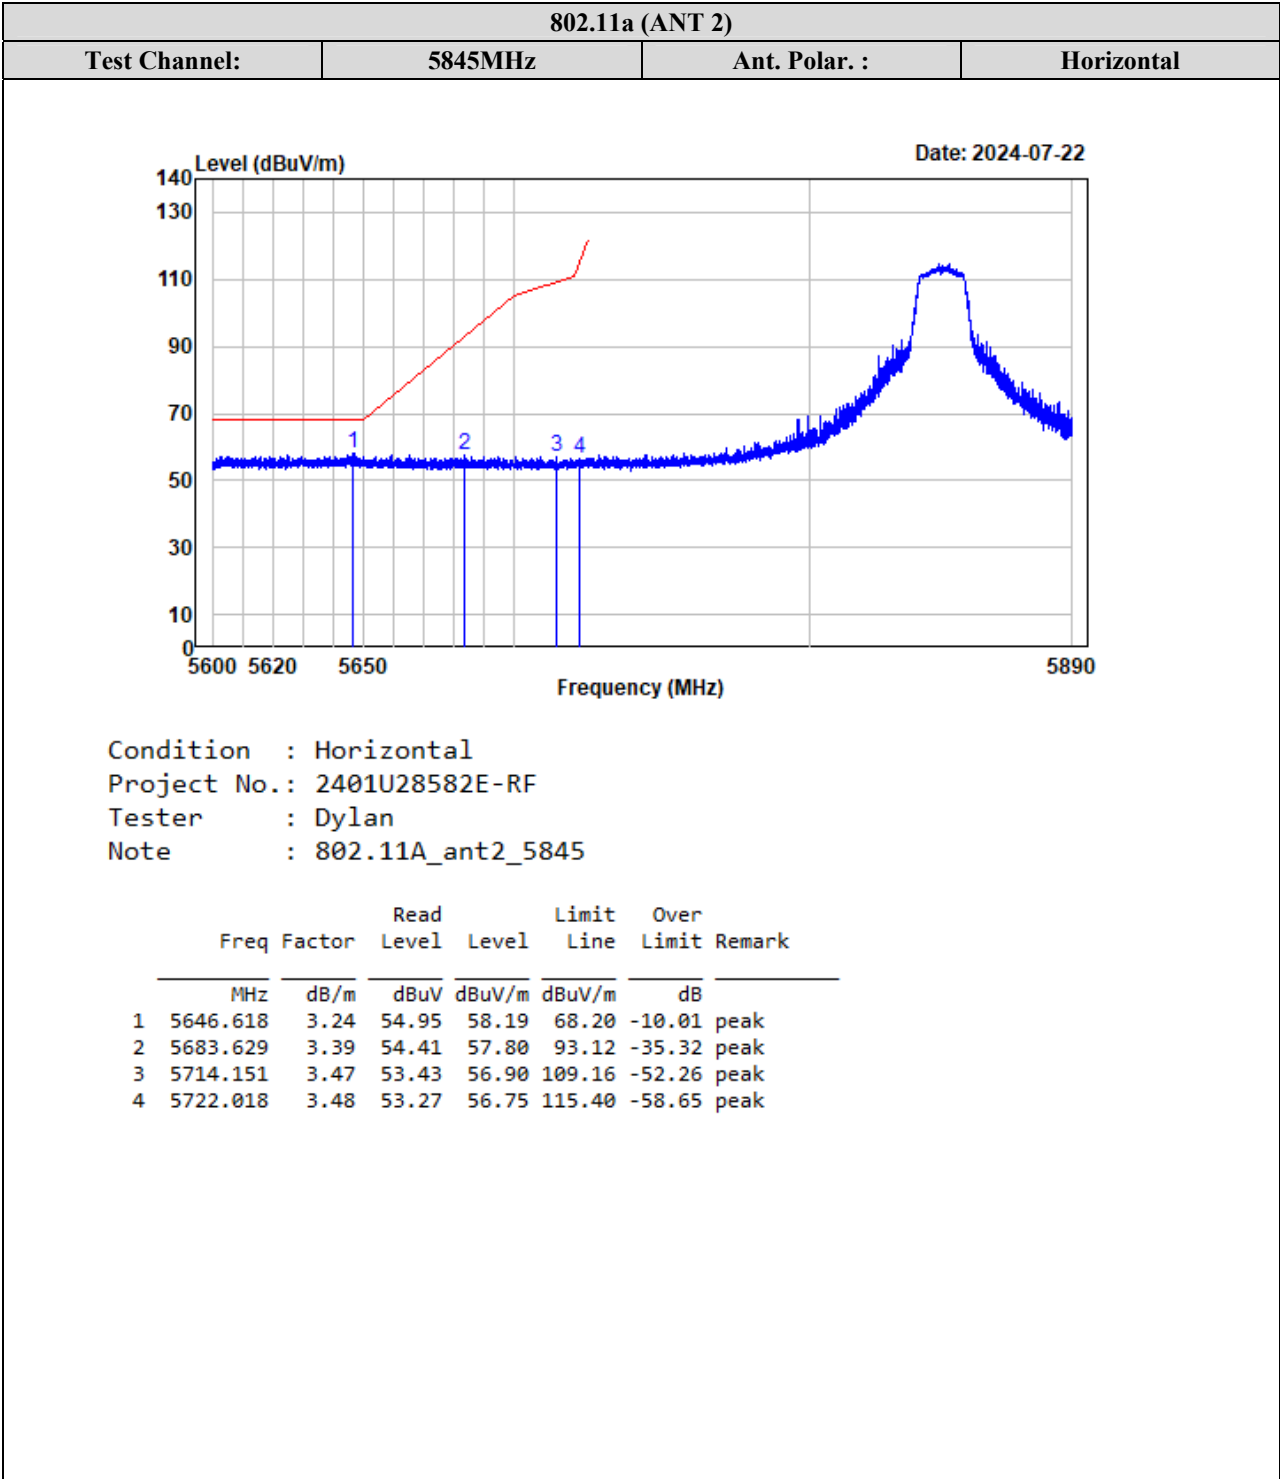


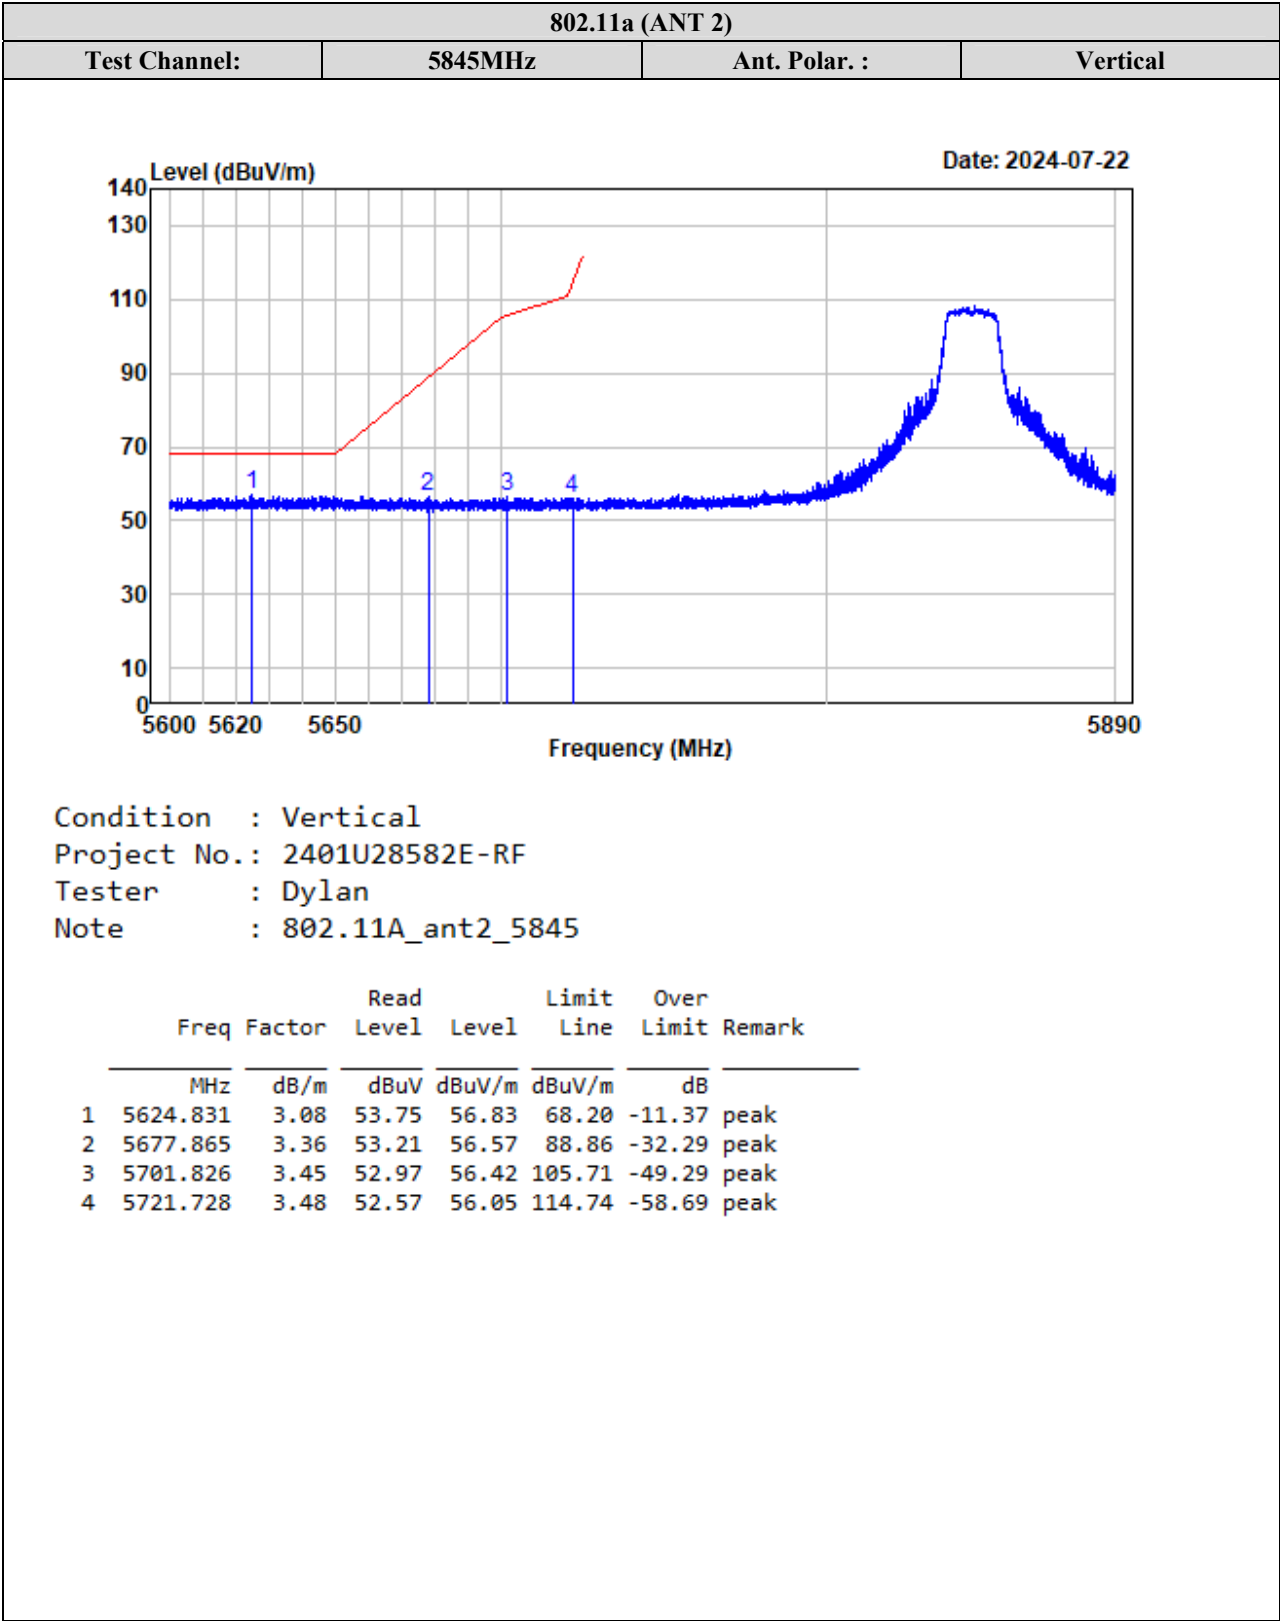


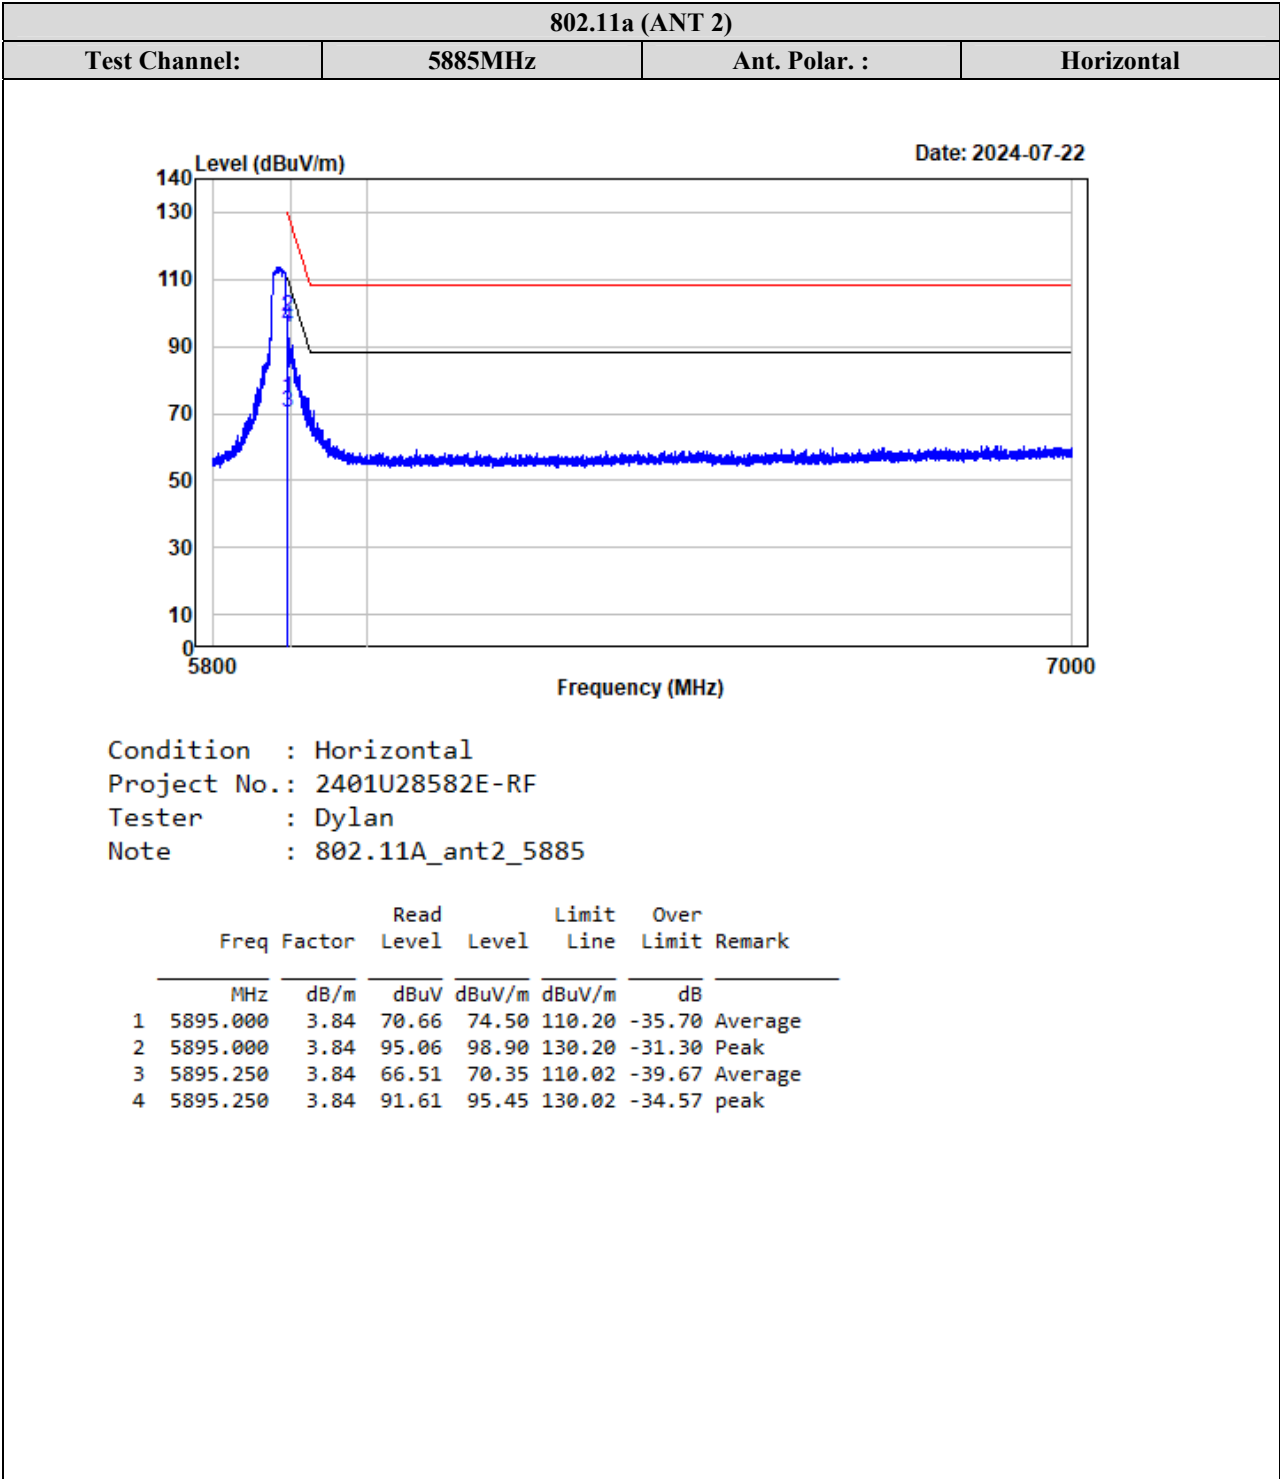


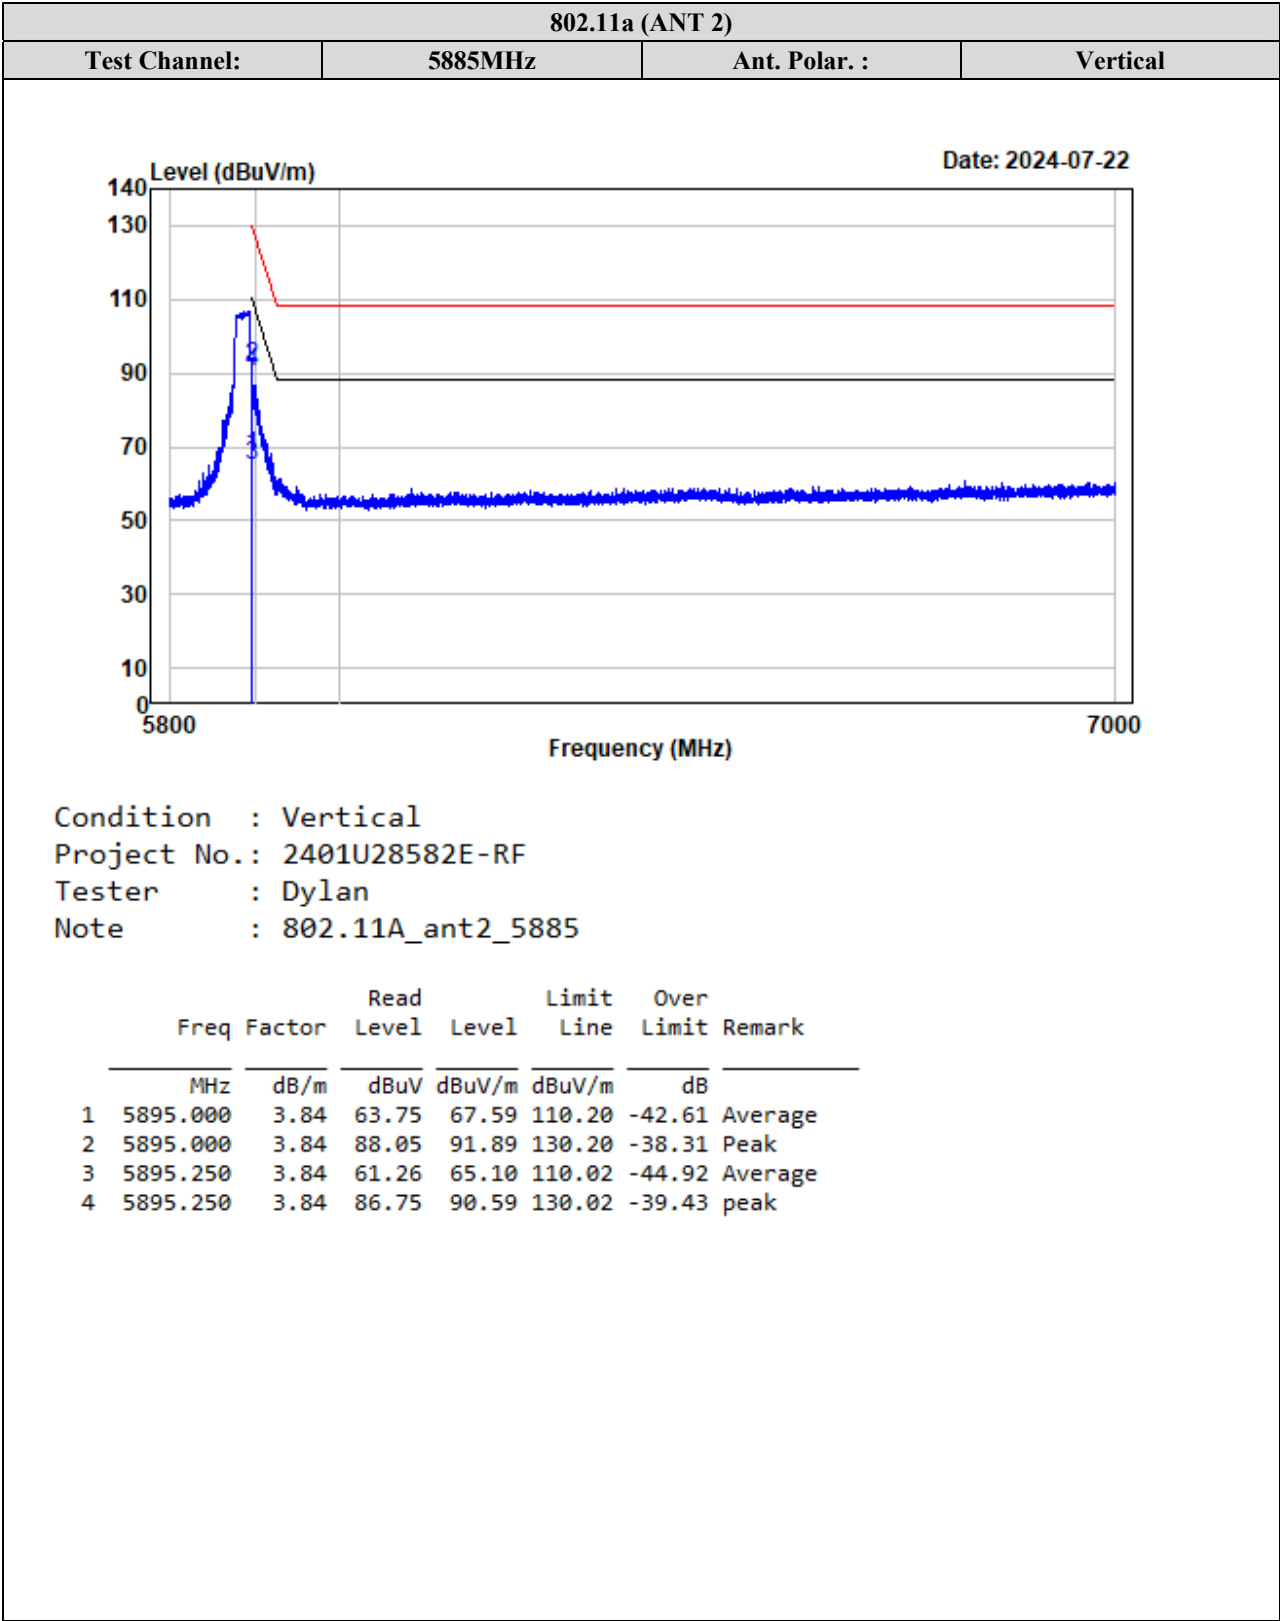


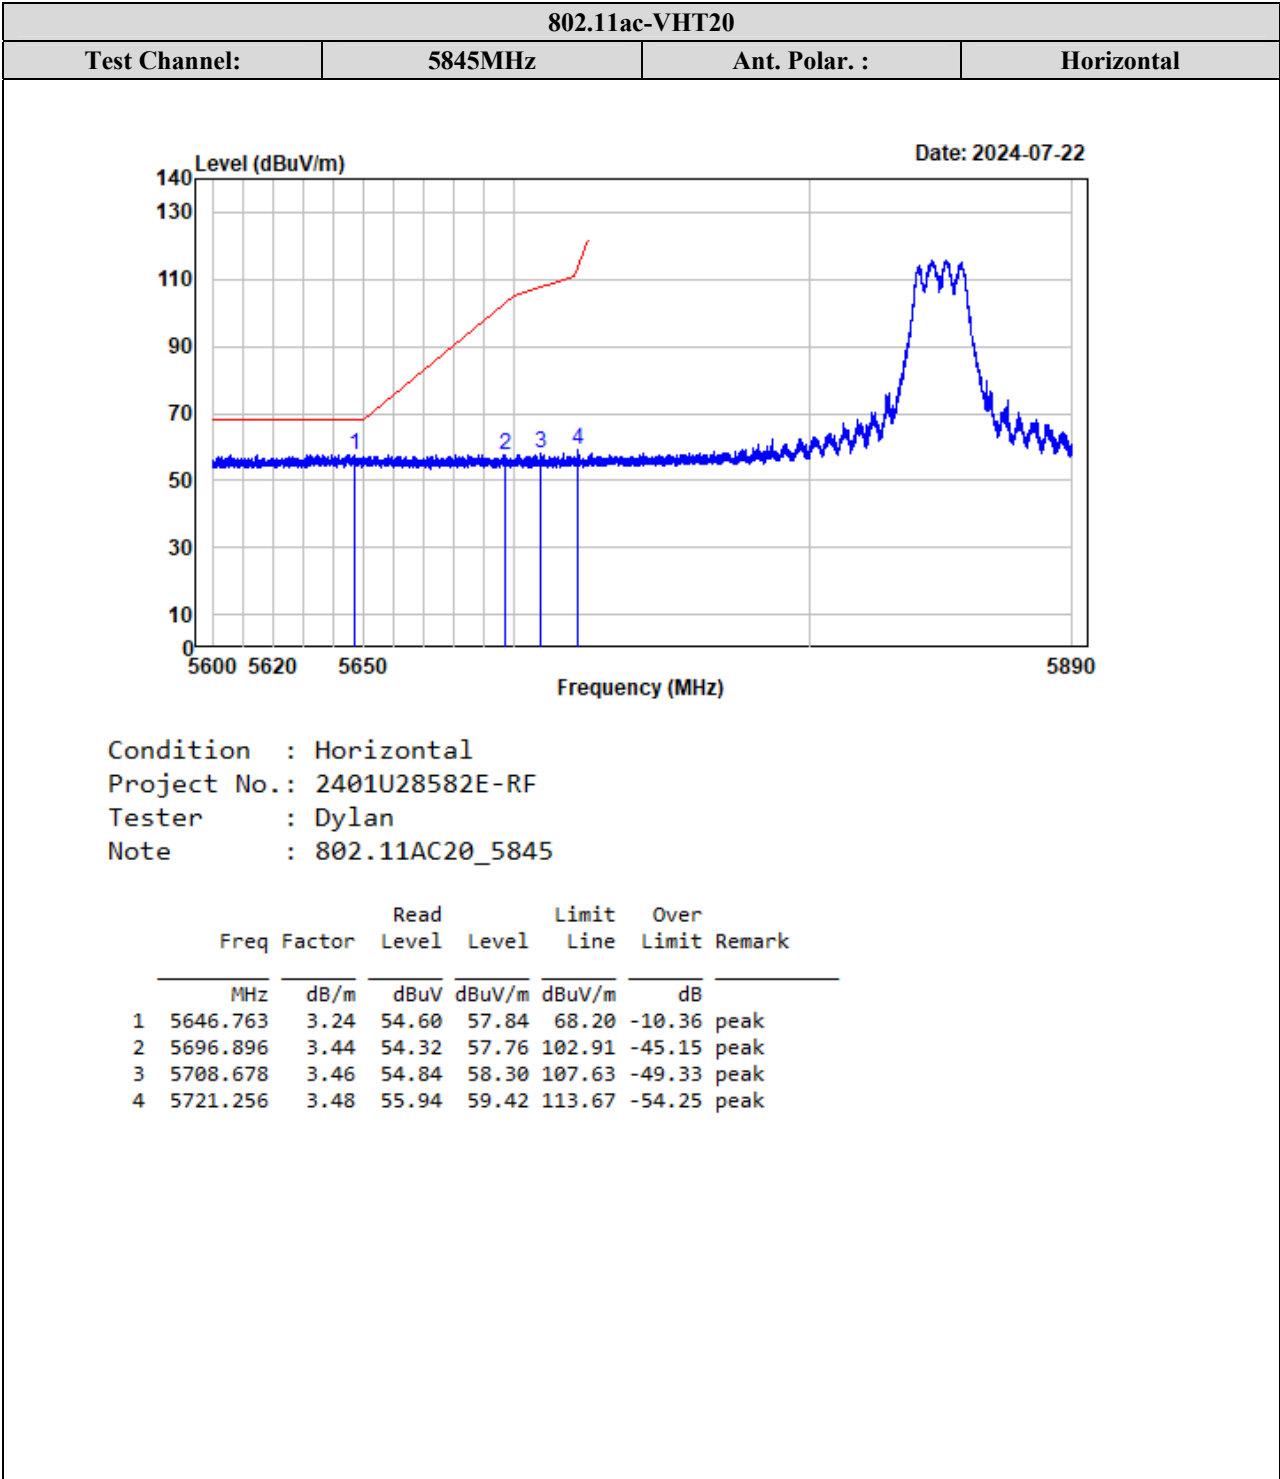


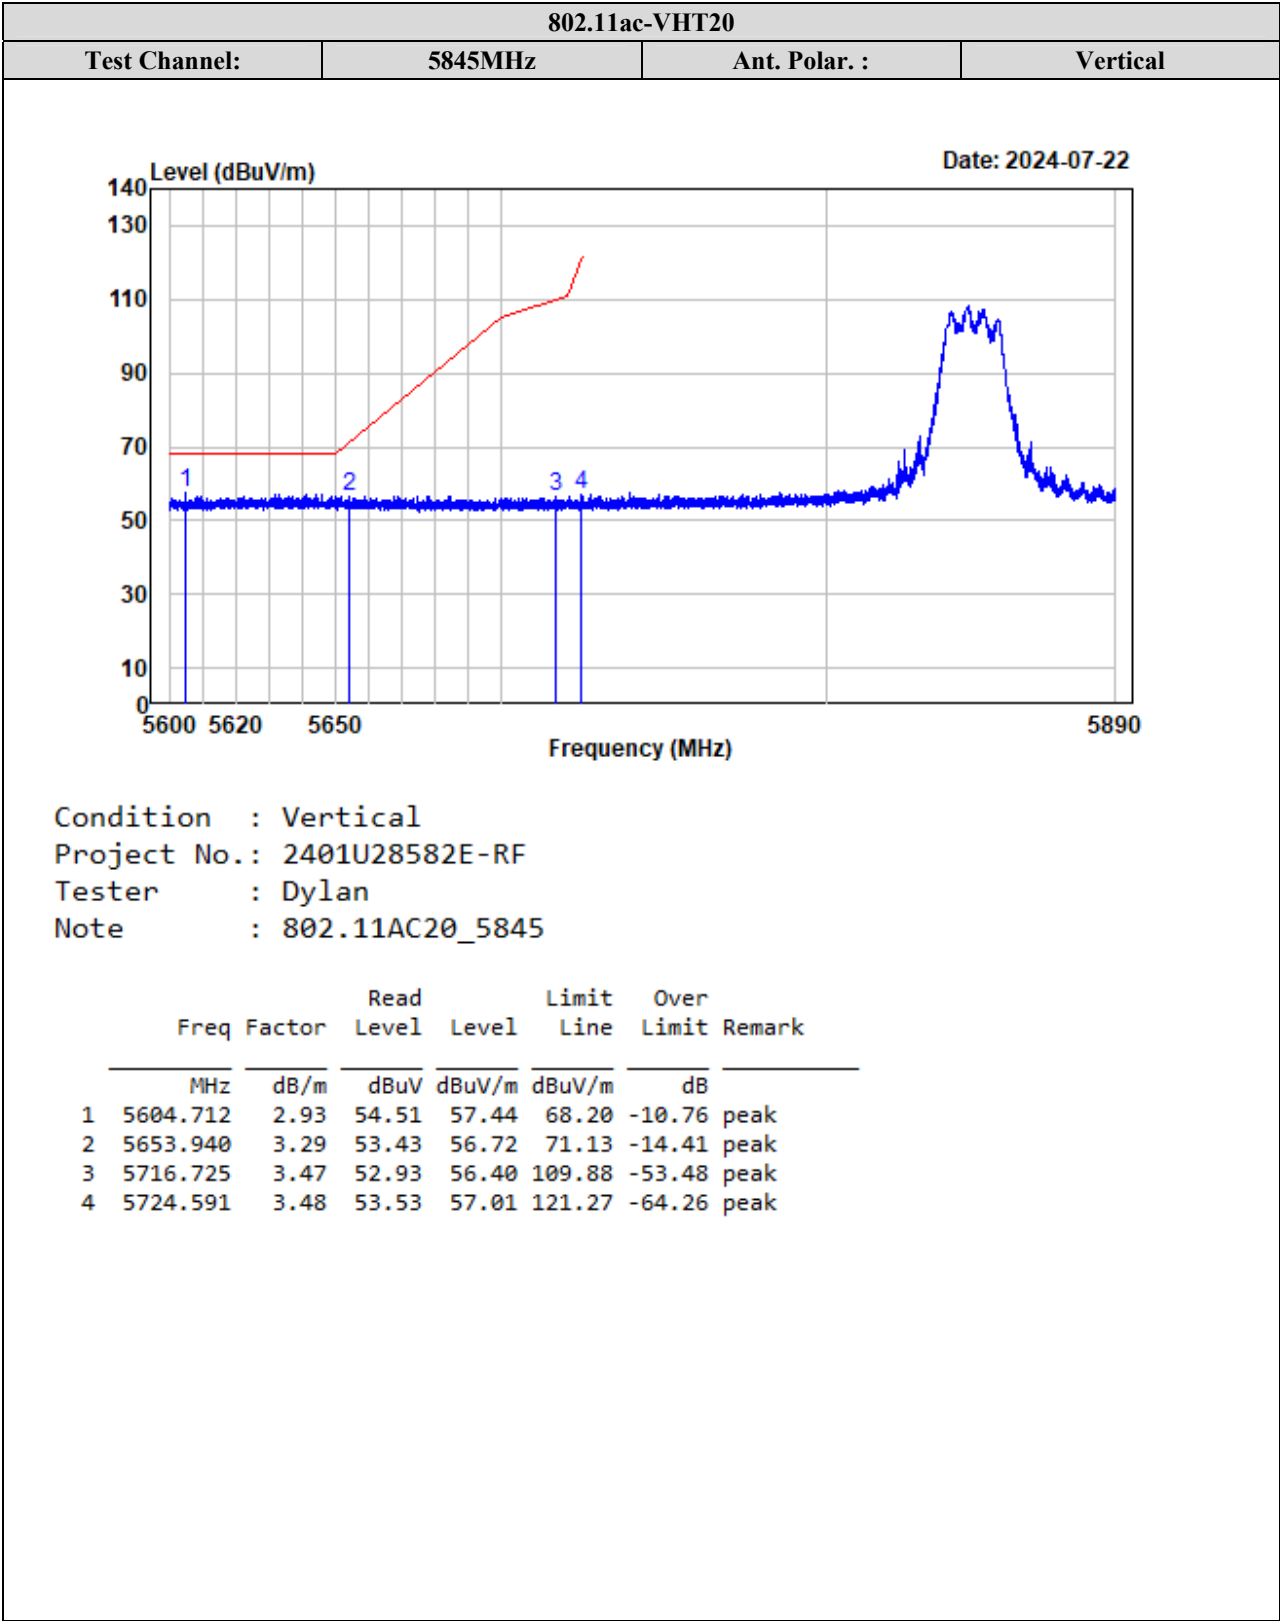


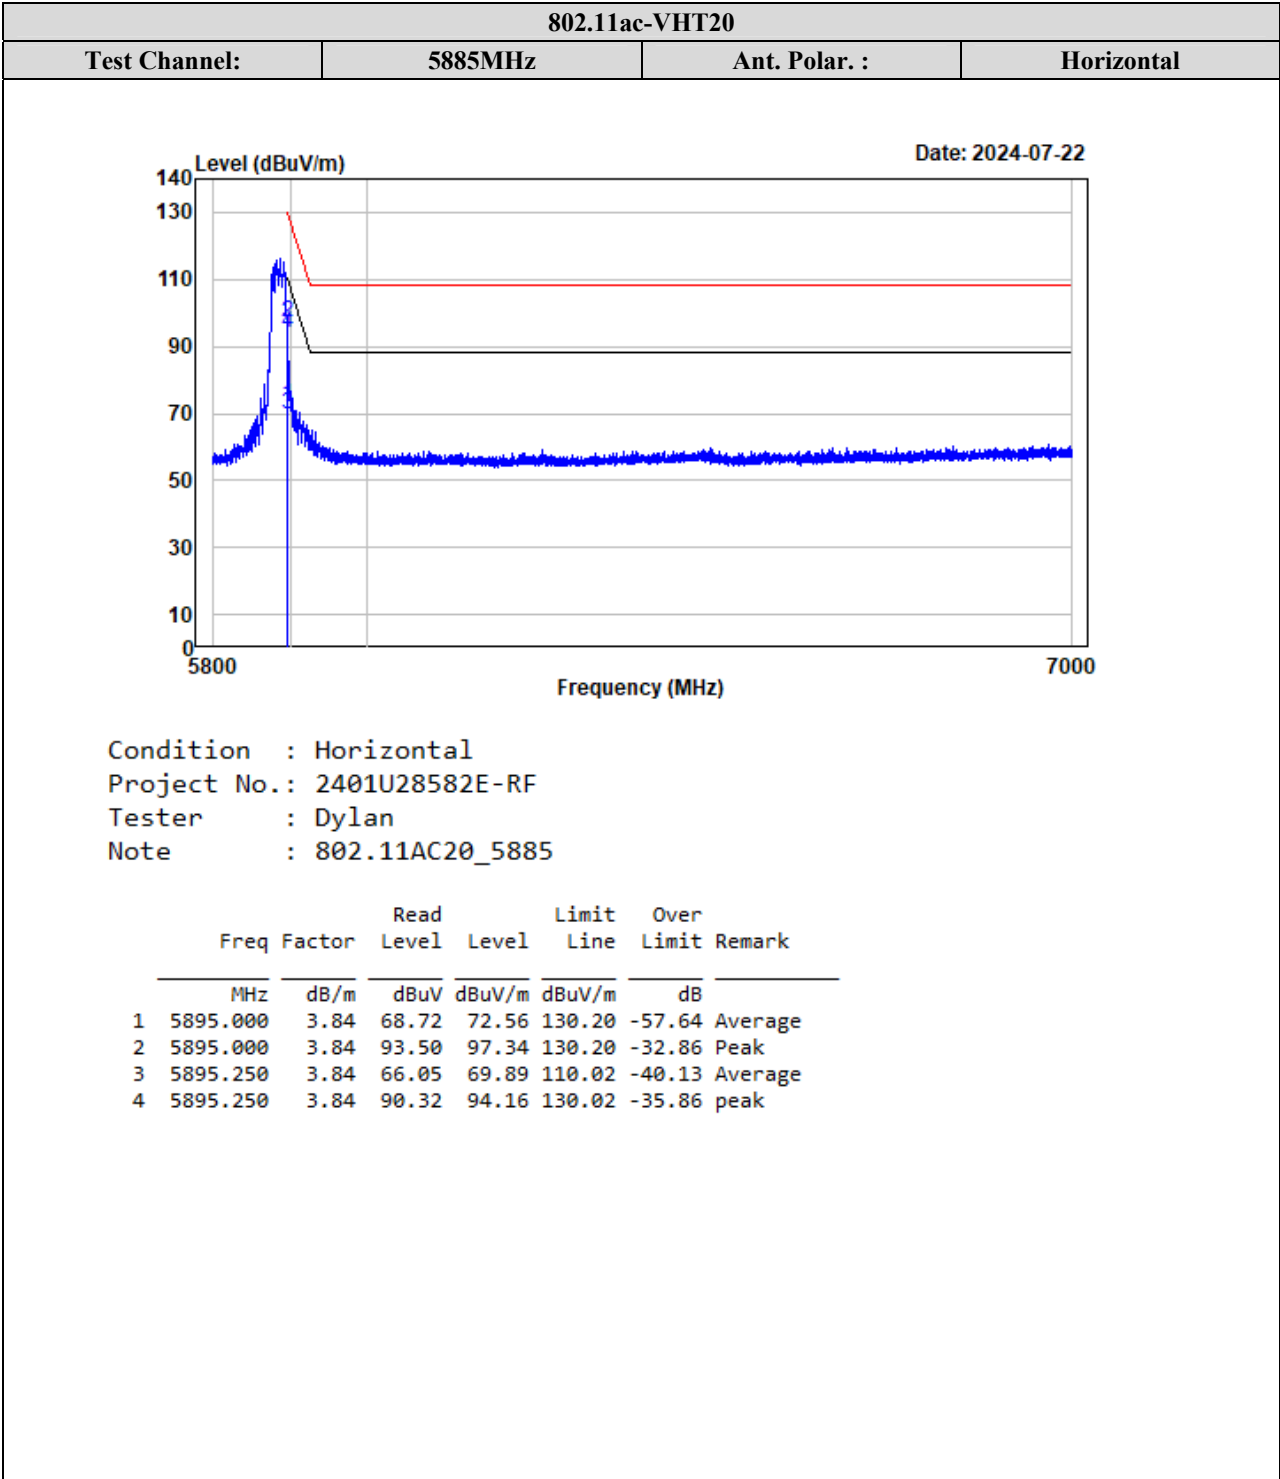


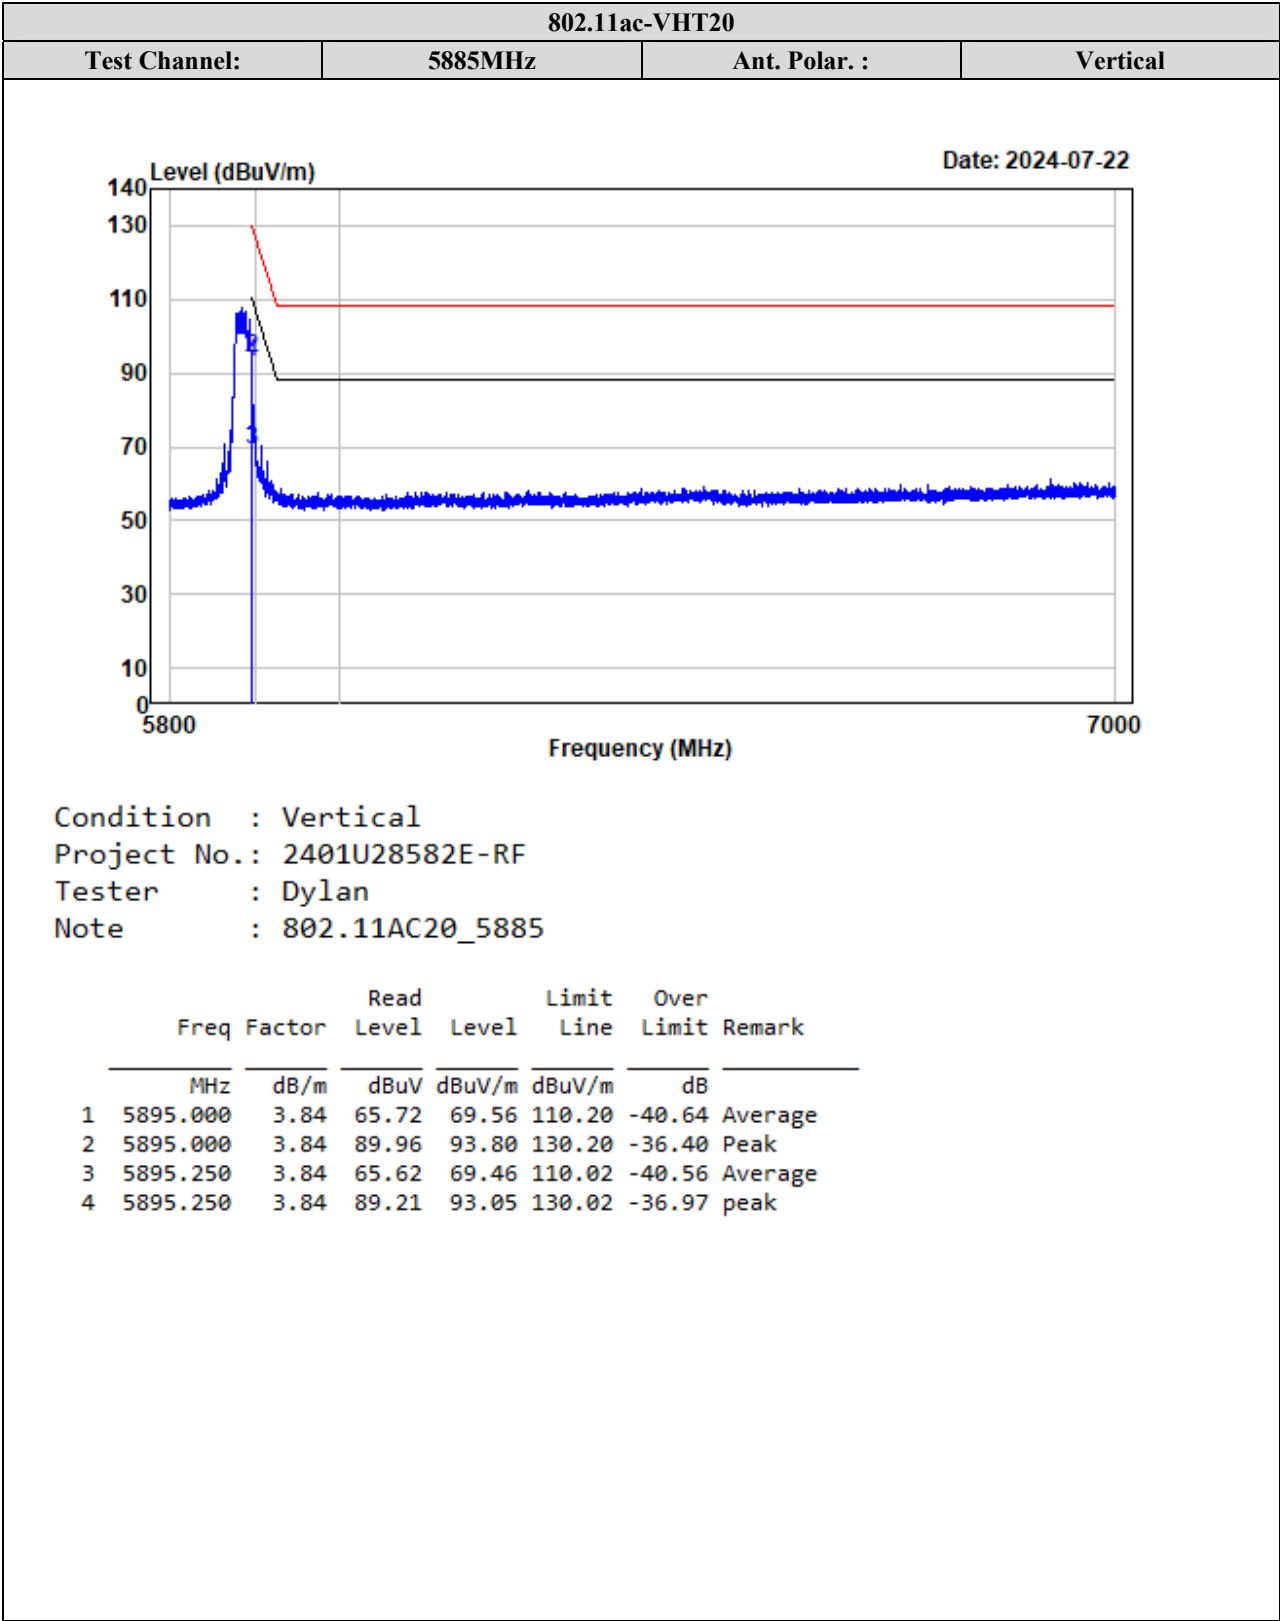


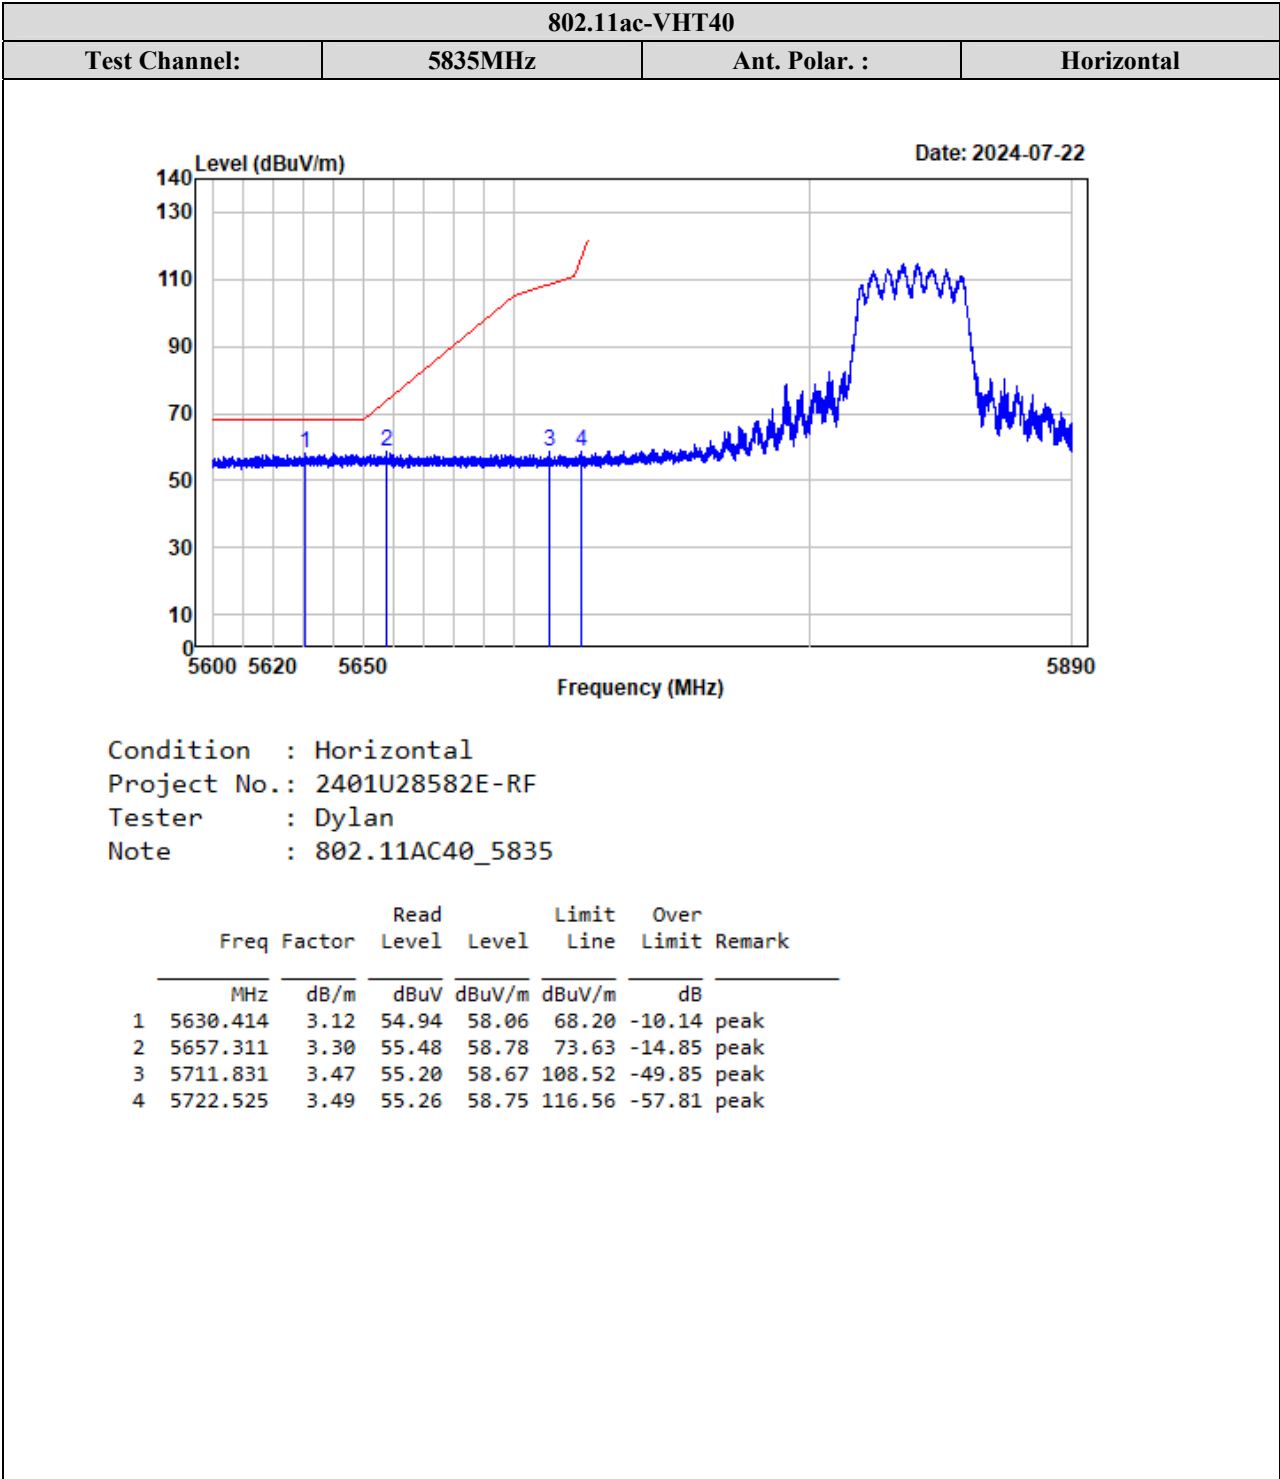


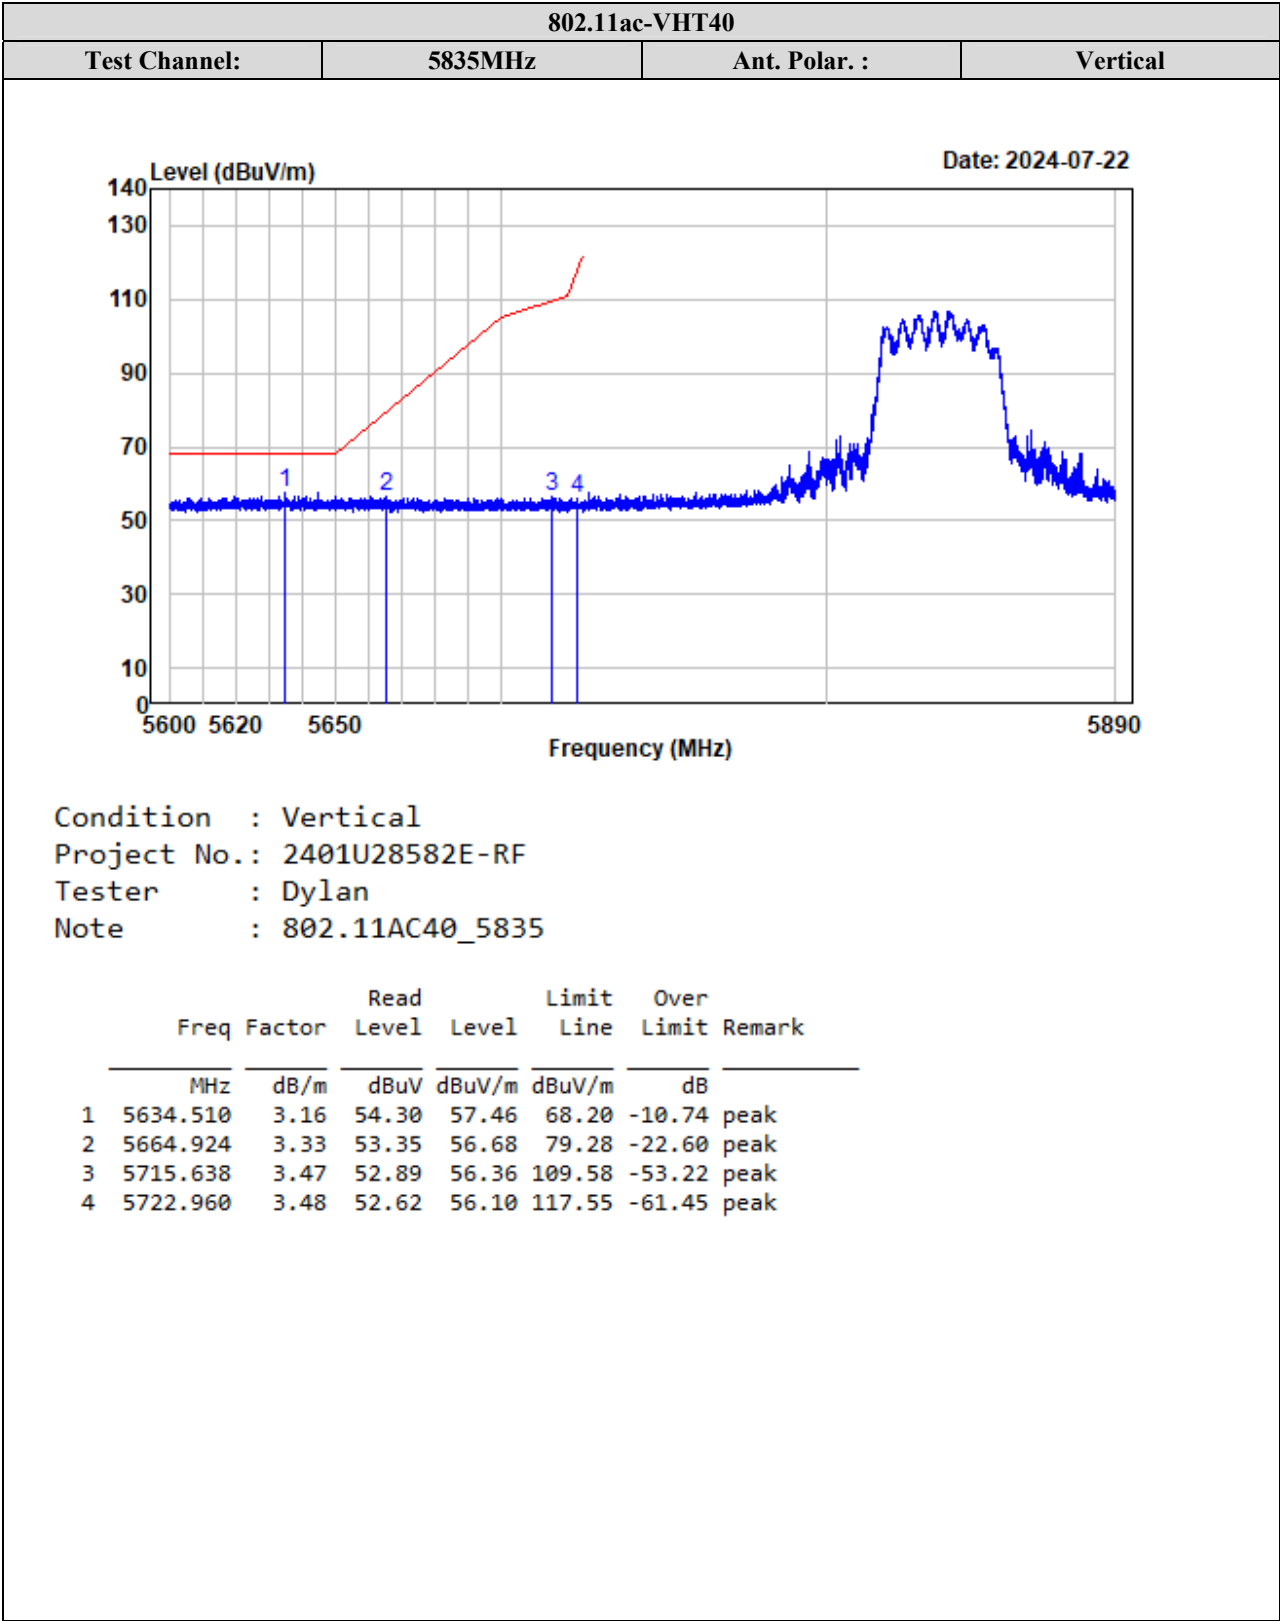


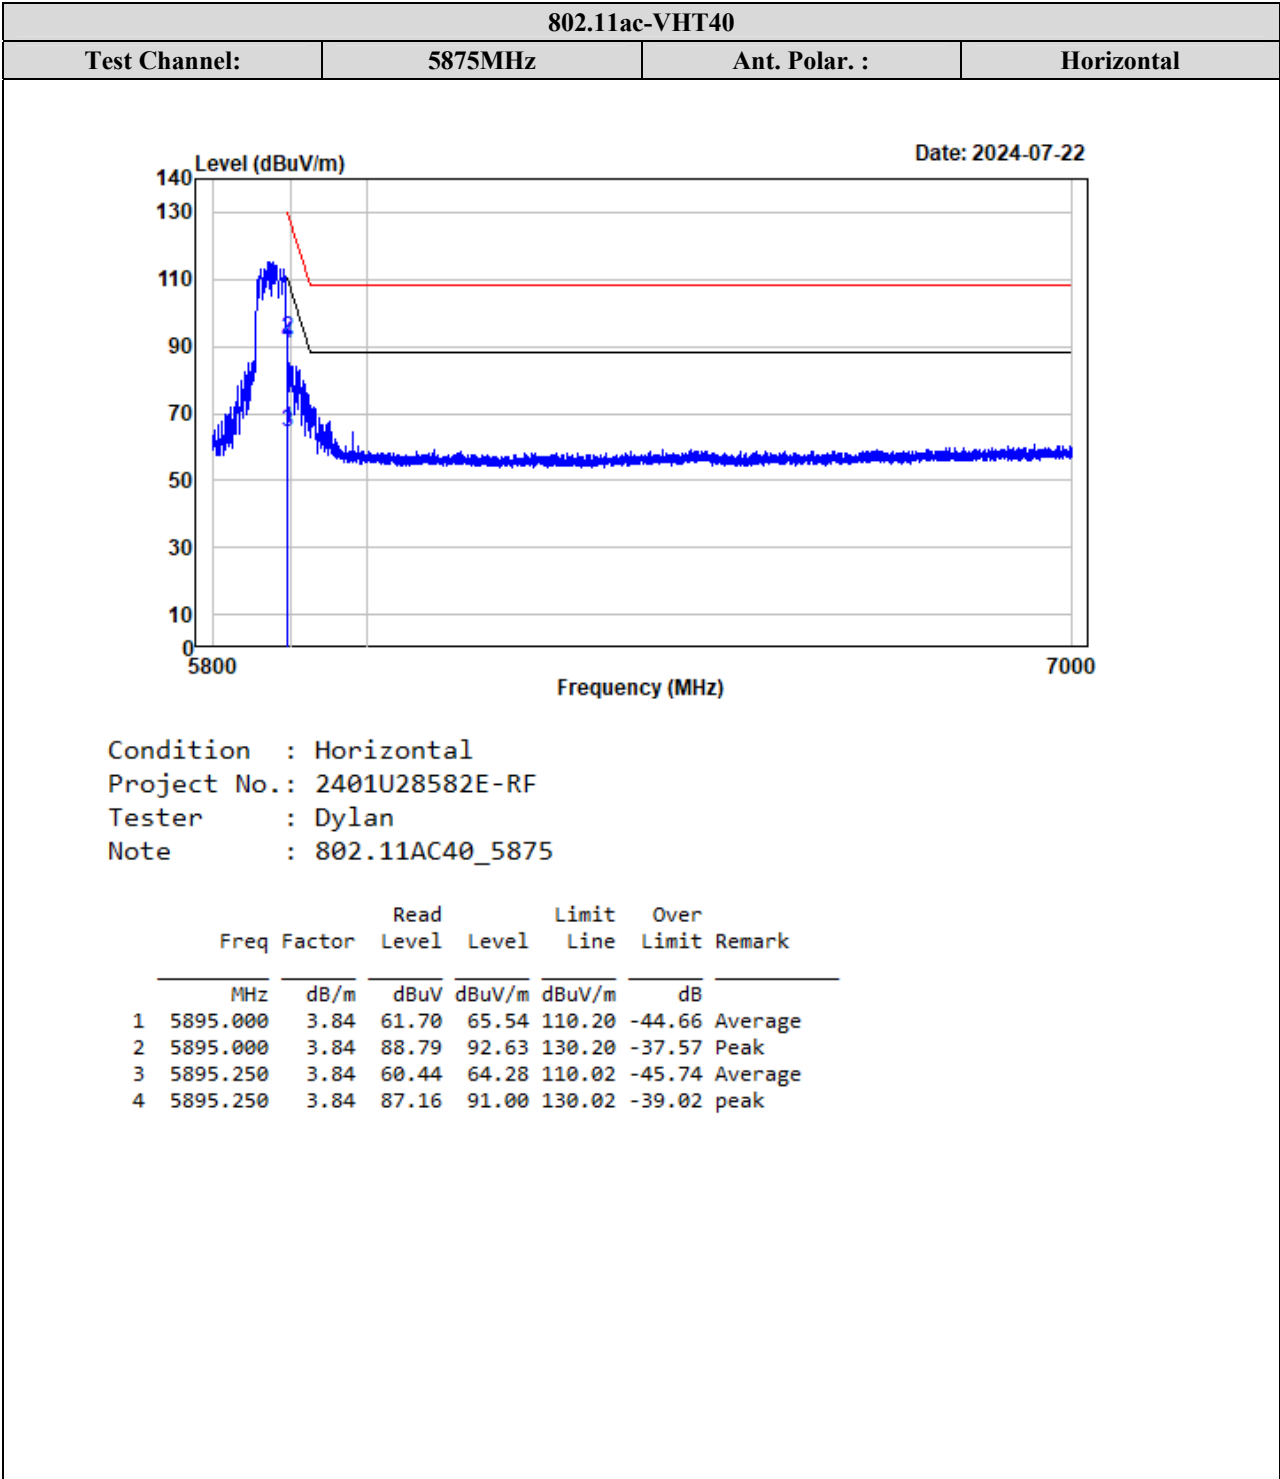

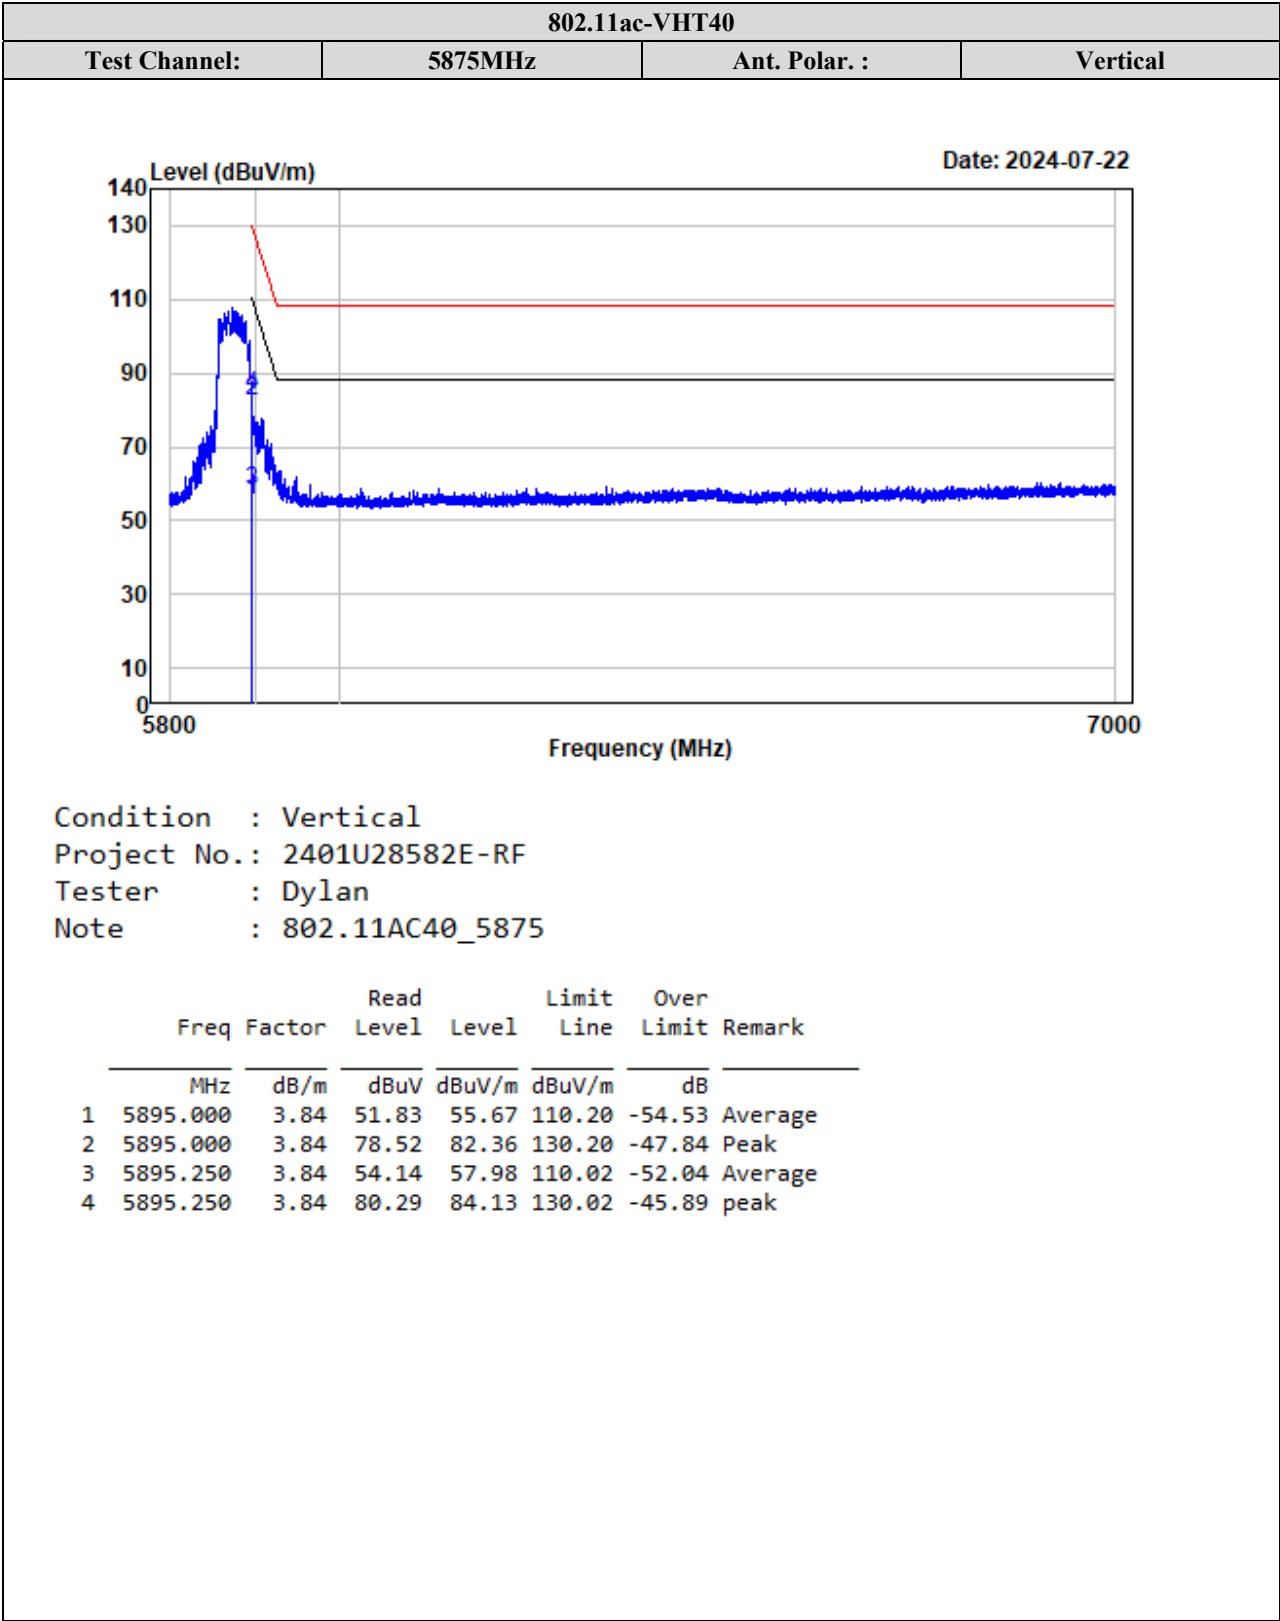

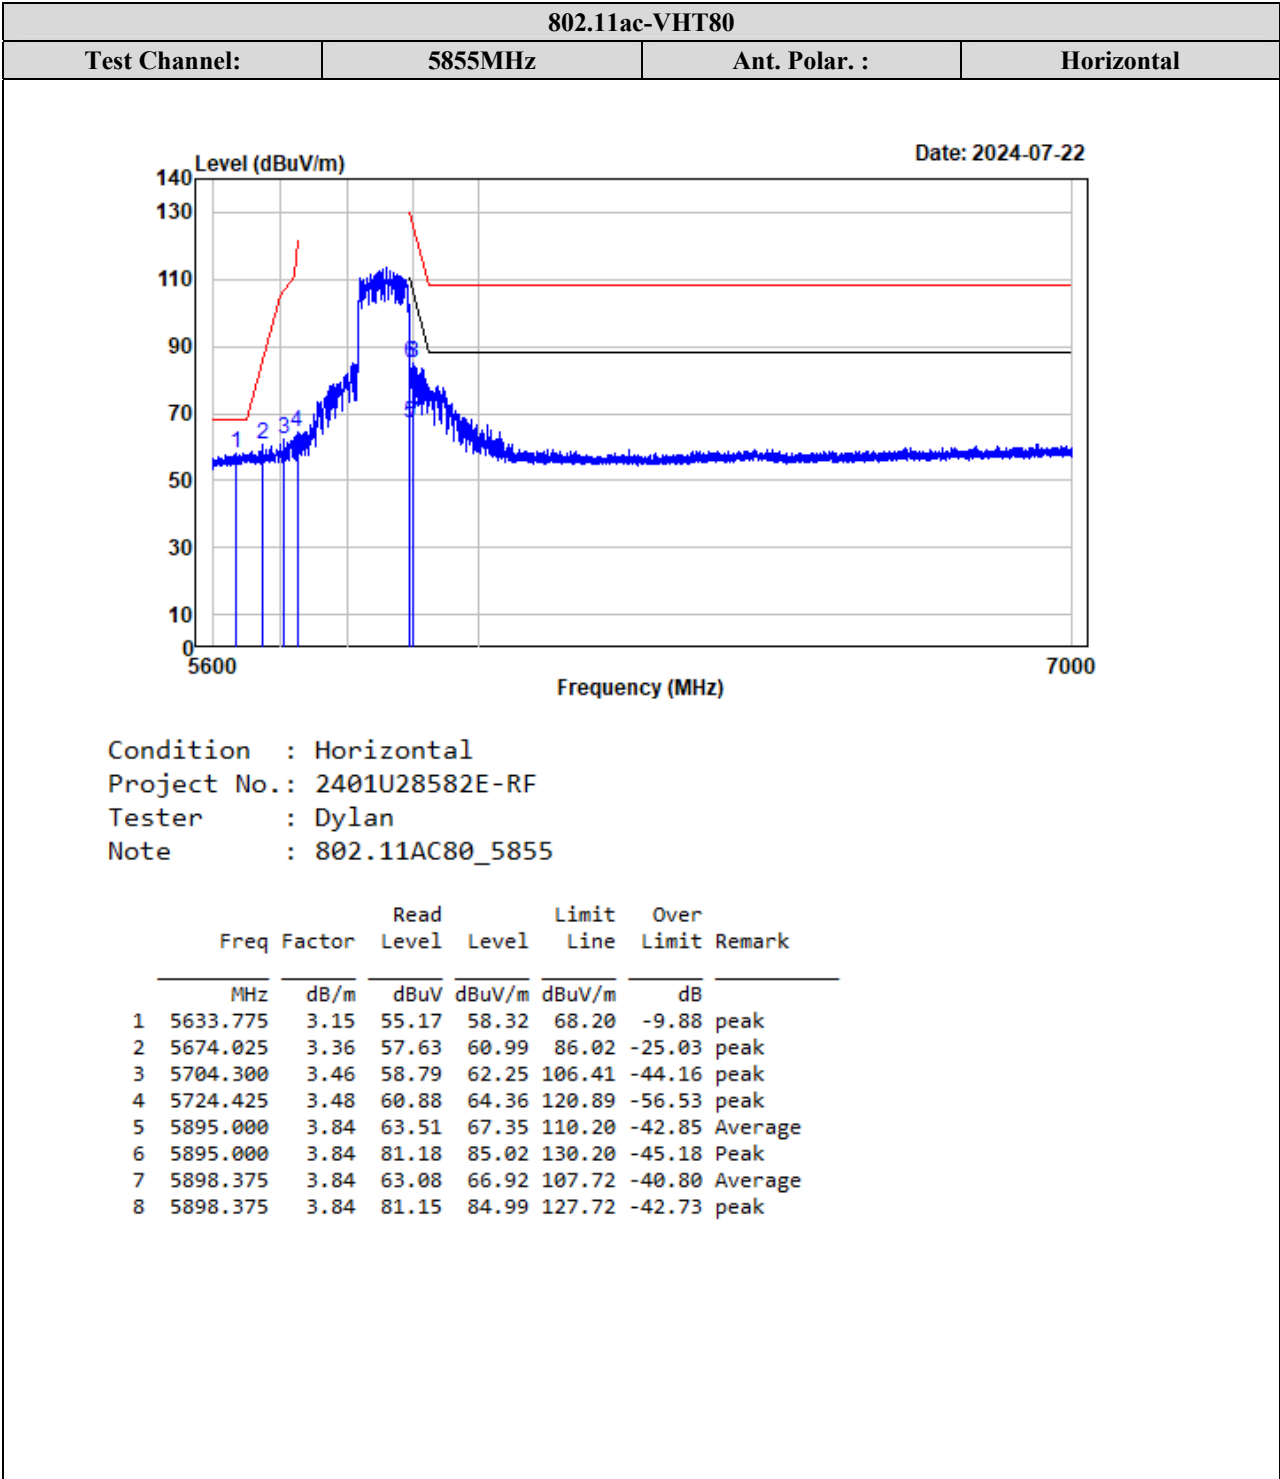

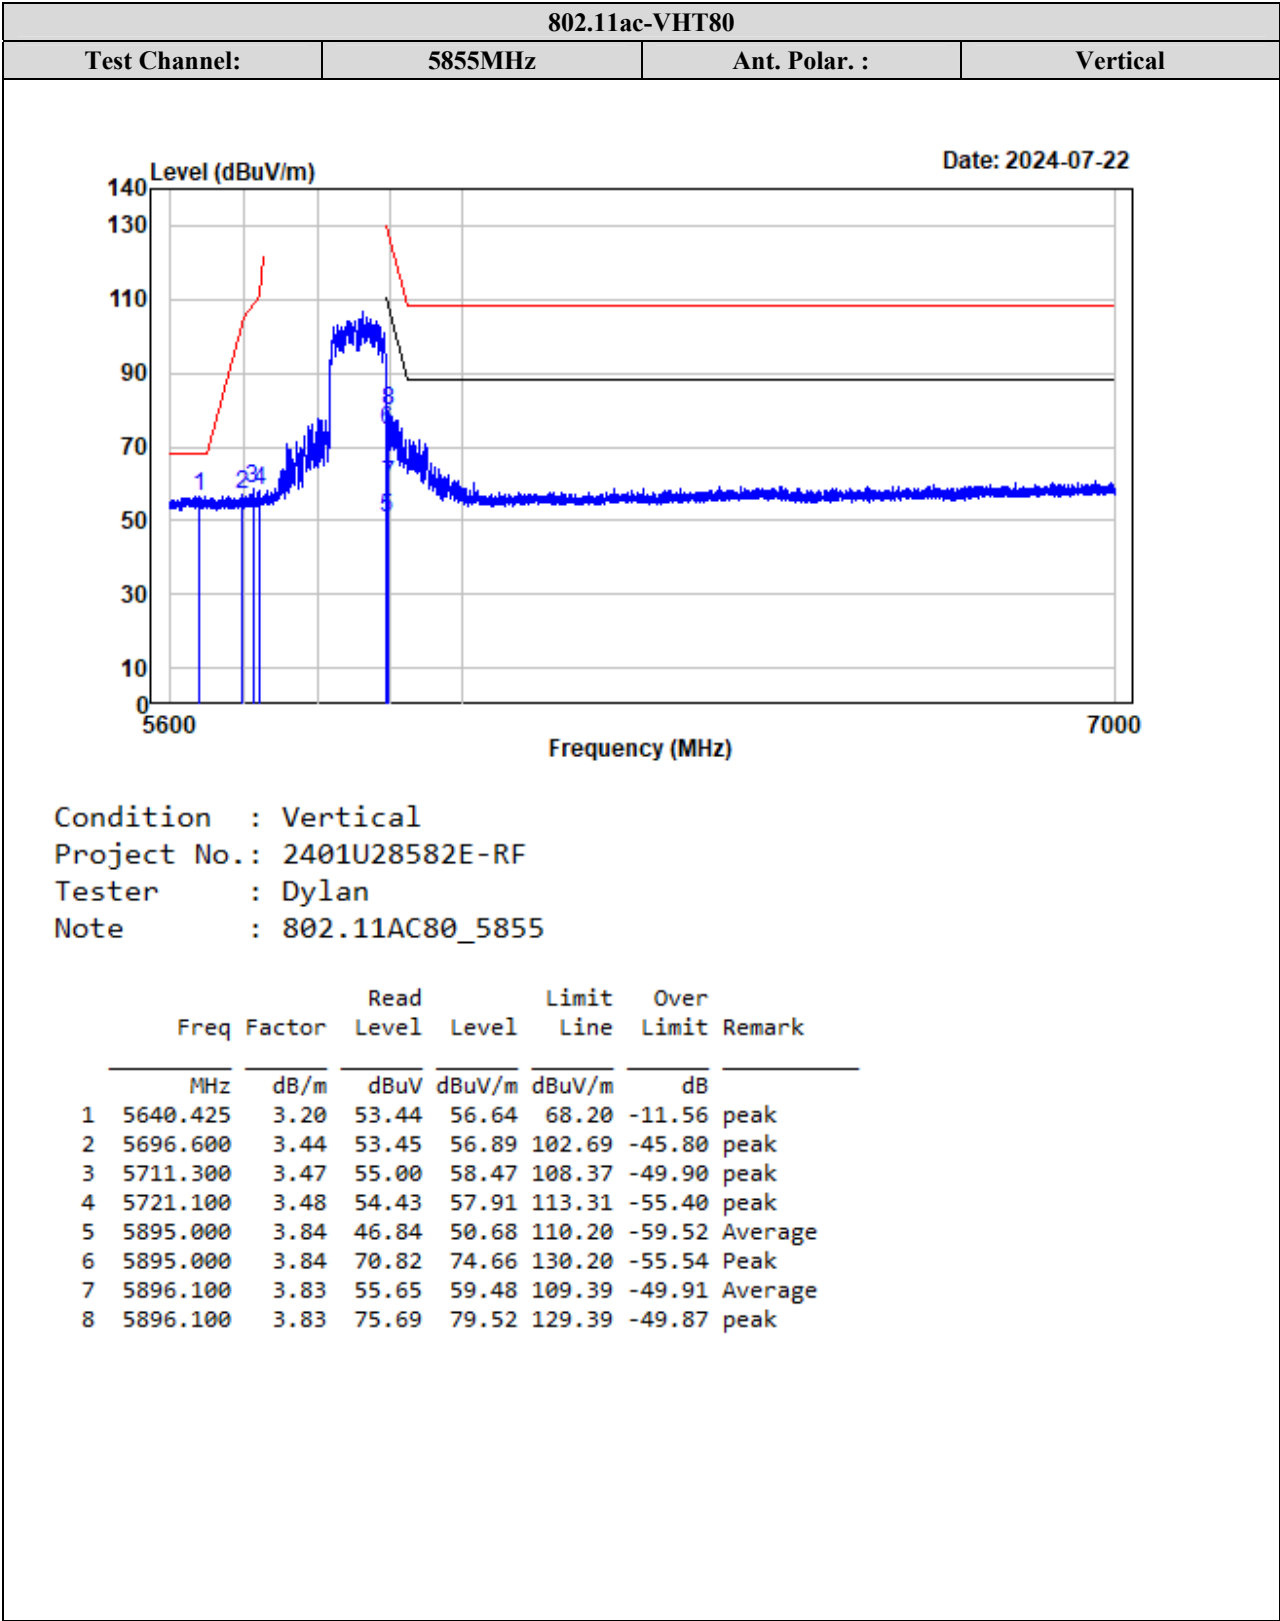

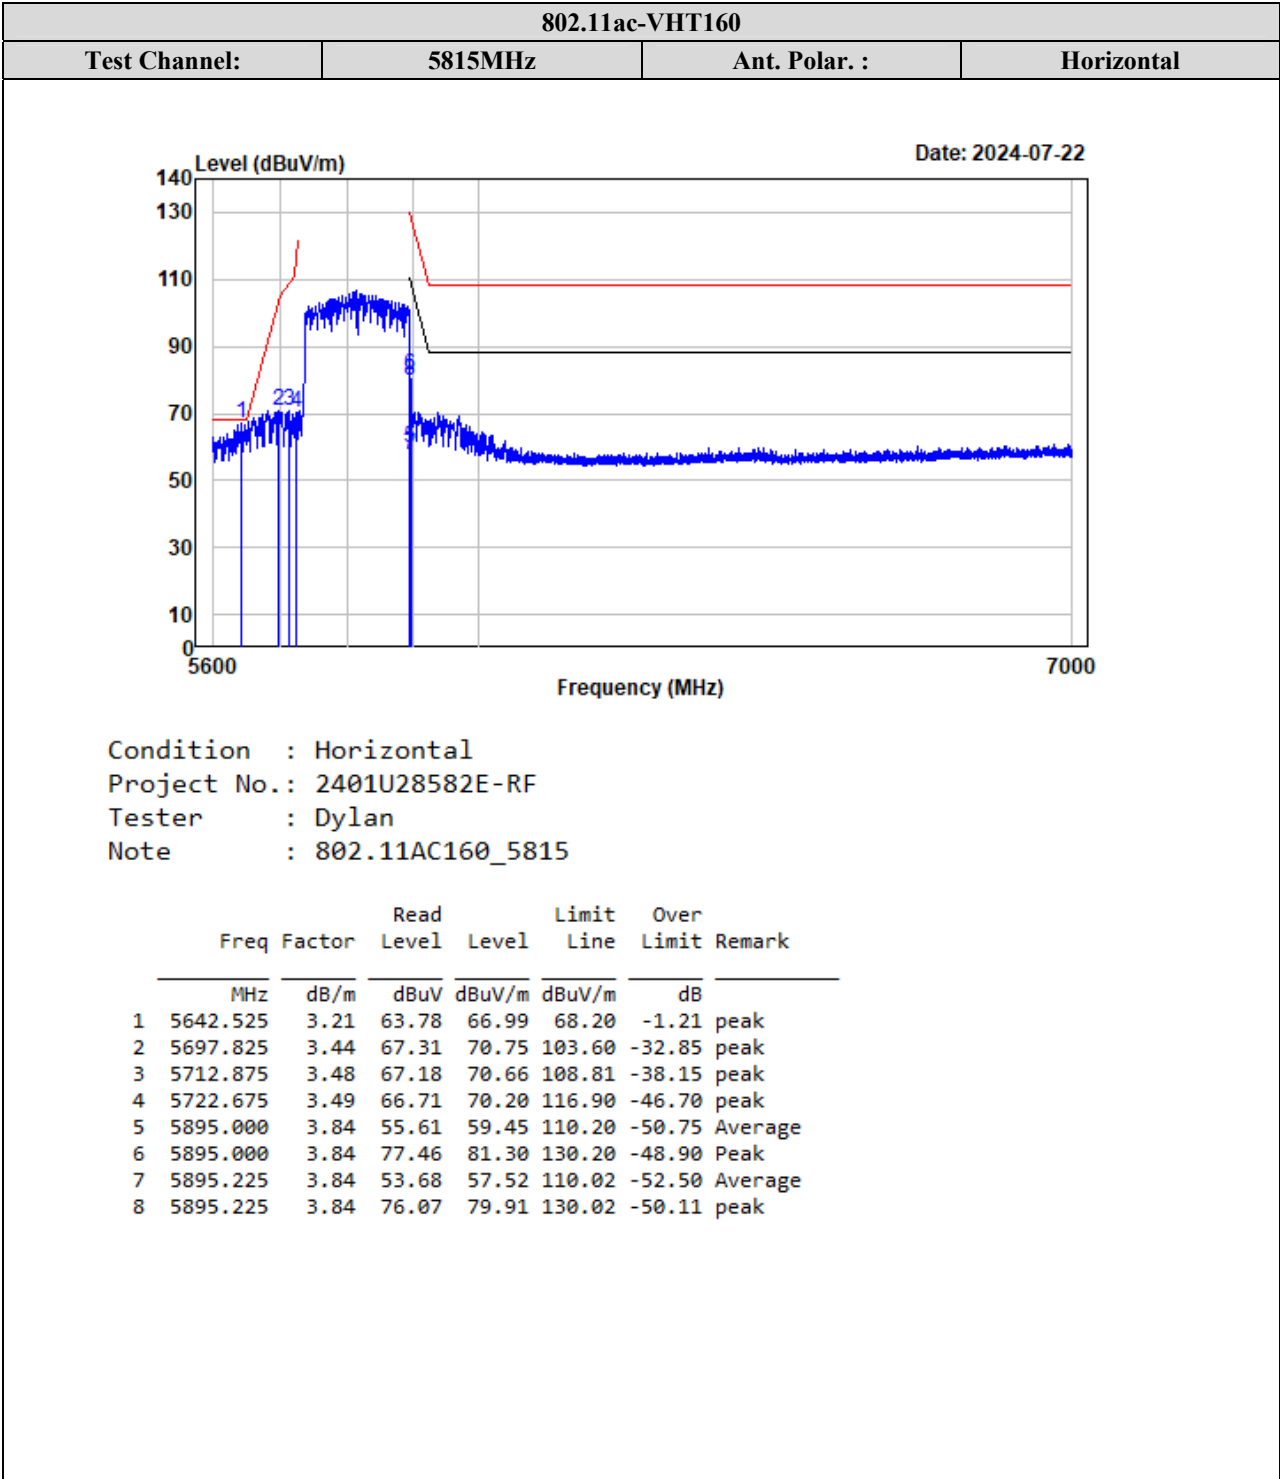


802.11ac-VHT160

Test Channel:

5815MHz

Ant. Polar. :

Vertical

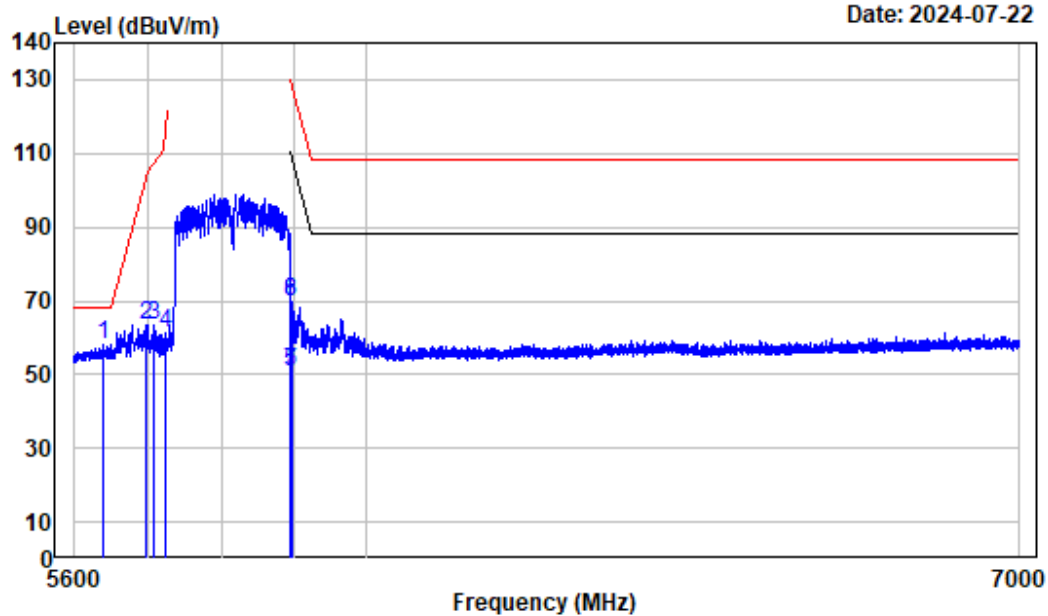


Condition : Vertical


Project No.: 2401U28582E-RF


Tester : Dylan


Note : 802.11AC160_5815


	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5638.675	3.19	55.13	58.32	68.20	-9.88	peak
2	5697.475	3.44	60.22	63.66	103.34	-39.68	peak
3	5708.150	3.46	59.79	63.25	107.48	-44.23	peak
4	5723.725	3.48	57.89	61.37	119.29	-57.92	peak
5	5895.000	3.84	47.03	50.87	110.20	-59.33	Average
6	5895.000	3.84	65.69	69.53	130.20	-60.67	Peak
7	5895.225	3.84	47.11	50.95	110.02	-59.07	Average
8	5895.225	3.84	65.72	69.56	130.02	-60.46	peak

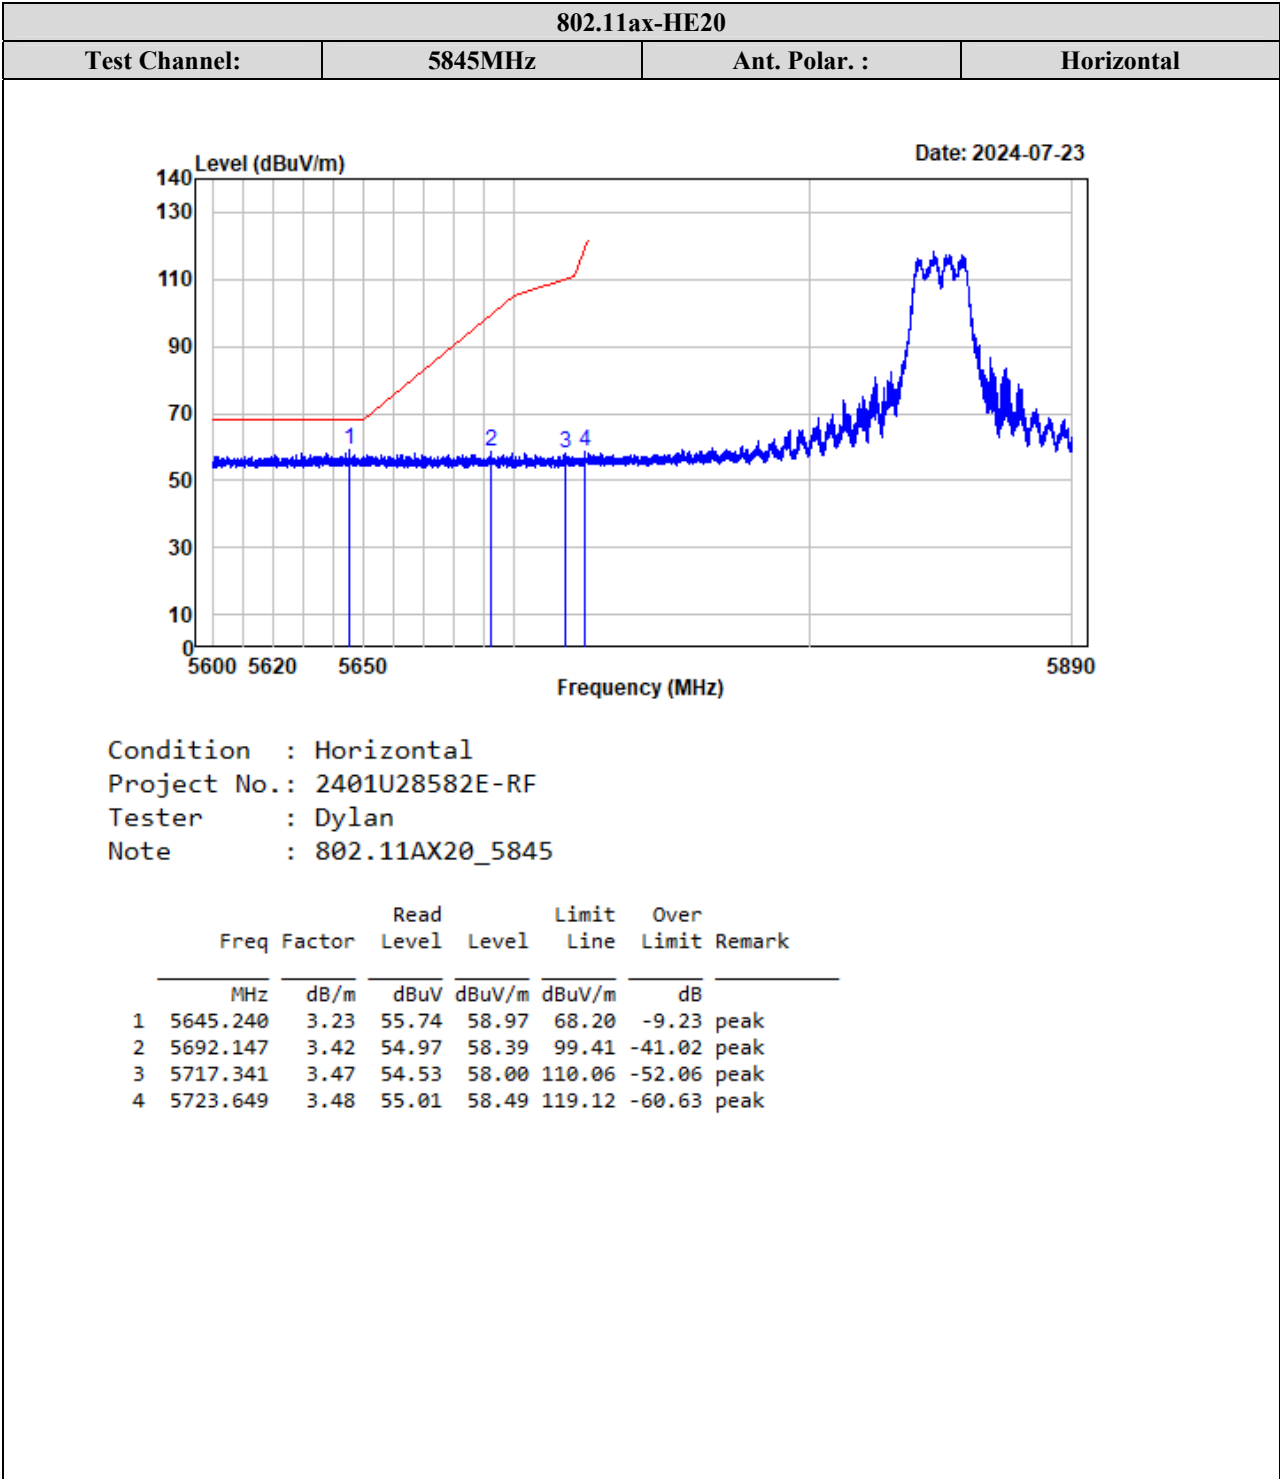


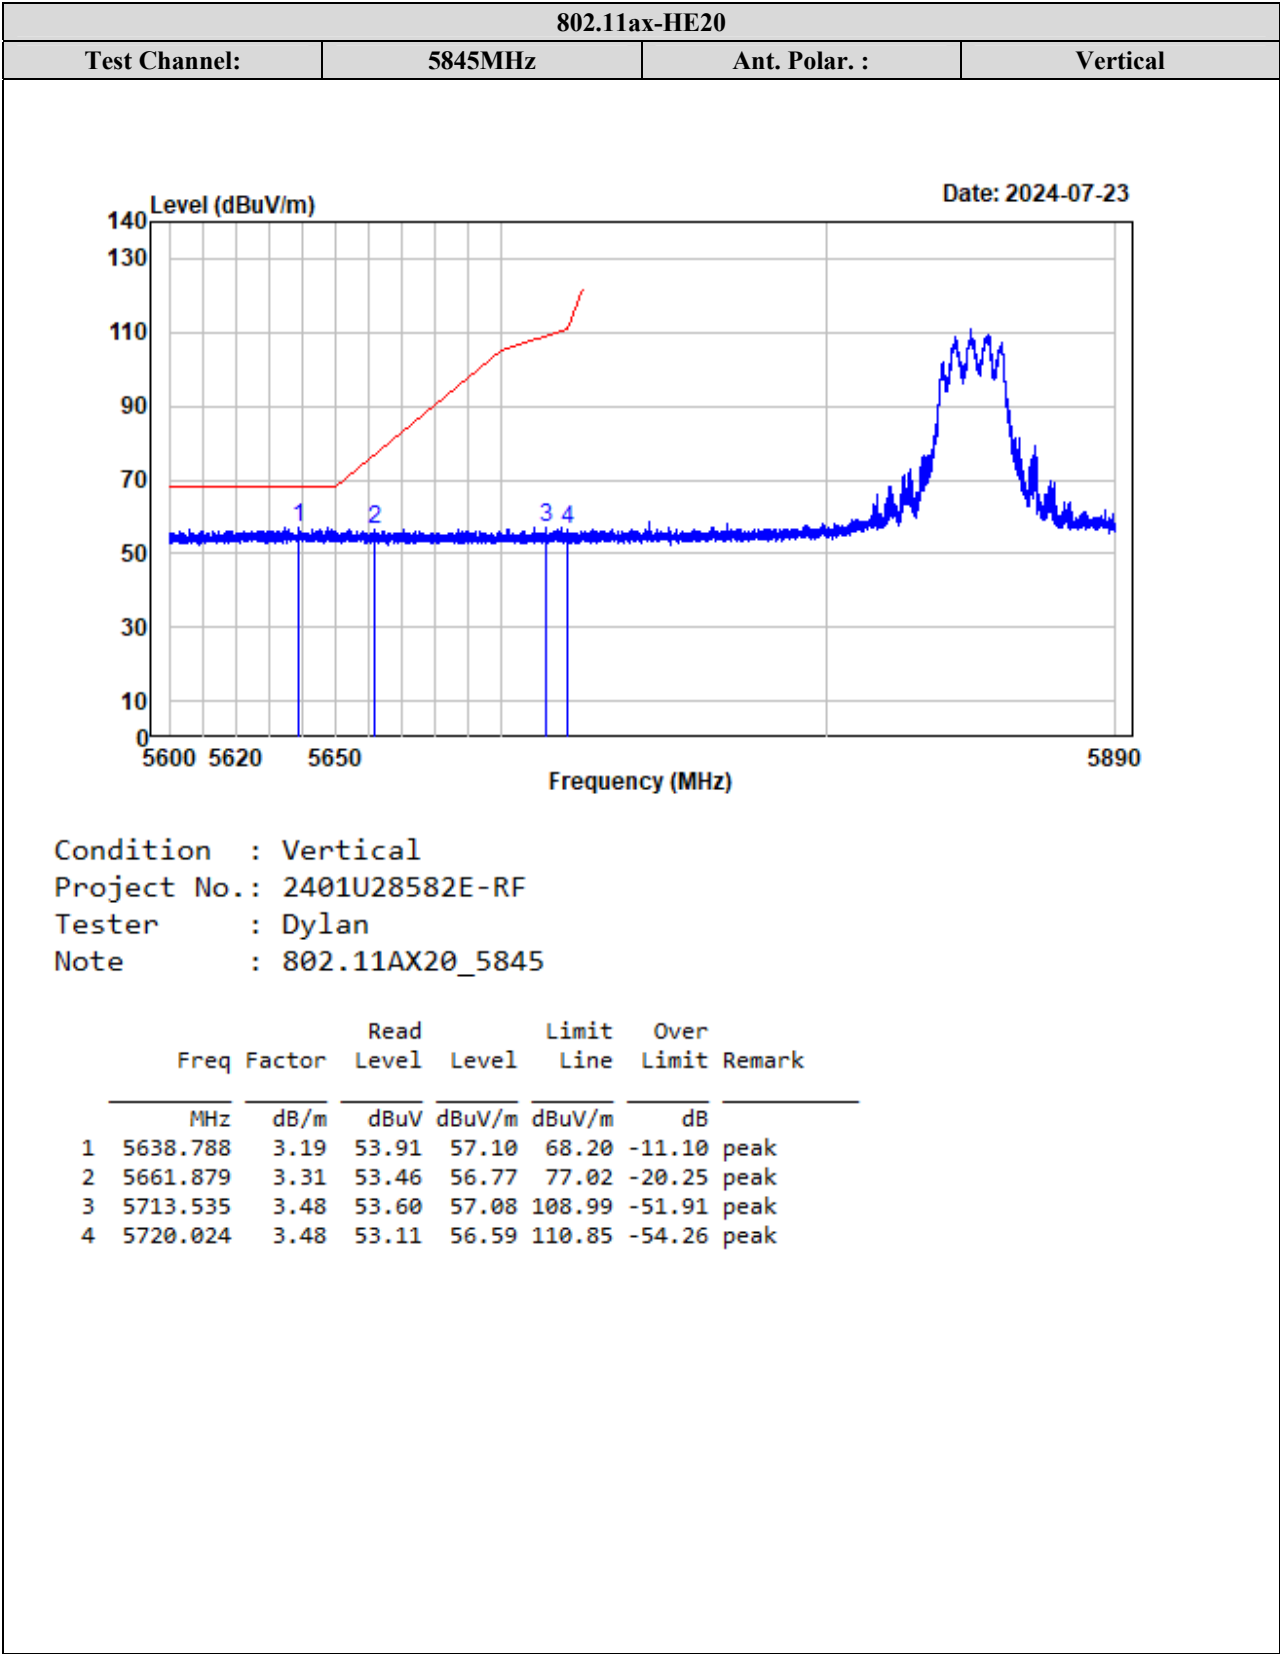


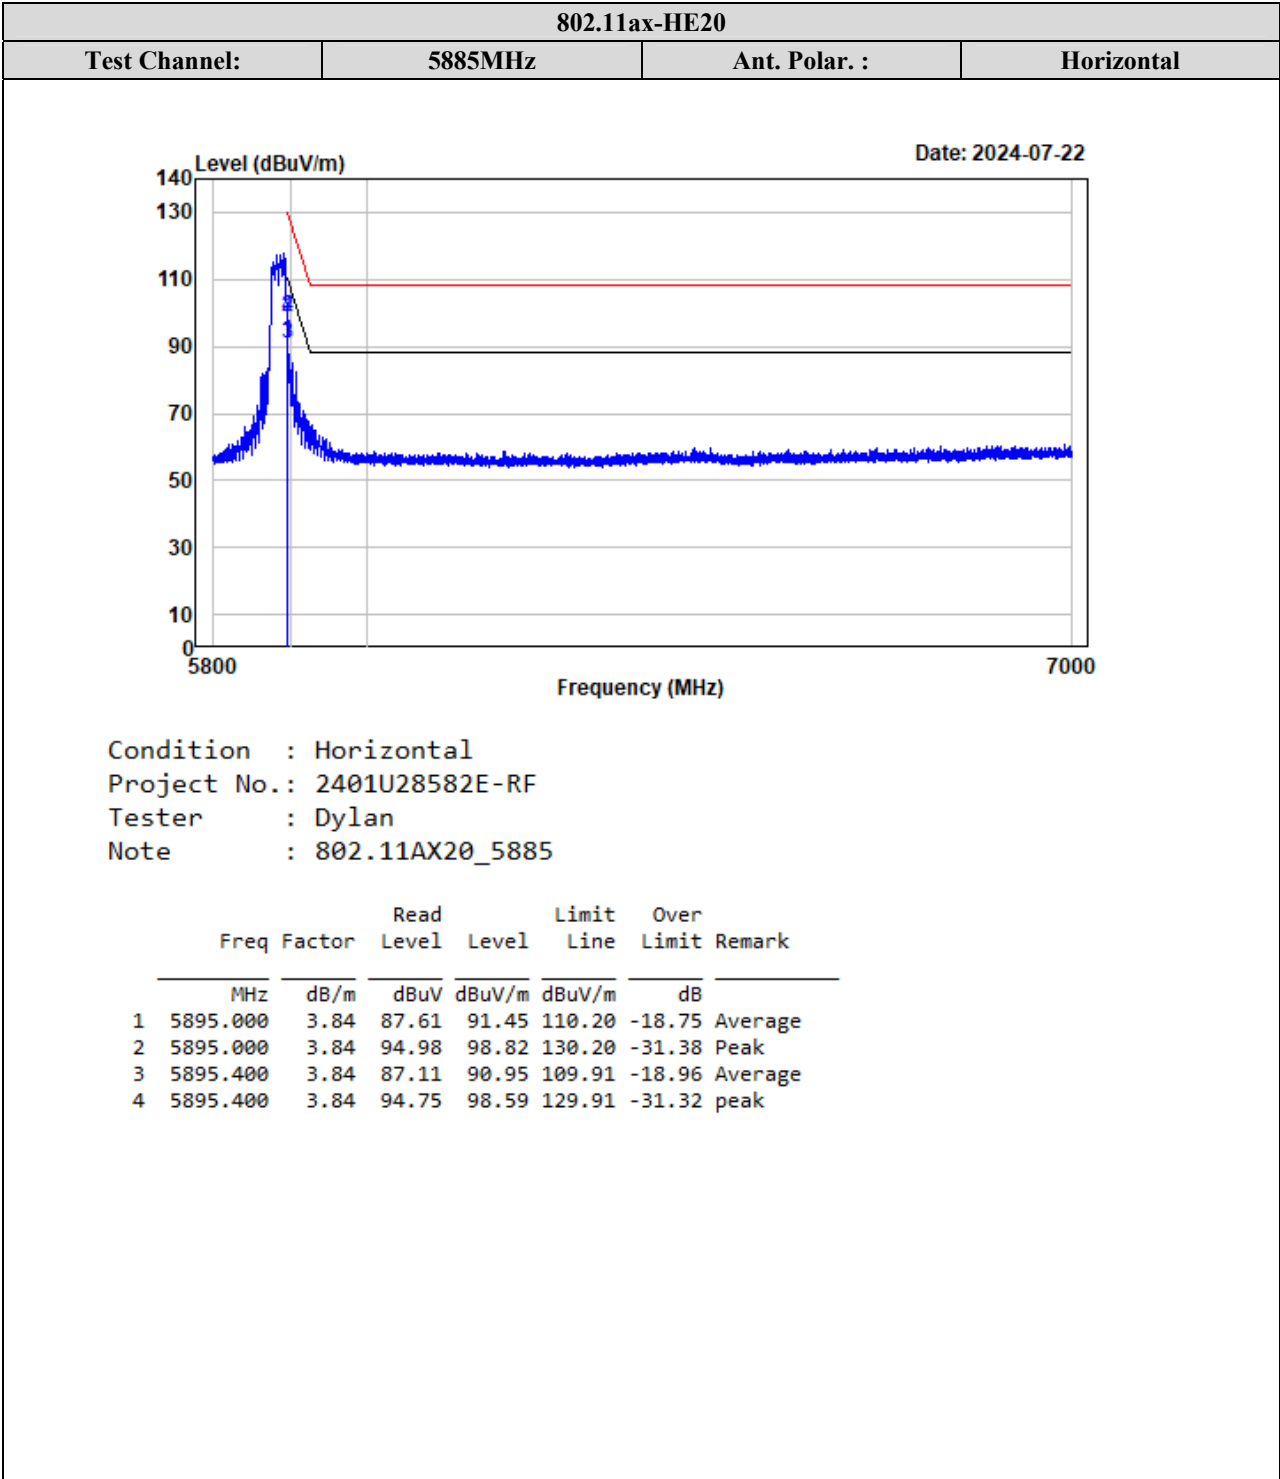


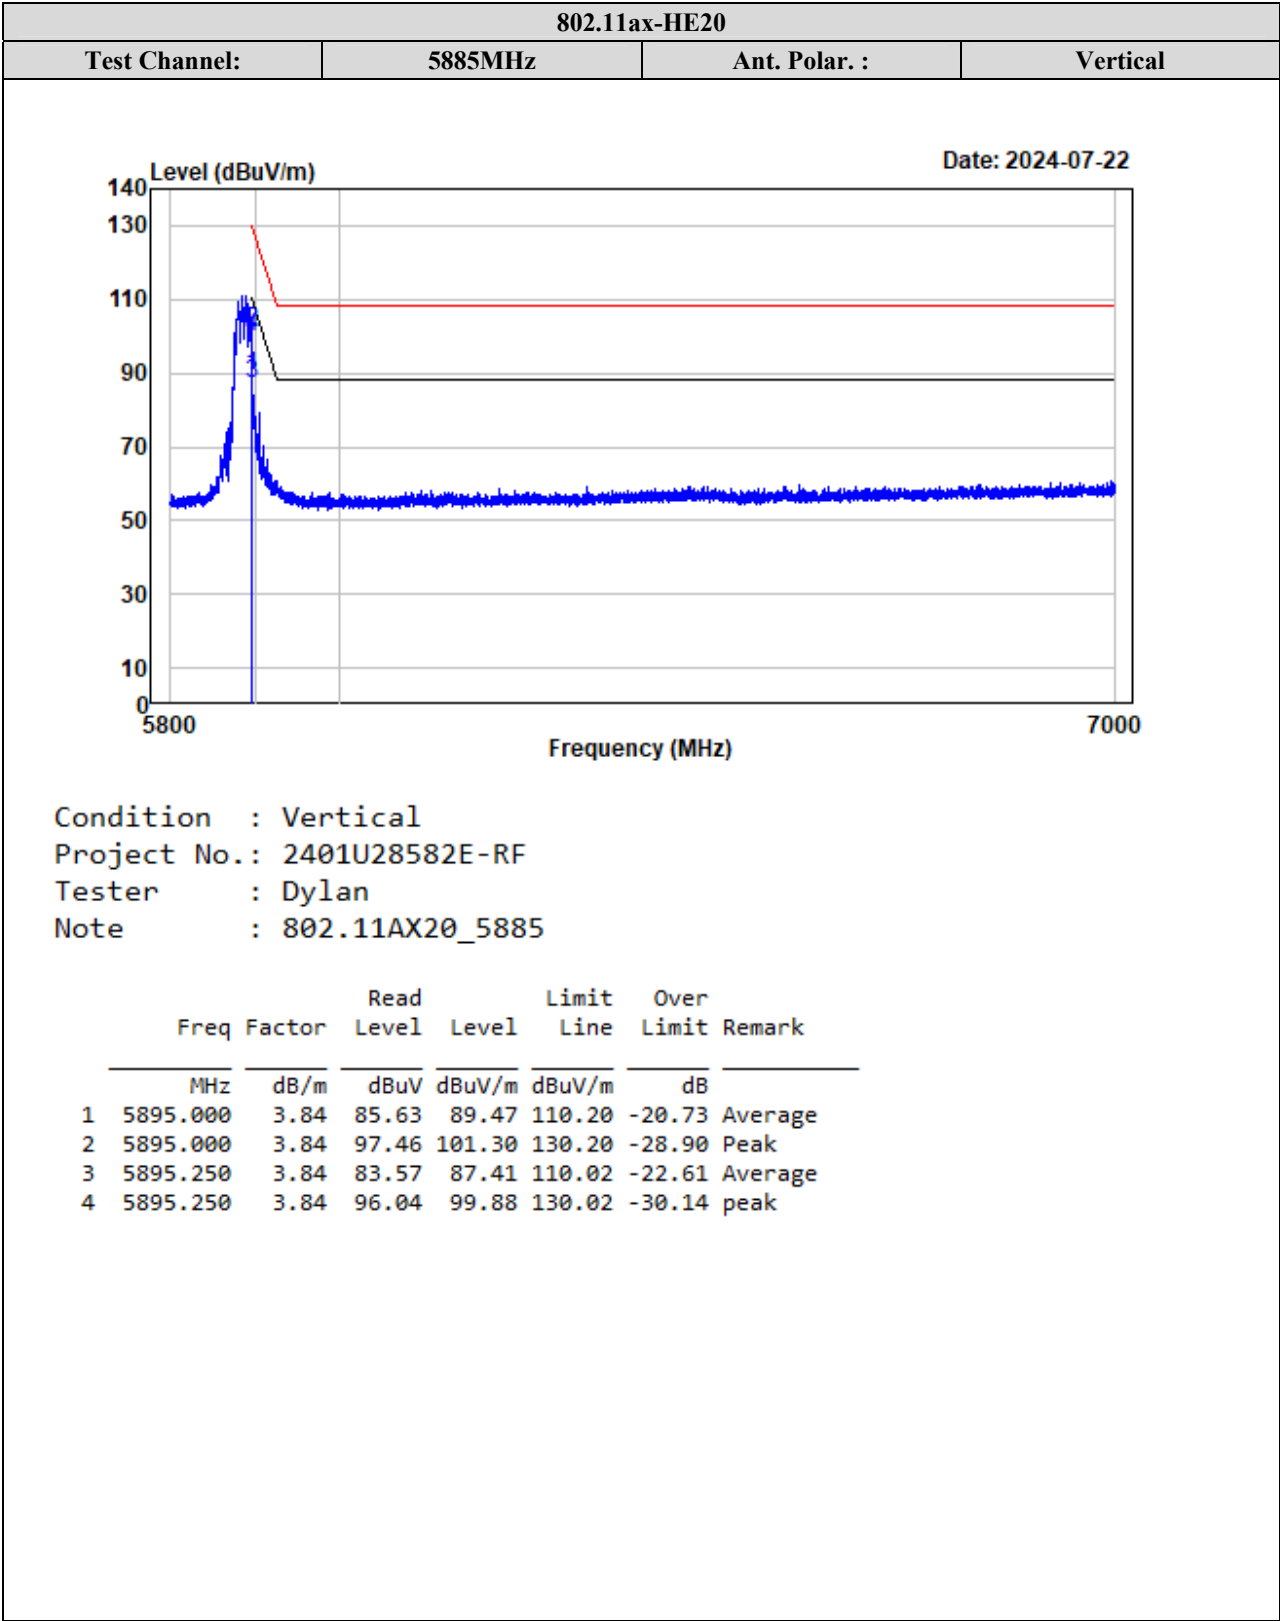


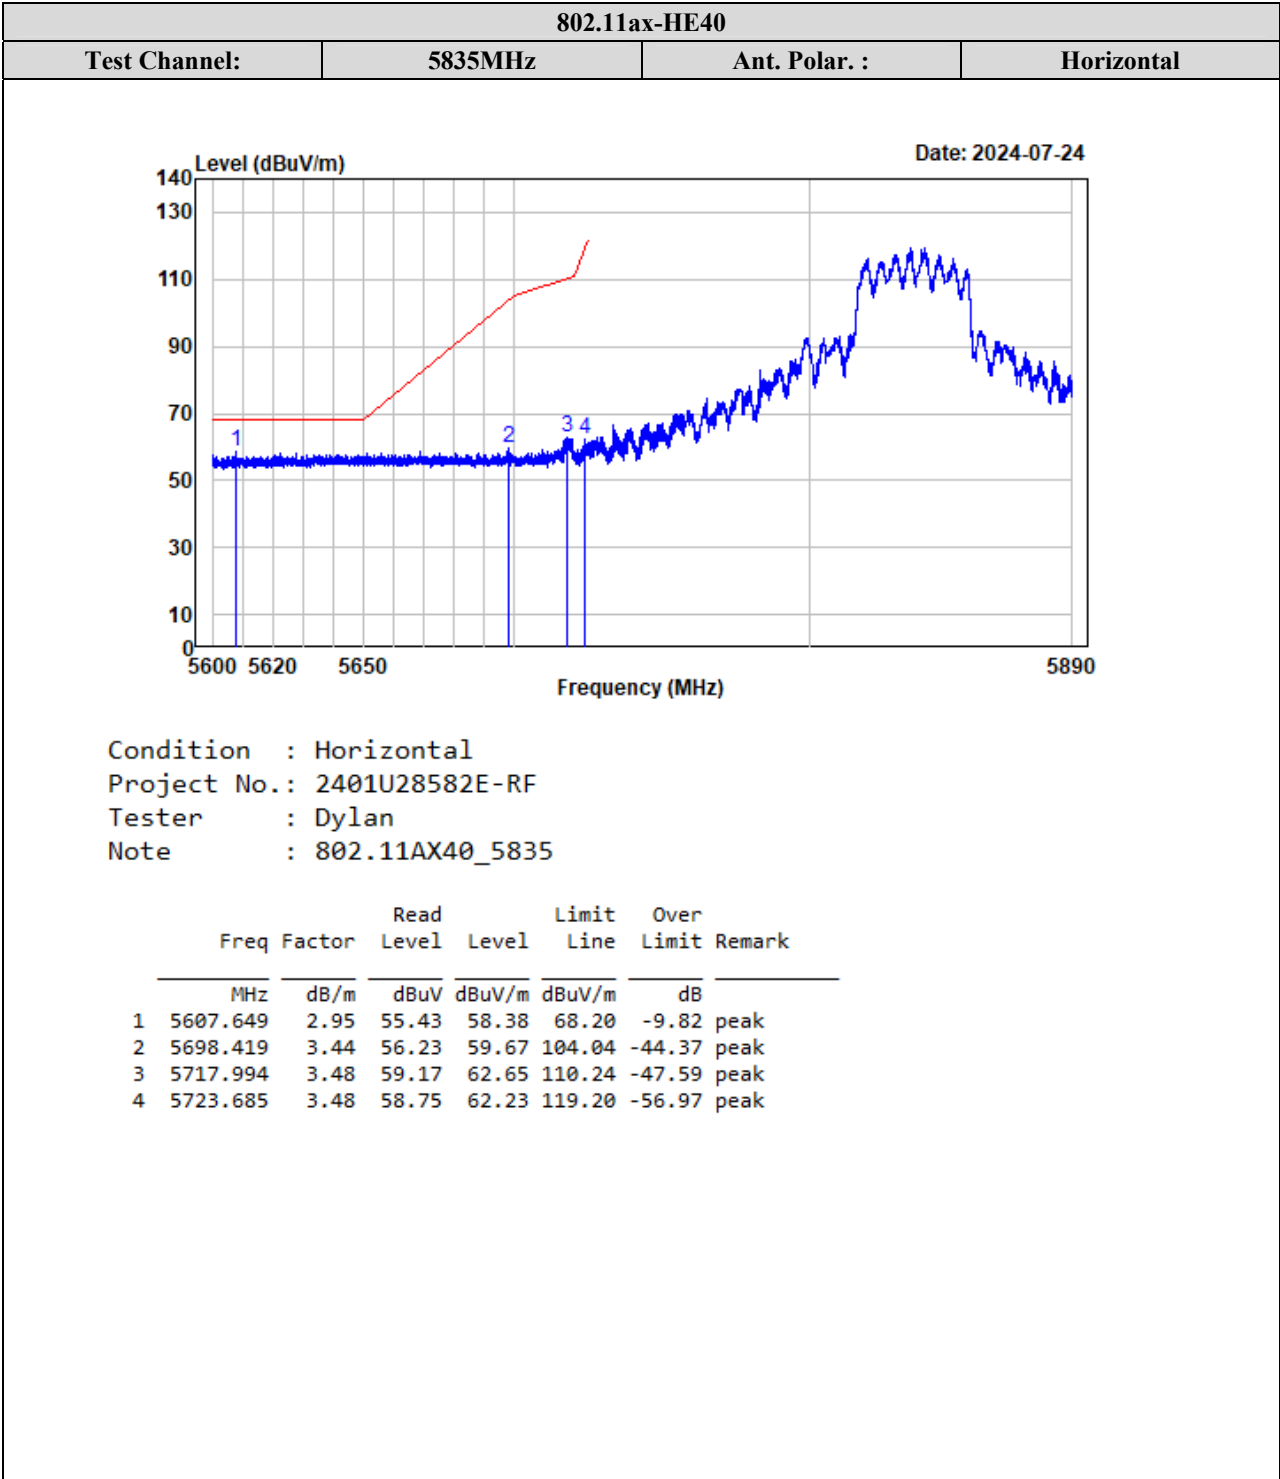

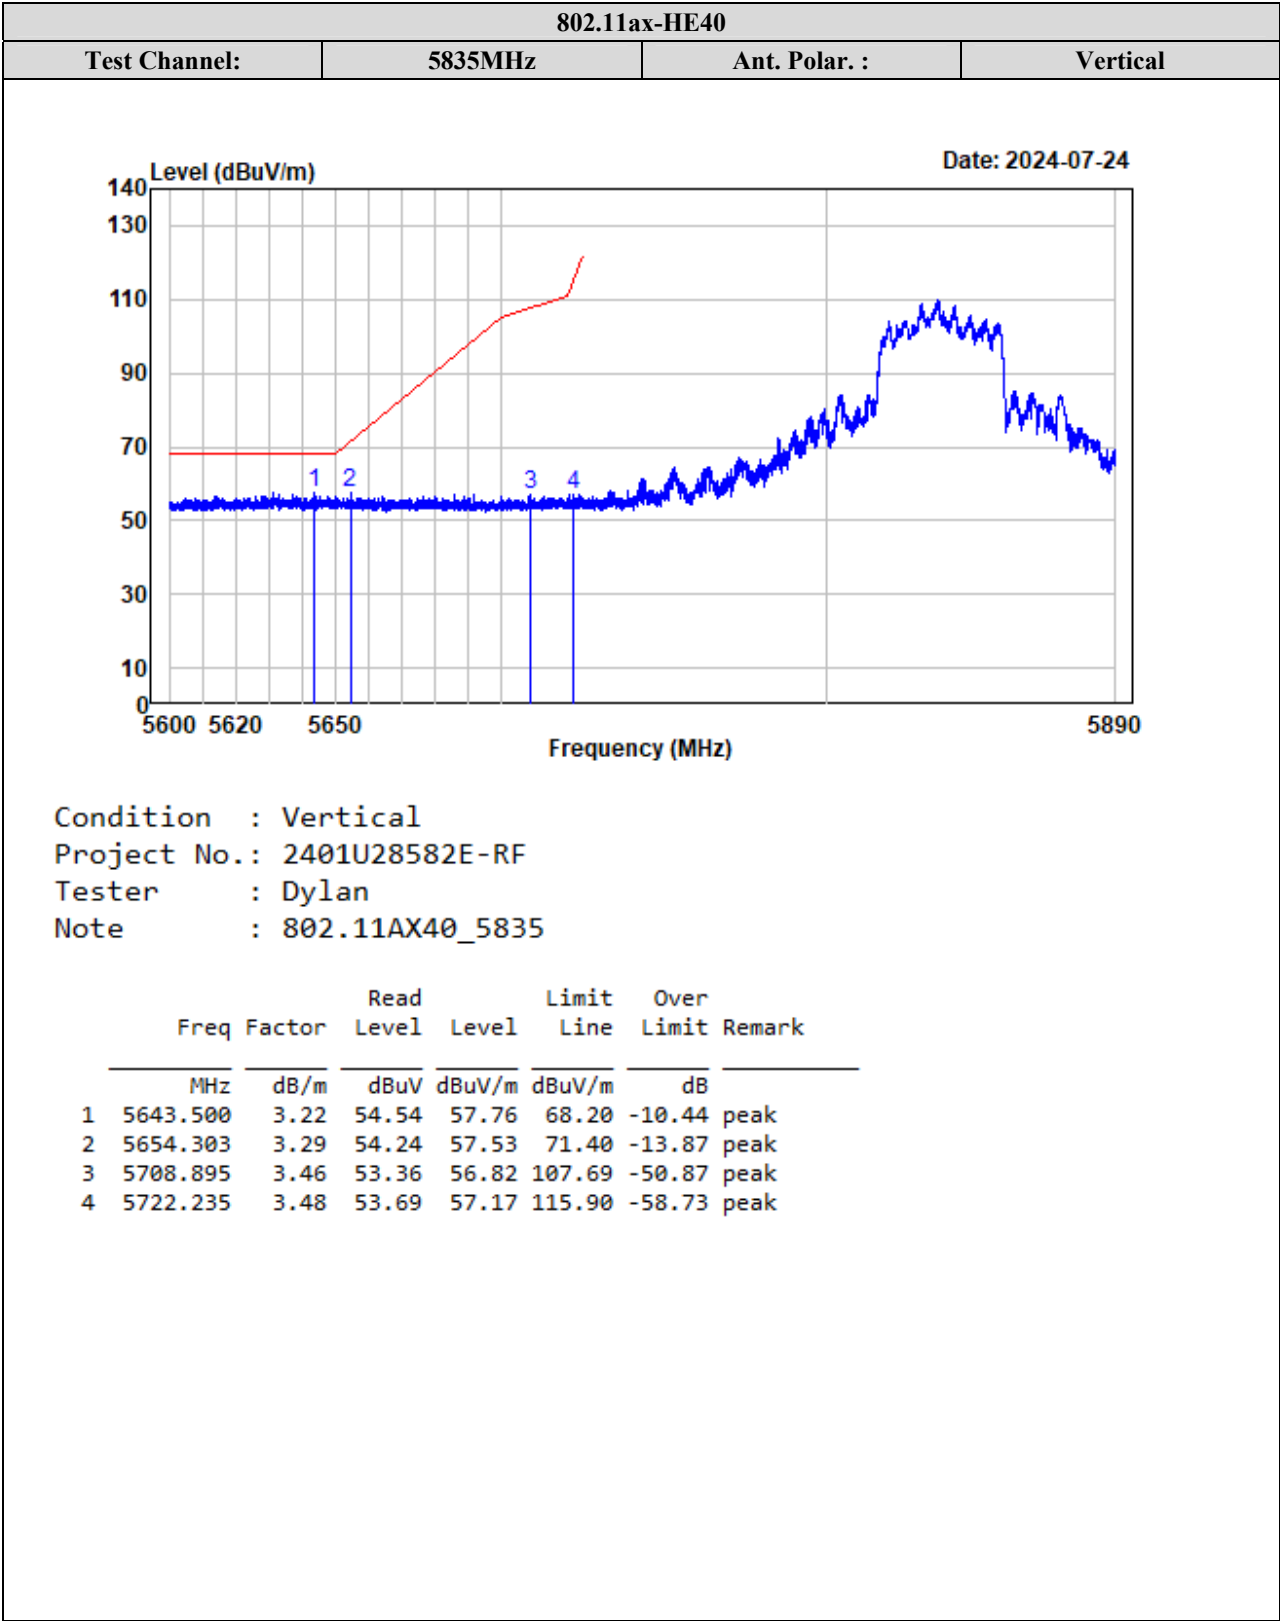

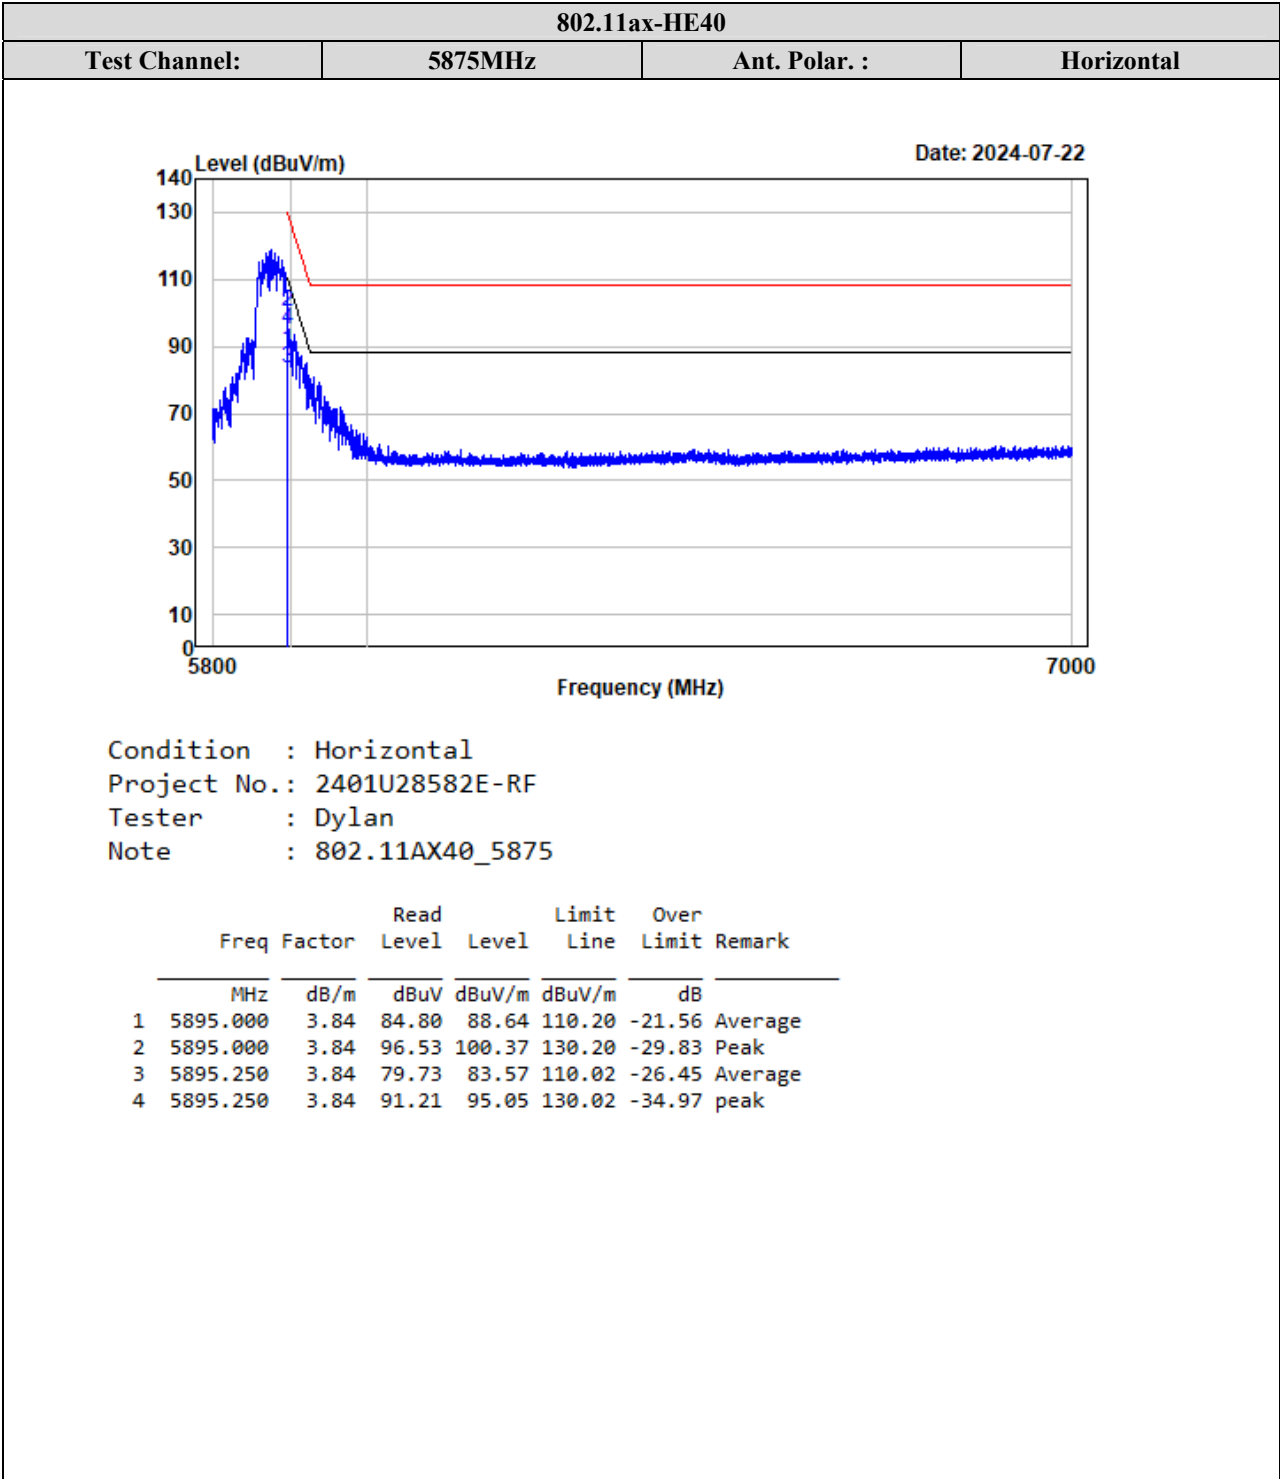

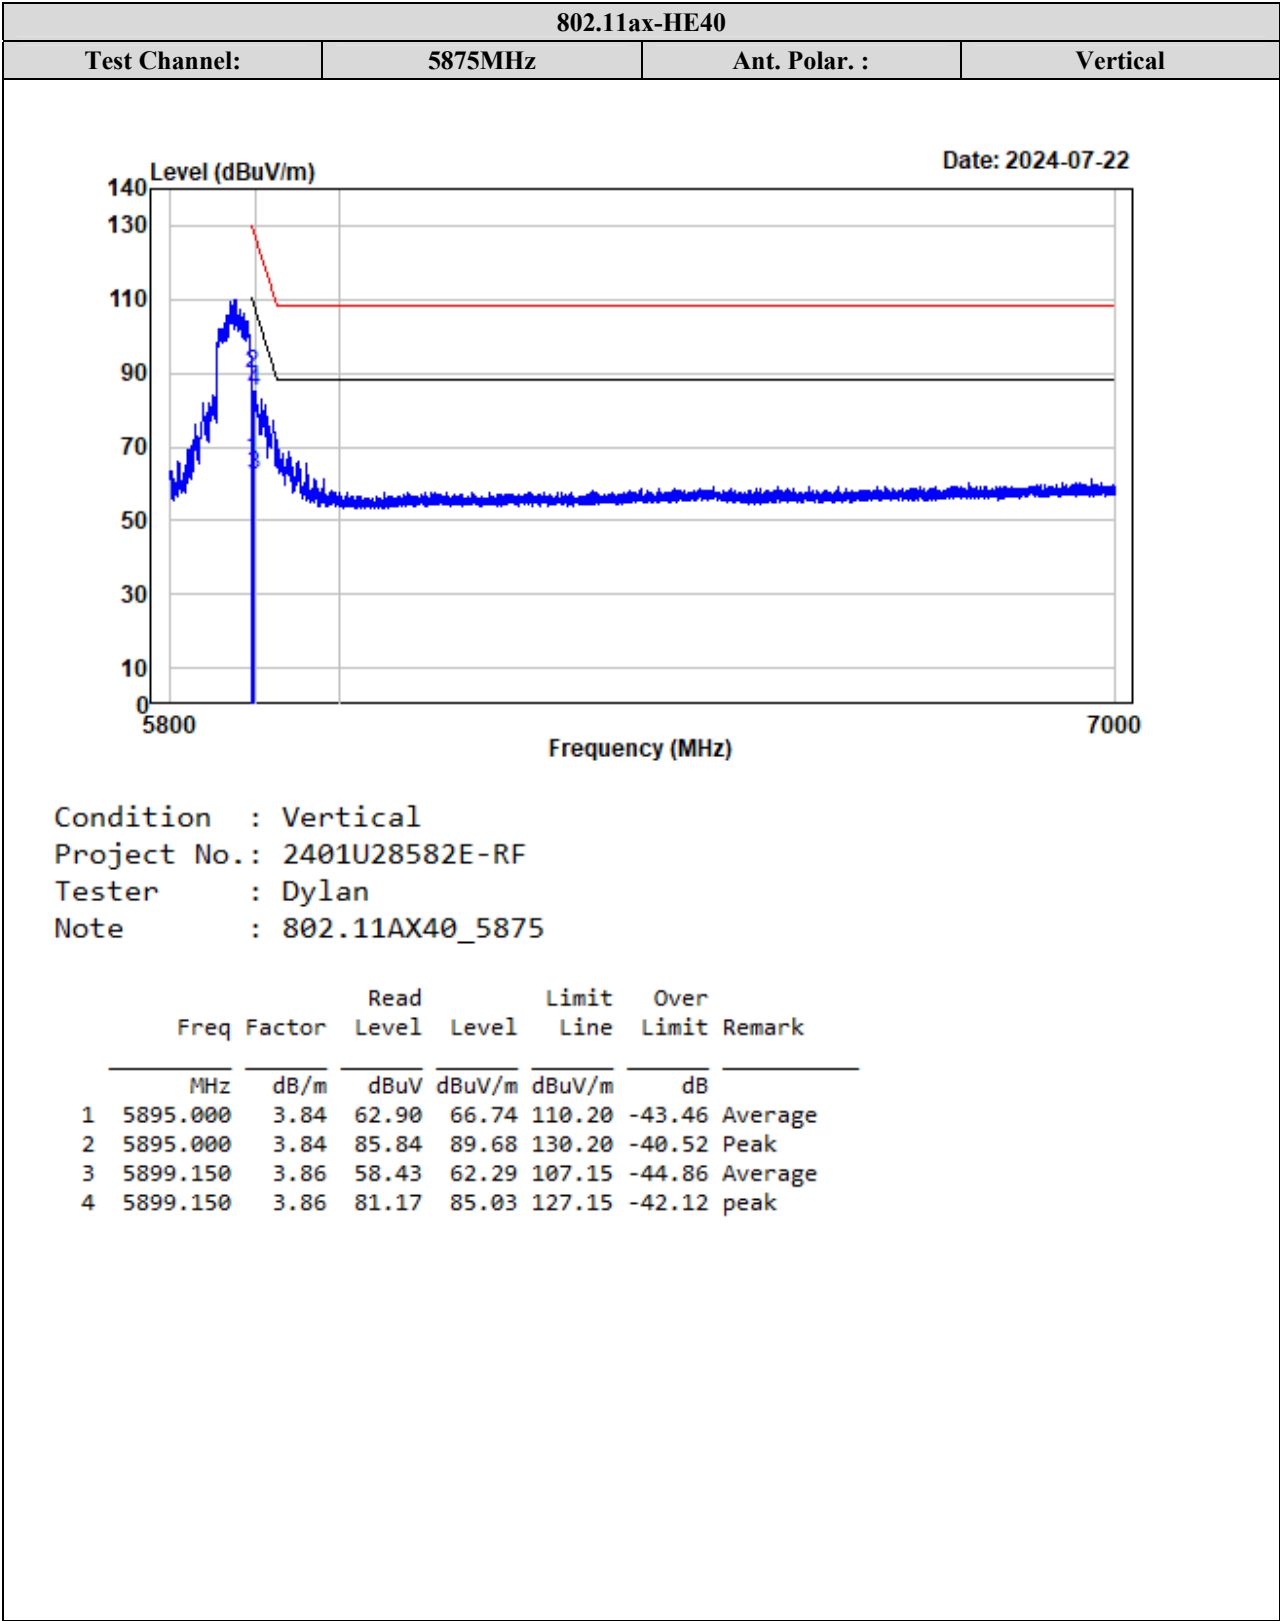


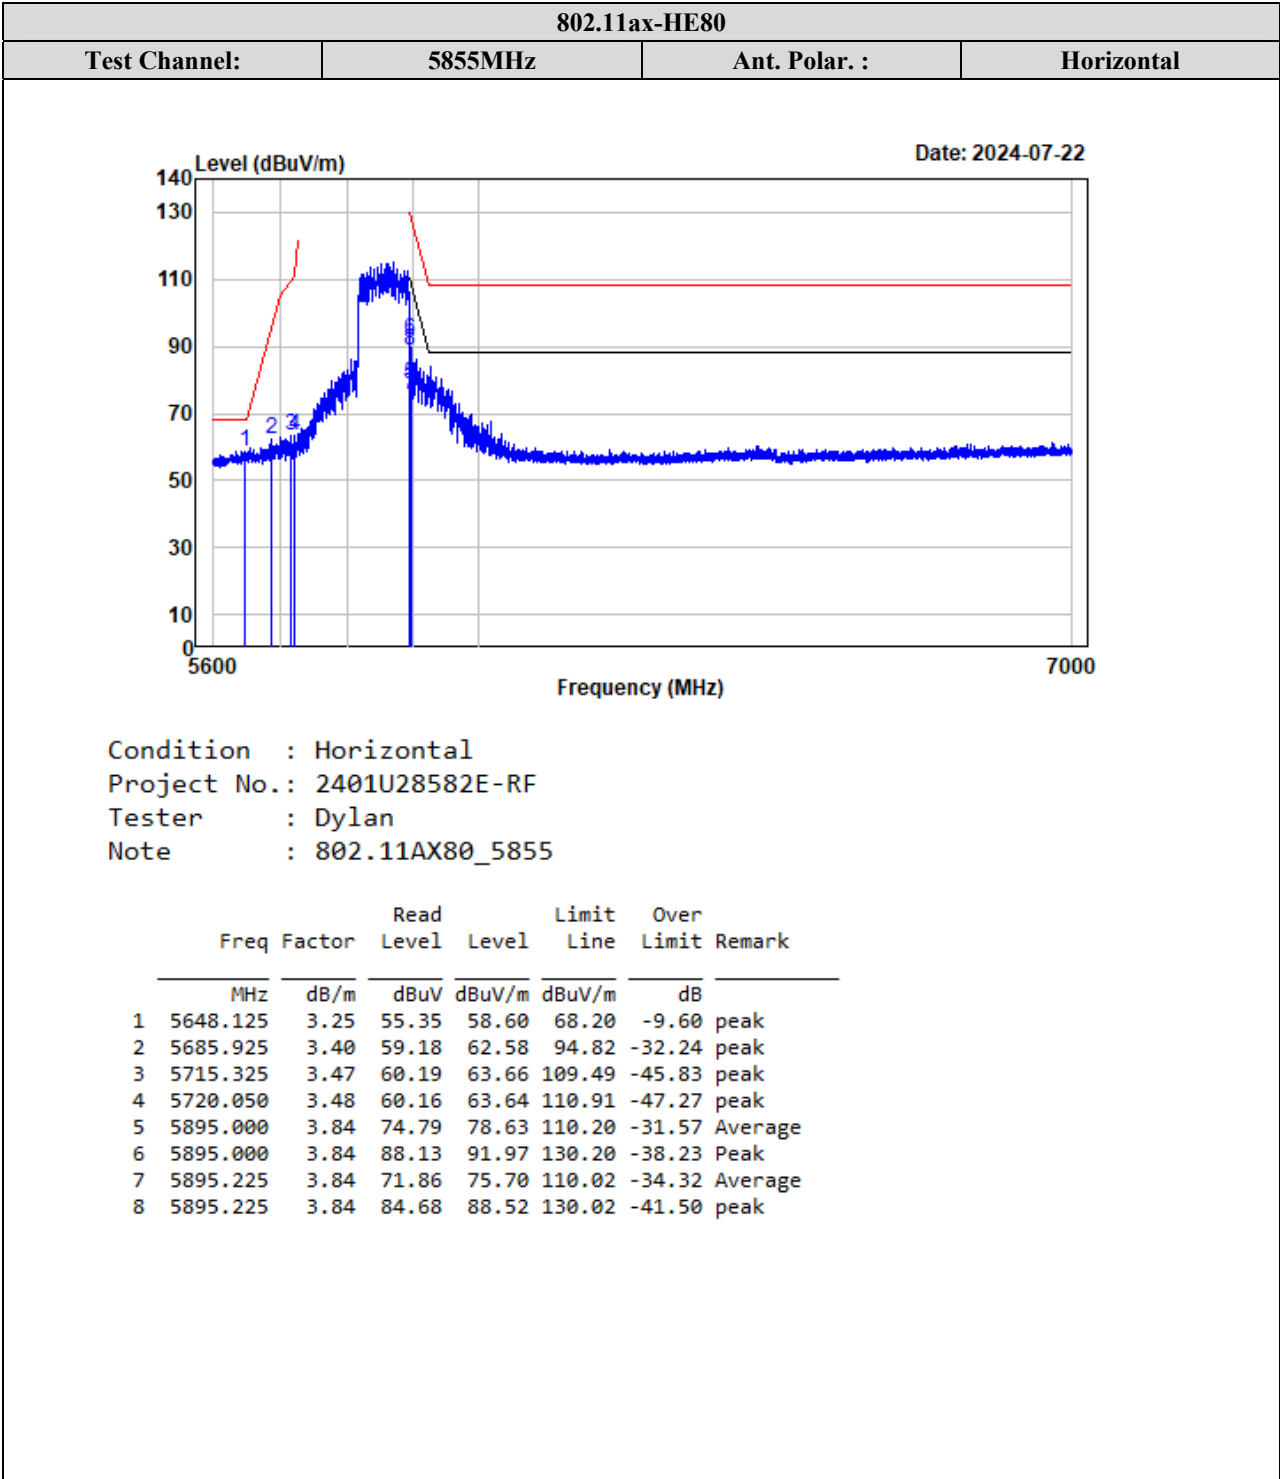


TR-EM-RF015

Page 105 of 628

Version 3.0

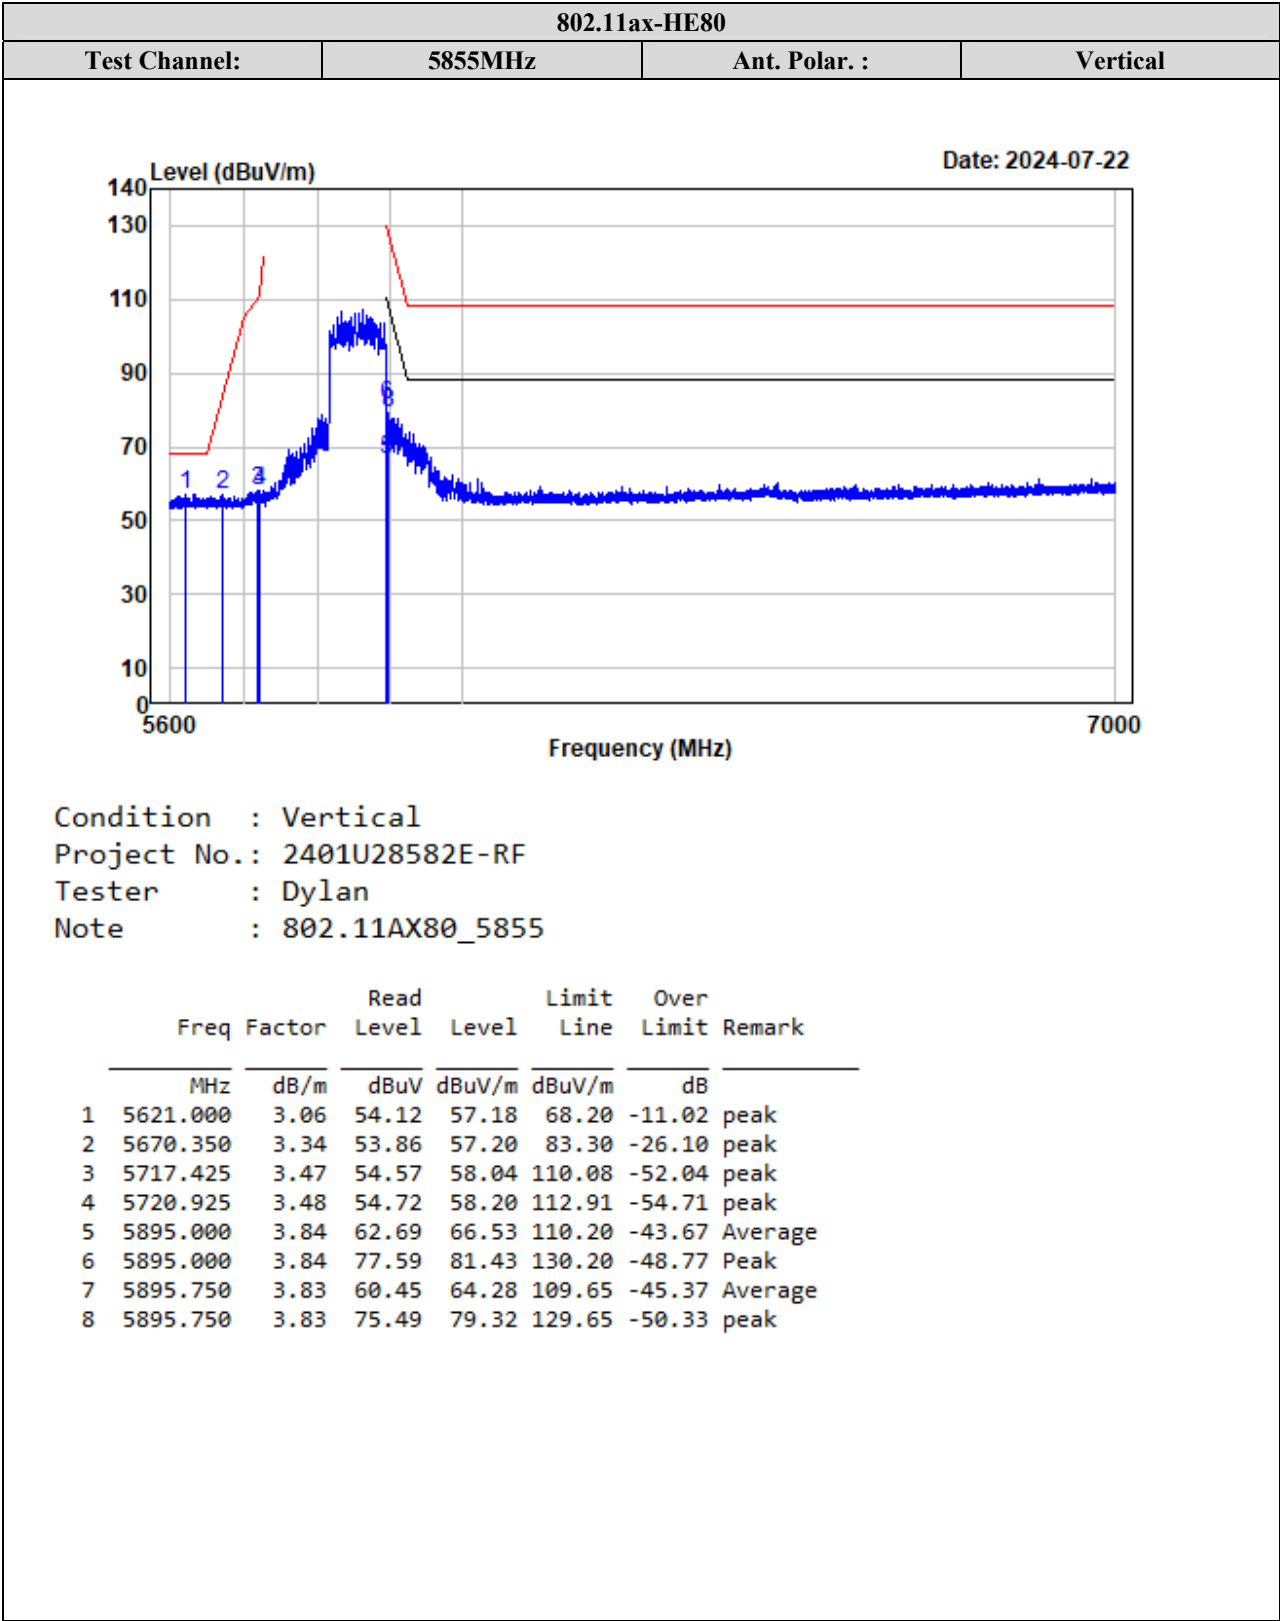

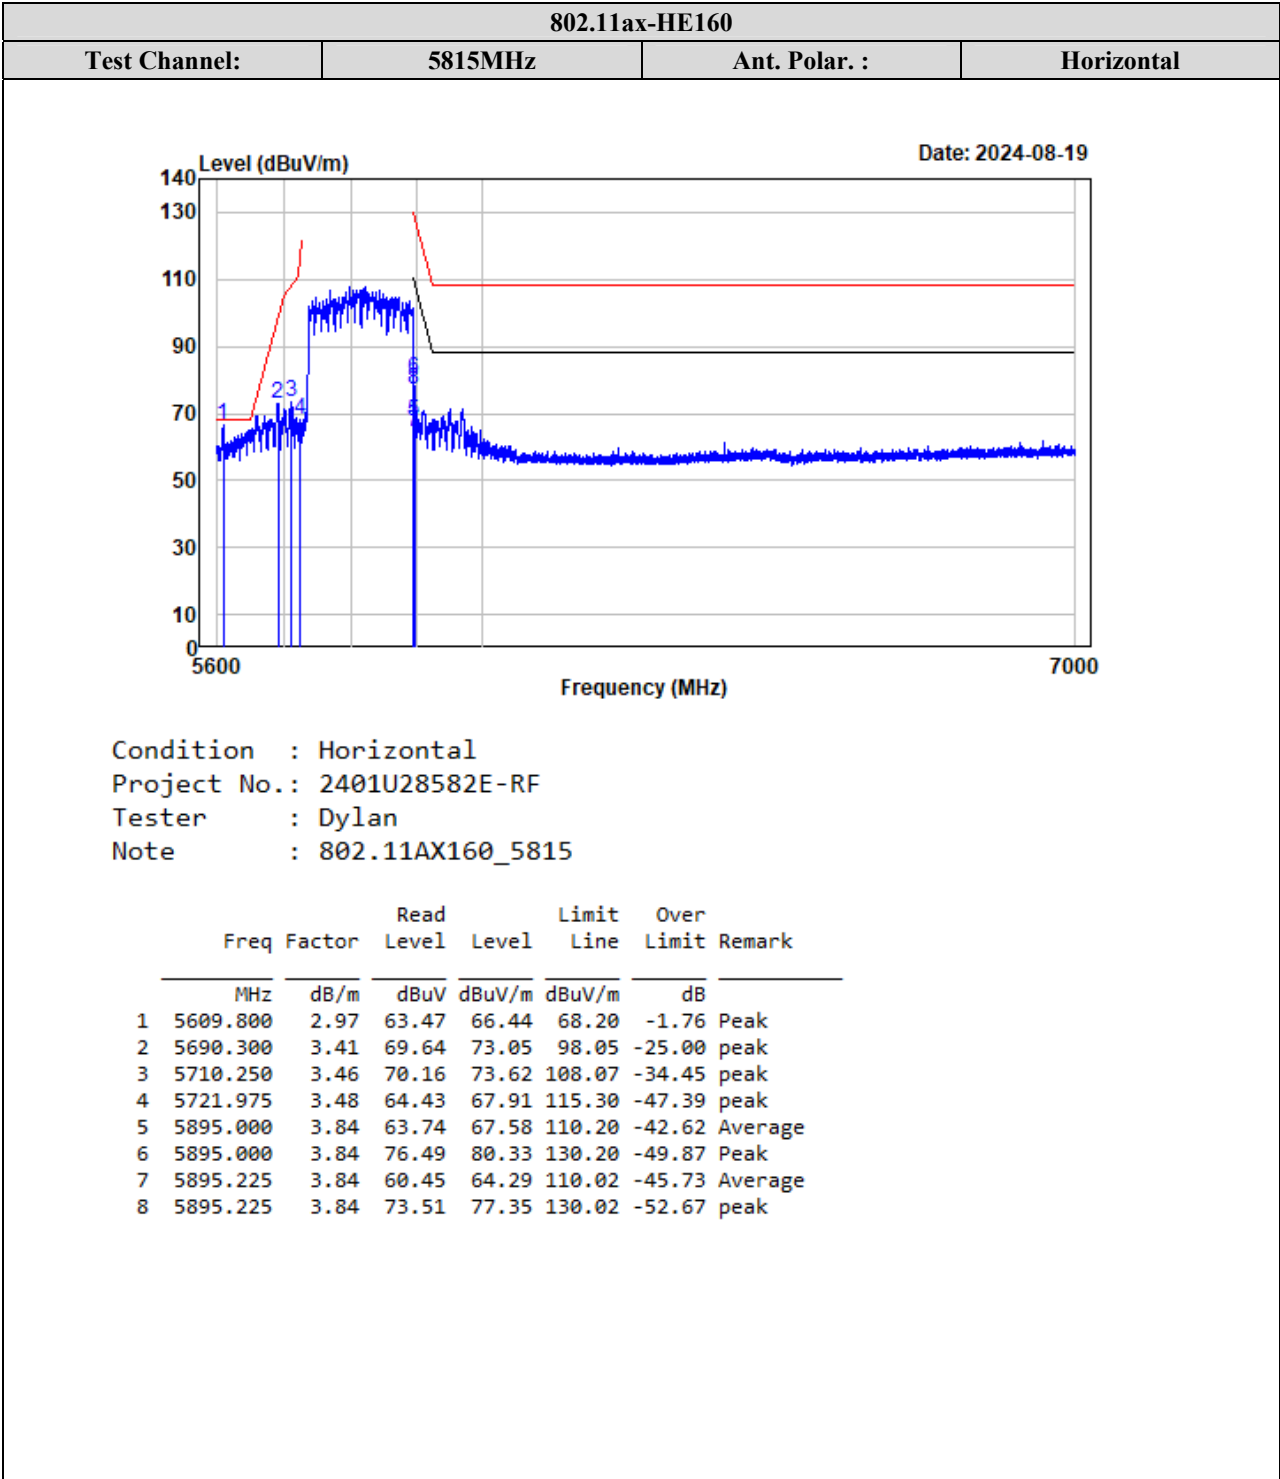


802.11ax-HE160

Test Channel:

5815MHz

Ant. Polar. :

Vertical

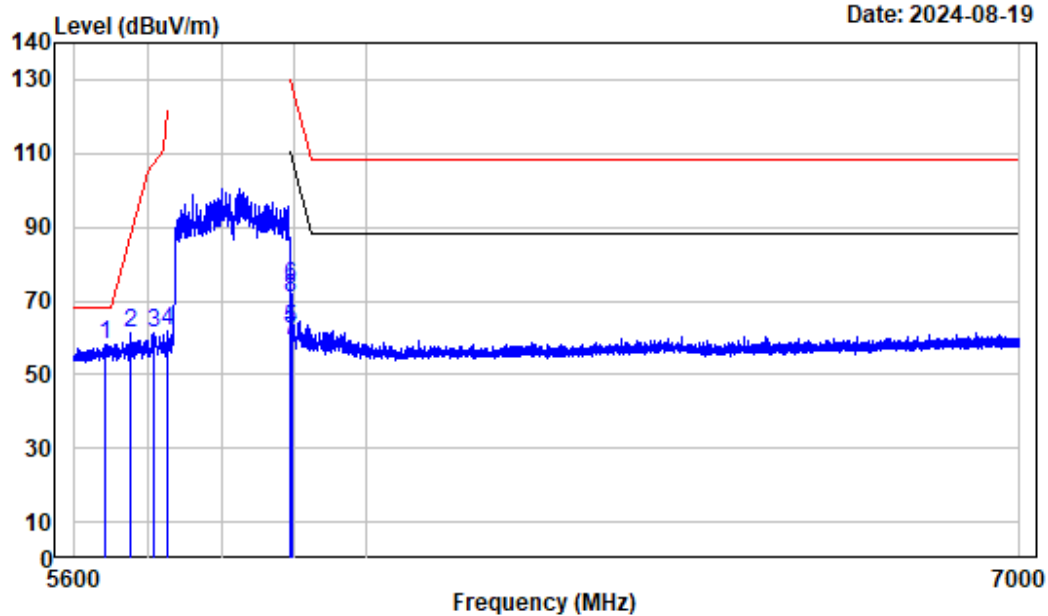

Condition : Vertical


Project No.: 2401U28582E-RF


Tester : Dylan


Note : 802.11AX160_5815


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5640.950	3.20	55.17	58.37	68.20	-9.83	peak
2	5675.250	3.36	57.73	61.09	86.93	-25.84	peak
3	5706.750	3.45	57.70	61.15	107.09	-45.94	peak
4	5724.950	3.48	58.26	61.74	122.09	-60.35	peak
5	5895.000	3.84	58.64	62.48	110.20	-47.72	Average
6	5895.000	3.84	70.03	73.87	130.20	-56.33	Peak
7	5895.225	3.84	55.53	59.37	110.02	-50.65	Average
8	5895.225	3.84	67.04	70.88	130.02	-59.14	peak


Test plots for Harmonic and Emissions Measurements:

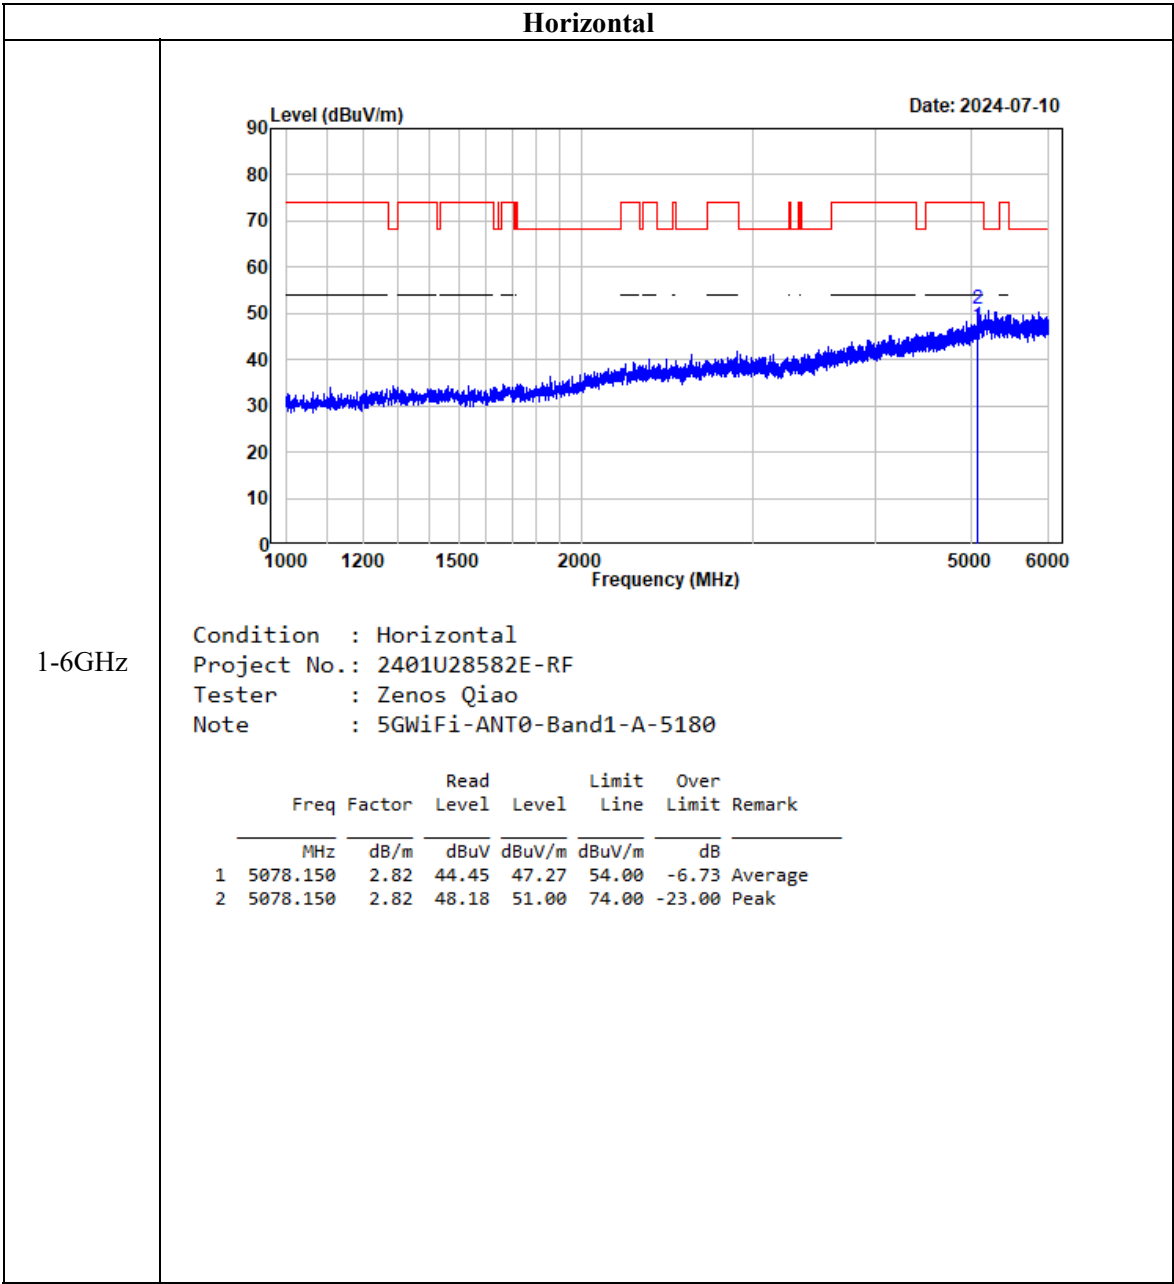


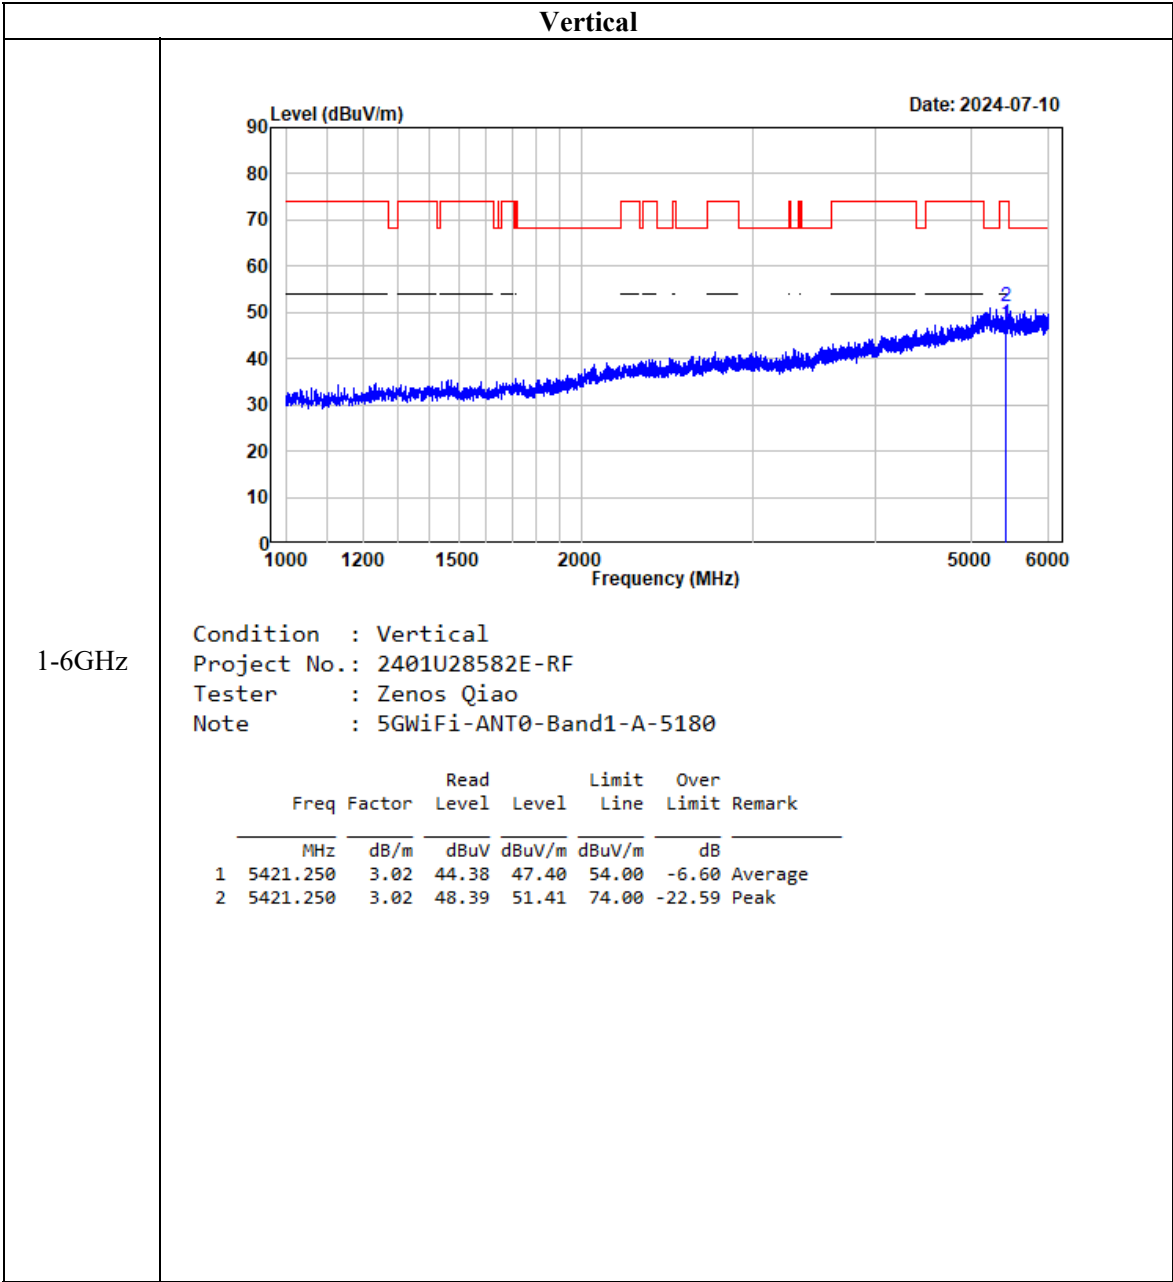

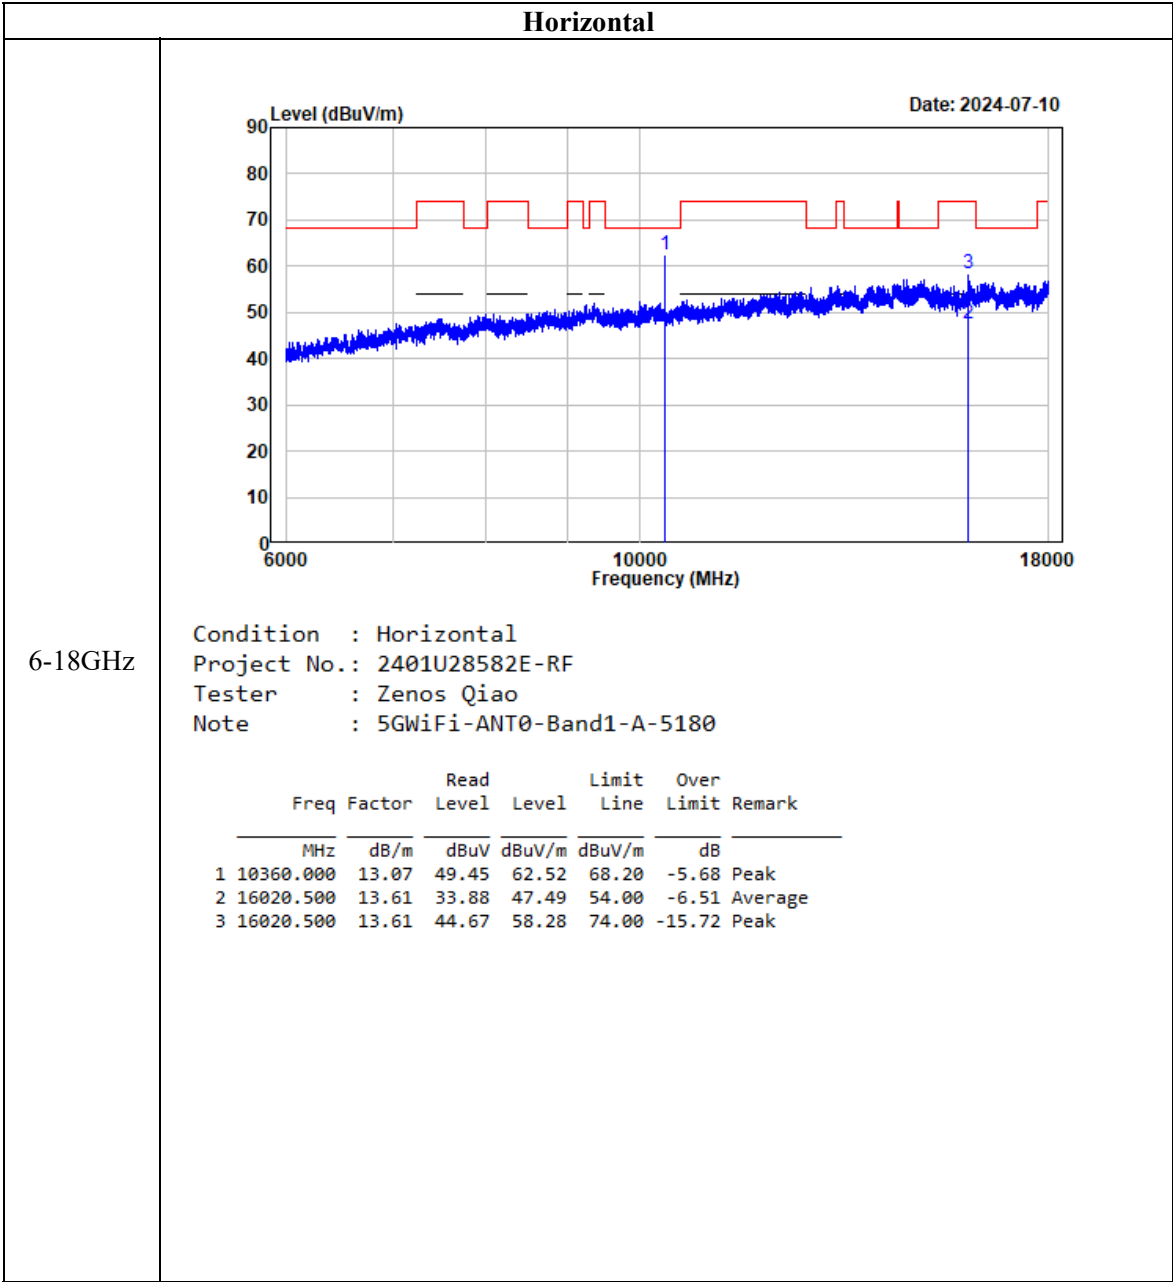

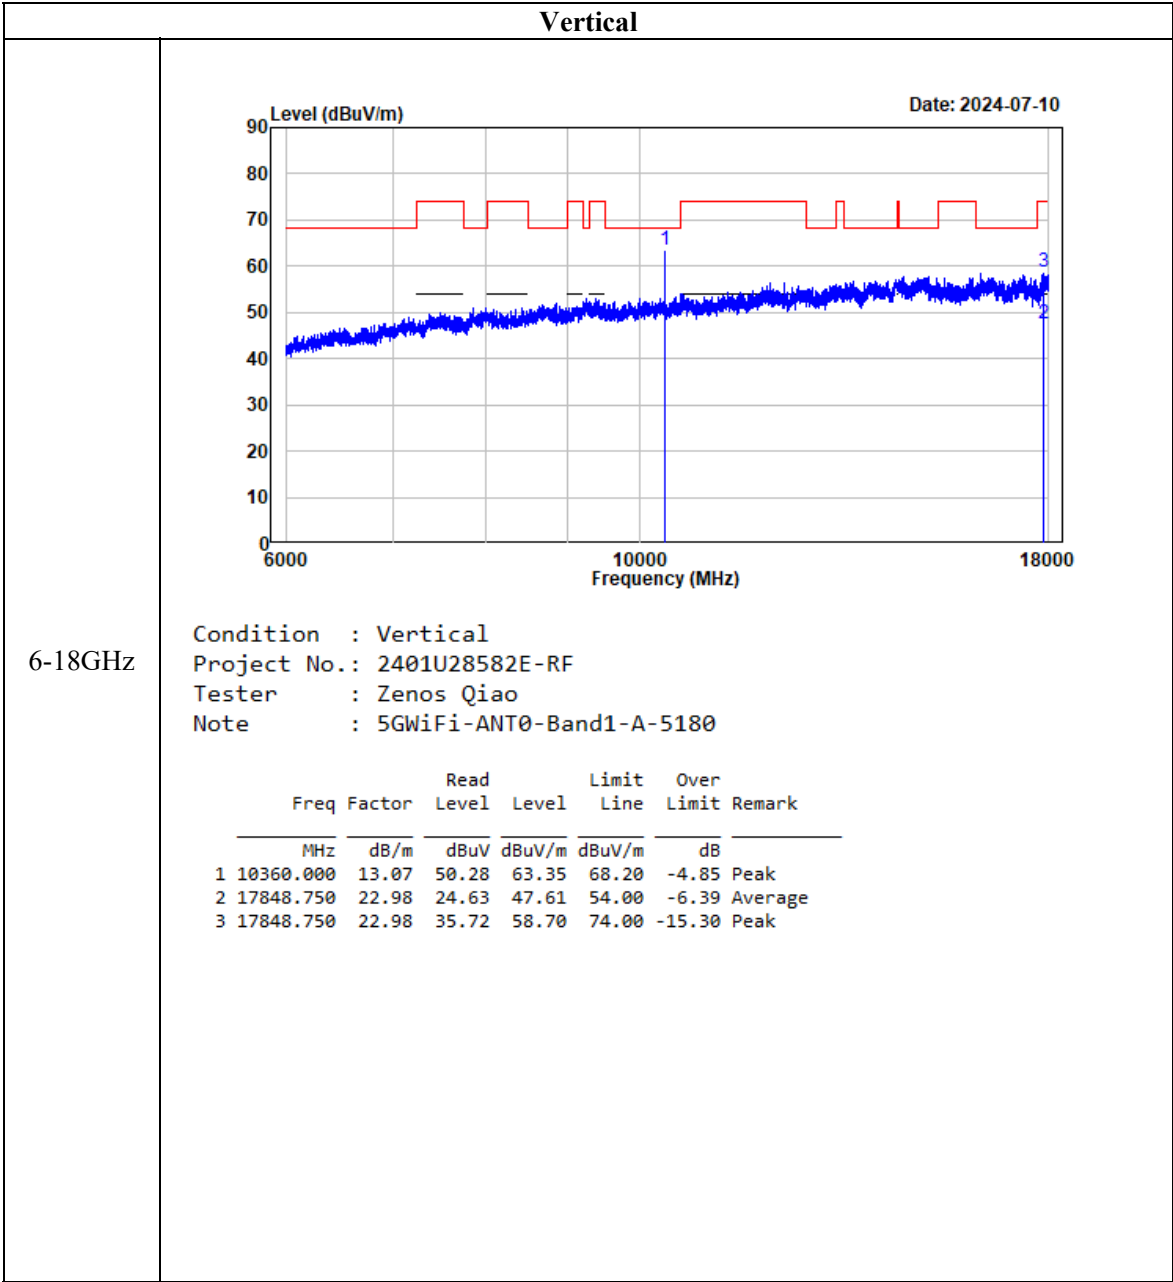

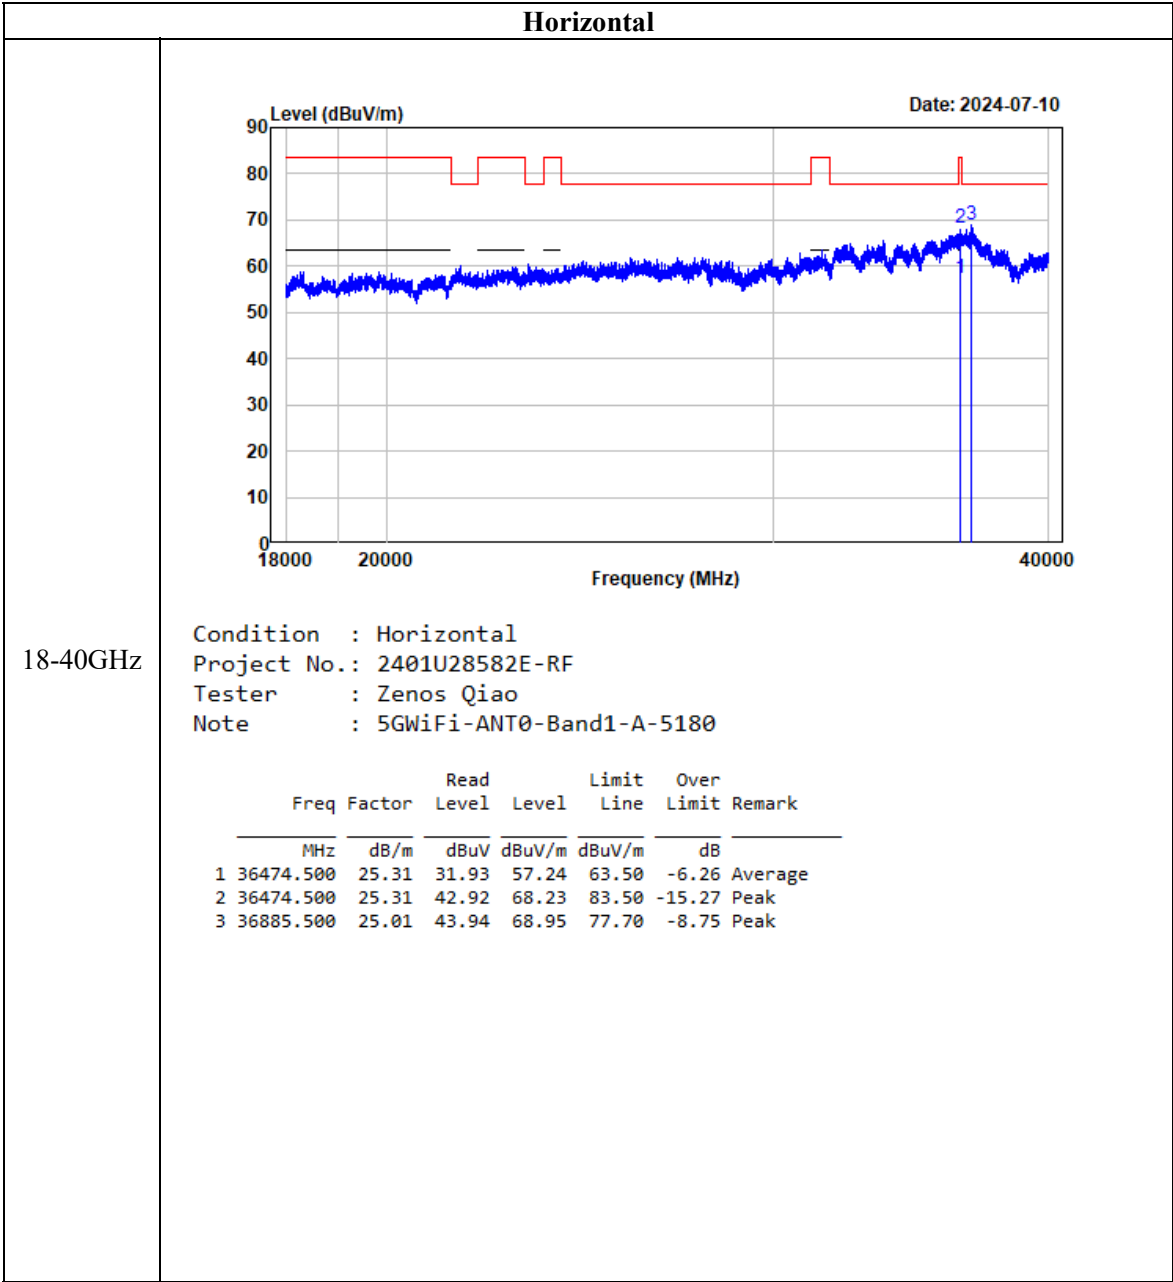

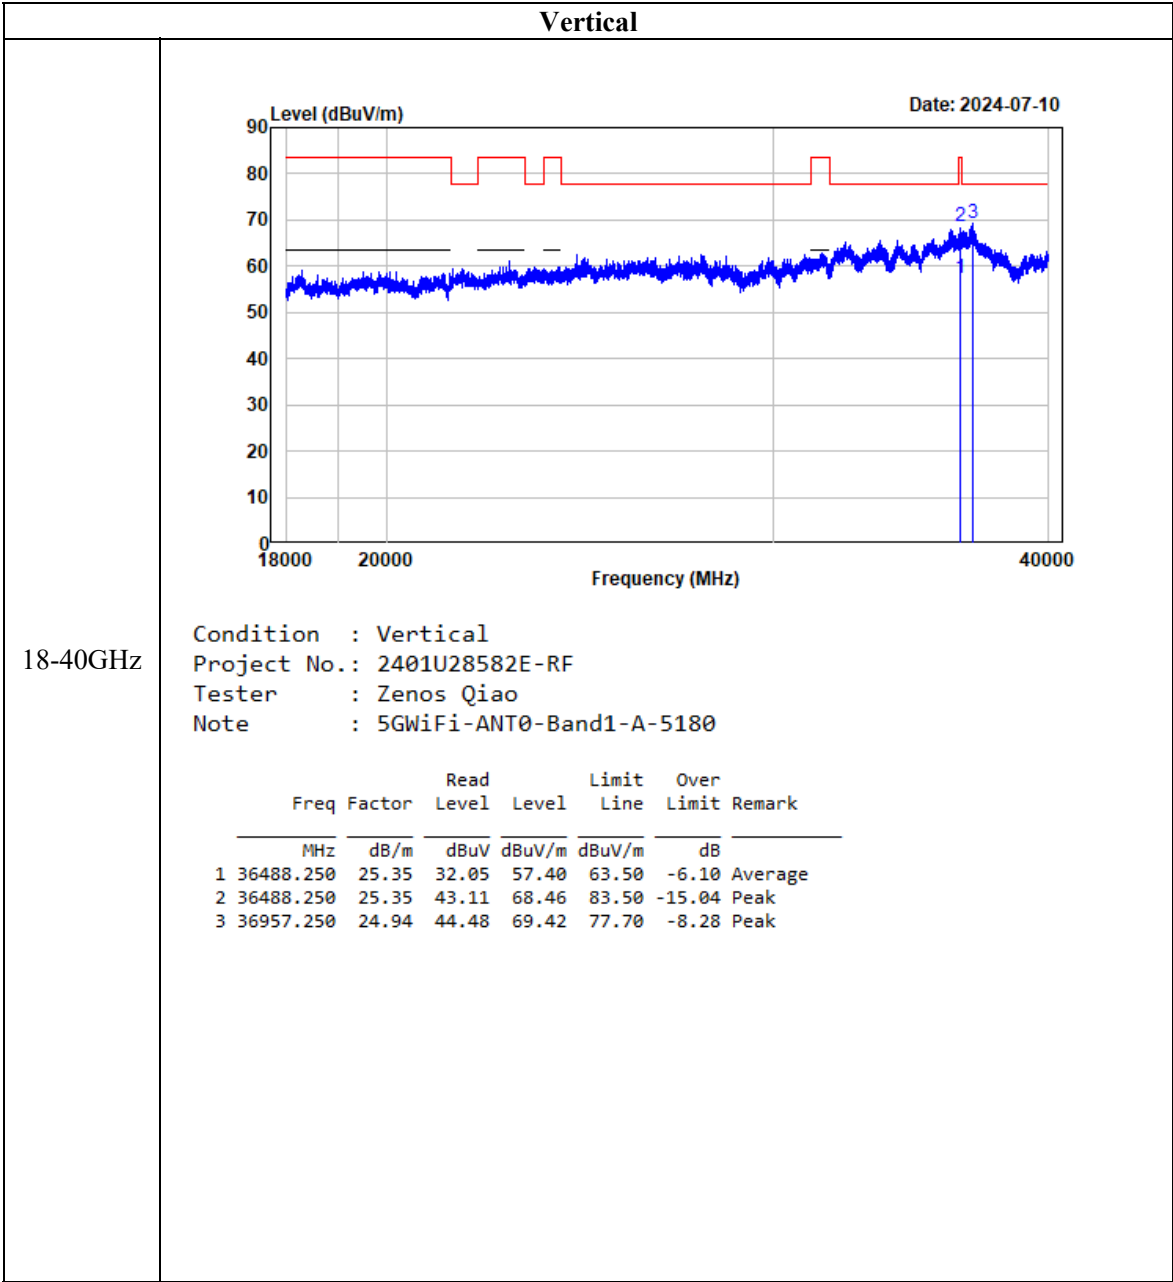

FCC §15.407(a), (e) - 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to KDB789033 D02 section II.C and section II.D

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3. 99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3


The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

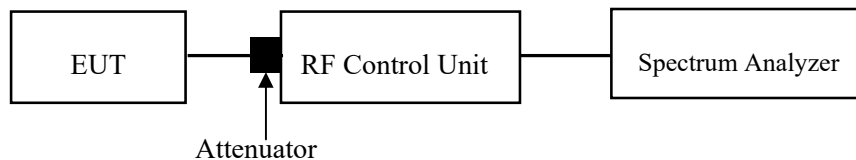

or

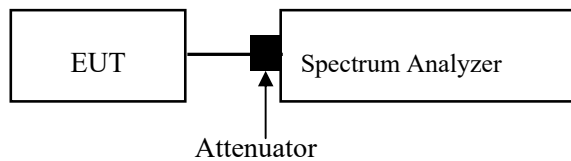

Test Data

Environmental Conditions

Temperature:	22~25.5 °C
Relative Humidity:	50~58 %
ATM Pressure:	101 kPa

The testing was performed by Kungfumaster Liang and Lee Li from 2024-07-16 to 2024-08-03.

EUT operation mode: Transmitting


Test Result: Compliant.


5850~5895 MHz:




Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6 dB Bandwidth Limit (MHz)
802.11a	5845	16.304	17.782	0.5
	5865	16.344	17.782	0.5
	5885	16.344	17.782	0.5
802.11ac vht20	5845	17.303	18.142	0.5
	5865	17.283	18.102	0.5
	5885	17.303	18.182	0.5
802.11ac vht40	5835	35.405	36.604	0.5
	5875	35.285	36.683	0.5
802.11ac vht80	5855	74.950	75.604	0.5
802.11ac vht160	5815	154.590	153.766	0.5
802.11ax he20	5845	18.971	19.181	0.5
	5865	19.031	19.181	0.5
	5885	19.011	19.181	0.5
802.11ax he40	5835	37.483	37.642	0.5
	5875	37.243	37.722	0.5
802.11ax he80	5855	76.900	77.363	0.5
802.11ax he160	5815	155.260	155.045	0.5
Note: Test only was performed at Chain 0.				


5850-5895 MHz:


6dB Emission Bandwidth	
802.11a Lowest Channel	Spectrum Ref Level 25.00 dBm Offset 10.50 dB RBW 100 kHz Att 30 dB SWT 1 s VBW 300 kHz Mode Auto Sweep 1Pk View M1[1] 3.93 dBm 5.8368480 GHz -0.04 dB 16.3040 MHz D1[1] 10 dBm D1 9.550 dBm D2 3.550 dBm 20 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.845 GHz 1001 pts Span 40.0 MHz ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang Date: 3.AUG.2024 00:01:53
802.11a Middle Channel	Spectrum Ref Level 25.00 dBm Offset 10.50 dB RBW 100 kHz Att 30 dB SWT 1 s VBW 300 kHz Mode Auto Sweep 1Pk View M1[1] 3.00 dBm 5.8568080 GHz 1.06 dB 16.3440 MHz D1[1] 10 dBm D1 9.570 dBm D2 3.570 dBm 20 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.865 GHz 1001 pts Span 40.0 MHz ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang Date: 3.AUG.2024 00:04:35
802.11a Highest Channel	Spectrum Ref Level 25.00 dBm Offset 10.50 dB RBW 100 kHz Att 30 dB SWT 1 s VBW 300 kHz Mode Auto Sweep 1Pk View M1[1] 3.10 dBm 5.8768080 GHz 1.05 dB 16.3440 MHz D1[1] 10 dBm D1 9.630 dBm D2 3.630 dBm 20 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 5.885 GHz 1001 pts Span 40.0 MHz ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang Date: 3.AUG.2024 00:06:43

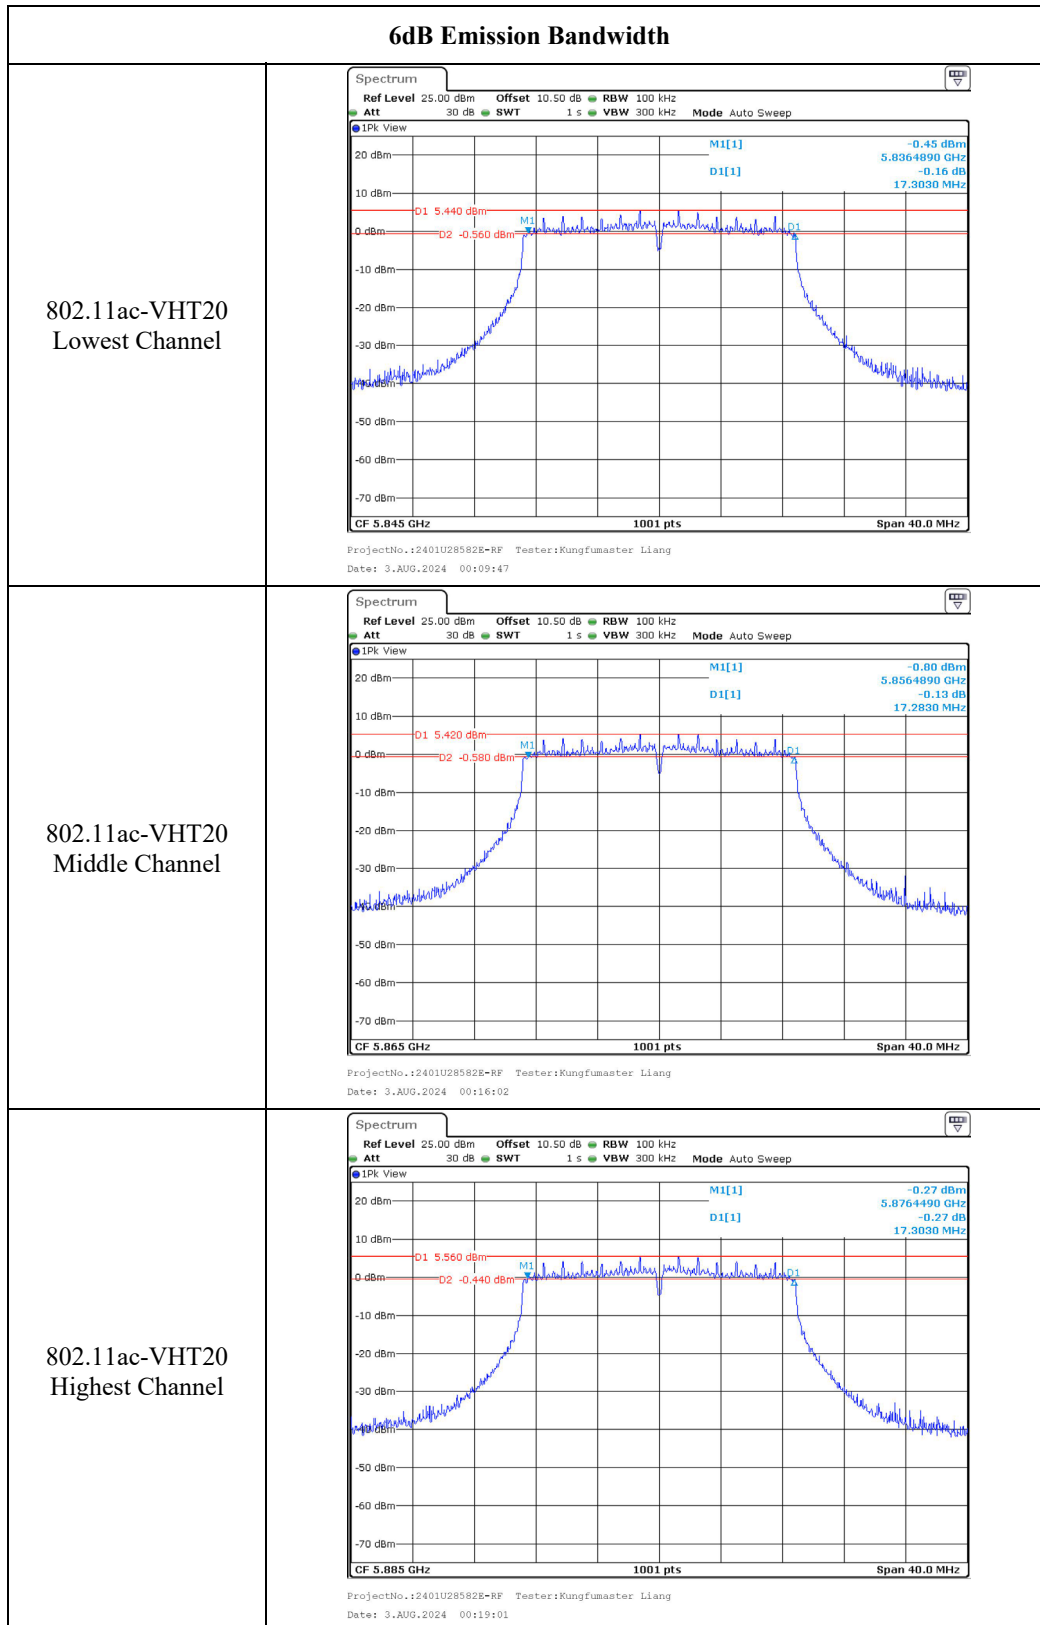

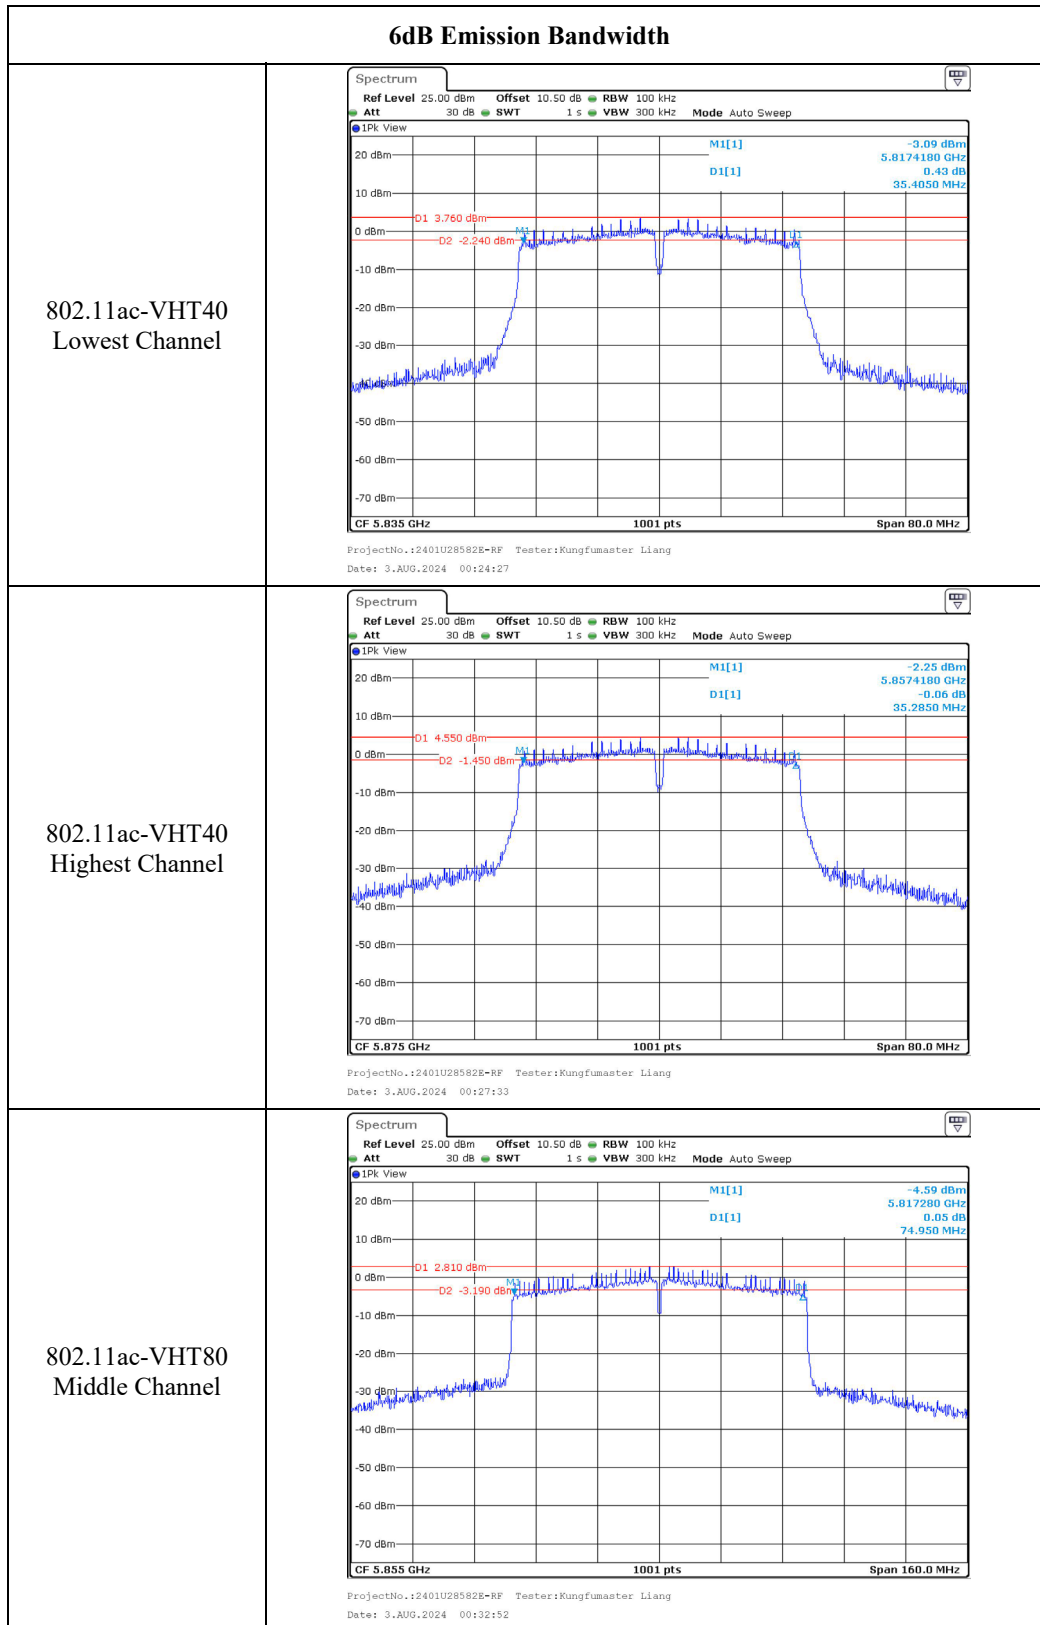

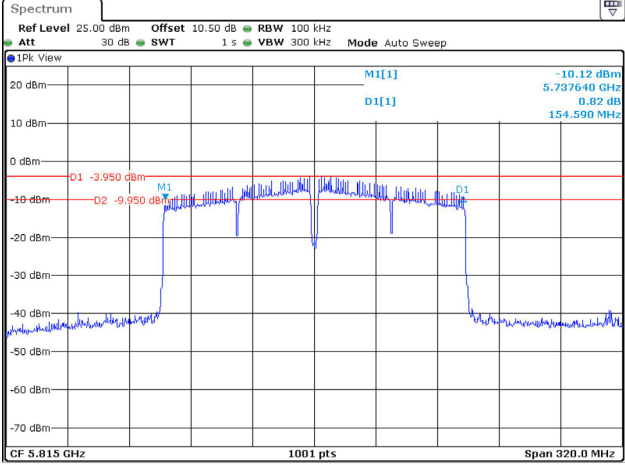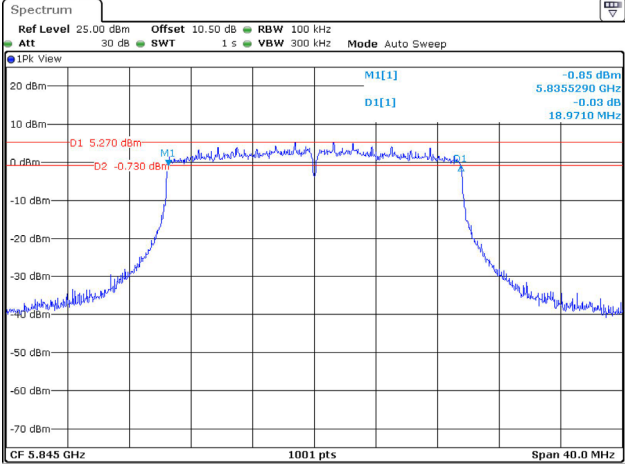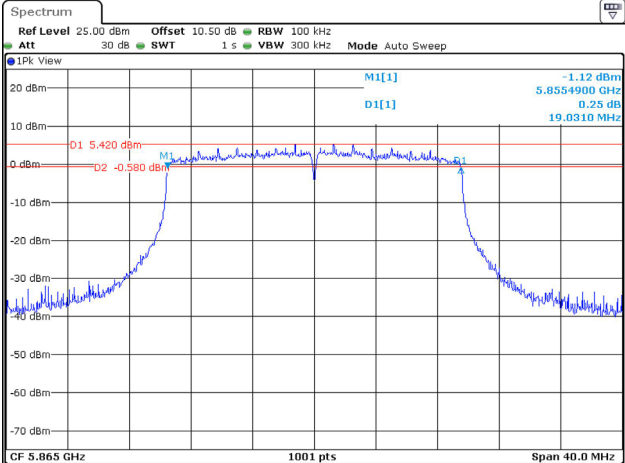
6dB Emission Bandwidth	
802.11ac-VHT160 Middle Channel	 ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang Date: 3.AUG.2024 00:36:51
802.11ax-HE20 Lowest Channel	 ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang Date: 3.AUG.2024 00:40:28
802.11ax-HE20 Middle Channel	 ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang Date: 3.AUG.2024 00:43:11

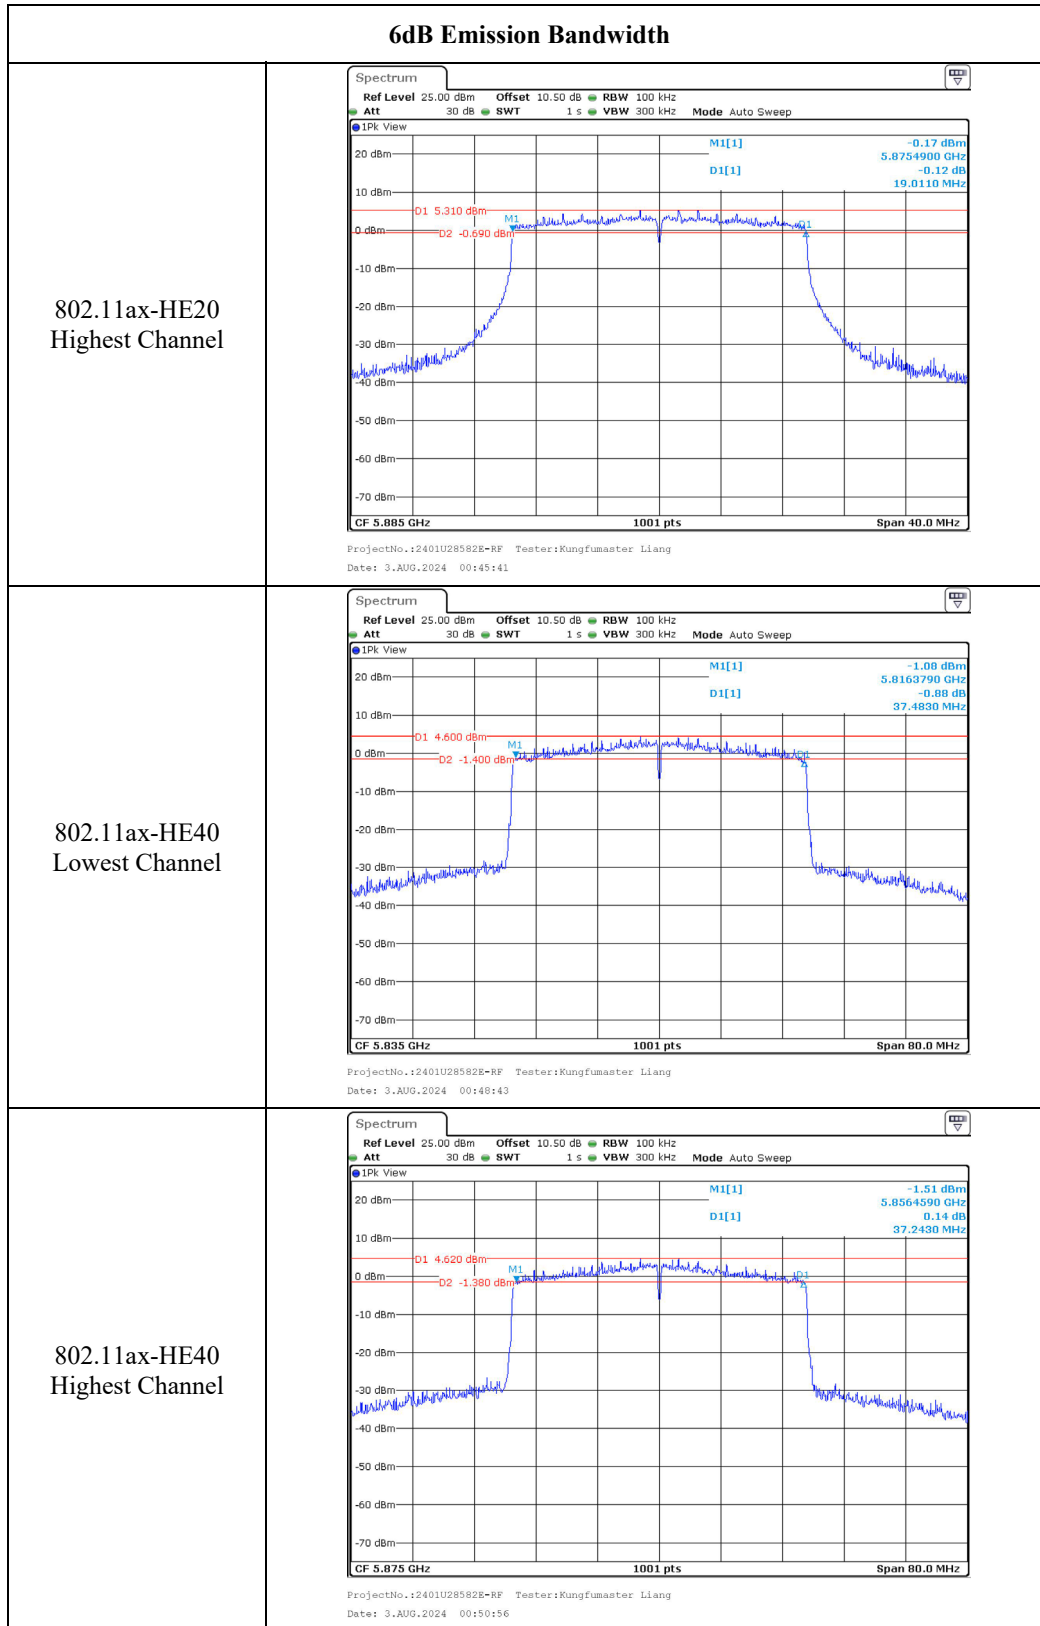

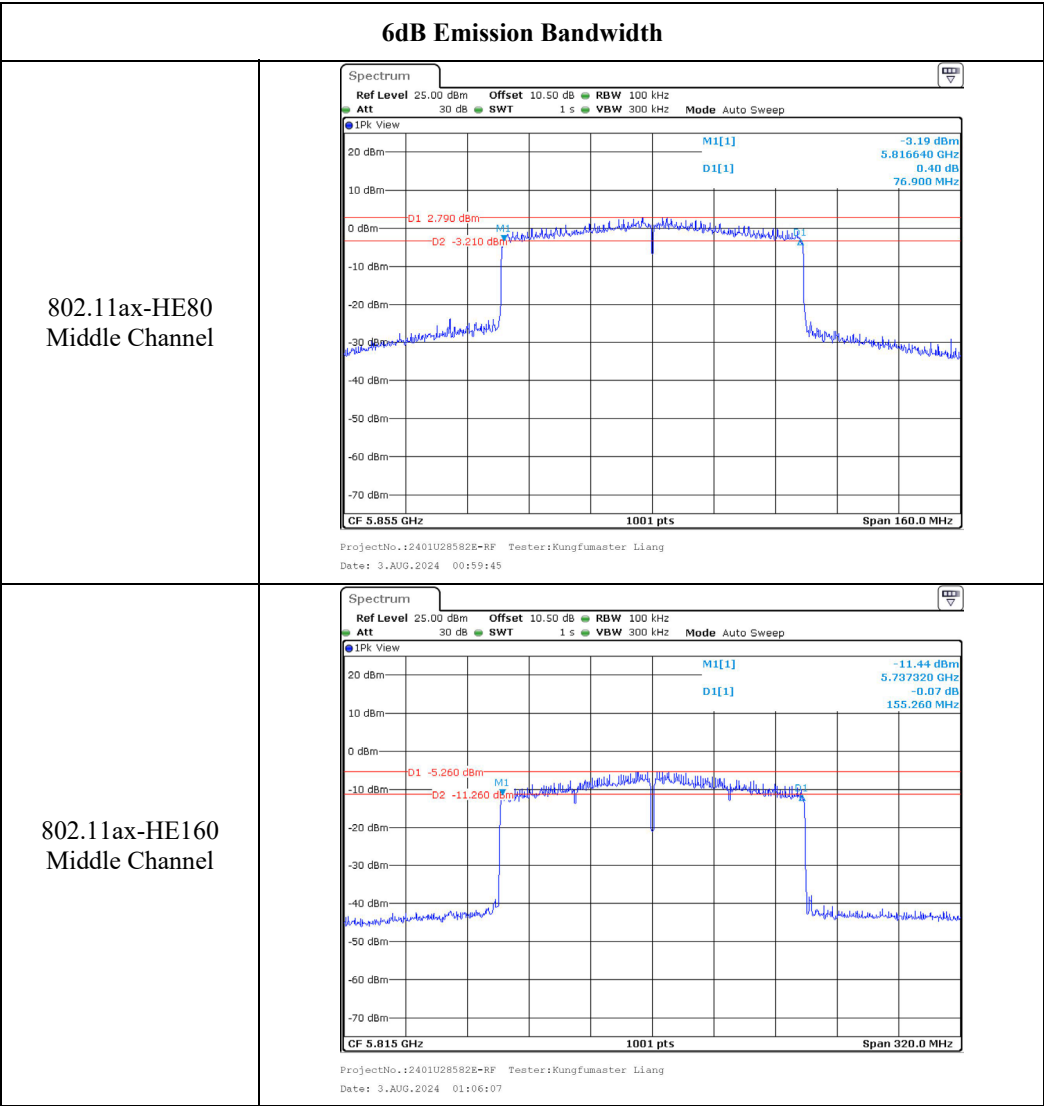


99% Emission Bandwidth

802.11a
Lowest Channel

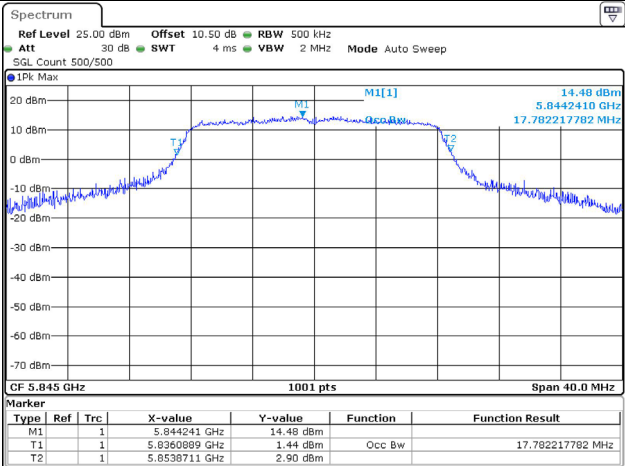


ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang
Date: 3.AUG.2024 01:13:46

802.11a
Middle Channel

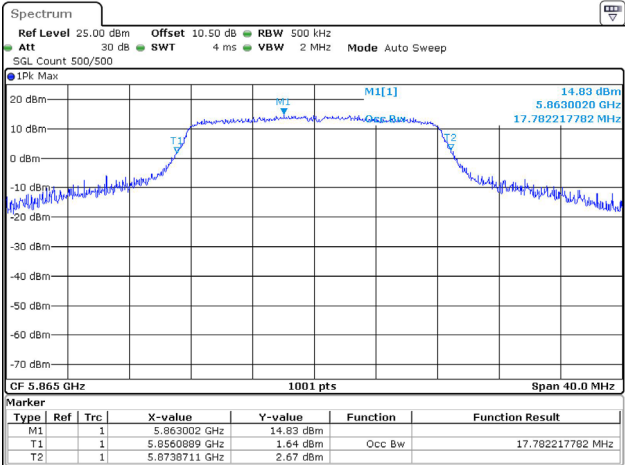

ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang
Date: 3.AUG.2024 01:14:47

802.11a
Highest Channel

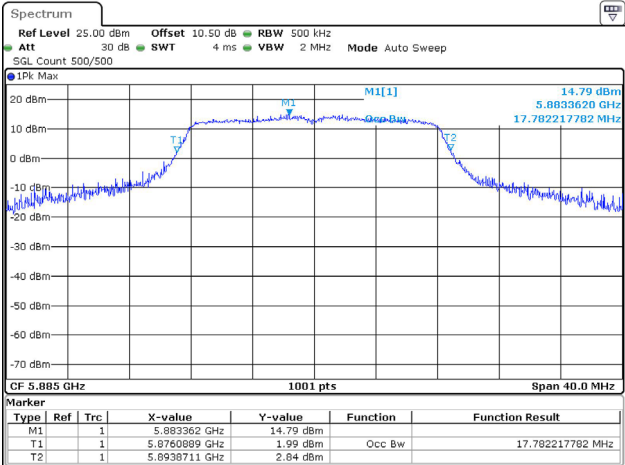

ProjectNo.:2401U28582E-RF Tester:Kungfumaster Liang
Date: 3.AUG.2024 01:15:33

