



Certificate #4312.01

TEST REPORT

Product Name: 802.11ax Wi-Fi 6 Access Point
Trade Mark: GRANDSTREAM
Model No.: GWN7660E
Report Number: 2307186039RFC-1
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: YZZGWN7660E
Test Result: PASS
Date of Issue: September 6, 2023

Prepared for:

Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

Kieron Luo
Project Engineer

Reviewed by:

Henry Lu
Team Leader

Approved by:

Kevin Liang
Assistant Manager

Date: September 6, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Version

Version No.	Date	Description
V1.0	September 6, 2023	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	14
4.6 SYSTEM TEST CONFIGURATION	14
4.7 DUTY CYCLE	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	19
5.1 REFERENCE DOCUMENTS FOR TESTING	19
5.2 ANTENNA REQUIREMENT	19
5.3 CONDUCTED OUTPUT POWER	20
5.4 6 dB BANDWIDTH	22
5.5 POWER SPECTRAL DENSITY	23
5.6 CONDUCTED OUT OF BAND EMISSION	24
5.7 RADIATED SPURIOUS EMISSIONS	25
5.8 BAND EDGE MEASUREMENTS (RADIATED)	36
5.9 CONDUCTED EMISSION	54
APPENDIX A RF TEST DATA	57
A.1 99% BANDWIDTH	57
A.2 6dB BANDWIDTH	64
A.3 CONDUCTED OUT OF BAND EMISSION	71
A.4 POWER SPECTRAL DENSITY	88
APPENDIX 1 PHOTOS OF TEST SETUP	95
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	95

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	802.11ax Wi-Fi 6 Access Point		
Model No.:	GWN7660E		
Trade Mark:	GRANDSTREAM		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
	U-NII 5 GHz Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac/ax
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax
Software Version:	0.8.4.1 (Provided by the customer)		
Hardware Version:	V1.2 (Provided by the customer)		
Sample Received Date:	July 17, 2023		
Sample Tested Date:	July 17, 2023 to August 23, 2023		
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.			

1.2.2 Description of Accessories

Others
1x Mounting Bracket, 1x Ceiling Mounting Bracket

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz	
Frequency Range:	2412 MHz to 2462 MHz	
Support Standards:	IEEE 802.11b/g/n-HT20/n-HT40/ax-HE20/ax-HE40	
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)	
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20/HT40: Up to MCS15 IEEE 802.11ax-HE20/ HE40: Up to MCS11	
Number of Channels:	IEEE 802.11b/g/n-HT20/ax-HE20: 11 IEEE 802.11n-HT40/ax-HE40: 7	
Channel Separation:	5 MHz	
Antenna Type: (Provided by the customer)	Antenna 0	PCB Antenna
	Antenna 1	PCB Antenna
Antenna Gain: (Provided by the customer)	Antenna 0	4.52 dBi
	Antenna 1	4.66 dBi
Normal Test Voltage:	48 Vdc	

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20 IEEE 802.11ax-HE20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40 IEEE 802.11ax-HE40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
POE	Gospower	G0720-480-050	N/A	Applicant
Notebook	DELL	Latitude 3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length (Meter)	Supplied by
1	Ethernet Cable	RJ45	1.5 Unshielded without ferrite	UnionTrust
2	Antenna Cable*2	SMA	0.1	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB
8	Radio frequency	± 6.5 × 10 ⁻⁸
9	Occupied Channel Bandwidth	± 1.86 %
10	RF output power, conducted	± 0.68 dB
11	Power Spectral Density	± 0.6 dB
12	Spurious emissions, conducted	± 2.7 dB
13	Time	± 0.19 %

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)(4)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS
Note: 1) N/A: In this whole report not applicable.			
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT 001270-1317	22-Jan-2021	21-Jan-2024
☒	Receiver	R&S	ESIB26	100114	3-Nov-2022	2-Nov-2023
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023	13-Apr-2024
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	21-Nov-2022	20-Nov-2023
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	13-Dec-2022	12-Dec-2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	13-Dec-2022	12-Dec-2023
☒	Preamplifier	HP	8447F	2805A02960	1-Nov-2022	31-Oct-2023
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	16-Apr-2023	15-Apr-2025
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	1-Nov-2022	31-Oct-2023
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	21-Nov-2022	20-Nov-2023
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	21-Nov-2022	20-Nov-2023
☒	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	2-Nov-2022	1-Nov-2023
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESR7	101181	1-Nov-2022	31-Oct-2023
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	1-Nov-2022	31-Oct-2023
☒	LISN	R&S	ESH2-Z5	860014/024	1-Nov-2022	31-Oct-2023
☐	LISN	ETS-Lindgren	3816/2SH	00201088	1-Nov-2022	31-Oct-2023
☒	Test Software	Audix	e3	Software Version: 9 20151119i		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023	13-Apr-2024
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	3-Nov-2022	2-Nov-2023
☒	Spectrum Analyzer	R&S	FSV40-N	101653	14-Apr-2023	13-Apr-2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	48	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	21.2	62.2	98.8	S202307171813-ZJA03/5	Lucas Ouyang
Conducted Peak Output Power	22.4	54.3	98.8	S202307171813-ZJA01/5	Allen Zhou
6dB Bandwidth					
Power Spectral Density					
Conducted Out of Band Emission	21.9	57.5	98.1	S202307171813-ZJA03/5	Fire Huo
Radiated Spurious Emissions					
Band Edge Measurements (Radiated)					

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency (MHz)	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412-2462	Channel 1	Channel 6	Channel 11
IEEE 802.11g				
IEEE 802.11n-HT20		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11ax-HE20				
Mode	Tx/Rx Frequency (MHz)	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11n-HT40	2422-2452	Channel 3	Channel 6	Channel 9
IEEE 802.11ax-HE40		2422 MHz	2437 MHz	2452 MHz

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11b IEEE 802.11g	1Tx/1Rx	1. Keep the EUT in continuously transmitting or receiving with modulation and data rates test single. 2. Keep the equipment in normal operation and achieve a certain throughput.
IEEE 802.11n-HT20 IEEE 802.11n-HT40 IEEE 802.11ax-HE20 IEEE 802.11ax-HE40	2Tx/2Rx	

Power Setting (Provided by the customer)						
Mode	Lowest(L)	Middle(M)	Highest(H)	Lowest(L)	Middle(M)	Highest(H)
	Ant 0			Ant 1		
IEEE 802.11b	20.5			20.5		
IEEE 802.11g	18.5	20.5	18.5	17.5	20.5	17.5
IEEE 802.11n-HT20	14	20.5	14	14	20.5	14
IEEE 802.11n-HT40	13	20.5	13	13	20.5	13
IEEE 802.11ax-HE20 (SU)	13	20.5	13	13	20.5	13
IEEE 802.11ax-HE40 (SU)	13	20.5	13	13	20.5	13
IEEE 802.11ax only supports SU Mode.						

Test Software (Provided by the customer)
Test software name: MT7981 QA 0.0.2.78;



4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ax-HE20	MCS0
IEEE 802.11ax-HE40	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

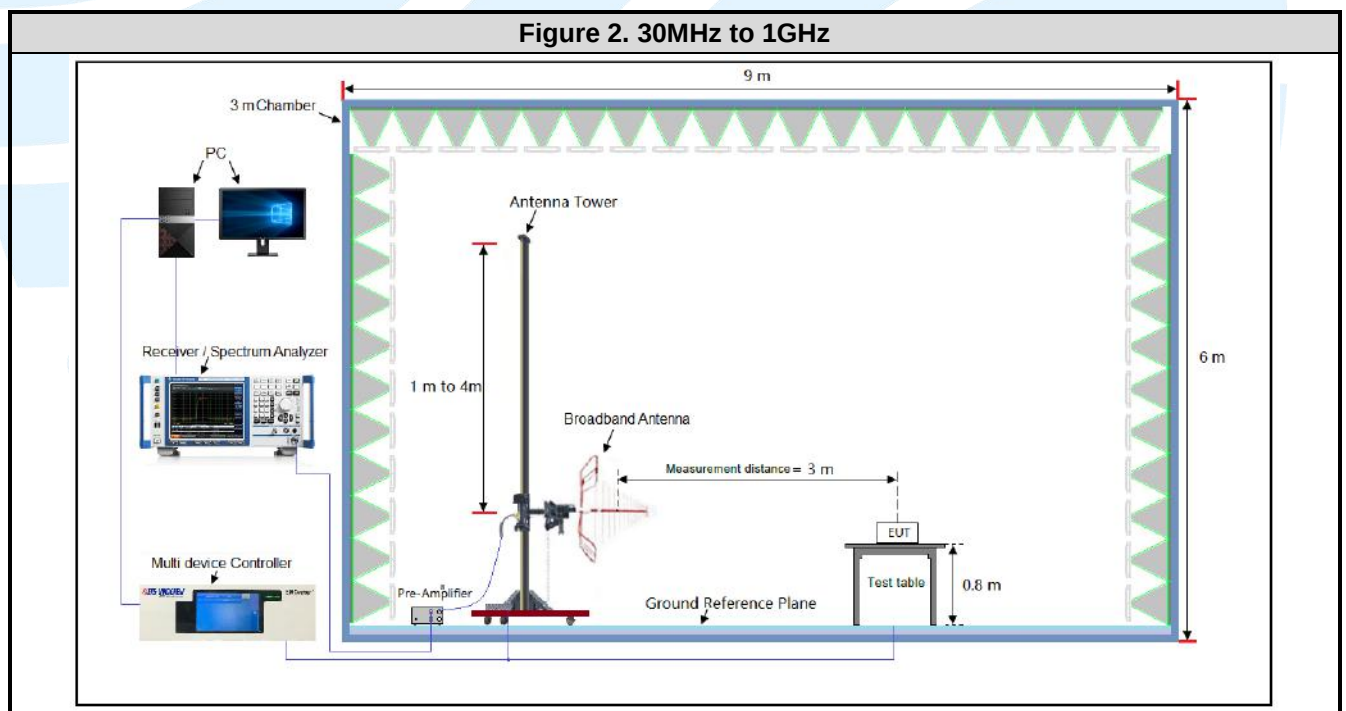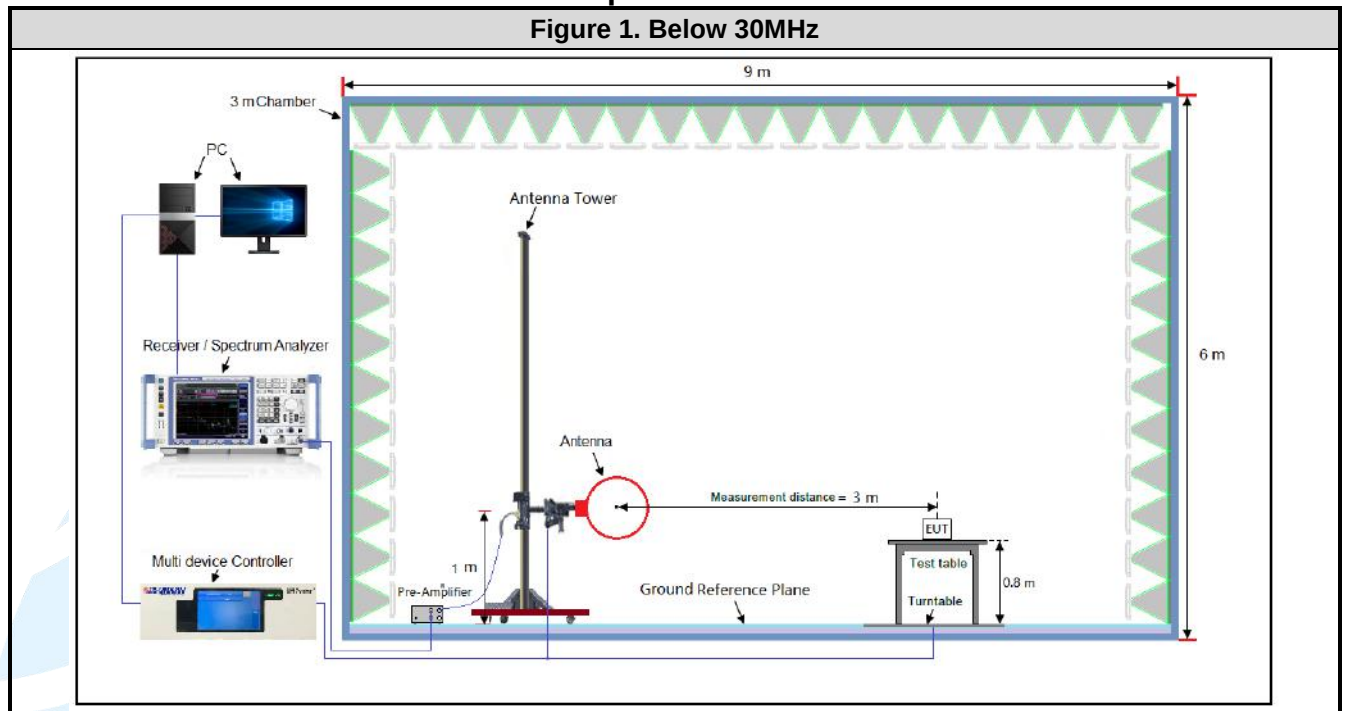


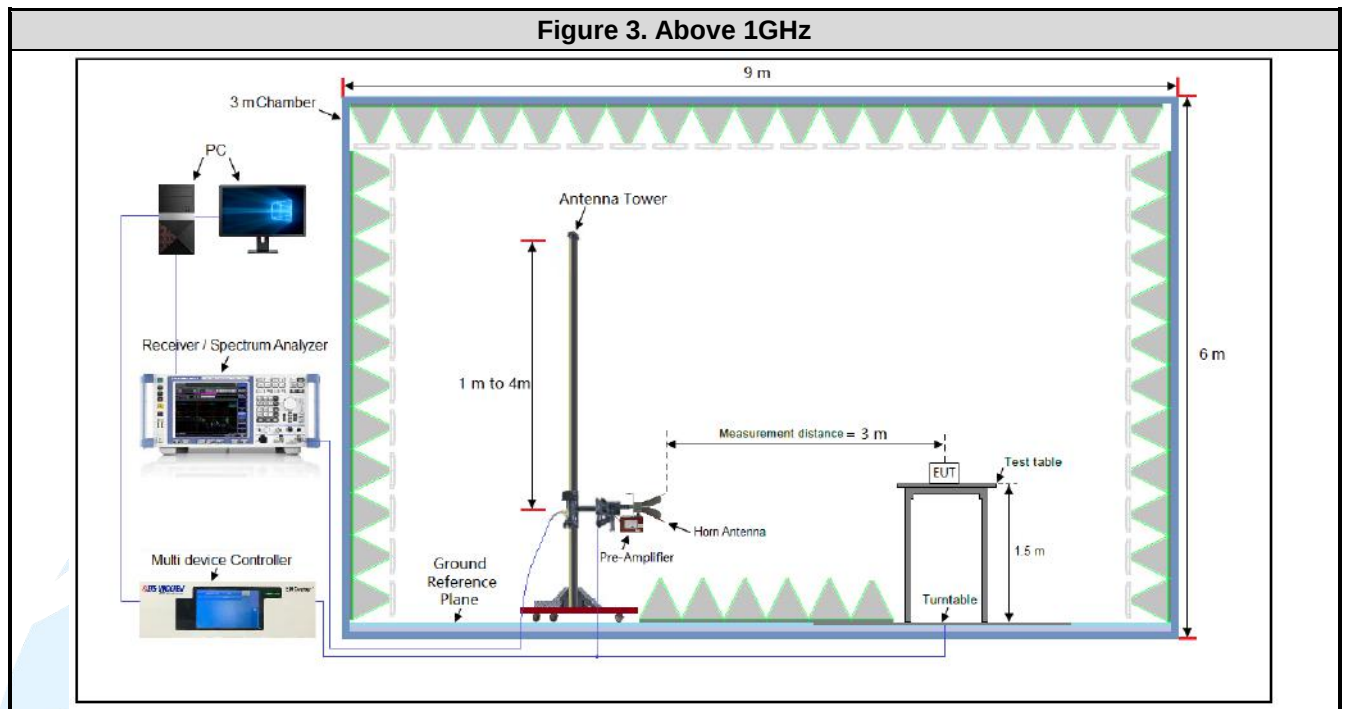

4.5.2 For Conducted Emissions test setup

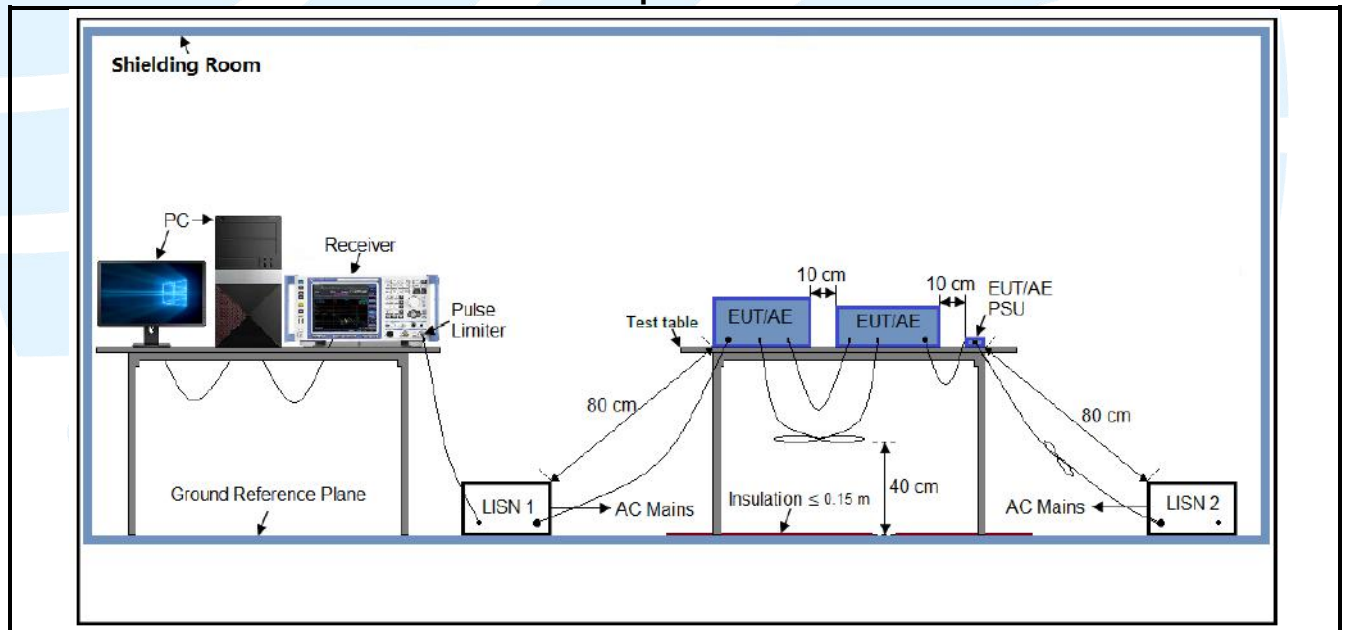

4.5.3 For Conducted RF test setup

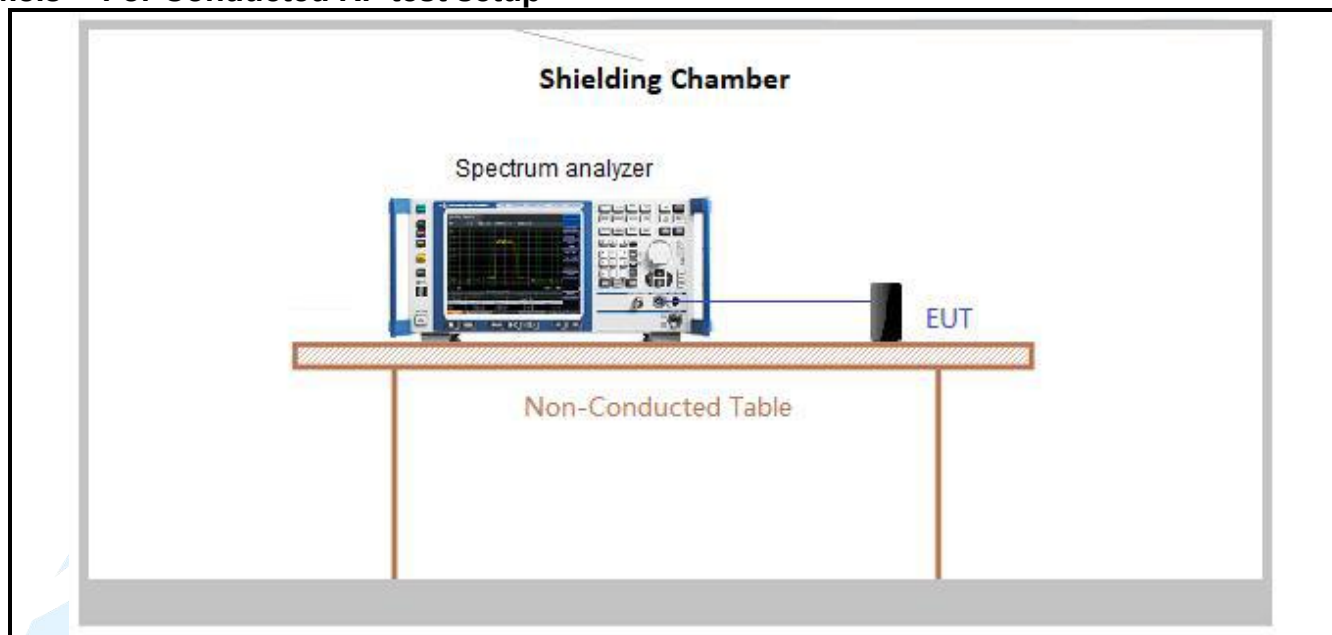

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

Mode	RU	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11b	N/A	1 Mbps	8.400	8.470	0.99	99.17	0.00	0.01
IEEE 802.11g	N/A	6 Mbps	1.384	1.456	0.95	95.05	0.22	0.72
IEEE 802.11n-HT20	N/A	MCS 0	1.296	1.328	0.98	97.59	0.11	0.77
IEEE 802.11n-HT40	N/A	MCS 0	0.640	0.705	0.91	90.78	0.42	1.56
IEEE 802.11ax-HE20	SU	MCS 0	0.205	0.265	0.77	77.36	1.11	4.88
IEEE 802.11ax-HE40	SU	MCS 0	0.200	0.265	0.75	75.47	1.22	5.00

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/\text{Duty cycle})$;

The test plots as follows

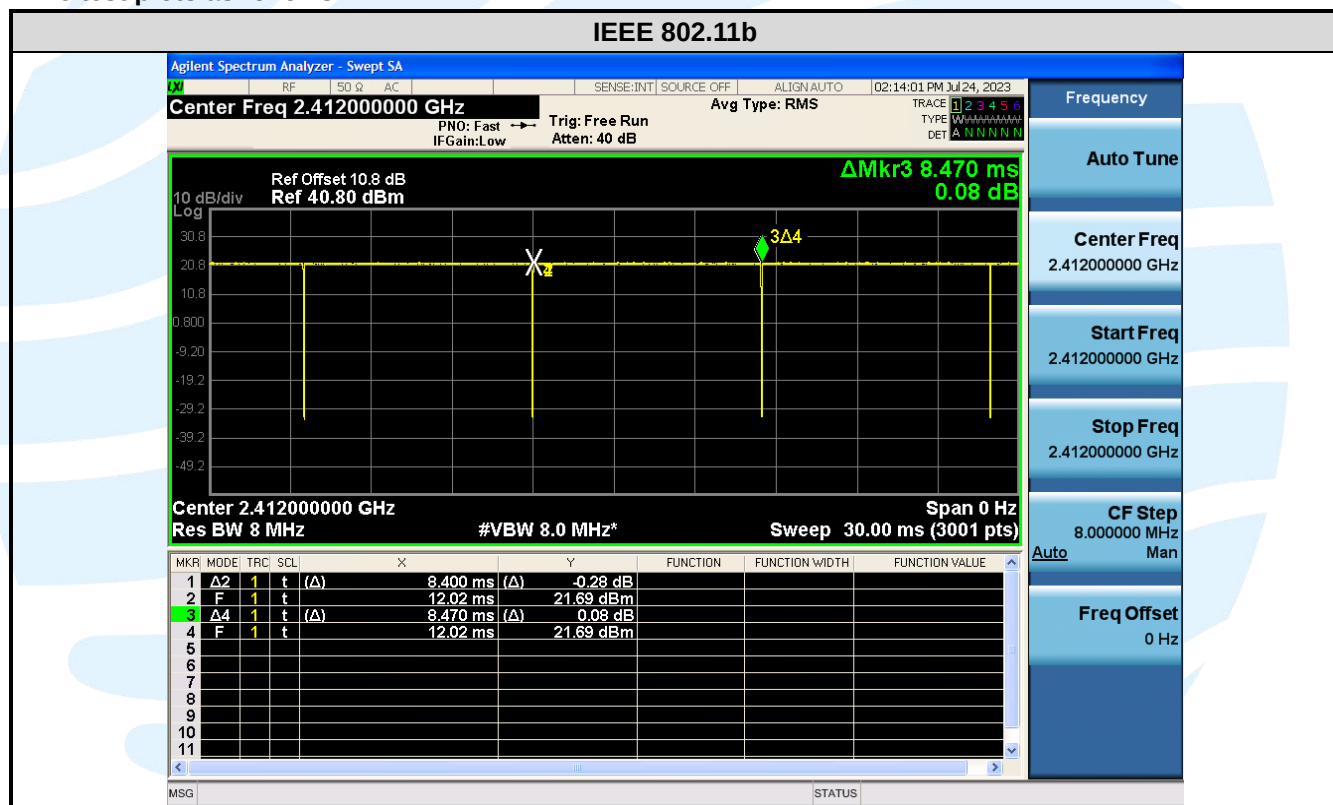

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888



Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

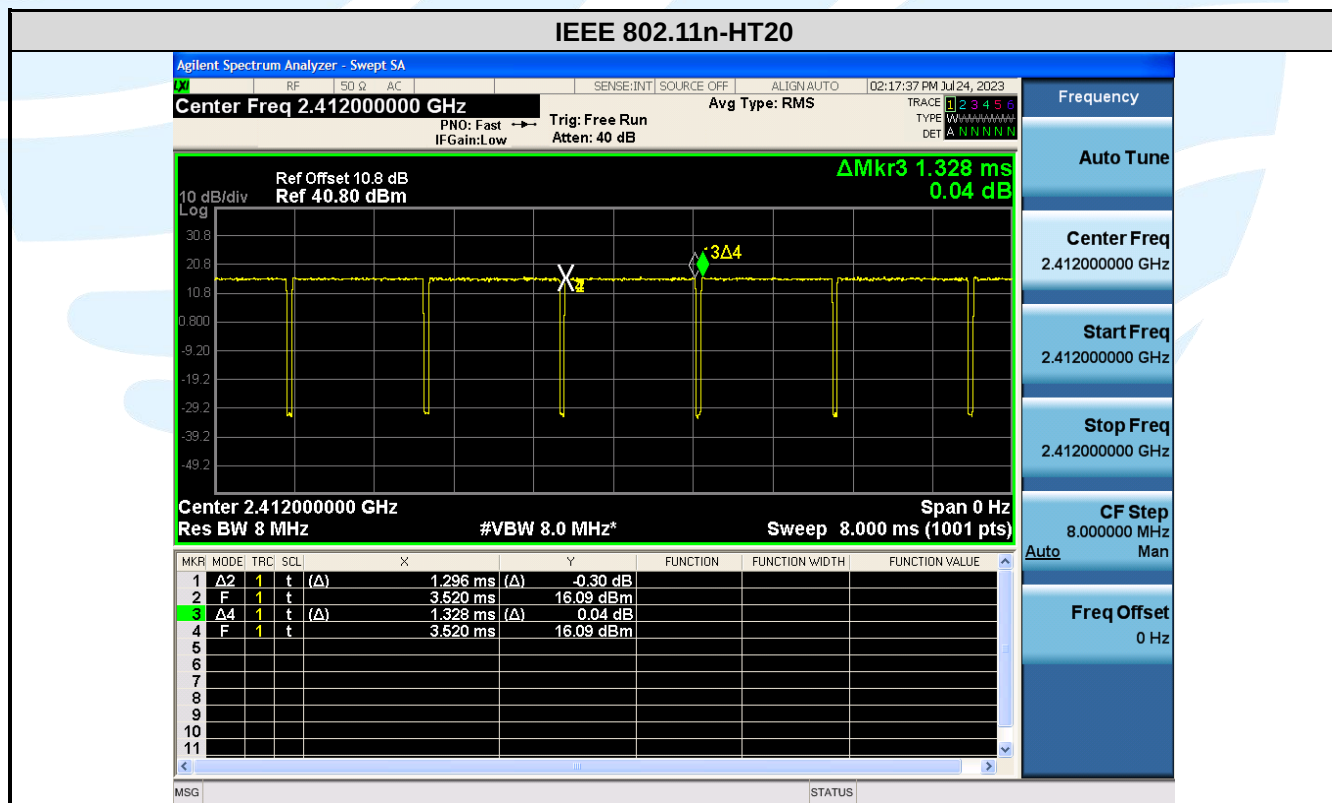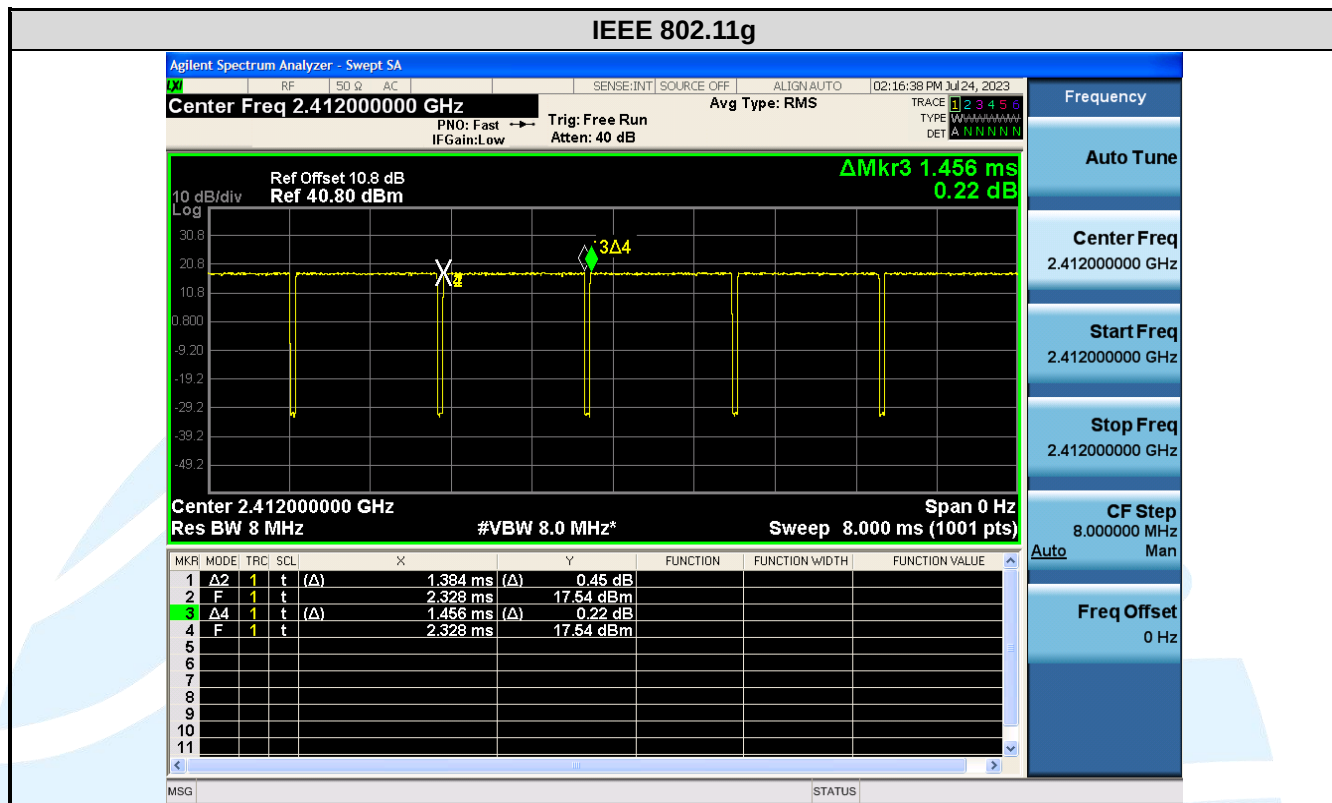

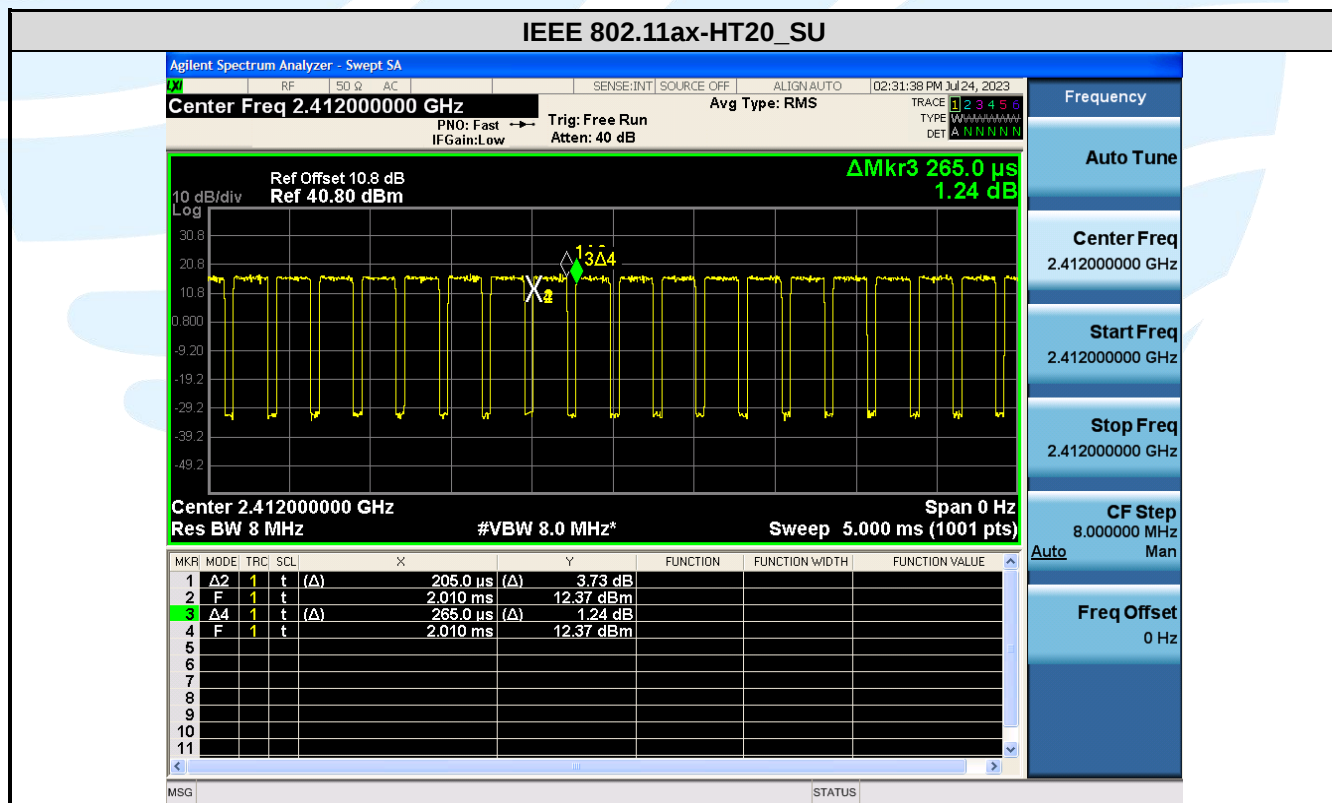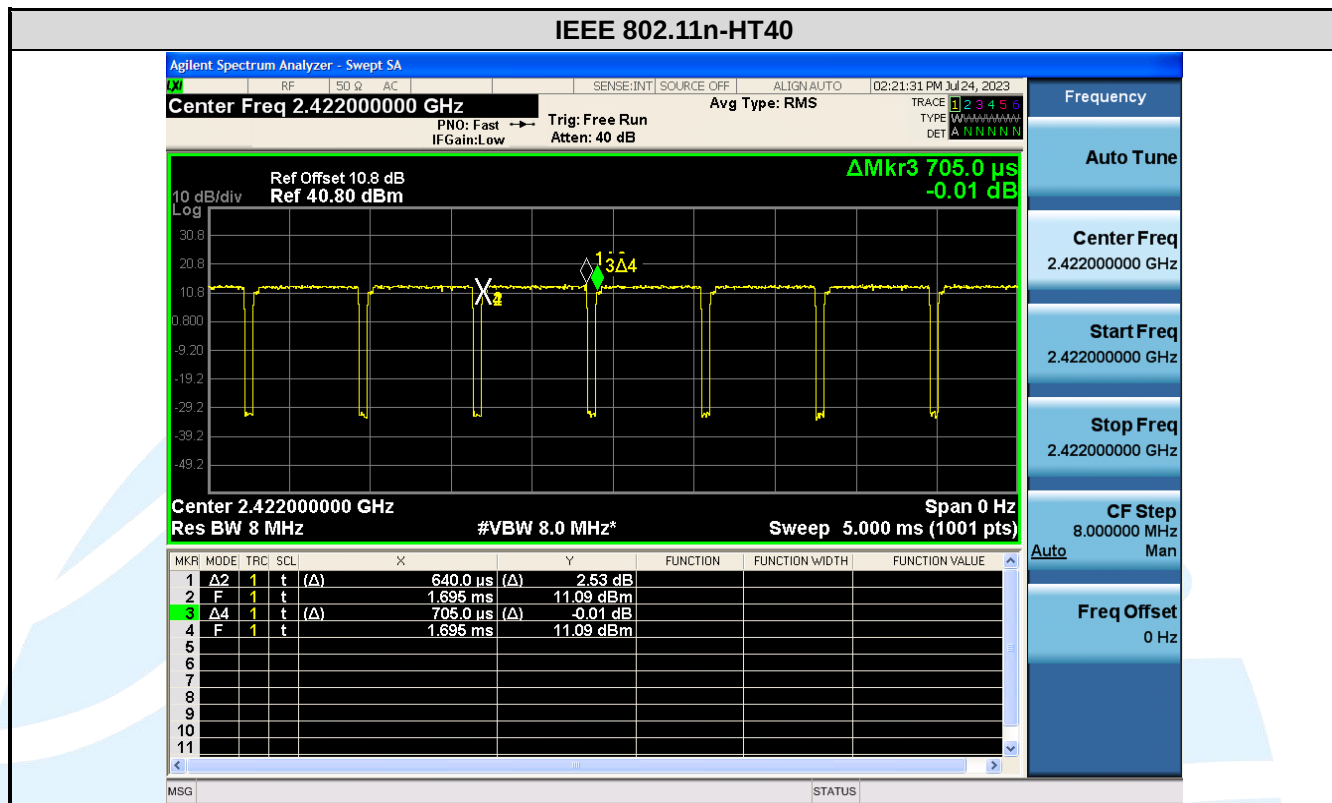

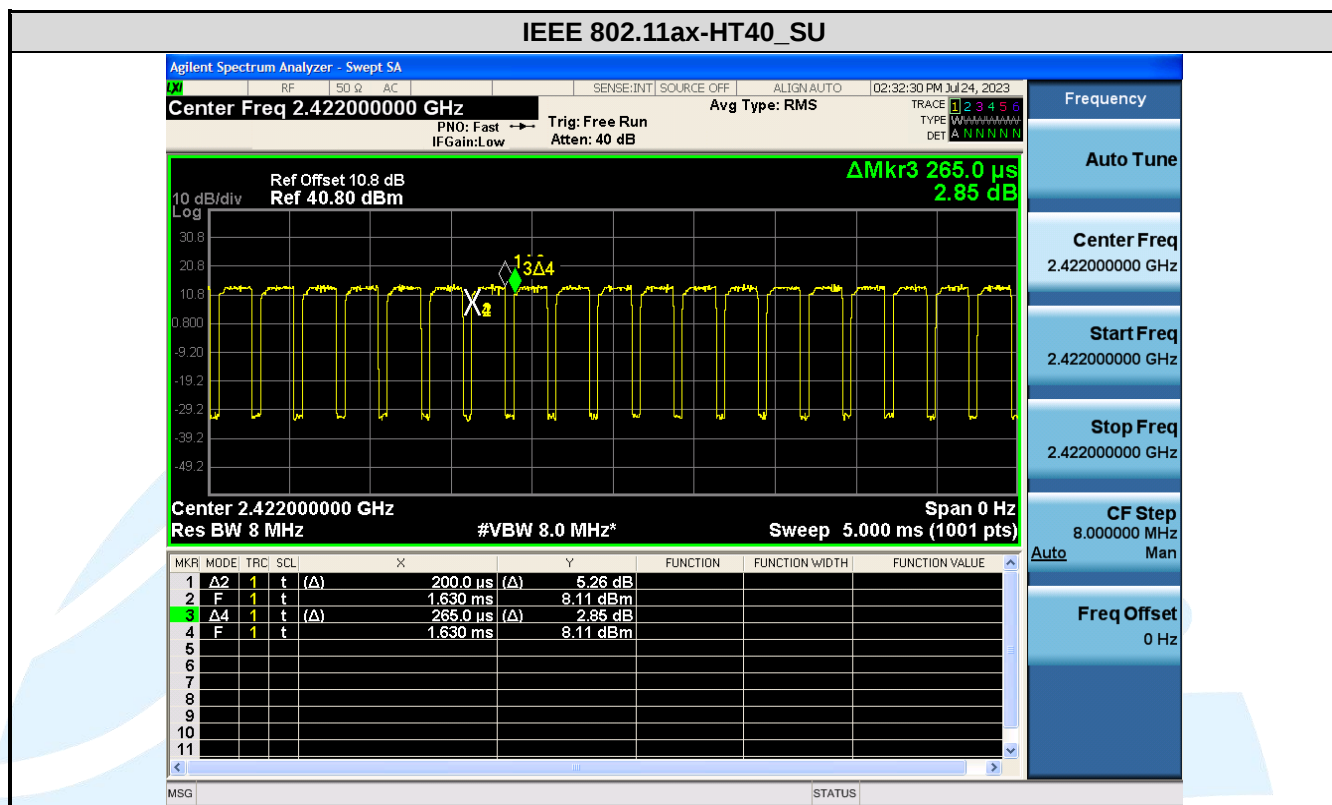

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Both antenna in the interior of the equipment and no consideration of replacement. The transmit signals are correlated with each other, the best case directional gain of the antenna is 7.6 dBi (See section 5.3).

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2013 Clause 11.9.1.3

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results:

Directional gain and the maximum output power limit.

Frequency (MHz)	Antenna Gain (dBi)		Directional gain (dBi)	Directional gain (dBi)	Limit	
	Ant .0	Ant .1	Power	PSD	Power (dBm)	PSD (dBm/3kHz)
2412 - 2462	4.52	4.66	7.6	7.6	28.4	6.4

Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows:
If transmit signals are correlated, then
Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

Mode	Freq. (MHz)	RU&Index	Max. Avg Power (dBm)				Result
			Ant. 0	Ant. 1	Total	Limit	
IEEE 802.11 b	2412	N/A	22.18	22.91	N/A	30	PASS
	2437	N/A	22.41	22.71	N/A	30	PASS
	2462	N/A	22.42	22.73	N/A	30	PASS
IEEE 802.11 g	2412	N/A	18.15	18.02	N/A	30	PASS
	2437	N/A	20.31	20.89	N/A	30	PASS
	2462	N/A	18.23	18.06	N/A	30	PASS
IEEE 802.11 n-HT20	2412	N/A	12.34	13.11	15.75	28.4	PASS
	2437	N/A	18.66	19.41	22.06		PASS
	2462	N/A	12.27	13.03	15.68		PASS
IEEE 802.11 n-HT40	2422	N/A	11.01	11.73	14.40		PASS
	2437	N/A	18.31	19.05	21.71		PASS
	2452	N/A	11.02	11.69	14.38		PASS
IEEE 802.11 ax-HE20	2412	SU	12.72	13.11	15.93		PASS
	2437	SU	19.03	19.01	22.03		PASS
	2462	SU	12.36	12.83	15.61		PASS
IEEE 802.11 ax-HE40	2422	SU	11.68	12.27	15.00		PASS
	2437	SU	18.21	18.92	21.59		PASS
	2452	SU	11.62	12.27	14.97		PASS

Note:

1. Total (Chain 0+1) = $10 \log[(10^{Chain\ 0/10} + 10^{Chain\ 1/10})]$
2. The Duty Cycle Factor is compensated in the Total Power.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Mode	Freq.	RU&Index	Max. Peak Power (dBm)				Result
	(MHz)		Ant. 0	Ant. 1	Total	Limit	
IEEE 802.11 b	2412	N/A	24.94	25.31	N/A	30	PASS
	2437	N/A	24.99	25.28	N/A	30	PASS
	2462	N/A	24.97	25.23	N/A	30	PASS
IEEE 802.11 g	2412	N/A	24.75	24.31	N/A	30	PASS
	2437	N/A	26.14	26.73	N/A	30	PASS
	2462	N/A	24.29	24.08	N/A	30	PASS
IEEE 802.11 n-HT20	2412	N/A	19.01	20.12	22.61	28.4	PASS
	2437	N/A	24.52	25.39	27.99		PASS
	2462	N/A	18.44	19.31	21.91		PASS
IEEE 802.11 n-HT40	2422	N/A	17.47	19.46	21.59		PASS
	2437	N/A	24.31	26.01	28.25		PASS
	2452	N/A	17.33	18.15	20.77		PASS
IEEE 802.11 ax-HE20	2412	SU	19.21	20.05	22.66		PASS
	2437	SU	25.42	25.24	28.34		PASS
	2462	SU	19.94	19.36	22.67		PASS
IEEE 802.11 ax-HE40	2422	SU	18.40	19.96	22.26		PASS
	2437	SU	24.88	25.53	28.23		PASS
	2452	SU	19.04	19.28	22.17		PASS

Note:

1. Total (Chain 0+1) = $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$

5.46 DB BANDWIDTH

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2013 Clause 11.8.1
Limit:	For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Set RBW = 100 kHz. b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW. c) Detector = Peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Please refer to Appendix A

5.5 POWER SPECTRAL DENSITY

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)
Test Method:	ANSI C63.10-2013 Clause 11.10.2
Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Please refer to Appendix A

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(d)

Test Method: ANSI C63.10-2013 Clause 11.11

Limit: In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2: Measurement Procedure OOB

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Clause 11.11 & Clause 11.12

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:
 - 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
2. Above 1GHz test procedure as below:
 - 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - 2) Test the EUT in the lowest channel, middle channel, the Highest channel

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Z axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:


Radiated Emission Test Data (9 kHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Radiated Emission Test Data (30 MHz ~ 1 GHz):


Worst-Case Configuration(MIMO_ Ant. 0+1+2_ IEEE 802.11ac-VHT40_Channel 159)

Horizontal

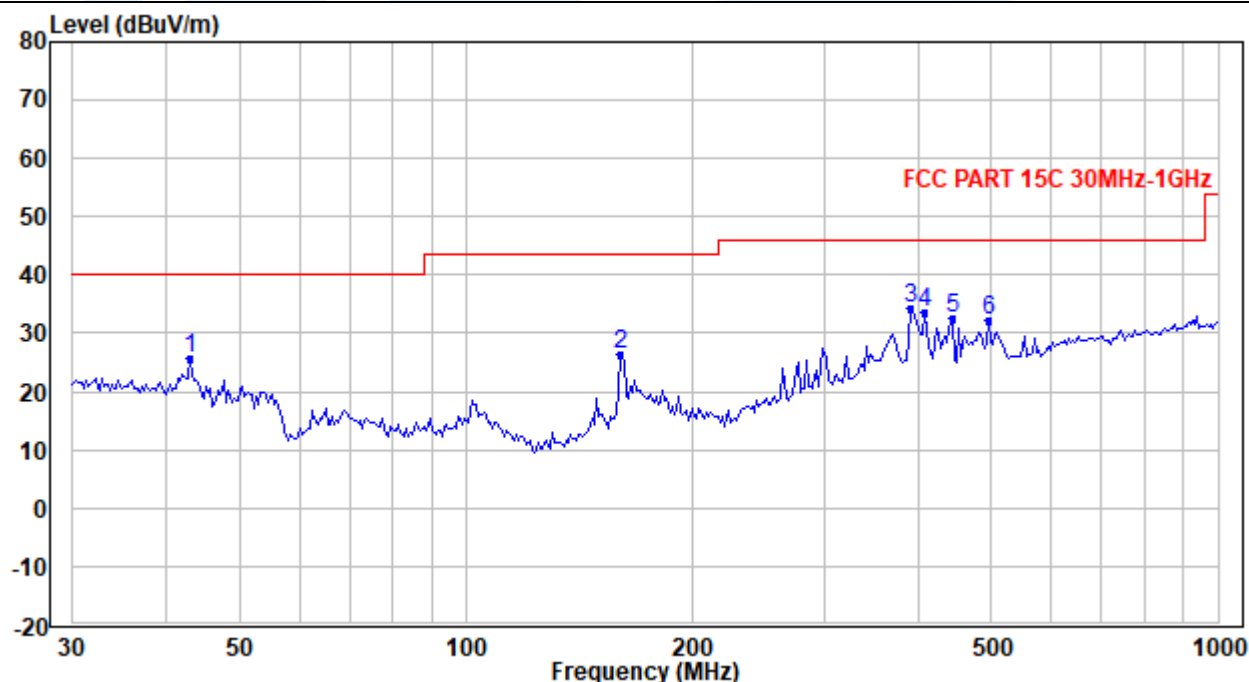

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.931	35.1	-9.4	25.8	40.0	-14.3	QP
2	160.885	39.9	-13.6	26.3	43.5	-17.2	QP
3	389.987	38.5	-4.1	34.4	46.0	-11.6	QP
4	406.782	37.1	-3.5	33.6	46.0	-12.4	QP
5	442.572	35.9	-3.4	32.5	46.0	-13.5	QP
6	495.238	34.5	-2.1	32.4	46.0	-13.6	QP

Vertical

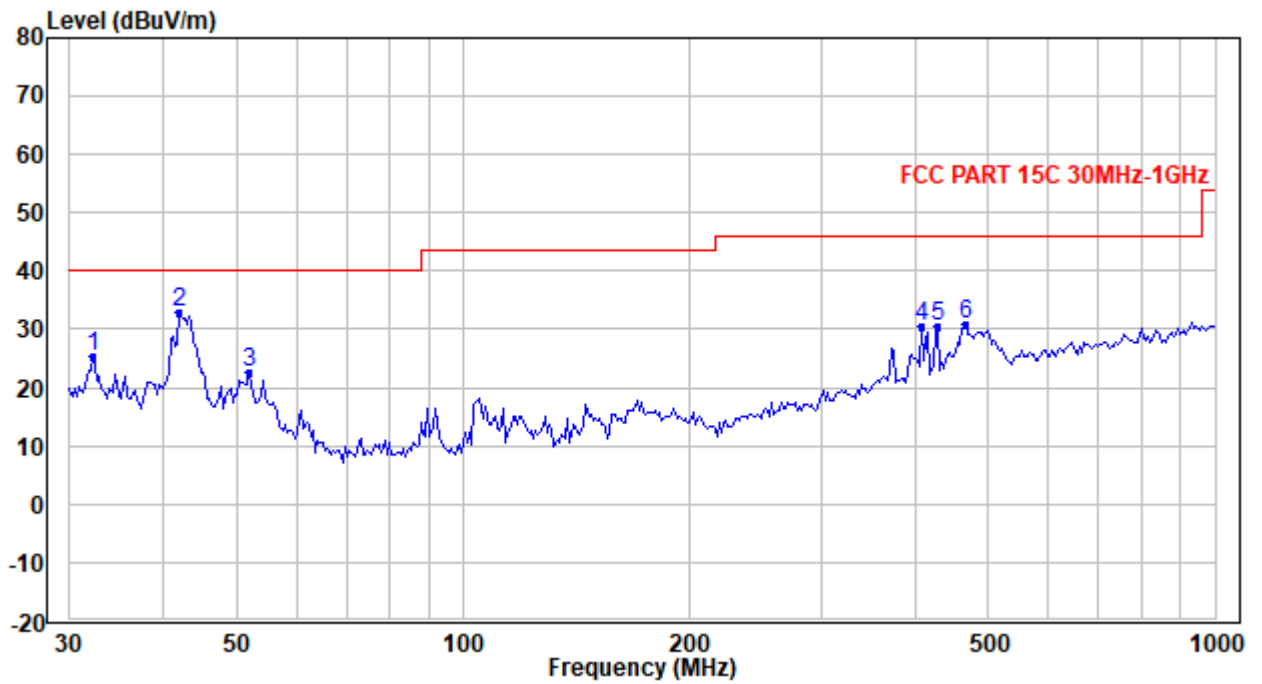

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.184	30.5	-5.1	25.4	40.0	-14.6	QP
2	42.035	41.9	-8.8	33.1	40.0	-6.9	QP
3	51.900	38.3	-15.6	22.7	40.0	-17.3	QP
4	406.782	33.9	-3.5	30.4	46.0	-15.6	QP
5	427.292	34.3	-3.8	30.5	46.0	-15.5	QP
6	464.887	34.1	-3.3	30.8	46.0	-15.2	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

Radiated Emission Test Data (Above 1GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Antenna 0 IEEE 802.11b_Channel 1:								
1	4824	42.9	-1.5	41.4	74	-32.6	Peak	Horizontal
2	4824	30.5	-1.5	29.0	54	-25.0	Average	Horizontal
3	7236	43.0	2.3	45.3	74	-28.7	Peak	Horizontal
4	7236	28.0	2.3	30.3	54	-23.8	Average	Horizontal
5	4824	42.2	-1.5	40.6	74	-33.4	Peak	Vertical
6	4824	30.3	-1.5	28.8	54	-25.2	Average	Vertical
7	7236	45.5	2.3	47.8	74	-26.2	Peak	Vertical
8	7236	28.5	2.3	30.8	54	-23.2	Average	Vertical
SISO_Antenna 0 IEEE 802.11b_Channel 6:								
1	4874	41.7	-1.5	40.3	74	-33.7	Peak	Horizontal
2	4874	29.3	-1.5	27.8	54	-26.2	Average	Horizontal
3	7311	42.3	2.3	44.6	74	-29.4	Peak	Horizontal
4	7311	29.1	2.3	31.4	54	-22.6	Average	Horizontal
5	4874	41.3	-1.5	39.9	74	-34.1	Peak	Vertical
6	4874	29.2	-1.5	27.7	54	-26.3	Average	Vertical
7	7311	43.2	2.3	45.5	74	-28.5	Peak	Vertical
8	7311	29.5	2.3	31.8	54	-22.2	Average	Vertical
SISO_Antenna 0 IEEE 802.11b_Channel 11:								
1	4924	42.6	-1.4	41.2	74	-32.8	Peak	Horizontal
2	4924	30.2	-1.4	28.8	54	-25.2	Average	Horizontal
3	7386	40.1	2.4	42.5	74	-31.5	Peak	Horizontal
4	7386	28.7	2.4	31.1	54	-22.9	Average	Horizontal
5	4924	41.2	-1.4	39.8	74	-34.2	Peak	Vertical
6	4924	30.1	-1.4	28.7	54	-25.3	Average	Vertical
7	7386	40.3	2.4	42.6	74	-31.4	Peak	Vertical
8	7386	27.7	2.4	30.1	54	-23.9	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Antenna 0_IEEE 802.11g_Channel 1:								
1	4824	42.2	-1.5	40.7	74	-33.3	Peak	Horizontal
2	4824	30.3	-1.5	28.8	54	-25.2	Average	Horizontal
3	7236	39.6	2.3	41.9	74	-32.1	Peak	Horizontal
4	7236	27.4	2.3	29.7	54	-24.4	Average	Horizontal
5	4824	42.6	-1.5	41.0	74	-33.0	Peak	Vertical
6	4824	31.2	-1.5	29.7	54	-24.3	Average	Vertical
7	7236	39.3	2.3	41.6	74	-32.4	Peak	Vertical
8	7236	27.8	2.3	30.1	54	-23.9	Average	Vertical
SISO_Antenna 0_IEEE 802.11g_Channel 6:								
1	4874	42.4	-1.5	41.0	74	-33.0	Peak	Horizontal
2	4874	31.1	-1.5	29.6	54	-24.5	Average	Horizontal
3	7311	40.1	2.3	42.4	74	-31.6	Peak	Horizontal
4	7311	27.7	2.3	30.0	54	-24.0	Average	Horizontal
5	4874	42.0	-1.5	40.6	74	-33.4	Peak	Vertical
6	4874	30.1	-1.5	28.6	54	-25.4	Average	Vertical
7	7311	41.8	2.3	44.1	74	-29.9	Peak	Vertical
8	7311	29.0	2.3	31.3	54	-22.7	Average	Vertical
SISO_Antenna 0_IEEE 802.11g_Channel 11:								
1	4924	42.7	-1.4	41.3	74	-32.7	Peak	Horizontal
2	4924	30.2	-1.4	28.8	54	-25.3	Average	Horizontal
3	7386	40.7	2.4	43.1	74	-30.9	Peak	Horizontal
4	7386	29.0	2.4	31.4	54	-22.6	Average	Horizontal
5	4924	42.0	-1.4	40.6	74	-33.4	Peak	Vertical
6	4924	30.2	-1.4	28.8	54	-25.3	Average	Vertical
7	7386	41.1	2.4	43.4	74	-30.6	Peak	Vertical
8	7386	29.0	2.4	31.4	54	-22.6	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO_Antenna 1_ IEEE 802.11b_Channel 1:								
1	4824	42.7	-1.5	41.1	74	-32.9	Peak	Horizontal
2	4824	30.2	-1.5	28.7	54	-25.3	Average	Horizontal
3	7236	40.6	2.3	42.9	74	-31.1	Peak	Horizontal
4	7236	27.3	2.3	29.6	54	-24.4	Average	Horizontal
5	4824	41.7	-1.5	40.2	74	-33.8	Peak	Vertical
6	4824	30.2	-1.5	28.7	54	-25.3	Average	Vertical
7	7236	39.8	2.3	42.1	74	-31.9	Peak	Vertical
8	7236	27.3	2.3	29.6	54	-24.4	Average	Vertical
SISO_Antenna 1_ IEEE 802.11b_Channel 6:								
1	4874	40.9	-1.5	39.4	74	-34.6	Peak	Horizontal
2	4874	29.1	-1.5	27.6	54	-26.5	Average	Horizontal
3	7311	38.8	2.3	41.1	74	-32.9	Peak	Horizontal
4	7311	27.7	2.3	30.0	54	-24.0	Average	Horizontal
5	4874	40.0	-1.5	38.5	74	-35.5	Peak	Vertical
6	4874	29.3	-1.5	27.8	54	-26.2	Average	Vertical
7	7311	40.7	2.3	43.0	74	-31.0	Peak	Vertical
8	7311	27.6	2.3	29.9	54	-24.2	Average	Vertical
SISO_Antenna 1_ IEEE 802.11b_Channel 11:								
1	4924	41.8	-1.4	40.4	74	-33.6	Peak	Horizontal
2	4924	30.2	-1.4	28.8	54	-25.3	Average	Horizontal
3	7386	39.9	2.4	42.3	74	-31.7	Peak	Horizontal
4	7386	26.2	2.4	28.6	54	-25.4	Average	Horizontal
5	4924	42.2	-1.4	40.8	74	-33.2	Peak	Vertical
6	4924	30.3	-1.4	28.9	54	-25.1	Average	Vertical
7	7386	40.4	2.4	42.8	74	-31.2	Peak	Vertical
8	7386	27.8	2.4	30.2	54	-23.9	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
SISO Antenna 1 IEEE 802.11g Channel 1:								
1	4824	42.5	-1.5	41.0	74	-33.0	Peak	Horizontal
2	4824	30.2	-1.5	28.7	54	-25.3	Average	Horizontal
3	7236	42.1	2.3	44.4	74	-29.6	Peak	Horizontal
4	7236	29.3	2.3	31.6	54	-22.4	Average	Horizontal
5	4824	41.7	-1.5	40.1	74	-33.9	Peak	Vertical
6	4824	31.2	-1.5	29.7	54	-24.3	Average	Vertical
7	7236	40.3	2.3	42.6	74	-31.4	Peak	Vertical
8	7236	27.2	2.3	29.5	54	-24.5	Average	Vertical
SISO Antenna 1 IEEE 802.11g Channel 6:								
1	4874	42.8	-1.5	41.3	74	-32.7	Peak	Horizontal
2	4874	29.2	-1.5	27.7	54	-26.3	Average	Horizontal
3	7311	40.5	2.3	42.9	74	-31.1	Peak	Horizontal
4	7311	27.6	2.3	29.9	54	-24.1	Average	Horizontal
5	4874	42.4	-1.5	40.9	74	-33.1	Peak	Vertical
6	4874	30.1	-1.5	28.6	54	-25.4	Average	Vertical
7	7311	39.2	2.3	41.5	74	-32.5	Peak	Vertical
8	7311	28.4	2.3	30.7	54	-23.3	Average	Vertical
SISO Antenna 1 IEEE 802.11g Channel 11:								
1	4924	41.2	-1.4	39.8	74	-34.2	Peak	Horizontal
2	4924	30.0	-1.4	28.6	54	-25.4	Average	Horizontal
3	7386	39.5	2.4	41.9	74	-32.1	Peak	Horizontal
4	7386	28.8	2.4	31.2	54	-22.9	Average	Horizontal
5	4924	41.6	-1.4	40.1	74	-33.9	Peak	Vertical
6	4924	30.3	-1.4	28.9	54	-25.1	Average	Vertical
7	7386	40.7	2.4	43.1	74	-30.9	Peak	Vertical
8	7386	28.6	2.4	31.0	54	-23.0	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 0+1_ IEEE 802.11n-HT20_ Channel 1:								
1	4824	42.0	-1.5	40.5	74	-33.5	Peak	Horizontal
2	4824	29.2	-1.5	27.7	54	-26.3	Average	Horizontal
3	7236	38.6	2.3	40.9	74	-33.1	Peak	Horizontal
4	7236	27.2	2.3	29.5	54	-24.5	Average	Horizontal
5	4824	42.9	-1.5	41.4	74	-32.6	Peak	Vertical
6	4824	30.3	-1.5	28.8	54	-25.2	Average	Vertical
7	7236	40.7	2.3	43.0	74	-31.0	Peak	Vertical
8	7236	27.3	2.3	29.6	54	-24.4	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11n-HT20_ Channel 6:								
1	4874	42.8	-1.5	41.4	74	-32.6	Peak	Horizontal
2	4874	29.0	-1.5	27.5	54	-26.6	Average	Horizontal
3	7311	39.3	2.3	41.6	74	-32.4	Peak	Horizontal
4	7311	27.4	2.3	29.7	54	-24.3	Average	Horizontal
5	4874	40.1	-1.5	38.6	74	-35.4	Peak	Vertical
6	4874	29.2	-1.5	27.7	54	-26.3	Average	Vertical
7	7311	38.6	2.3	40.9	74	-33.1	Peak	Vertical
8	7311	27.4	2.3	29.7	54	-24.3	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11n-HT20_ Channel 11:								
1	4924	40.7	-1.4	39.3	74	-34.7	Peak	Horizontal
2	4924	30.1	-1.4	28.7	54	-25.3	Average	Horizontal
3	7386	39.1	2.4	41.5	74	-32.5	Peak	Horizontal
4	7386	29.4	2.4	31.8	54	-22.2	Average	Horizontal
5	4924	41.5	-1.4	40.0	74	-34.0	Peak	Vertical
6	4924	30.2	-1.4	28.8	54	-25.3	Average	Vertical
7	7386	40.0	2.4	42.3	74	-31.7	Peak	Vertical
8	7386	28.4	2.4	30.8	54	-23.2	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 0+1_ IEEE 802.11n-HT40_ Channel 3:								
1	4844	42.7	-1.5	41.2	74	-32.8	Peak	Horizontal
2	4844	30.3	-1.5	28.8	54	-25.2	Average	Horizontal
3	7266	39.7	2.3	42.0	74	-32.0	Peak	Horizontal
4	7266	27.2	2.3	29.5	54	-24.5	Average	Horizontal
5	4844	42.5	-1.5	41.0	74	-33.0	Peak	Vertical
6	4844	30.2	-1.5	28.7	54	-25.3	Average	Vertical
7	7266	41.6	2.3	43.9	74	-30.1	Peak	Vertical
8	7266	28.4	2.3	30.7	54	-23.3	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11n-HT40_ Channel 6:								
1	4874	42.0	-1.5	40.5	74	-33.5	Peak	Horizontal
2	4874	29.2	-1.5	27.7	54	-26.3	Average	Horizontal
3	7311	39.0	2.3	41.3	74	-32.7	Peak	Horizontal
4	7311	27.5	2.3	29.8	54	-24.2	Average	Horizontal
5	4874	40.5	-1.5	39.1	74	-34.9	Peak	Vertical
6	4874	29.2	-1.5	27.7	54	-26.3	Average	Vertical
7	7311	40.6	2.3	42.9	74	-31.1	Peak	Vertical
8	7311	27.6	2.3	29.9	54	-24.2	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11n-HT40_ Channel 9:								
1	4904	41.3	-1.4	39.8	74	-34.2	Peak	Horizontal
2	4904	31.0	-1.4	29.6	54	-24.4	Average	Horizontal
3	7356	39.7	2.3	42.0	74	-32.0	Peak	Horizontal
4	7356	28.4	2.3	30.7	54	-23.3	Average	Horizontal
5	4904	41.4	-1.4	39.9	74	-34.1	Peak	Vertical
6	4904	30.2	-1.4	28.8	54	-25.3	Average	Vertical
7	7356	39.2	2.3	41.6	74	-32.4	Peak	Vertical
8	7356	28.5	2.3	30.8	54	-23.2	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 0+1_ IEEE 802.11ax-HE20_Channel 1:								
1	4824	42.9	-1.5	41.4	74	-32.6	Peak	Horizontal
2	4824	31.3	-1.5	29.8	54	-24.2	Average	Horizontal
3	7236	40.9	2.3	43.2	74	-30.8	Peak	Horizontal
4	7236	27.2	2.3	29.5	54	-24.5	Average	Horizontal
5	4824	41.7	-1.5	40.1	74	-33.9	Peak	Vertical
6	4824	30.3	-1.5	28.8	54	-25.2	Average	Vertical
7	7236	40.3	2.3	42.6	74	-31.4	Peak	Vertical
8	7236	27.2	2.3	29.5	54	-24.5	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11ax-HE20_Channel 6:								
1	4874	42.0	-1.5	40.5	74	-33.5	Peak	Horizontal
2	4874	29.1	-1.5	27.6	54	-26.5	Average	Horizontal
3	7311	39.2	2.3	41.5	74	-32.5	Peak	Horizontal
4	7311	27.4	2.3	29.7	54	-24.3	Average	Horizontal
5	4874	41.8	-1.5	40.3	74	-33.7	Peak	Vertical
6	4874	29.3	-1.5	27.8	54	-26.2	Average	Vertical
7	7311	38.9	2.3	41.3	74	-32.7	Peak	Vertical
8	7311	27.3	2.3	29.6	54	-24.4	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11ax-HE20_Channel 11:								
1	4924	42.0	-1.4	40.6	74	-33.4	Peak	Horizontal
2	4924	30.1	-1.4	28.7	54	-25.3	Average	Horizontal
3	7386	37.3	2.4	39.7	74	-34.3	Peak	Horizontal
4	7386	28.5	2.4	30.9	54	-23.1	Average	Horizontal
5	4924	40.8	-1.4	39.4	74	-34.6	Peak	Vertical
6	4924	30.1	-1.4	28.7	54	-25.3	Average	Vertical
7	7386	38.7	2.4	41.1	74	-32.9	Peak	Vertical
8	7386	28.6	2.4	31.0	54	-23.0	Average	Vertical

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
MIMO_Antenna 0+1_ IEEE 802.11ax-HE40_Channel 3:								
1	4844	41.9	-1.5	40.4	74	-33.6	Peak	Horizontal
2	4844	30.2	-1.5	28.7	54	-25.3	Average	Horizontal
3	7266	39.3	2.3	41.6	74	-32.4	Peak	Horizontal
4	7266	27.2	2.3	29.5	54	-24.5	Average	Horizontal
5	4844	43.6	-1.5	42.1	74	-31.9	Peak	Vertical
6	4844	30.2	-1.5	28.7	54	-25.3	Average	Vertical
7	7266	39.0	2.3	41.3	74	-32.7	Peak	Vertical
8	7266	27.4	2.3	29.7	54	-24.3	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11ax-HE40_Channel 6:								
1	4874	40.9	-1.5	39.5	74	-34.5	Peak	Horizontal
2	4874	29.2	-1.5	27.7	54	-26.3	Average	Horizontal
3	7311	38.6	2.3	40.9	74	-33.1	Peak	Horizontal
4	7311	27.5	2.3	29.8	54	-24.2	Average	Horizontal
5	4874	40.9	-1.5	39.5	74	-34.5	Peak	Vertical
6	4874	29.1	-1.5	27.6	54	-26.5	Average	Vertical
7	7311	39.5	2.3	41.9	74	-32.1	Peak	Vertical
8	7311	27.6	2.3	29.9	54	-24.1	Average	Vertical
MIMO_Antenna 0+1_ IEEE 802.11ax-HE40_Channel 9:								
1	4904	41.0	-1.4	39.5	74	-34.5	Peak	Horizontal
2	4904	30.1	-1.4	28.7	54	-25.3	Average	Horizontal
3	7356	40.3	2.3	42.7	74	-31.3	Peak	Horizontal
4	7356	28.5	2.3	30.8	54	-23.2	Average	Horizontal
5	4904	42.6	-1.4	41.2	74	-32.8	Peak	Vertical
6	4904	30.0	-1.4	28.6	54	-25.4	Average	Vertical
7	7356	39.9	2.3	42.2	74	-31.8	Peak	Vertical
8	7356	28.6	2.3	30.9	54	-23.1	Average	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2013 Clause 11.13

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dB μ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.7. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

SISO_ Antenna 0 _IEEE 802.11b

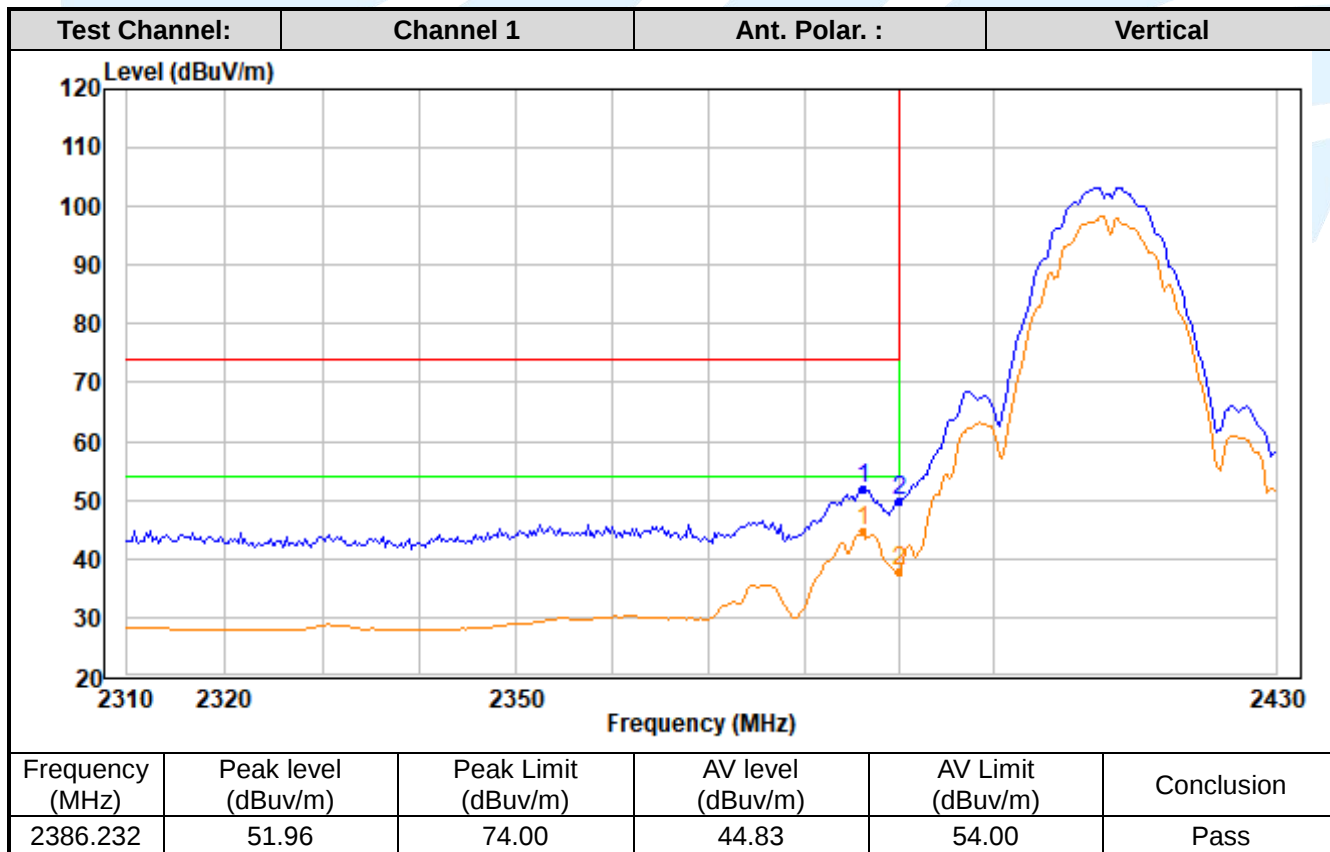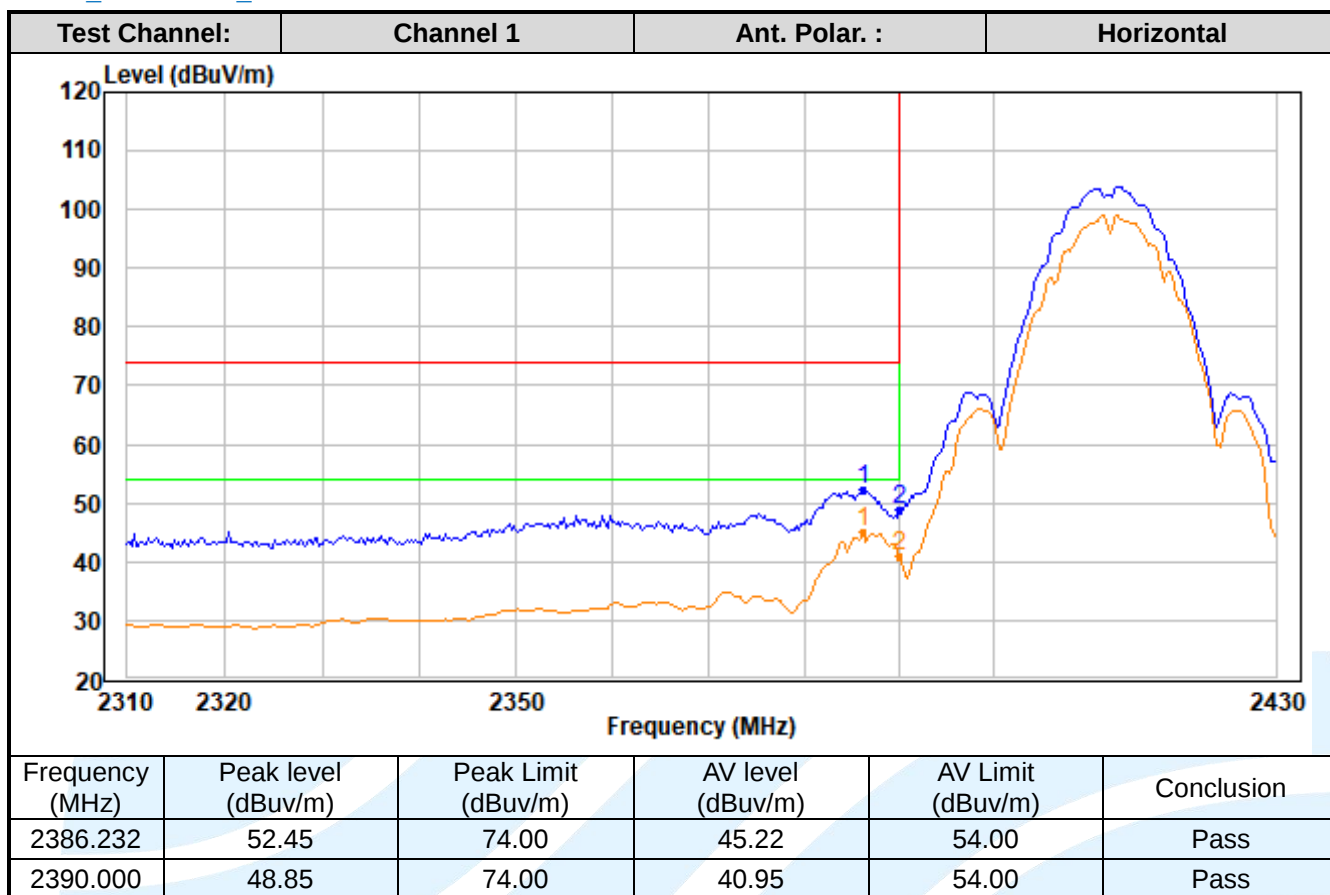

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

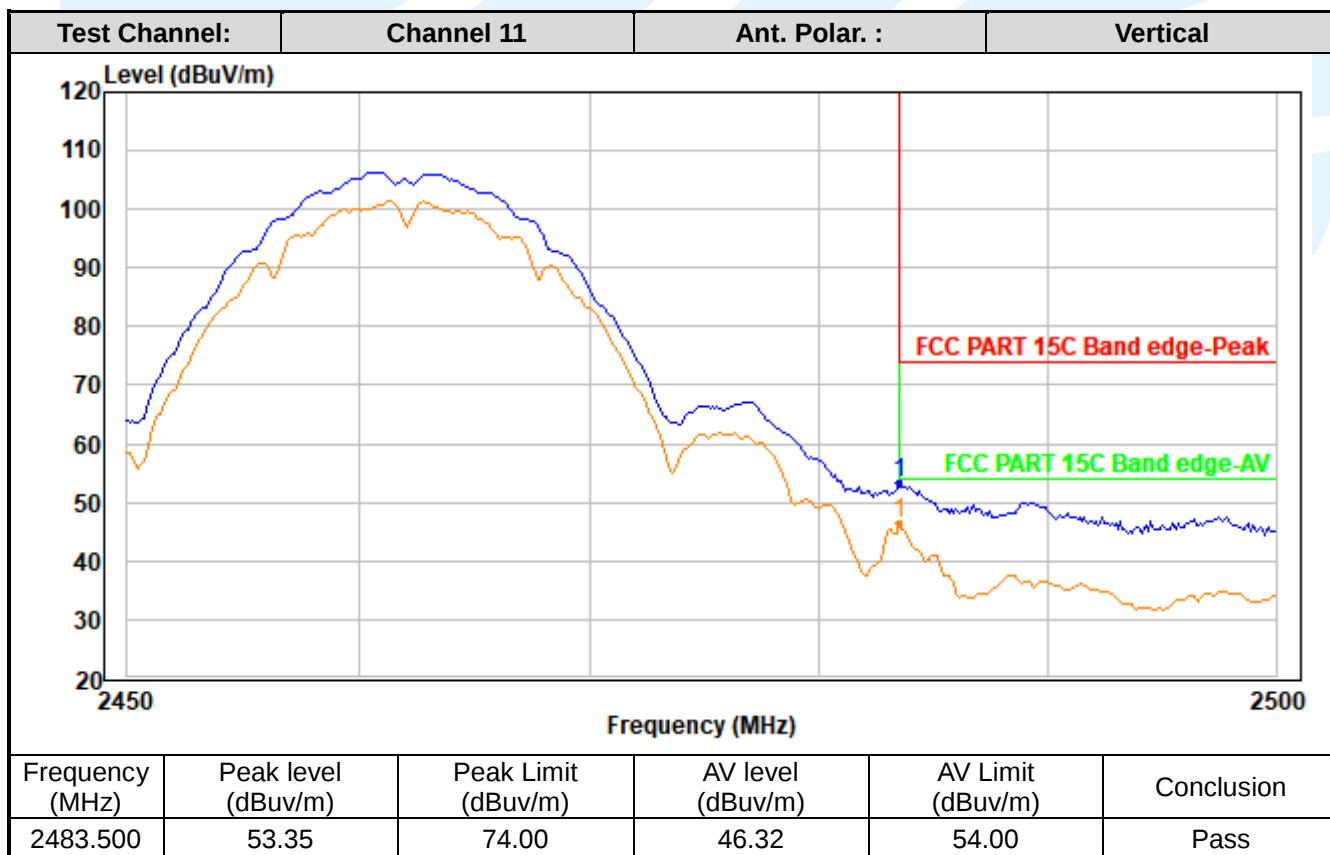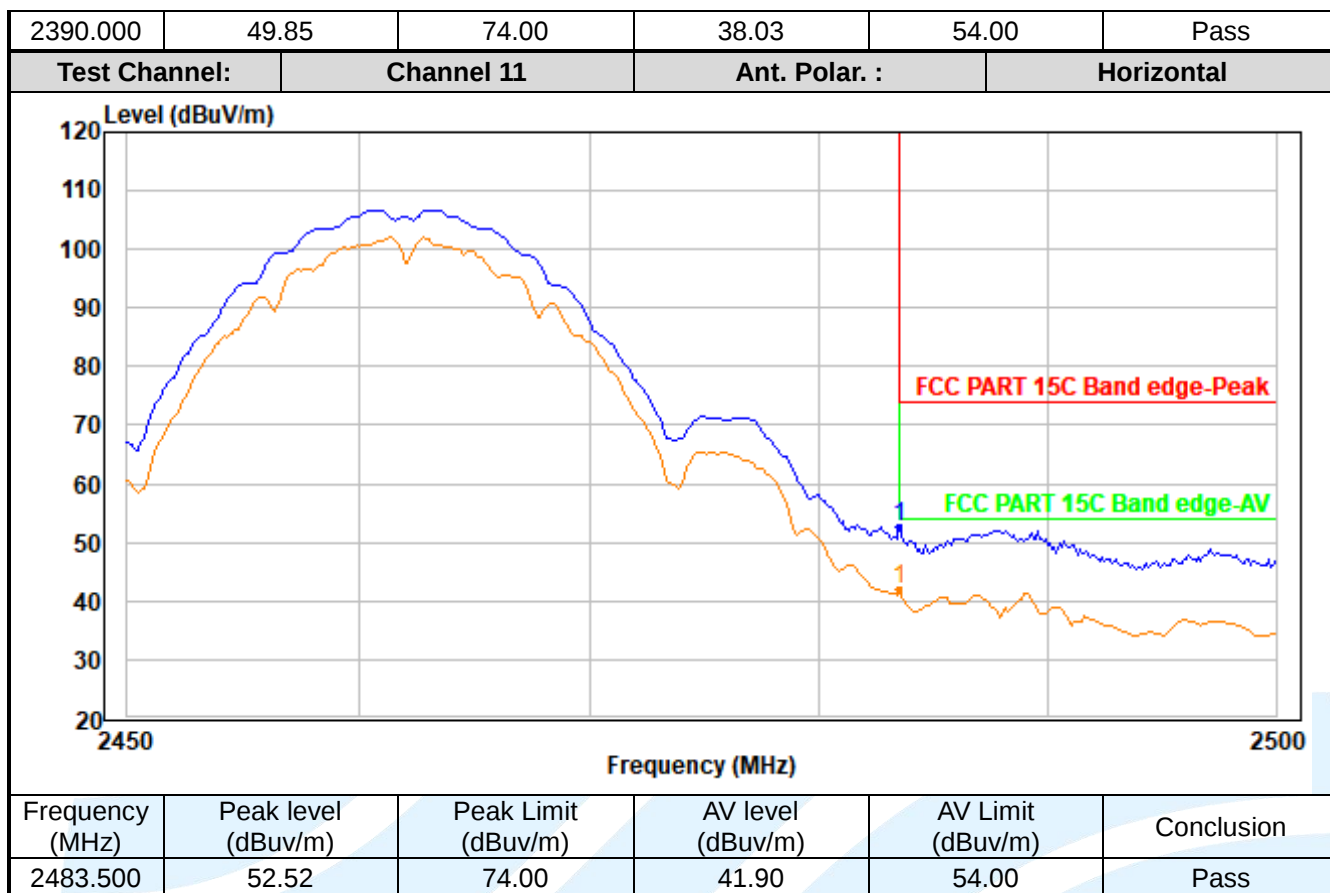

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

SISO_Antenna 1_ IEEE 802.11b

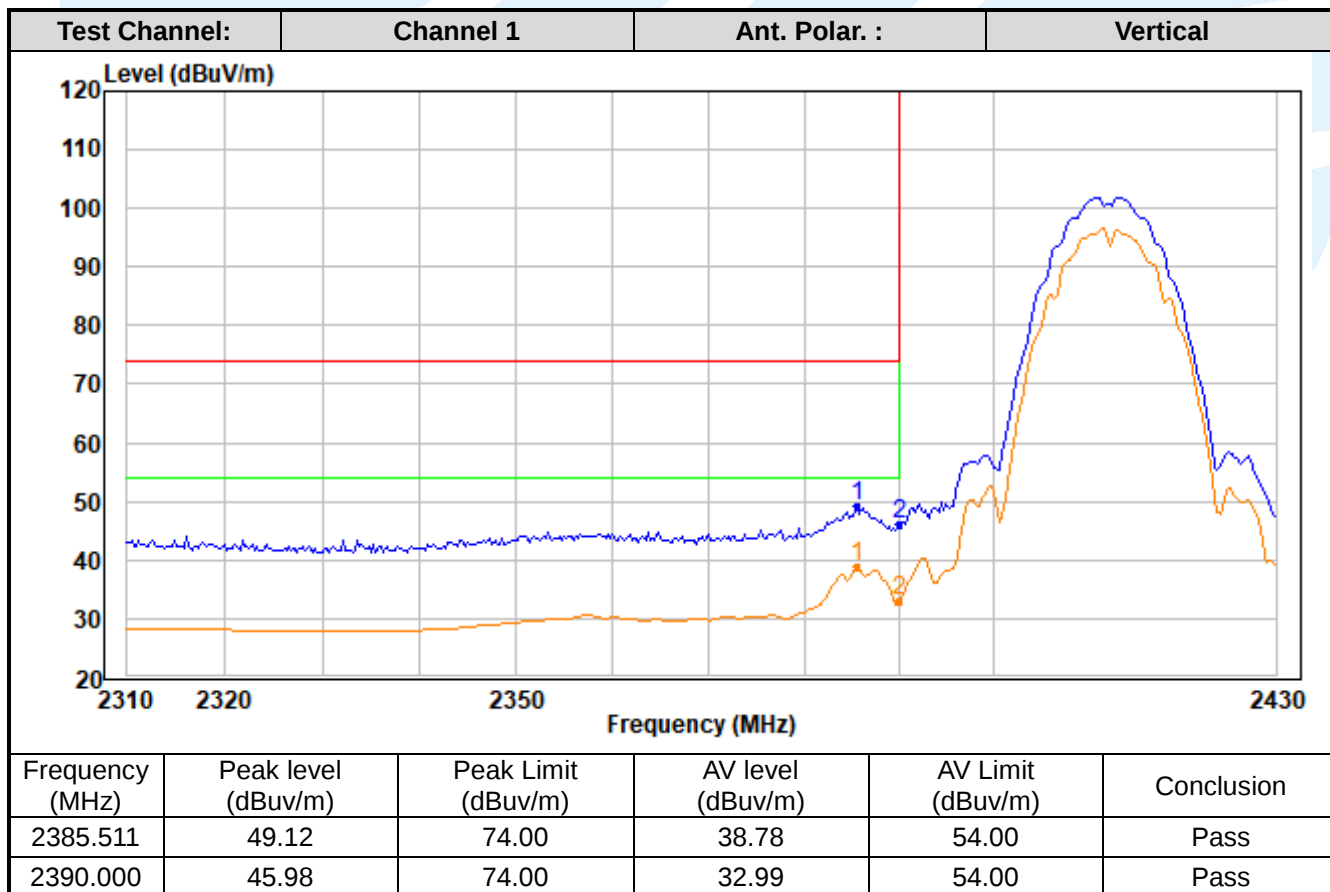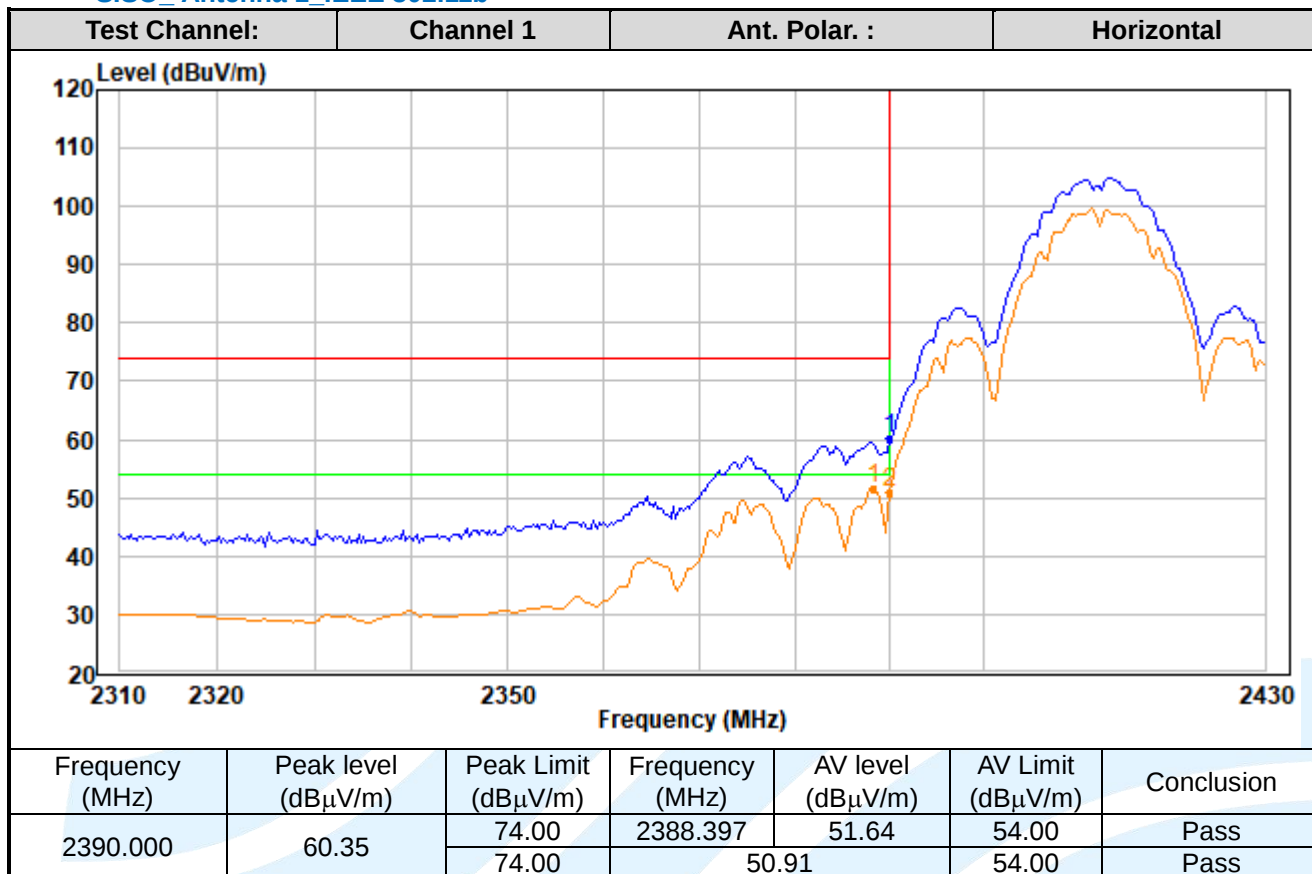

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

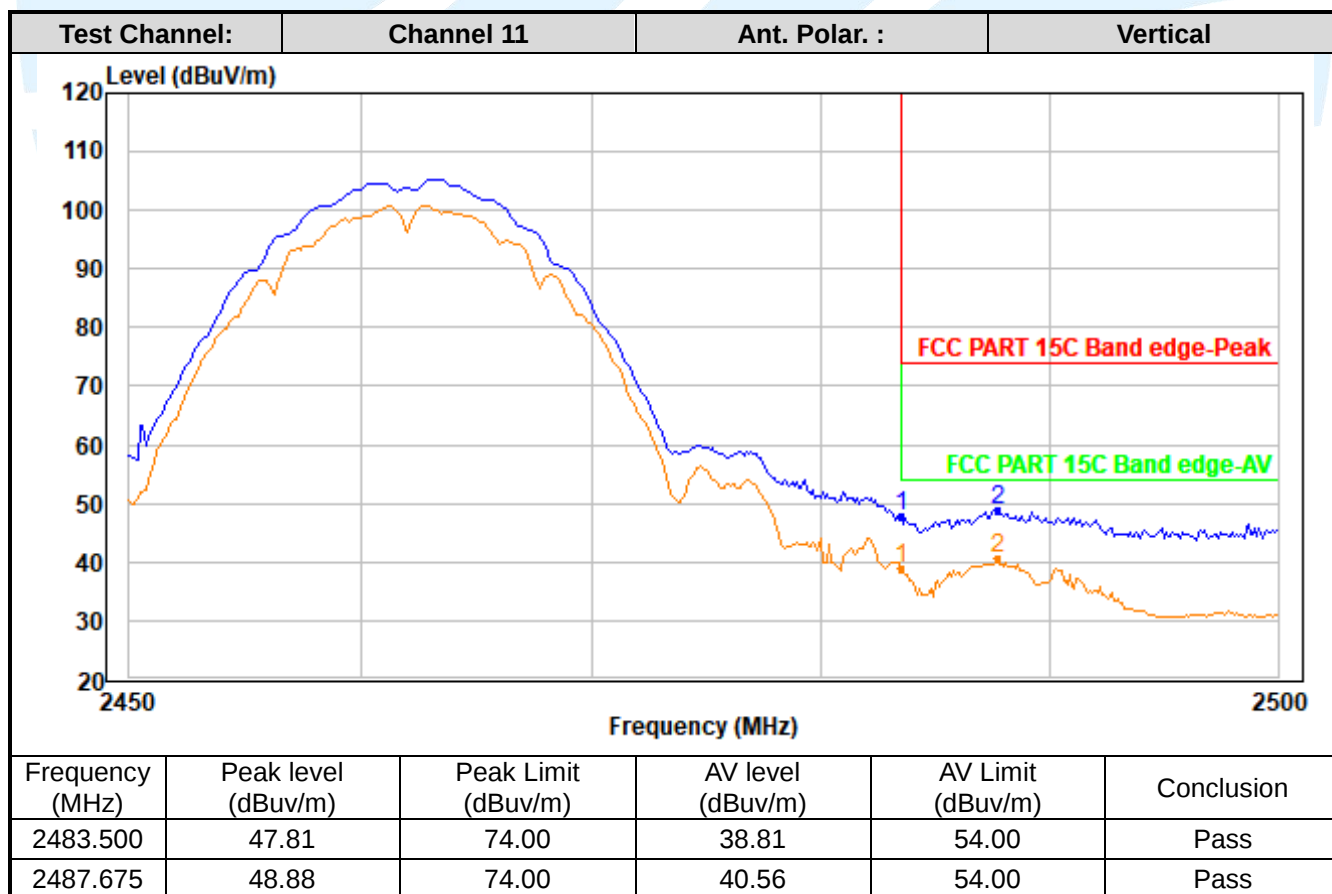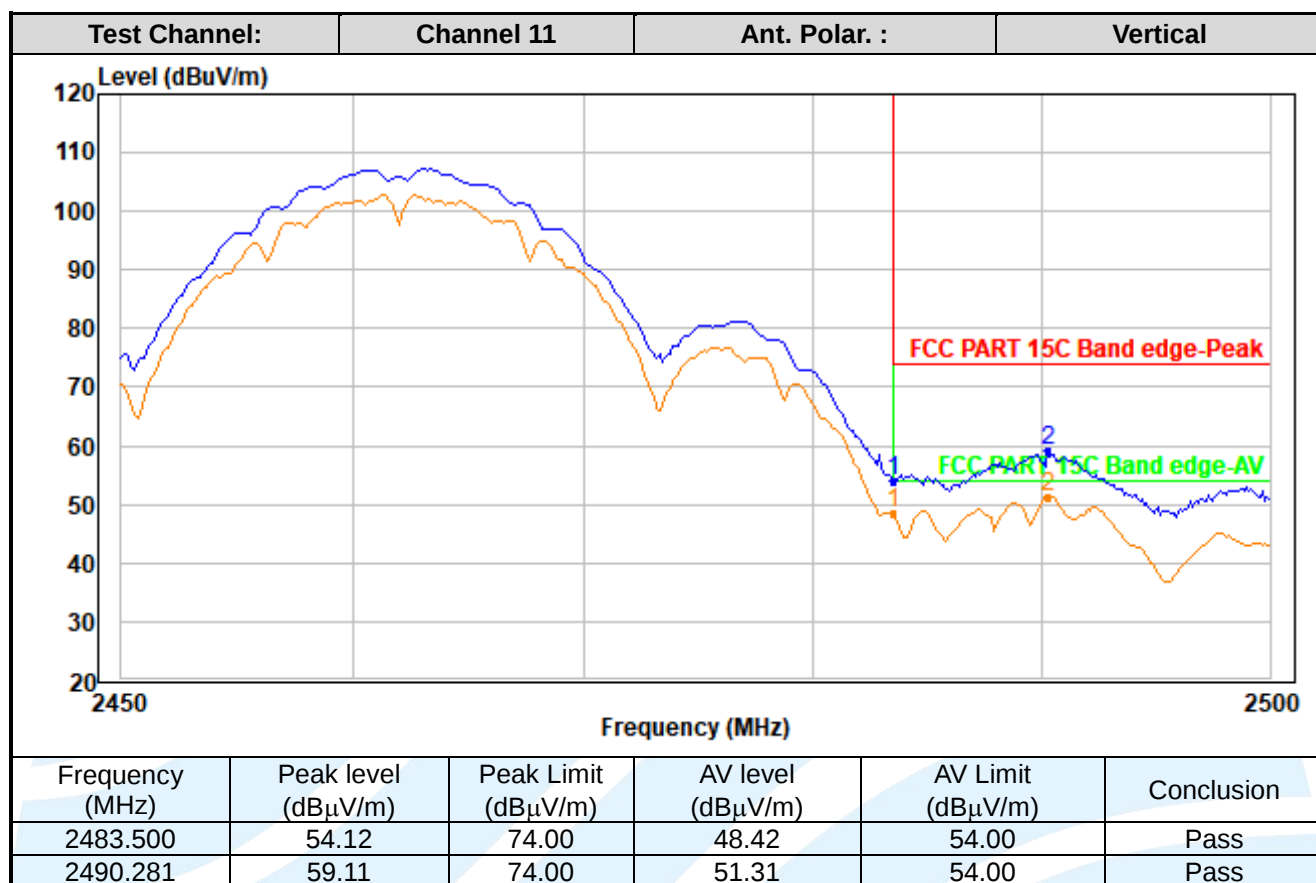

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

SISO_Antenna 0_ IEEE 802.11g

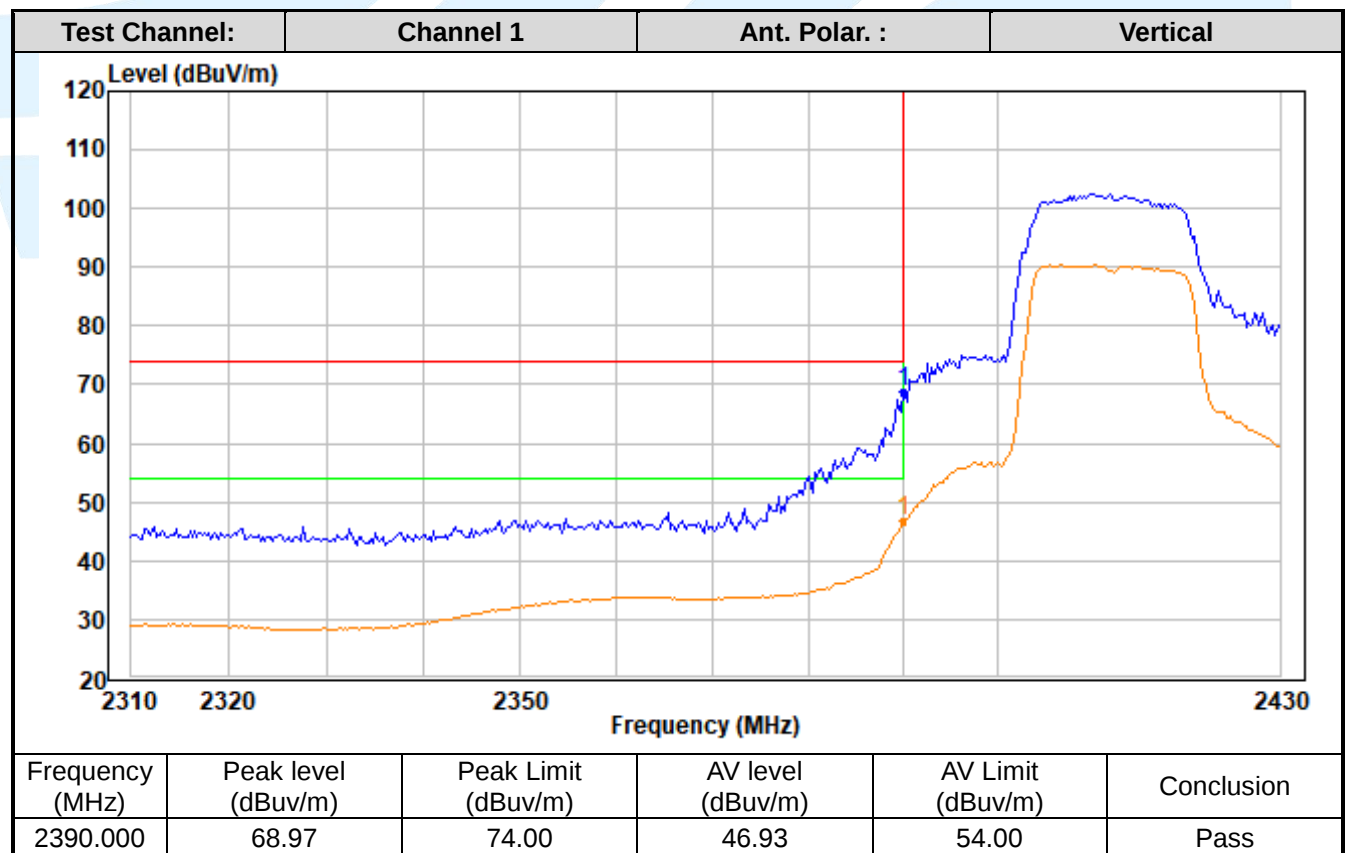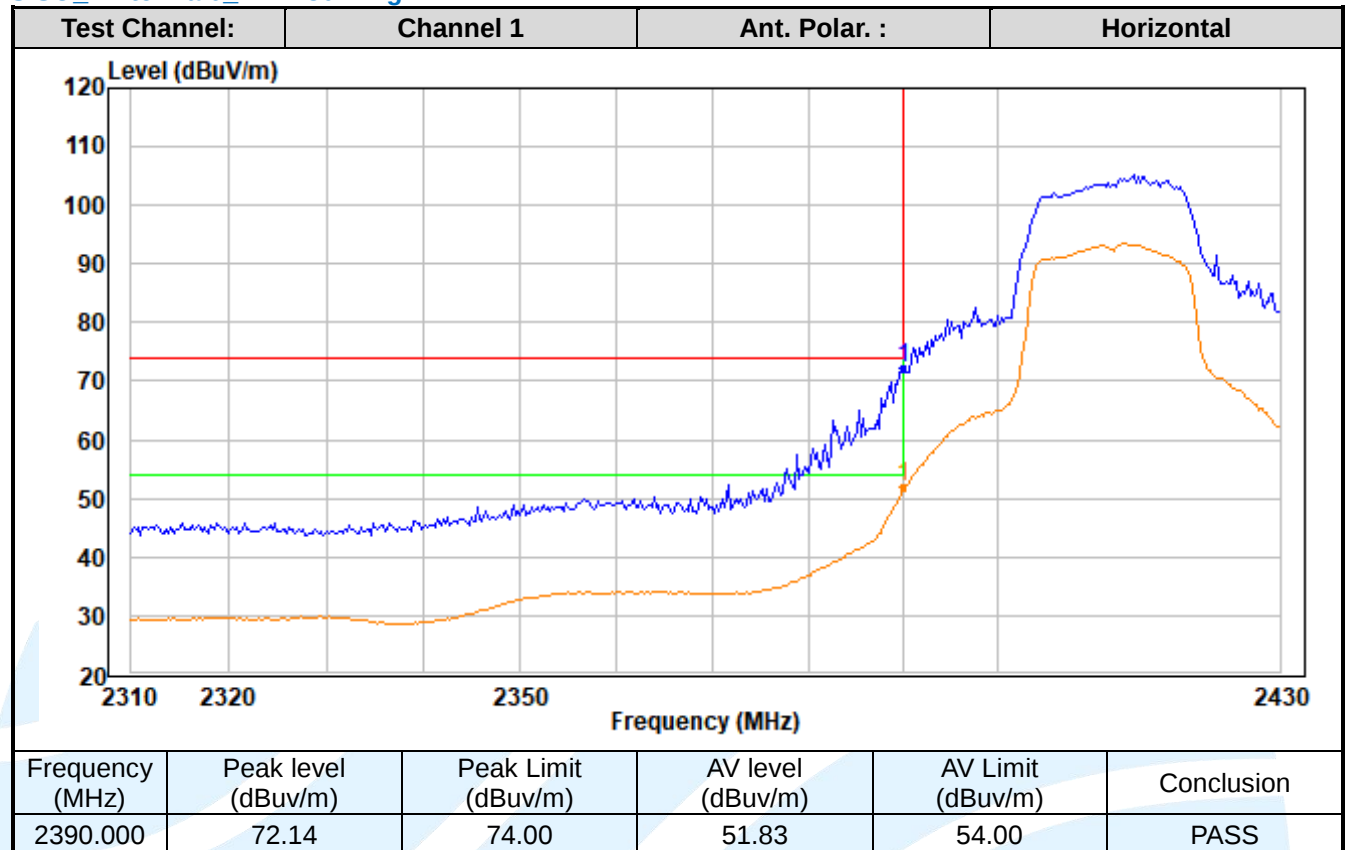

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

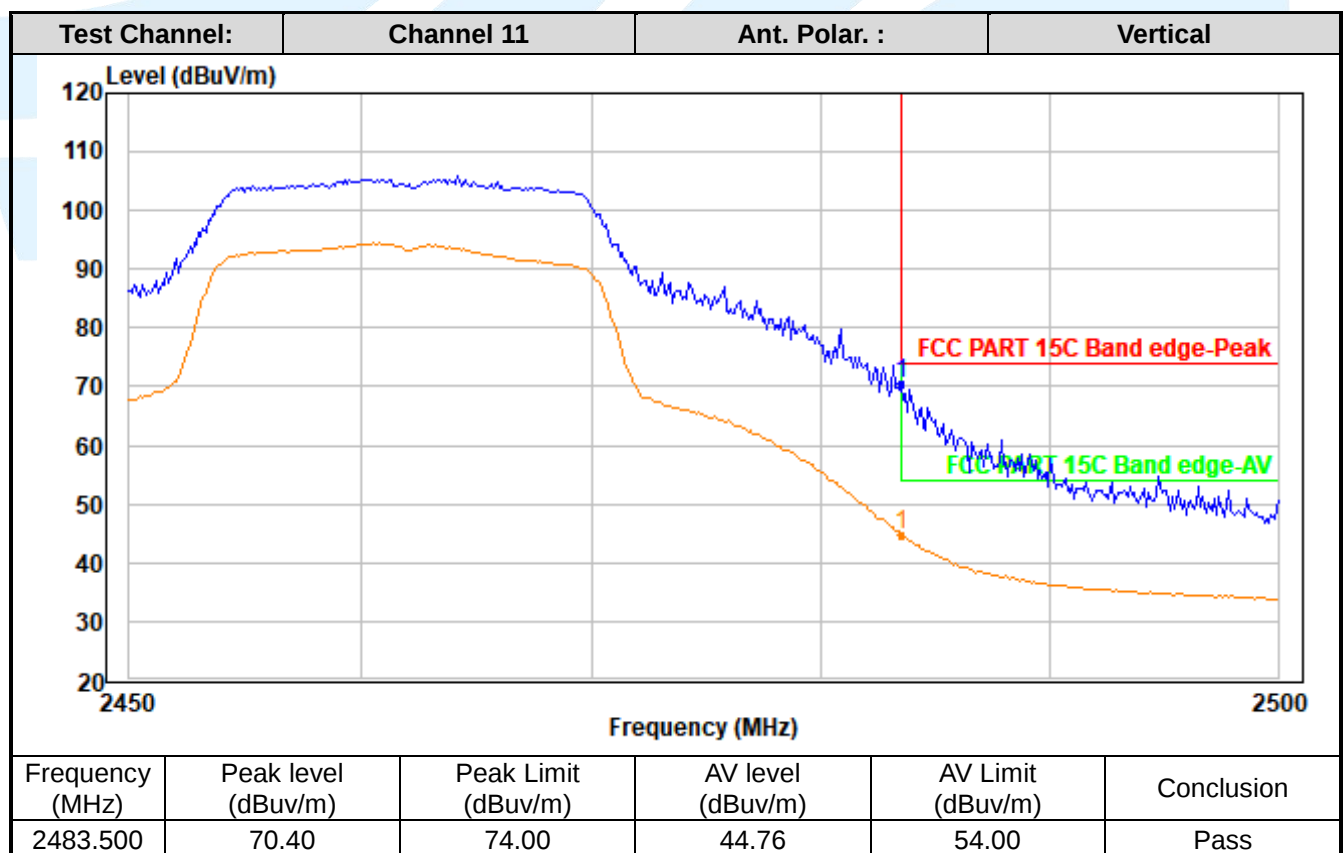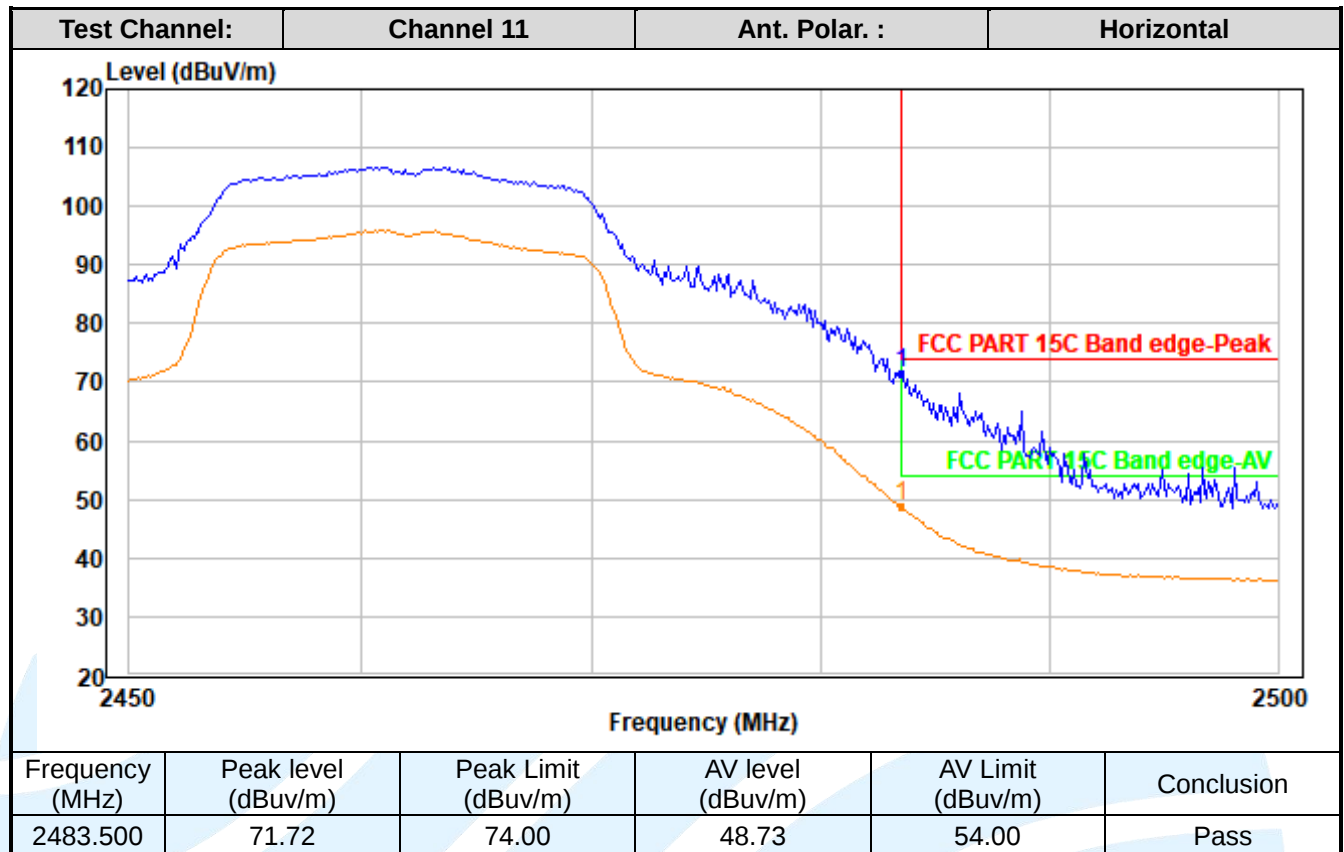

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

SISO_Antenna 1_ IEEE 802.11g

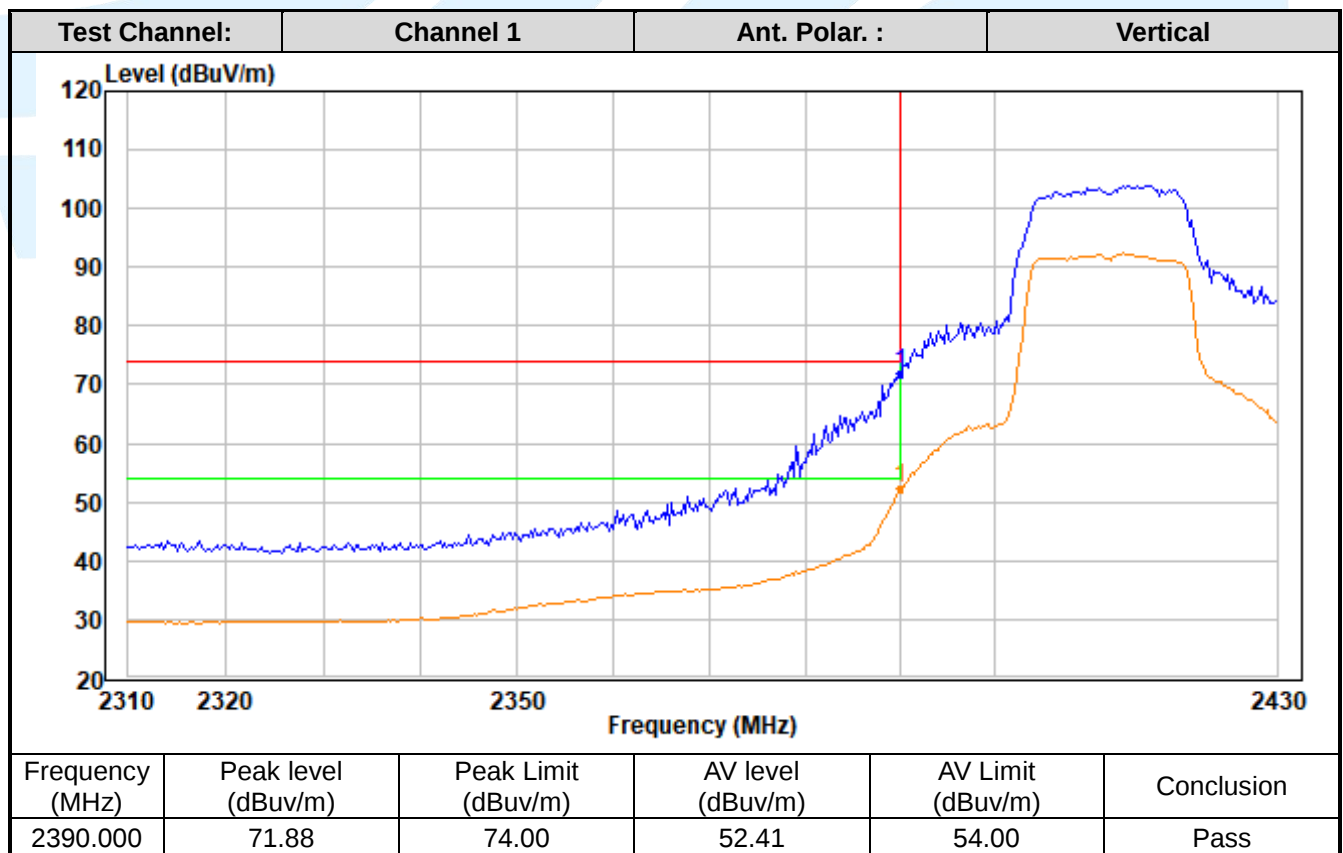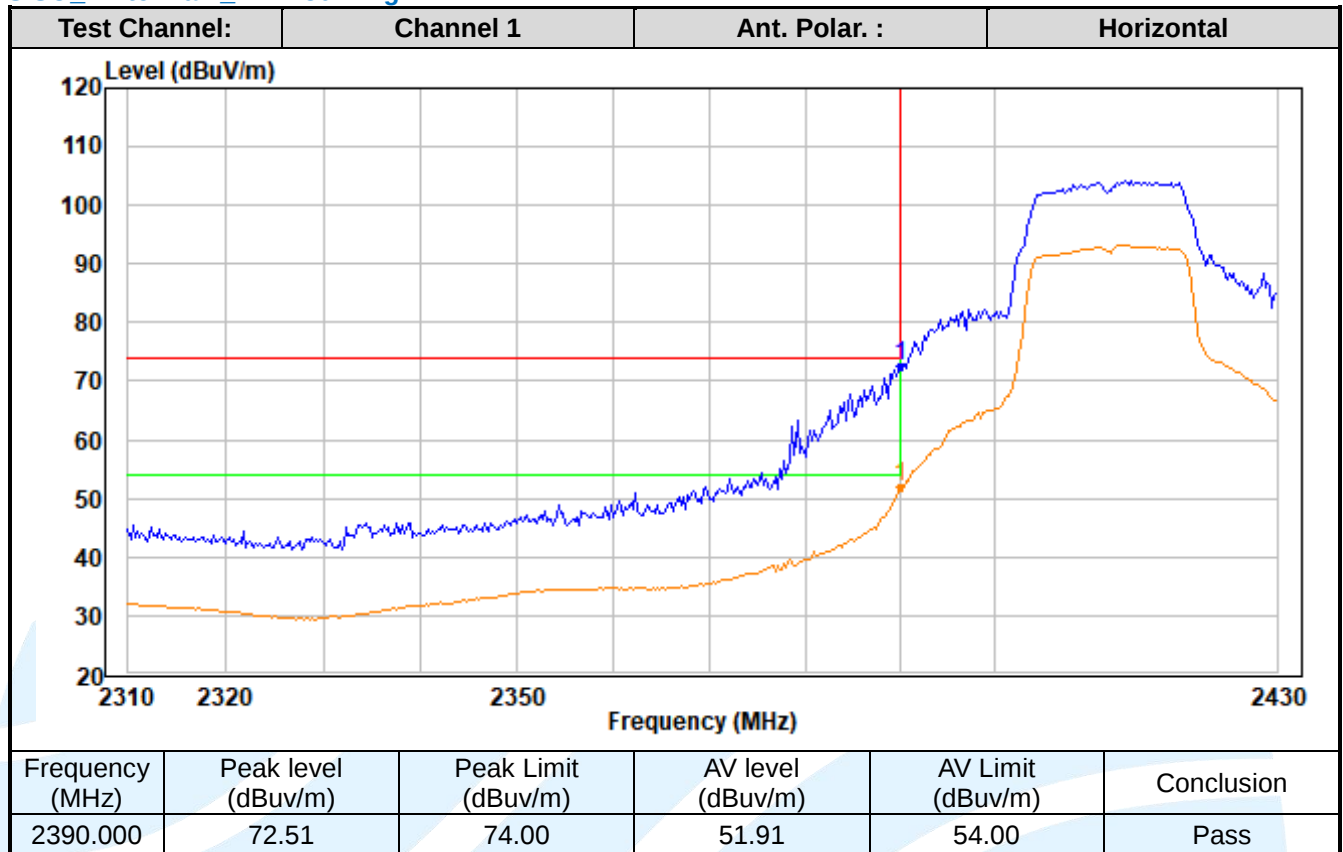

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

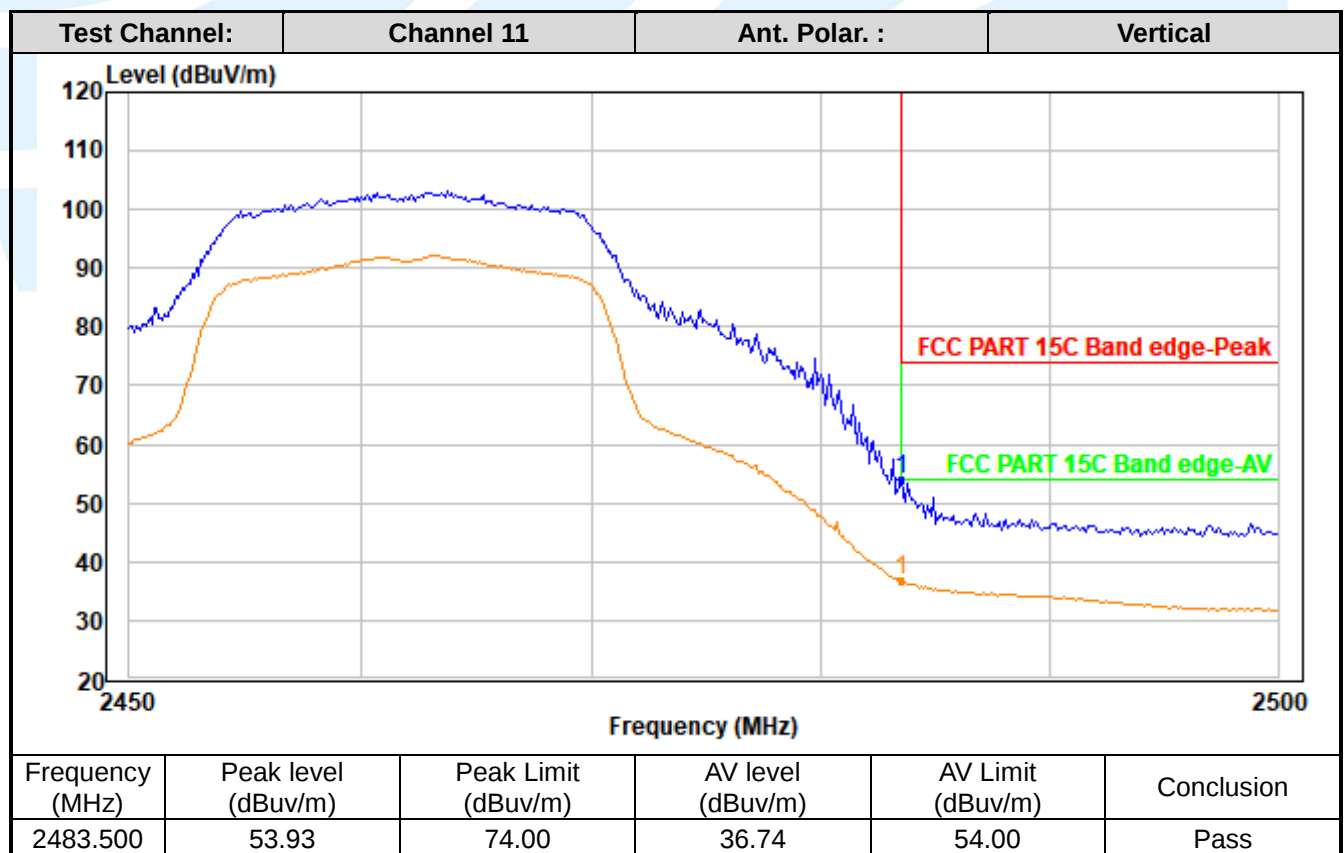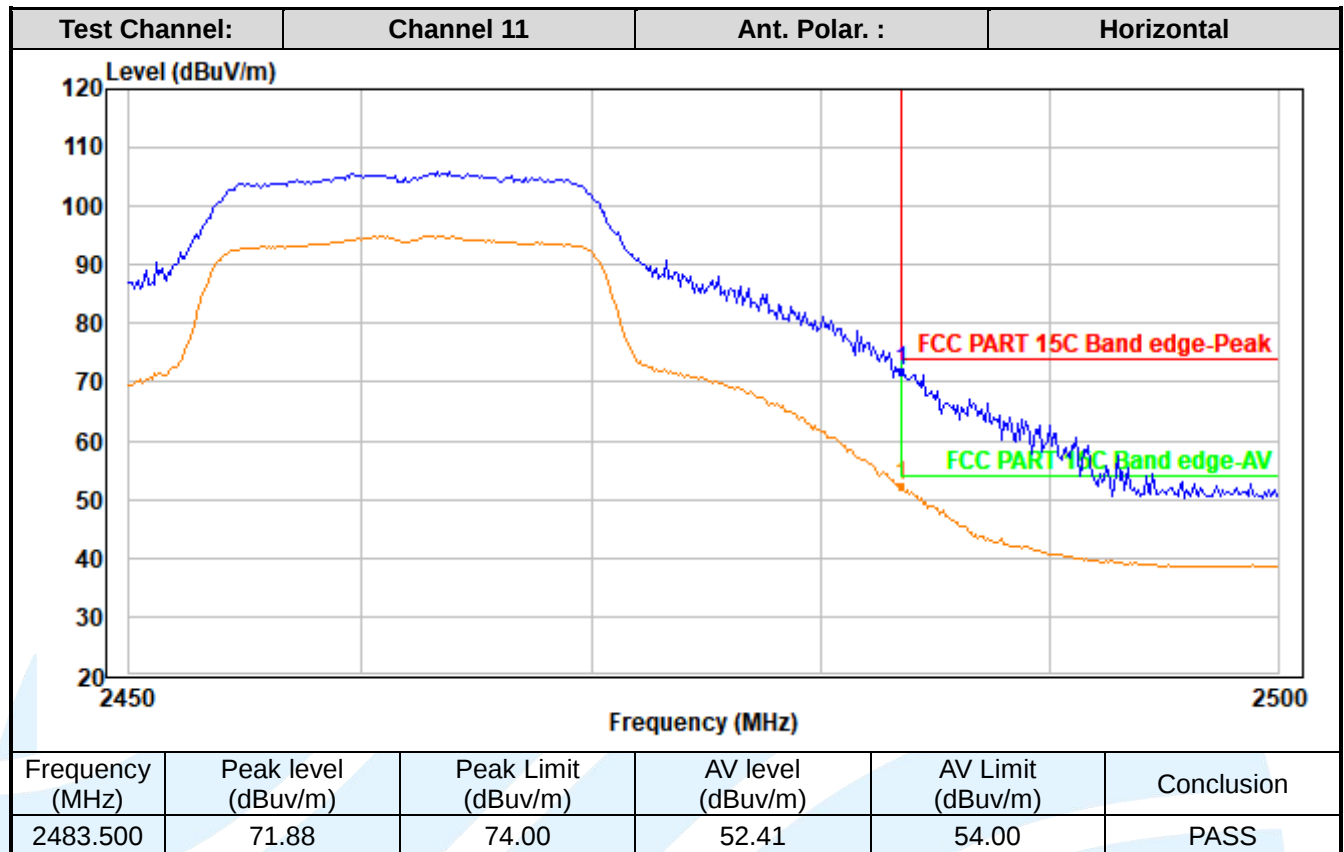

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

MIMO_ IEEE 802.11n-HT20

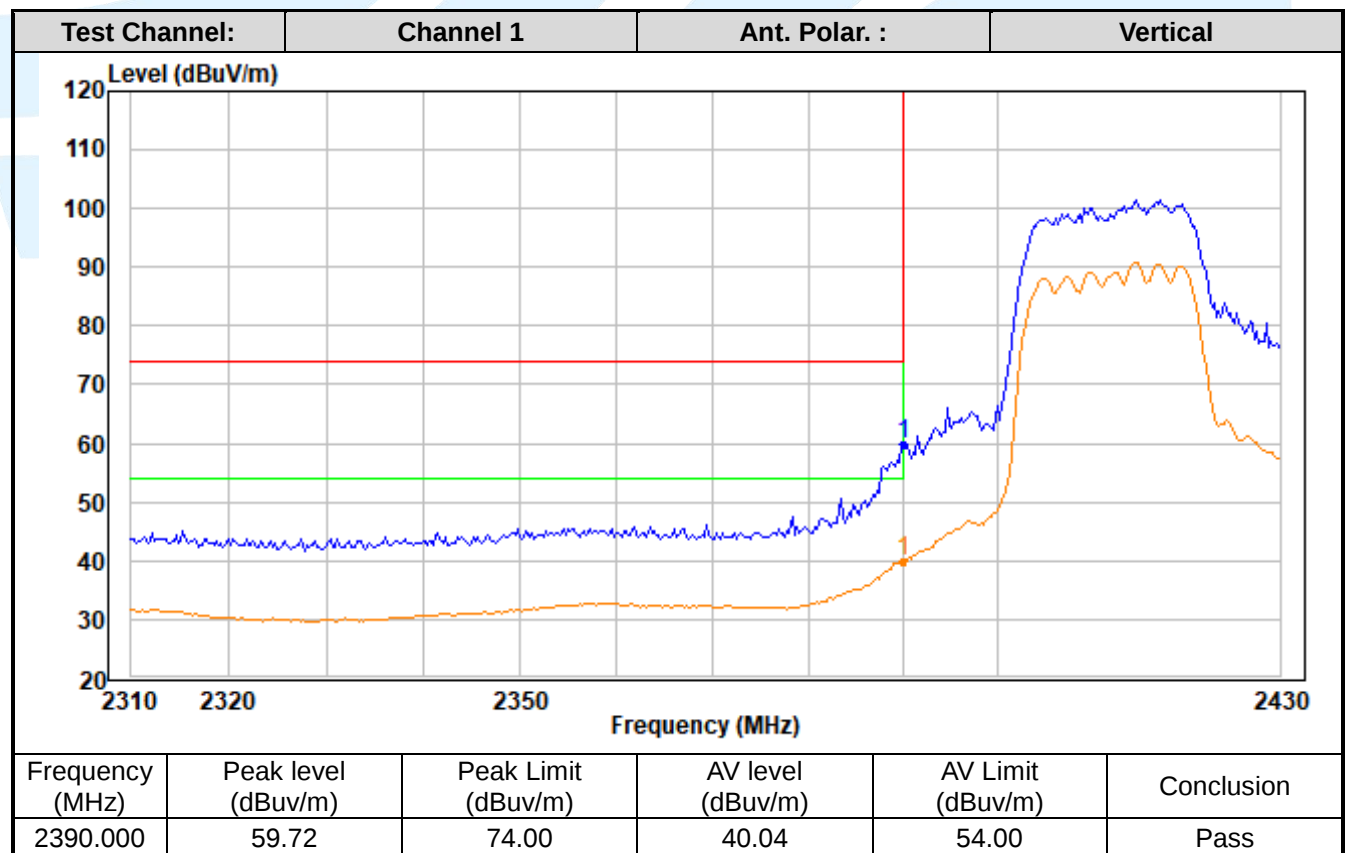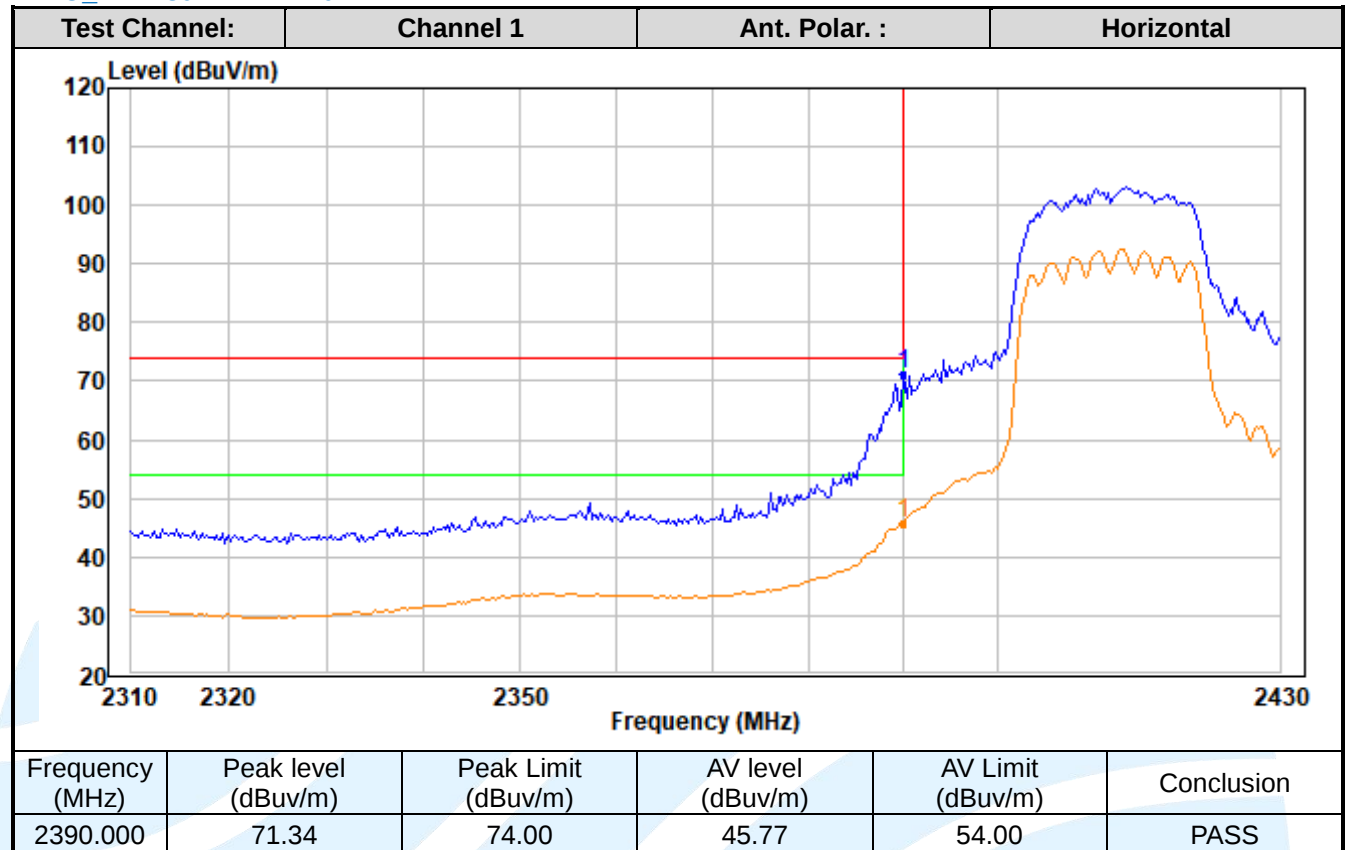

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

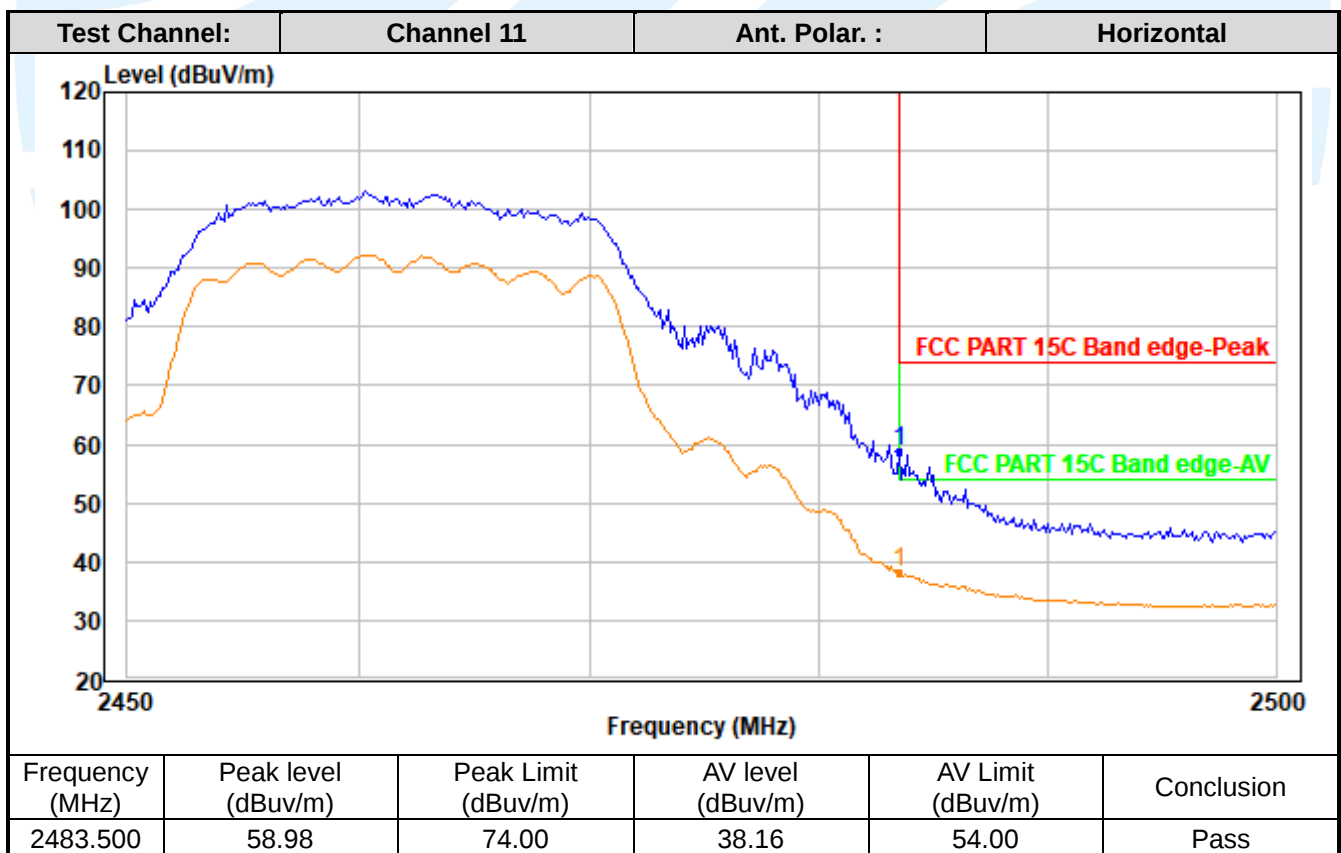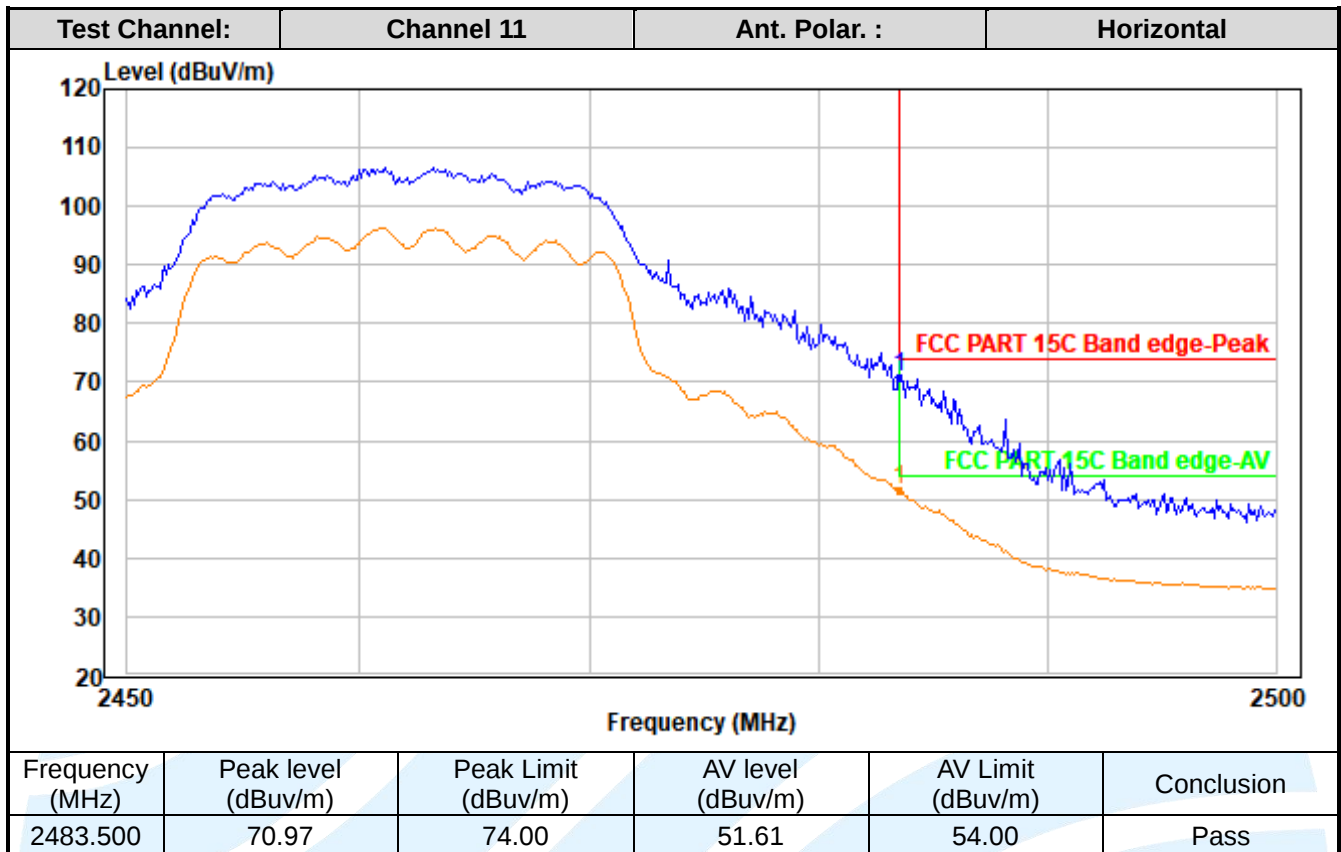

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

MIMO_ IEEE 802.11n-HT40

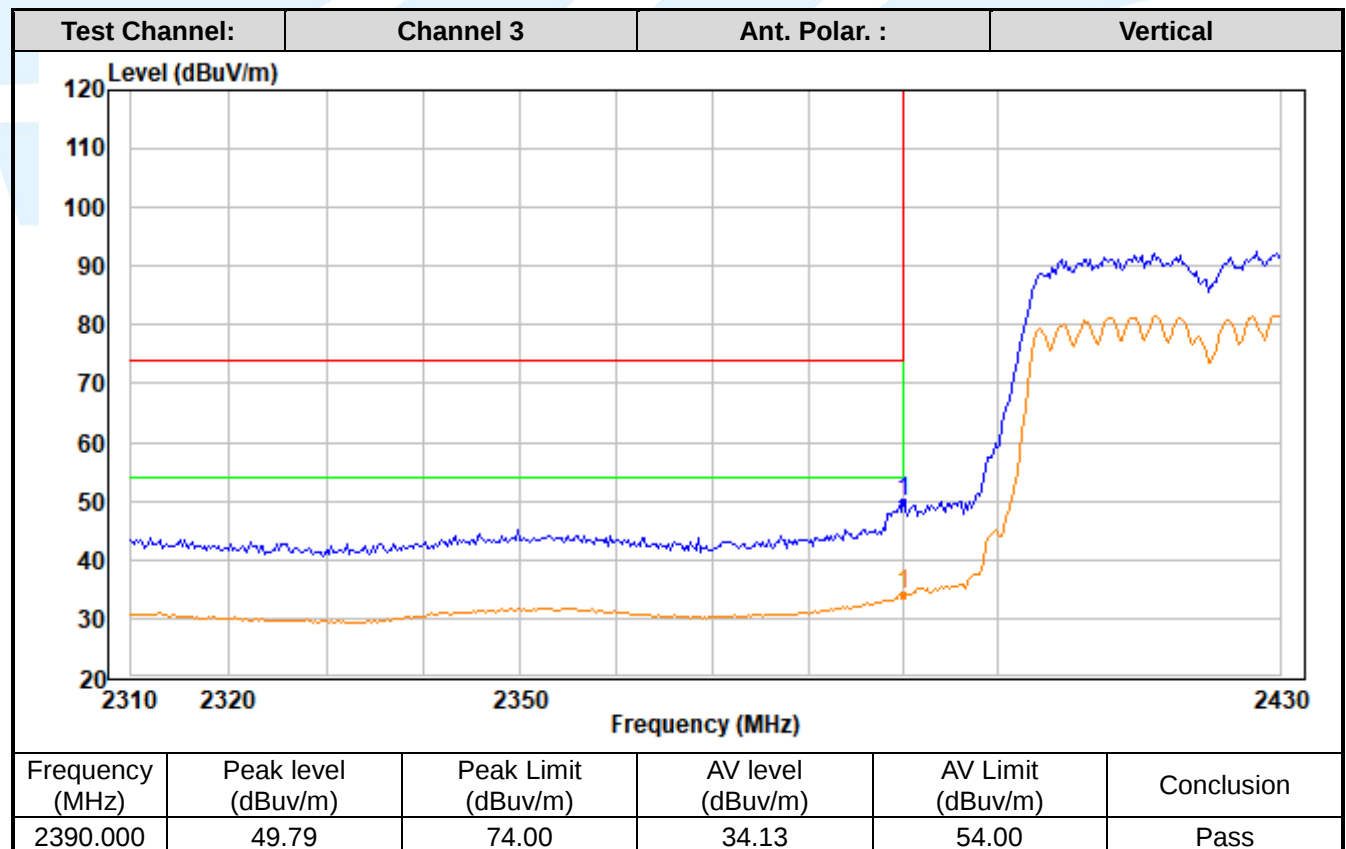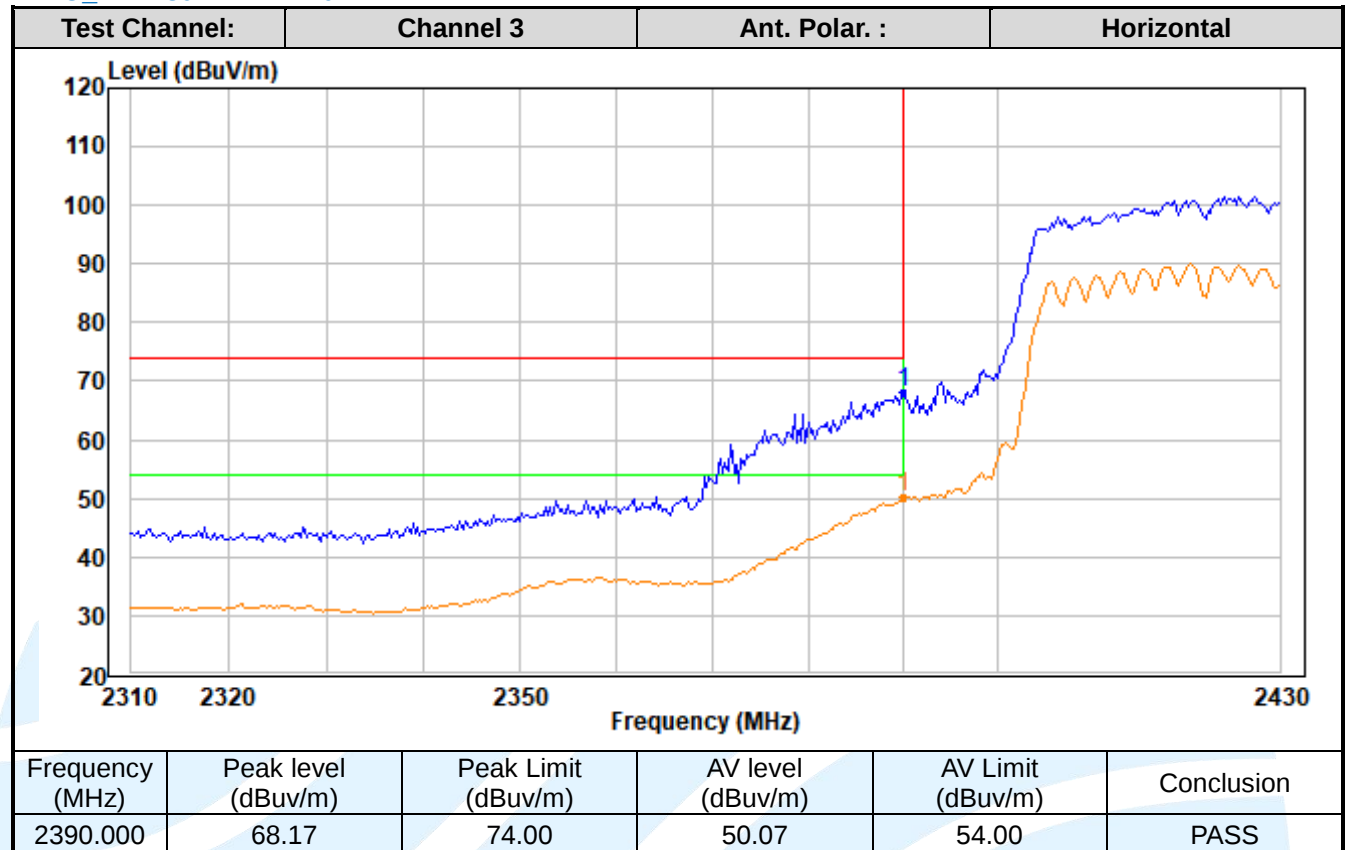

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

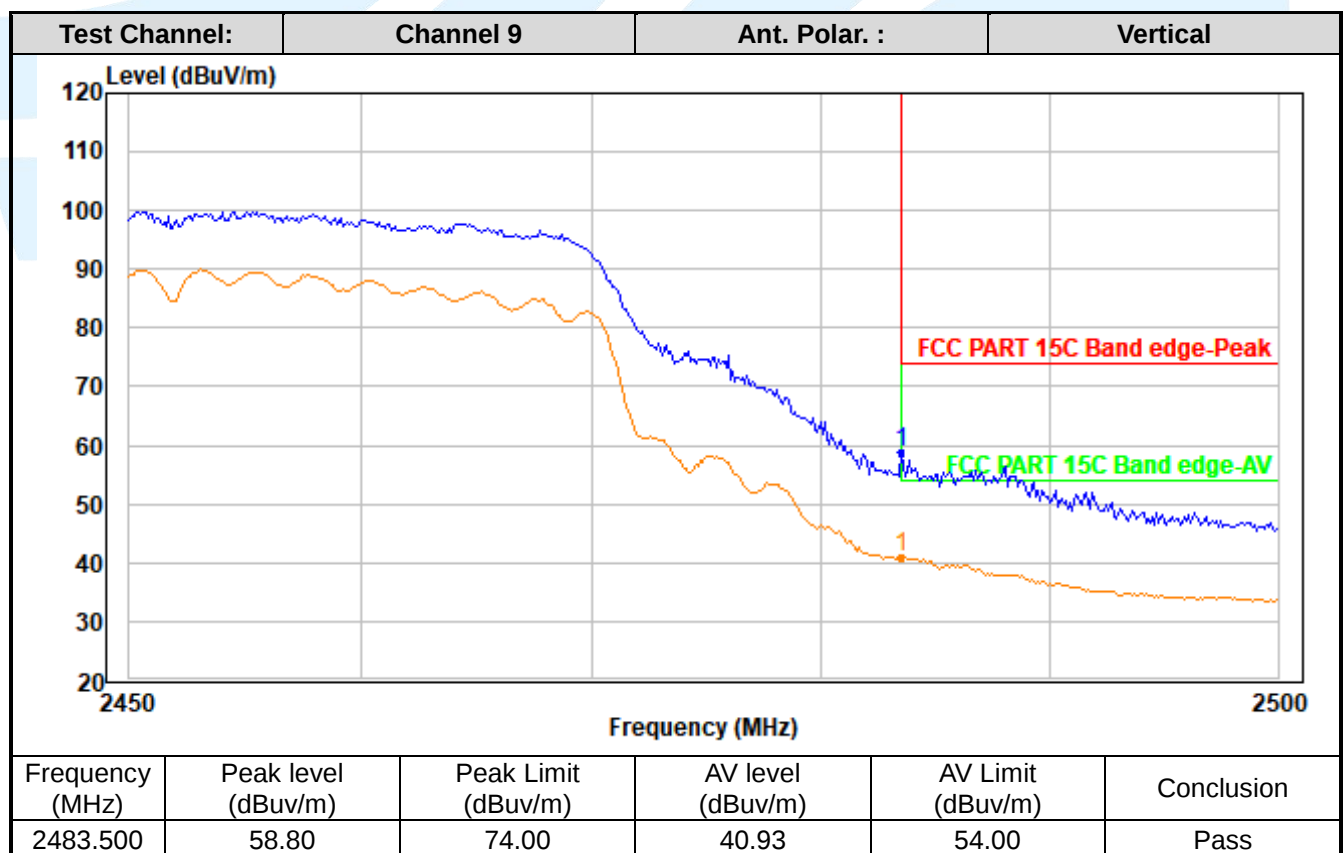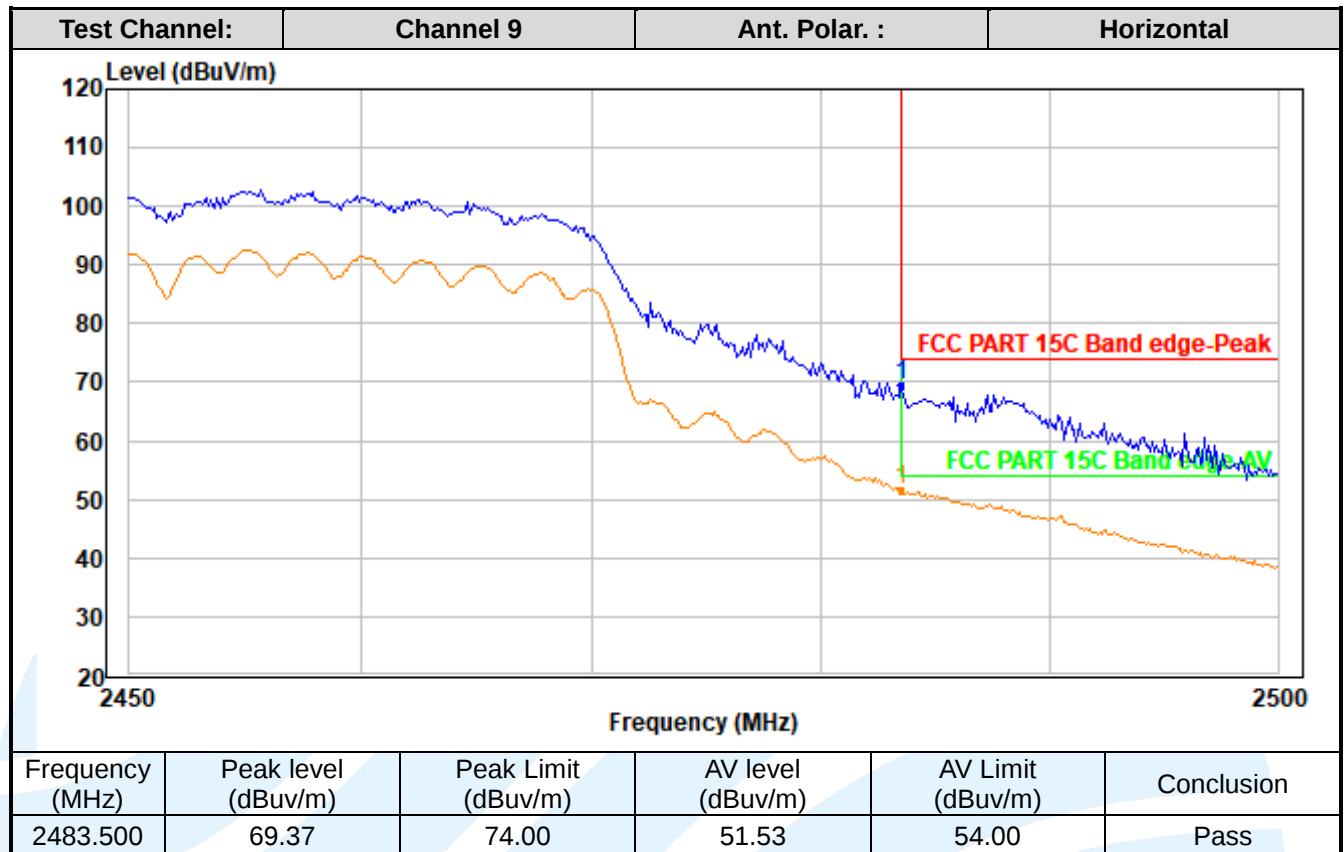

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

MIMO_ IEEE 802.11ax-HT20_ SU

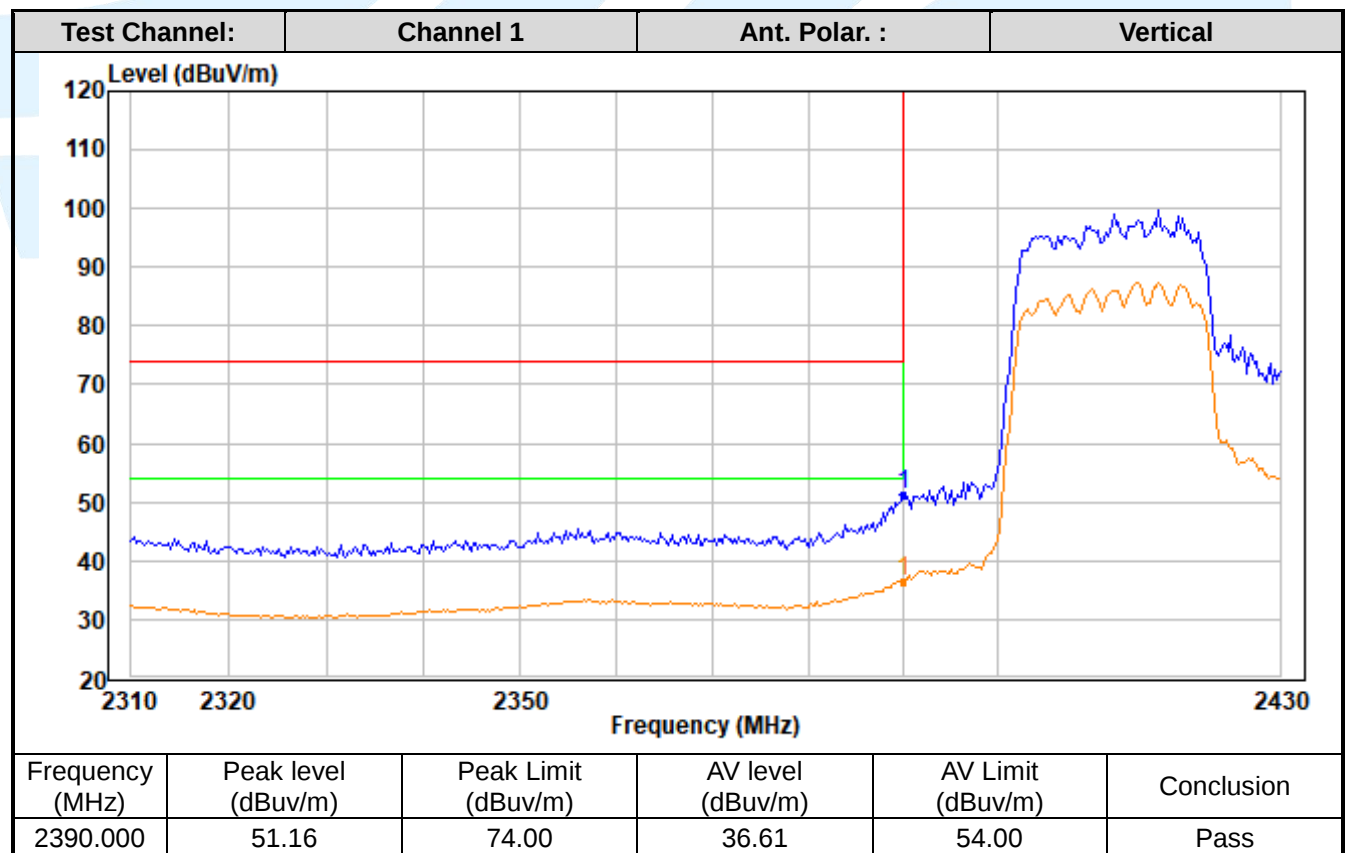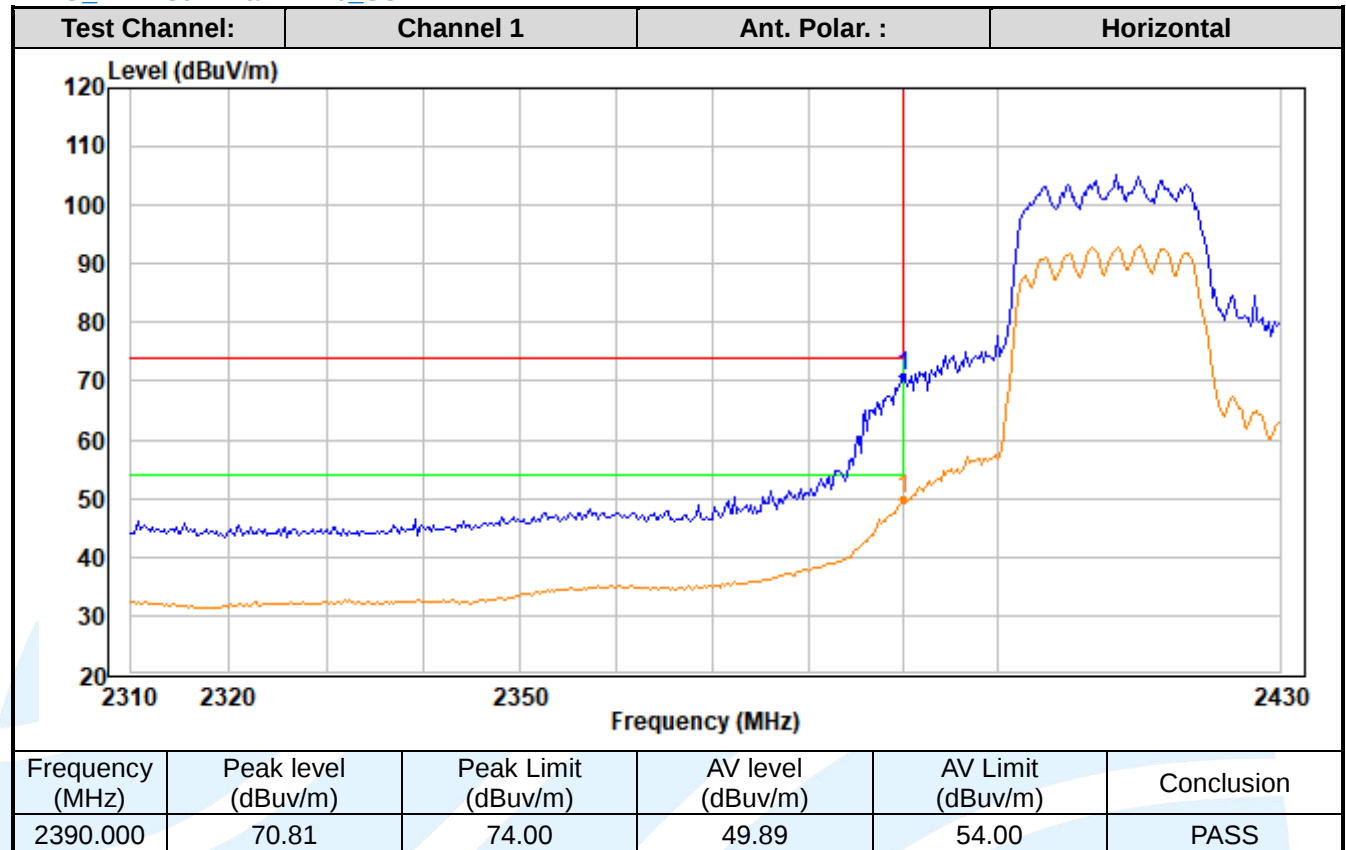

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

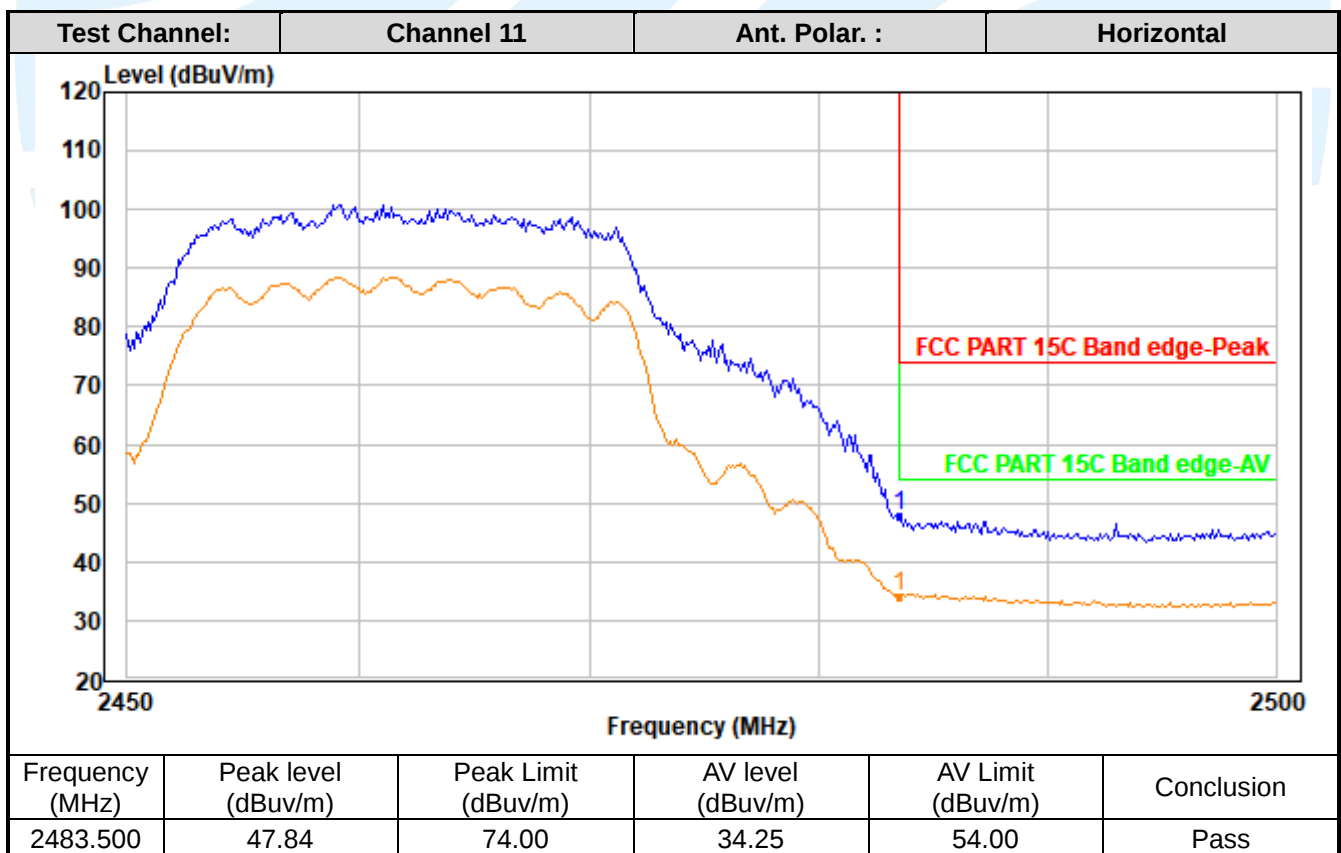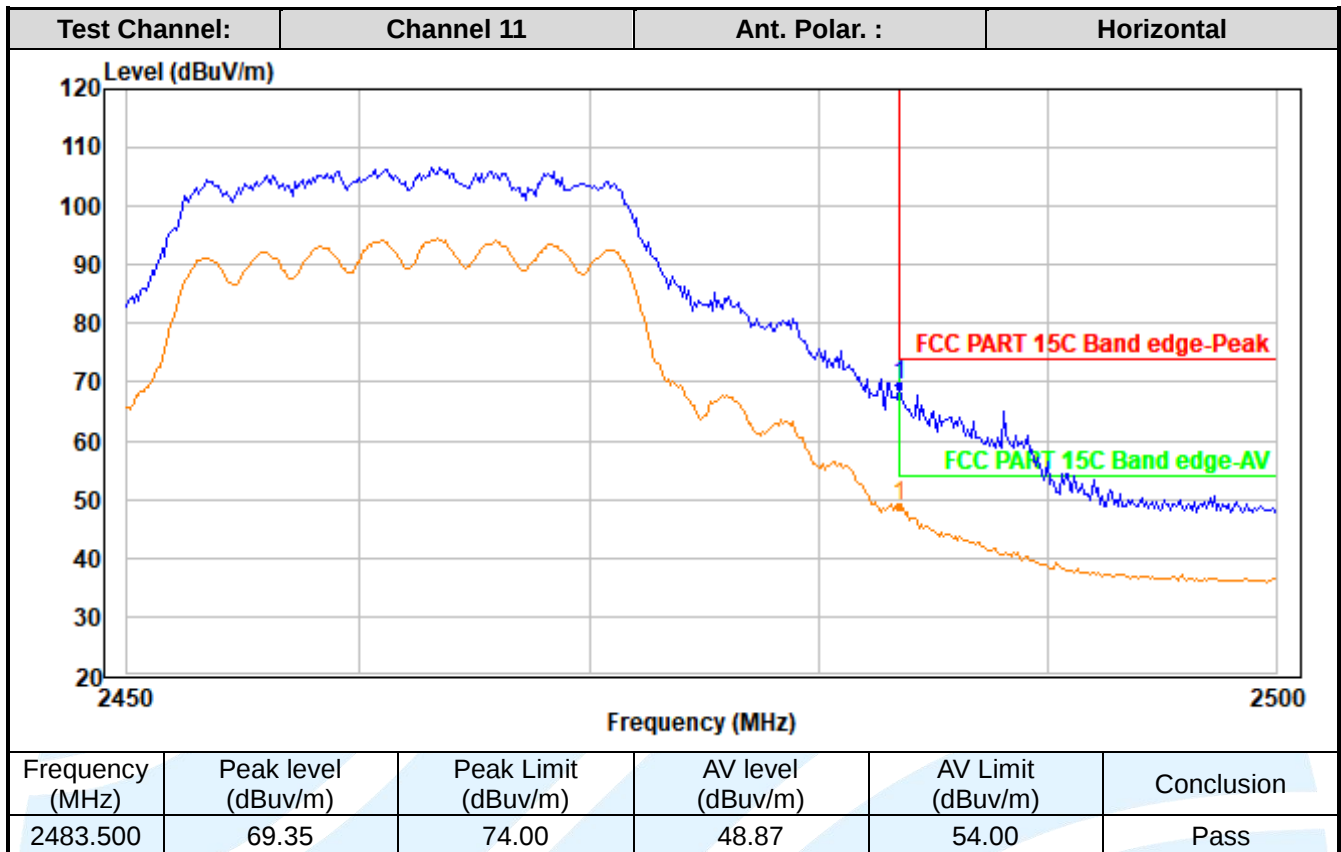

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

MIMO_ IEEE 802.11ax-HE40_ SU

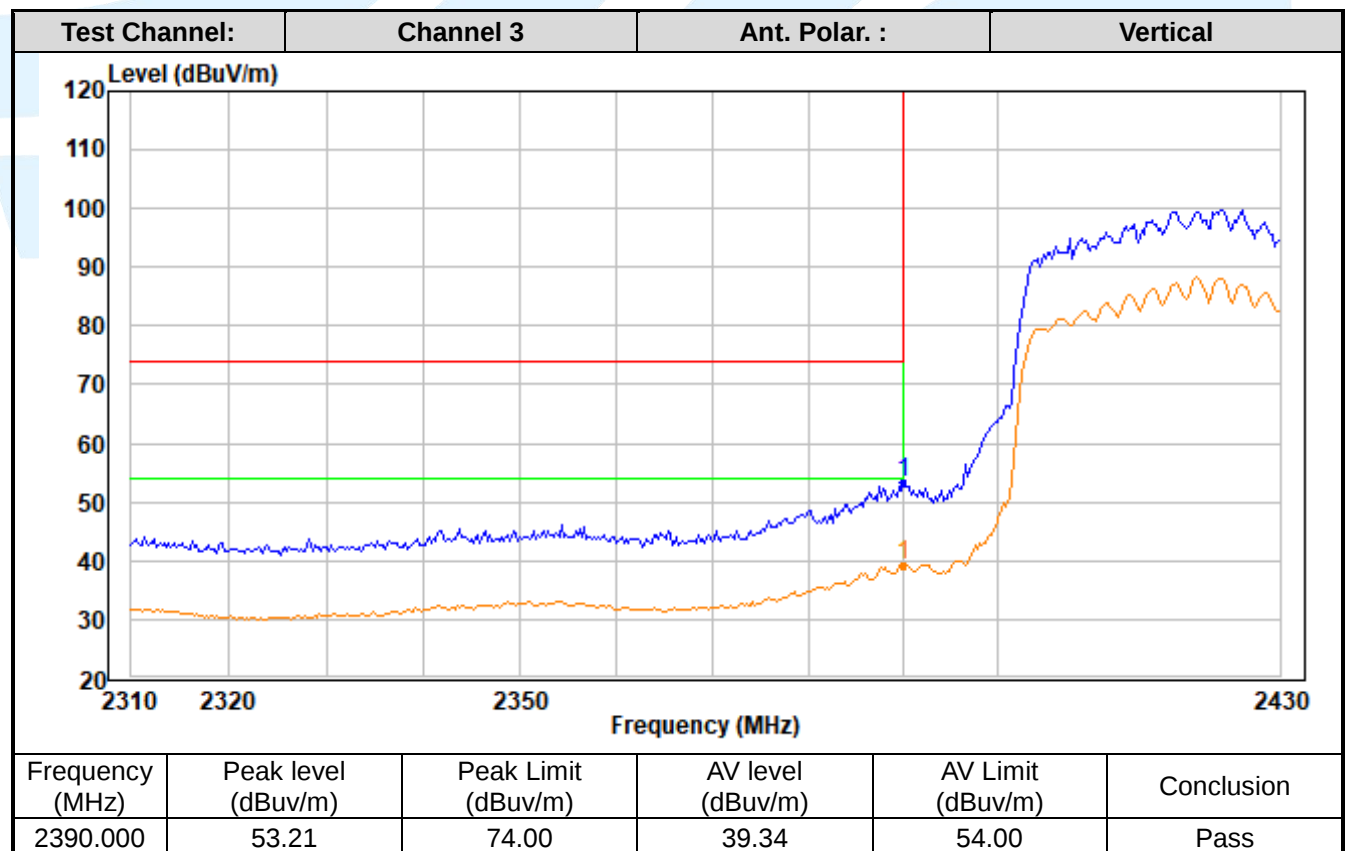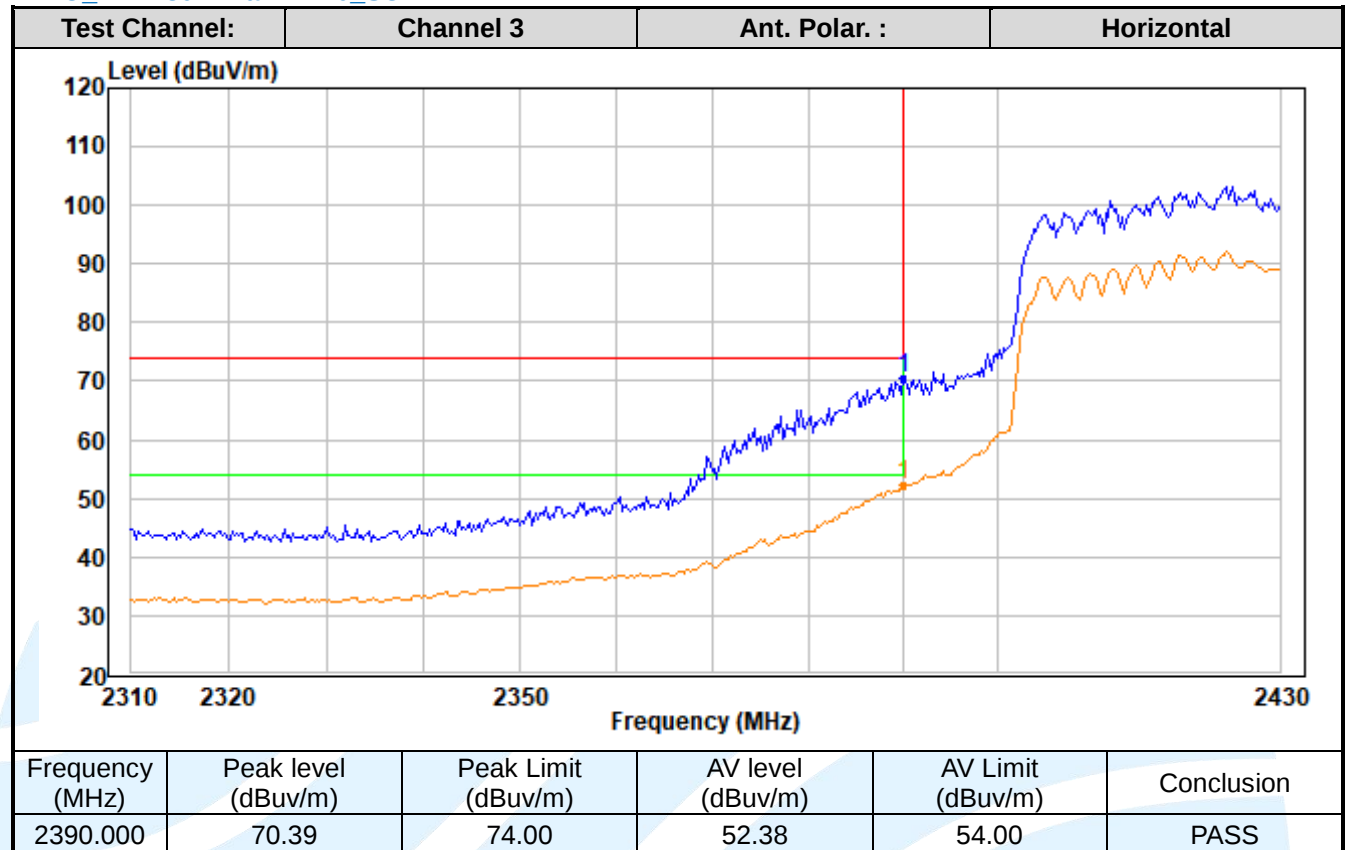

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

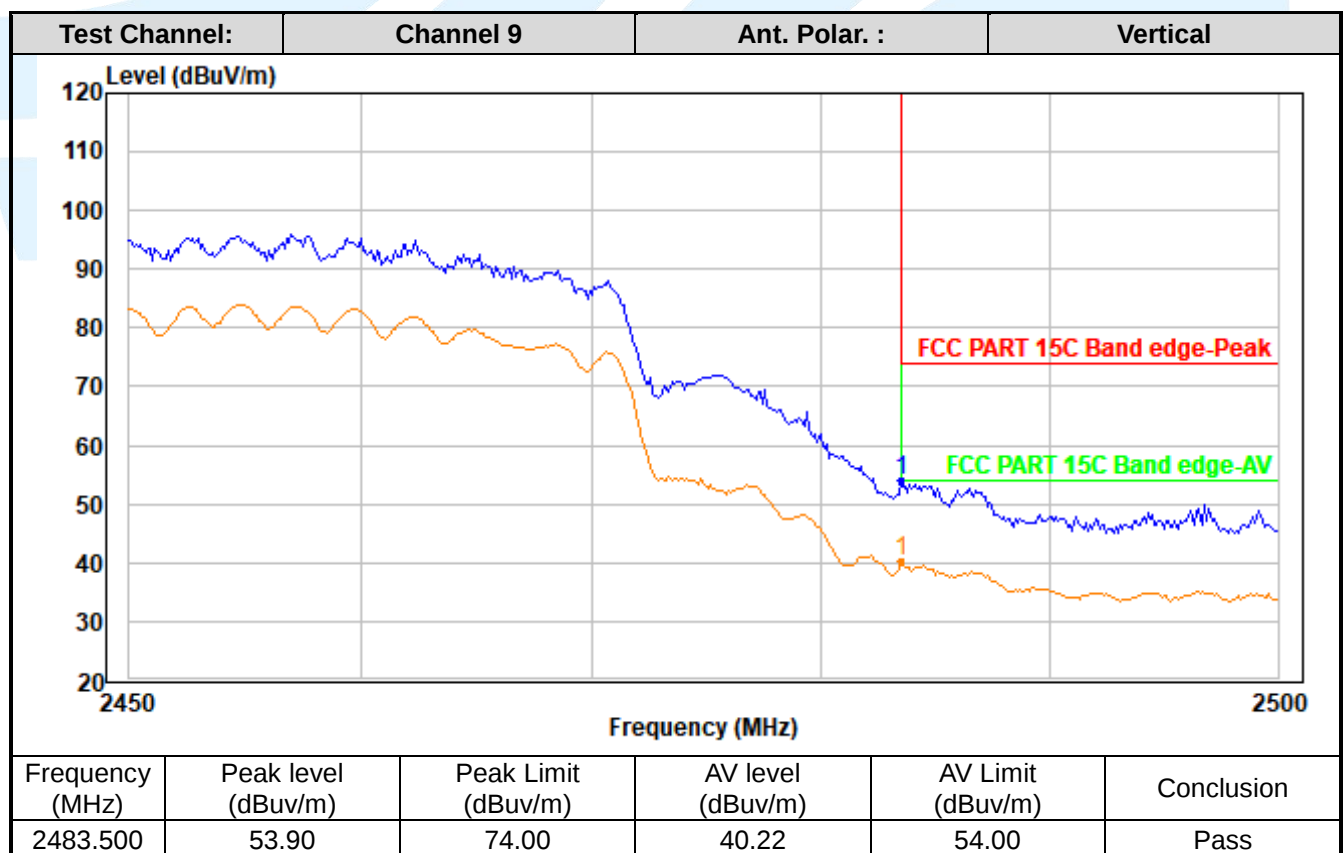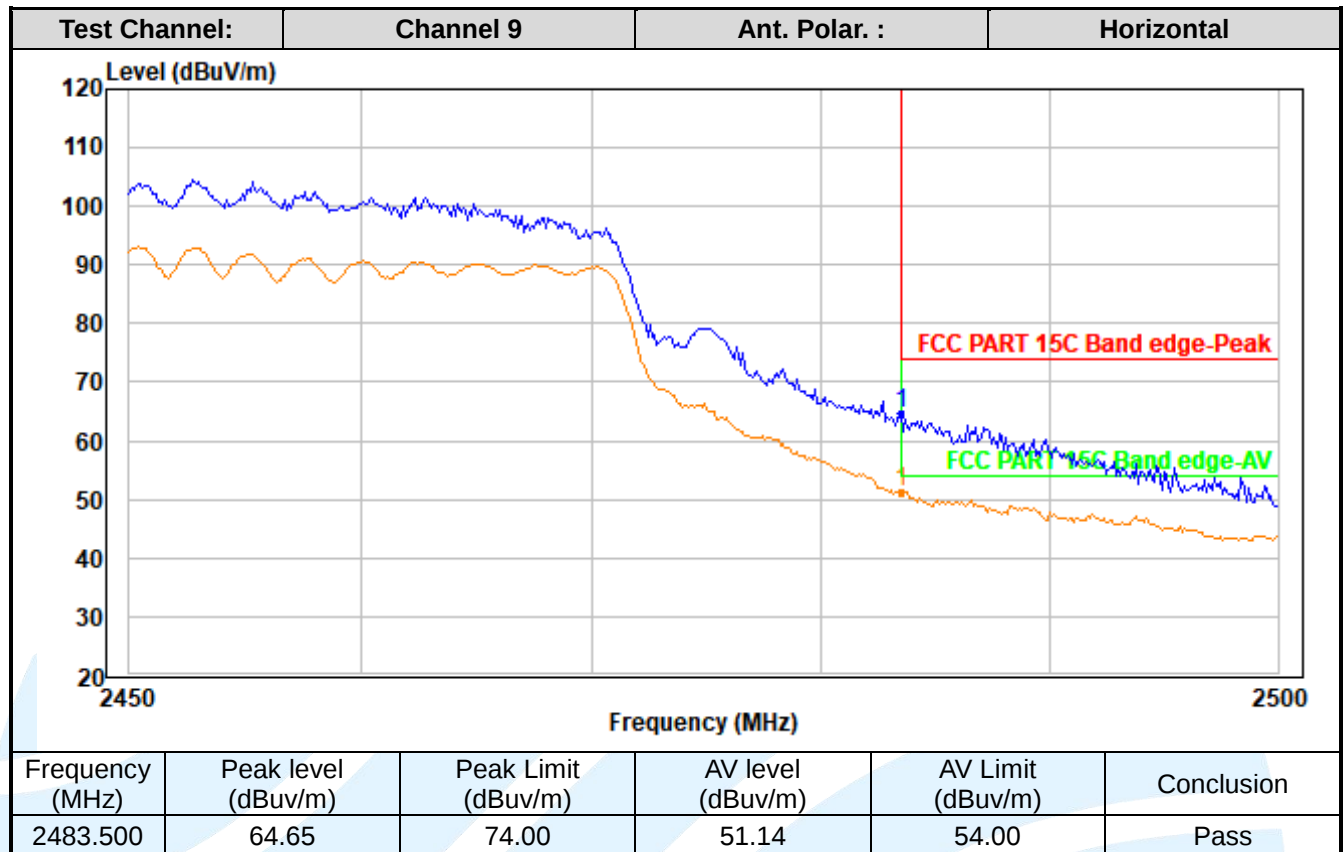

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:


Mode: WIFI Link

Live Line

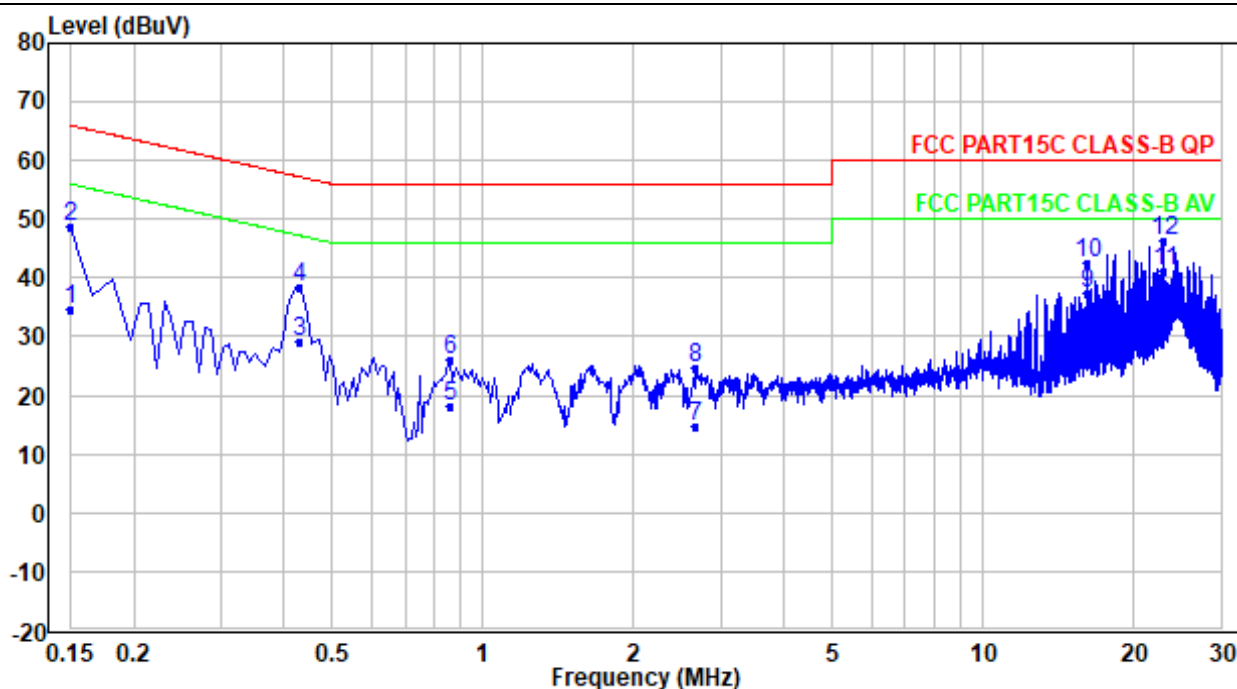

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	24.75	10.04	34.79	56.00	-21.21	Average
2	0.150	38.75	10.04	48.79	66.00	-17.21	QP
3	0.430	19.26	10.05	29.31	47.25	-17.94	Average
4	0.430	28.26	10.05	38.31	57.25	-18.94	QP
5	0.862	7.94	10.06	18.00	46.00	-28.00	Average
6	0.862	15.94	10.06	26.00	56.00	-30.00	QP
7	2.669	4.53	10.14	14.67	46.00	-31.33	Average
8	2.669	14.53	10.14	24.67	56.00	-31.33	QP
9	16.227	26.70	10.82	37.52	50.00	-12.48	Average
10	16.227	31.70	10.82	42.52	60.00	-17.48	QP
11	23.121	29.99	11.26	41.25	50.00	-8.75	Average
12	23.121	34.99	11.26	46.25	60.00	-13.75	QP

Neutral Line

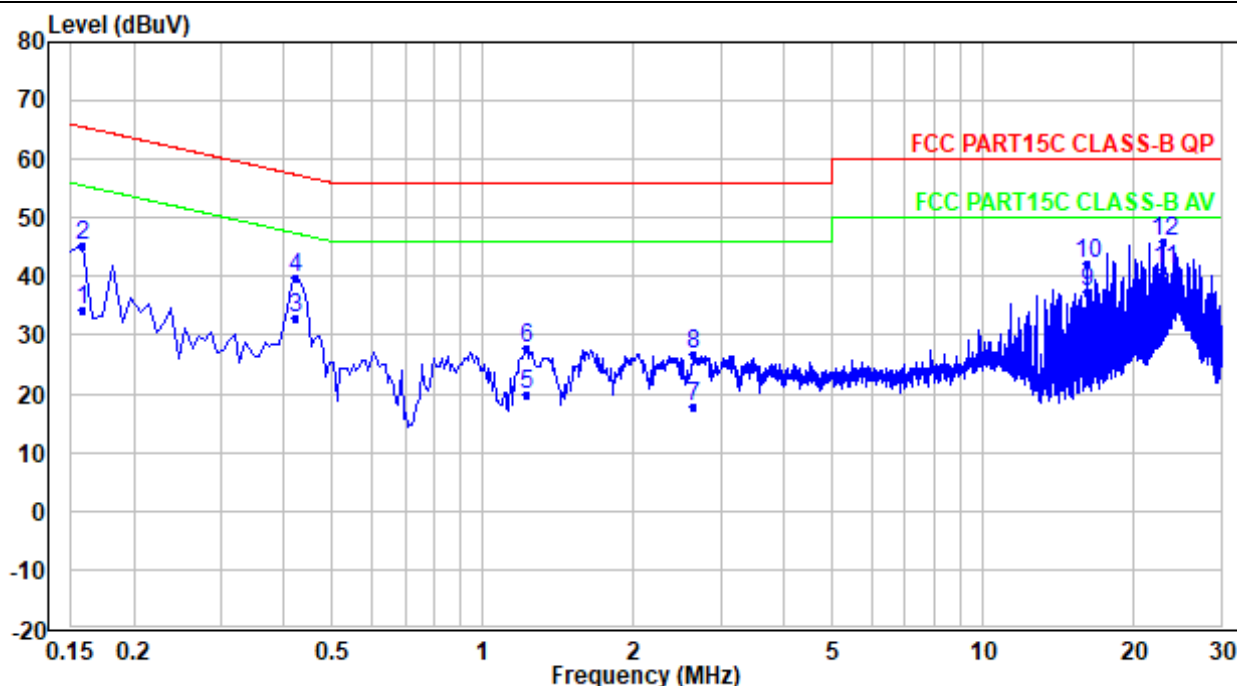

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.158	24.15	10.03	34.18	55.57	-21.39	Average
2	0.158	35.15	10.03	45.18	65.57	-20.39	QP
3	0.422	22.90	10.03	32.93	47.41	-14.48	Average
4	0.422	29.90	10.03	39.93	57.41	-17.48	QP
5	1.222	9.87	10.06	19.93	46.00	-26.07	Average
6	1.222	17.87	10.06	27.93	56.00	-28.07	QP
7	2.645	7.58	10.12	17.70	46.00	-28.30	Average
8	2.645	16.58	10.12	26.70	56.00	-29.30	QP
9	16.227	26.45	10.80	37.25	50.00	-12.75	Average
10	16.227	31.45	10.80	42.25	60.00	-17.75	QP
11	23.121	29.92	11.17	41.09	50.00	-8.91	Average
12	23.121	34.92	11.17	46.09	60.00	-13.91	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.2

APPENDIX A RF TEST DATA

A.1 99% BANDWIDTH

Mode	Channel	RU & Index	Ant.	99% BW (MHz)
IEEE 802.11b	1	N/A	0	12.688
			1	12.505
	6		0	12.676
			1	12.601
	11		0	12.603
			1	12.581
IEEE 802.11g	1		0	16.787
			1	16.833
	6		0	16.811
			1	16.783
	11		0	16.793
			1	16.756
IEEE 802.11n_20	1		0	17.842
			1	17.800
	6		0	17.887
			1	17.878
	11		0	17.906
			1	17.842
IEEE 802.11n_40	3		0	36.203
			1	36.185
	6		0	36.289
			1	36.202
	9		0	36.231
			1	36.257
IEEE 802.11ax_20	1	SU	0	18.910
			1	18.956
	6		0	19.012
			1	19.040
	11		0	19.012
			1	19.033
IEEE 802.11ax_40	3		0	37.620
			1	37.721
	6		0	37.706
			1	37.694
	9		0	37.745
			1	37.698

Test Graphs

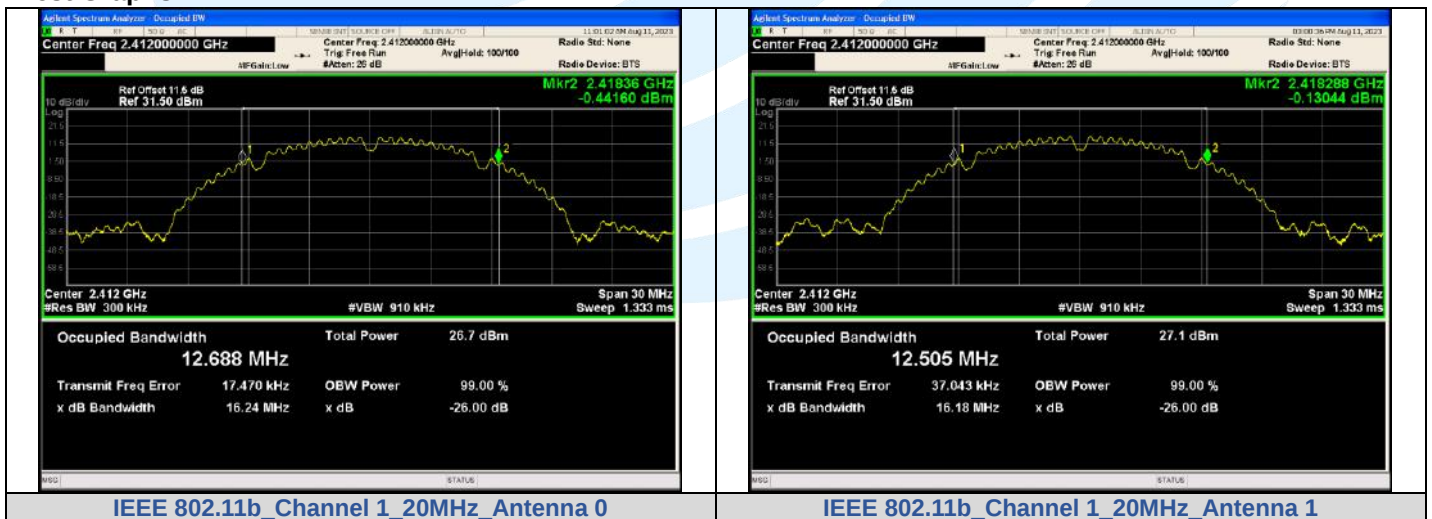

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

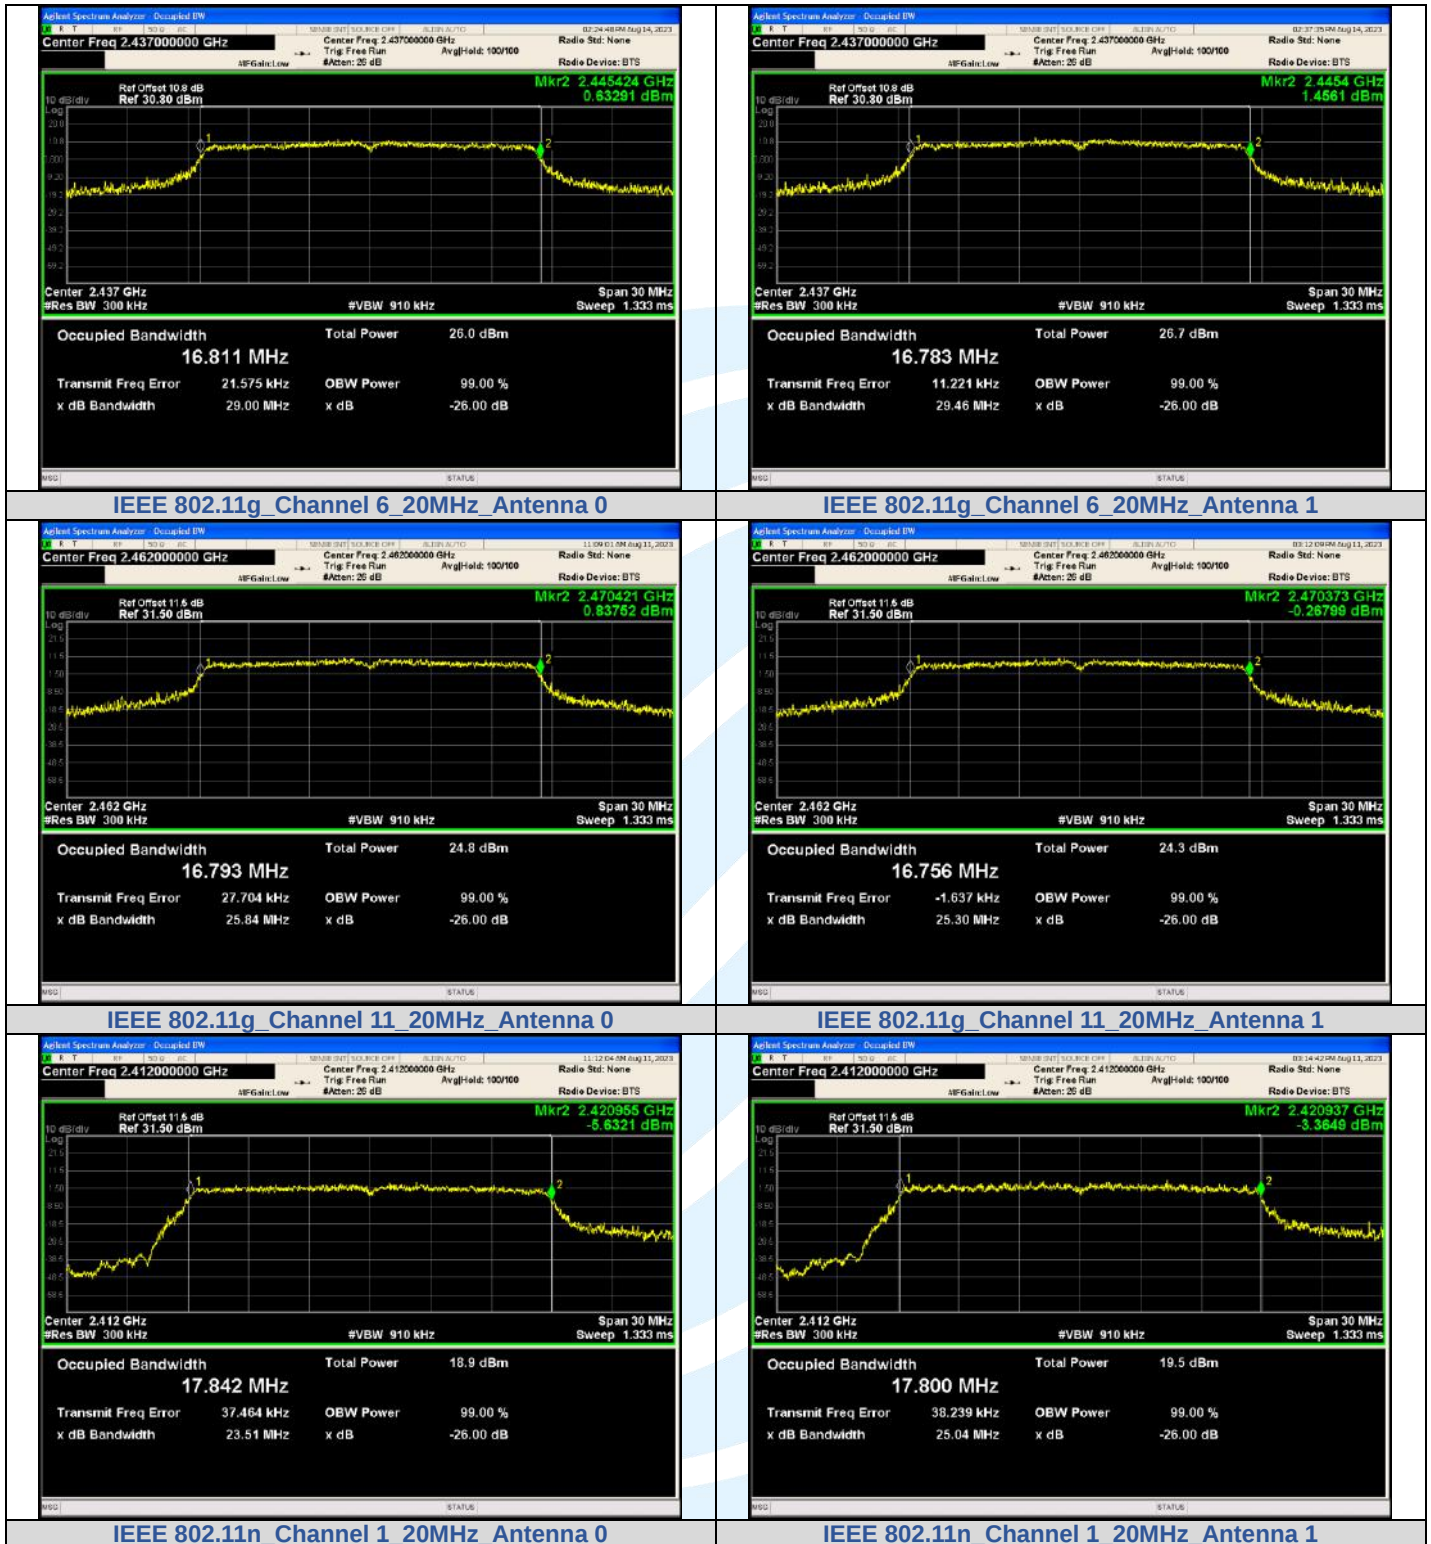


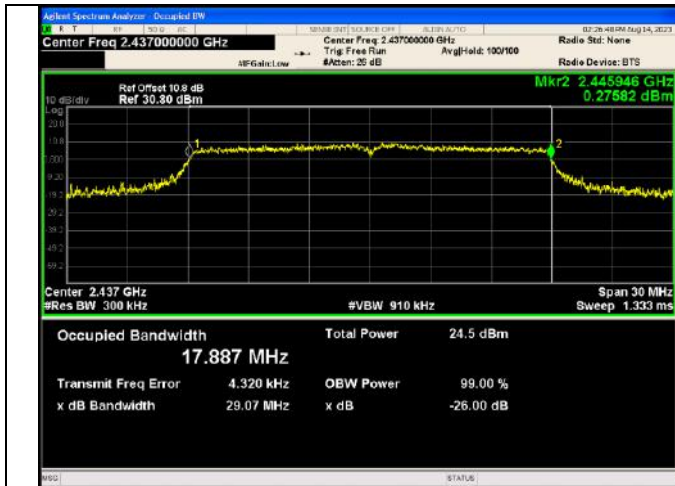

IEEE 802.11n_Channel 6_20MHz_Antenna 0




IEEE 802.11n_Channel 6_20MHz_Antenna 1

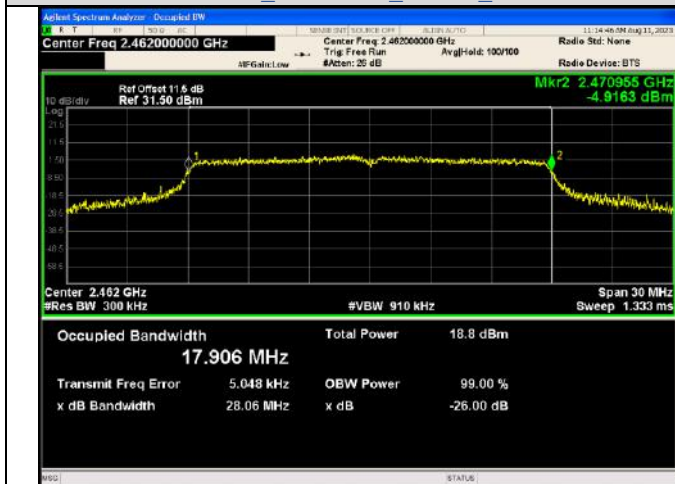

IEEE 802.11n_Channel 11_20MHz_Antenna 0




IEEE 802.11n_Channel 11_20MHz_Antenna 1

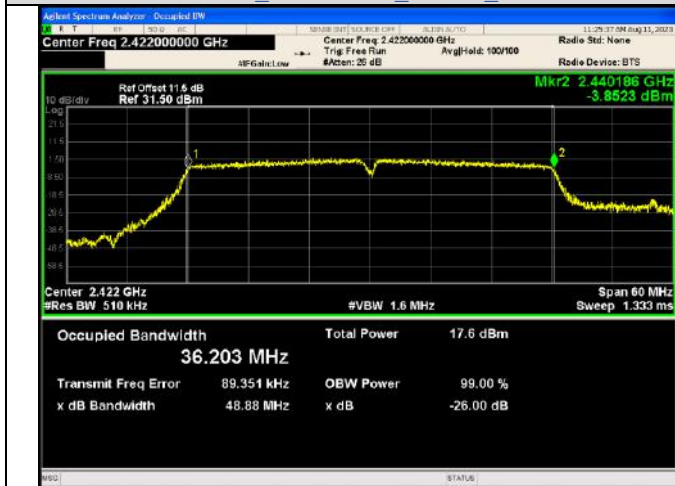


IEEE 802.11n_Channel 3_40MHz_Antenna 0




IEEE 802.11n_Channel 3_40MHz_Antenna 1

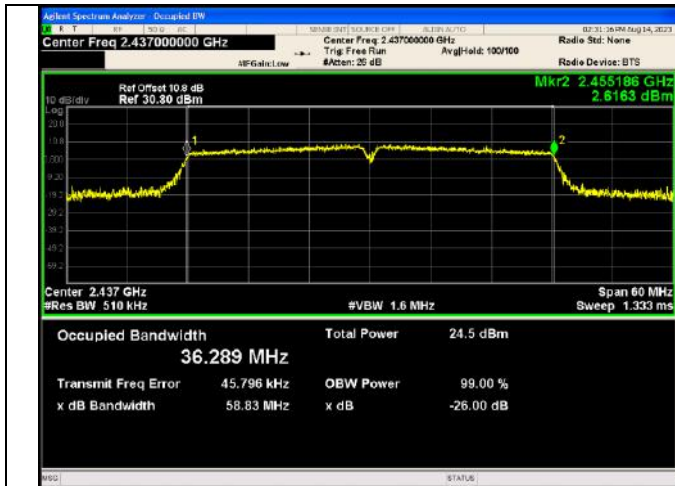


IEEE 802.11n Channel 6 40MHz Antenna 0

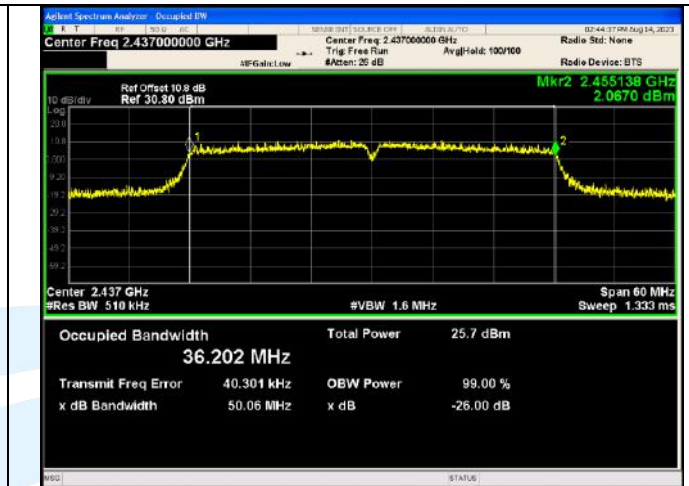


IEEE 802.11n Channel 6 40MHz Antenna 1

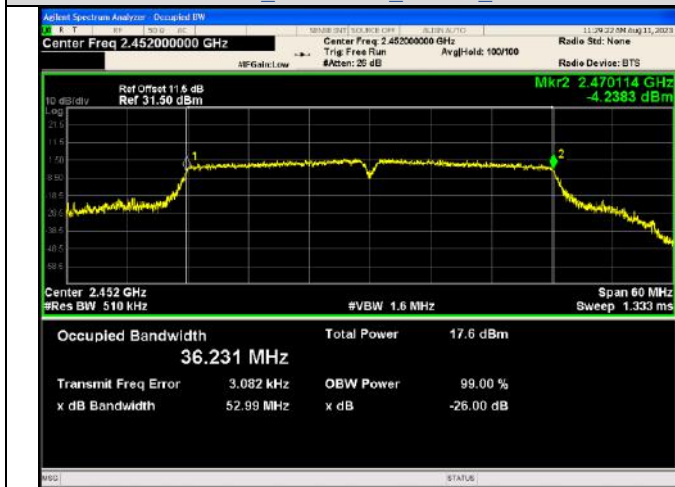


IEEE 802.11n Channel 9 40MHz Antenna 0

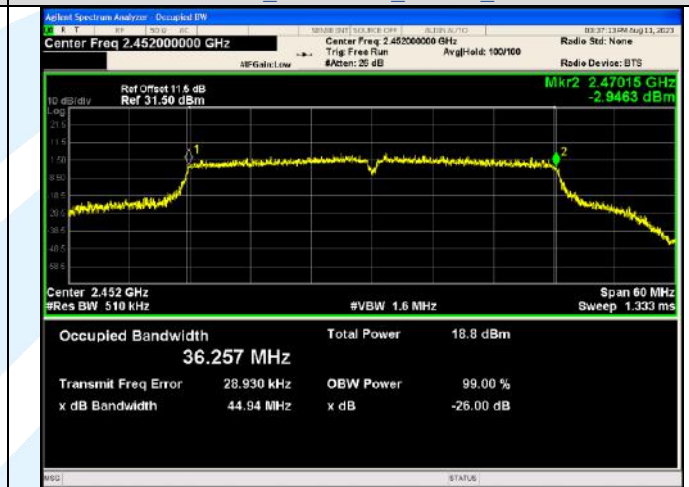


IEEE 802.11n Channel 9 40MHz Antenna 1

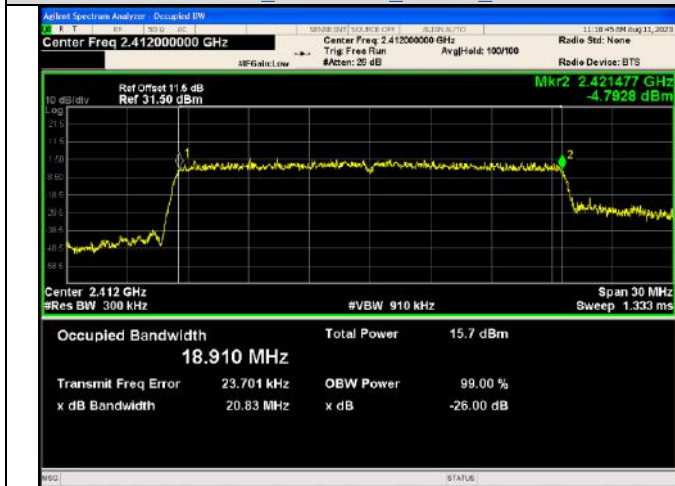


IEEE 802.11ax Channel 1 20MHz Antenna 0 RU&Index SU

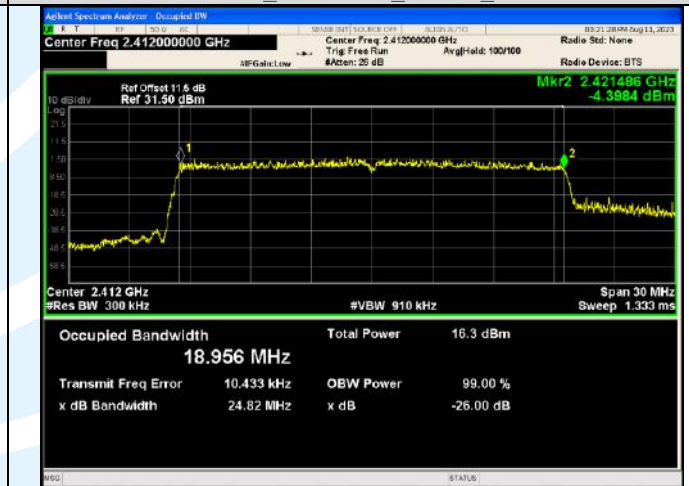


IEEE 802.11ax Channel 1 20MHz Antenna 1 RU&Index SU

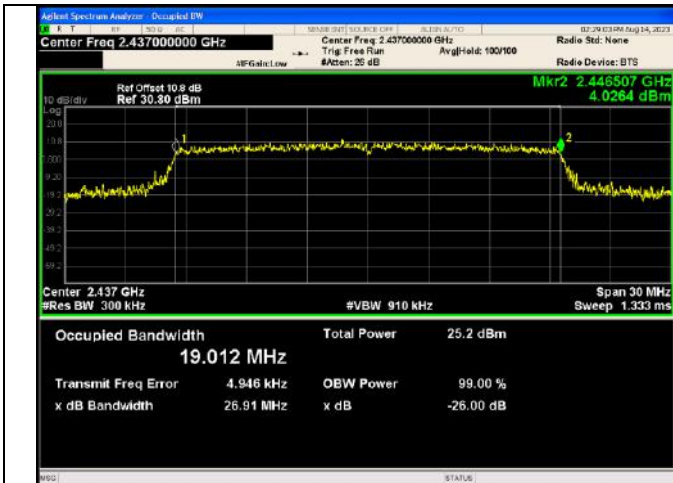


IEEE 802.11ax_Channel 6_20MHz_Antenna 0_RU&Index SU

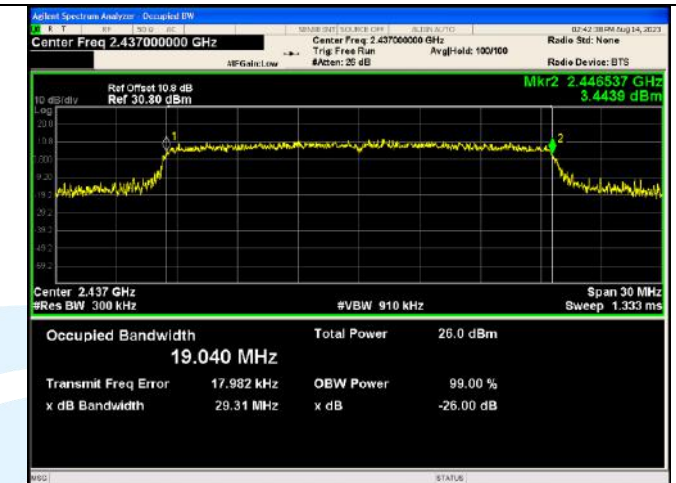


IEEE 802.11ax_Channel 6_20MHz_Antenna 1_RU&Index SU

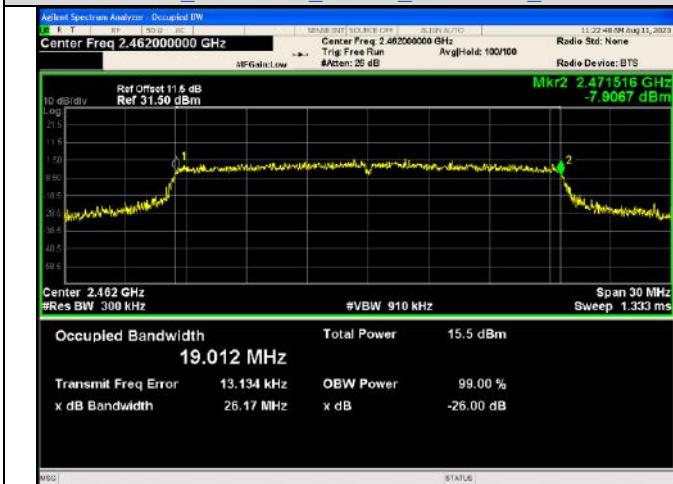


IEEE 802.11ax_Channel 11_20MHz_Antenna 0_RU&Index SU

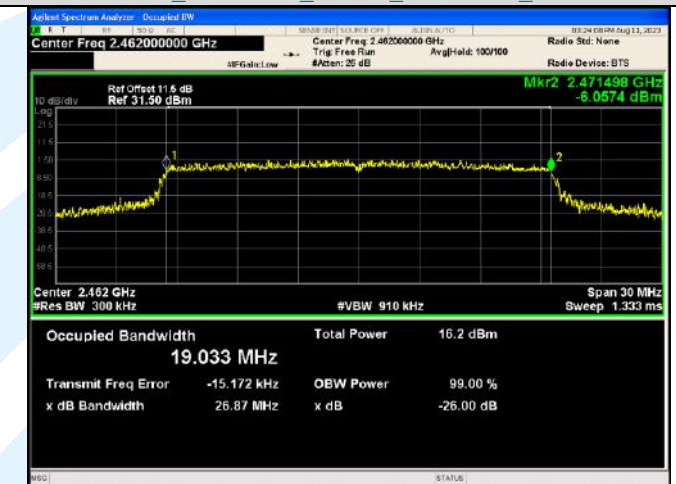

IEEE 802.11ax_Channel 11_20MHz_Antenna 1_RU&Index SU

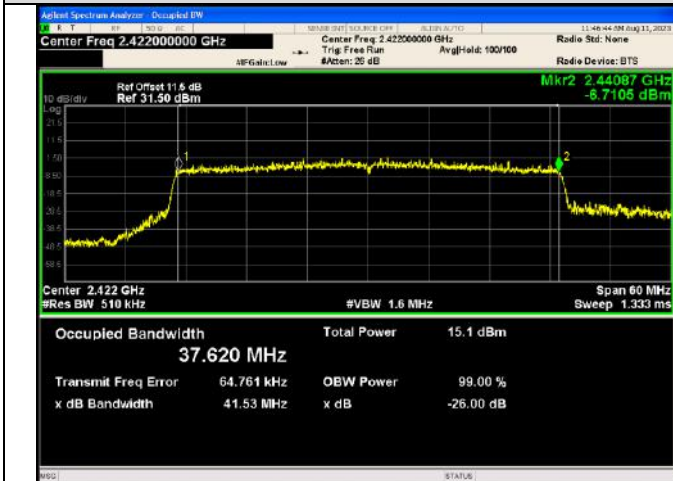

IEEE 802.11ax_Channel 3_40MHz_Antenna 0_RU&Index SU

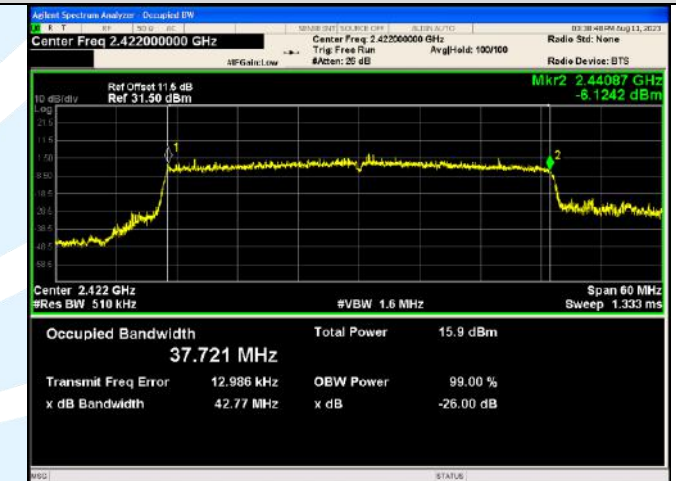


IEEE 802.11ax_Channel 3_40MHz_Antenna 1_RU&Index SU



A.2 6DB BANDWIDTH

Mode	Channel	RU & Index	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	N/A	0	2412	8.054	0.5	PASS
			1	2412	8.067		PASS
	6		0	2437	8.002		PASS
			1	2437	8.059		PASS
	11		0	2462	8.040		PASS
			1	2462	8.050		PASS
IEEE 802.11g	1		0	2412	15.65		PASS
			1	2412	15.67		PASS
	6		0	2437	16.30		PASS
			1	2437	16.29		PASS
	11		0	2462	15.86		PASS
			1	2462	16.27		PASS
IEEE 802.11n_20	1		0	2412	17.55		PASS
			1	2412	16.79		PASS
	6		0	2437	15.45		PASS
			1	2437	16.52		PASS
	11		0	2462	16.74		PASS
			1	2462	16.01		PASS
IEEE 802.11n_40	3		0	2422	35.08		PASS
			1	2422	35.12		PASS
	6		0	2437	35.12		PASS
			1	2437	35.06		PASS
	9		0	2452	35.12		PASS
			1	2452	35.11		PASS
IEEE 802.11ax_20	1	SU	0	2412	18.02		PASS
			1	2412	18.23		PASS
	6		0	2437	17.97		PASS
			1	2437	17.64		PASS
	11		0	2462	17.86		PASS
			1	2462	17.65		PASS
IEEE 802.11ax_40	3		0	2422	36.78		PASS
			1	2422	35.56		PASS
	6		0	2437	36.12		PASS
			1	2437	35.83		PASS
	9		0	2452	36.58		PASS
			1	2452	36.29		PASS

Test Graphs

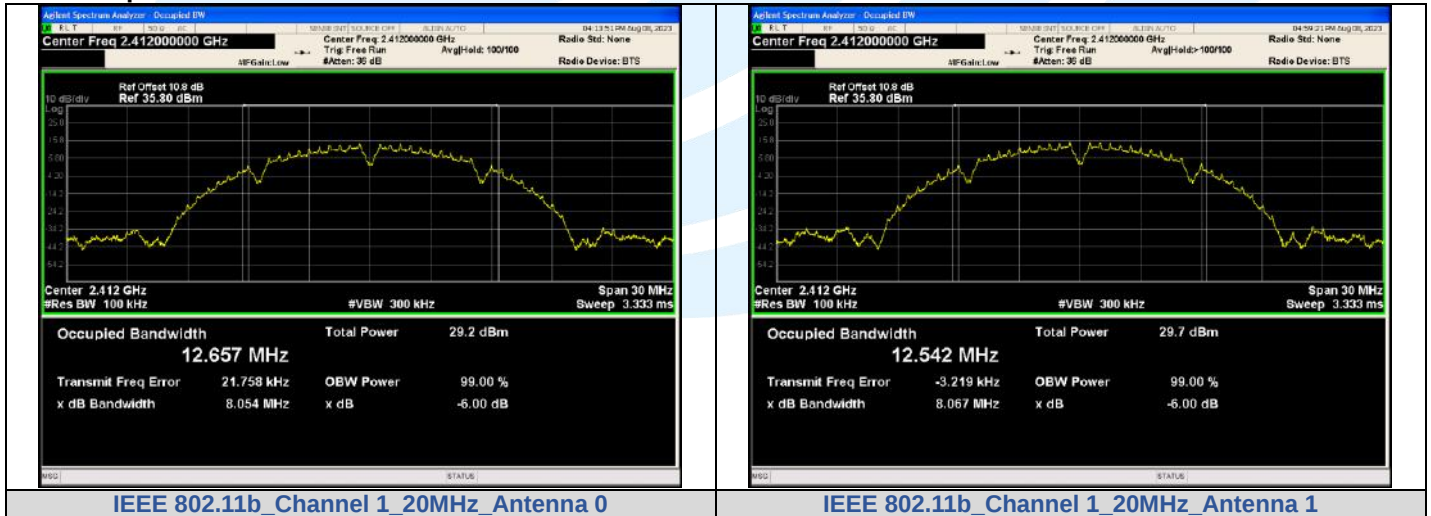

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

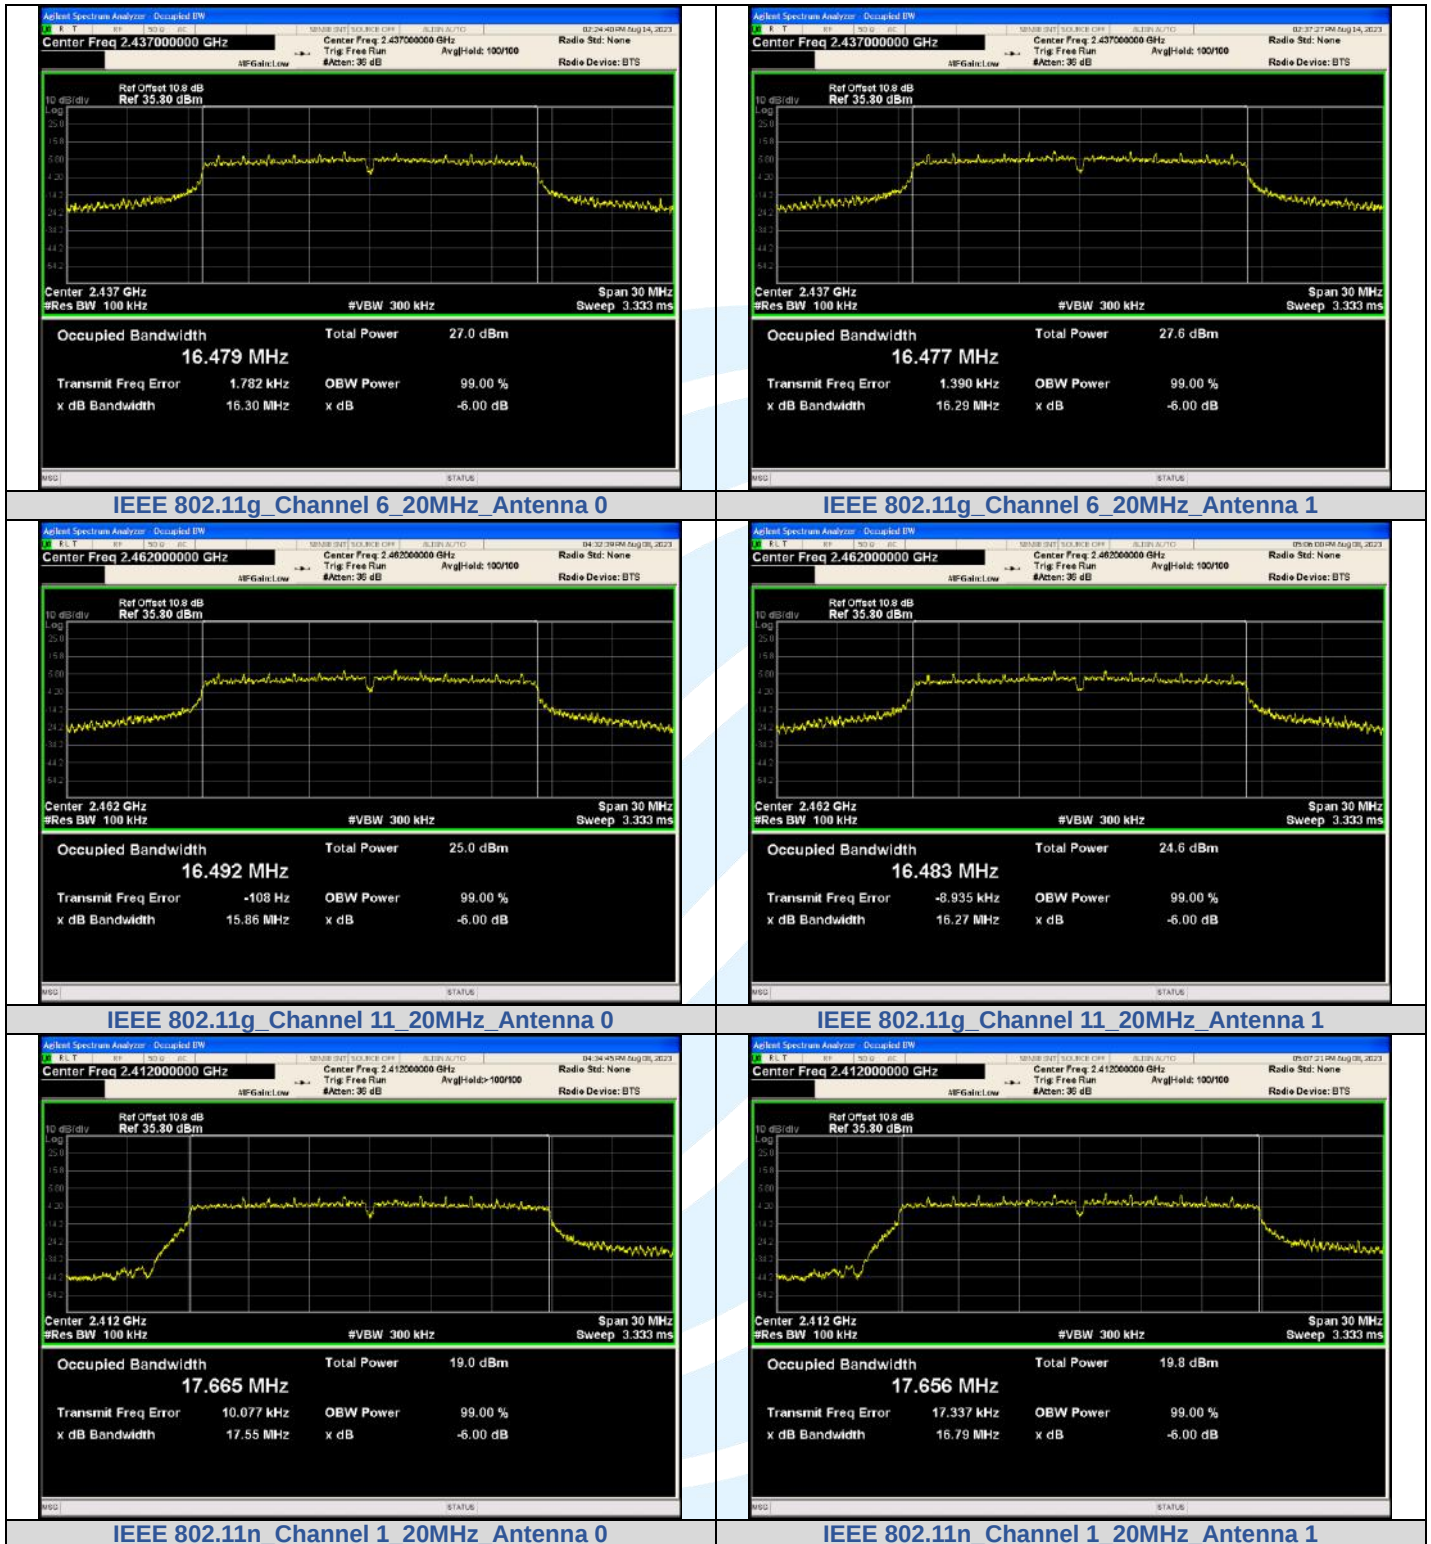

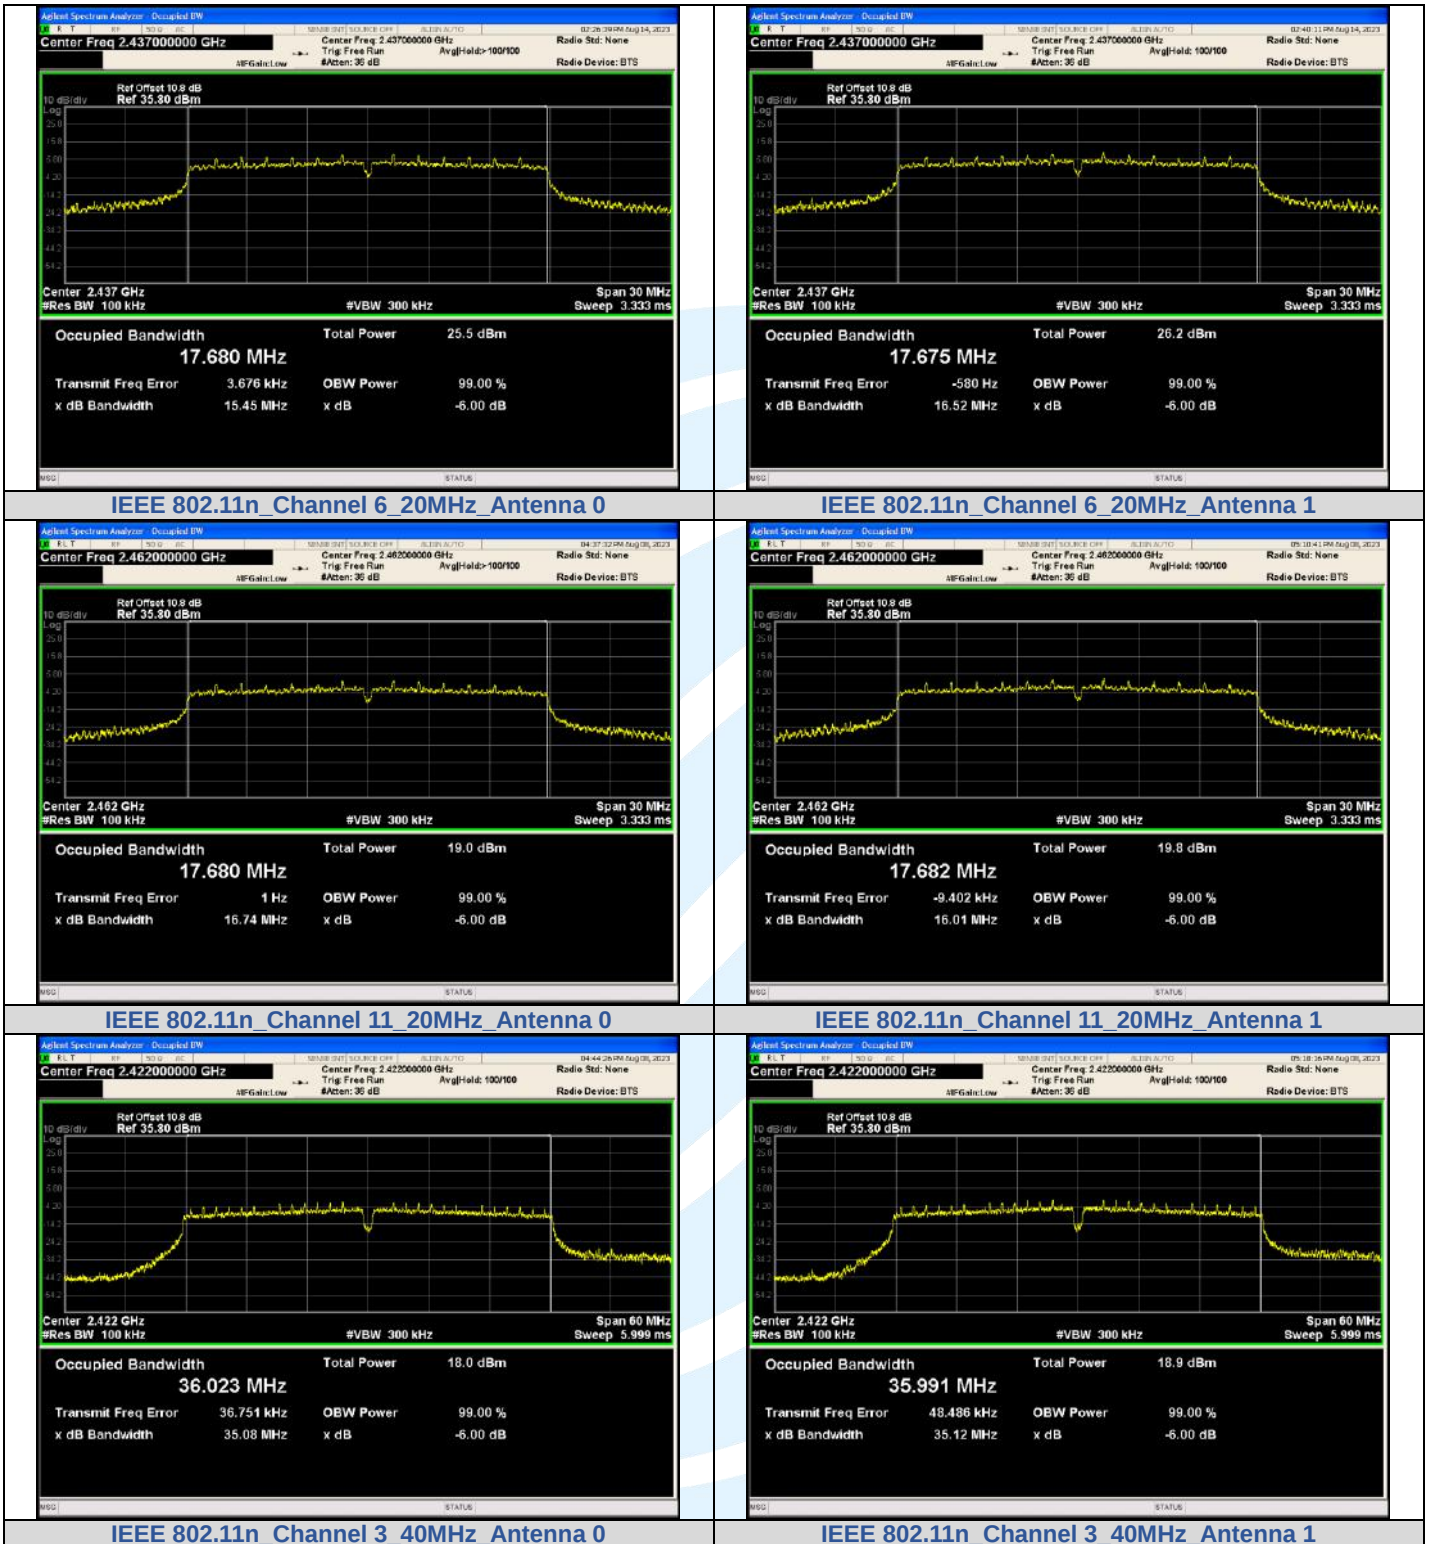

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

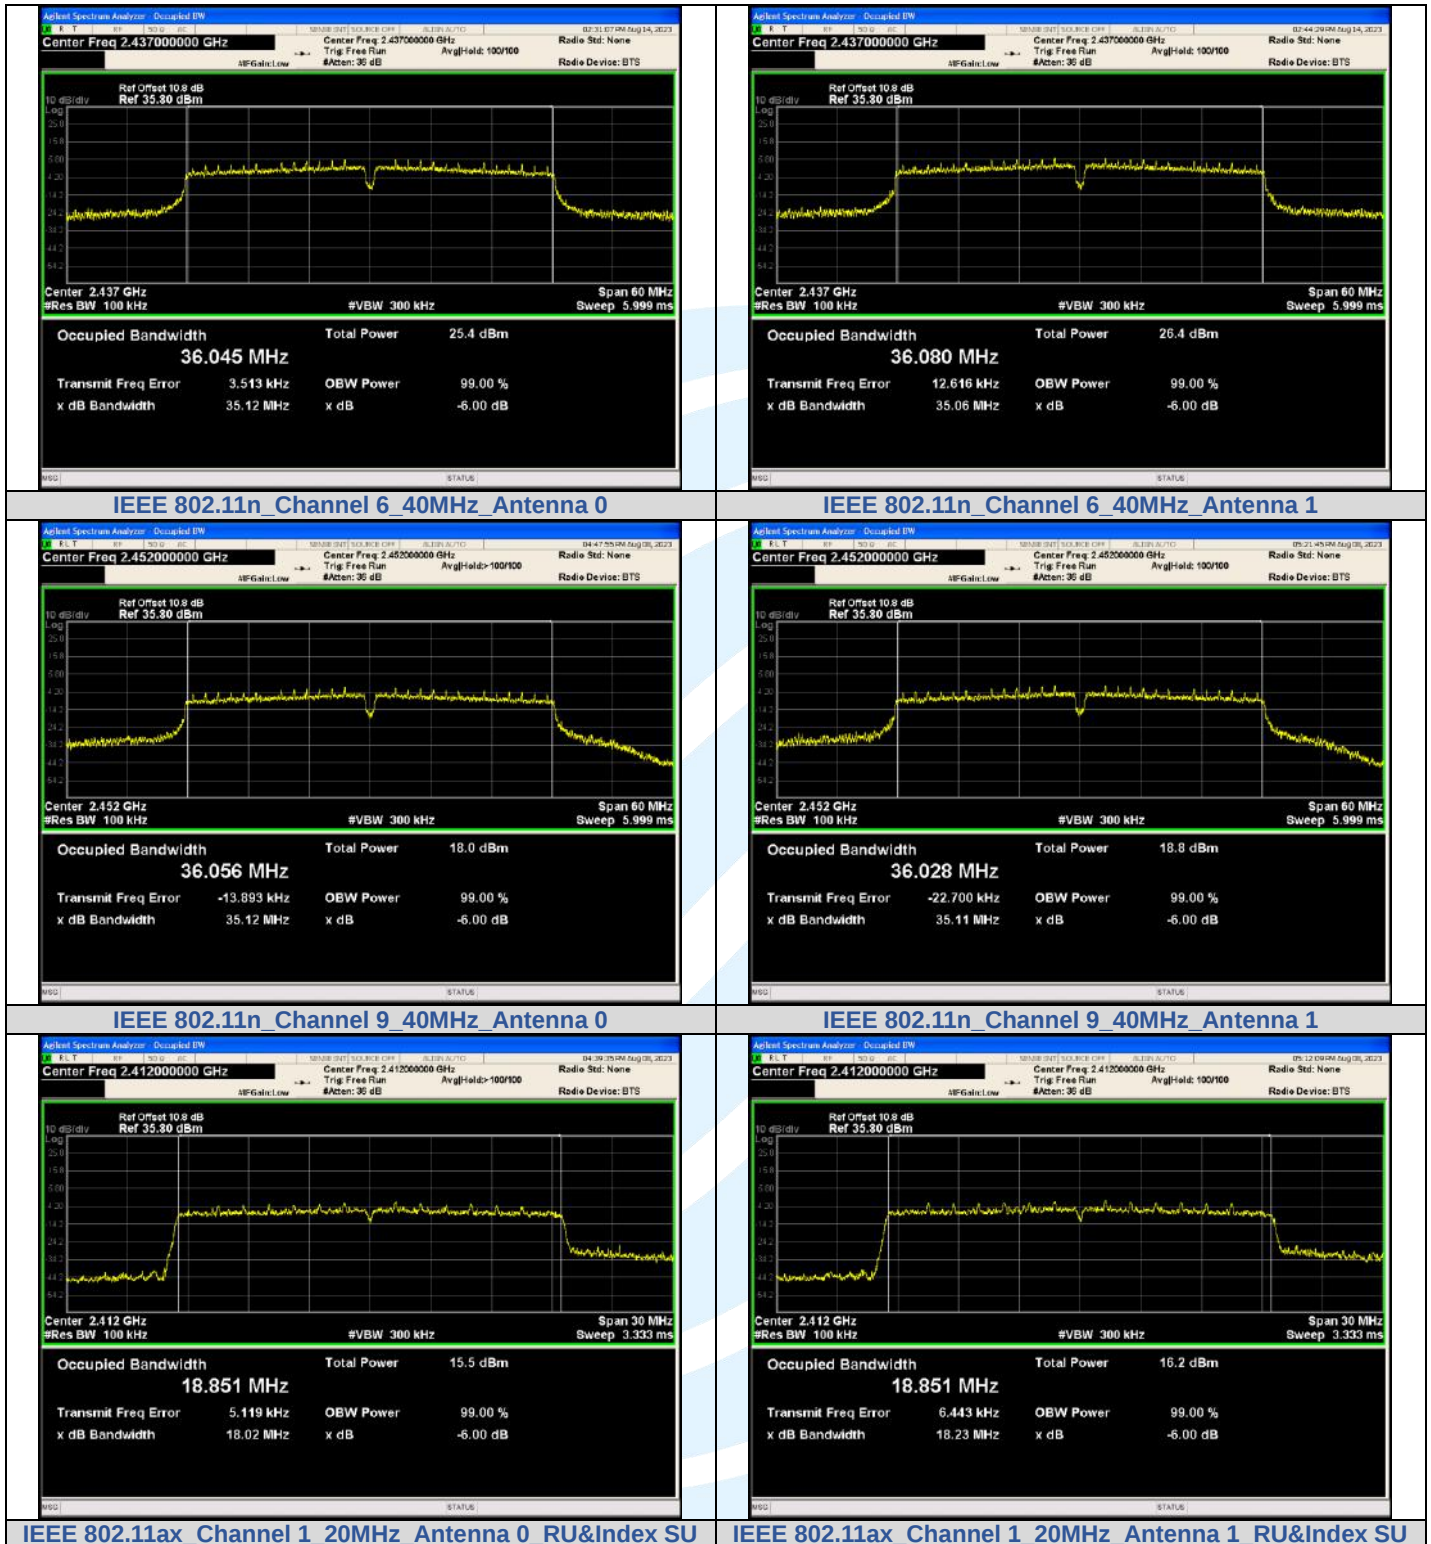

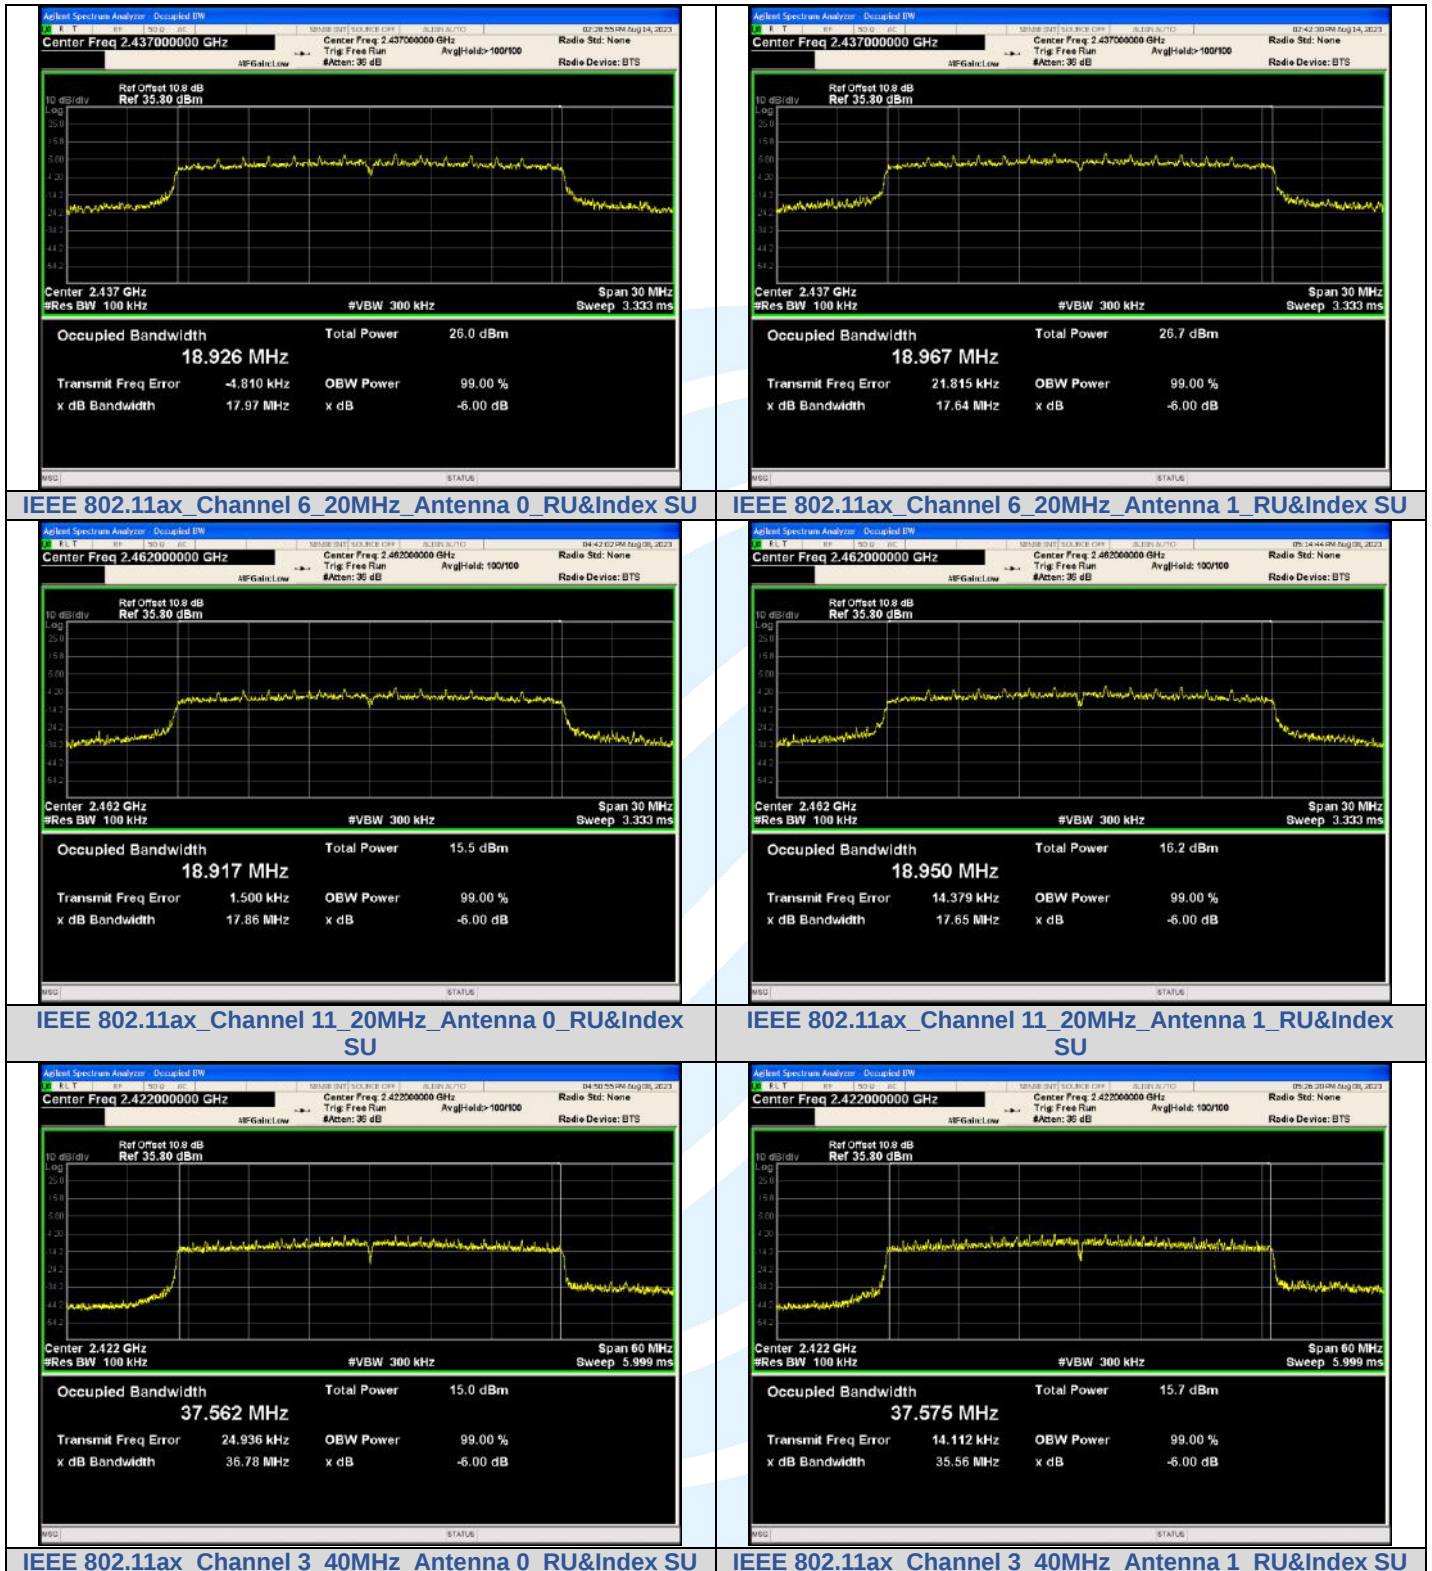

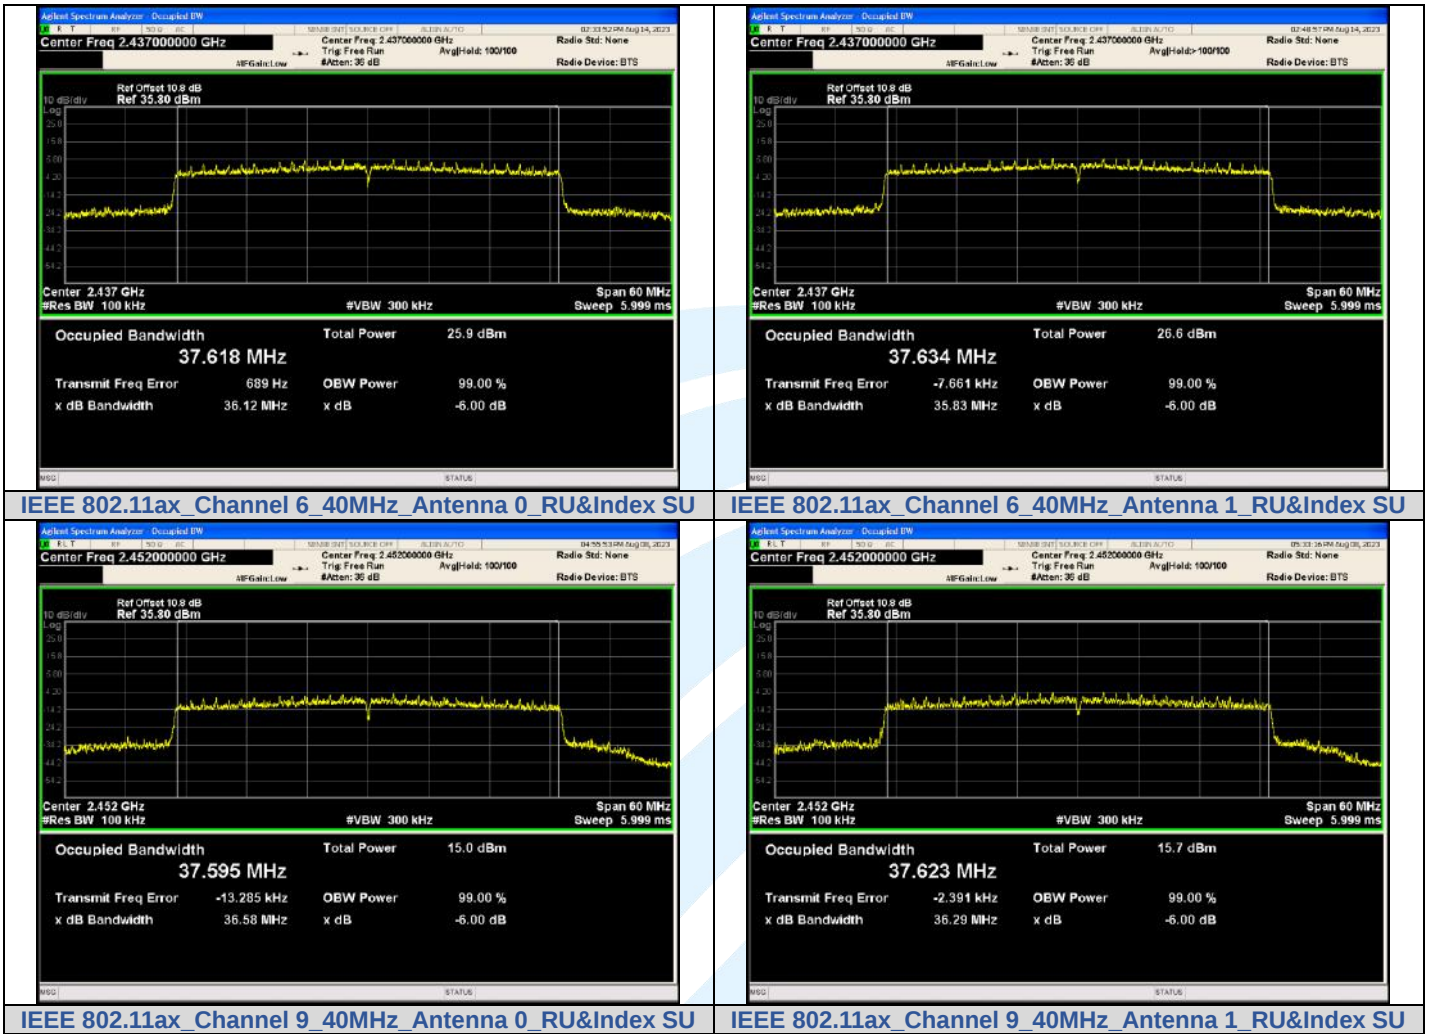

A.3 CONDUCTED OUT OF BAND EMISSION

Mode	Channel	RU & Index	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
IEEE 802.11b	1	N/A	0	2400.00	-32.620	-4.69	-28	PASS
				4823.74	-40.649	-4.69	-35.959	PASS
			1	2400.00	-32.752	-4.33	-28.422	PASS
				2398.53	-30.724	-4.33	-26.394	PASS
	6		0	4823.70	-39.488	-4.33	-35.158	PASS
			1	4874.30	-41.882	-4.68	-37.202	PASS
	11		1	4874.30	-40.940	-4.36	-36.580	PASS
			0	2483.50	-42.496	-4.79	-38	PASS
				24908.9	-44.044	-4.79	-39.254	PASS
			1	2483.50	-43.518	-4.32	-39	PASS
4924.24	-43.041			-4.32	-38.721	PASS		
IEEE 802.11g	1		0	2400.00	-33.597	-10.91	-23	PASS
				24228.4	-43.884	-10.91	-32.974	PASS
			1	2400.00	-34.558	-11.21	-23	PASS
				24708.5	-43.829	-11.21	-32.619	PASS
	6		0	24360.8	-42.765	-9.5	-33.265	PASS
			1	24235.3	-41.799	-8.81	-32.989	PASS
	11		0	2483.50	-41.479	-10.77	-31	PASS
				24867.0	-43.990	-10.77	-33.220	PASS
			1	2483.50	-42.918	-11.89	-31	PASS
				24342.6	-44.176	-11.89	-32.286	PASS
IEEE 802.11n_20	1		0	2400.00	-39.905	-16.83	-23.075	PASS
				2398.92	-38.234	-16.83	-21.404	PASS
			1	24770.3	-44.327	-16.83	-27.497	PASS
				2400.00	-37.939	-16.39	-22	PASS
	6		24337.7	-43.605	-16.39	-27.215	PASS	
			0	24988.8	-42.869	-11.15	-31.719	PASS
	1		24996.3	-42.748	-10.33	-32.418	PASS	
			11	0	2483.50	-42.946	-16.54	-26
	24958.2				-44.394	-16.54	-27.854	PASS
	1			2483.50	-41.998	-15.91	-26	PASS
24559.3				-43.935	-15.91	-28.025	PASS	
IEEE 802.11n_40	3		0	2400.00	-37.051	-20.92	-16	PASS
				24198.4	-44.074	-20.92	-23.154	PASS
			1	2400.00	-37.336	-20.14	-17	PASS
				24348.3	-43.591	-20.14	-23.451	PASS
	6		0	24307.1	-42.735	-14.26	-28.475	PASS
			1	24340.8	-43.185	-13.24	-29.945	PASS
	9		0	2483.50	-42.901	-20.84	-22	PASS
				24505.6	-44.316	-20.84	-23.476	PASS
		1	2483.50	-42.243	-20.12	-22	PASS	
			24571.8	-44.025	-20.12	-23.905	PASS	
IEEE 802.11ax_20	1	0	2400.00	-41.853	-20.73	-21.123	PASS	
			2386.83	-40.422	-20.73	-19.692	PASS	
		1	24169.7	-43.883	-20.73	-23.152	PASS	
			2400.00	-40.082	-20.56	-20	PASS	
	6	24467.5	-43.448	-20.56	-22.888	PASS		
		0	24883.3	-42.985	-10.81	-32.175	PASS	
	11	1	24204.7	-42.754	-10.5	-32.254	PASS	
			0	2483.50	-43.639	-20.48	-23	PASS
		1	24377.0	-43.729	-20.48	-23.249	PASS	
			2483.50	-41.799	-20.54	-21	PASS	
IEEE 802.11ax_40	3	0	24962.5	-44.197	-20.54	-23.657	PASS	
			2400.00	-39.429	-24.17	-15	PASS	
		1	24333.9	-43.543	-24.17	-19.373	PASS	
			2400.00	-37.774	-23.67	-14	PASS	
	6	24388.2	-43.849	-23.67	-20.179	PASS		
		0	24995.0	-42.199	-13.99	-28.209	PASS	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

	9	1	24320.2	-42.488	-13.27	-29.218	PASS
		0	2483.50	-43.608	-24.13	-19	PASS
			24871.4	-44.025	-24.13	-19.895	PASS
			2483.50	-43.158	-23.83	-19	PASS
		1	24987.5	-44.223	-23.83	-20.393	PASS

Test Graphs

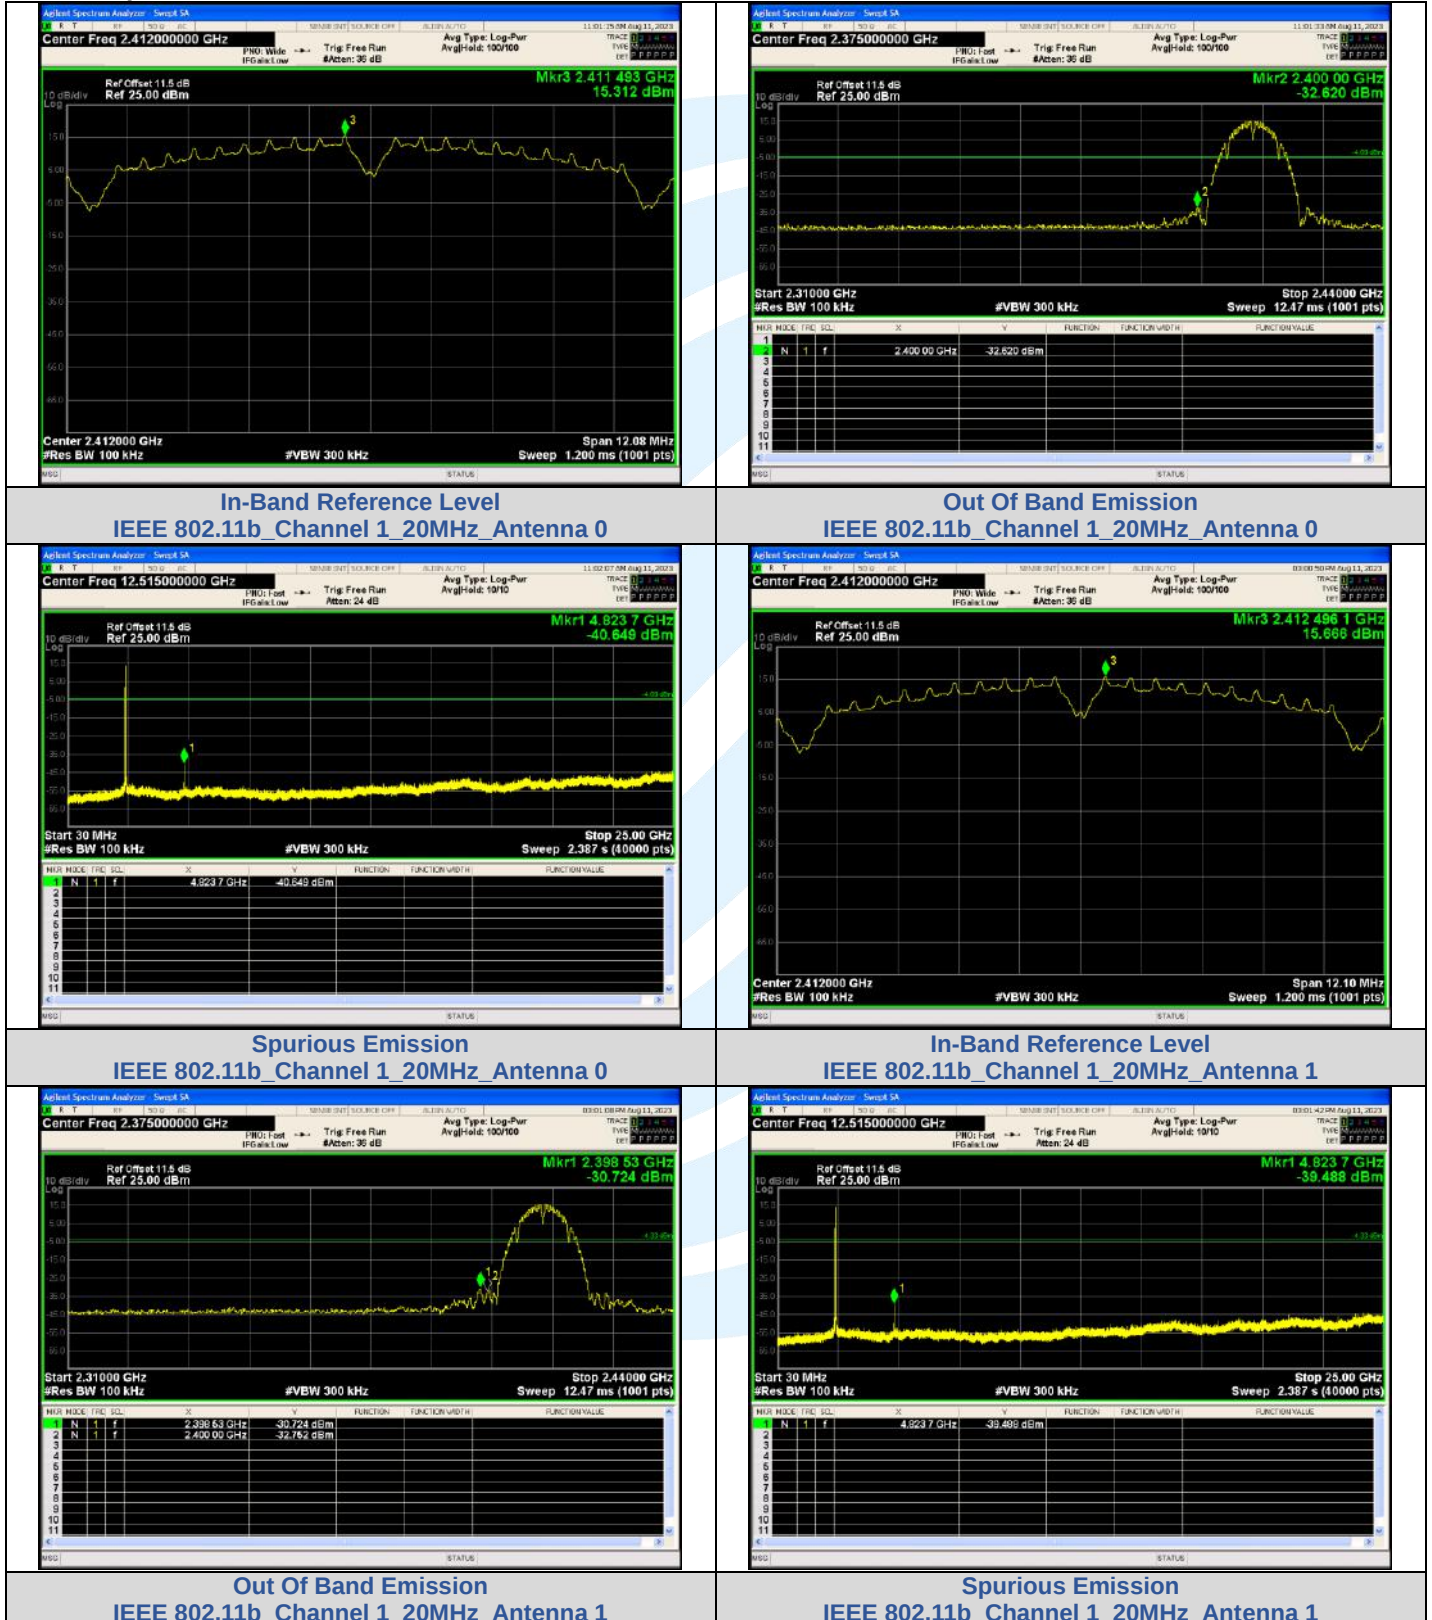

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.2

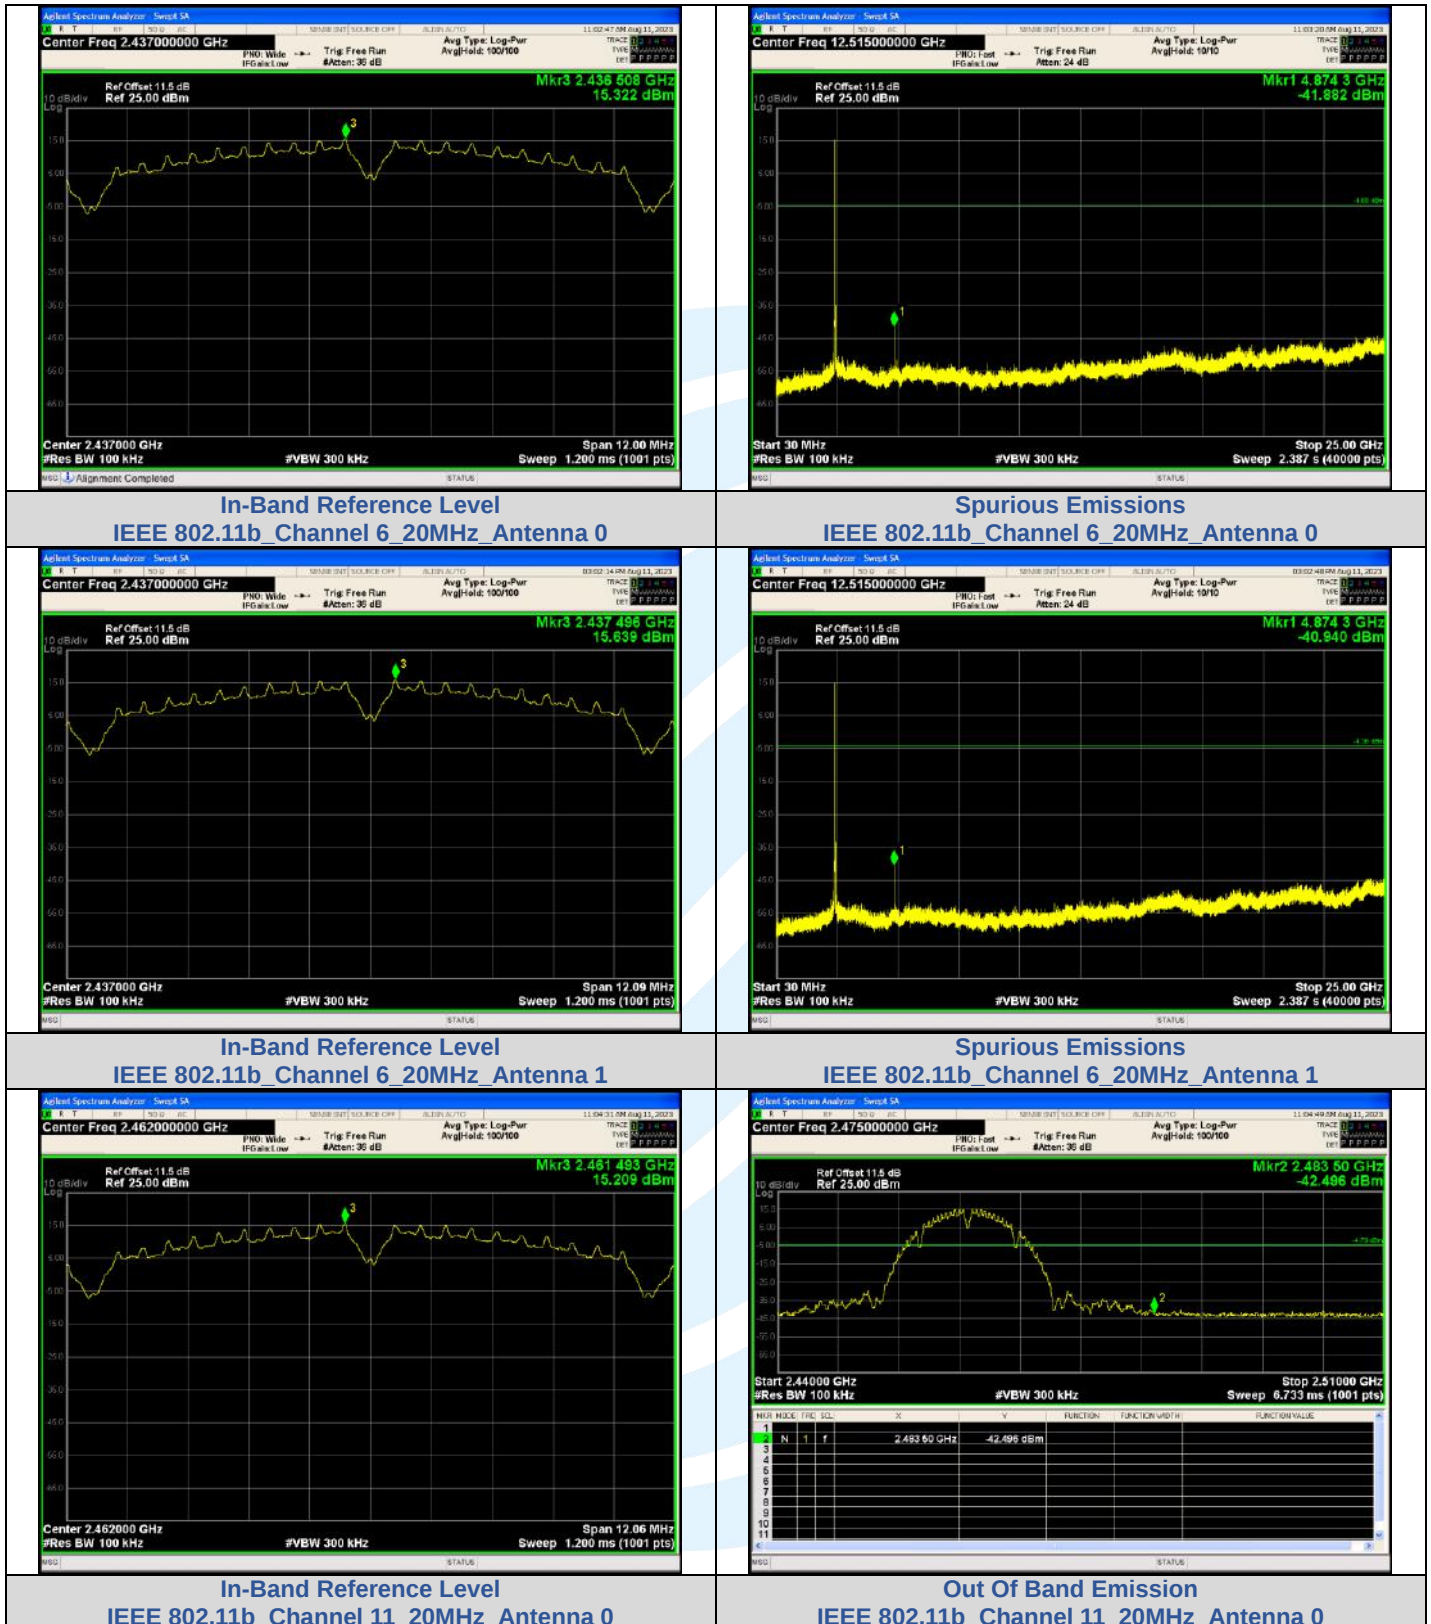


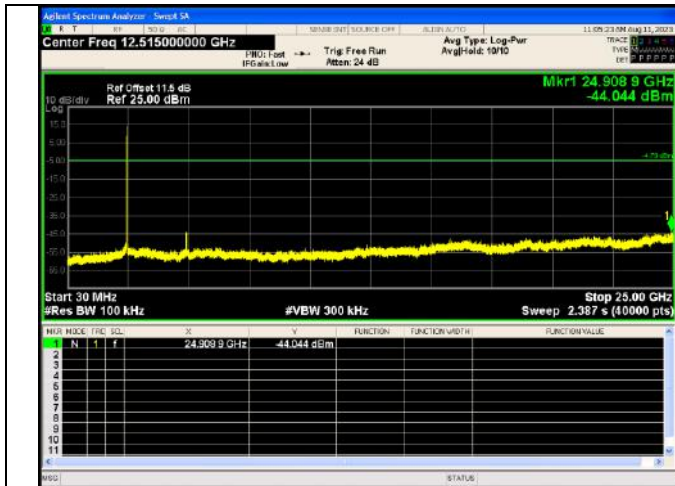


Spurious Emission
IEEE 802.11b Channel 11 20MHz Antenna 0




In-Band Reference Level
IEEE 802.11b Channel 11 20MHz Antenna 1

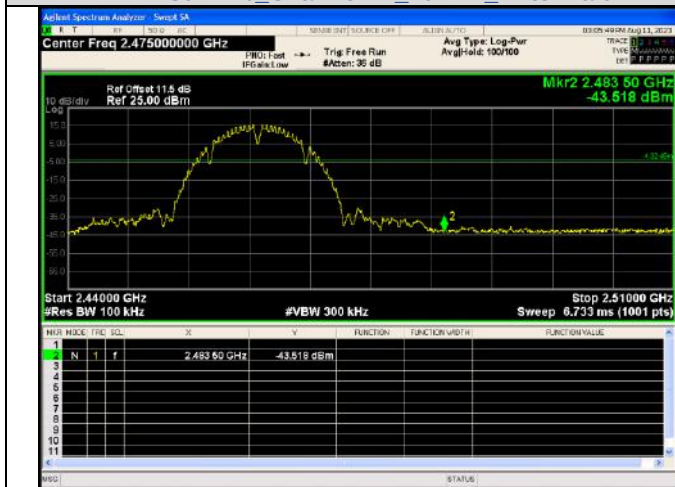


Out Of Band Emission
IEEE 802.11b Channel 11 20MHz Antenna 1

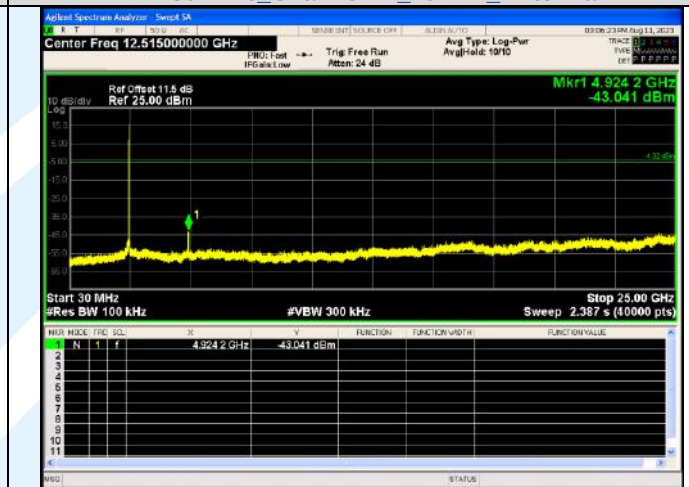


Spurious Emission
IEEE 802.11b Channel 11 20MHz Antenna 1

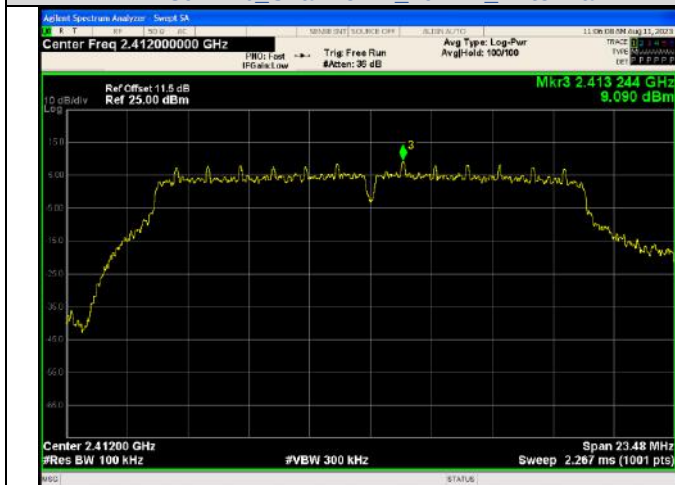


In-Band Reference Level
IEEE 802.11g Channel 1 20MHz Antenna 0

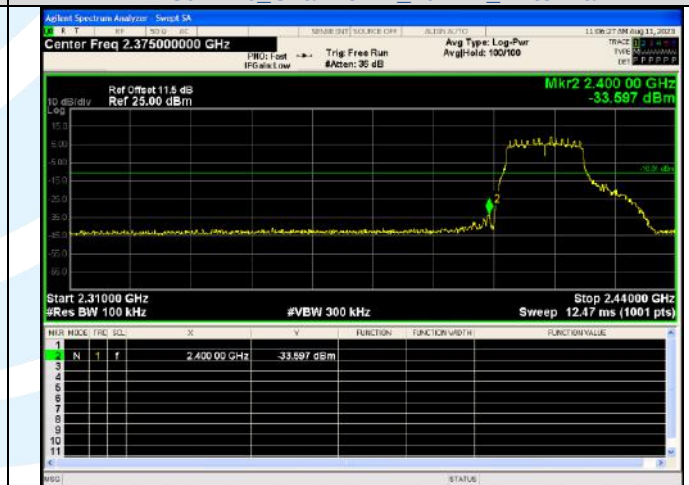


Out Of Band Emission
IEEE 802.11g Channel 1 20MHz Antenna 0

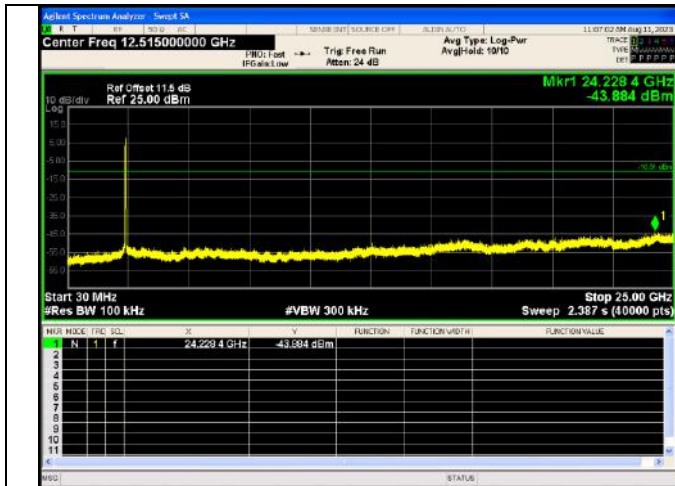


Spurious Emission
IEEE 802.11g Channel 1 20MHz Antenna 0

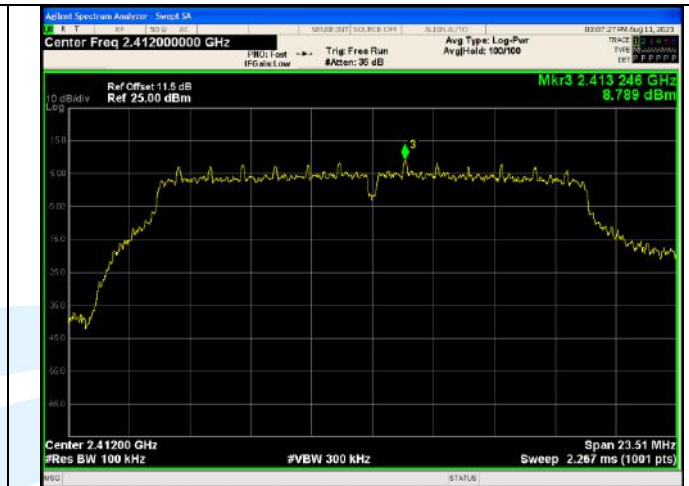


In-Band Reference Level
IEEE 802.11g Channel 1 20MHz Antenna 1

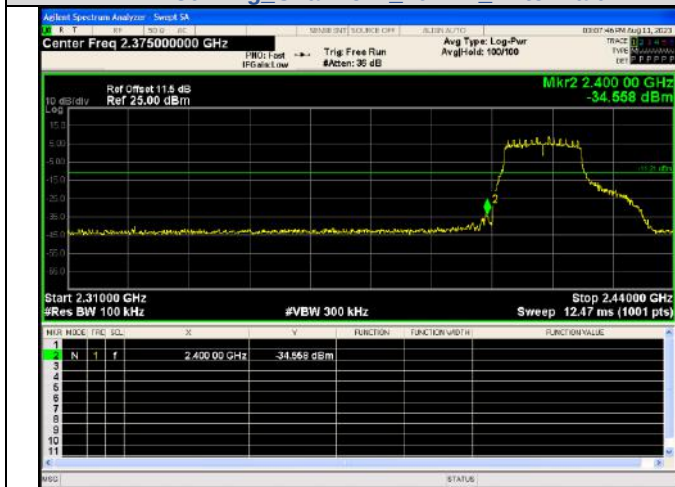


Out Of Band Emission
IEEE 802.11g Channel 1 20MHz Antenna 1

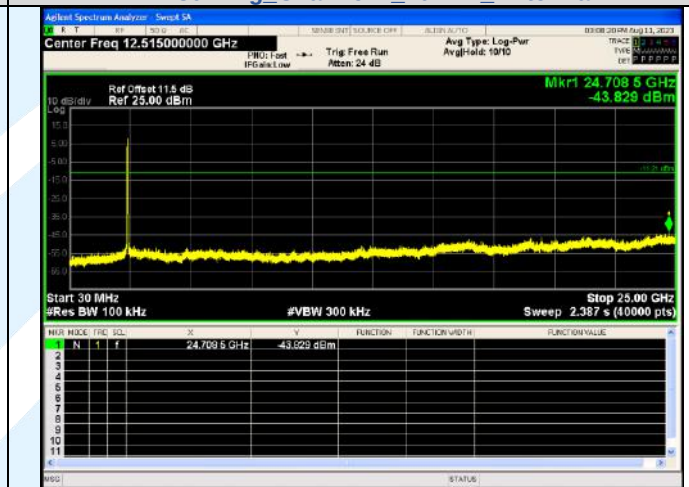


Spurious Emission
IEEE 802.11g Channel 1 20MHz Antenna 1

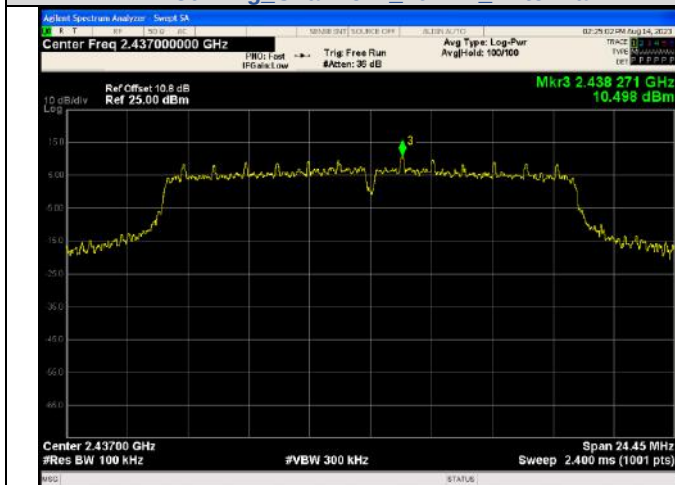


In-Band Reference Level
IEEE 802.11g Channel 6 20MHz Antenna 0

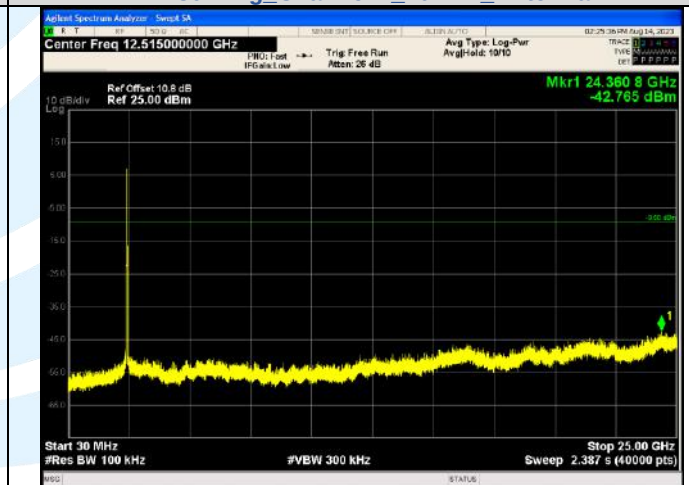

Spurious Emissions
IEEE 802.11g Channel 6 20MHz Antenna 0

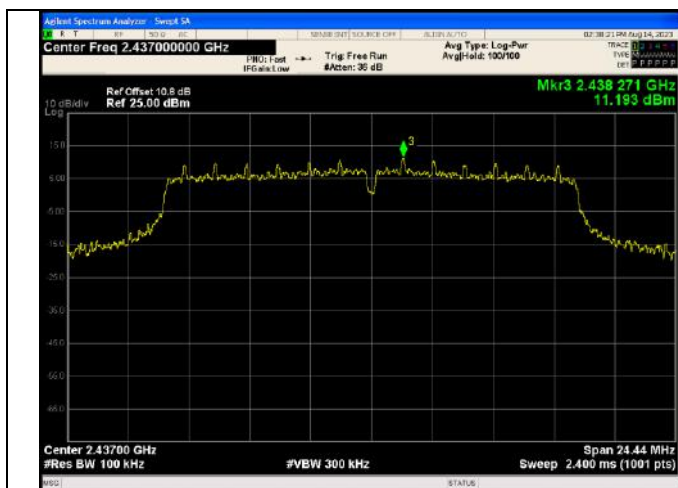

In-Band Reference Level
IEEE 802.11g Channel 6 20MHz Antenna 1

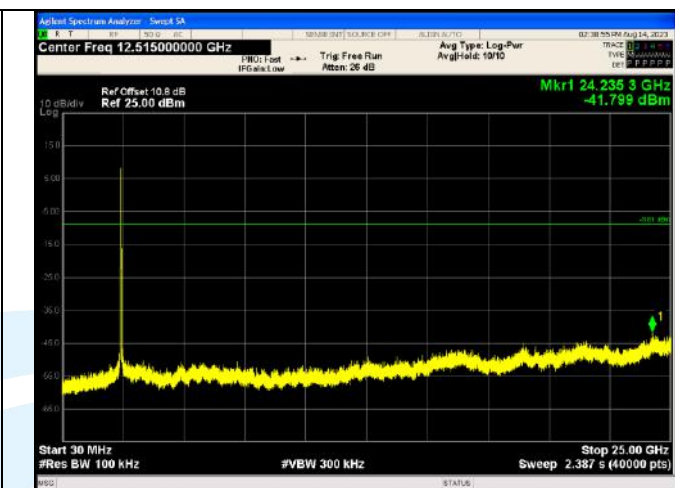


Spurious Emissions
IEEE 802.11g Channel 6 20MHz Antenna 1



In-Band Reference Level
IEEE 802.11g Channel 11 20MHz Antenna 0



Out Of Band Emission
IEEE 802.11g Channel 11 20MHz Antenna 0

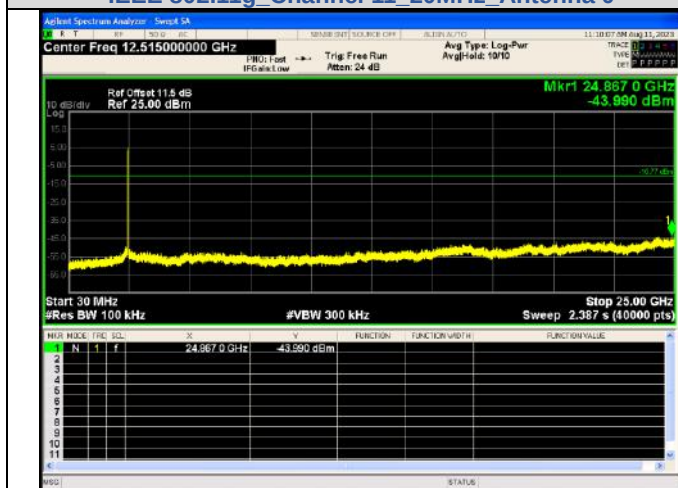


Spurious Emission
IEEE 802.11g Channel 11 20MHz Antenna 0



In-Band Reference Level
IEEE 802.11g Channel 11 20MHz Antenna 1




Out Of Band Emission
IEEE 802.11g Channel 11 20MHz Antenna 1

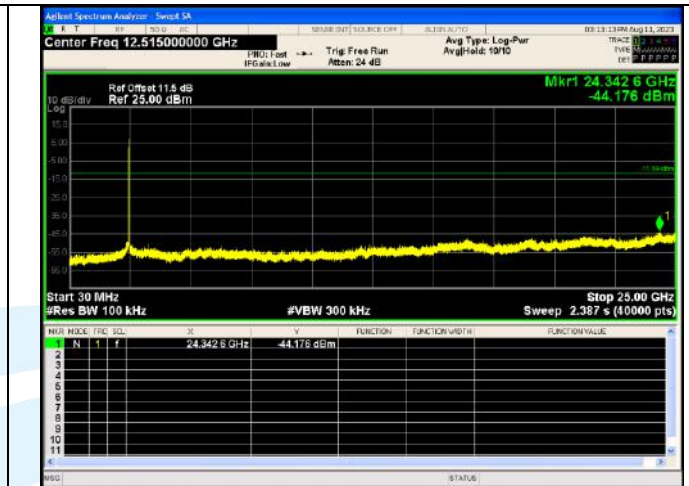


Spurious Emission
IEEE 802.11g Channel 11 20MHz Antenna 1



In-Band Reference Level
IEEE 802.11n Channel 1 20MHz Antenna 0

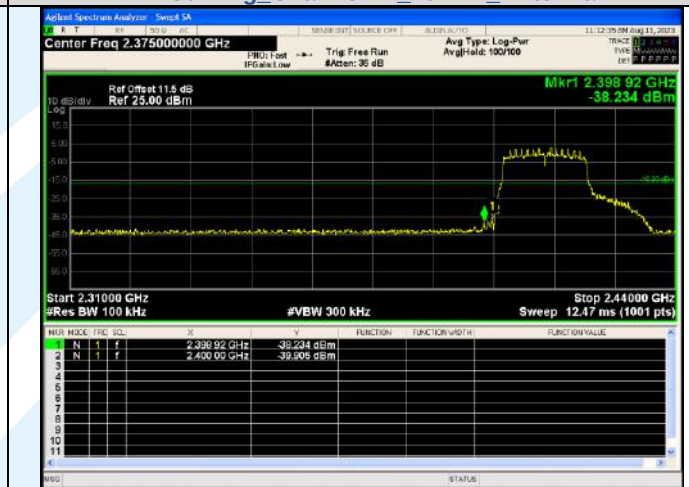


Out Of Band Emission
IEEE 802.11n Channel 1 20MHz Antenna 0

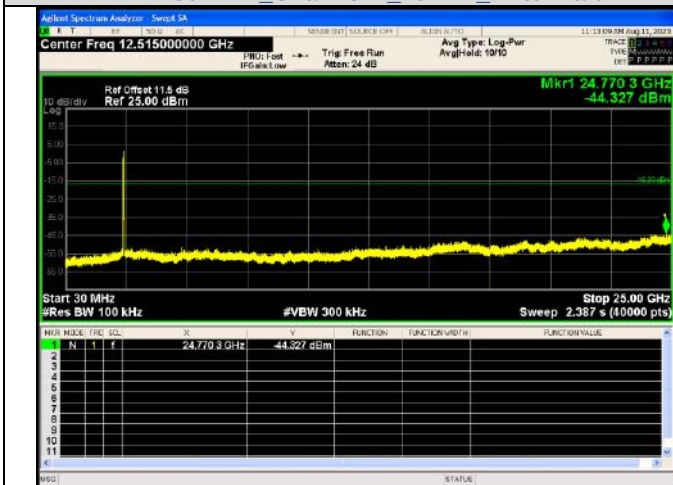


Spurious Emission
IEEE 802.11n Channel 1 20MHz Antenna 0




In-Band Reference Level
IEEE 802.11n Channel 1 20MHz Antenna 1

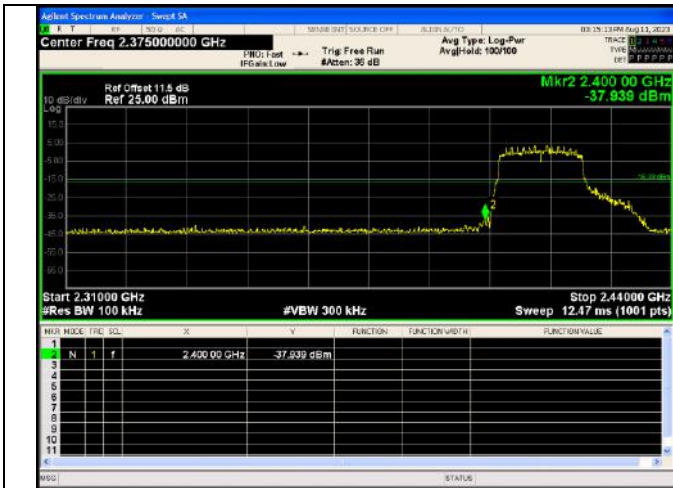


Out Of Band Emission
IEEE 802.11n Channel 1 20MHz Antenna 1

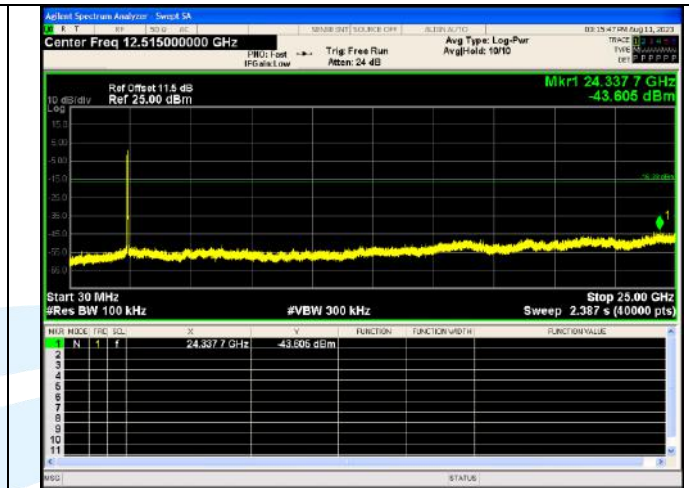


Spurious Emission
IEEE 802.11n Channel 1 20MHz Antenna 1

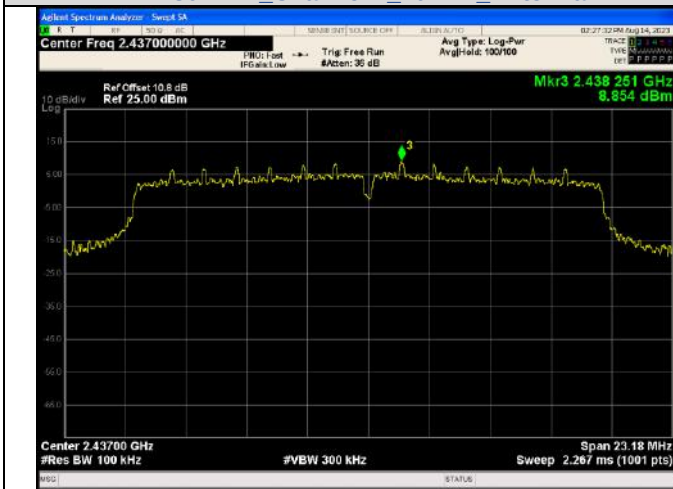


In-Band Reference Level
IEEE 802.11n Channel 6 20MHz Antenna 0

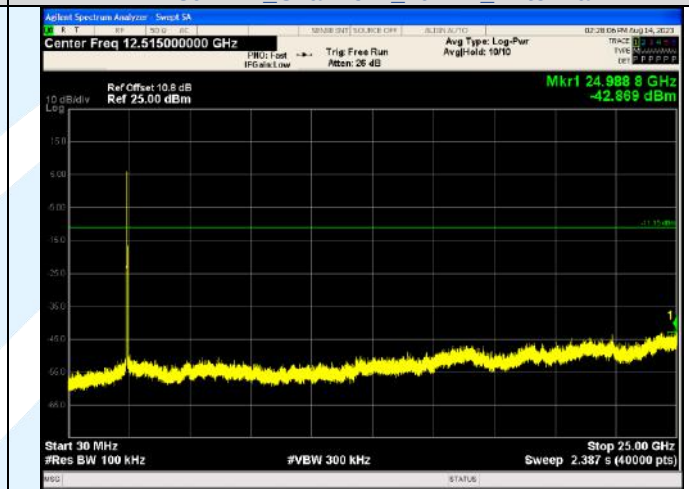

Spurious Emissions
IEEE 802.11n Channel 6 20MHz Antenna 0

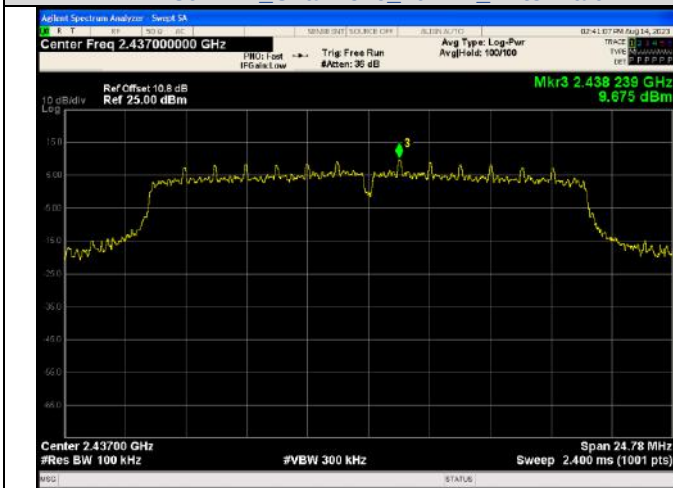

In-Band Reference Level
IEEE 802.11n Channel 6 20MHz Antenna 1

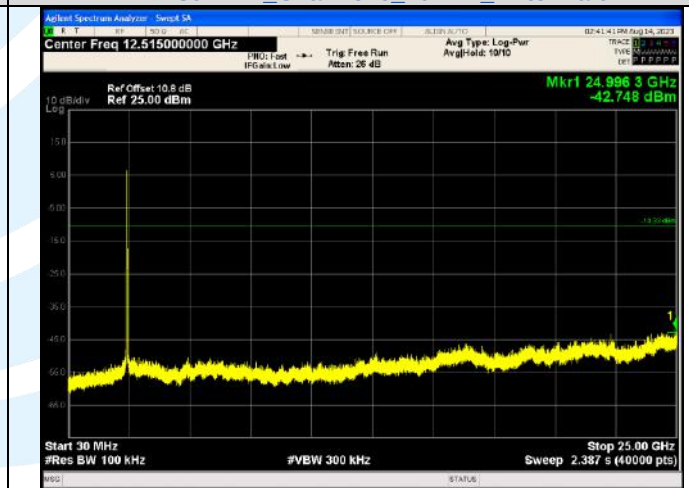


Spurious Emissions
IEEE 802.11n Channel 6 20MHz Antenna 1



In-Band Reference Level
IEEE 802.11n Channel 11 20MHz Antenna 0



Out Of Band Emission
IEEE 802.11n Channel 11 20MHz Antenna 0

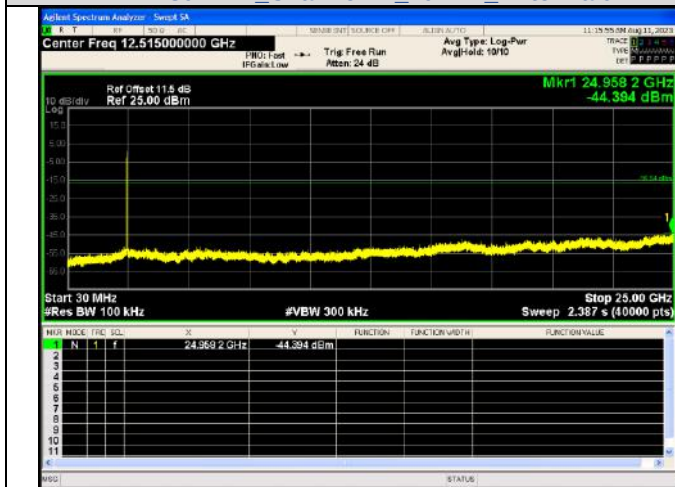


Spurious Emission
IEEE 802.11n Channel 11 20MHz Antenna 0



In-Band Reference Level
IEEE 802.11n Channel 11 20MHz Antenna 1




Out Of Band Emission
IEEE 802.11n Channel 11 20MHz Antenna 1

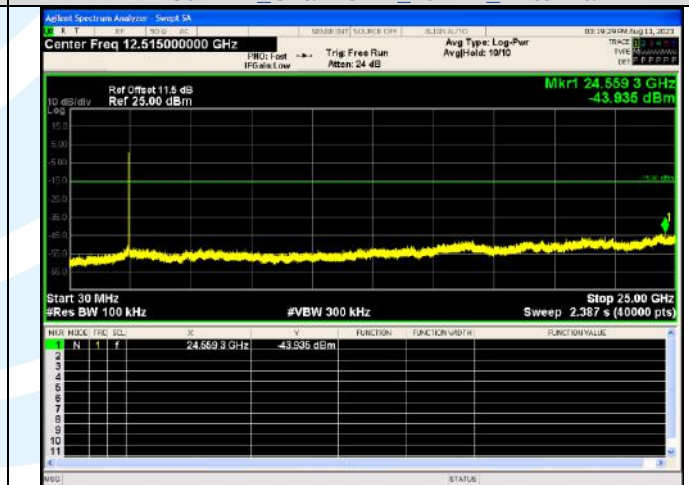


Spurious Emission
IEEE 802.11n Channel 11 20MHz Antenna 1



In-Band Reference Level
IEEE 802.11n Channel 3 40MHz Antenna 0

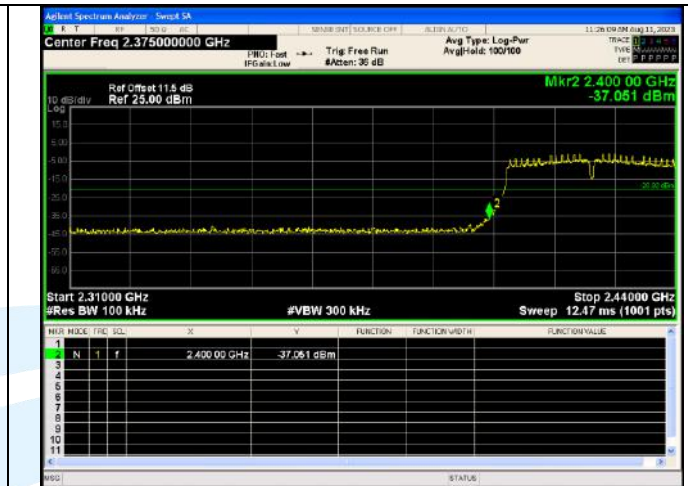


Out Of Band Emission
IEEE 802.11n Channel 3 40MHz Antenna 0

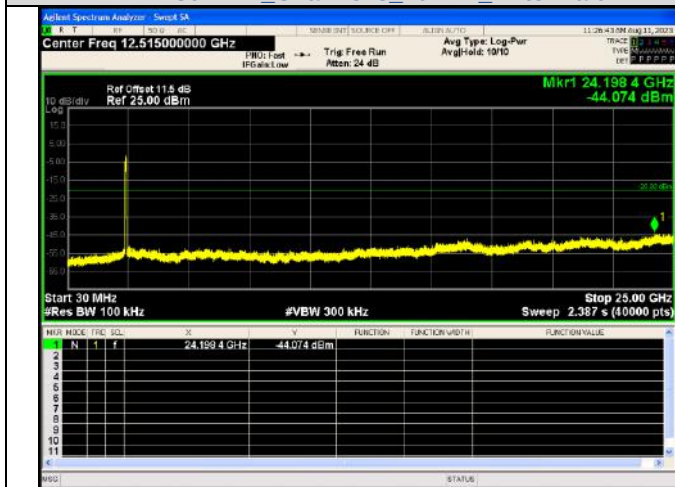


Spurious Emission
IEEE 802.11n Channel 3 40MHz Antenna 0



In-Band Reference Level
IEEE 802.11n Channel 3 40MHz Antenna 1

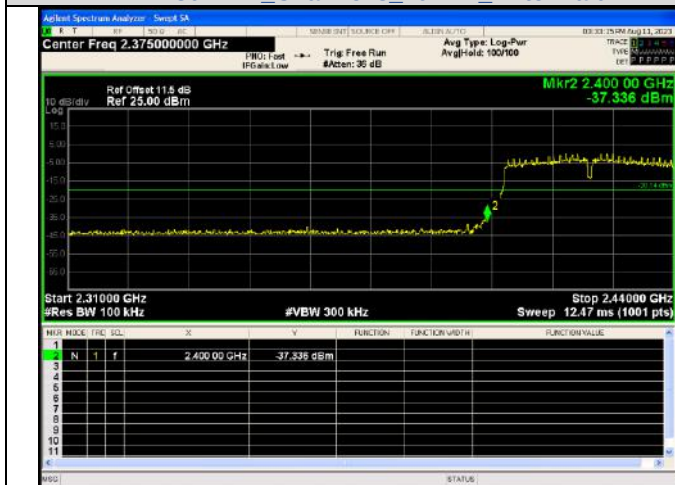

Out Of Band Emission
IEEE 802.11n Channel 3 40MHz Antenna 1

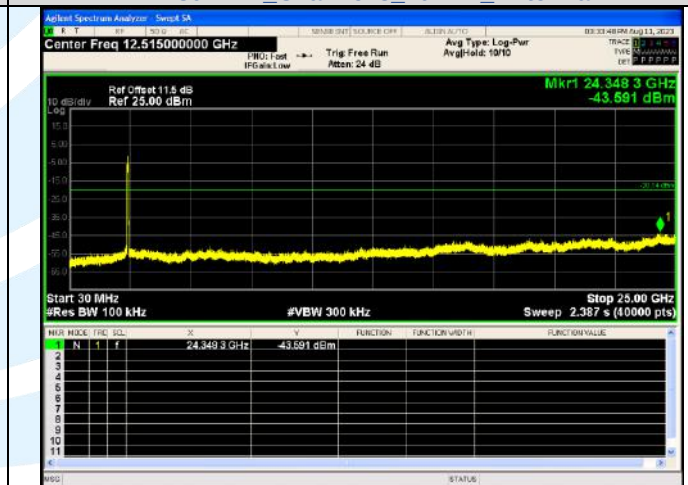

Spurious Emission
IEEE 802.11n Channel 3 40MHz Antenna 1