

EMI TEST REPORT

On Model Name: IP Camera

Model Number: GXV3674_HD_VF v2,
GXV3674_FHD_VF v2

Brand Name: Grandstream

Prepared for Grandstream Networks, Inc.

FCC ID Number: YZZGXV3674-FHDV2

According to FCC 47 CFR Part 15, Subpart B

Test Report #: SHE-1411-11258-FCC

Tested by: Daomen Galanz
Daomen /Engineer Company Name

Reviewed by: Jawen Yin ECMG
Jawen Yin / Senior Engineer Company Name

QC Manager: Swall Zhang ECMG
Swall Zhang /QC Manager Company Name

Test Report Released by: Swall Zhang November 6th, 2014
Swall Zhang Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

<i>Test Site Location</i>	<i>: Galanz</i>
	<i>25 South Ronggui Rd., Shunde, Foshan, Guangdong, China</i>
<i>Tel</i>	<i>: (86)-757-23612785</i>
<i>Fax</i>	<i>: (86)-757-23612537</i>

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

- CNAL - LAB Code: L2244**

Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- FCC - Registration No.: 580210**

Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

- IC - Registration No.: 8801A**

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 8801A.

Table of Contents

GOVERNMENT DISCLAIMER NOTICE	2
REPRODUCTION CLAUSE	2
OPINIONS AND INTERPRETATIONS	2
STATEMENT OF MEASUREMENT UNCERTAINTY	2
ADMINISTRATIVE DATA	3
EUT DESCRIPTION	4
EUT MODEL DERIVED	5
TEST SUMMARY	6
TEST MODE JUSTIFICATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATION	7
EUT SAMPLE PHOTOS	8
TEST SYSTEM DETAILS	14
CONFIGURATION OF TESTED SYSTEM	16
ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS	17
ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT	23

List Attached Files

Exhibit Type	File Description	File Name
<i>Test Report</i>	<i>Test Report</i>	YZZGXV3674-FHDV2 _Test Report.pdf
<i>Operation Description</i>	<i>Technical Description</i>	YZZGXV3674-FHDV2 _Operation description.pdf
<i>External Photos</i>	<i>External Photos</i>	YZZGXV3674-FHDV2 _External Photos
<i>Internal Photos</i>	<i>Internal Photos</i>	YZZGXV3674-FHDV2 _Internal Photos
<i>Block Diagram</i>	<i>Block Diagram</i>	YZZGXV3674-FHDV2 _Block Diagram.pdf
<i>Schematics</i>	<i>Circuit Diagram</i>	YZZGXV3674-FHDV2 _Schematics.pdf
<i>ID Label/Location</i>	<i>Label and Location</i>	YZZGXV3674-FHDV2 _Label & Location.pdf
<i>User Manual</i>	<i>User Manual</i>	YZZGXV3674-FHDV2 _User Manual.pdf
<i>Test setup photos</i>	<i>Test set-up photos</i>	YZZGXV3674-FHDV2 _Test Set-up Photos

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : IP Camera

Model Numbers : GXV3674_HD_VF v2,
GXV3674_FHD_VF v2

Model Tested : GXV3674_FHD_VF v2

Date of Received : November 3rd, 2014

Date Tested : November 4th, 2014

Applicant : Grandstream Networks, Inc.

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Manufacturer : Grandstream Networks, Inc.

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Factory : Grandstream Networks, Inc.

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

EUT Description

Grandstream Networks, Inc. Model Tested GXV3674_FHD_VF v2 (referred to as the EUT in this report) is an IP Camera.

Technical specifications are as belows:

Parameter		Ranges
<i>Basic parameters</i>	<i>Rated voltage</i>	12V
	<i>Rated Current</i>	1A
<i>I/O Ports</i>	<i>Network Port</i>	<i>RJ-45 Ethernet cable to power over Ethernet (POE)switch</i>
	<i>Power Jack</i>	<i>12V DC power port; UL Certified</i>
<i>Power Adapter #1</i>	<i>Input</i>	<i>100-240VAC 50/60Hz 0.3A</i>
	<i>Output</i>	<i>12VDC, 1.0A</i>
	<i>Model</i>	<i>SEF1200100A1BB</i>
	<i>Brand name</i>	<i>Mass power</i>
<i>Power Adapter #2</i>	<i>Input</i>	<i>100-240VAC 50/60Hz 0.3A</i>
	<i>Output</i>	<i>12VDC, 1.0A</i>
	<i>Model</i>	<i>WEF1200100A1BA</i>
	<i>Brand name</i>	<i>Mass power</i>

Note :For other informations &features please refer to user's manual of EUT.

EUT Model Derived

Models of GXV3674_HD_VF v2 and GXV3674_FHD_VF v2 are series product. Differences between them are as belows:

GXV3674_HD_VF v2 is HD digital which uses the DSP of DM365-300 and the Sensor of AR0130. GXV3674_FHD_VF v2 is Full HD digital which uses the DSP of DM368-432 and the Sensor of AR0331. The others are the same.

The worst-case model GXV3674_FHD_VF v2 was selected for the final testing.

Frequency Range Of Radiated Measurements

(b) For unintentional radiators:

(1) Except as otherwise indicated in paragraphs (b)(2) or (b)(3) of this section, for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

<i>Highest frequency generated or used in the device or on which the device operates or tunes (MHz)</i>	<i>Upper frequency of measurement range (MHz)</i>
<i>Below 1.705</i>	<i>30.</i>
<i>1.705-108</i>	<i>1000.</i>
<i>108-500</i>	<i>2000.</i>
<i>500-1000</i>	<i>5000.</i>
<i>Above 1000</i>	<i>5th harmonic of the highest frequency or 40 GHz, whichever is lower.</i>

Note: Since the highest frequency operated of the EUT is 420MHz, so upper frequency of radiated emission test is up to 2GHz as per §15.33(b)(1).

Test Summary

The Electromagnetic Compatibility requirements on model GXV3674_FHD_VF v2 for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 15.107 ANSI C63.4 -2009	Conducted Emission	Passed	AC Input Port	Attachment 1
FCC Part 15.109 ANSI C63.4 -2009	Radiated Emission	Passed	Enclosure	Attachment 2

Test Mode Justification

Pre-Scan has been conducted to determine the worst-case from all possible combination between available operation mode .Following mode(s) was (were) selected for the final test as listed below:

<i>Pre-Test Mode</i>	
<i>EMI Test Mode</i>	<i>Mode 1: Communication with PC +Power Adapter #1 (Model: SEF1200100A1BB)</i>
	<i>Mode 2: Communication with PC +Power Adapter #2 (Model: WEF1200100A1BA)</i>
	<i>Mode 3: PoE mode</i>
<i>Final Test Mode</i>	
<i>EMI Test Mode</i>	<i>Mode 1: Communication with PC +Power Adapter #1 (Model: SEF1200100A1BB)</i>
	<i>Mode 2: Communication with PC +Power Adapter #2 (Model: WEF1200100A1BA)</i>
	<i>Mode 3: PoE mode</i>
<i>EMS Test Mode</i>	<i>Not Applicable</i>

EUT Exercise Software

No test software support this test.

Equipment Modification

Any modifications installed previous to testing by Grandstream Networks, Inc. will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen).

EUT Sample Photos


EUT Model: GXV3674_FHD_VF v2




EUT- Front&Left Side View




EUT- Rear&Right Side View

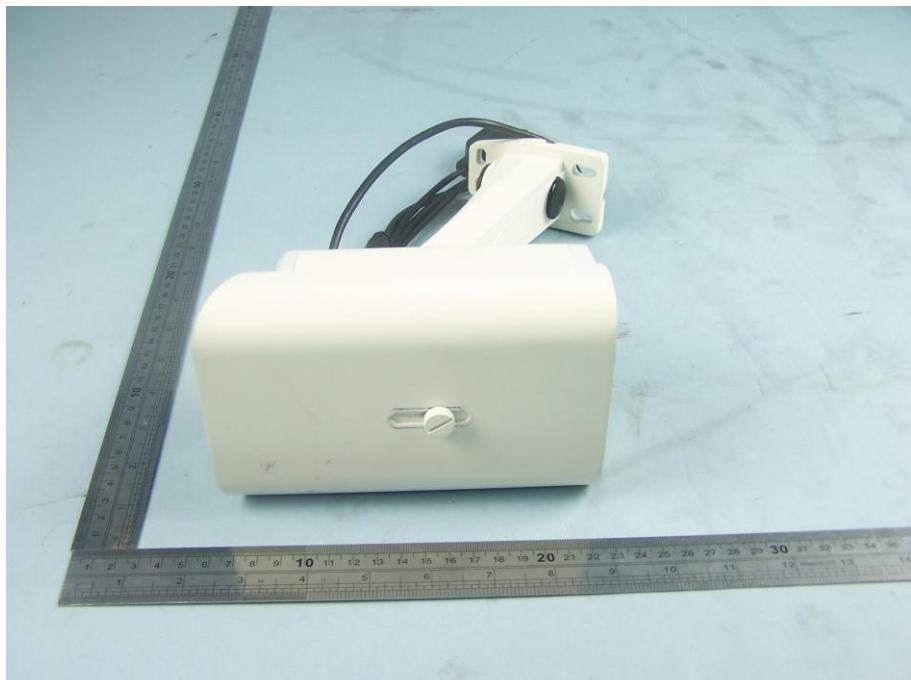


EUT- Top View

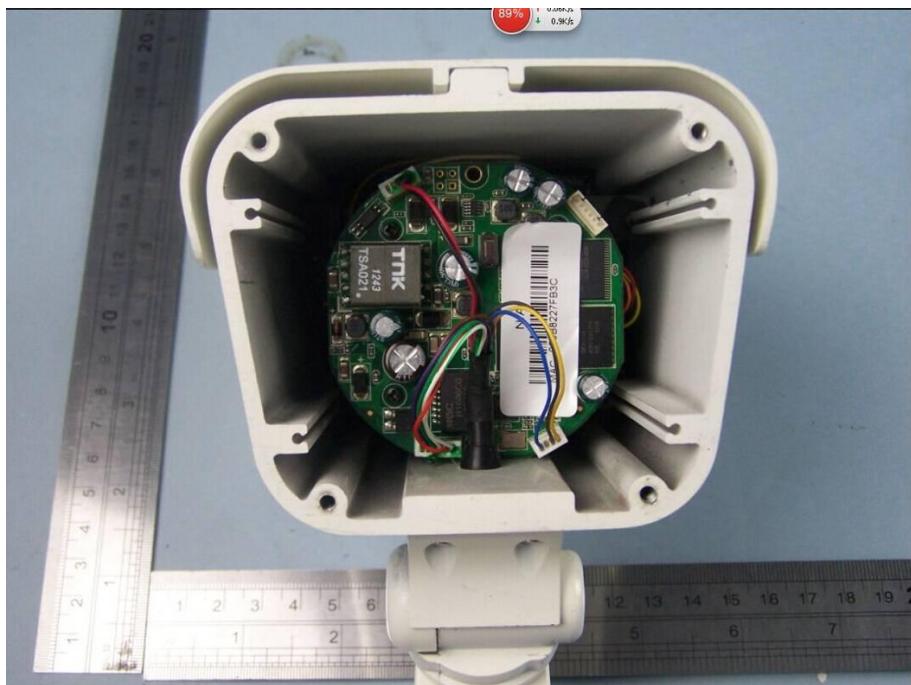


EUT-Uncovered View

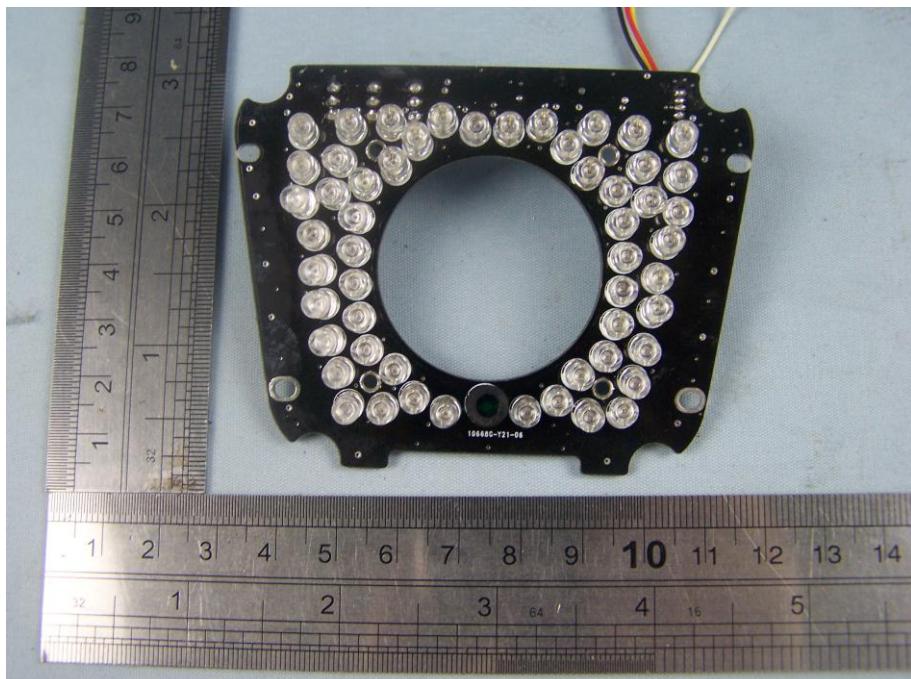


LED board- Top View

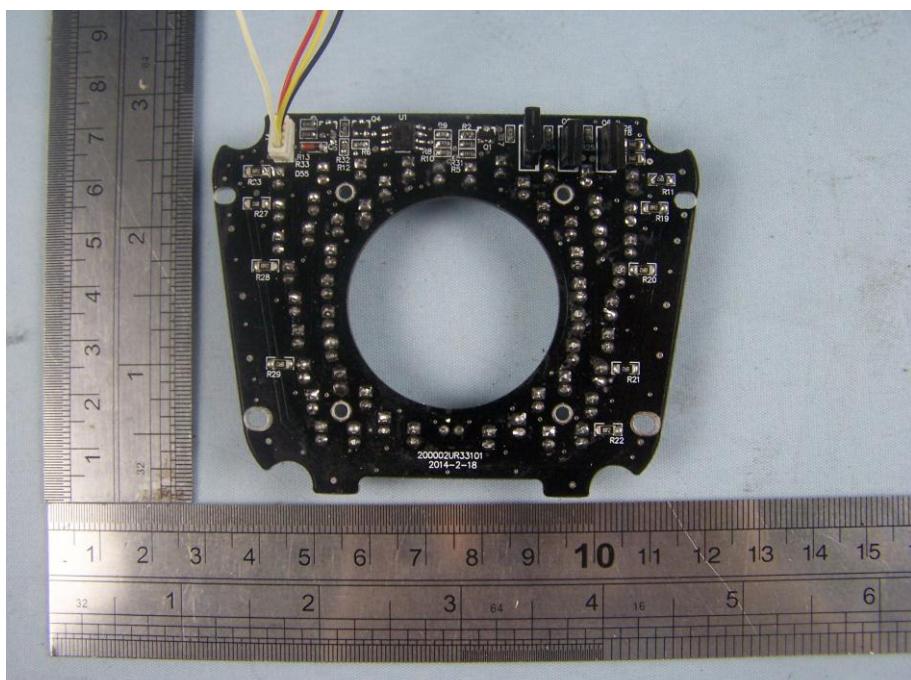


LED board- Bottom View

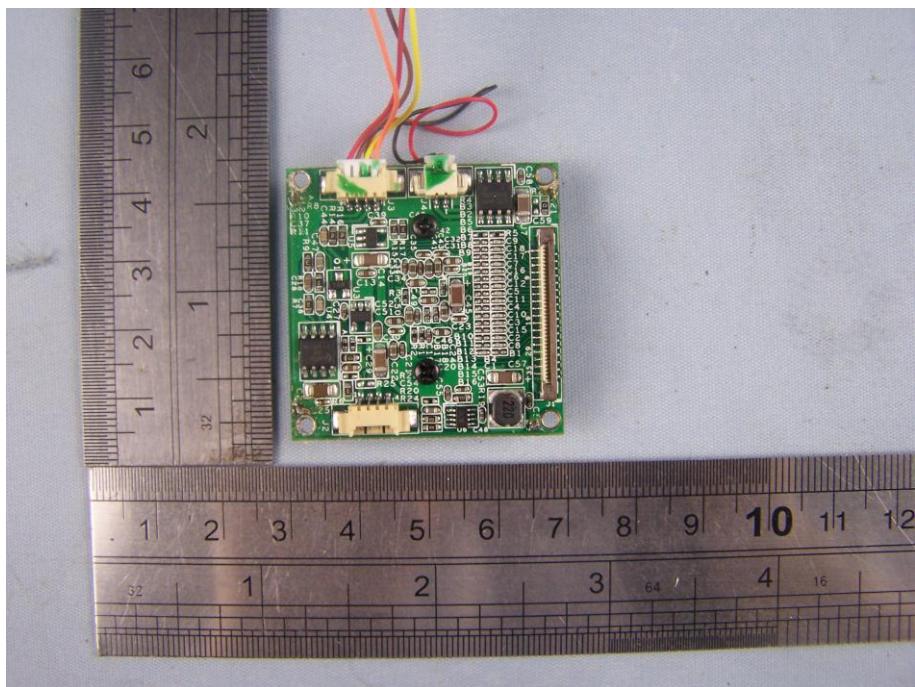


Sensor board - Top View

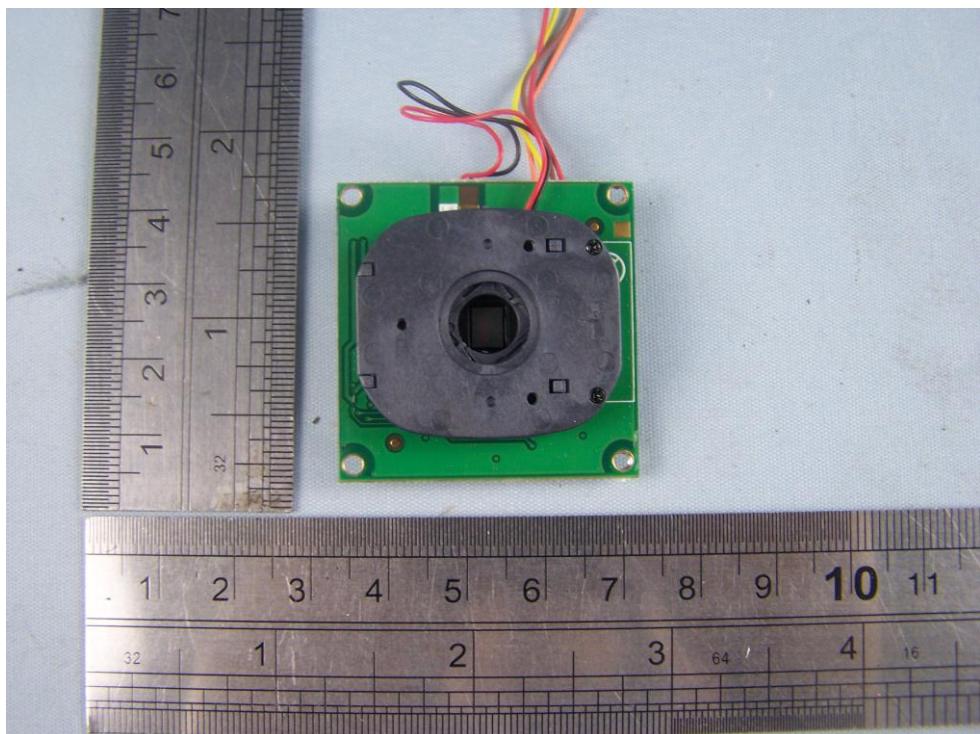

Sensor board - Bottom View

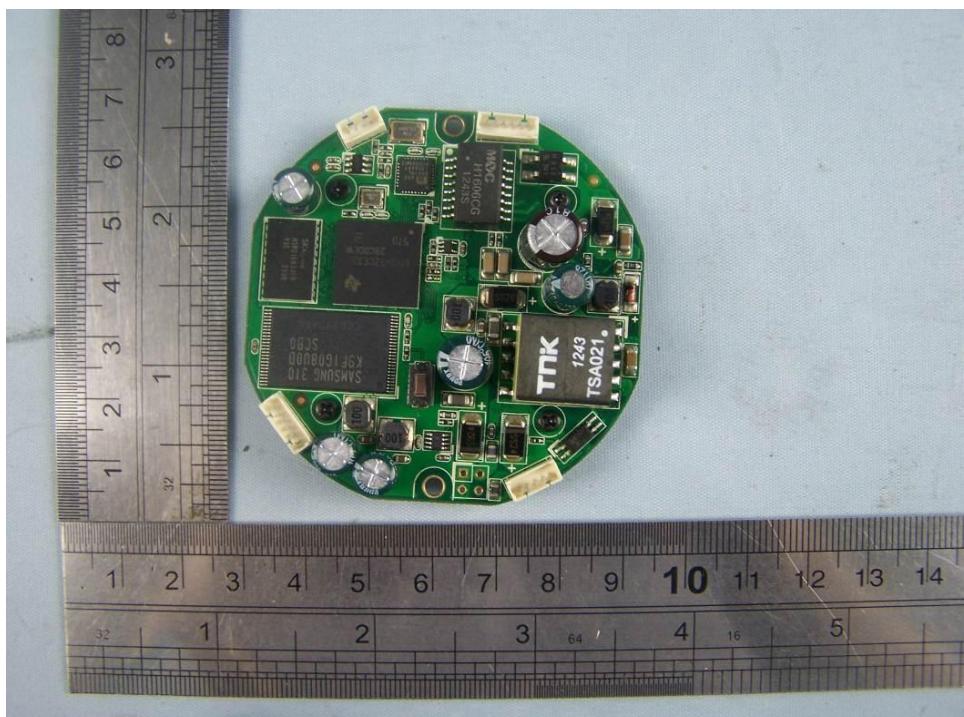

Main board- Top View

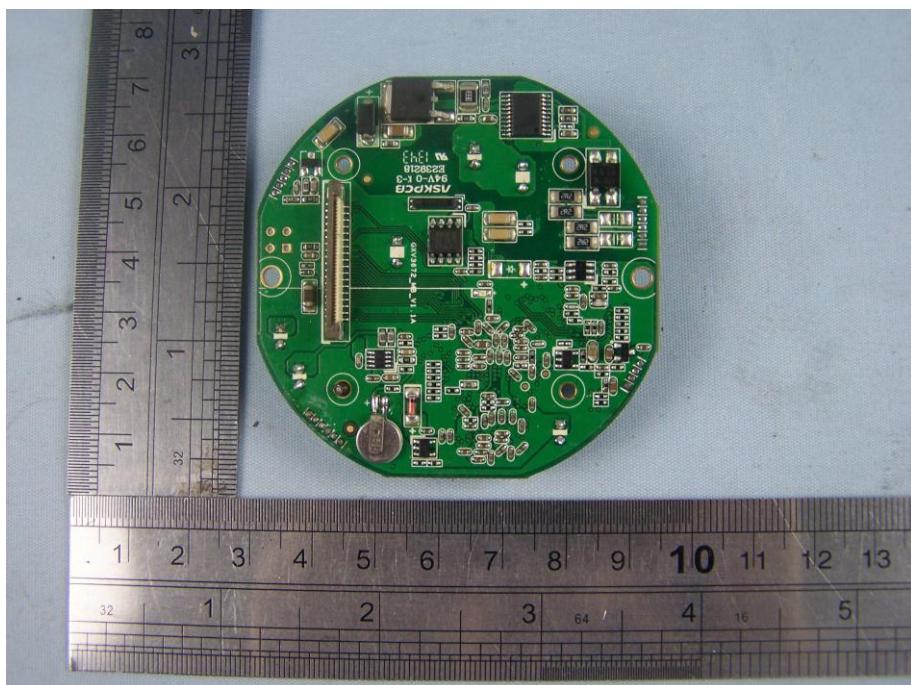

Main board- Bottom View



Power Adapter View #1 (Mass Power :SEF1200100A1BB)



Power Adapter View #2 (Mass Power: WEF1200100A1BA)

Test System Details


EUT			
Model Number:	<i>GXV3674_HD_VF v2, GXV3674_FHD_VF v2</i>		
Model Tested:	<i>GXV3674_FHD_VF v2</i>		
Description:	<i>IP Camera</i>		
Input:	<i>AC 120V/60Hz</i>		
Manufacturer:	<i>Grandstream Networks, Inc.</i>		
Support Equipment			
Description	Model Number	Serial Number	Manufacturer
<i>Notebook COMPUTER</i>	<i>ThinkPad Edge E40</i>	<i>TYPE0578-MDC</i>	<i>Lenovo</i>
<i>Mouse</i>	<i>MO32B0</i>	<i>23-033131</i>	<i>IBM</i>
<i>Keyboard</i>	<i>SK-1788</i>	<i>---</i>	<i>LENOVO</i>
<i>Monitor</i>	<i>TFT1780PS</i>	<i>---</i>	<i>AOC</i>

<i>Cable Description</i>					
<i>Description</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
<i>Power Adapter Cord Of Notebook Computer</i>	<i>Power Adapter</i>	<i>Notebook COMPUTER</i>	1.6	N	Y
	<i>AC Plug</i>	<i>Power Adapter</i>	1.2	N	Y
<i>Mouse Cord</i>	<i>Mouse</i>	<i>Notebook COMPUTER</i>	1.2	N	Y
<i>Keyboard Cord</i>	<i>Keyboard</i>	<i>Notebook COMPUTER</i>	1.2	N	Y
<i>RJ-45 Cord</i>	<i>EUT</i>	<i>Notebook COMPUTER</i>	1.5	N	Y
<i>Power Adapter Cord Of EUT</i>	<i>EUT</i>	<i>Plug</i>	1.8	N	N

Note: The "EUT" means "IP Camera".

NOTE: The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.


Configuration of Tested System

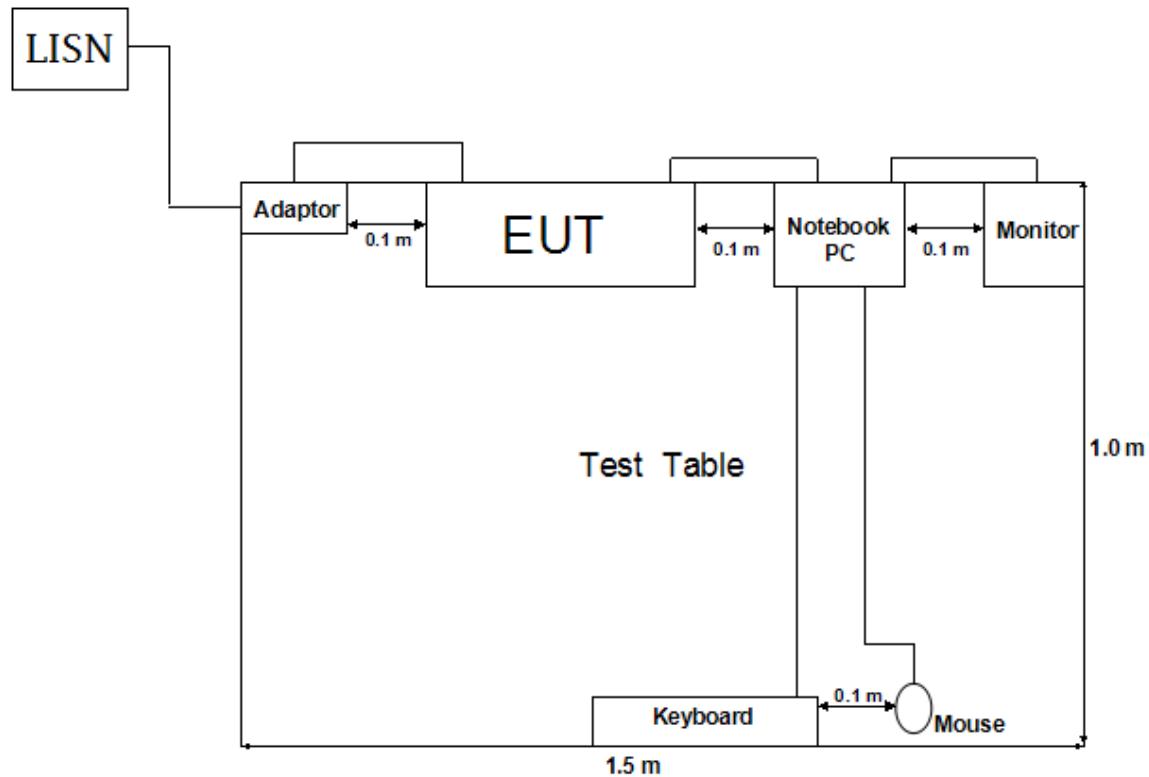


ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS

CLIENT:	Grandstream Networks, Inc.	TEST STANDERD:	Section 15.107
MODEL NUMBERS:	GXV3674_HD_VF v 2, GXV3674_FHD_VF v2	PRODUCT:	IP Camera
MODEL TESTED:	GXV3674_FHD_VF v2	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22 °C	HUMIDITY:	48%
ATM PRESSURE:	103kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	November 4 th , 2014
TEST REFERENCE:	ANSI C63.4- 2009		
TEST PROCEDURE:	The EUT was set up according to the guidelines of ANSI C63.4: 2009 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150KHz to 30MHz.		
TEST MODE:	Mode 1,Mode 2		
TEST SET UP:			
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp(Shenzhen) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

Mode 1:

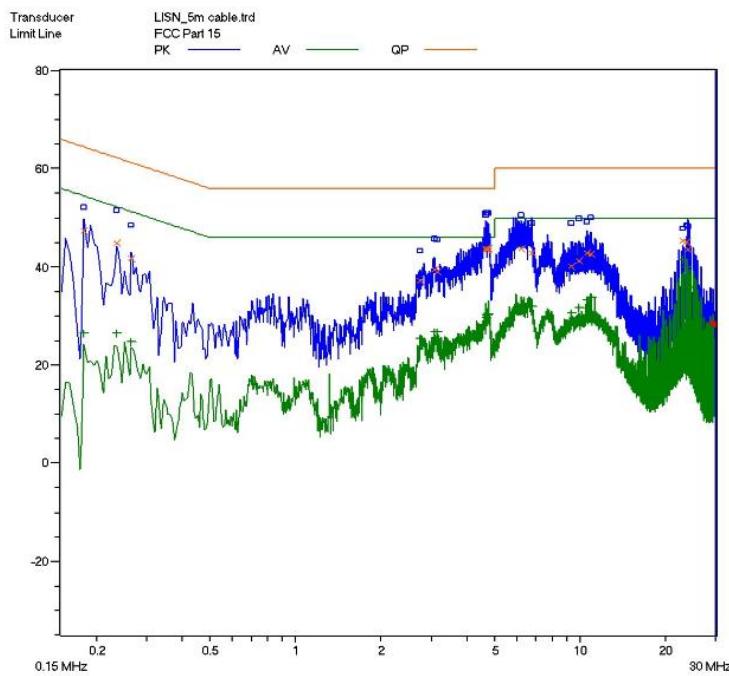


Line L Conducted Emission Graph

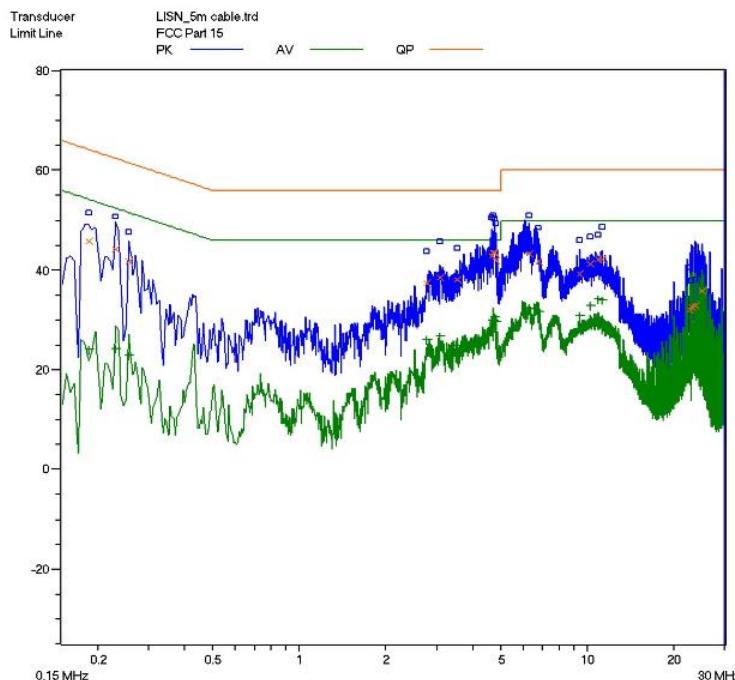


Line N Conducted Emission Graph

Mode 2:

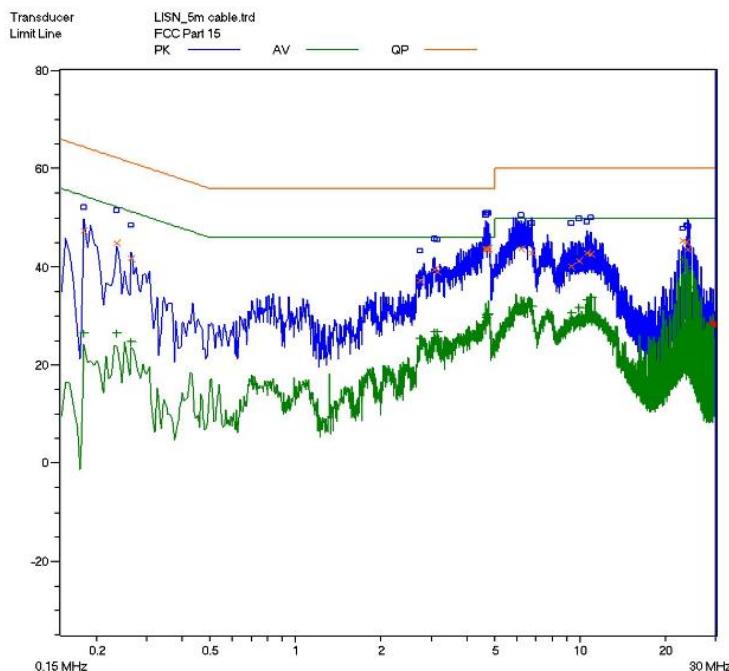

Line L Conducted Emission Graph

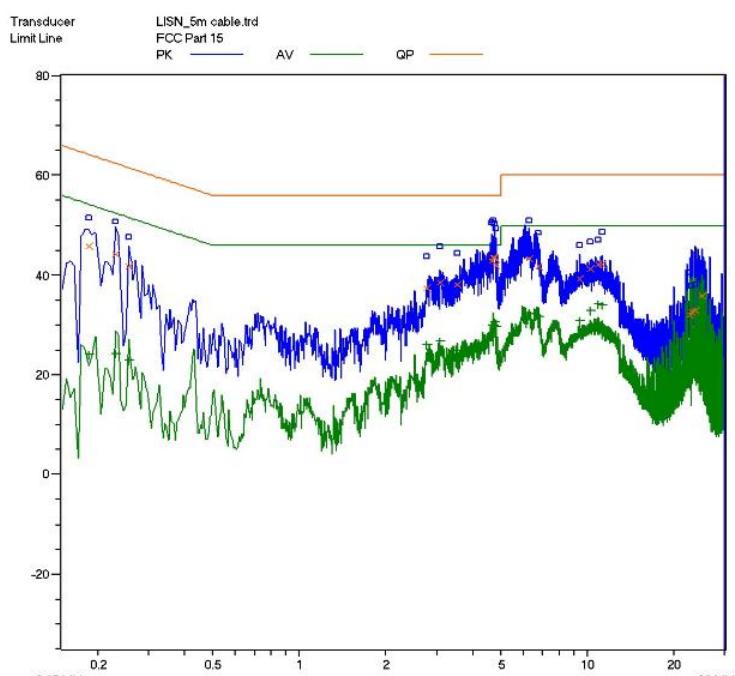

Line N Conducted Emission Graph

Test Data:**Mode 1:**

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	4.660	43.6	56	-12.4	4.660	29.8	46	-16.2
L	4.675	43.7	56	-12.3	4.675	30.1	46	-15.9
L	4.730	43.4	56	-12.6	4.730	30.3	46	-15.7
N	0.185	45.8	64.3	-18.5	0.185	24.0	54.3	-30.3
N	0.230	44.2	62.4	-18.2	0.230	24.3	52.4	-28.1
N	0.255	41.7	61.6	-19.9	0.255	23.0	51.6	-28.6

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Mode 2:

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	4.660	43.3	56	-12.7	4.660	29.1	46	-17.1
L	4.675	43.1	56	-12.9	4.675	30.0	46	-16.0
L	4.730	43.4	56	-12.6	4.730	30.3	46	-15.7
N	0.185	45.1	64.3	-19.2	0.185	23.7	54.3	-30.6
N	0.230	44.0	62.4	-18.4	0.230	24.1	52.4	-28.3
N	0.255	41.7	61.6	-19.9	0.255	23.0	51.6	-28.6

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Test Equipment List:

<i>Test Equipment</i>	<i>Model No.</i>	<i>Manufacturer</i>	<i>Serial No.</i>	<i>Last Cal.</i>	<i>Cal. Interval</i>
<i>EMI Test Receiver</i>	SMR4503	SCHAFFNER	11725	2014.07.08	2015.07.08
<i>Line impedance stabilization network</i>	ESH2-Z5	R&S	0338.5219.53-100396-vj	2014.03.14	2015.03.13

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

TESTED BY: *Daomen* **GALANZ**
ENGINEER **COMPANY NAME**

REVIEWED BY: *Jawen* **ECMG**
SENIOR ENGINEER **COMPANY NAME**



Conducted Emission Test Set-up -Front view




Conducted Emission Test Set-up -Rear view

ATTACHMENT 2 – RADIATED EMISSION MEASUREMENT


CLIENT:	Grandstream Networks, Inc.	TEST STANDERD:	Section 15.109
MODEL NUMBERS:	GXV3674_HD_VF v2 , GXV3674_FHD_VF v2	PRODUCT:	IP Camera
EUT MODEL:	GXV3674_FHD_VF v2	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22 °C	HUMIDITY:	47%RH
ATM PRESSURE:	103.0kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	November 4 th , 2014
TEST REFERENCE:	ANSI C63.4: 2009		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2009 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. signal discrimination was then performed and the significant peaks marked. these peaks were then quasi-peaked in the frequency range of 30 MHz to 1GHz and average and peak in the frequency range of 1GHz to 2GHz at an anechoic chamber.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TEST MODE:	Mode 1,Mode 2,Mode 3		
TESTED RANGE:	9KHz to 30MHz and 30 to 2000MHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). Test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 3.6 dB		

Continue on to next page...


Frequency measured at 9KHz to 30MHz:

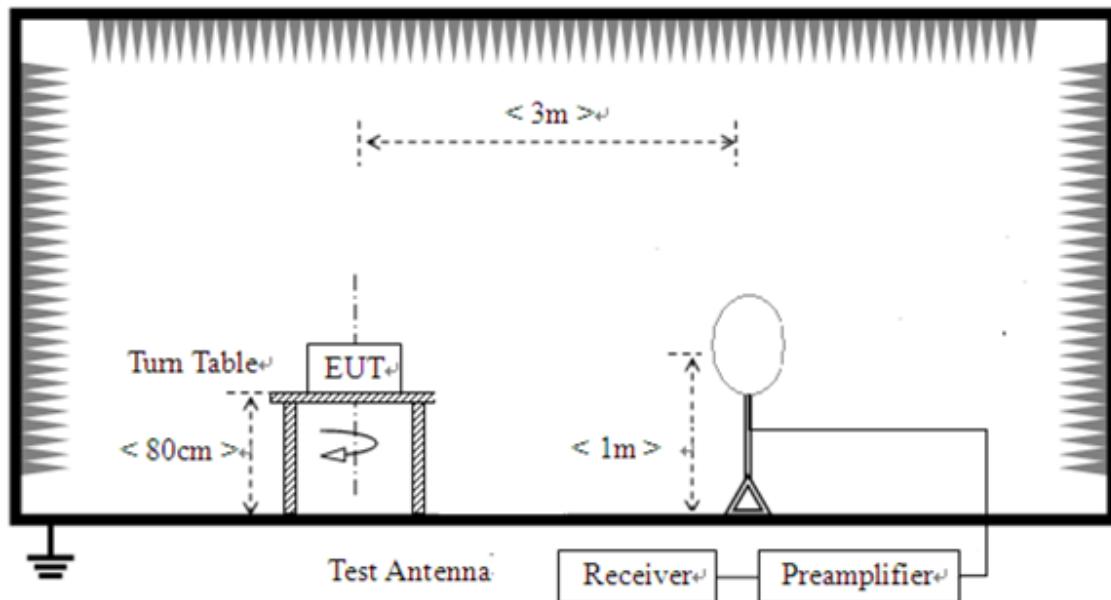


Frequency measured at 30MHz to 1000MHz:

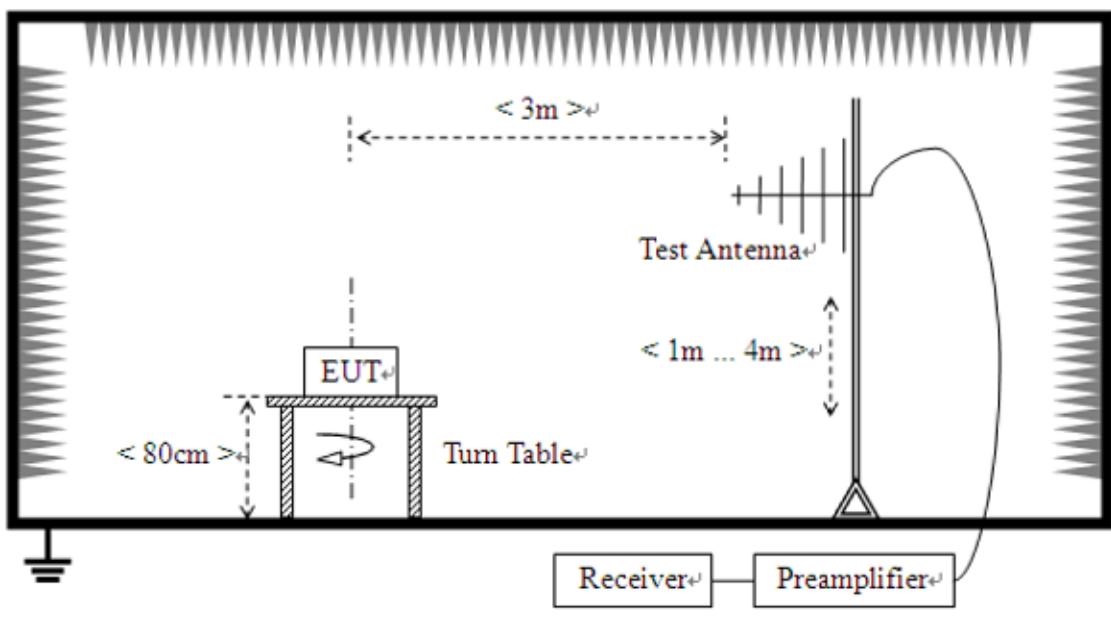


Frequency measured at Above 1GHz:

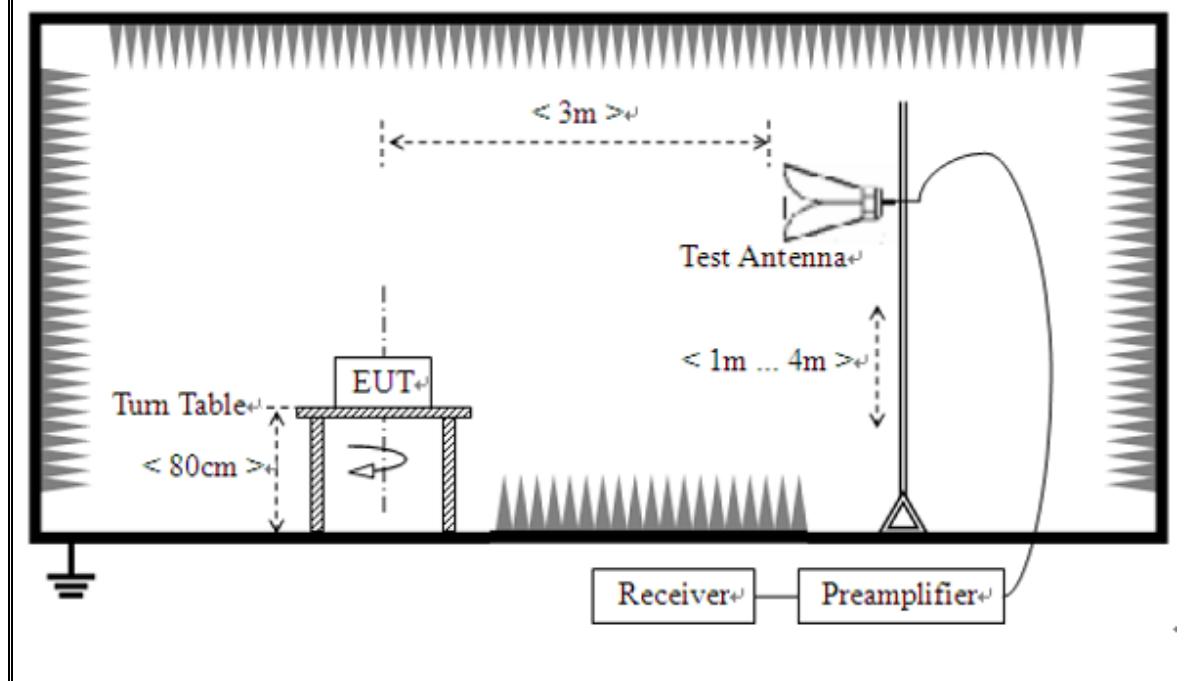


Mode 1:

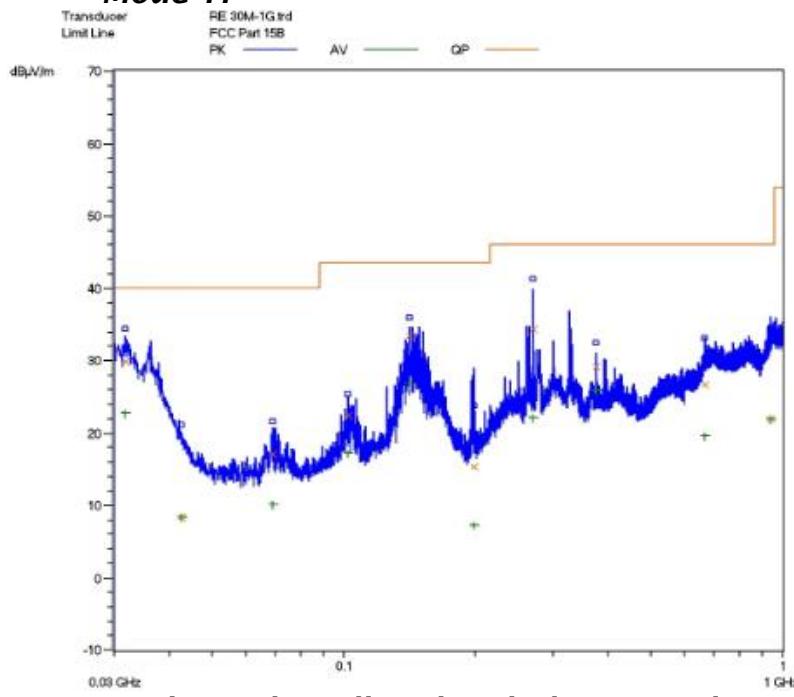


**Horizontal: Radiated Emission Test Plot
(30-1000MHz)**

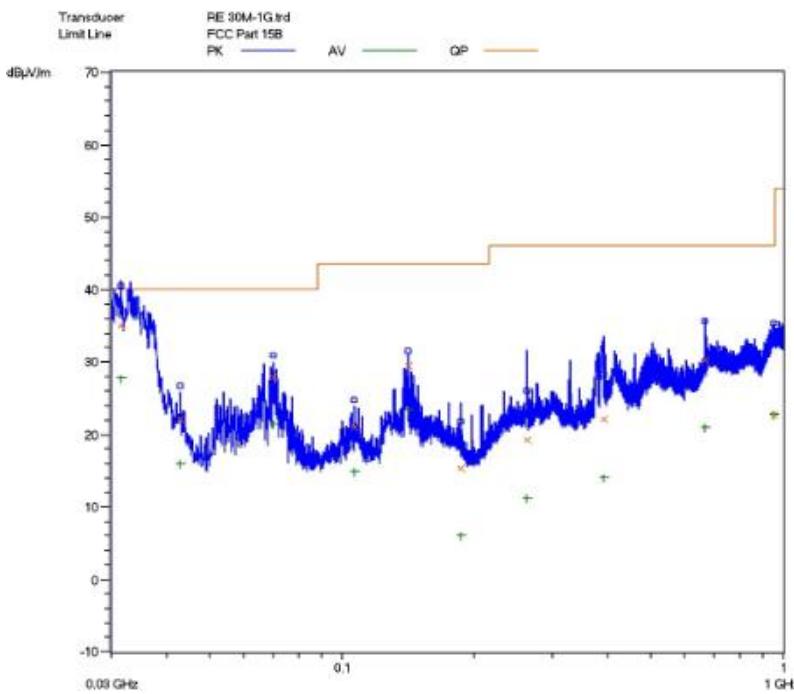

**Vertical: Radiated Emission Test Plot
(30-1000MHz)**

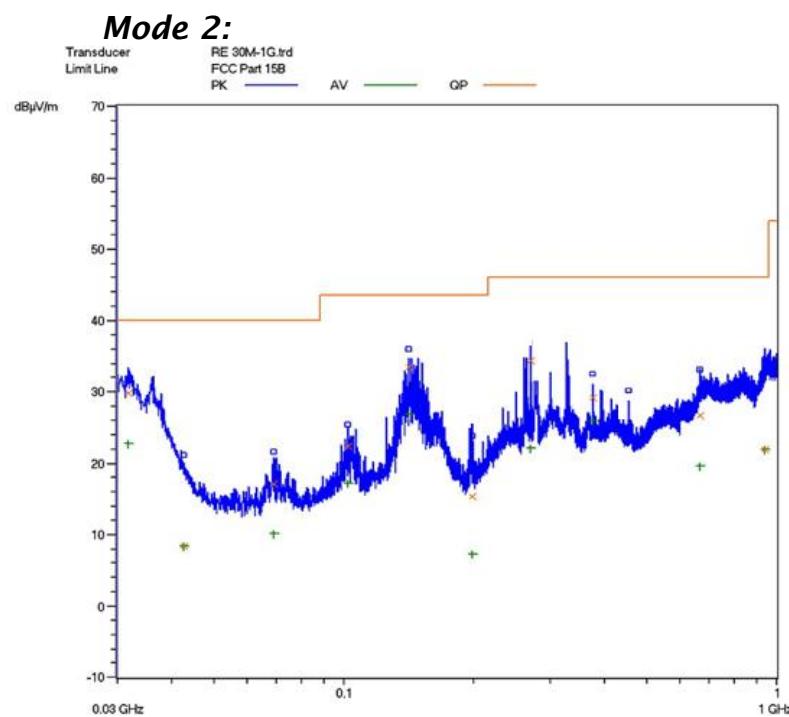


**Horizontal: Radiated Emission Test Plot
(30-1000MHz)**

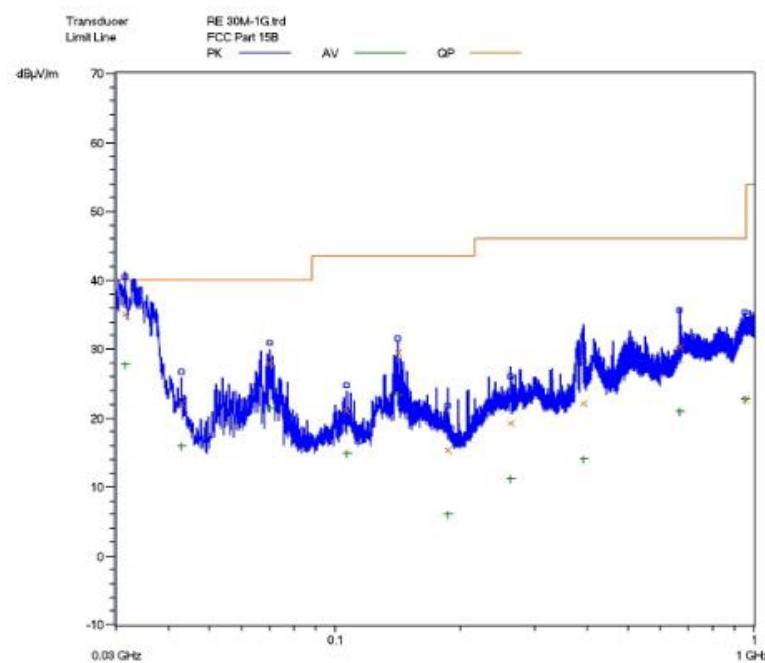


**Vertical: Radiated Emission Test Plot
(30-1000MHz)**

Mode 3:

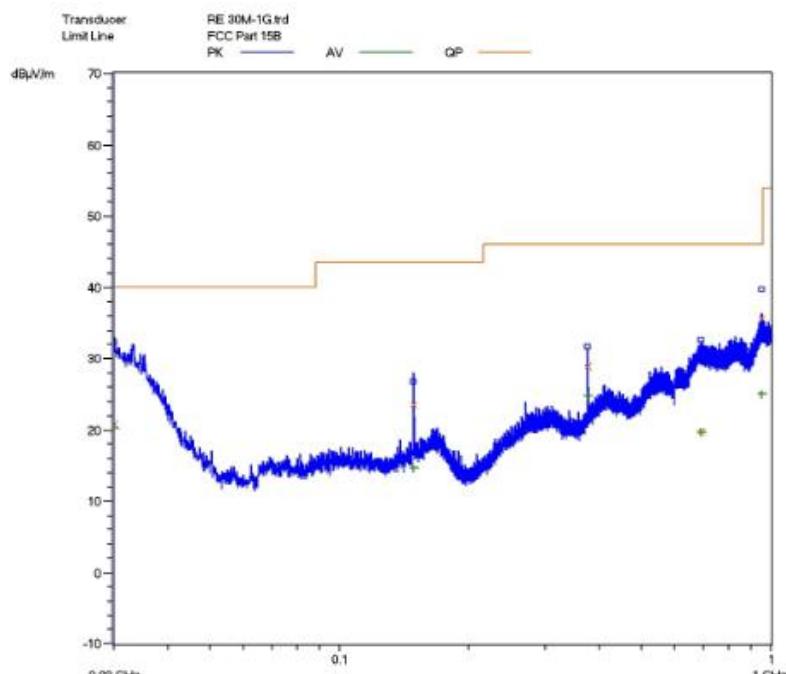

**Horizontal: Radiated Emission Test Plot
(30-1000MHz)**

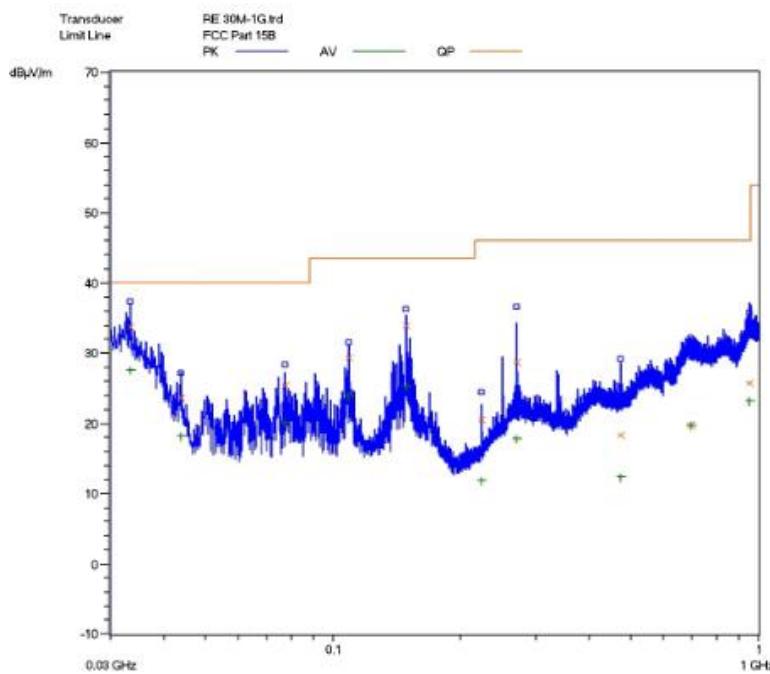

**Vertical: Radiated Emission Test Plot
(30-1000MHz)**

Test Data:

Pre-scan has been conducted to determine the worst-case from all possible combinations between available operation mode. The worst-case is mode 1 was selected for the final testing.

Mode 1:

Test No. #:	Frequency (MHz)	Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	/	/	/	/	/	/
2	/	/	/	/	/	/
3	/	/	/	/	/	/
4	/	/	/	/	/	/
5	/	/	/	/	/	/
6	/	/	/	/	/	/

Note:

1. The field strength is calculated by adding the antenna factor, cable factor. The basic equation with a sample calculation is as follows:
Emission Level = Reading Level + Factor.
2. The limits shown are based on quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. the bandwidth of Test Receiver was set at 200Hz in frequency range of 9KHz to 150KHz, 9kHz in the frequency range of 150KHz to 30MHz.
3. All emission levels in the frequency range of 9KHz to 30MHz are 20dB below the official limits that are not reported.

Test Data:
Mode 1&Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
31.680	0.13	22.1	/	7.57	29.8	40	-10.2
141.200	0.27	7.6	/	25.53	33.4	43.5	-10.1
270.000	0.40	12.5	/	21.5	34.4	46	-11.6
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
Vertical							
31.440	0.13	22.1	/	12.77	35.0	40	-5.0
69.680	0.19	5.7	/	22.11	28	40	-12.0
141.200	0.27	7.6	/	21.63	29.5	43.5	-14.0
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Mode 1 & Above 1GHz:

Frequency (GHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.166	1.40	23.9	-33.6	53.97	45.67	74	-28.33	H
1.190	1.45	24.5	-33.6	54.37	46.72	74	-27.28	H
1.325	1.57	25.1	-33.6	55.29	48.36	74	-25.64	H
1.360	1.58	25.1	-33.6	54.2	47.28	74	-26.72	V
1.455	1.65	25.7	-33.6	55.64	49.39	74	-24.61	V
1.585	1.76	26.7	-33	54.55	50.01	74	-23.99	V
Average Measurement								
1.166	1.40	23.9	-33.6	47.04	38.74	54	-15.26	H
1.190	1.45	24.5	-33.6	49.75	42.10	54	-11.9	H
1.325	1.57	25.1	-33.6	46.94	40.01	54	-13.99	H
1.360	1.58	25.1	-33.6	46.58	39.66	54	-14.34	V
1.455	1.65	25.7	-33.6	48.97	42.72	54	-11.28	V
1.585	1.76	26.7	-33	44.64	40.10	54	-13.9	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

Mode 2&Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
31.680	0.13	22.1	/	7.53	29.5	40	-10.5
141.200	0.27	7.6	/	25.50	33.1	43.5	-10.4
270.000	0.40	12.5	/	21.4	34.3	46	-11.7
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
Vertical							
31.440	0.13	22.1	/	12.70	34.3	40	-5.7
69.680	0.19	5.7	/	22.10	27.9	40	-12.1
141.200	0.27	7.6	/	21.60	29.2	43.5	-14.2
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Mode 2&Above 1GHz:

Frequency (GHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.166	1.40	23.9	-33.6	53.97	45.67	74	-28.33	H
1.190	1.45	24.5	-33.6	54.37	46.72	74	-27.28	H
1.325	1.57	25.1	-33.6	55.29	48.36	74	-25.64	H
1.360	1.58	25.1	-33.6	54.2	47.28	74	-26.72	V
1.455	1.65	25.7	-33.6	55.64	49.39	74	-24.61	V
1.585	1.76	26.7	-33	54.55	50.01	74	-23.99	V
Average Measurement								
1.166	1.40	23.9	-33.6	47.04	38.74	54	-15.26	H
1.190	1.45	24.5	-33.6	49.75	42.10	54	-11.9	H
1.325	1.57	25.1	-33.6	46.94	40.01	54	-13.99	H
1.360	1.58	25.1	-33.6	46.58	39.66	54	-14.34	V
1.455	1.65	25.7	-33.6	48.97	42.72	54	-11.28	V
1.585	1.76	26.7	-33	44.64	40.10	54	-13.9	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

Mode 3&Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
30.000	0.12	23.2	/	-2.42	20.9	40	-19.1
375.040	0.51	13.9	/	14.49	28.9	46	-17.1
954.160	0.89	23.2	/	11.51	35.6	46	-10.4
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
Vertical							
33.440	0.13	20.9	/	12.67	33.7	40	-6.3
108.800	0.23	7.3	/	21.77	29.3	43.5	-14.2
148.480	0.27	8.6	/	25.13	34	43.5	-9.5
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Mode 3&Above 1GHz:

Frequency (GHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.166	1.40	23.9	-33.6	55.5	47.20	74	-26.80	H
1.190	1.45	24.5	-33.6	57.01	49.36	74	-24.64	H
1.325	1.57	25.1	-33.6	56.03	49.10	74	-24.90	H
1.360	1.58	25.1	-33.6	59.66	52.74	74	-21.26	V
1.455	1.65	25.7	-33.6	56.61	50.36	74	-23.64	V
1.585	1.76	26.7	-33	53.2	48.66	74	-25.34	V
Average Measurement								
1.166	1.40	23.9	-33.6	51.01	42.71	54	-11.29	H
1.190	1.45	24.5	-33.6	47.47	39.82	54	-14.18	H
1.325	1.57	25.1	-33.6	45.6	38.67	54	-15.33	H
1.360	1.58	25.1	-33.6	48.09	41.17	54	-12.83	V
1.455	1.65	25.7	-33.6	46.61	40.36	54	-13.64	V
1.585	1.76	26.7	-33	42.93	38.39	54	-15.61	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

Test Equipment List:


Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Due
EMI Test Receiver	SMR4503	SCHAFFNER	11725	2014.07.08	2015.07.07
Double-ridged Wave guide horn	3115	ETS	6587	2014.08.02	2015.08.01
Microwave system amplifier	83017A	Agilent	MY39500438	2014.07.11	2015.07.10
Biconilog Antenna	3142C	ETS	00042672	2014.09.28	2015.09.27
Band-pass Filter	BRM50702	Micro-Tronic	S/N-030	2013.11.30	2014.11.29
Spectrum Analyzer	FSP30	R&S	100755	2013.11.30	2014.11.29
HF Loop Antenna	HLA6120	TESEQ	26348	2013-10-11	2014-10-12
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

TESTED BY: Daomen GALANZ
ENGINEER **COMPANY NAME**


REVIEWED BY: Jamey ECMG
SENIOR ENGINEER **COMPANY NAME**




Radiated Emission Test Set-up(9KHz-30MHz)

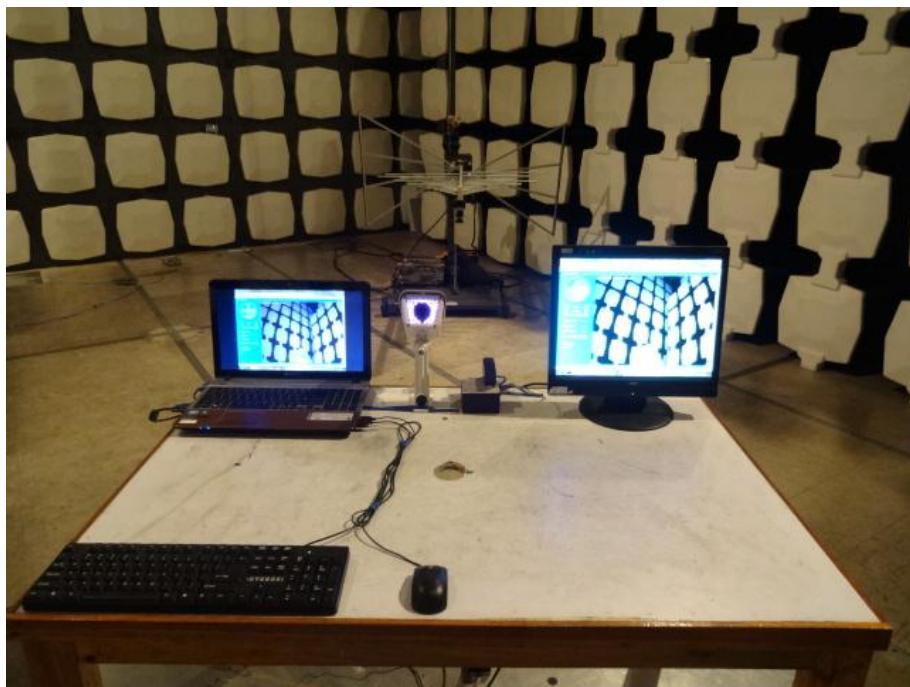

Radiated Emission Test Set-up(30-1000MHz)

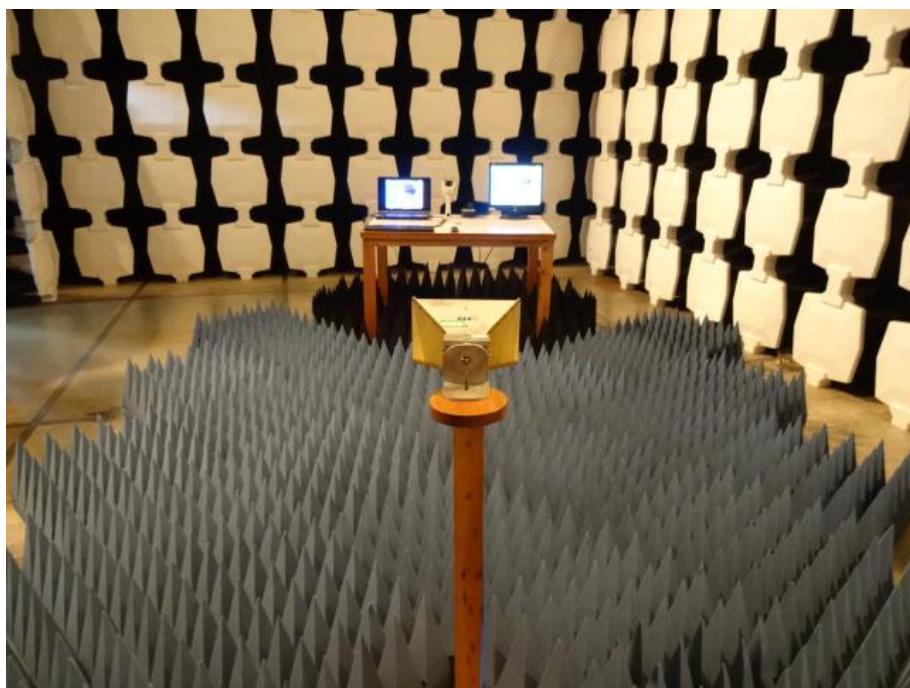

Radiated Emission Test Set-up(Above 1GHz)

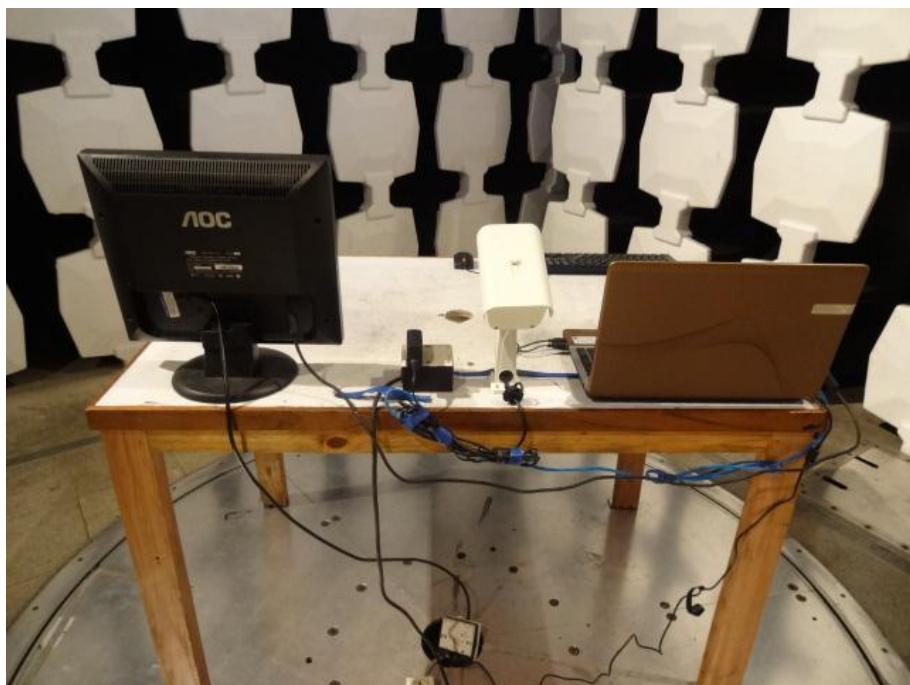

Radiated Emission Test Set-up (Rear View)

※※※ ***End Of Report*** ※※※