

TEST REPORT

Applicant Name: Grandstream Networks, Inc.
Address: 126 Brookline Ave., 3rd Floor Boston, MA 02215, USA
Report Number: 2401Y48404E-RFA
FCC ID: YZZWP836
IC: 11964A-WP836

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: Cordless Wi-Fi IP Phone
Model No.: WP836
Multiple Model(s) No.: N/A
Trade Mark: GRANDSTREAM
Date Received: 2024/10/09
Issue Date: 2024/12/10

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko. Wu

Ekko Wu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A) & RSS-GEN § 8.8 - AC LINE CONDUCTED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
CORRECTED FACTOR & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(D) & RSS-247§ 5.5 - SPURIOUS EMISSIONS	30
APPLICABLE STANDARD	30
EUT SETUP	30
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	31
TEST PROCEDURE	32
FACTOR & OVER LIMIT/MARGIN CALCULATION	32
TEST DATA	32
FCC §15.247(A) (1) & RSS-247 § 5.1 (B) - CHANNEL SEPARATION TEST	70
APPLICABLE STANDARD	70
TEST PROCEDURE	70
TEST DATA	71
FCC §15.247(A) (1) & RSS-247 § 5.1 (A), RSS-GEN § 6.7 - 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	72
APPLICABLE STANDARD	72
TEST PROCEDURE	73
TEST DATA	74

FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - QUANTITY OF HOPPING CHANNEL TEST.....	75
APPLICABLE STANDARD	75
TEST PROCEDURE	75
TEST DATA	76
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - TIME OF OCCUPANCY (DWELL TIME)	77
APPLICABLE STANDARD	77
TEST PROCEDURE	77
TEST DATA	78
FCC §15.247(B) (1) & RSS-247§ 5.1(B) &§ 5.4(B) - PEAK OUTPUT POWER MEASUREMENT.....	79
APPLICABLE STANDARD	79
TEST PROCEDURE	79
TEST DATA	80
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	81
APPLICABLE STANDARD	81
TEST PROCEDURE	81
TEST DATA	82
EUT PHOTOGRAPHS.....	83
TEST SETUP PHOTOGRAPHS.....	84
APPENDIX	85
APPENDIX A: 20dB EMISSION BANDWIDTH.....	85
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	91
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	97
APPENDIX D: CARRIER FREQUENCY SEPARATION	102
APPENDIX E: TIME OF OCCUPANCY	103
APPENDIX F: NUMBER OF HOPPING CHANNELS	113
APPENDIX G: BAND EDGE MEASUREMENTS	116

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y48404E-RFA	Original Report	2024/12/10

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	WP836
FVIN	1.0.1.35
Product	Cordless Wi-Fi IP Phone
Tested Model	WP836
Multiple Model(s)	N/A
Frequency Range	Bluetooth: 2402-2480MHz
Transmit Power	10.25dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification [#]	4.35dBi (provided by the applicant)
Voltage Range	DC 5V from Adapter/Charger or DC 3.7V from Battery
Sample serial number	2SGE-1 for Conducted and Radiated Emissions Test 2SGE-14 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: GQ12-050200-AU Input: 100-240V~50/60Hz 0.4A Max Output: 5.0V, 2.0A Adapter 2 Model: GLH0502000 Input: 100-240V~50/60Hz 0.5A Output: 5.0V, 2.0A Adapter 3 Model: DCT12W050200US-A2 Input: 100-240V~50/60Hz 0.3A max Output: 5.0V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules, section 15.203, 15.205, 15.207, 15.209, 15.247 rules and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247 Issue 3, August 2023, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...
...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

“SecureCRTPortable.exe[#]” exercise software was and the power level is default[#]. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Receptacle	Unknown	Unknown


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable DC Cable	1.5	EUT/Charger	Adapter
Unshielded Un-detachable AC Cable	1.5	Receptacle	LISN/AC Mains


Block Diagram of Test Setup

For Conducted Emissions:

Powered by Charger:

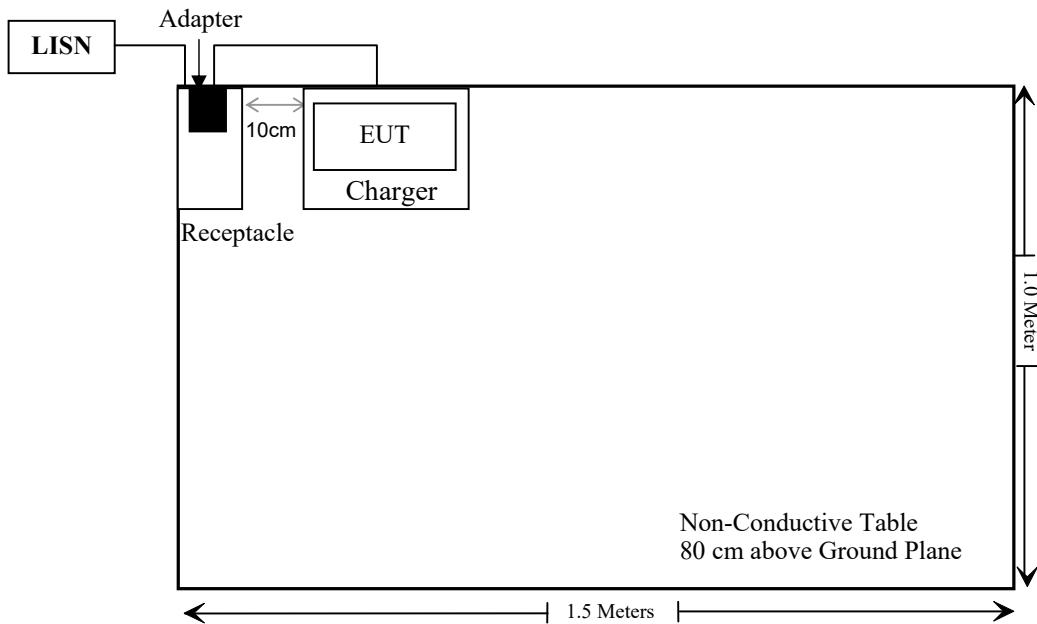


Powered by Type-C:

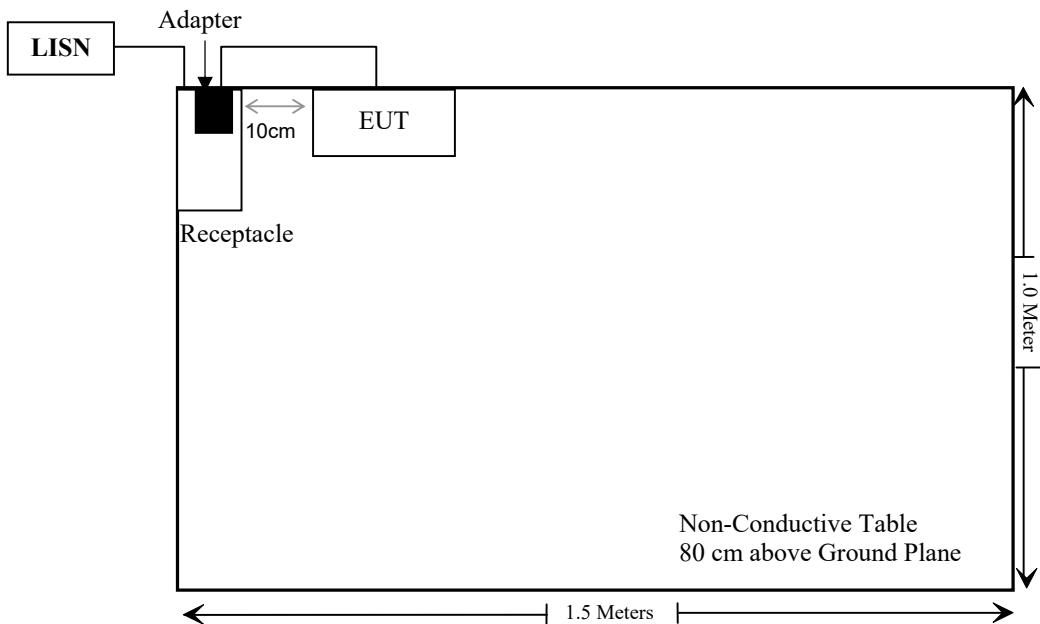


For Radiated Emissions below 1GHz:


Powered by Charger:

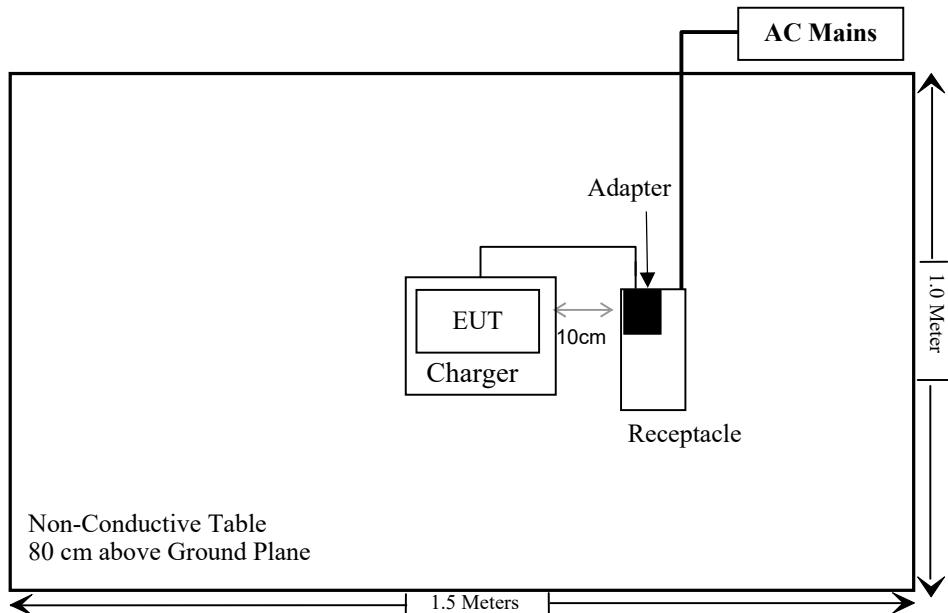

Powered by Type-C:

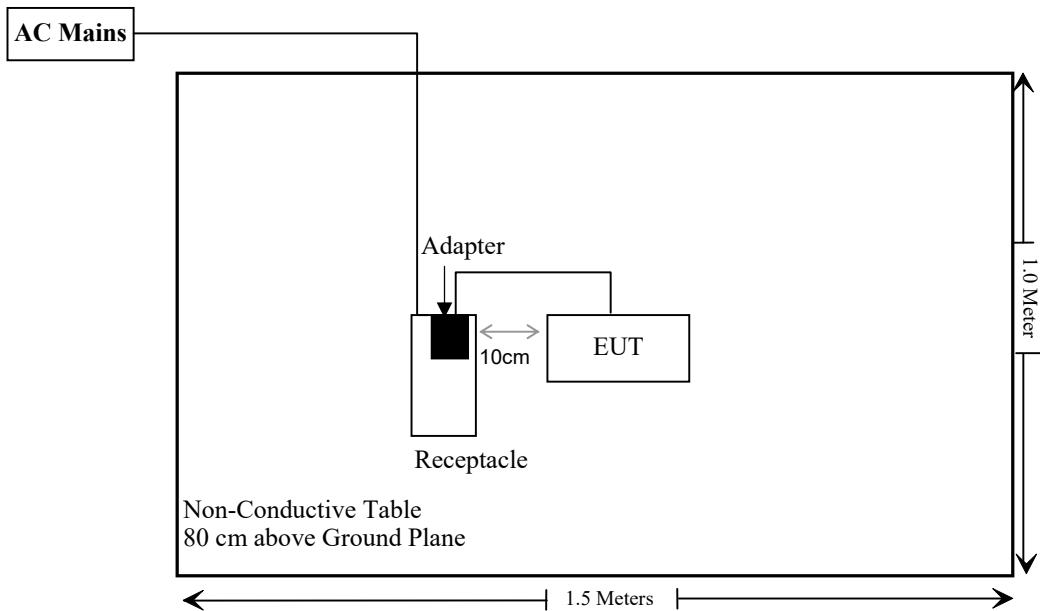

For Radiated Emissions above 1GHz:

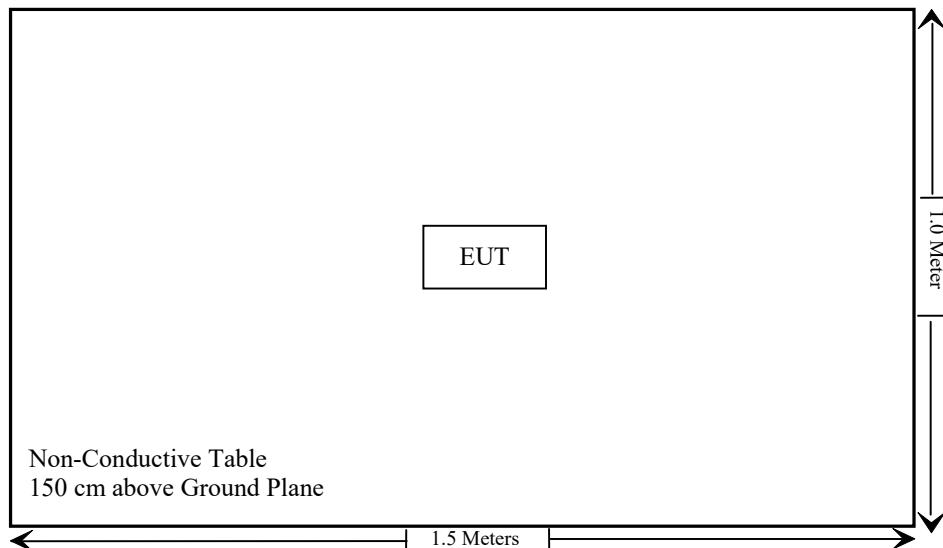

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
FCC §15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant
FCC §15.247(a)(1)	RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.247(a)(1)	RSS-247 § 5.1 (b)	Channel Separation Test	Compliant
FCC §15.247(a)(1)(ii)	RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant
FCC §15.247(b)(1)	RSS-247 § 5.1(b) &§ 5.4(b)	Peak Output Power Measurement	Compliant
FCC §15.247(d)	RSS-247 § 5.5	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Rohde & Schwarz	EMC Measurement	EMC32	V8.53.0	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached for Bluetooth and the maximum antenna gain[#] is 4.35dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain [#]	Impedance	Frequency Range
PIFA	4.35dBi	50Ω	2.4~2.5GHz


Result: Compliant

FCC §15.207 (a) & RSS-GEN § 8.8 - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

EUT Setup

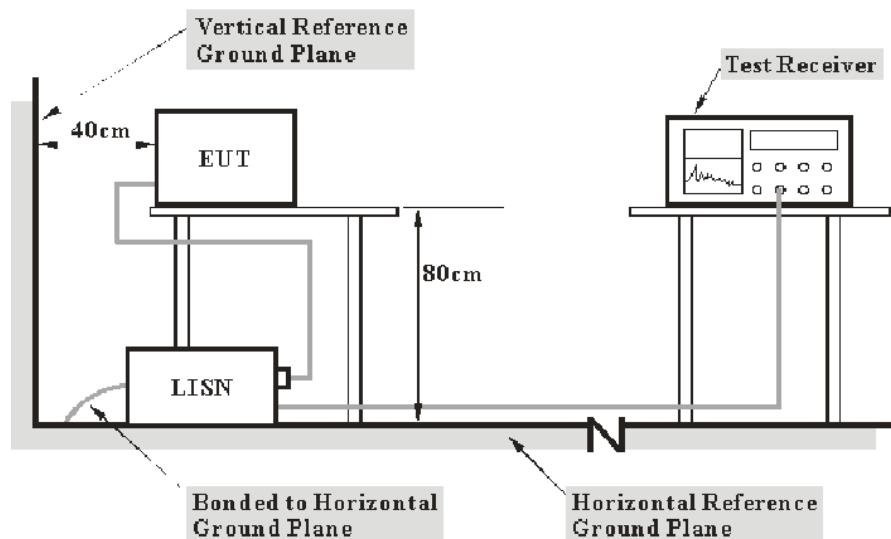

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected Factor (Corr.) is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor (Corr.)} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa

The testing was performed by Macy Shi on 2024-12-10.


EUT operation mode: Transmitting (Maximum output power mode, EDR (8DPSK) Low Channel)

Powered by Charger:

For Adapter 1

AC 120V/60 Hz, Line

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

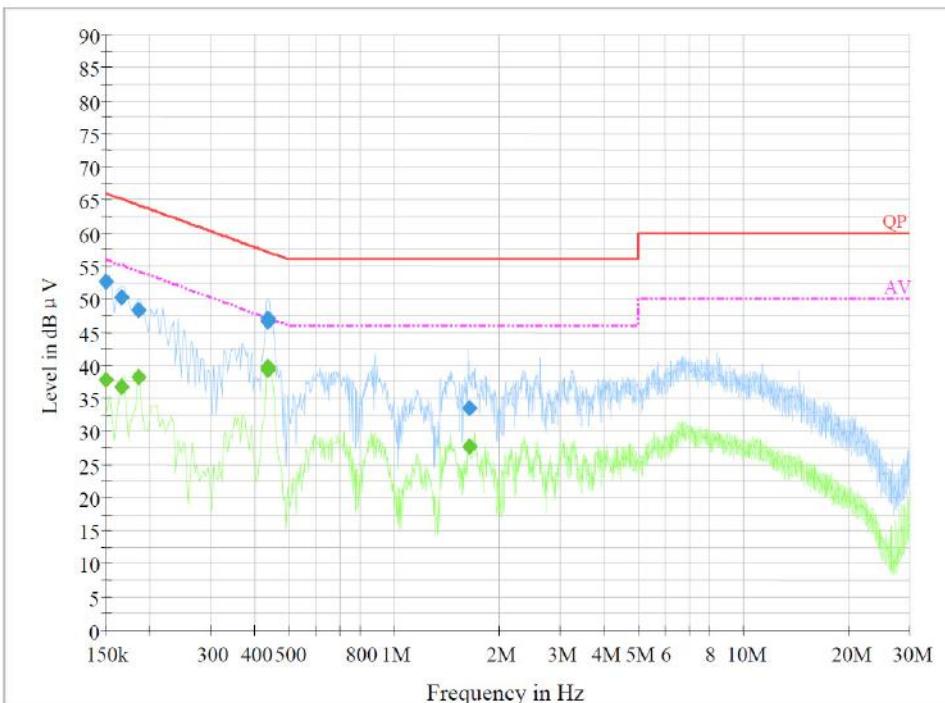

Final Result 1


Frequency (MHz)	Quasi Peak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.150000	52.6	0.200	L1	20.3	13.4	66.0
0.165500	50.2	9.000	L1	20.4	15.0	65.2
0.185500	48.3	9.000	L1	20.4	15.9	64.2
0.435370	46.7	9.000	L1	20.4	10.4	57.1
0.436450	47.1	9.000	L1	20.4	10.0	57.1
1.653550	33.5	9.000	L1	20.4	22.5	56.0

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.150000	37.9	9.000	L1	20.3	18.1	56.0
0.165500	38.2	9.000	L1	20.4	17	55.2
0.185500	36.1	9.000	L1	20.4	18.1	54.2
0.435370	39.3	9.000	L1	20.4	7.8	47.1
0.436450	39.8	9.000	L1	20.4	7.3	47.1
1.653550	28.7	9.000	L1	20.4	17.3	46.0

AC 120V/60 Hz, Neutral

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	Macy -she
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

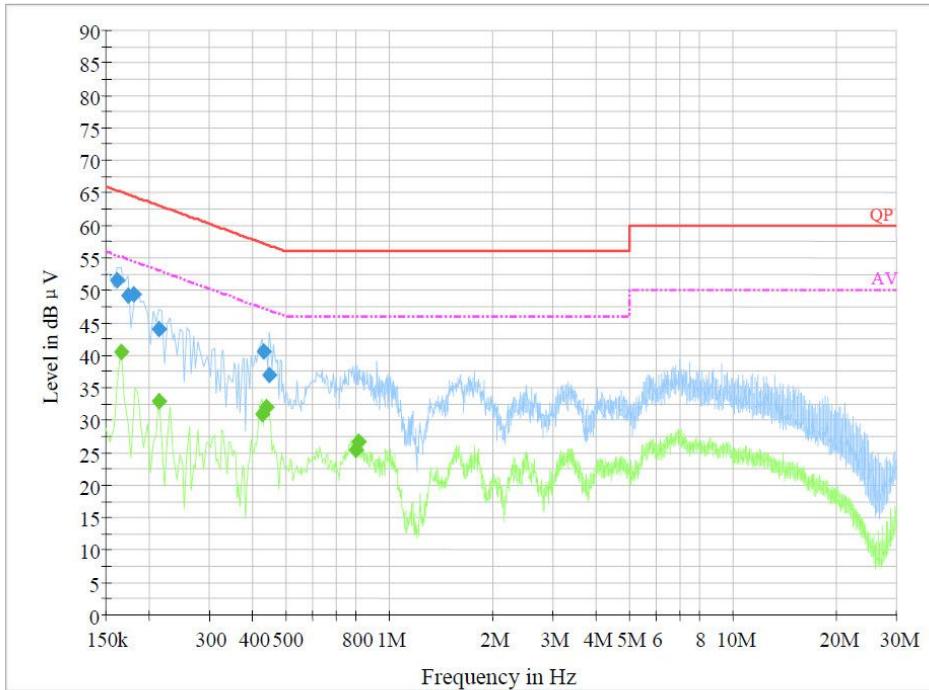**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.161500	51.5	9.000	N	20.4	13.9	65.4
0.173500	49.3	9.000	N	20.4	15.5	64.8
0.181500	49.3	9.000	N	20.4	15.1	64.4
0.213500	44.0	9.000	N	20.4	19.1	63.1
0.432390	40.6	9.000	N	20.4	16.6	57.2
0.447250	37.0	9.000	N	20.4	19.9	56.9


Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.166000	40.9	9.000	N	20.4	14.3	55.2
0.214000	34.1	9.000	N	20.4	18.9	53.0
0.426000	30.9	9.000	N	20.4	16.4	47.3
0.442000	32.0	9.000	N	20.4	15	47.0
0.798000	25.3	9.000	N	20.4	20.7	46.0
0.818000	26.8	9.000	N	20.4	19.2	46.0

For Adapter 2

AC 120V/60 Hz, Line

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

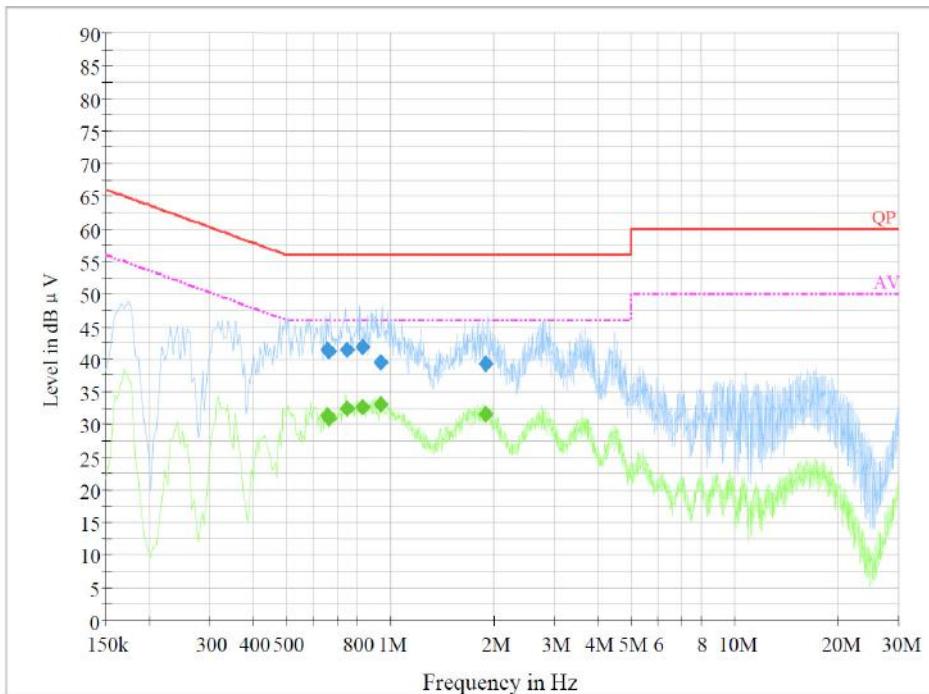

Final Result 1


Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.656250	41.6	9.000	L1	20.5	14.4	56.0
0.663950	41.2	9.000	L1	20.5	14.8	56.0
0.753130	41.5	9.000	L1	20.5	14.5	56.0
0.829730	41.9	9.000	L1	20.4	14.1	56.0
0.935810	39.5	9.000	L1	20.4	16.5	56.0
1.901110	39.4	9.000	L1	20.4	16.6	56.0

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.656250	31.4	9.000	L1	20.5	14.6	46.0
0.663950	30.9	9.000	L1	20.5	15.1	46.0
0.753130	32.4	9.000	L1	20.5	13.6	46.0
0.829730	32.7	9.000	L1	20.4	13.3	46.0
0.935810	33.0	9.000	L1	20.4	13.0	46.0
1.901110	31.5	9.000	L1	20.4	14.5	46.0

AC 120V/60 Hz, Neutral

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

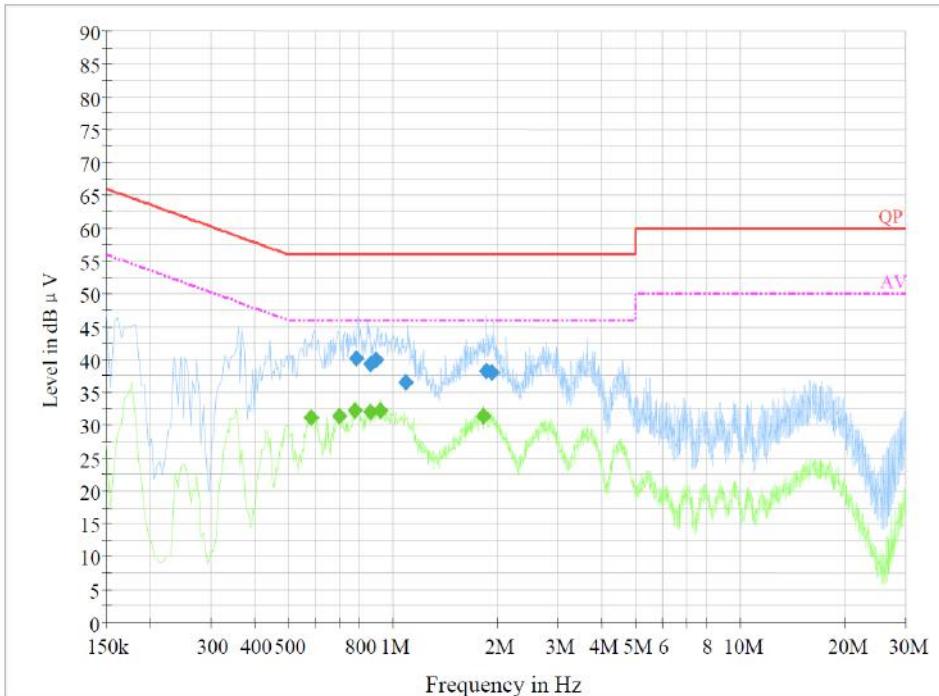**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.786090	40.2	9.000	N	20.4	15.8	56.0
0.861250	39.3	9.000	N	20.4	16.7	56.0
0.896350	40.0	9.000	N	20.3	16.0	56.0
1.089410	36.6	9.000	N	20.4	19.4	56.0
1.858070	38.2	9.000	N	20.6	17.8	56.0
1.932810	38.0	9.000	N	20.6	18.0	56.0


Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.582000	27.8	9.000	N	20.4	18.2	46.0
0.702000	31.3	9.000	N	20.4	14.7	46.0
0.782000	32.3	9.000	N	20.4	13.7	46.0
0.862000	32.0	9.000	N	20.4	14.0	46.0
0.926000	32.1	9.000	N	20.3	13.9	46.0
1.830000	31.4	9.000	N	20.6	14.6	46.0

For Adapter 3

AC 120V/60 Hz, Line

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Shc</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

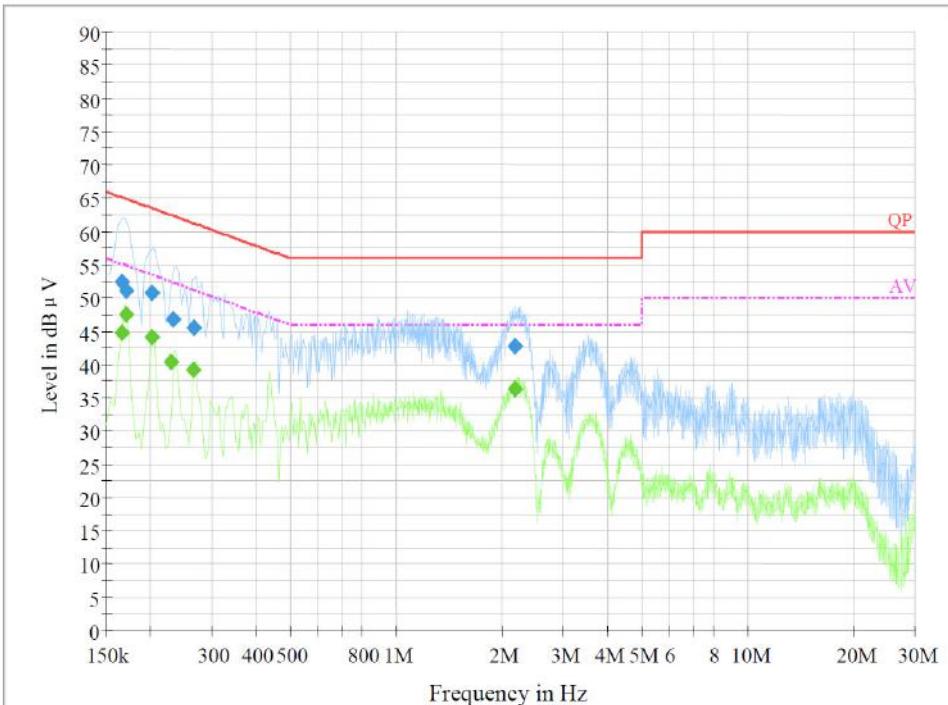

Final Result 1


Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.165500	52.3	9.000	L1	20.4	12.9	65.2
0.170501	51.0	9.000	L1	20.4	13.9	64.9
0.201500	47.1	9.000	L1	20.3	16.4	63.5
0.233500	47.4	9.000	L1	20.3	14.9	62.3
0.265500	46.3	9.000	L1	20.3	15	61.3
2.177270	42.8	9.000	L1	20.4	13.2	56.0

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.165500	45.0	9.000	L1	20.4	10.2	55.2
0.170501	48.6	9.000	L1	20.4	6.3	54.9
0.201500	48.1	9.000	L1	20.3	5.4	53.5
0.233500	41.4	9.000	L1	20.3	10.9	52.3
0.265500	39.6	9.000	L1	20.3	11.7	51.3
2.177270	36.2	9.000	L1	20.4	9.8	46.0

AC 120V/60 Hz, Neutral

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

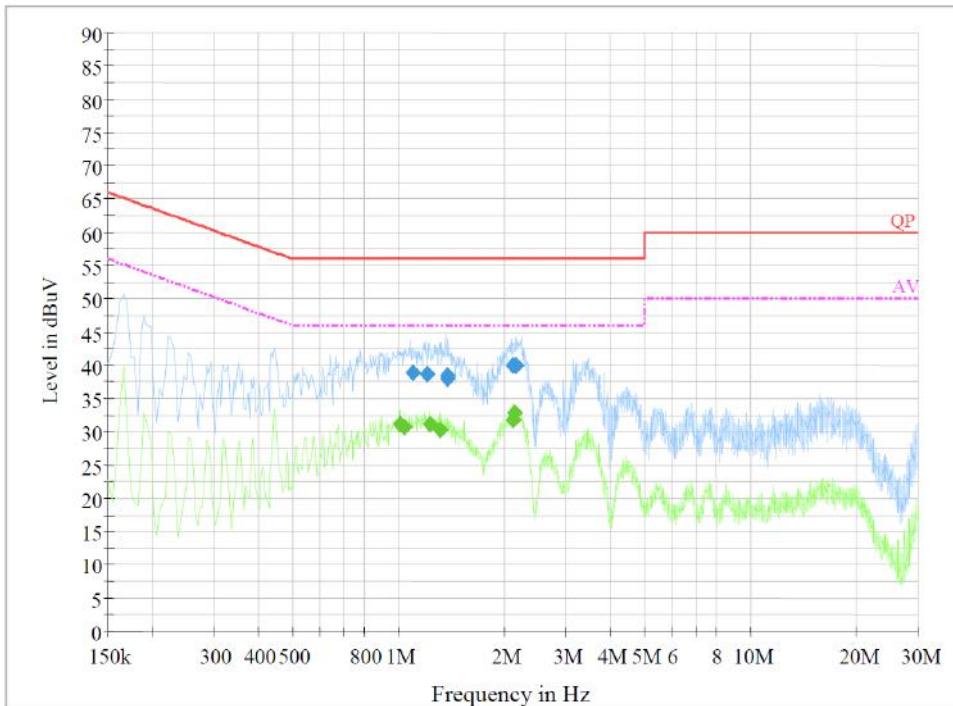**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.098230	38.8	9.000	N	20.4	17.2	56.0
1.208030	38.7	9.000	N	20.4	17.3	56.0
1.373570	38.5	9.000	N	20.4	17.5	56.0
1.381090	38.1	9.000	N	20.4	17.9	56.0
2.126530	40.0	9.000	N	20.6	16.0	56.0
2.153450	39.8	9.000	N	20.6	16.2	56.0

Final Result 2


Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.010000	31.1	9.000	N	20.4	14.9	46.0
1.042000	30.7	9.000	N	20.4	15.3	46.0
1.230000	31.1	9.000	N	20.4	14.9	46.0
1.310000	30.4	9.000	N	20.4	15.6	46.0
2.114000	31.8	9.000	N	20.6	14.2	46.0
2.142000	32.8	9.000	N	20.6	13.2	46.0

Powered by Type-C:

For Adapter I

AC 120V/60 Hz, Line

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>macy-shz</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

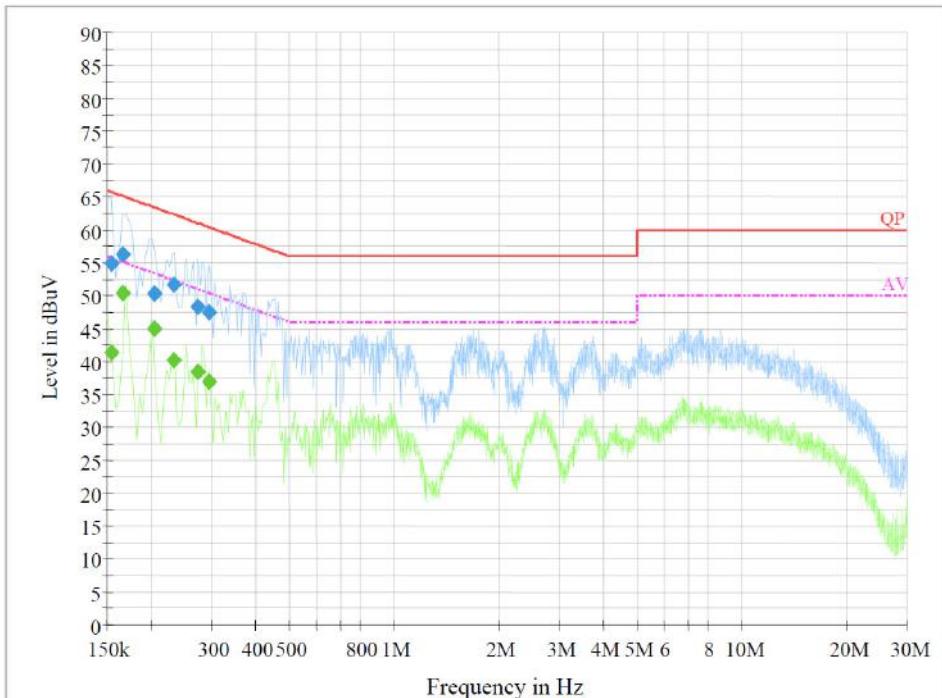

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154500	55.0	9.000	L1	20.3	10.8	65.8
0.165500	56.4	9.000	L1	20.4	8.8	65.2
0.206500	51.6	9.000	L1	20.3	11.7	63.3
0.233500	52.5	9.000	L1	20.3	9.8	62.3
0.273500	48.3	9.000	L1	20.3	12.7	61.0
0.293500	47.4	9.000	L1	20.3	13.0	60.4

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154500	41.8	9.000	L1	20.3	14	55.8
0.165500	50.9	9.000	L1	20.4	4.3	55.2
0.206500	45.7	9.000	L1	20.3	7.6	53.3
0.233500	40.9	9.000	L1	20.3	11.4	52.3
0.273500	38.6	9.000	L1	20.3	12.4	51.0
0.293500	36.9	9.000	L1	20.3	13.5	50.4

AC 120V/60 Hz, Neutral

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

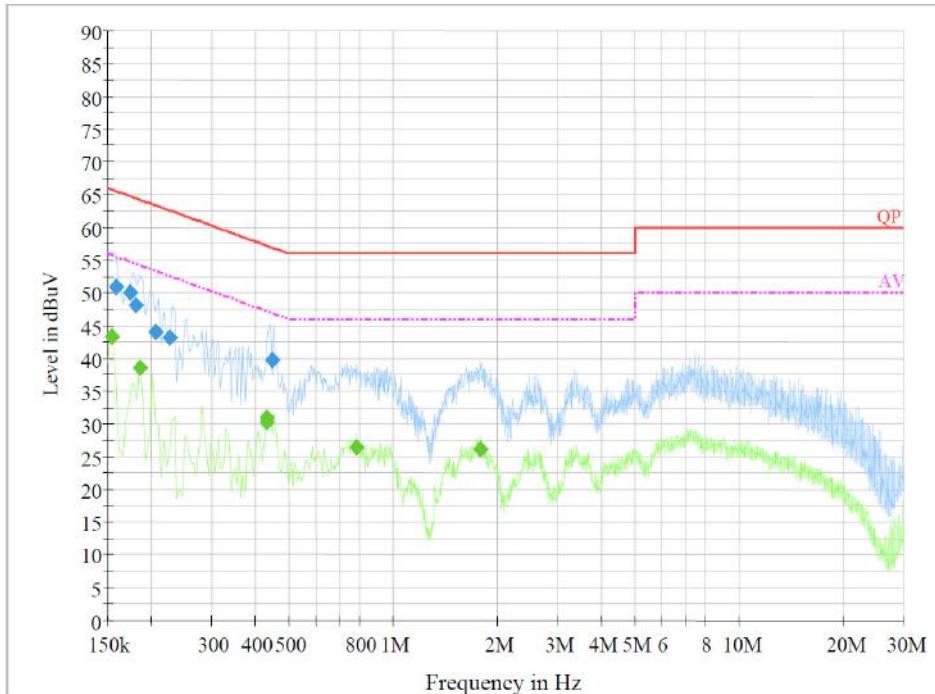**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.158000	51.0	9.000	N	20.4	14.6	65.6
0.173500	50.1	9.000	N	20.4	14.7	64.8
0.181500	48.2	9.000	N	20.4	16.3	64.4
0.205500	44.1	9.000	N	20.4	19.3	63.4
0.225500	43.2	9.000	N	20.4	19.4	62.6
0.447190	39.7	9.000	N	20.4	17.2	56.9


Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154000	44.4	9.000	N	20.4	11.4	55.8
0.186000	38.9	9.000	N	20.4	15.3	54.2
0.430000	30.4	9.000	N	20.4	16.9	47.3
0.434000	31.0	9.000	N	20.4	16.2	47.2
0.790000	26.5	9.000	N	20.4	19.5	46.0
1.794000	26.3	9.000	N	20.6	19.7	46.0

For Adapter 2

AC 120V/60 Hz, Line

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Mandy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

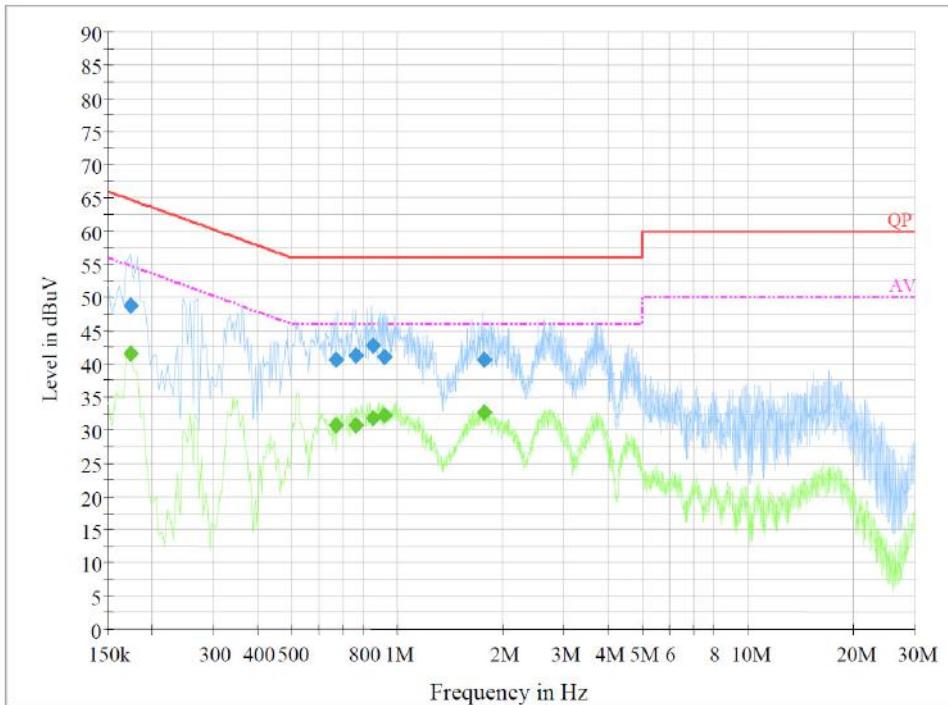

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.173500	48.9	9.000	L1	20.4	15.9	64.8
0.667890	40.6	9.000	L1	20.5	15.4	56.0
0.762570	41.3	9.000	L1	20.5	14.7	56.0
0.858690	42.7	9.000	L1	20.4	13.3	56.0
0.920230	41.0	9.000	L1	20.4	15.0	56.0
1.767630	40.6	9.000	L1	20.4	15.4	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.173500	40.7	9.000	L1	20.4	14.1	54.8
0.667890	30.8	9.000	L1	20.5	15.2	46.0
0.762570	30.6	9.000	L1	20.5	15.4	46.0
0.858690	31.8	9.000	L1	20.4	14.2	46.0
0.920230	32.2	9.000	L1	20.4	13.8	46.0
1.767630	32.6	9.000	L1	20.4	13.4	46.0

AC 120V/60 Hz, Neutral

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy Shu</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

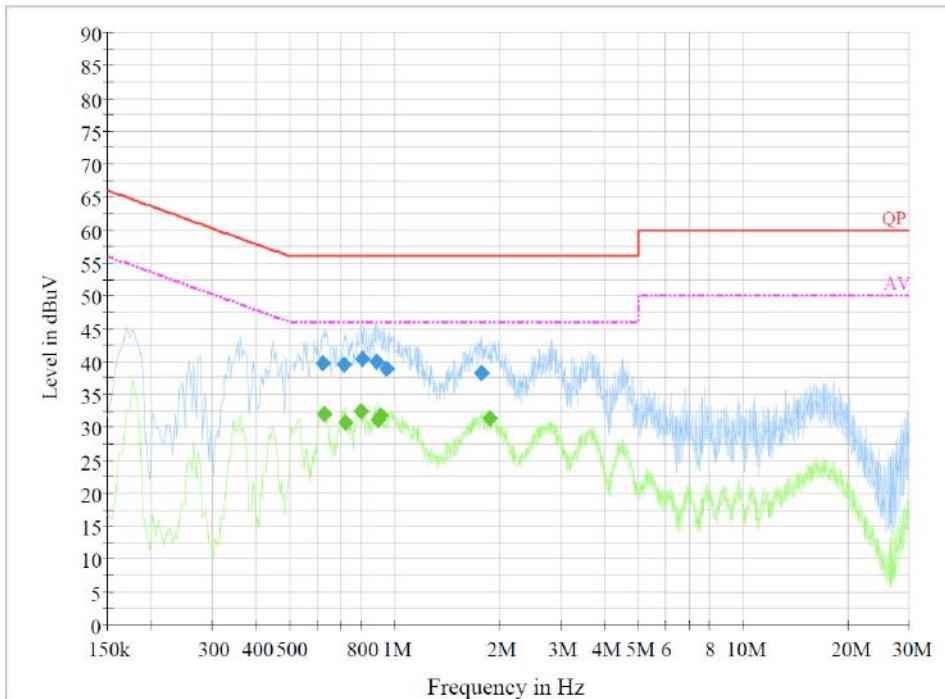**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.620550	39.8	9.000	N	20.4	16.2	56.0
0.715170	39.5	9.000	N	20.4	16.5	56.0
0.809970	40.4	9.000	N	20.4	15.6	56.0
0.888650	40.0	9.000	N	20.3	16.0	56.0
0.947990	38.8	9.000	N	20.4	17.2	56.0
1.775450	38.2	9.000	N	20.6	17.8	56.0


Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.626000	32.1	9.000	N	20.4	13.9	46.0
0.722000	30.8	9.000	N	20.4	15.2	46.0
0.798000	32.5	9.000	N	20.4	13.5	46.0
0.894000	31.2	9.000	N	20.3	14.8	46.0
0.914000	31.7	9.000	N	20.3	14.3	46.0
1.878000	31.4	9.000	N	20.6	14.6	46.0

For Adapter 3

AC 120V/60 Hz, Line

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	<i>Macy - Sh</i>
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

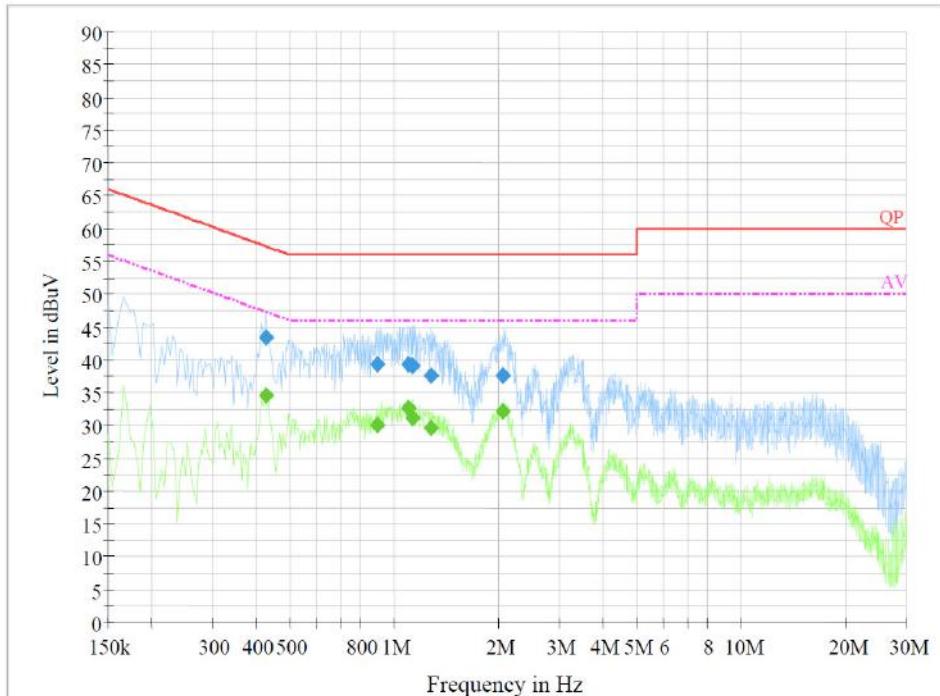

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.427610	43.4	9.000	L1	20.4	13.9	57.3
0.892530	39.3	9.000	L1	20.4	16.7	56.0
1.105470	39.3	9.000	L1	20.4	16.7	56.0
1.132870	39.0	9.000	L1	20.4	17.0	56.0
1.274830	37.7	9.000	L1	20.3	18.3	56.0
2.054710	37.6	9.000	L1	20.4	18.4	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.427610	34.6	9.000	L1	20.4	12.7	47.3
0.892530	30.0	9.000	L1	20.4	16.0	46.0
1.105470	33.8	9.000	L1	20.4	12.2	46.0
1.132870	31.1	9.000	L1	20.4	14.9	46.0
1.274830	29.7	9.000	L1	20.3	16.3	46.0
2.054710	32.6	9.000	L1	20.4	13.4	46.0

AC 120V/60 Hz, Neutral

Project No.:	2401Y48404E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SGE-1	Tested By:	Macy - Shc
Test Mode:	EDR (8DPSK) Low Channel	Date:	2024.12.10

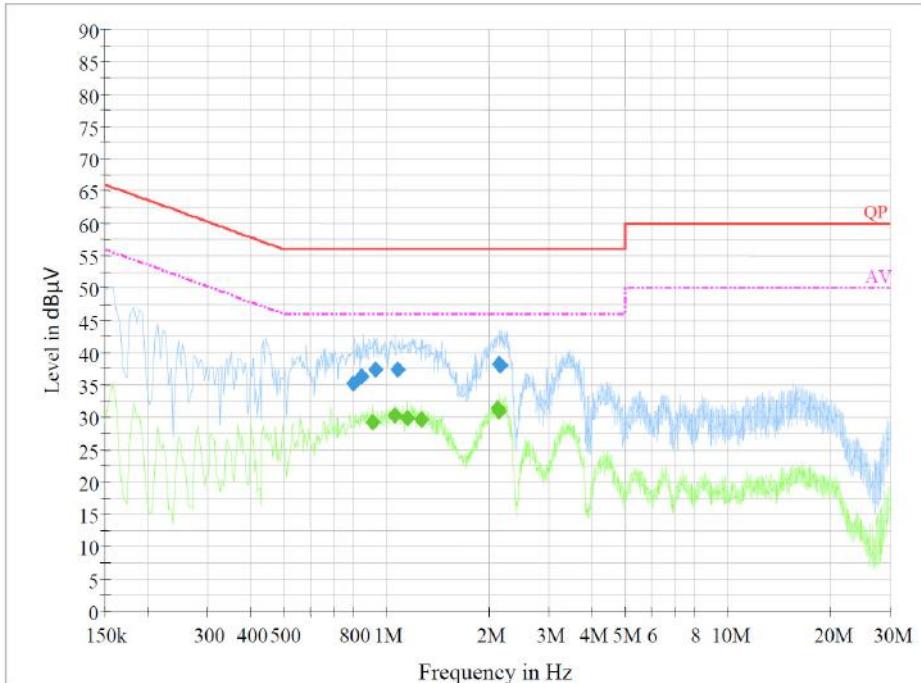**Final Result 1**

Frequency (MHz)	QuasiPeak (dB µV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.801910	35.3	9.000	N	20.4	20.7	56.0
0.849130	36.3	9.000	N	20.4	19.7	56.0
0.927870	37.3	9.000	N	20.3	18.7	56.0
1.077930	37.4	9.000	N	20.4	18.6	56.0
2.138290	38.2	9.000	N	20.6	17.8	56.0
2.161150	37.9	9.000	N	20.6	18.1	56.0

Final Result 2

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.910000	29.2	9.000	N	20.3	16.8	46.0
1.062000	30.3	9.000	N	20.4	15.7	46.0
1.150000	29.9	9.000	N	20.4	16.1	46.0
1.262000	29.5	9.000	N	20.4	16.5	46.0
2.114000	31.4	9.000	N	20.6	14.6	46.0
2.142000	30.9	9.000	N	20.6	15.1	46.0


FCC §15.209, §15.205 & §15.247(D) & RSS-247§ 5.5 - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247§ 5.5; RSS-GEN § 8.10


EUT Setup

9 kHz-30MHz:

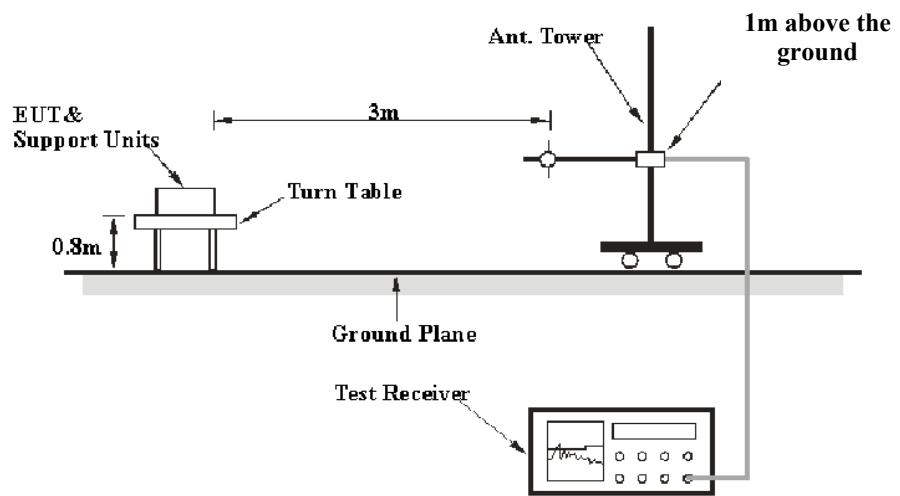

30MHz-1GHz:

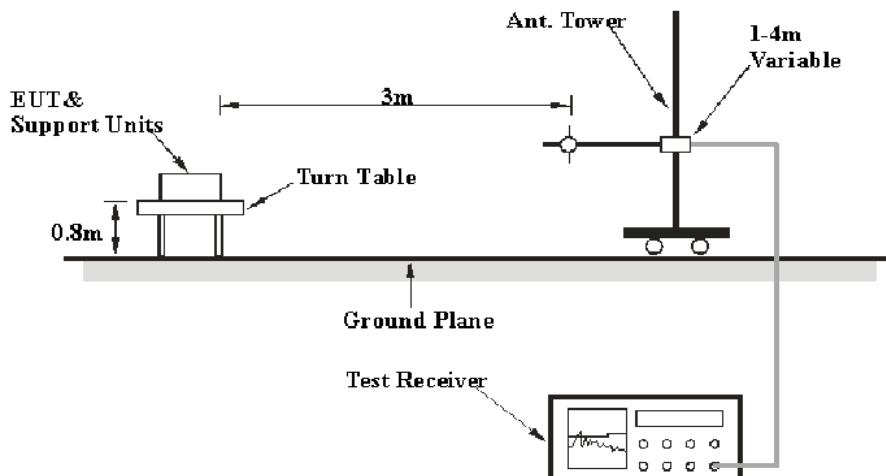

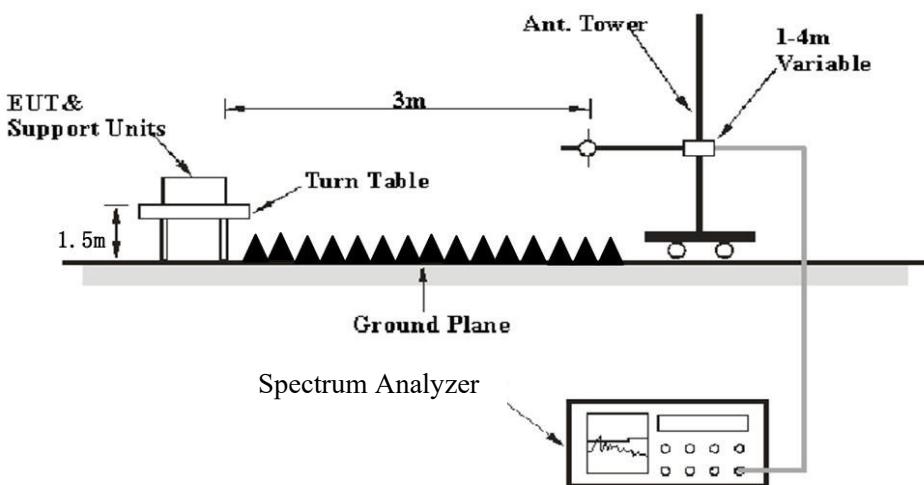Above 1GHz:

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	Harmonics & Band Edge			
	1MHz	3 MHz	/	PK
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)			
	Other Emissions			
	1MHz	3 MHz	/	PK
	1MHz	≥ 10 Hz	/	Average

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time=N1*L1+N2*L2+...Nn-1*Ln-1+Nn*Ln,
Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz–30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~25 °C
Relative Humidity:	50~54 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-10-29 for below 1GHz and Zenos Qiao on 2024-10-27 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.


The spurious emission from 9 kHz–30MHz of IC RSS-247 standard, the unit of final result on the test plots are dB μ V/m, so the limit should be added by 51,5 dB from dB μ A/m to dB μ V/m.

9 kHz-30MHz: (Maximum output power mode, EDR Mode (8DPSK) Low channel; Worst case is parallel)

Note: When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.


Powered by Type-C:

For Adapter 1

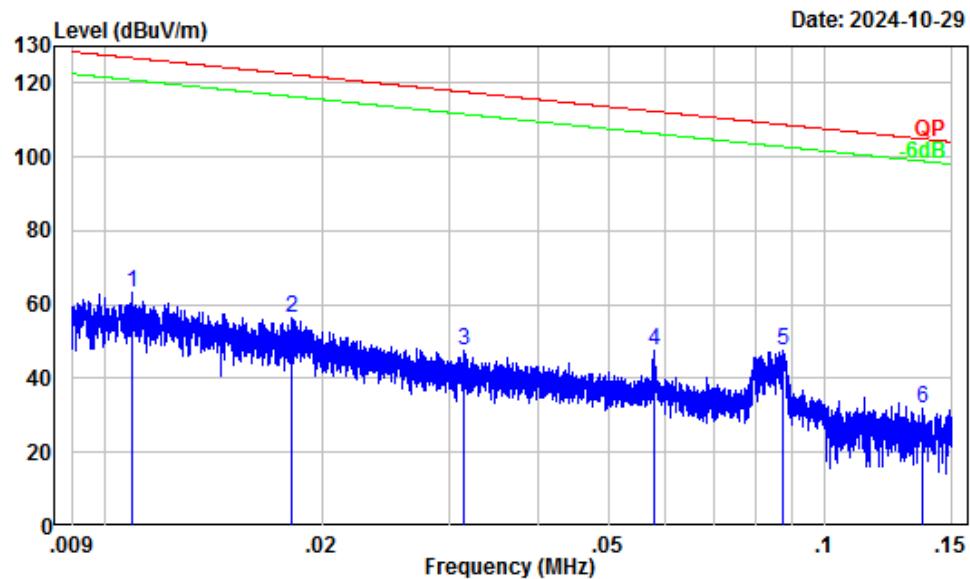

Site : Chamber A
 Condition : 3m
 Project Number: 2401Y48404E-RF
 Test Mode : BT Transmitting
 Tester : Anson Su


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.01	37.22	26.18	63.40	126.84 -63.44 Peak
2	0.02	33.50	22.80	56.30	122.40 -66.10 Peak
3	0.03	27.15	20.35	47.50	117.64 -70.14 Peak
4	0.06	22.01	25.45	47.46	112.36 -64.90 Peak
5	0.09	18.28	29.09	47.37	108.75 -61.38 Peak
6	0.14	15.35	16.77	32.12	104.90 -72.78 Peak

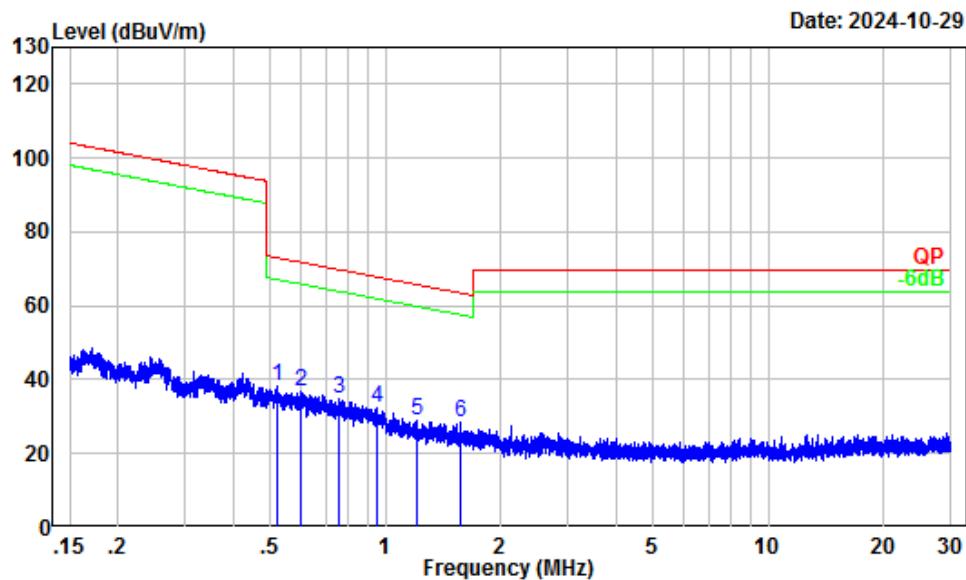

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.52	3.22	35.19	38.41	73.25 -34.84 Peak
2	0.60	2.23	34.73	36.96	71.93 -34.97 Peak
3	0.76	0.39	34.31	34.70	69.93 -35.23 Peak
4	0.95	-1.22	33.61	32.39	67.92 -35.53 Peak
5	1.21	-2.31	31.42	29.11	65.80 -36.69 Peak
6	1.57	-3.56	31.77	28.21	63.49 -35.28 Peak

For Adapter 2

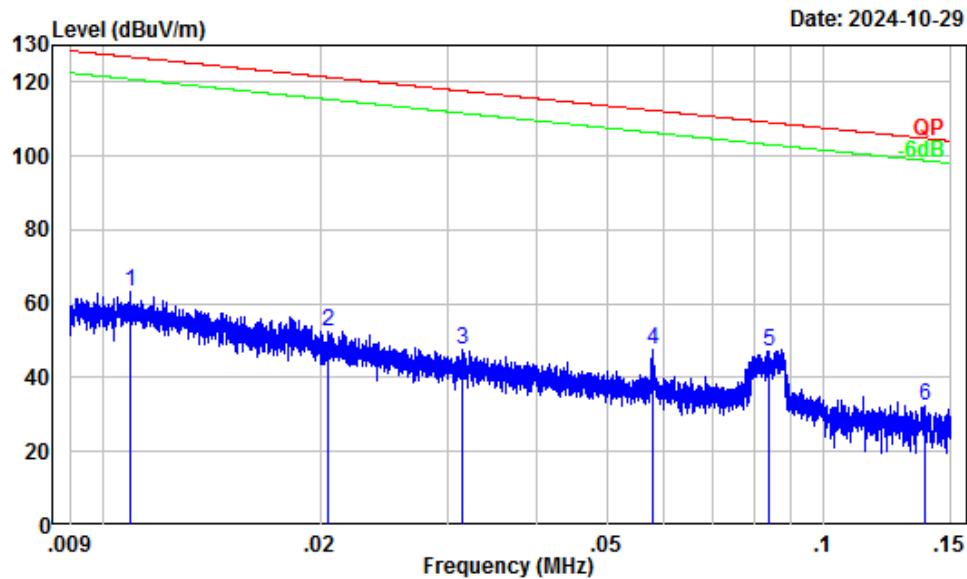

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.22	26.18	63.40	126.84	-63.44	Peak
2	0.02	32.30	20.32	52.62	121.35	-68.73	Peak
3	0.03	27.15	20.35	47.50	117.64	-70.14	Peak
4	0.06	22.01	25.45	47.46	112.36	-64.90	Peak
5	0.08	18.63	28.69	47.32	109.11	-61.79	Peak
6	0.14	15.27	16.99	32.26	104.80	-72.54	Peak

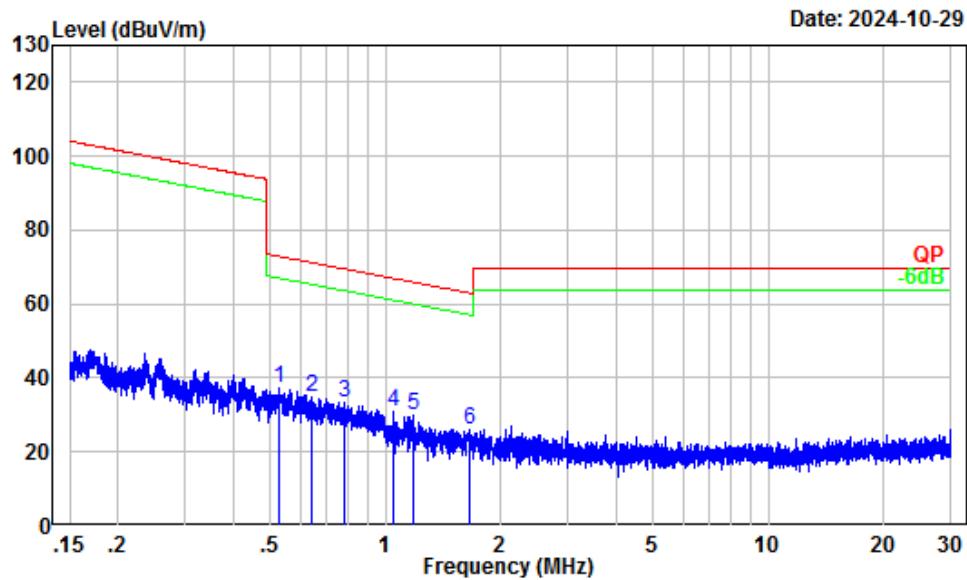

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.53	3.12	34.14	37.26	73.11 -35.85 Peak
2	0.64	1.78	32.83	34.61	71.40 -36.79 Peak
3	0.78	0.09	33.29	33.38	69.64 -36.26 Peak
4	1.05	-1.77	32.63	30.86	67.03 -36.17 Peak
5	1.18	-2.21	32.06	29.85	66.02 -36.17 Peak
6	1.67	-3.91	30.12	26.21	62.94 -36.73 Peak

For Adapter 3

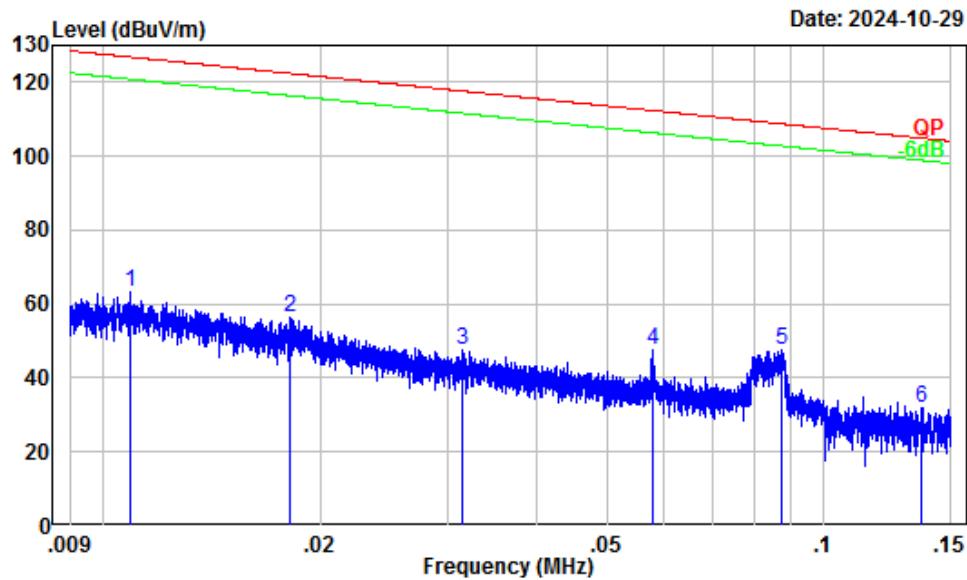

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.22	26.18	63.40	126.84	-63.44	Peak
2	0.02	33.50	22.80	56.30	122.40	-66.10	Peak
3	0.03	27.15	20.35	47.50	117.64	-70.14	Peak
4	0.06	22.01	25.45	47.46	112.36	-64.90	Peak
5	0.09	18.28	29.09	47.37	108.75	-61.38	Peak
6	0.14	15.35	16.77	32.12	104.90	-72.78	Peak

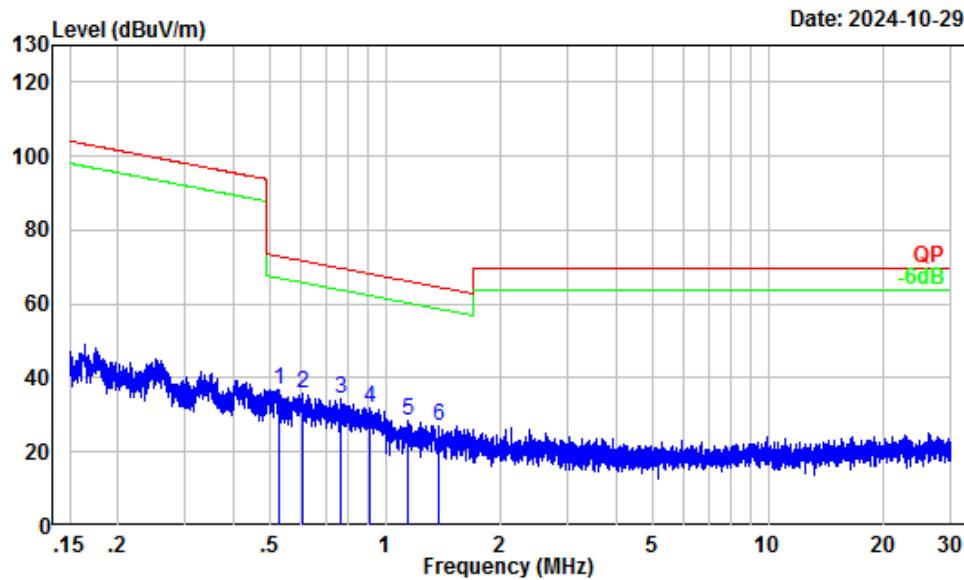


Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.53	3.14	33.59	36.73	73.13 -36.40 Peak
2	0.61	2.16	33.49	35.65	71.85 -36.20 Peak
3	0.76	0.32	34.07	34.39	69.86 -35.47 Peak
4	0.91	-0.96	32.61	31.65	68.26 -36.61 Peak
5	1.15	-2.11	30.58	28.47	66.23 -37.76 Peak
6	1.38	-2.93	30.13	27.20	64.59 -37.39 Peak


Powered by Charger:

For Adapter 1

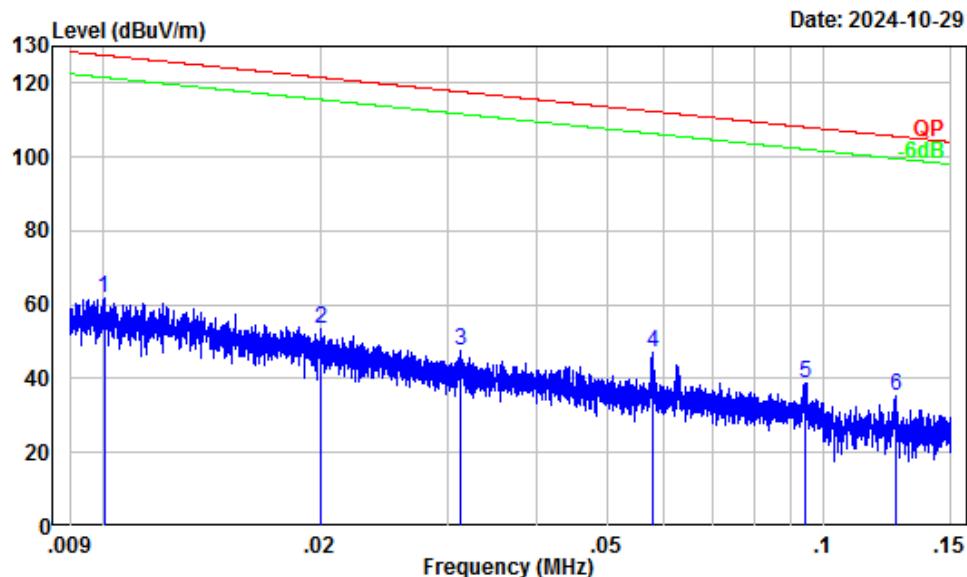

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dB _{uV}	dB _{uV/m}	dB _{uV/m}	dB	
1	0.01	37.67	24.05	61.72	127.57	-65.85	Peak
2	0.02	32.54	20.89	53.43	121.55	-68.12	Peak
3	0.03	27.17	20.42	47.59	117.67	-70.08	Peak
4	0.06	22.01	25.28	47.29	112.36	-65.07	Peak
5	0.09	17.64	21.35	38.99	108.14	-69.15	Peak
6	0.13	15.86	19.66	35.52	105.63	-70.11	Peak

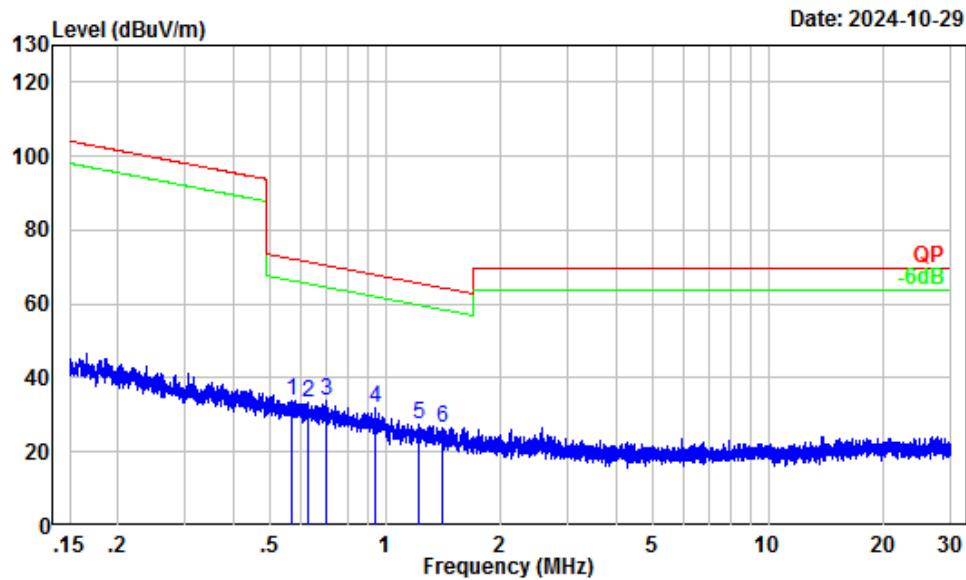

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.57	2.67	31.11	33.78	72.49	-38.71	Peak
2	0.63	1.91	31.45	33.36	71.56	-38.20	Peak
3	0.70	1.11	32.65	33.76	70.67	-36.91	Peak
4	0.94	-1.14	32.86	31.72	68.03	-36.31	Peak
5	1.22	-2.36	30.00	27.64	65.71	-38.07	Peak
6	1.41	-3.03	29.77	26.74	64.40	-37.66	Peak

For Adapter 2

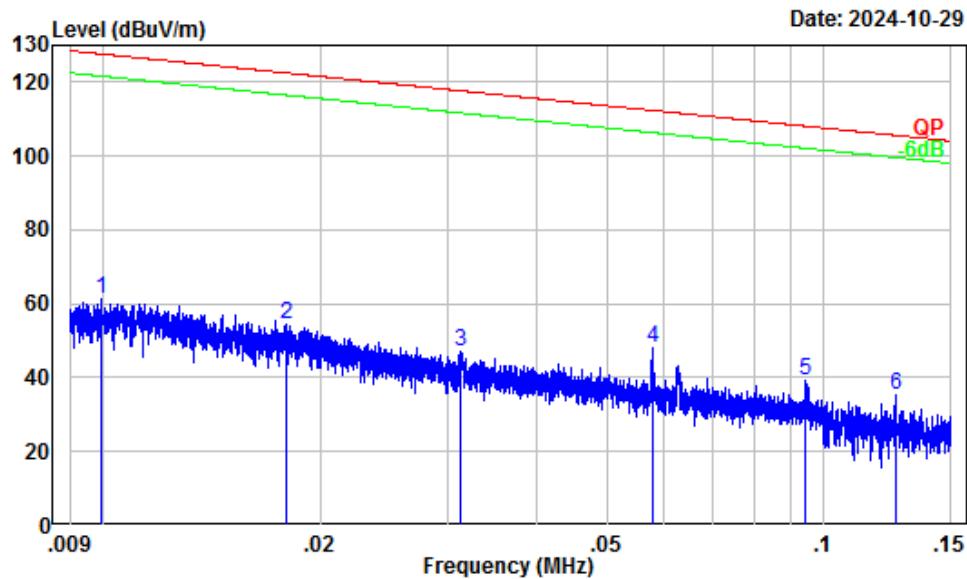

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.74	23.75	61.49	127.66	-66.17	Peak
2	0.02	33.61	21.04	54.65	122.50	-67.85	Peak
3	0.03	27.17	19.82	46.99	117.67	-70.68	Peak
4	0.06	22.00	26.09	48.09	112.35	-64.26	Peak
5	0.09	17.60	21.67	39.27	108.10	-68.83	Peak
6	0.13	15.85	19.34	35.19	105.62	-70.43	Peak

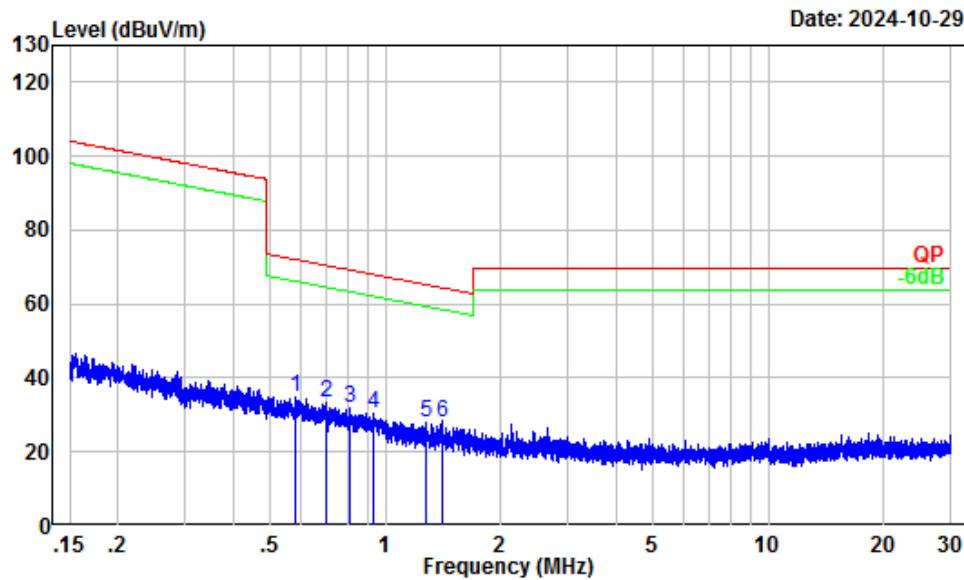

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.58	2.50	32.30	34.80	72.27 -37.47 Peak
2	0.70	1.09	32.09	33.18	70.64 -37.46 Peak
3	0.81	-0.18	32.14	31.96	69.35 -37.39 Peak
4	0.93	-1.05	31.64	30.59	68.15 -37.56 Peak
5	1.28	-2.57	30.63	28.06	65.27 -37.21 Peak
6	1.42	-3.04	31.01	27.97	64.39 -36.42 Peak

For Adapter 3

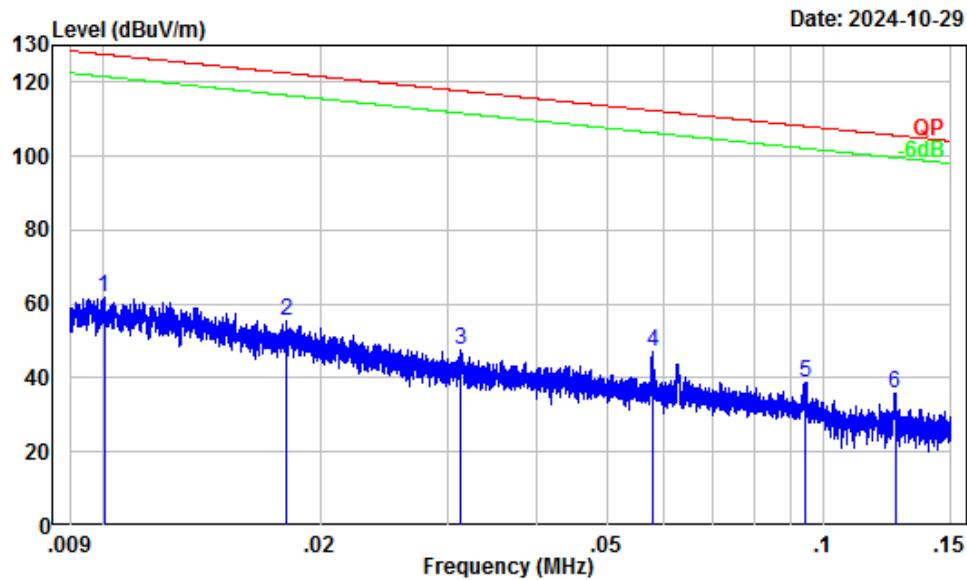

Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark	
			MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	0.01	37.67	24.05	61.72	127.57	-65.85	Peak	
2	0.02	33.61	22.00	55.61	122.50	-66.89	Peak	
3	0.03	27.19	20.61	47.80	117.68	-69.88	Peak	
4	0.06	22.01	25.28	47.29	112.36	-65.07	Peak	
5	0.09	17.64	21.35	38.99	108.14	-69.15	Peak	
6	0.13	15.86	20.16	36.02	105.63	-69.61	Peak	

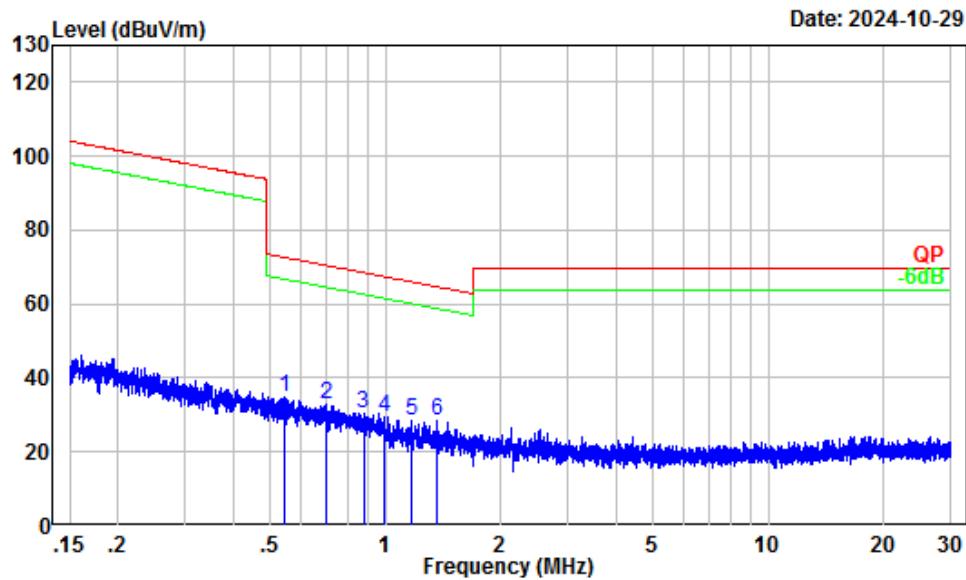


Site : Chamber A
Condition : 3m
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.55	2.92	31.73	34.65	72.83 -38.18 Peak
2	0.70	1.03	31.71	32.74	70.58 -37.84 Peak
3	0.88	-0.68	31.14	30.46	68.64 -38.18 Peak
4	0.99	-1.54	31.17	29.63	67.53 -37.90 Peak
5	1.17	-2.17	30.43	28.26	66.10 -37.84 Peak
6	1.36	-2.84	31.16	28.32	64.75 -36.43 Peak

30MHz-1GHz: (Maximum output power mode, EDR (8DPSK) Low Channel)**Powered by Type-C:**


For Adapter 1

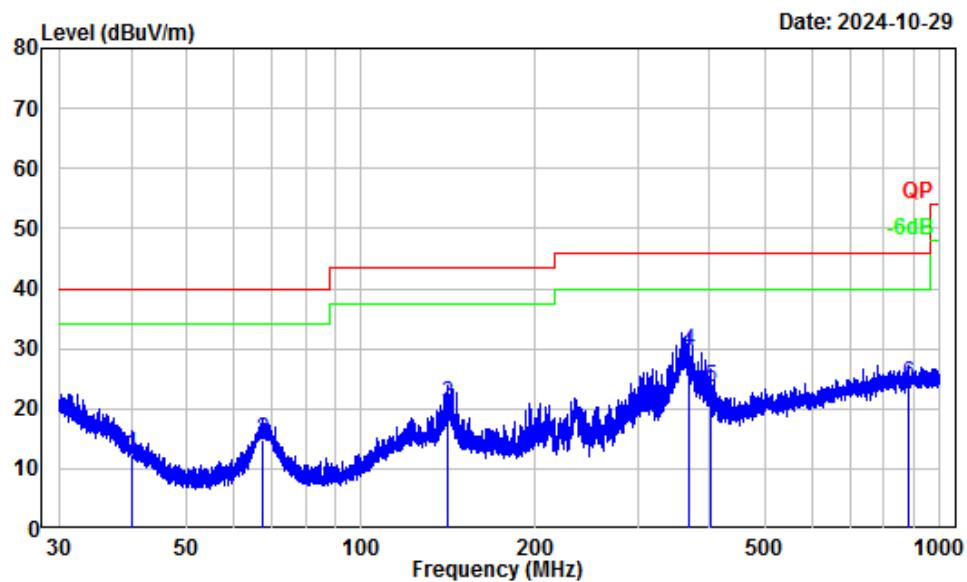Horizontal

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	40.13	-12.46	24.71	12.25	40.00	-27.75	QP
2	67.56	-17.88	32.69	14.81	40.00	-25.19	QP
3	141.33	-11.92	32.64	20.72	43.50	-22.78	QP
4	368.76	-9.55	39.07	29.52	46.00	-16.48	QP
5	402.19	-8.33	31.89	23.56	46.00	-22.44	QP
6	884.89	-1.42	25.54	24.12	46.00	-21.88	QP


Vertical

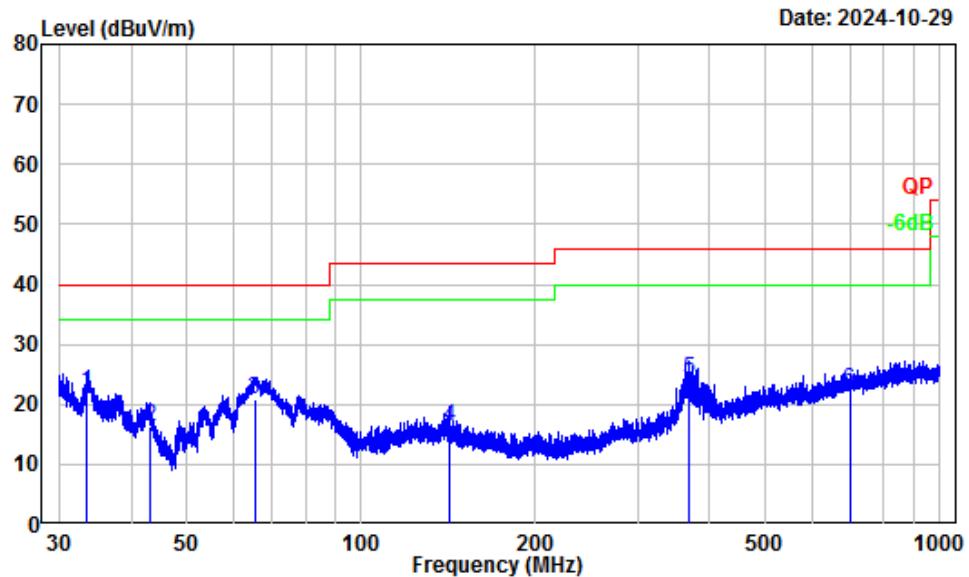

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	33.61	-8.01	30.00	21.99	40.00	-18.01	QP
2	43.14	-14.67	30.90	16.23	40.00	-23.77	QP
3	65.34	-17.96	38.89	20.93	40.00	-19.07	QP
4	141.58	-11.95	28.37	16.42	43.50	-27.08	QP
5	368.76	-9.55	33.65	24.10	46.00	-21.90	QP
6	698.08	-3.53	25.86	22.33	46.00	-23.67	QP


For Adapter 2

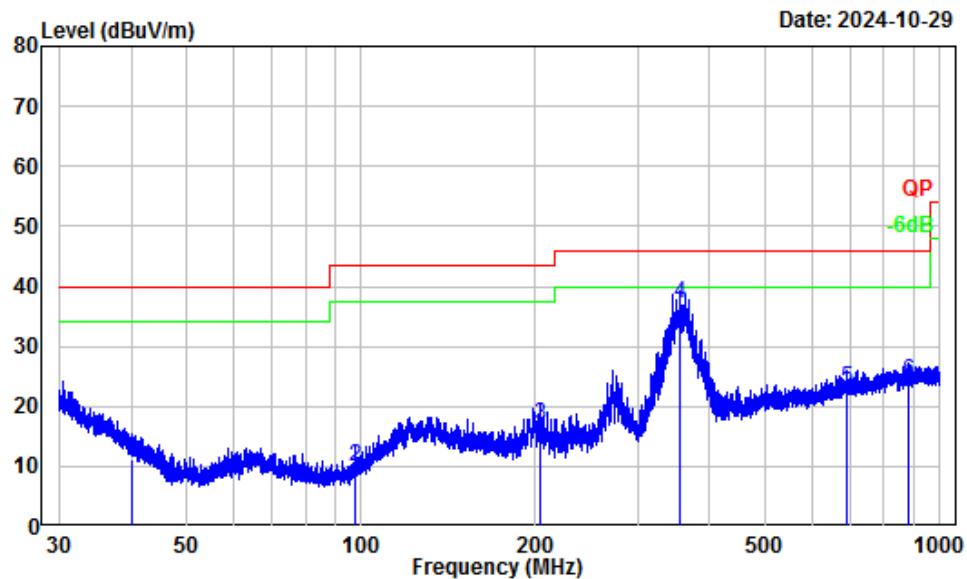Horizontal

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	40.26	-12.55	23.83	11.28	40.00 -28.72 QP
2	97.67	-16.61	26.53	9.92	43.50 -33.58 QP
3	204.33	-13.39	30.43	17.04	43.50 -26.46 QP
4	356.36	-9.99	47.00	37.01	46.00 -8.99 QP
5	689.56	-3.67	26.75	23.08	46.00 -22.92 QP
6	884.89	-1.42	25.51	24.09	46.00 -21.91 QP


Vertical

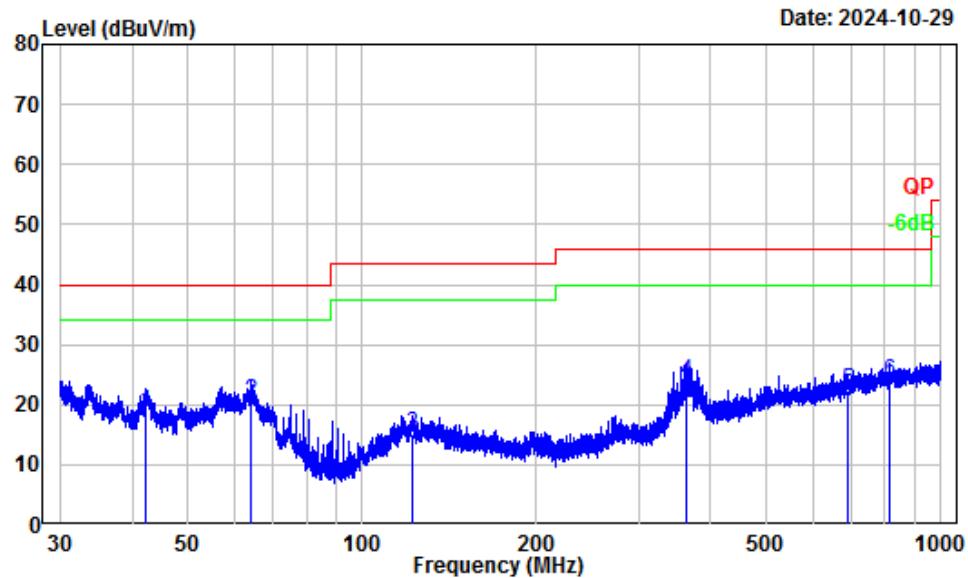

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.21	-14.02	32.62	18.60	40.00	-21.40	QP
2	64.12	-18.00	38.61	20.61	40.00	-19.39	QP
3	122.24	-11.22	26.32	15.10	43.50	-28.40	QP
4	362.35	-9.79	33.51	23.72	46.00	-22.28	QP
5	688.66	-3.67	25.90	22.23	46.00	-23.77	QP
6	816.33	-2.04	25.77	23.73	46.00	-22.27	QP


For Adapter 3

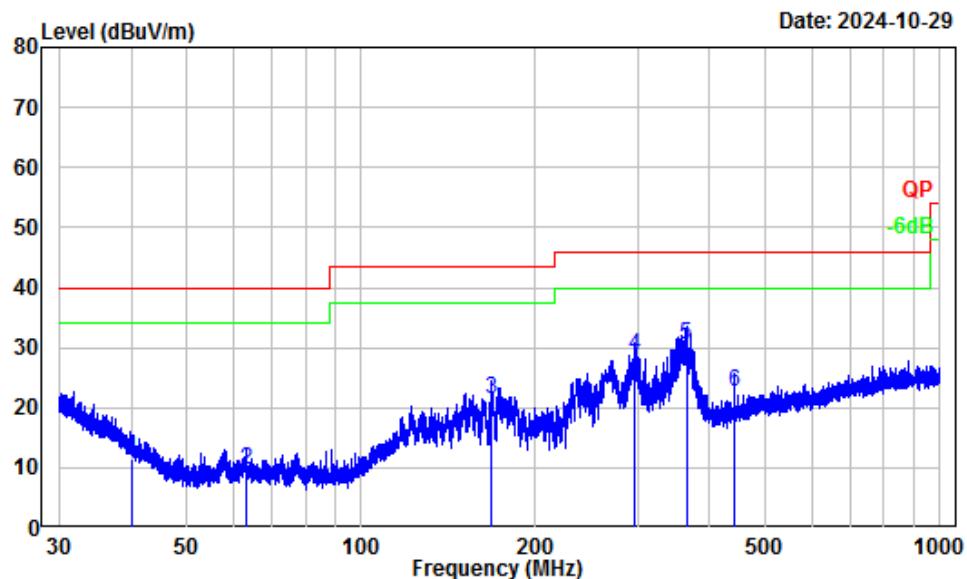Horizontal

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.10	-12.44	23.96	11.52	40.00	-28.48	QP
2	63.09	-18.10	27.82	9.72	40.00	-30.28	QP
3	167.90	-13.00	34.33	21.33	43.50	-22.17	QP
4	297.22	-11.21	39.81	28.60	46.00	-17.40	QP
5	364.42	-9.68	40.19	30.51	46.00	-15.49	QP
6	442.52	-7.60	30.37	22.77	46.00	-23.23	QP

Vertical

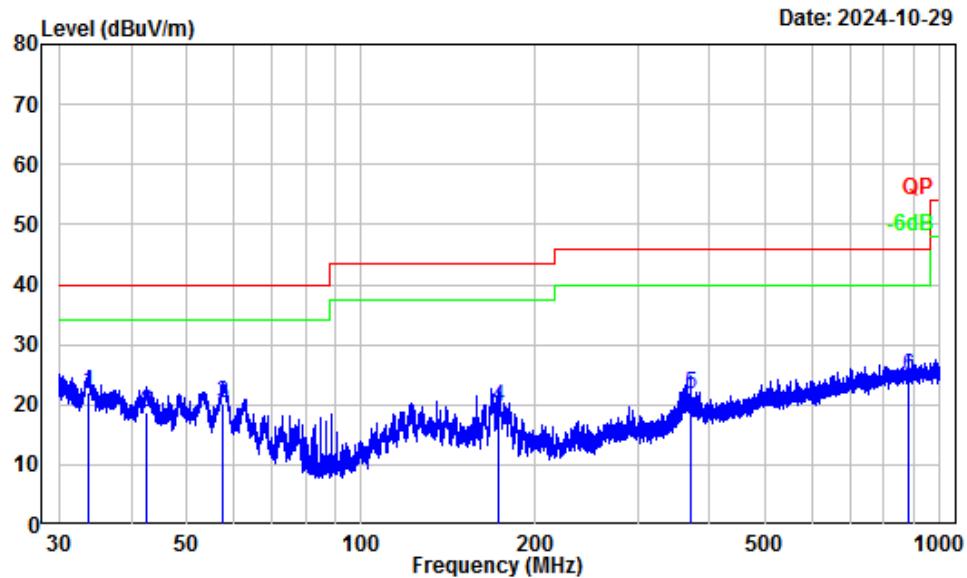


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Limit	Remark
		MHz	dB/m	dBuV	dBuV/m			
1	33.81	-8.15	30.30	22.15	40.00	-17.85	QP	
2	42.53	-14.25	33.02	18.77	40.00	-21.23	QP	
3	57.44	-18.28	38.40	20.12	40.00	-19.88	QP	
4	172.90	-13.28	32.80	19.52	43.50	-23.98	QP	
5	370.38	-9.50	31.33	21.83	46.00	-24.17	QP	
6	879.86	-1.52	26.40	24.88	46.00	-21.12	QP	

Powered by Charger:

For Adapter 1


Horizontal

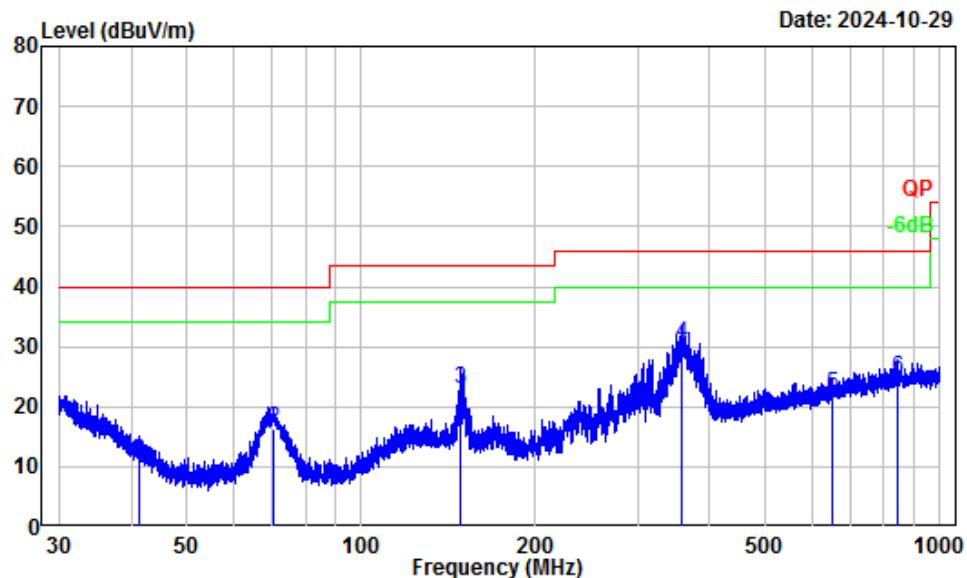

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dB _{uV}	dB _{uV/m}	dB _{uV/m}	dB	
1	41.26	-13.28	24.21	10.93	40.00	-29.07	QP
2	70.37	-17.87	34.21	16.34	40.00	-23.66	QP
3	148.25	-12.37	35.41	23.04	43.50	-20.46	QP
4	356.83	-9.98	40.39	30.41	46.00	-15.59	QP
5	653.95	-4.04	26.08	22.04	46.00	-23.96	QP
6	845.09	-1.73	26.39	24.66	46.00	-21.34	QP


Vertical

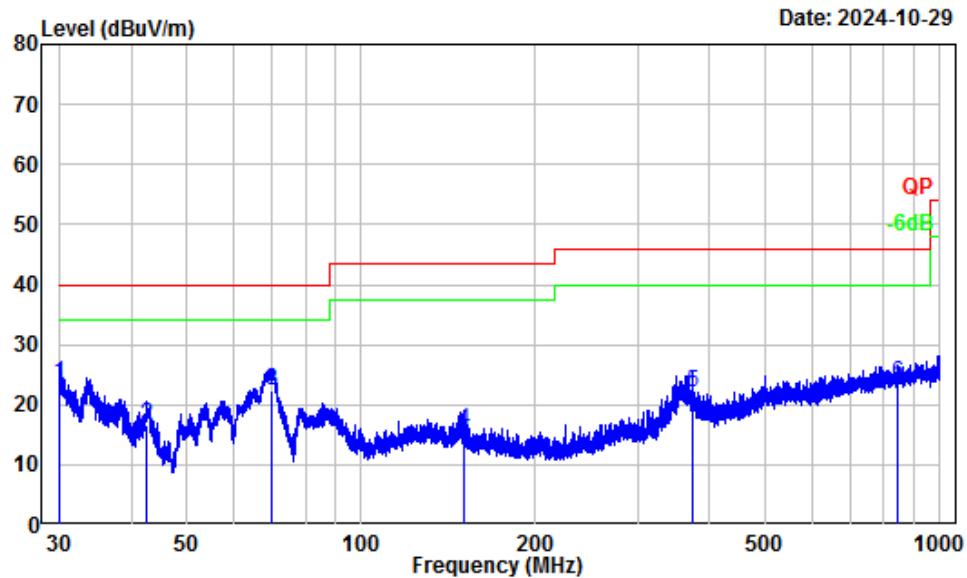

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	30.08	-6.00	29.60	23.60	40.00	-16.40	QP
2	42.56	-14.27	30.85	16.58	40.00	-23.42	QP
3	69.78	-17.87	40.12	22.25	40.00	-17.75	QP
4	150.14	-12.46	28.22	15.76	43.50	-27.74	QP
5	374.62	-9.31	31.47	22.16	46.00	-23.84	QP
6	848.06	-1.73	25.29	23.56	46.00	-22.44	QP


For Adapter 2

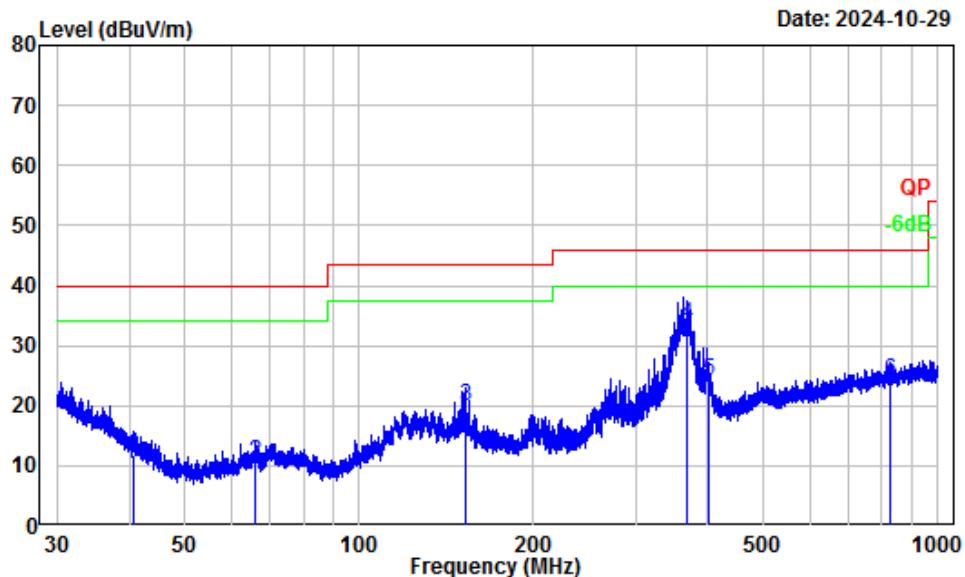Horizontal

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.67	-12.84	24.55	11.71	40.00	-28.29	QP
2	66.15	-17.89	28.48	10.59	40.00	-29.41	QP
3	153.00	-12.55	32.36	19.81	43.50	-23.69	QP
4	368.27	-9.56	42.99	33.43	46.00	-12.57	QP
5	401.84	-8.35	32.53	24.18	46.00	-21.82	QP
6	829.31	-1.93	26.12	24.19	46.00	-21.81	QP


Vertical

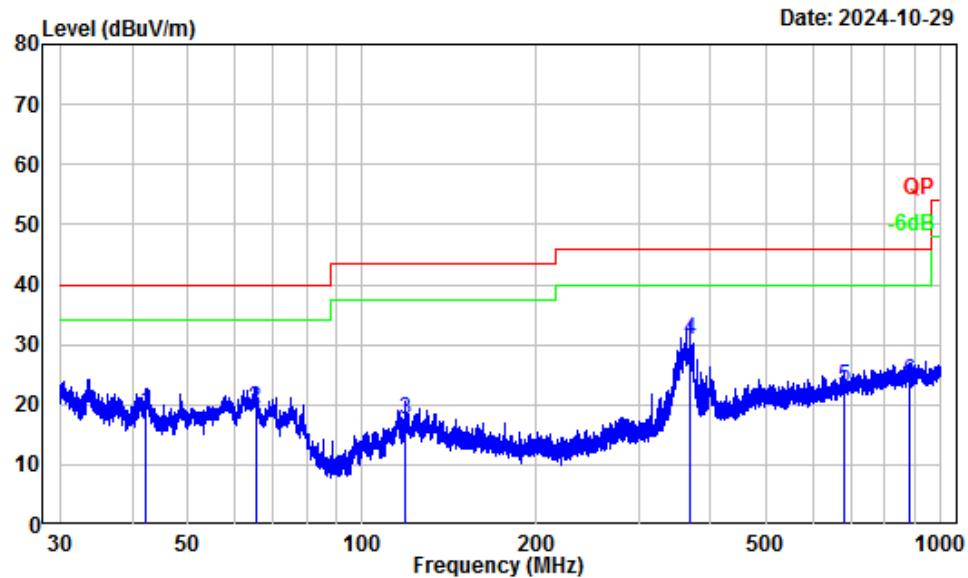

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	42.36	-14.12	32.71	18.59	40.00	-21.41	QP
2	65.34	-17.96	37.17	19.21	40.00	-20.79	QP
3	118.50	-11.62	29.15	17.53	43.50	-25.97	QP
4	368.27	-9.56	40.36	30.80	46.00	-15.20	QP
5	682.05	-3.69	26.48	22.79	46.00	-23.21	QP
6	882.57	-1.46	25.39	23.93	46.00	-22.07	QP


For Adapter 3

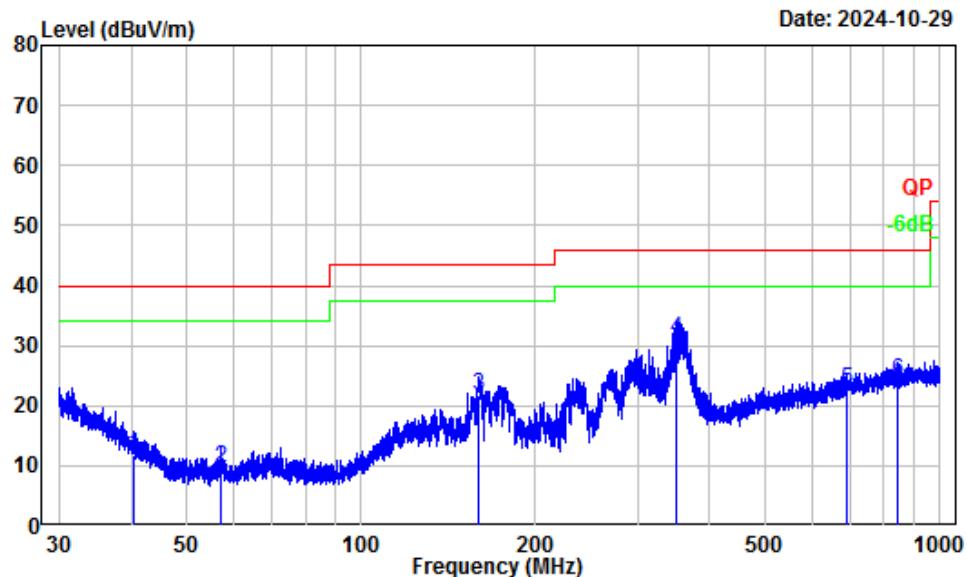Horizontal

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.31	-12.59	24.37	11.78	40.00	-28.22	QP
2	57.12	-18.31	27.84	9.53	40.00	-30.47	QP
3	159.92	-12.72	34.40	21.68	43.50	-21.82	QP
4	350.48	-10.15	41.20	31.05	46.00	-14.95	QP
5	688.96	-3.67	26.25	22.58	46.00	-23.42	QP
6	848.06	-1.73	25.76	24.03	46.00	-21.97	QP

Vertical

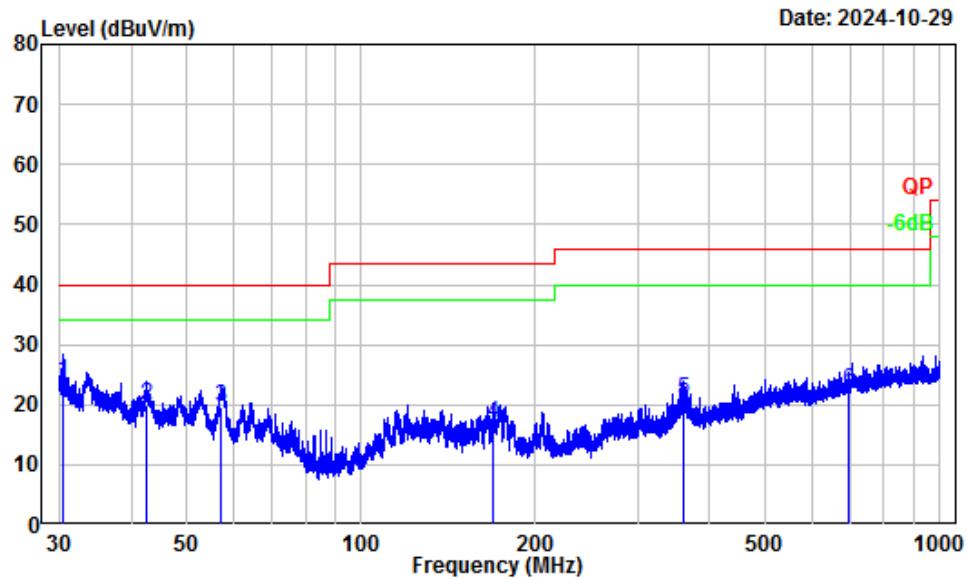

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y48404E-RF
Test Mode : BT Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	30.44	-6.18	29.99	23.81	40.00	-16.19	QP
2	42.58	-14.29	34.25	19.96	40.00	-20.04	QP
3	56.99	-18.31	38.07	19.76	40.00	-20.24	QP
4	168.64	-13.06	30.07	17.01	43.50	-26.49	QP
5	360.45	-9.87	30.61	20.74	46.00	-25.26	QP
6	694.11	-3.56	25.98	22.42	46.00	-23.58	QP

Above 1GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)					
	Reading (dB μ V)	PK/Ave										
Maximum output power mode, EDR (8DPSK)												
Low Channel 2402MHz												
2381.60	54.89	PK	H	-3.19	51.70	74	-22.30					
2367.78	54.36	PK	V	-3.17	51.19	74	-22.81					
4804.00	47.05	PK	H	2.42	49.47	74	-24.53					
4804.00	47.64	PK	V	2.42	50.06	74	-23.94					
Middle Channel 2441MHz												
4882.00	47.98	PK	H	2.58	50.56	74	-23.44					
4882.00	48.51	PK	V	2.58	51.09	74	-22.91					
High Channel 2480MHz												
2483.69	55.64	PK	H	-3.17	52.47	74	-21.53					
2483.78	55.21	PK	V	-3.17	52.04	74	-21.96					
4960.00	48.56	PK	H	2.68	51.24	74	-22.76					
4960.00	49.02	PK	V	2.68	51.70	74	-22.30					

Note:


Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

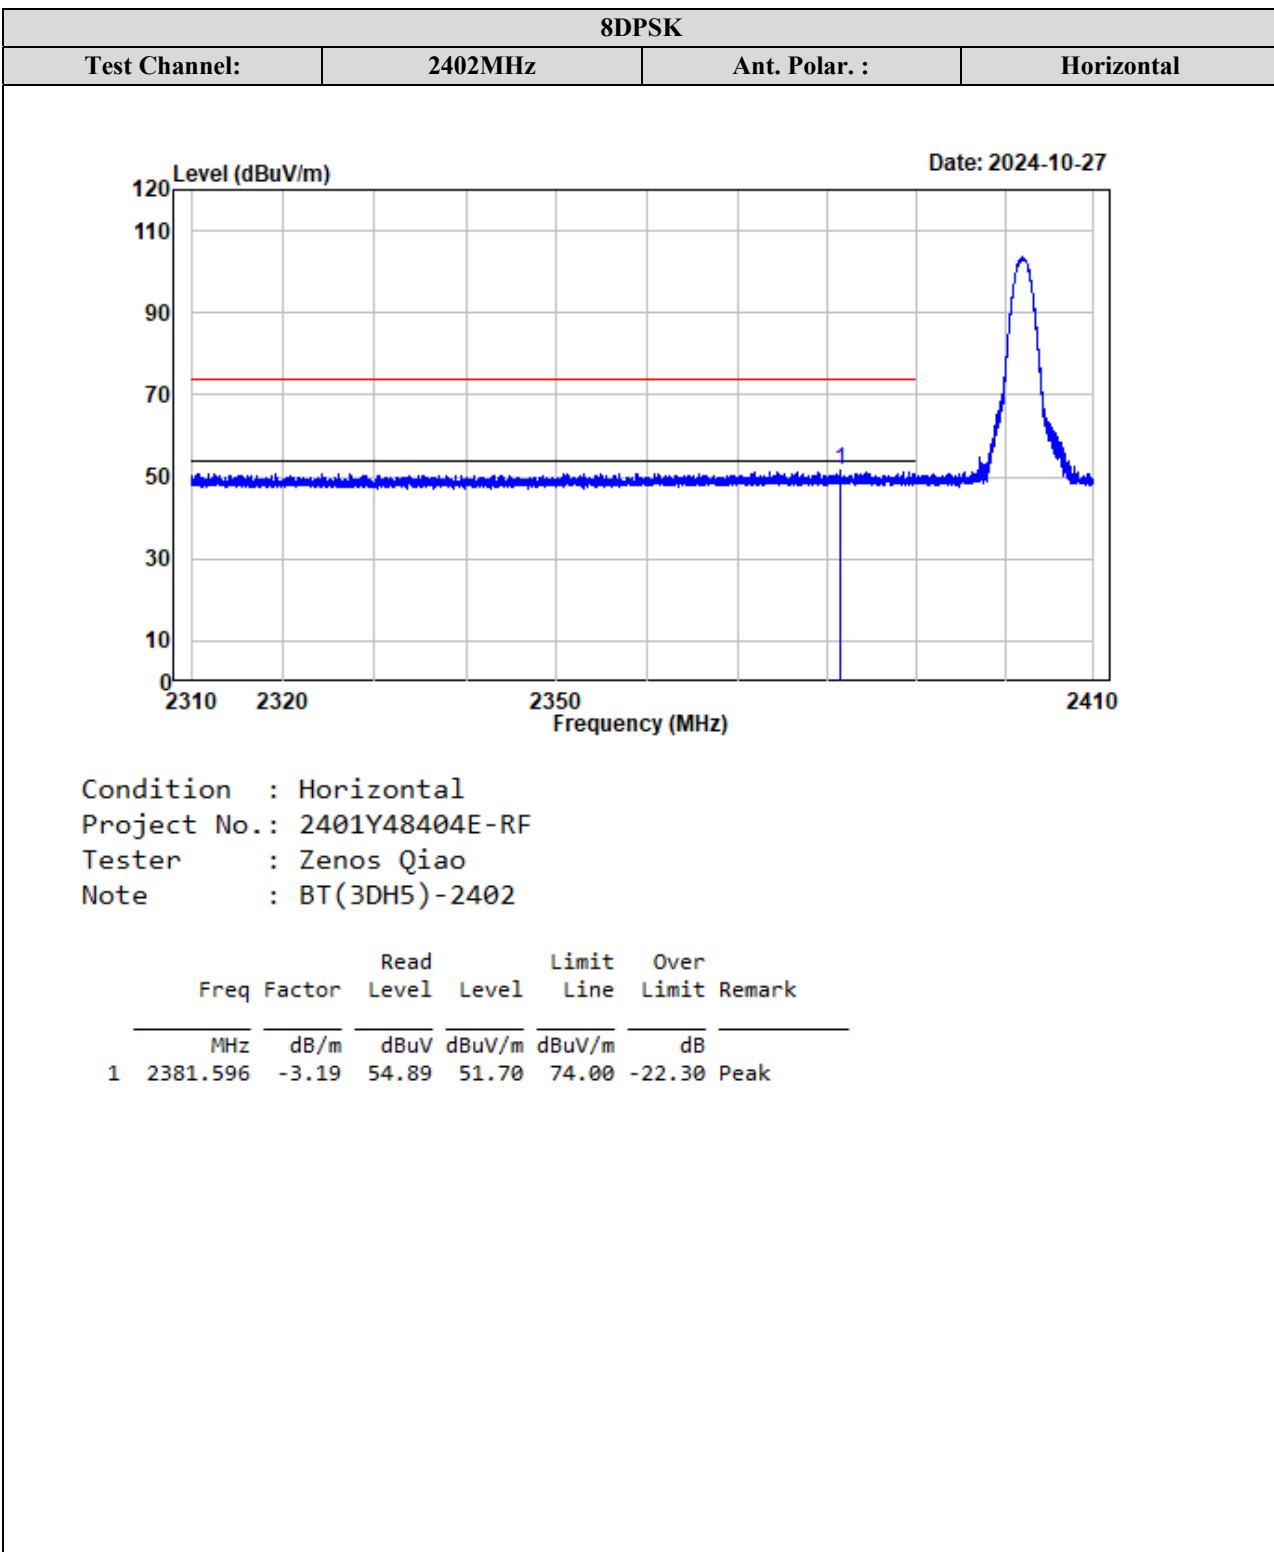Test plots for Band Edge Measurements (Radiated):

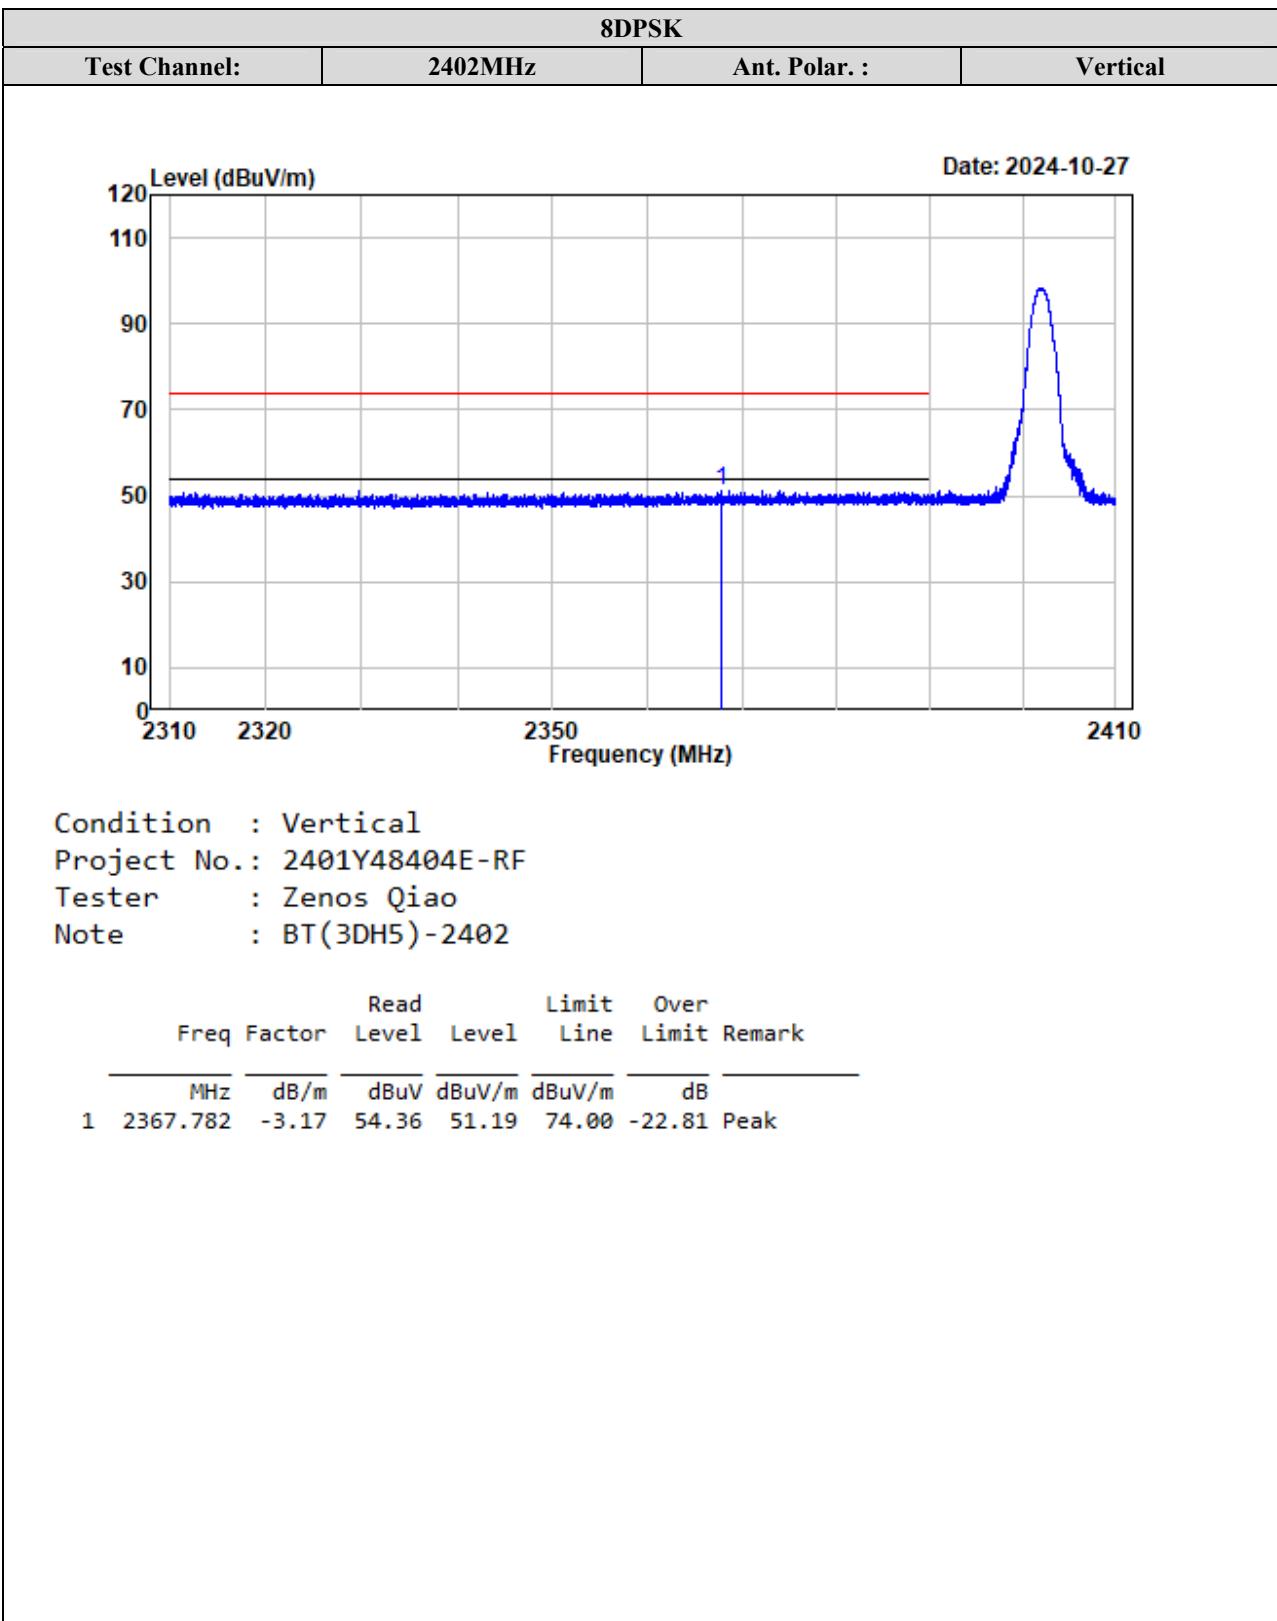


Test Channel:	2480MHz	Ant. Polar. :	Horizontal
---------------	---------	---------------	------------

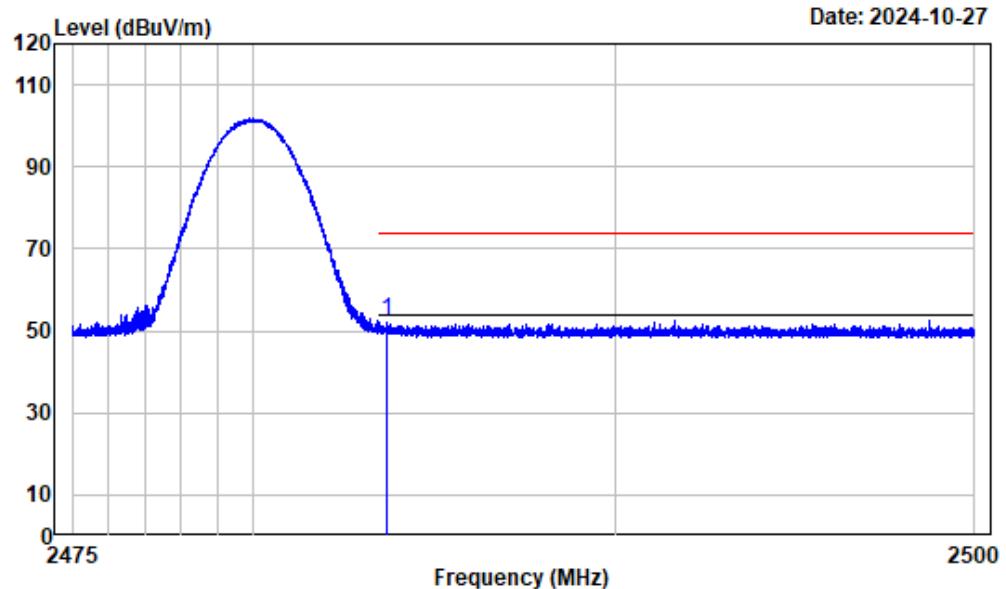



Condition : Horizontal
Project No.: 2401Y48404E-RF
Tester : Zenos Qiao
Note : BT(3DH5)-2480


Freq	Factor	Read		Limit		Over Line	Limit	Remark
		Level	Level	Line	dB			
1	2483.692	-3.17	55.64	52.47	74.00	-21.53	Peak	

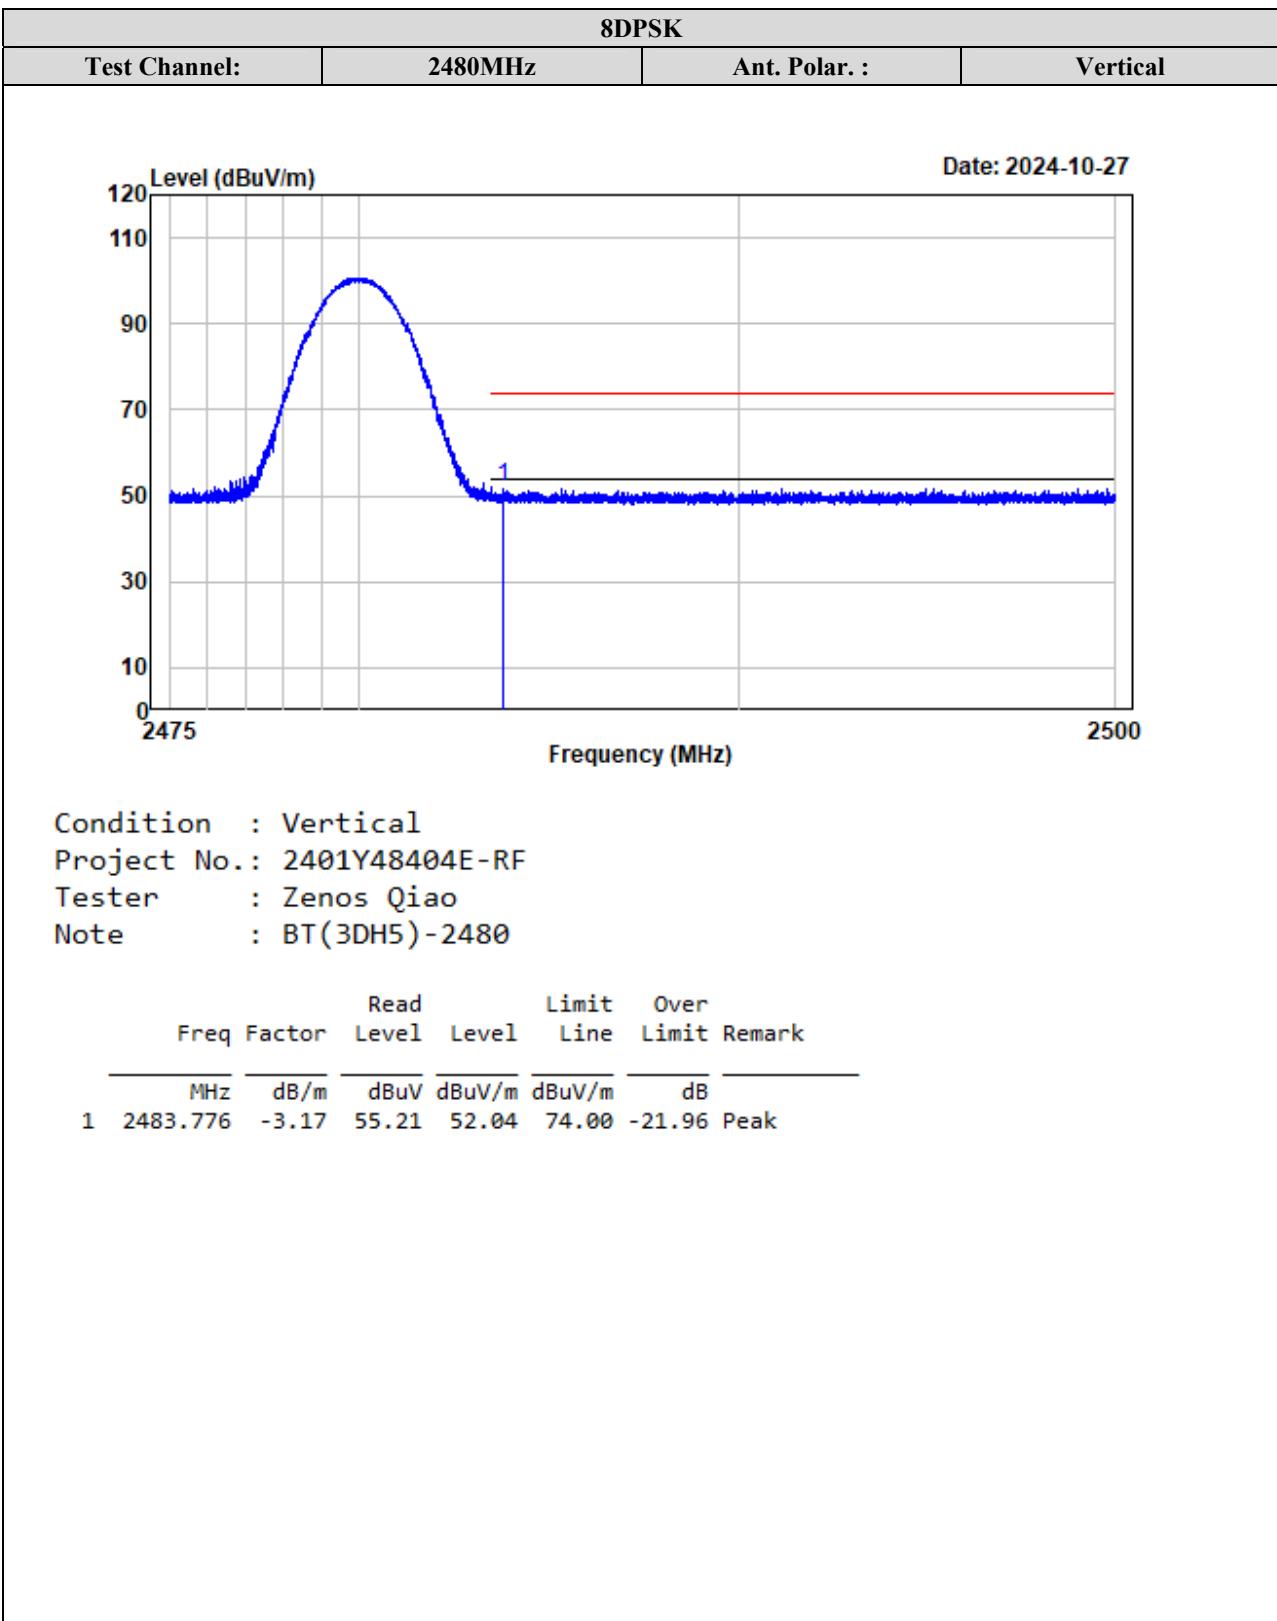



Listed with the worst harmonic margin test plot:

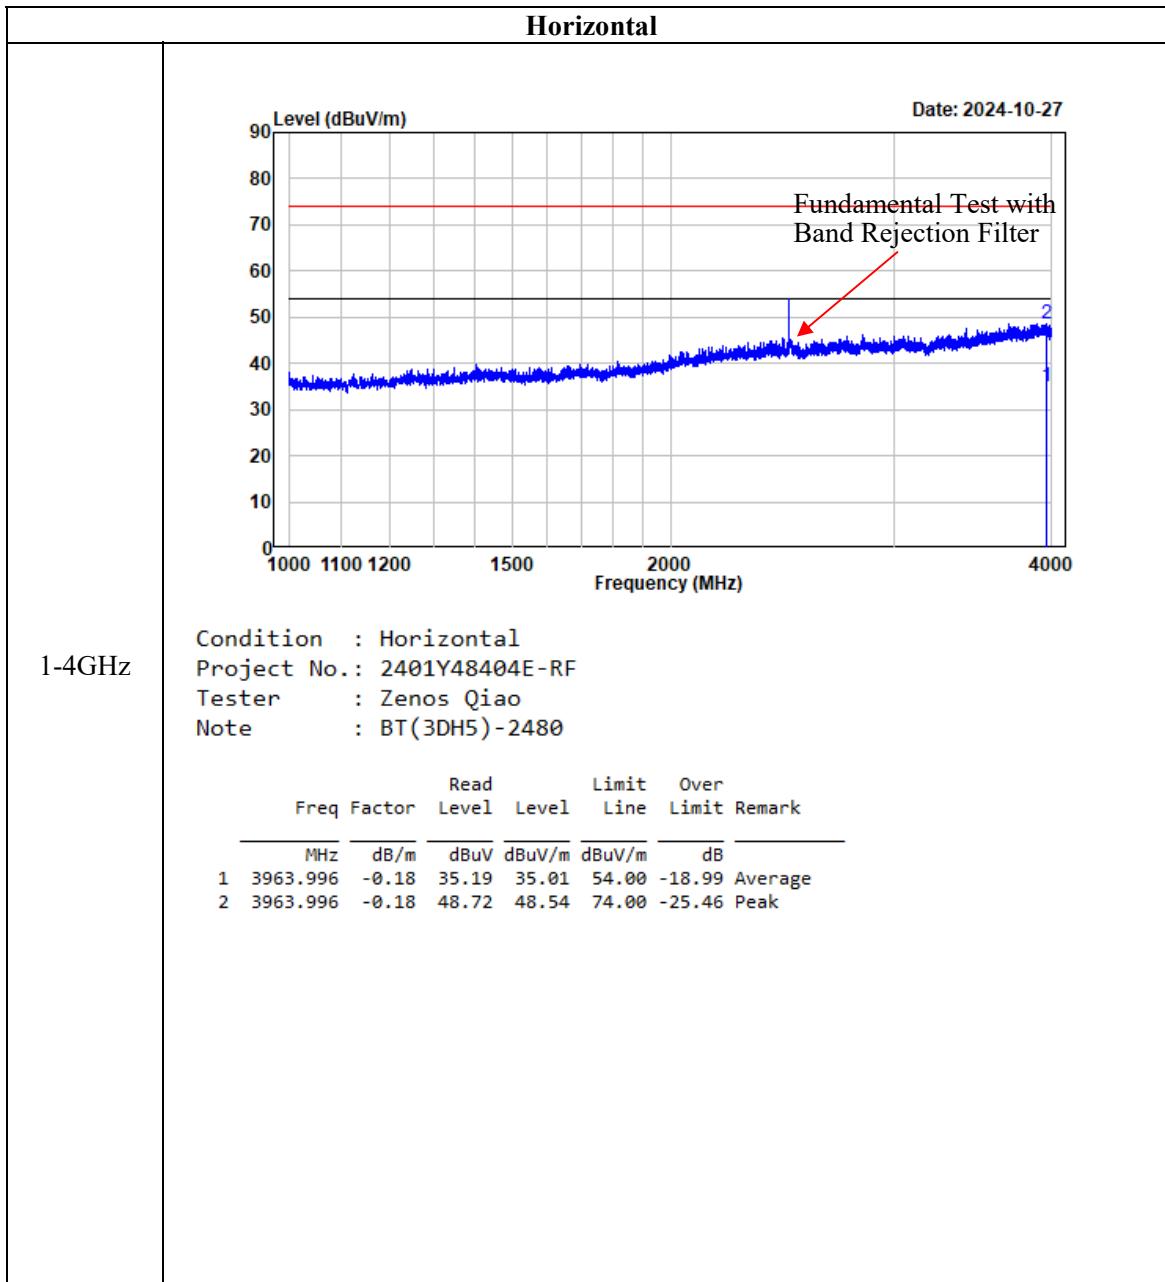


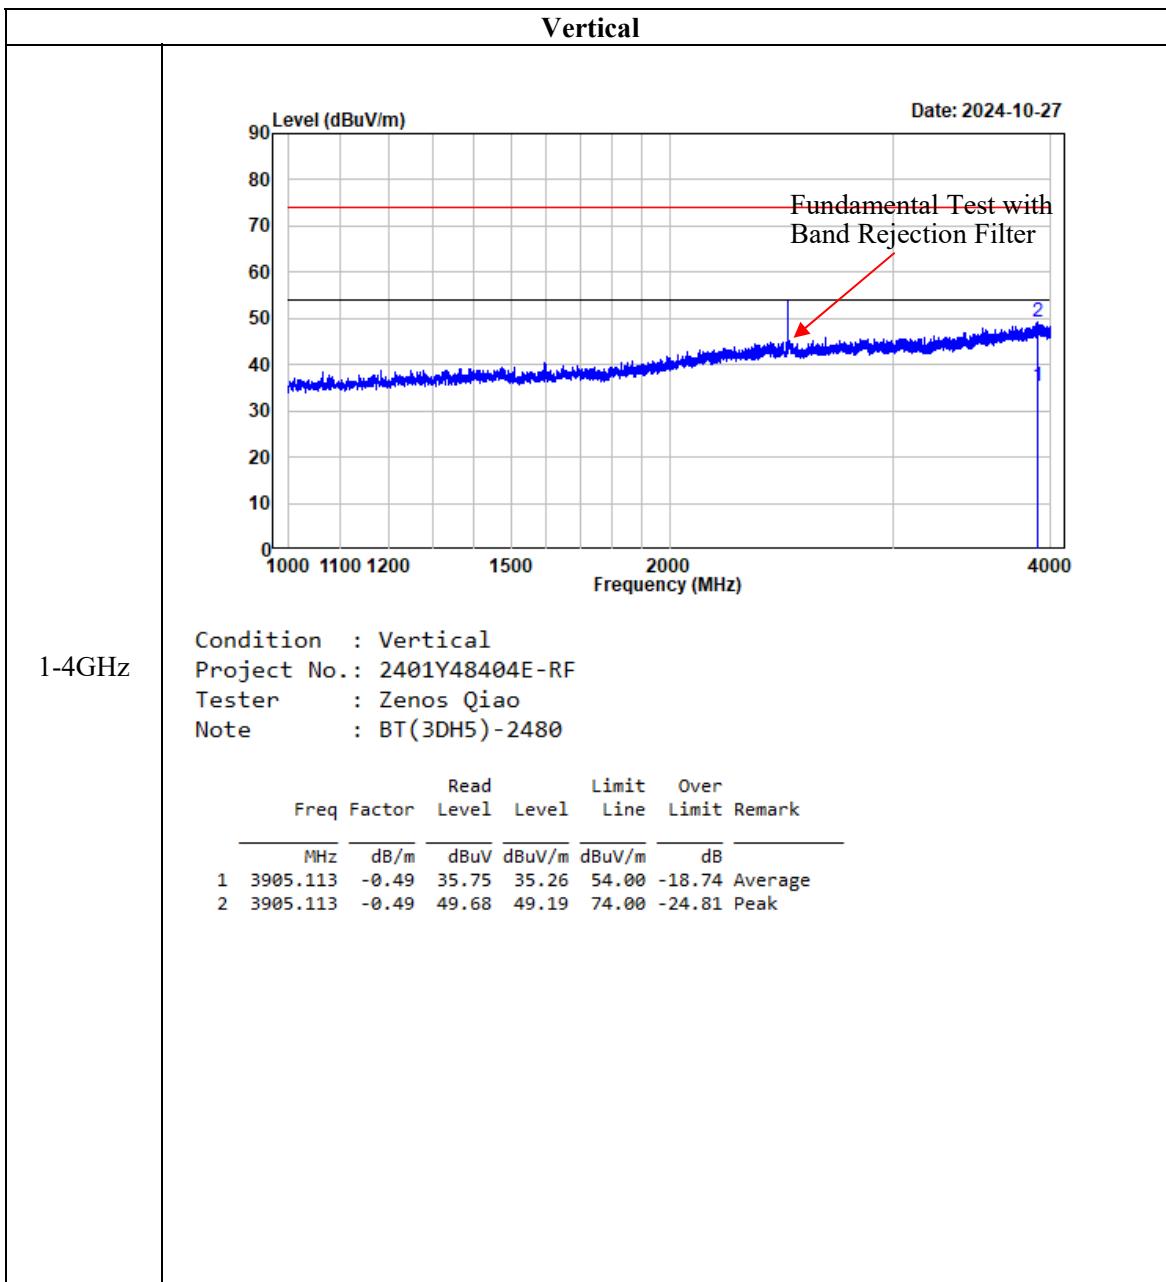


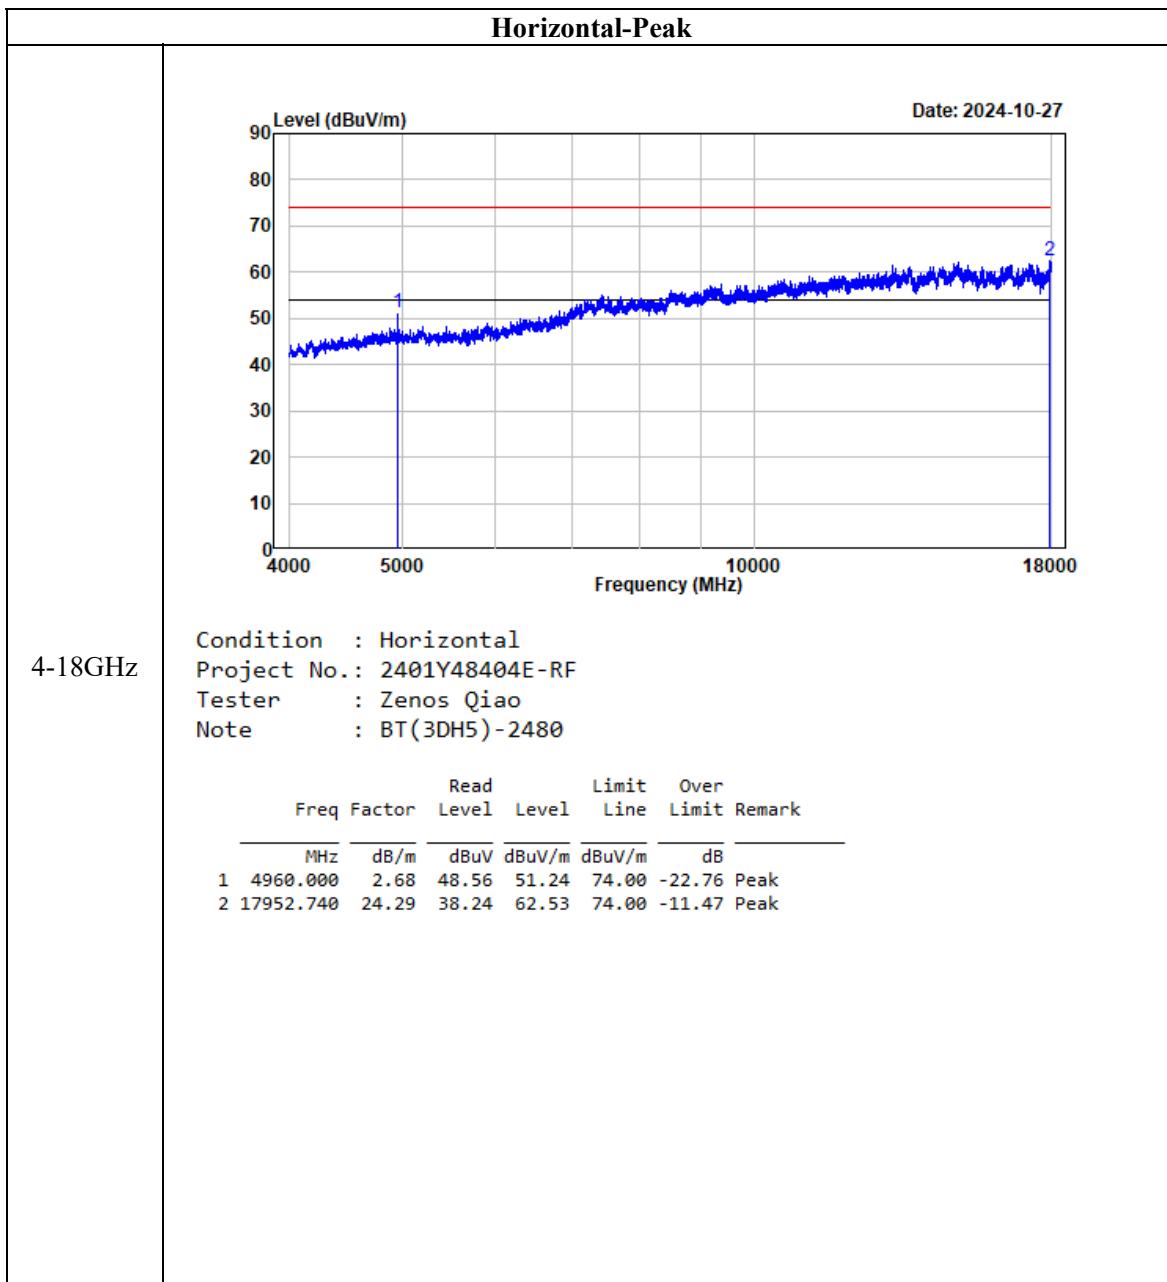


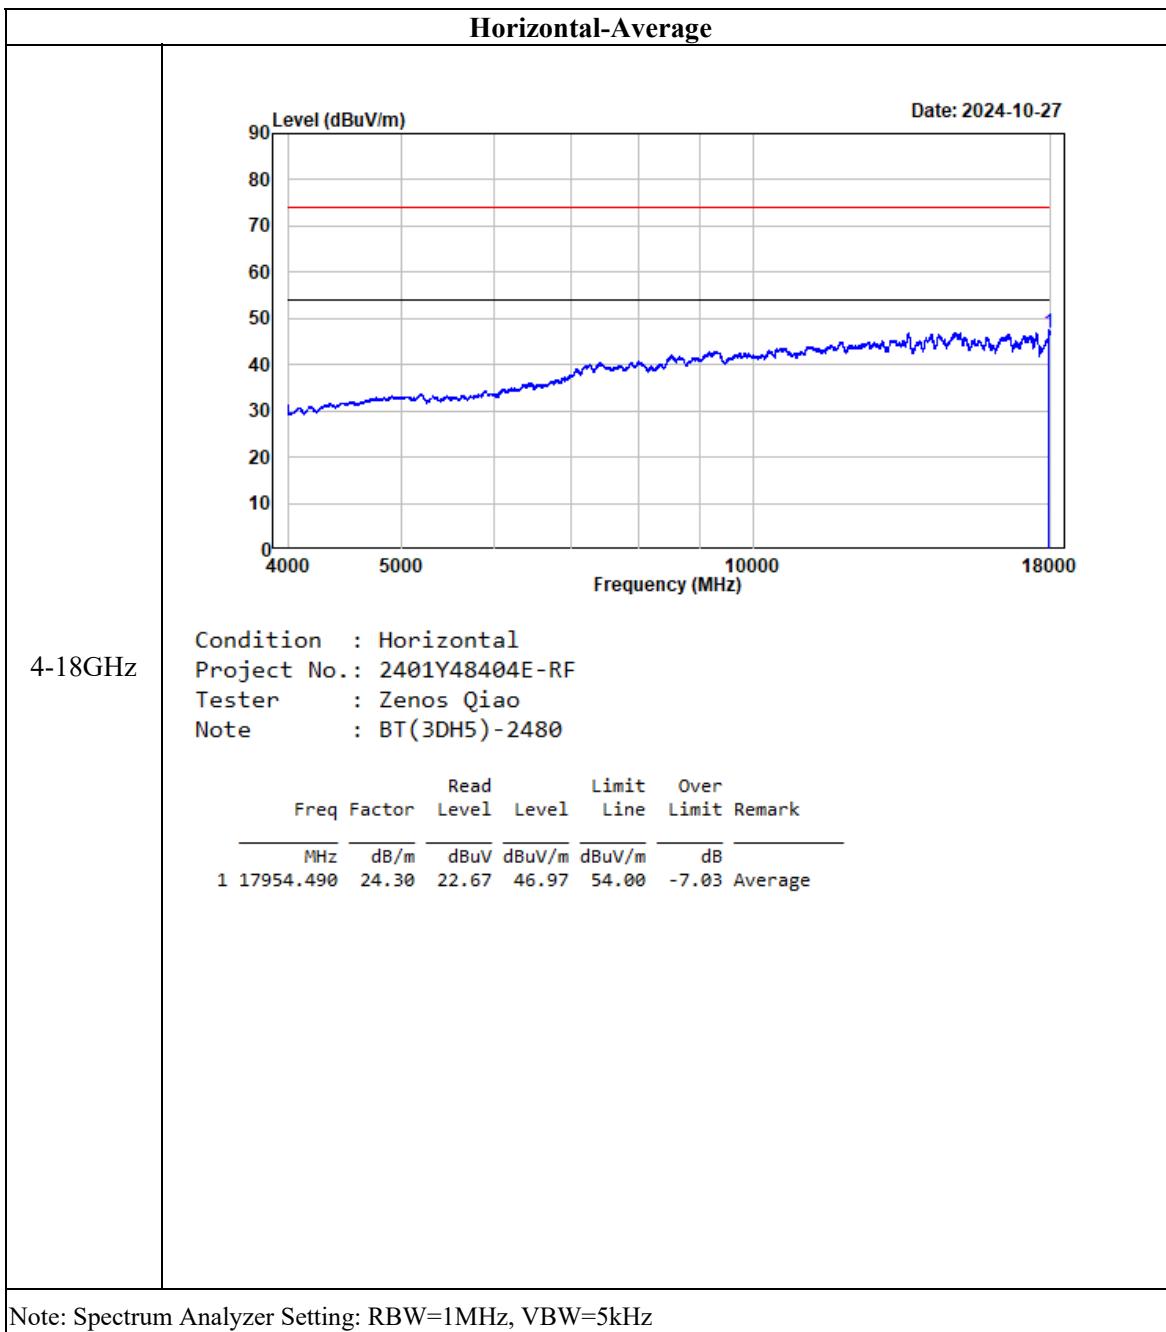

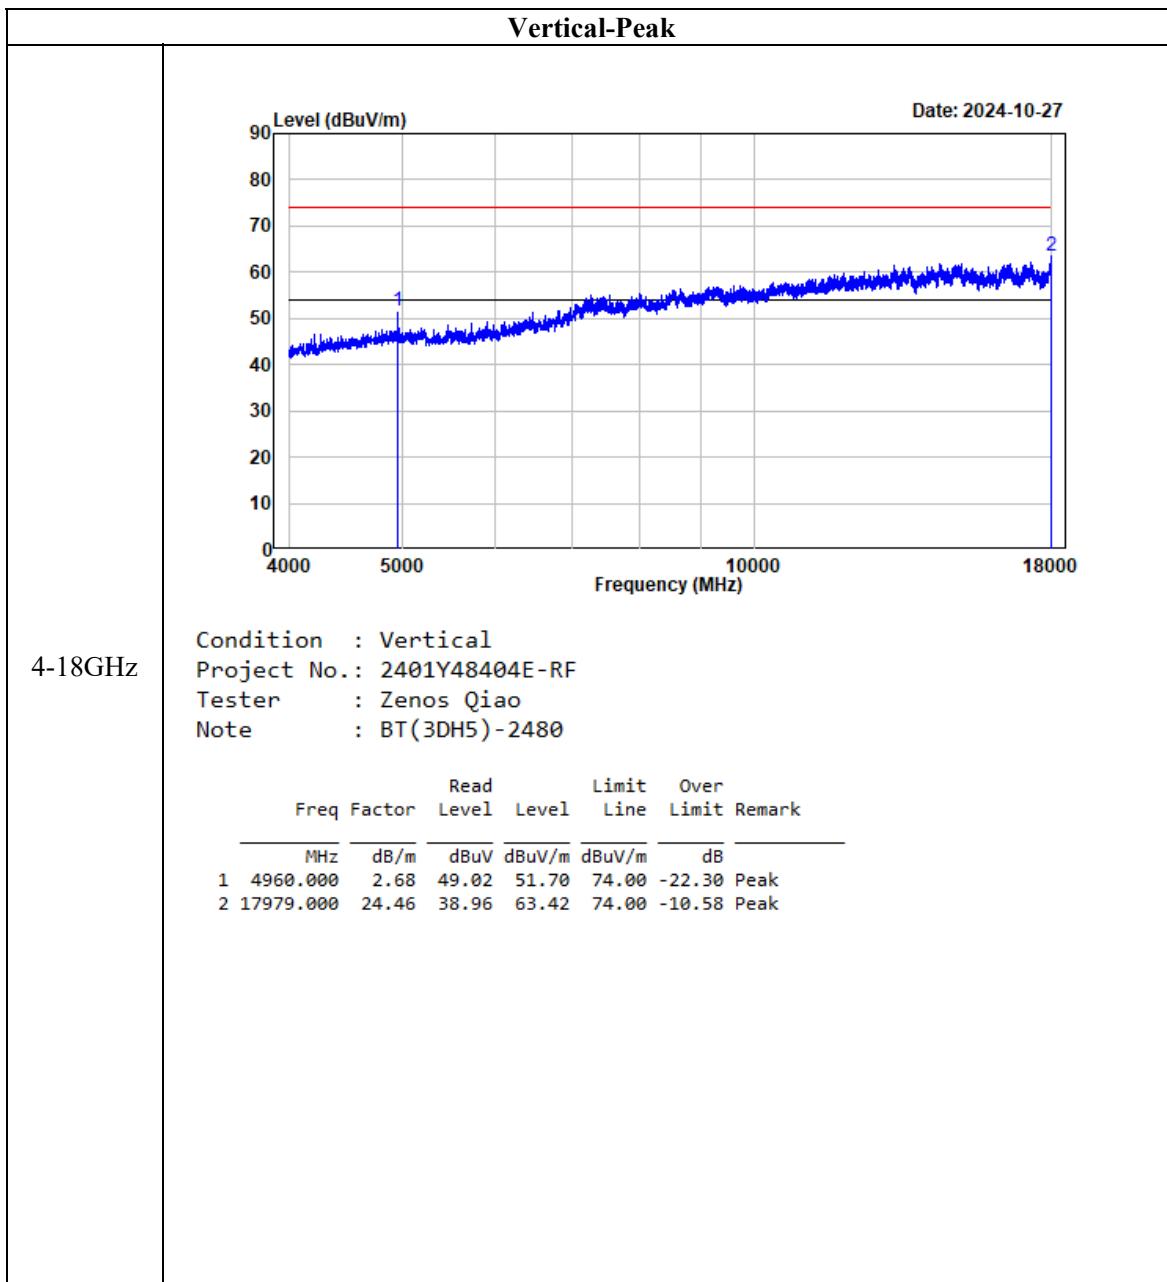

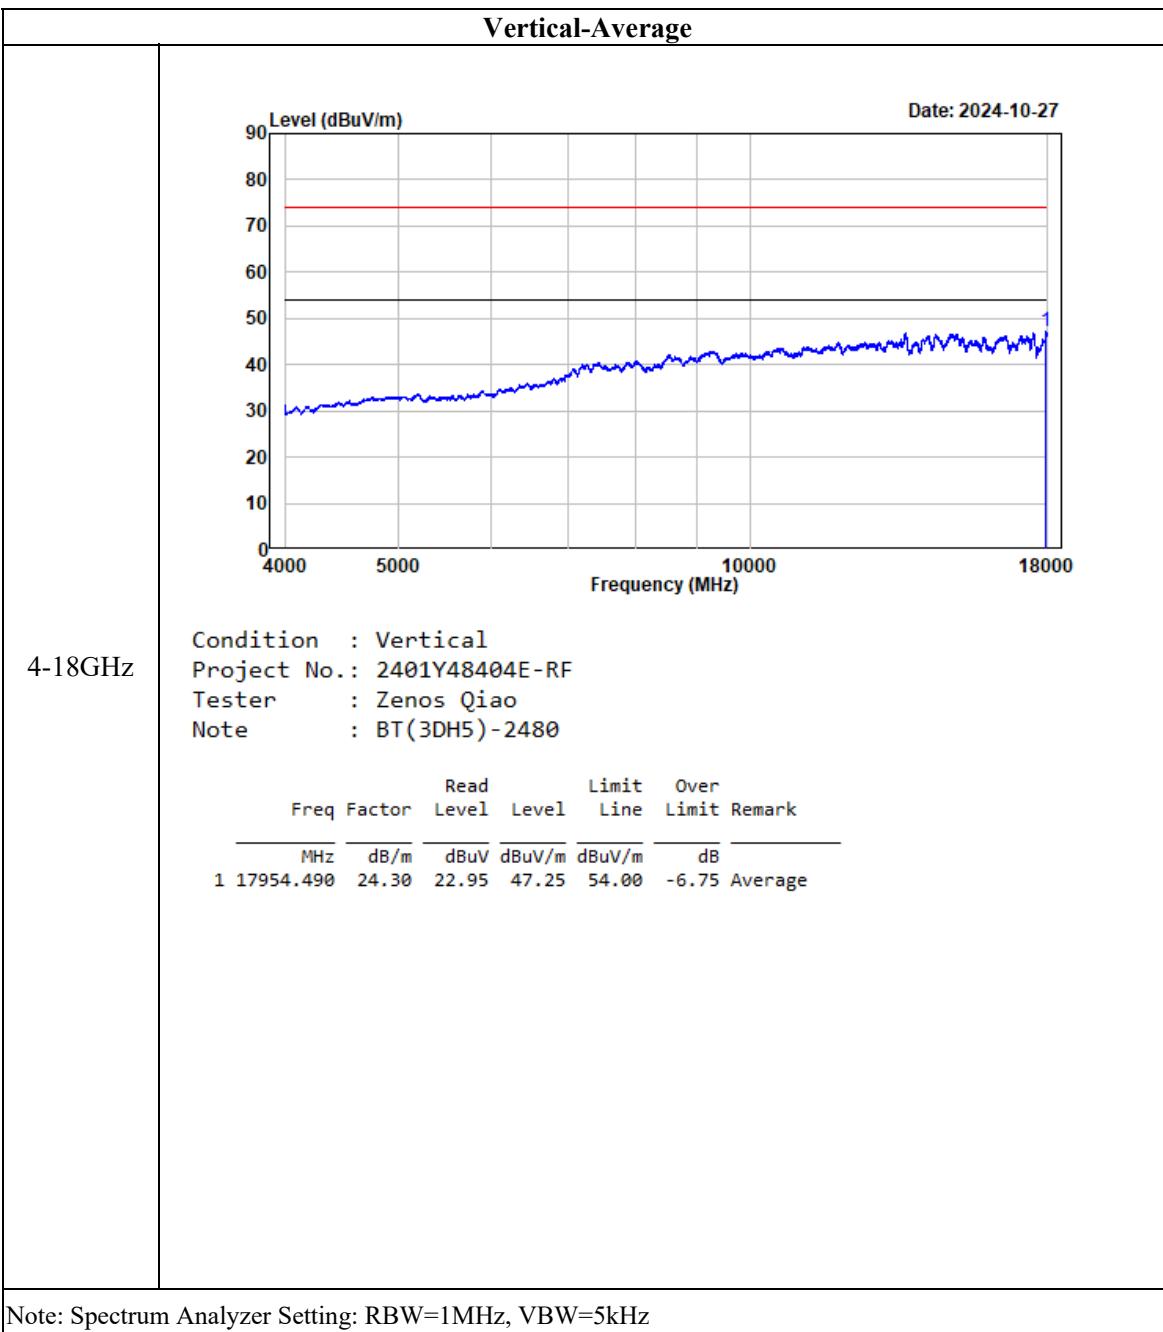

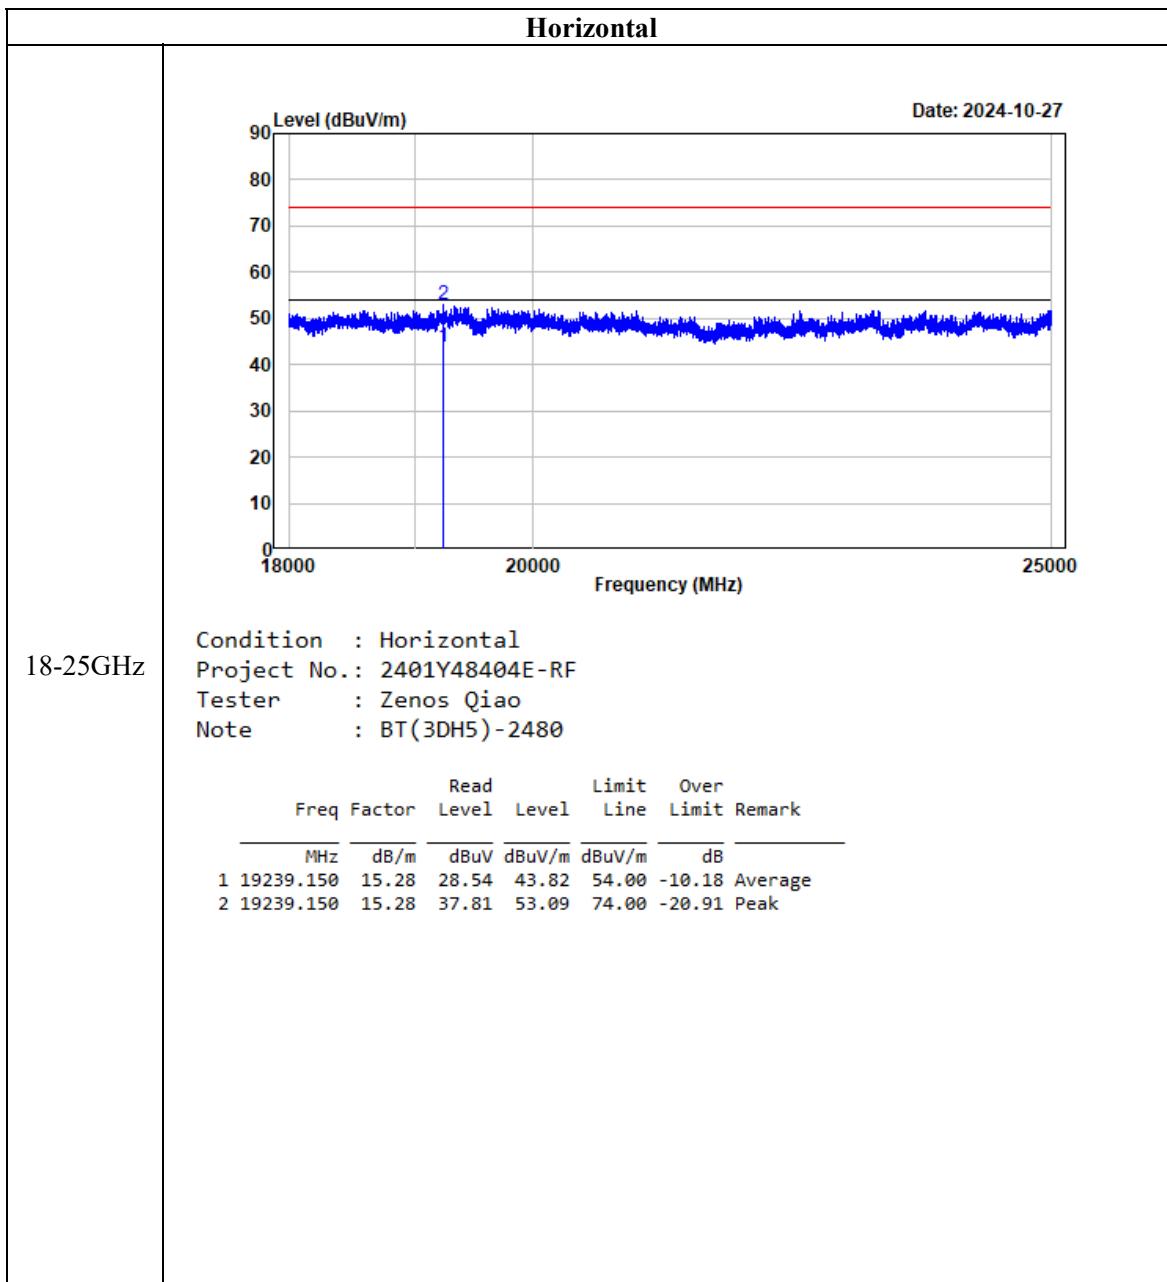

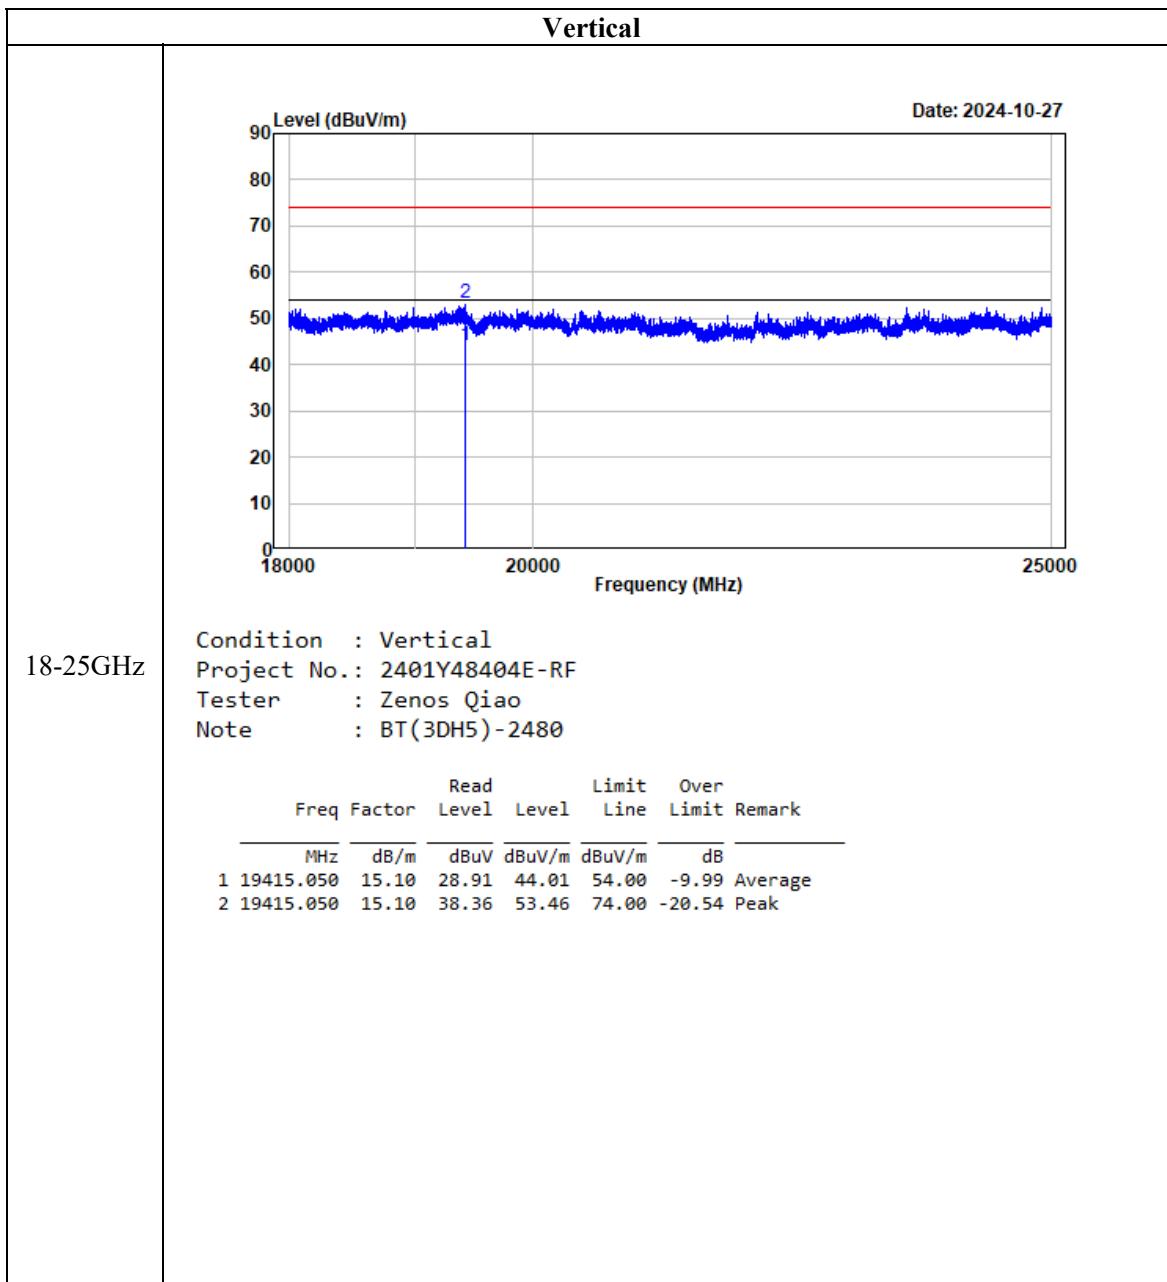

FCC §15.247(a) (1) & RSS-247 § 5.1 (b) - CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


According to RSS-247 § 5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.

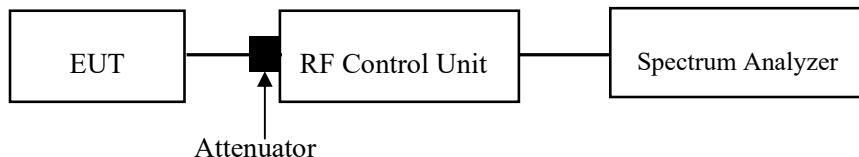

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-10-31.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) & RSS-247 § 5.1 (a), RSS-GEN § 6.7 - 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 § 5.1 (a), RSS-GEN § 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2 & RSS-Gen §6.7

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an un-modulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an un-modulated carrier, then turn the EUT modulation on, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx” dB down amplitude” determined in step h). If a marker is below this “-xx” dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx” dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW (for RSS rules, VBW shall not be smaller than three times the RBW, unless otherwise specified by the applicable requirement).
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data maybe reported in addition to the plot(s).

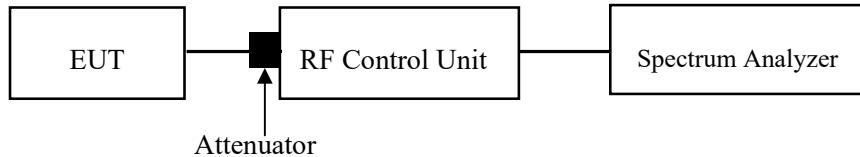

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-10-31.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

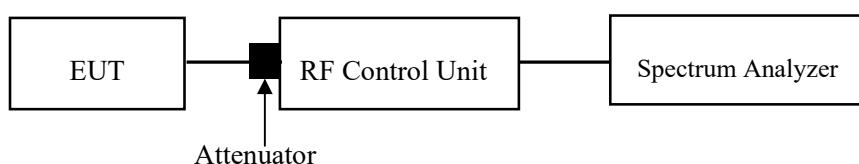

Note: Limit=20 dB bandwidth*2/3

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-10-31.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

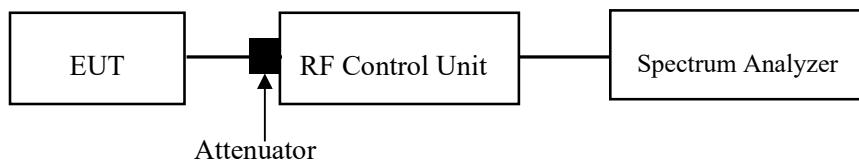

Note 1: A period time=0.4*79=31.6(S), Result=BurstWidth*Totalhops

Note 2: Totalhops=Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-10-31.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) & RSS-247§ 5.1(b) &§ 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

According to RSS-247§ 5.1(b) &§ 5.4(b):


For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

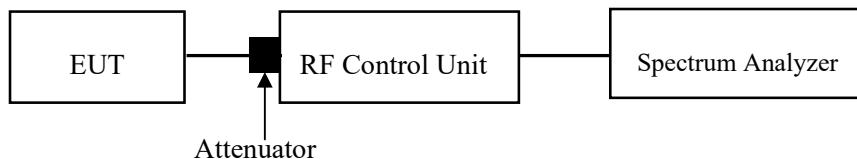

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-10-31.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

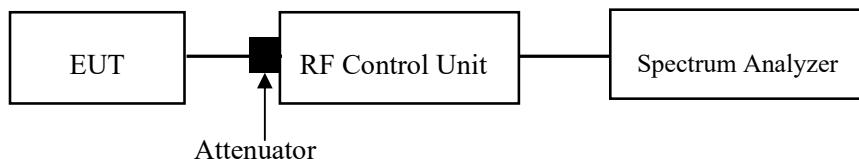

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-10-31.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y48404E-RF External photo and 2401Y48404E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y48404E-RFA Test Setup photo.


APPENDIX


Appendix A: 20dB Emission Bandwidth


Test Result


Test Mode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.95	2401.53	2402.48	---	---
		2441	0.95	2440.53	2441.48	---	---
		2480	0.95	2479.53	2480.48	---	---
2DH1	Ant1	2402	1.30	2401.32	2402.62	---	---
		2441	1.30	2440.32	2441.62	---	---
		2480	1.30	2479.32	2480.62	---	---
3DH1	Ant1	2402	1.22	2401.39	2402.61	---	---
		2441	1.22	2440.39	2441.61	---	---
		2480	1.25	2479.36	2480.61	---	---


Test Graphs

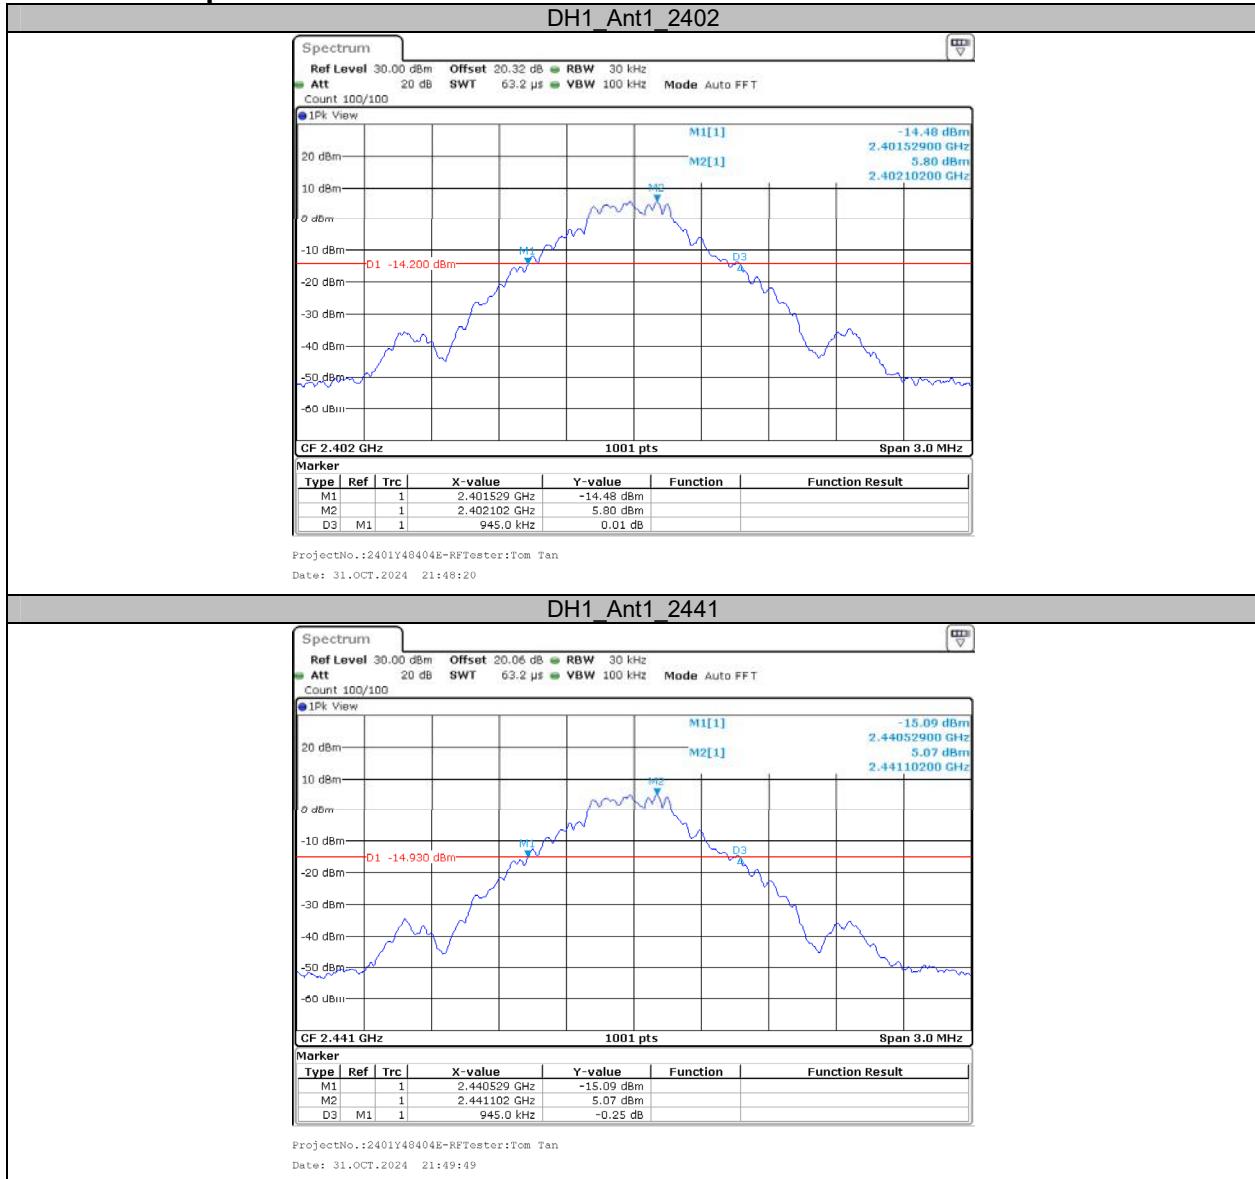

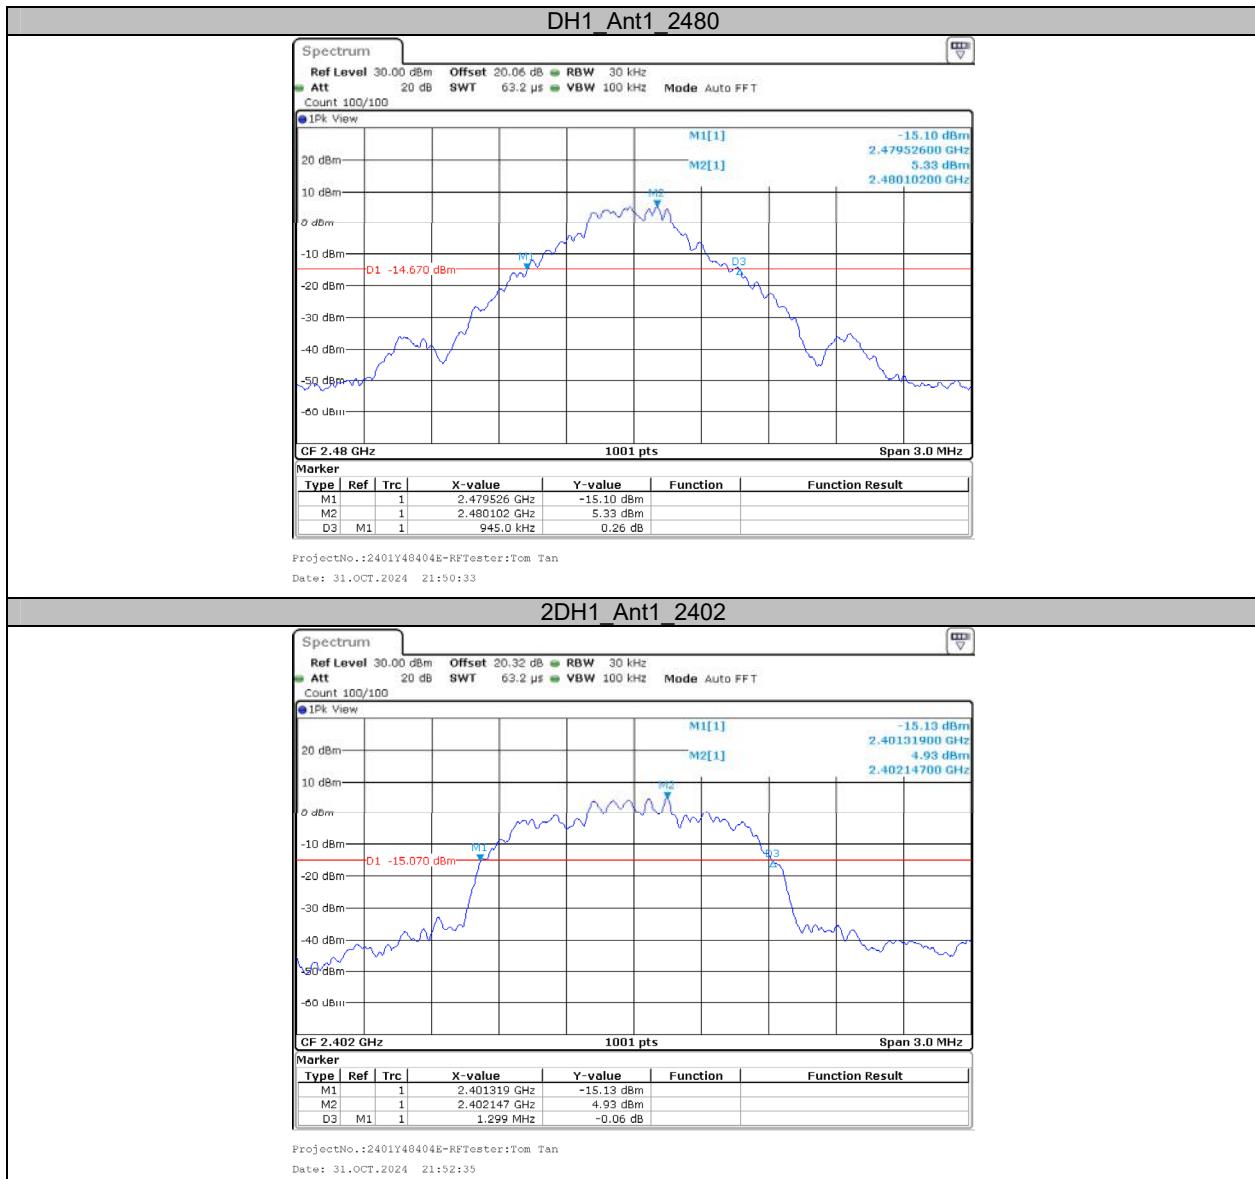

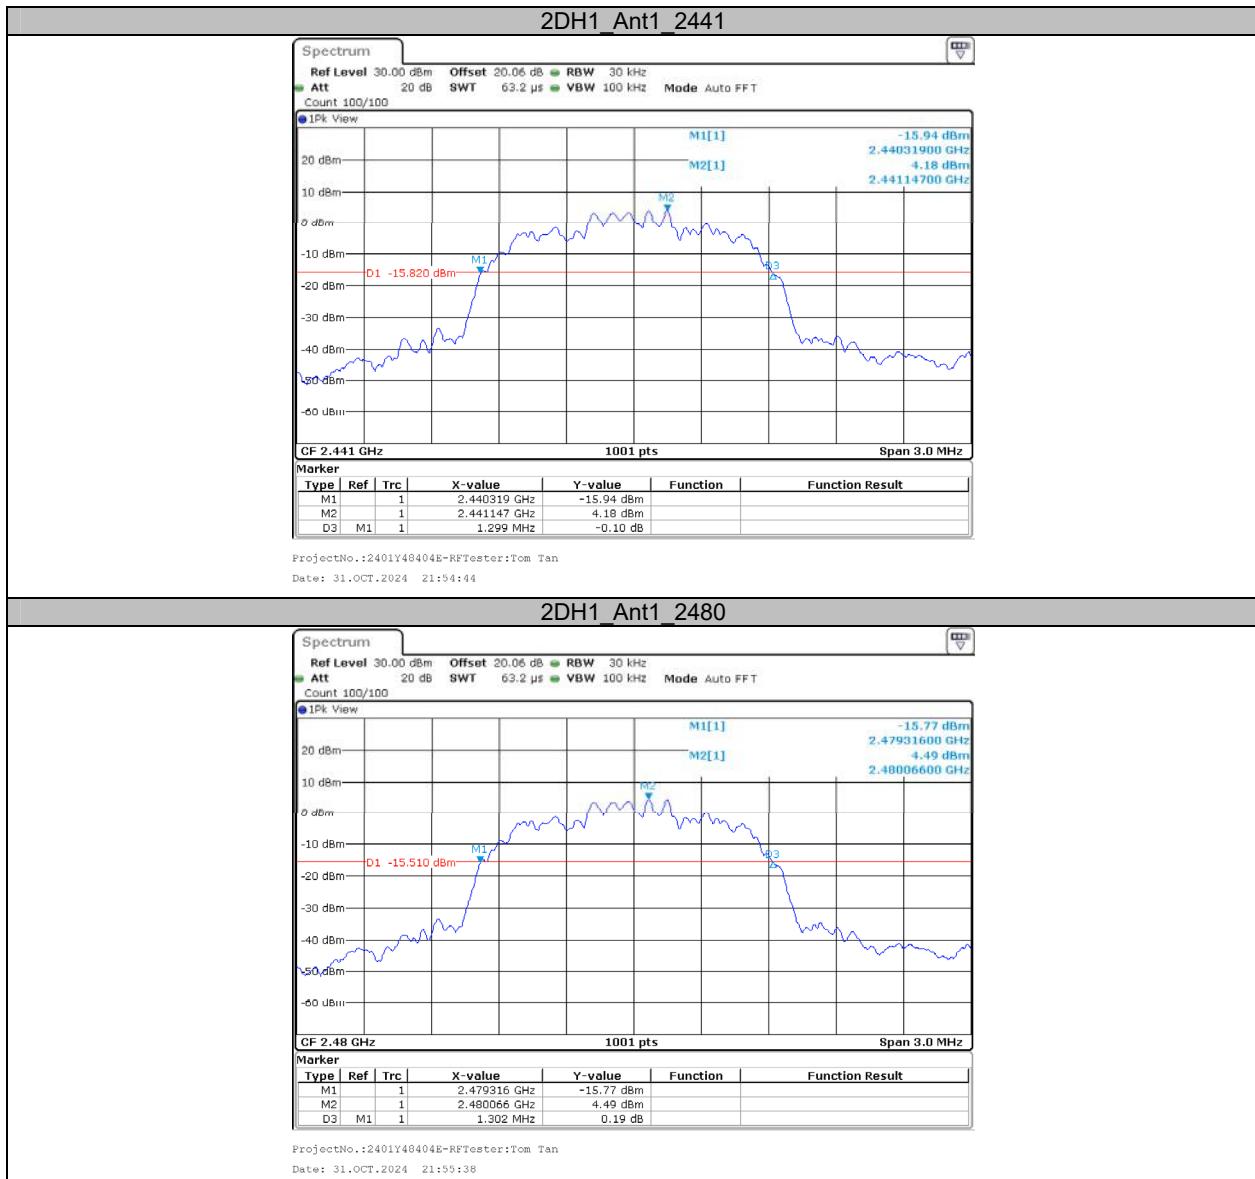

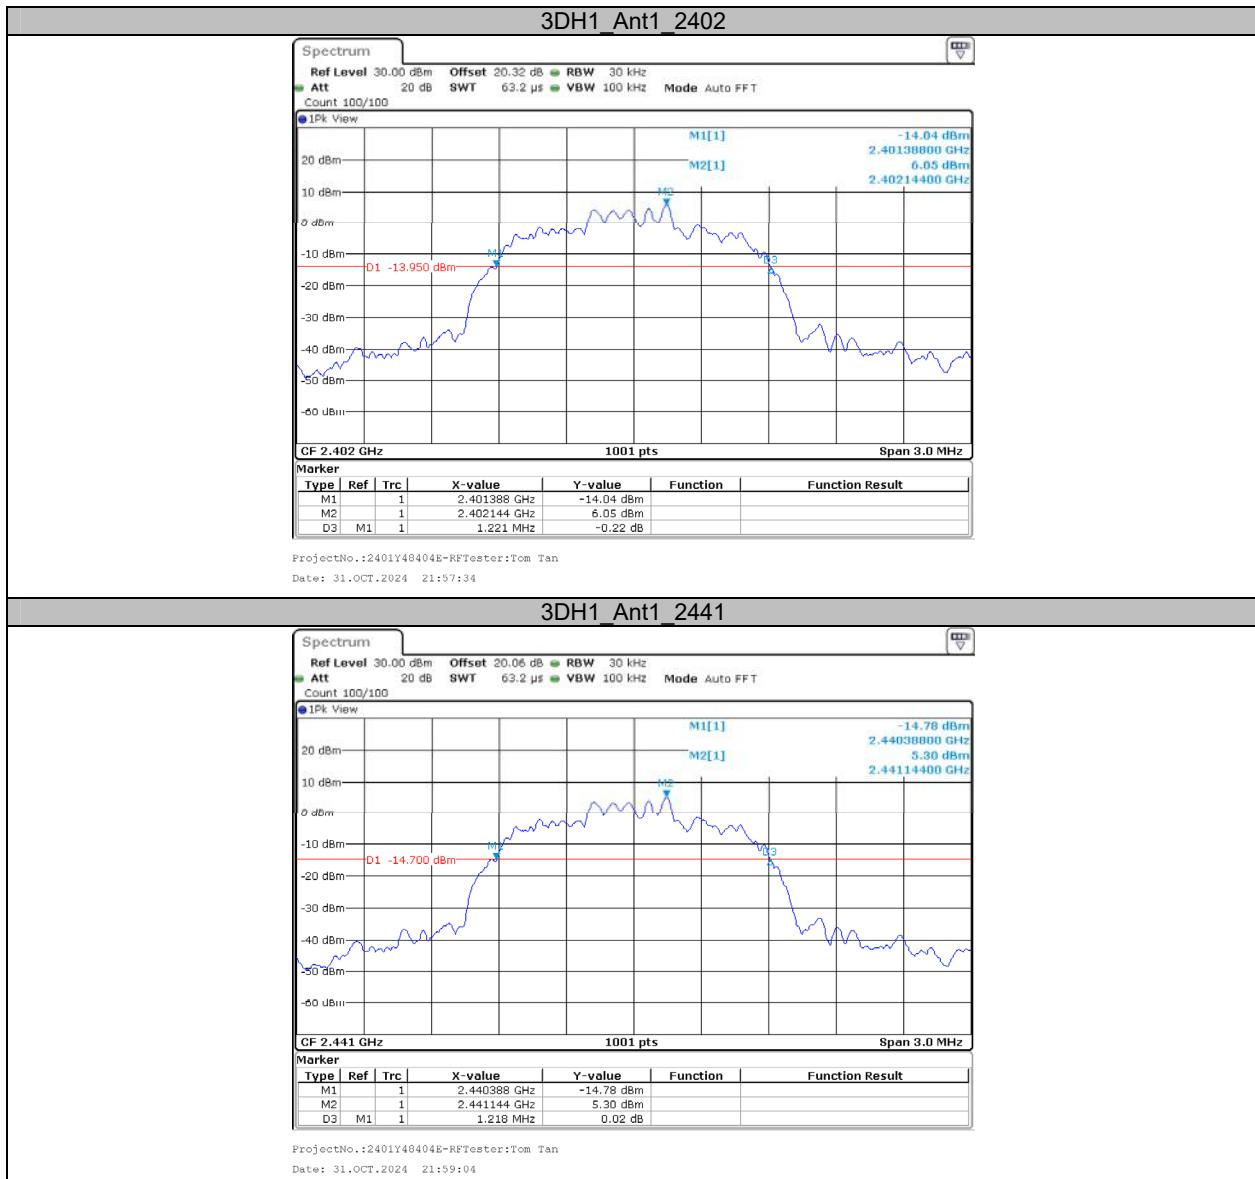


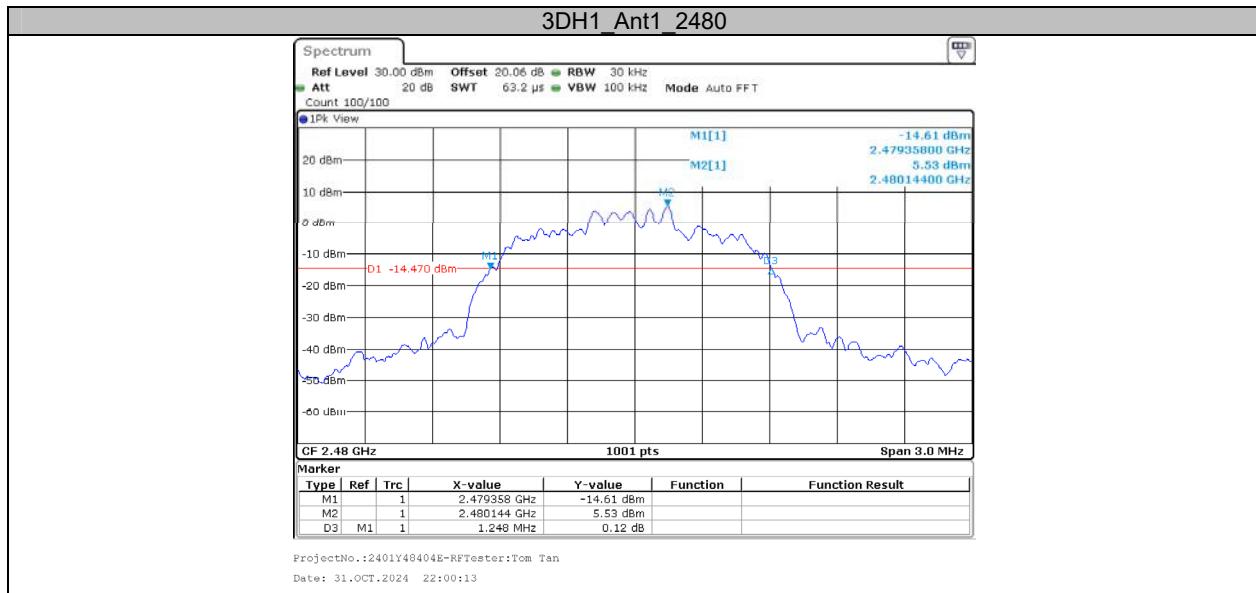



Appendix B: Occupied Channel Bandwidth**Test Result**


Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.821	2401.5714	2402.3926	---	---
		2441	0.821	2440.5714	2441.3926	---	---
		2480	0.824	2479.5684	2480.3926	---	---
2DH1	Ant1	2402	1.151	2401.4006	2402.5514	---	---
		2441	1.154	2440.3976	2441.5514	---	---
		2480	1.154	2479.3976	2480.5514	---	---
3DH1	Ant1	2402	1.139	2401.4216	2402.5604	---	---
		2441	1.139	2440.4216	2441.5604	---	---
		2480	1.139	2479.4216	2480.5604	---	---


Test Graphs

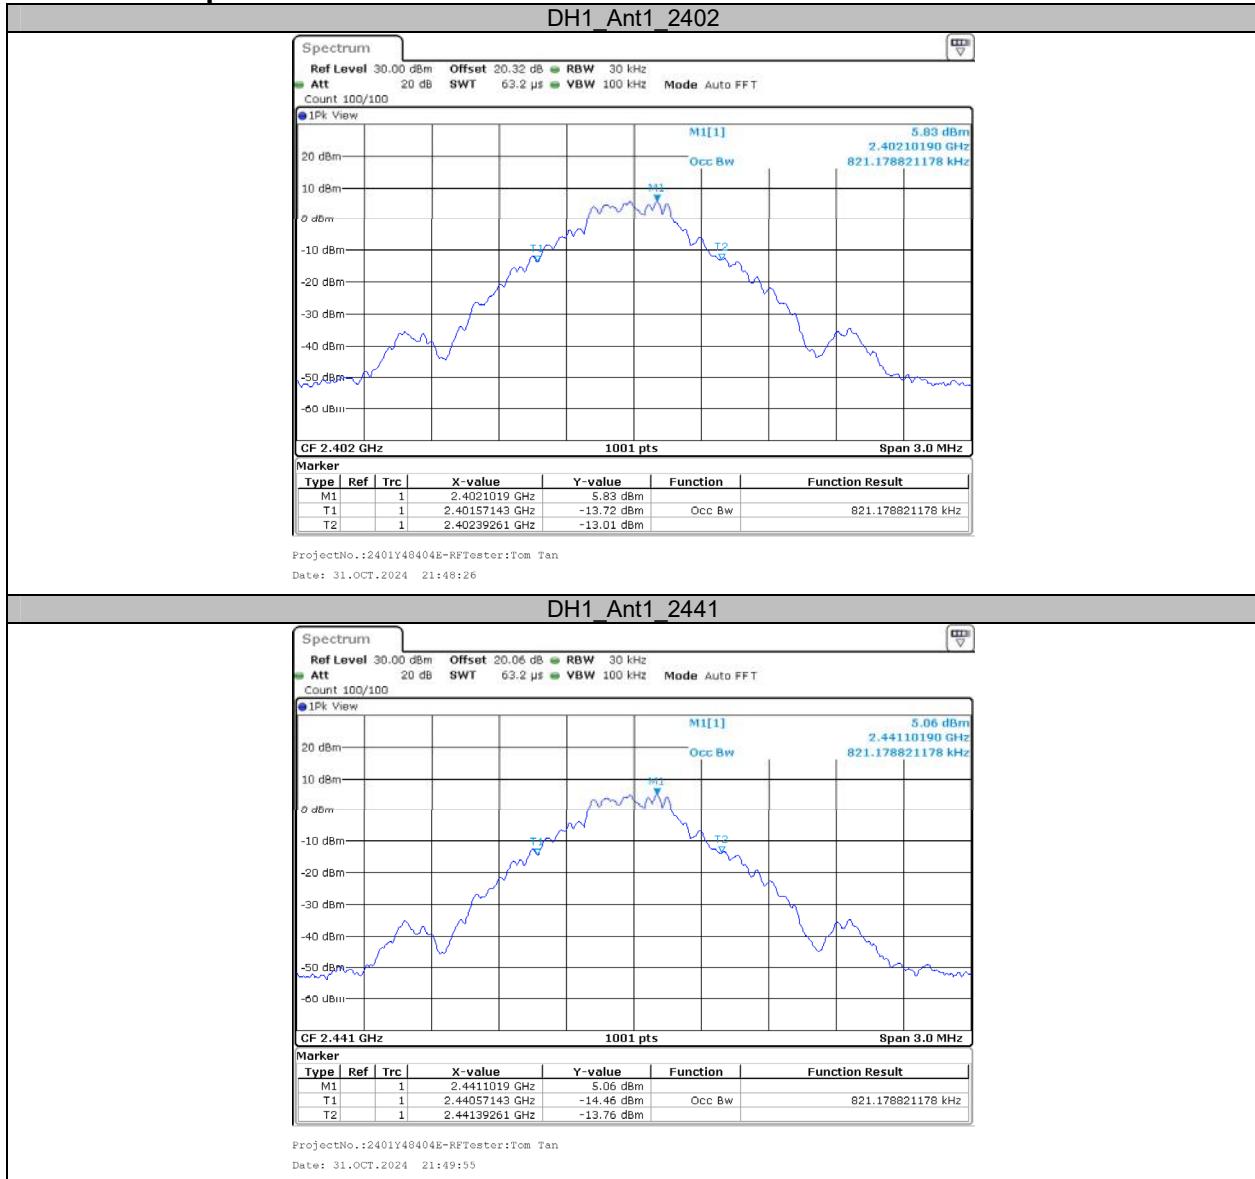

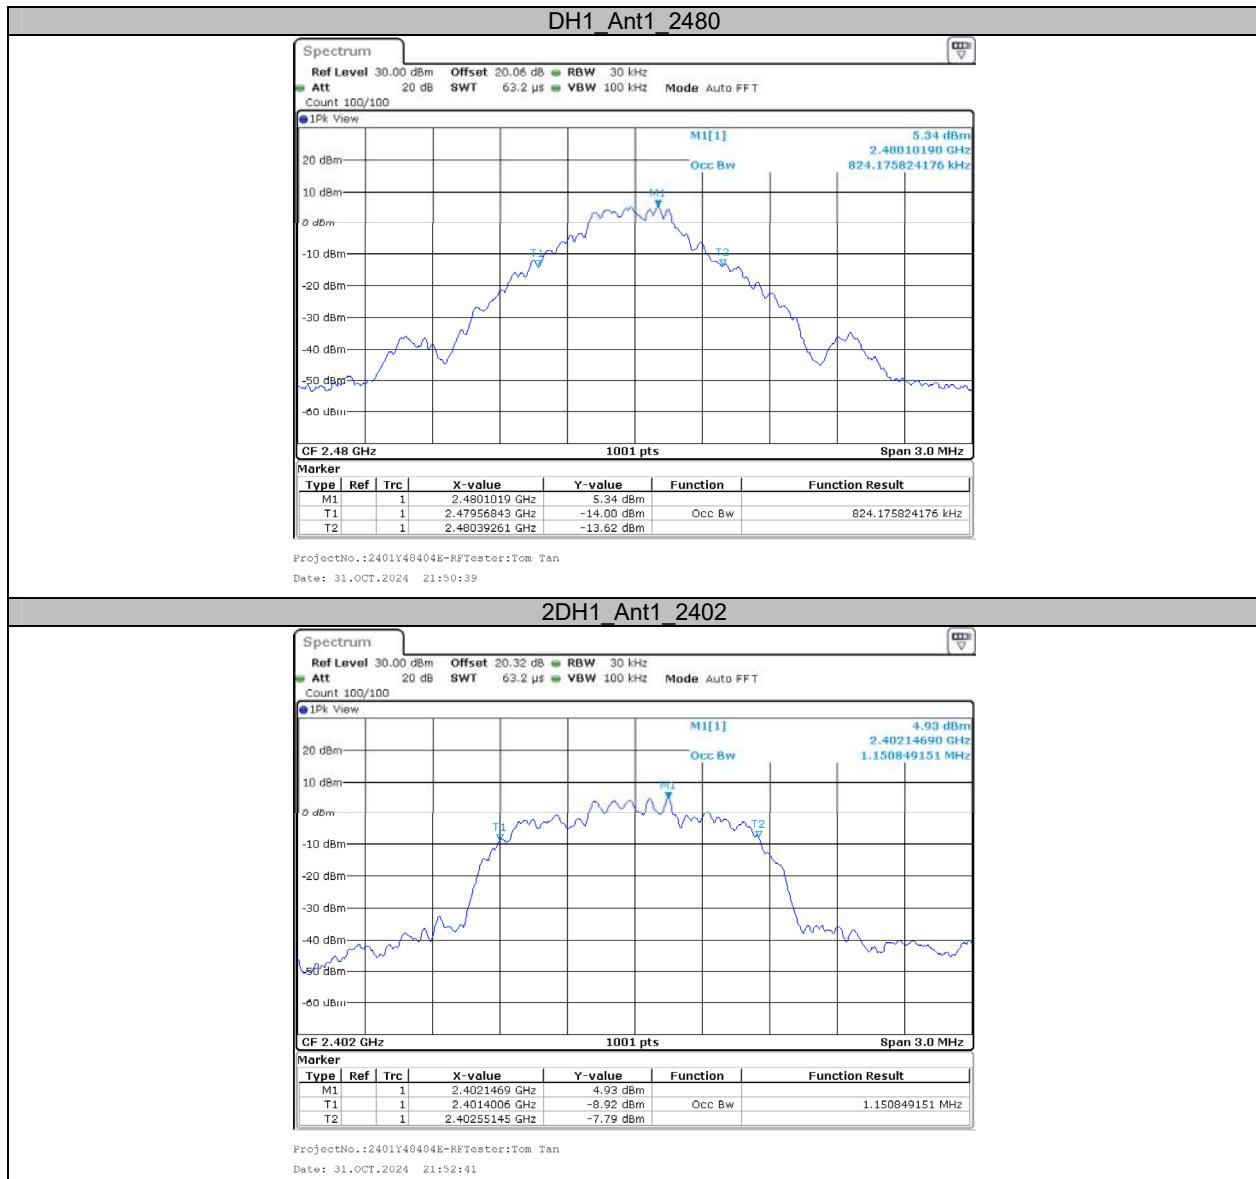

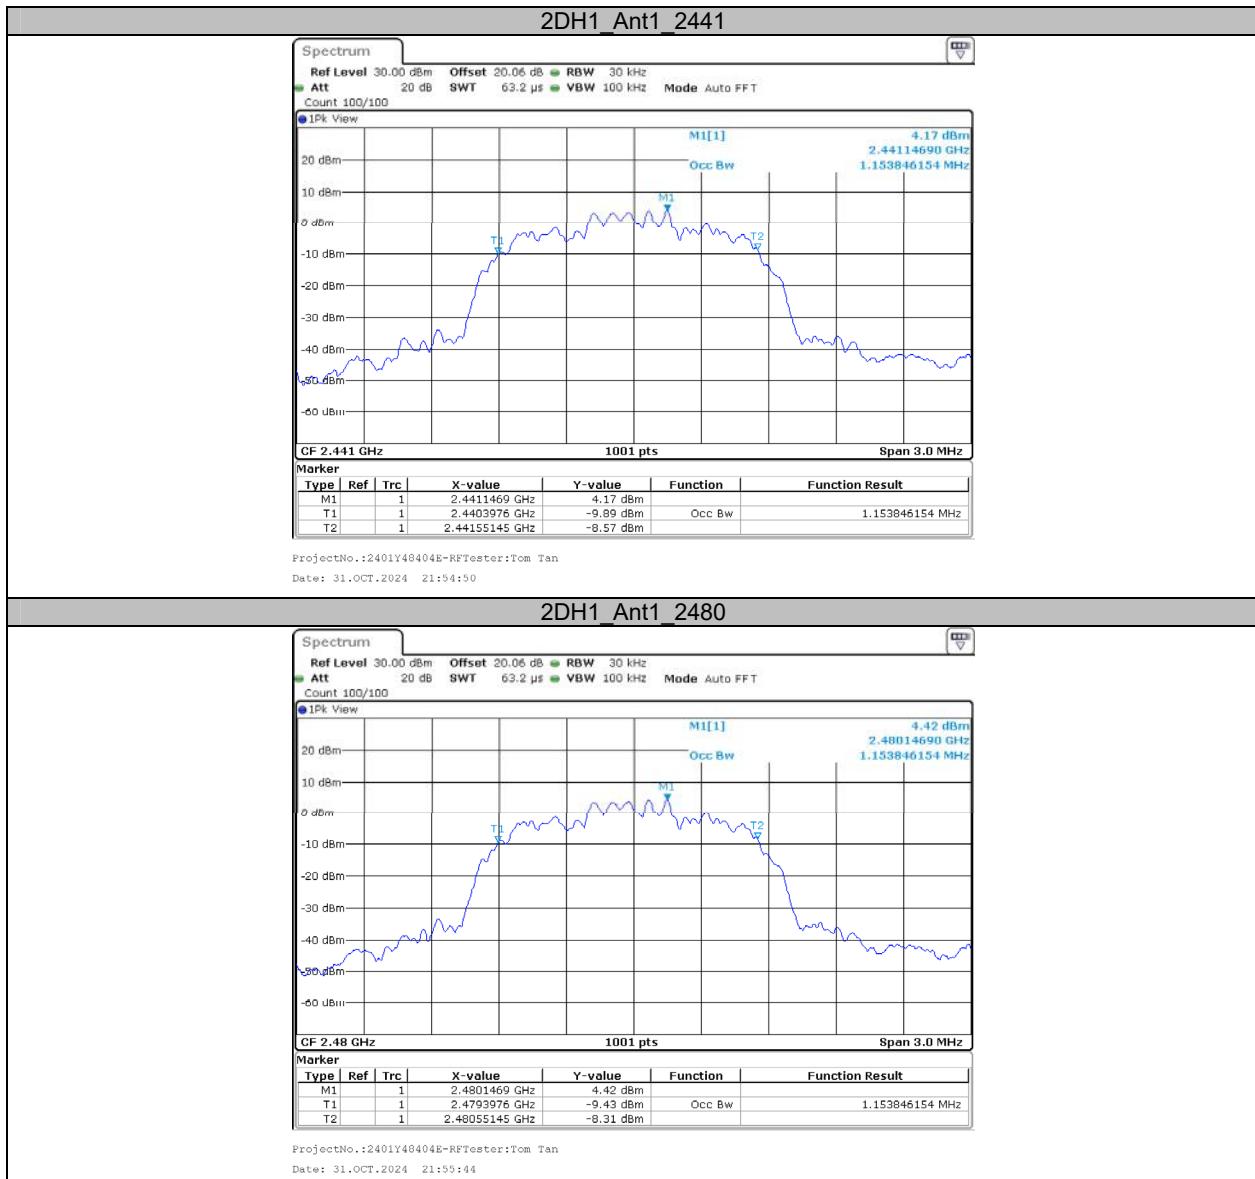

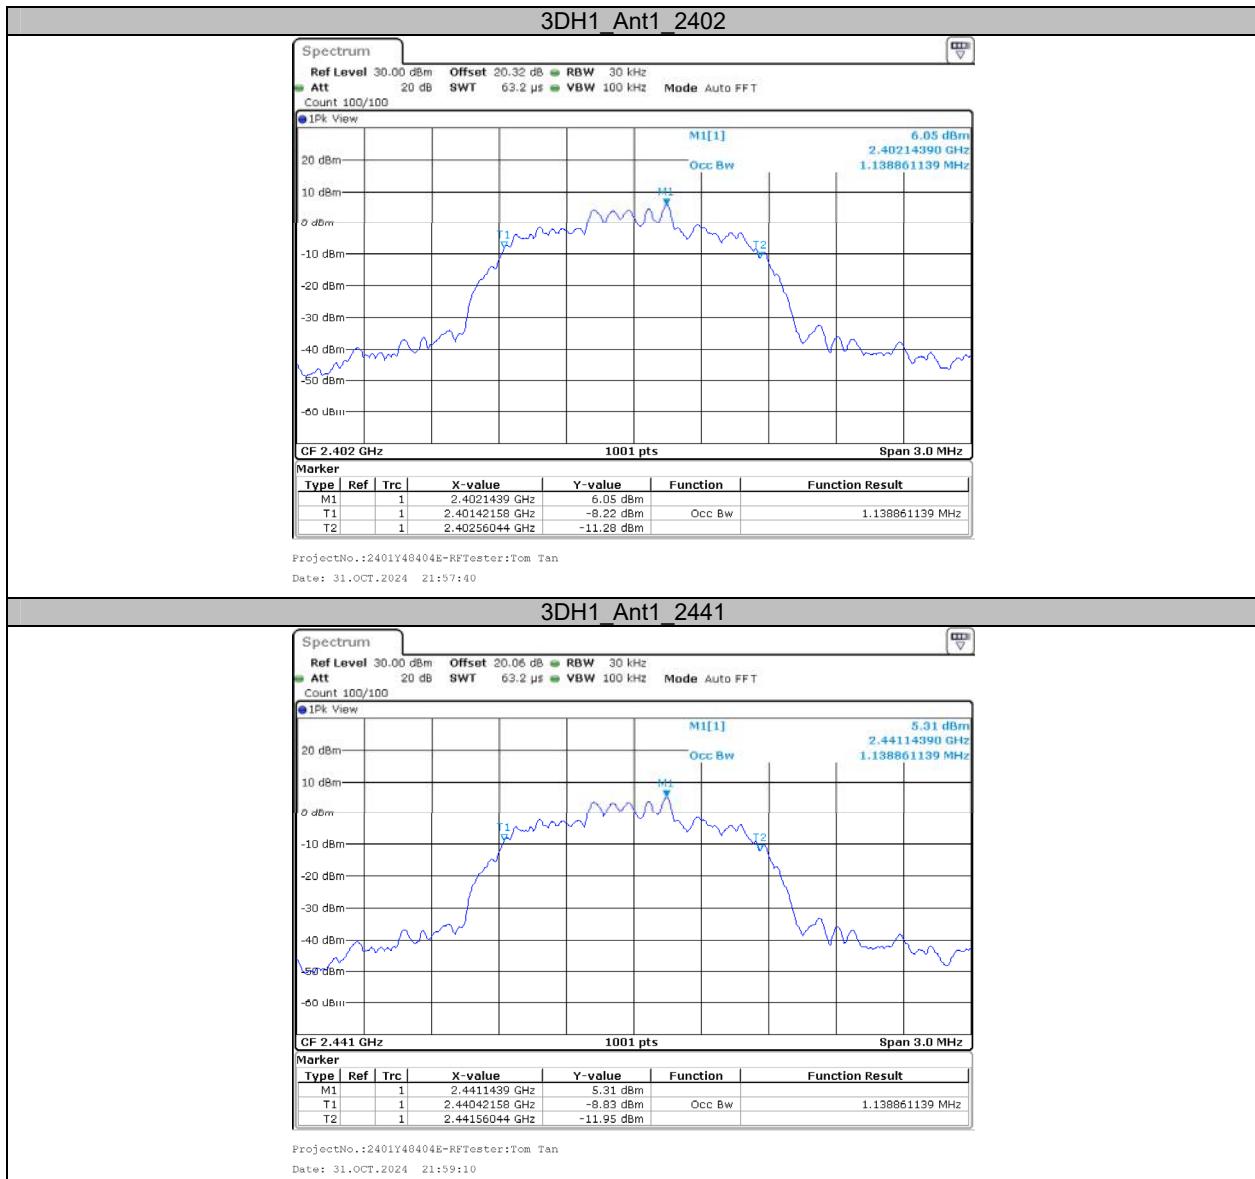

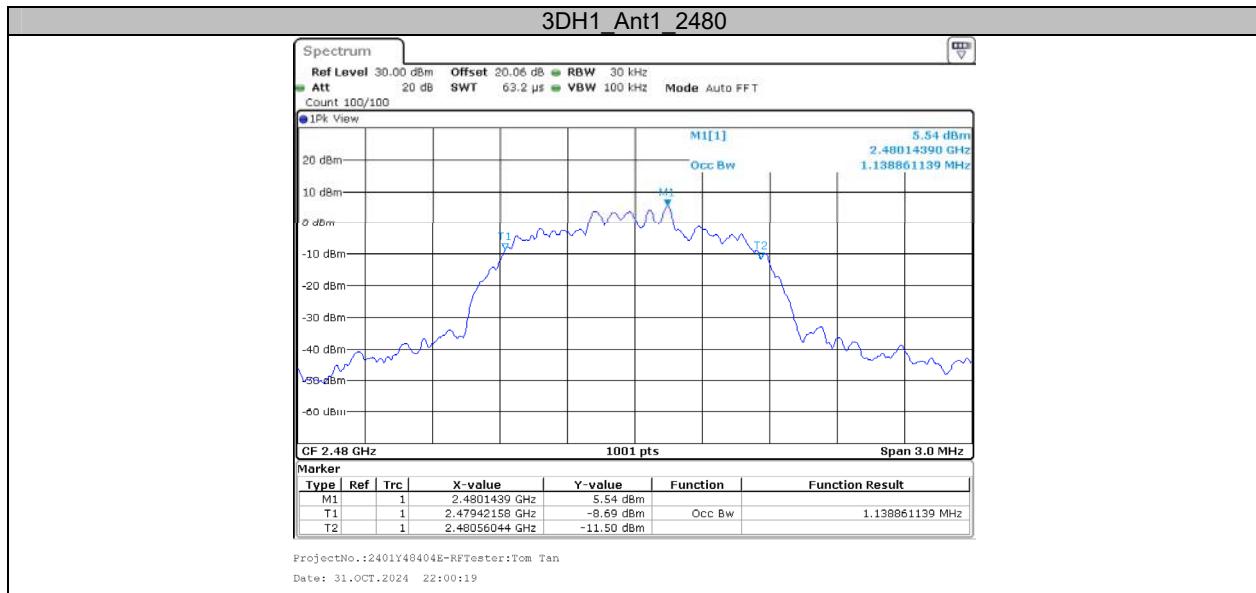



Appendix C: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit [dBm]	Verdict
DH1	Ant1	2402	8.80	≤20.97	13.15	≤36	PASS
		2441	8.06	≤20.97	12.41	≤36	PASS
		2480	8.31	≤20.97	12.66	≤36	PASS
2DH1	Ant1	2402	9.67	≤20.97	14.02	≤36	PASS
		2441	8.93	≤20.97	13.28	≤36	PASS
		2480	9.18	≤20.97	13.53	≤36	PASS
3DH1	Ant1	2402	10.25	≤20.97	14.60	≤36	PASS
		2441	9.56	≤20.97	13.91	≤36	PASS
		2480	9.83	≤20.97	14.18	≤36	PASS


Test Graphs

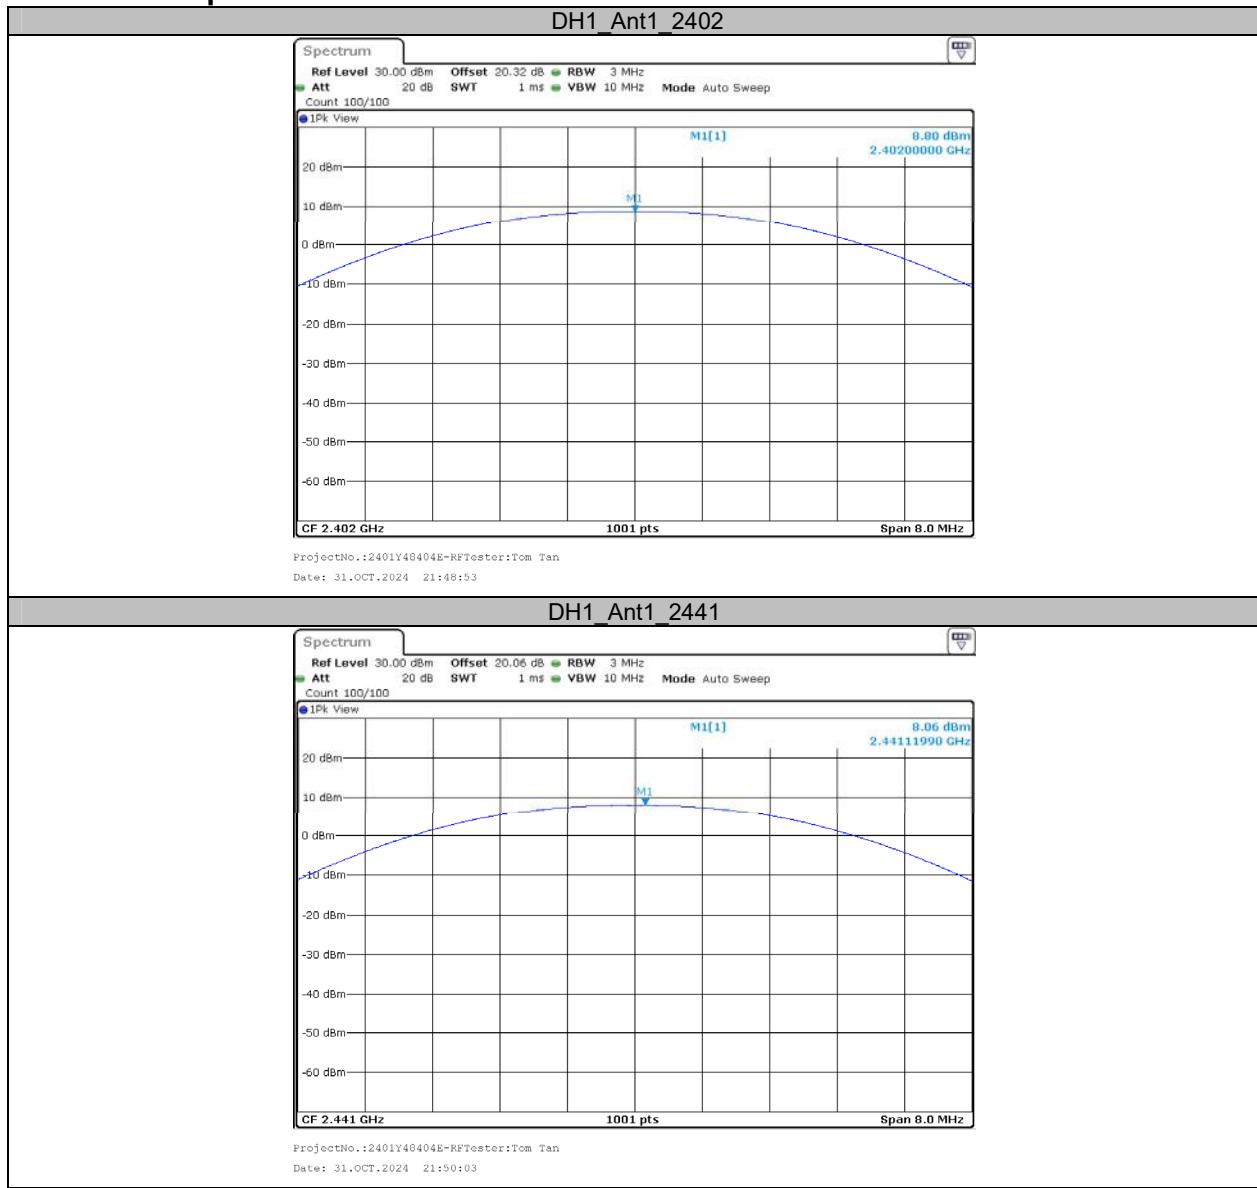

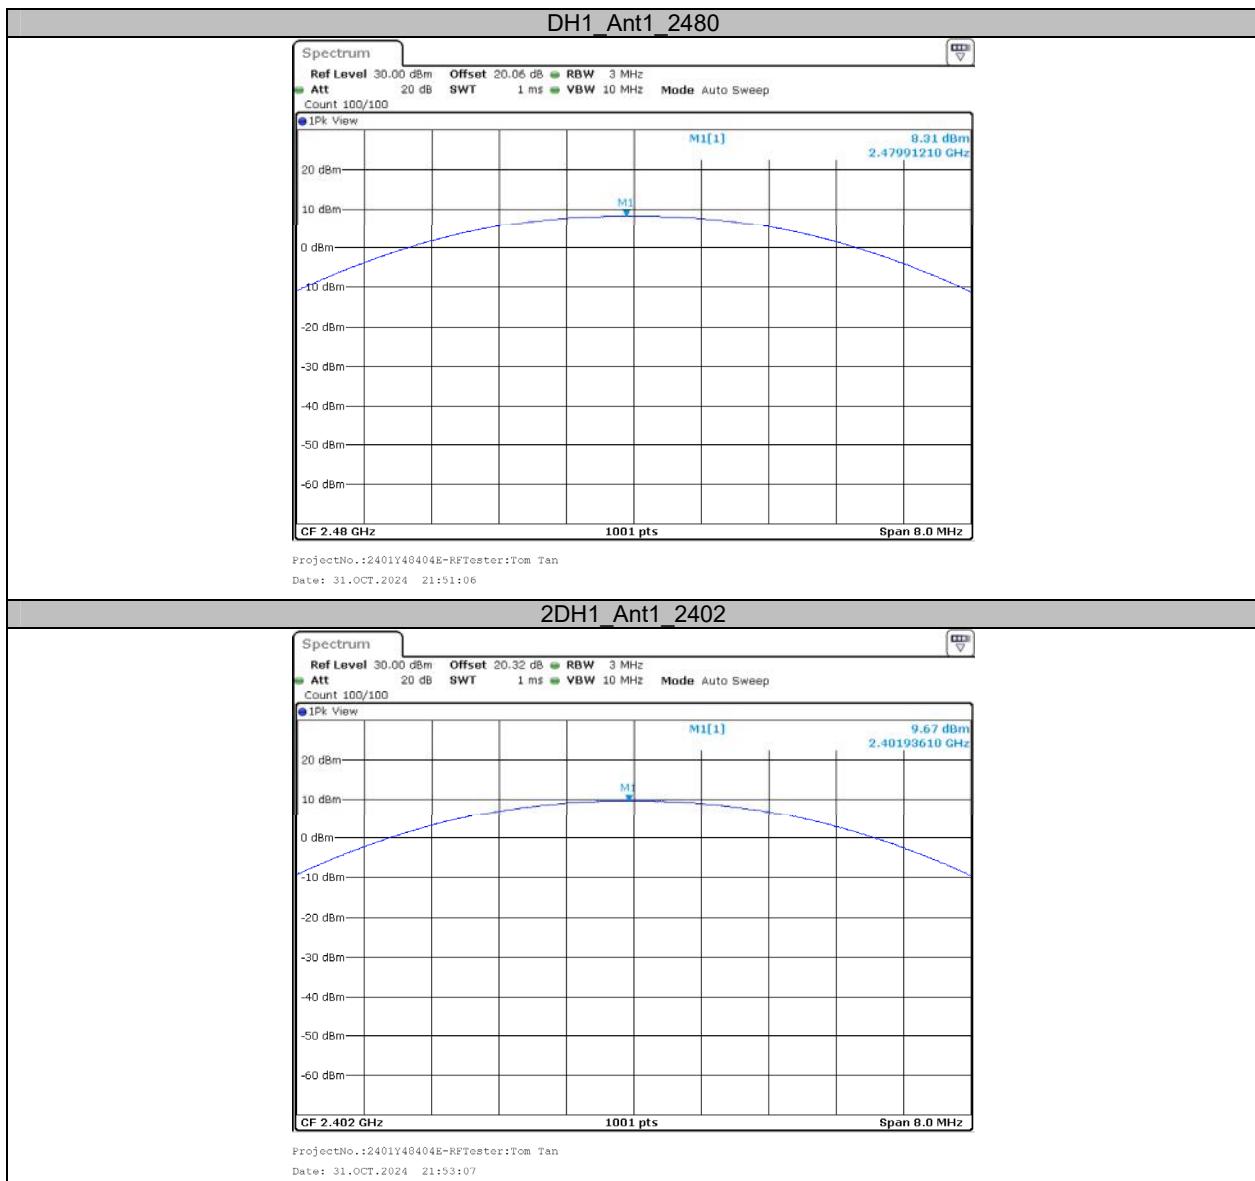



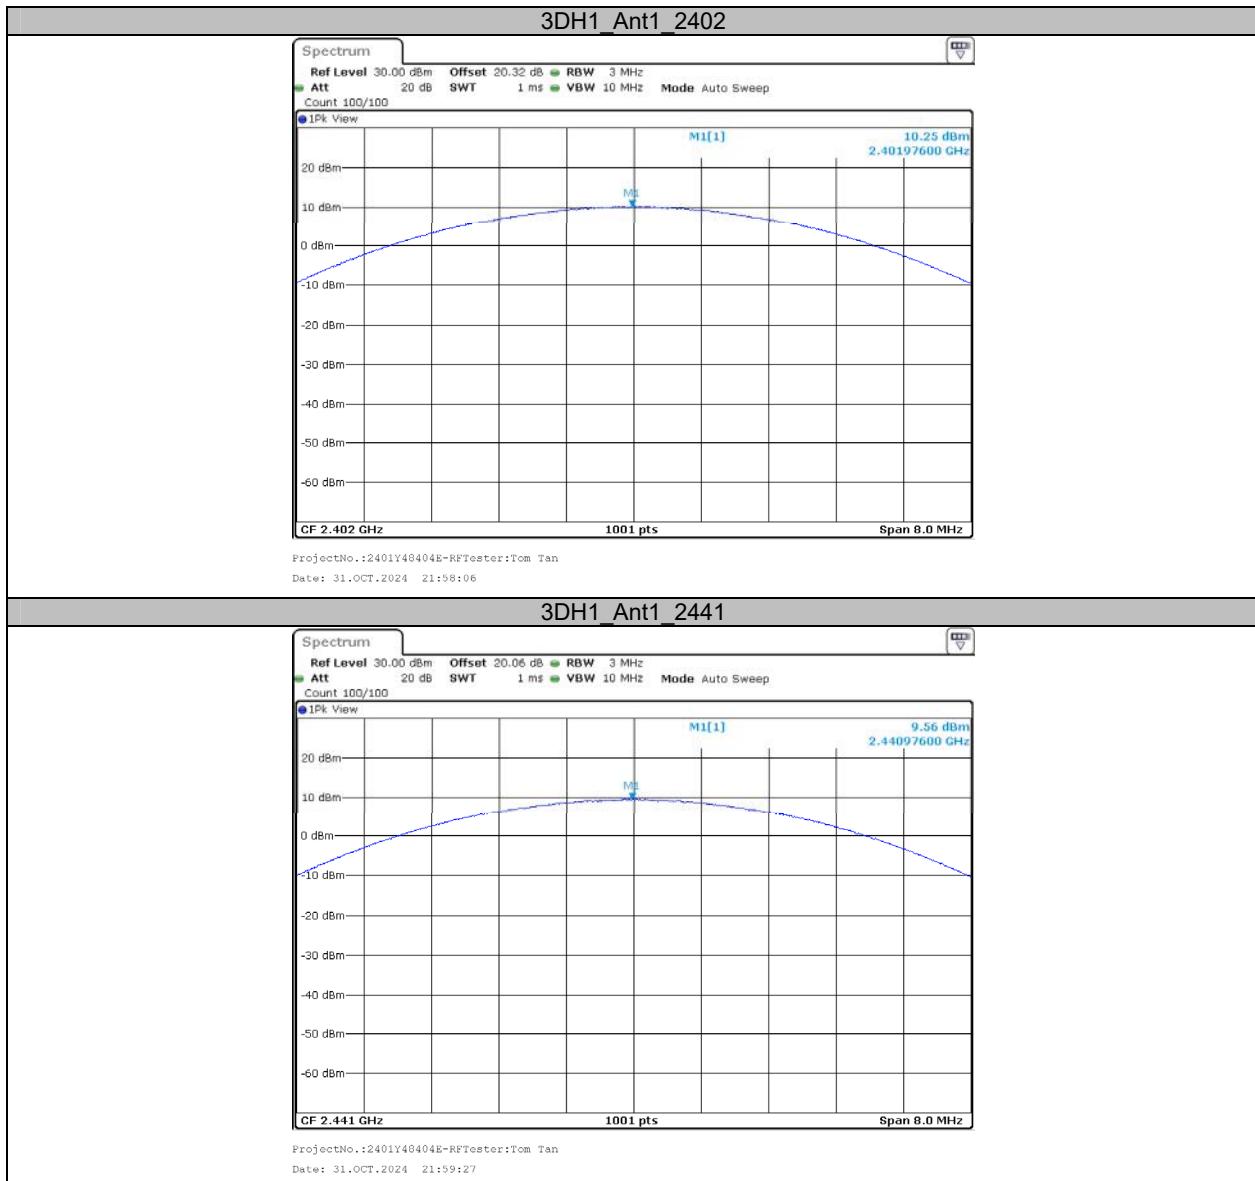

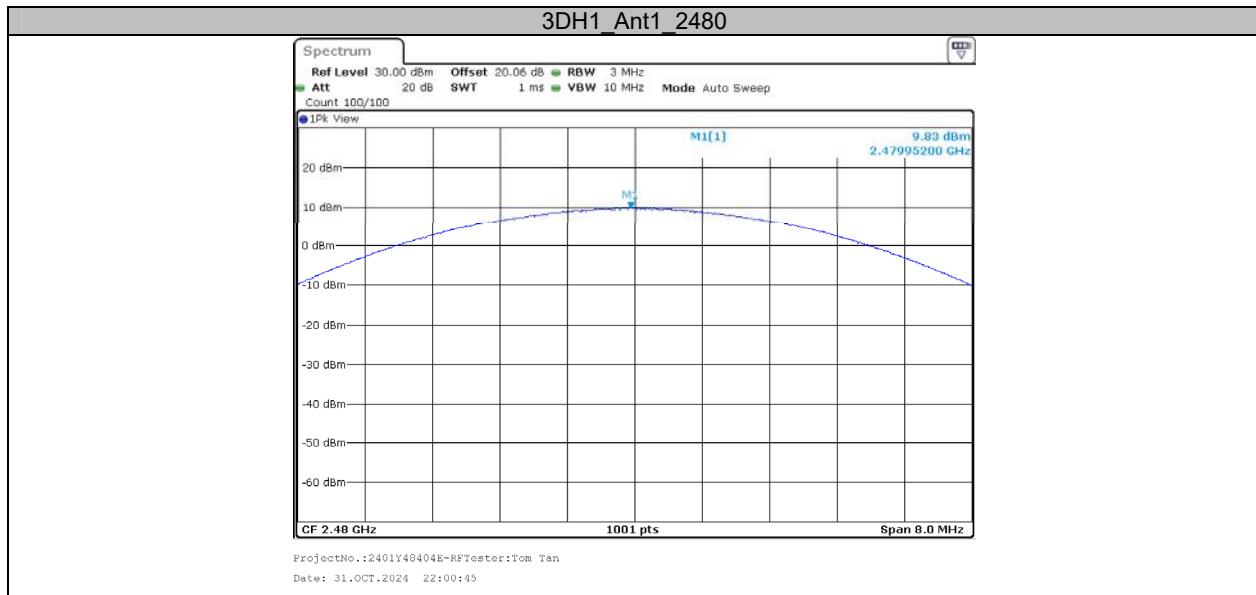


Appendix D: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.000	≥0.867	PASS

Note: Only the BDR (GFSK) mode result is reported since EDR ($\pi/4$ -DQPSK) and EDR (8DPSK) modes have the exact same channel plan, and the limit is the maximum 20dB bandwidth *2/3

Test Graphs

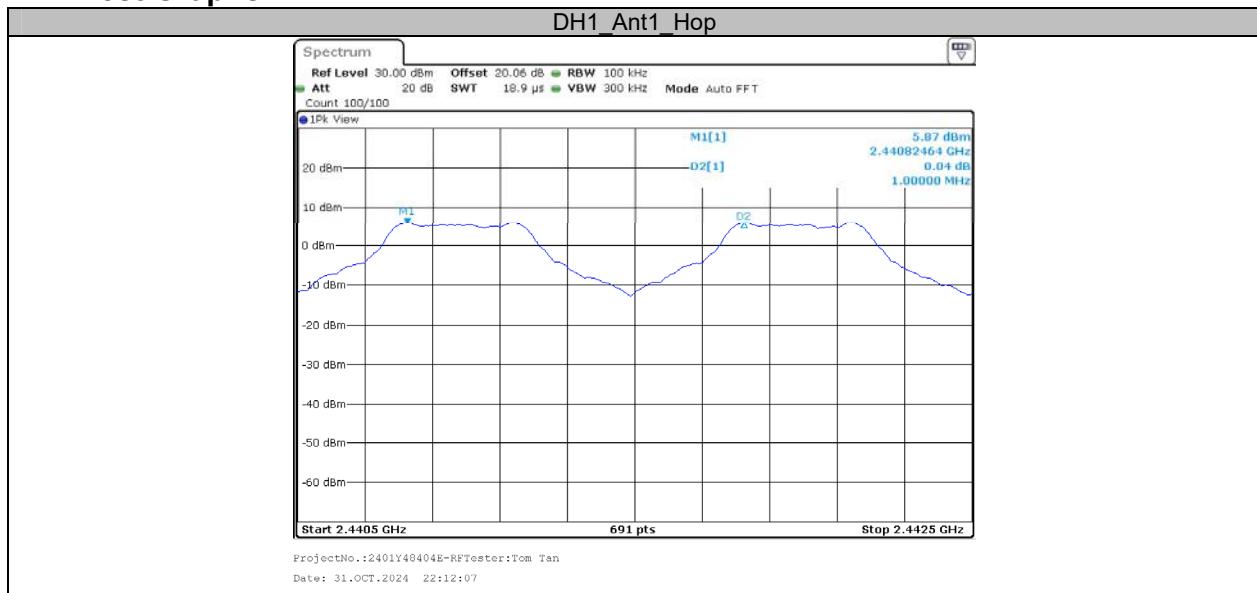



Appendix E: Time of occupancy**Test Result**


Test Mode	Antenna	Frequency[MHz]	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.369	330	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.619	180	0.291	≤0.4	PASS
DH5	Ant1	Hop	2.858	130	0.372	≤0.4	PASS
2DH1	Ant1	Hop	0.380	330	0.125	≤0.4	PASS
2DH3	Ant1	Hop	1.624	160	0.260	≤0.4	PASS
2DH5	Ant1	Hop	2.864	130	0.372	≤0.4	PASS
3DH1	Ant1	Hop	0.380	330	0.125	≤0.4	PASS
3DH3	Ant1	Hop	1.621	150	0.243	≤0.4	PASS
3DH5	Ant1	Hop	2.865	120	0.344	≤0.4	PASS


Note 1: A period time=0.4*79=31.6(S), Result=Burst Width*Total Hops
Note 2: Total Hhops=Hopping Number in 3.16s*10
Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)


Test Graphs

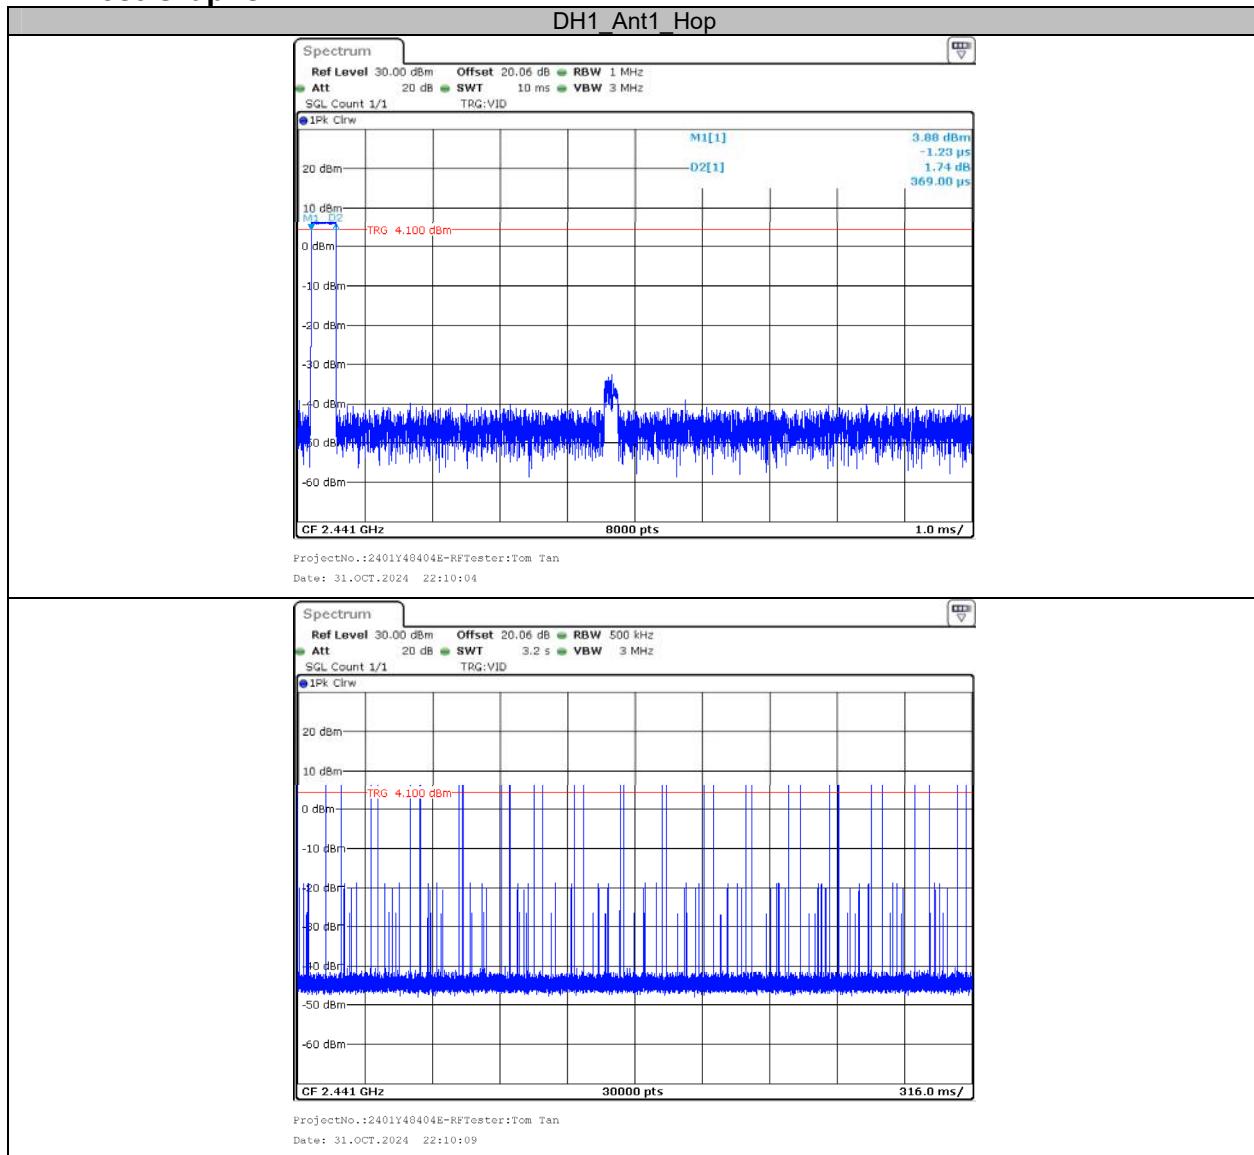


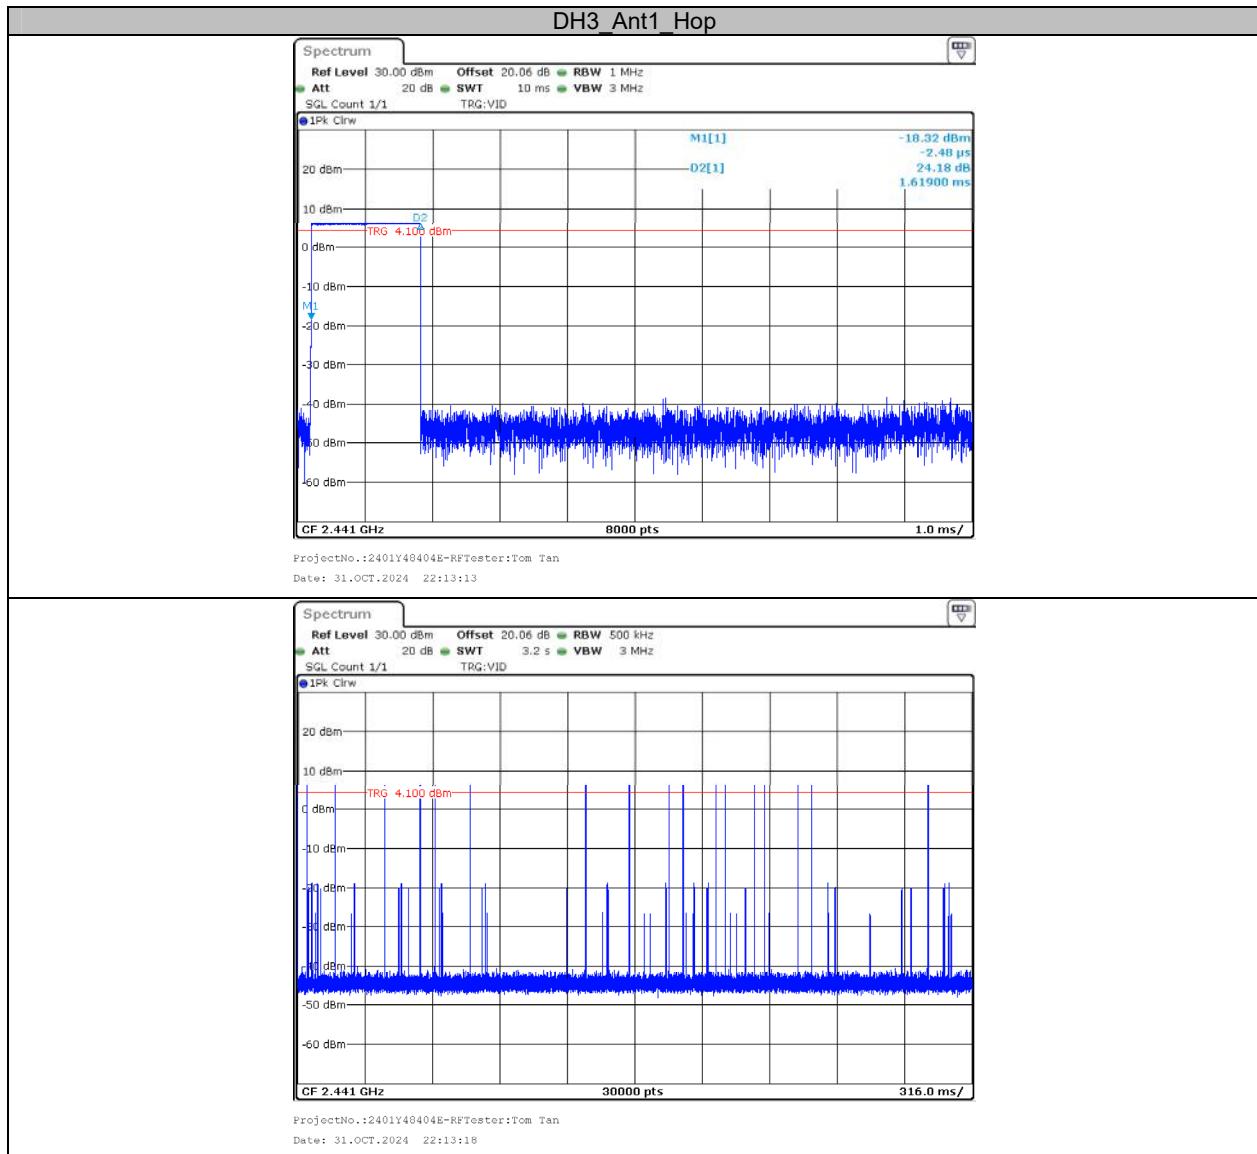


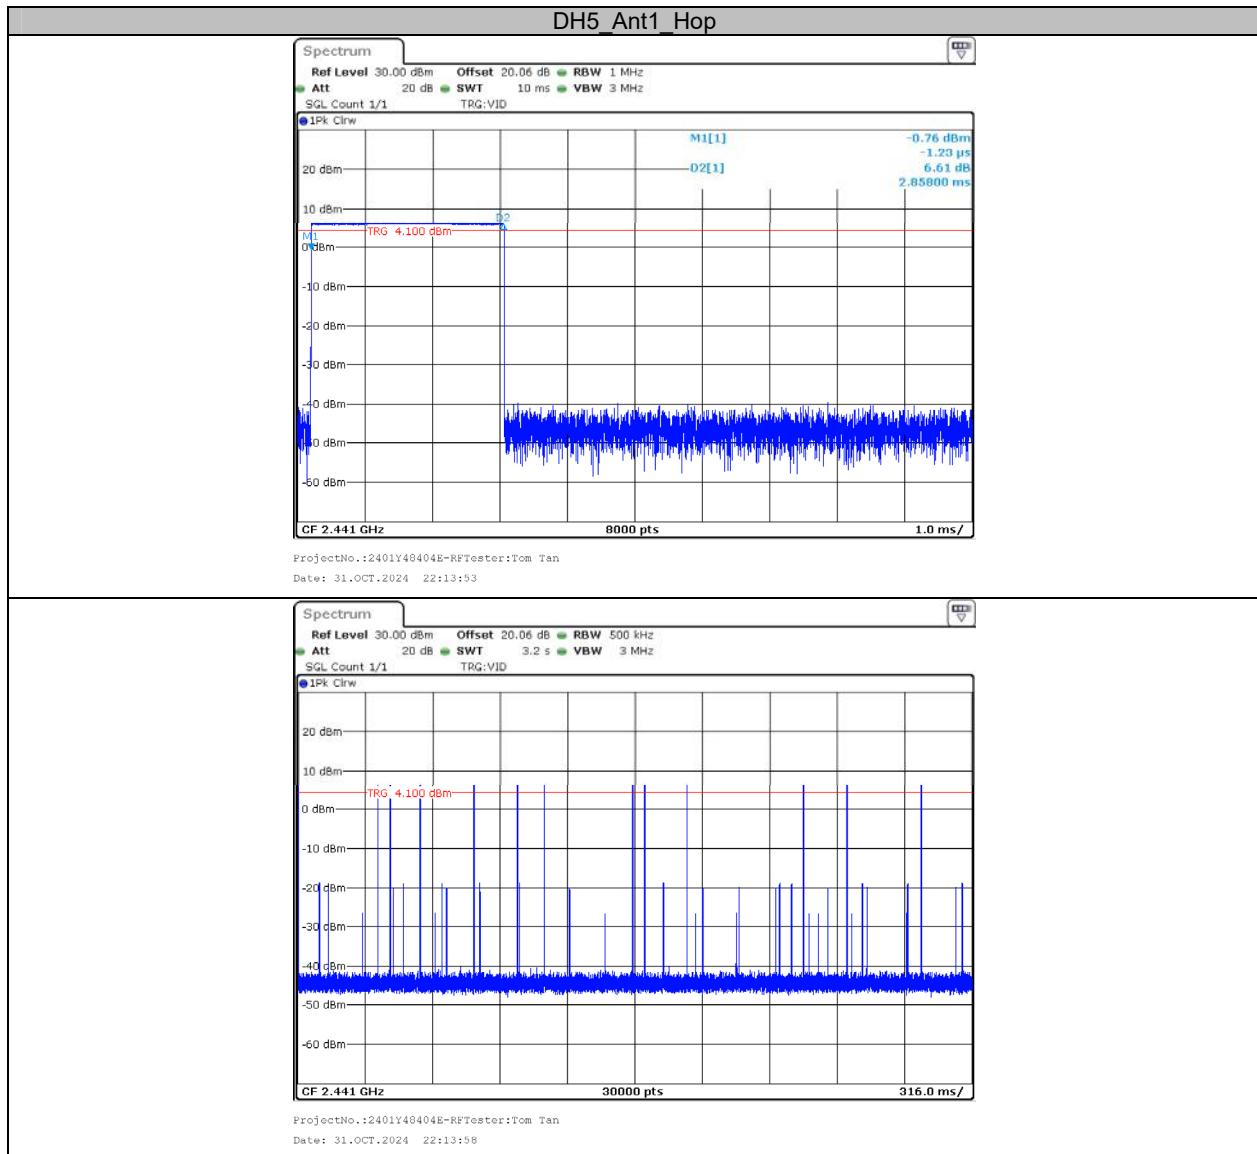


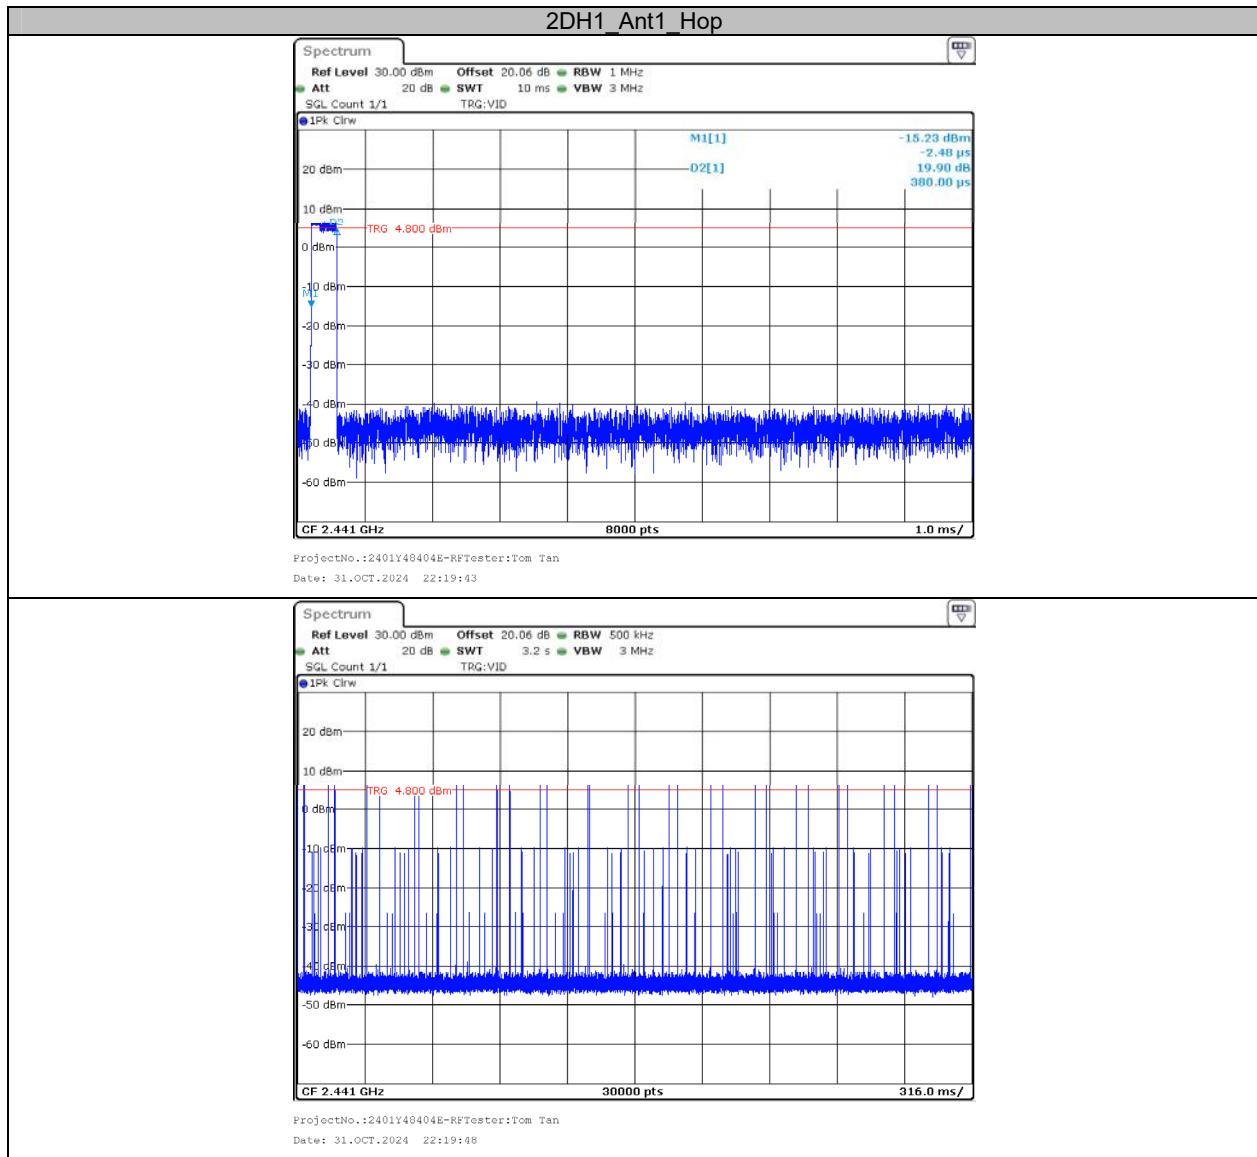


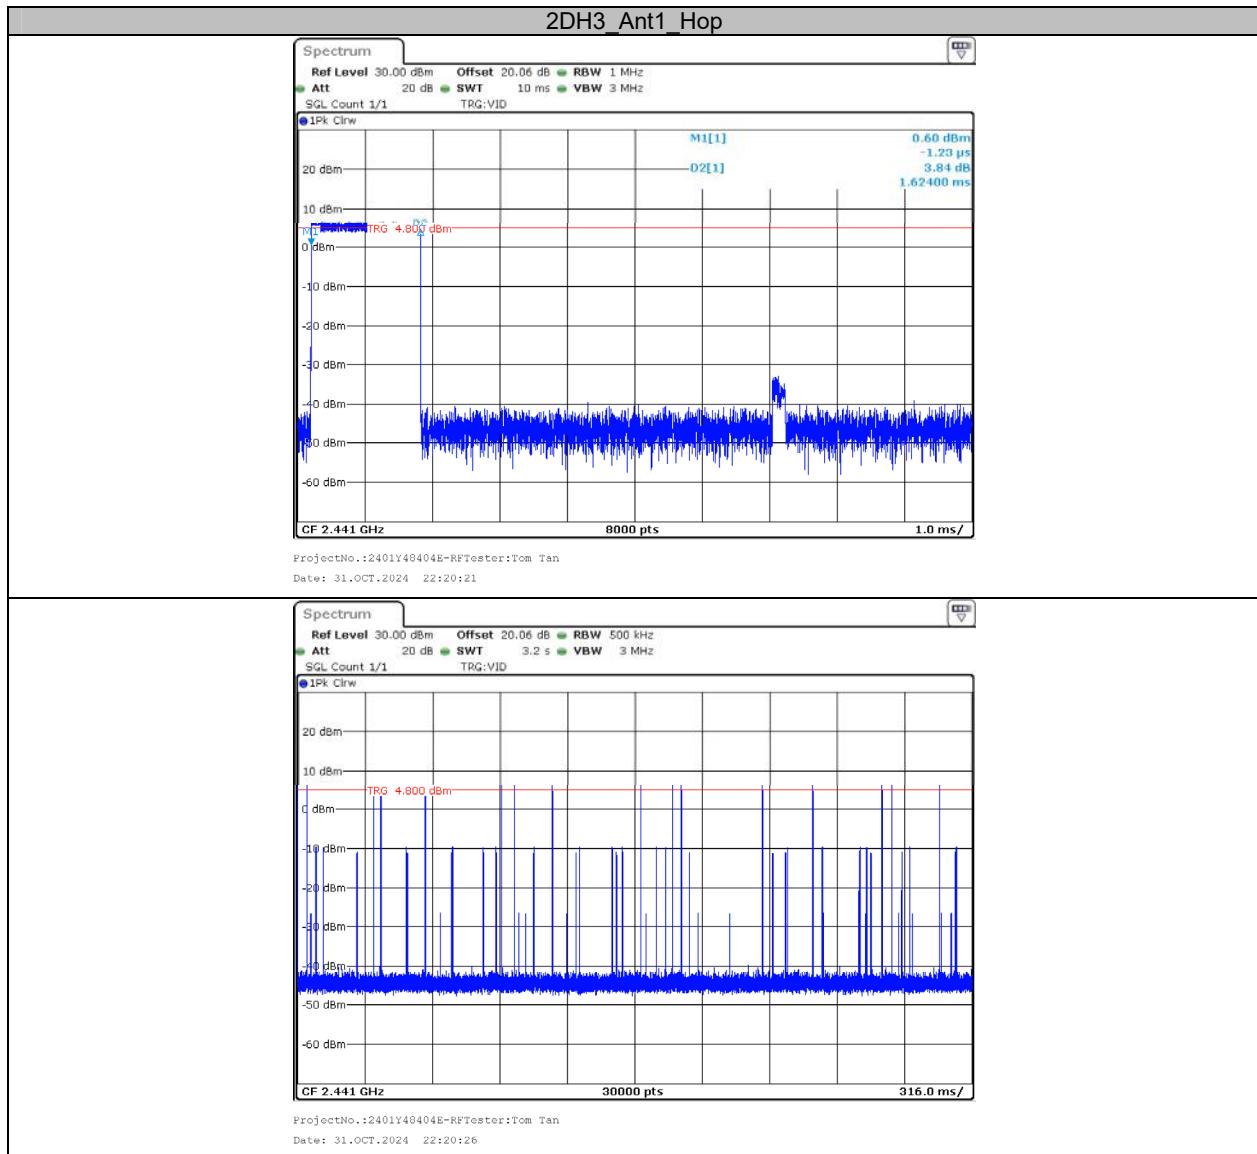

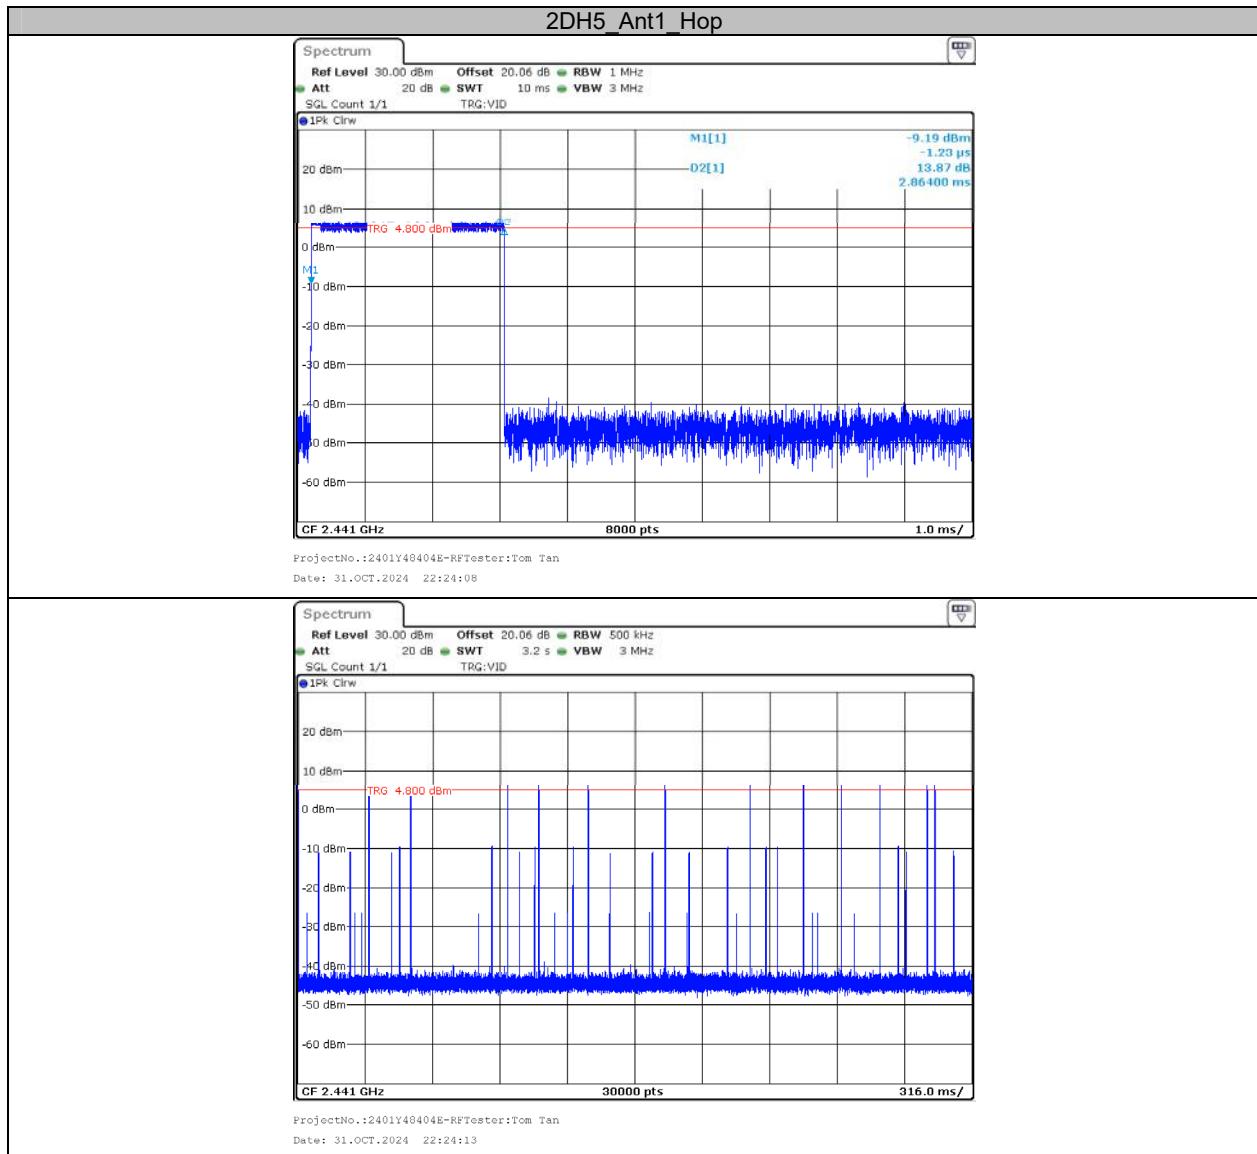

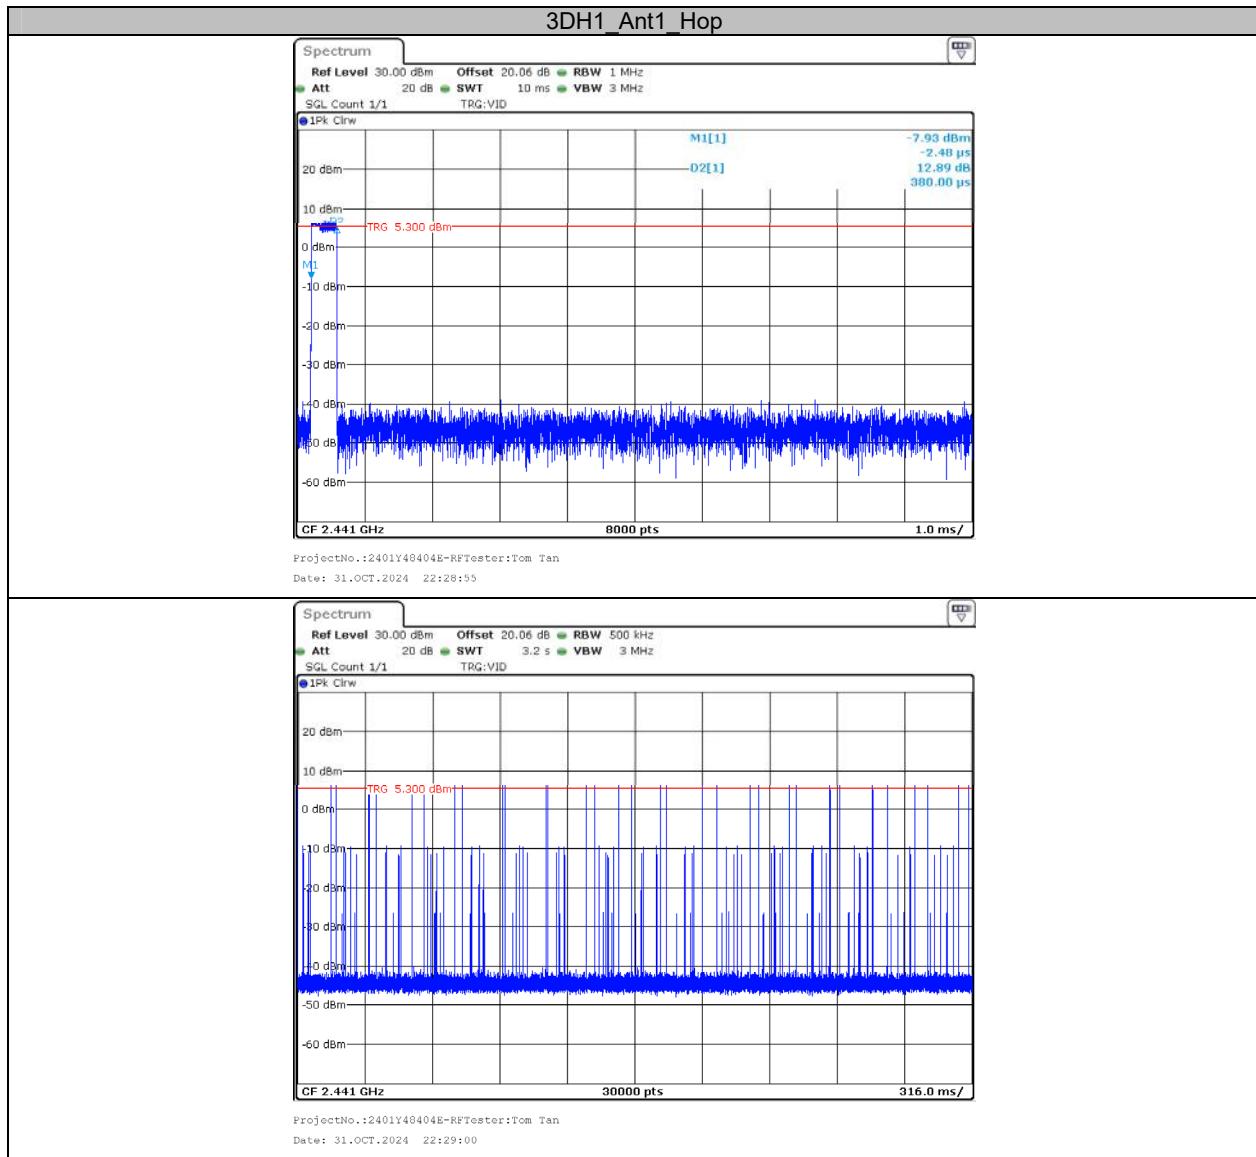

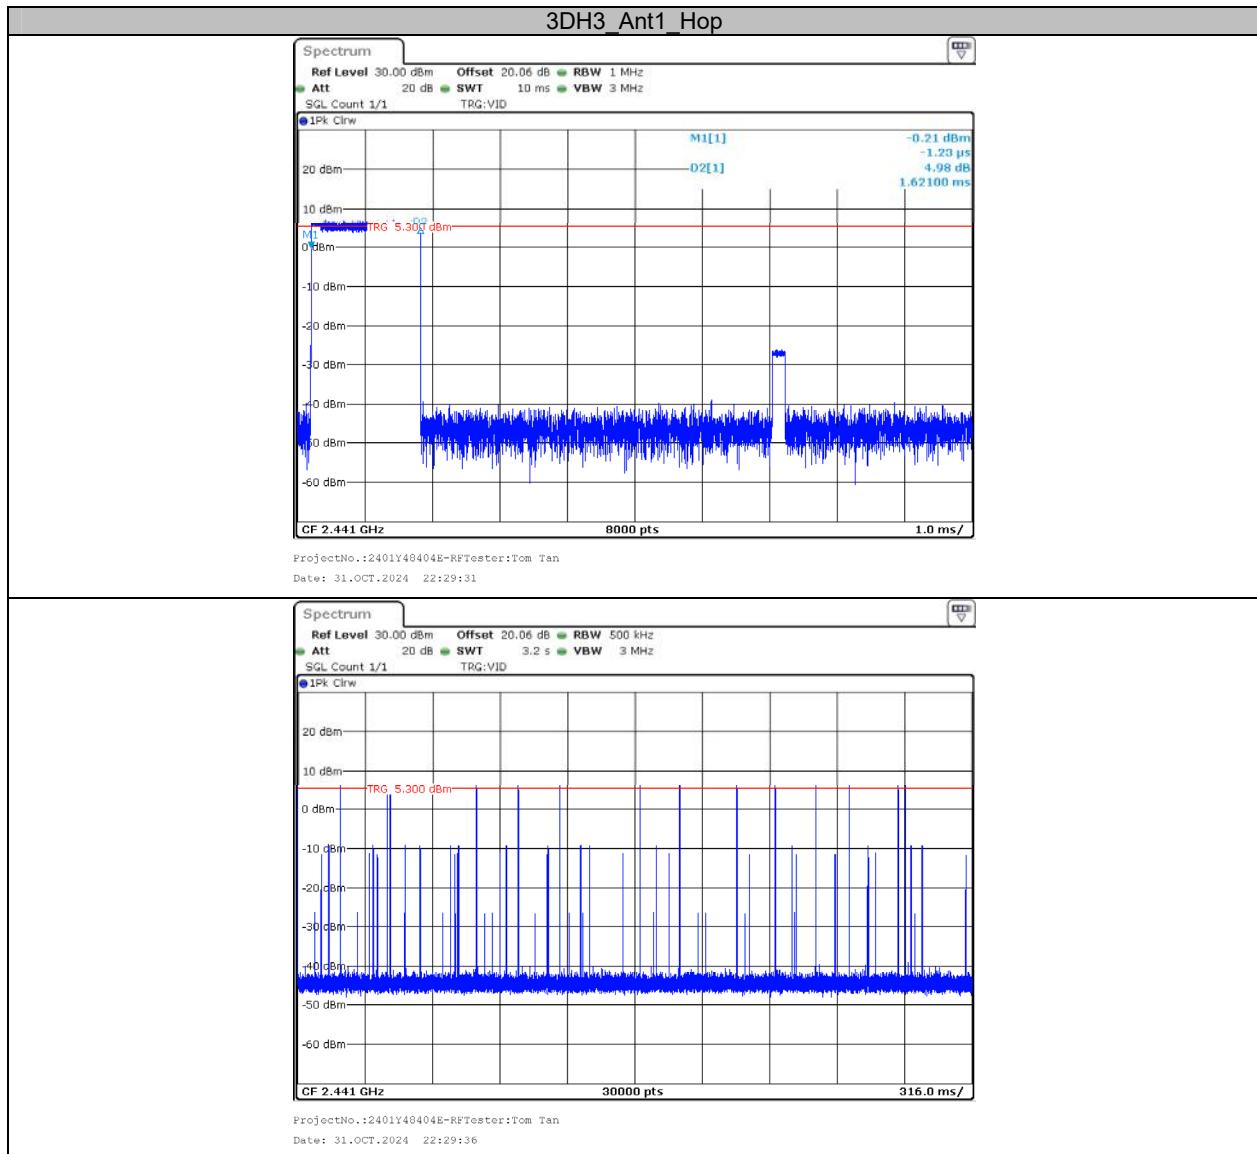


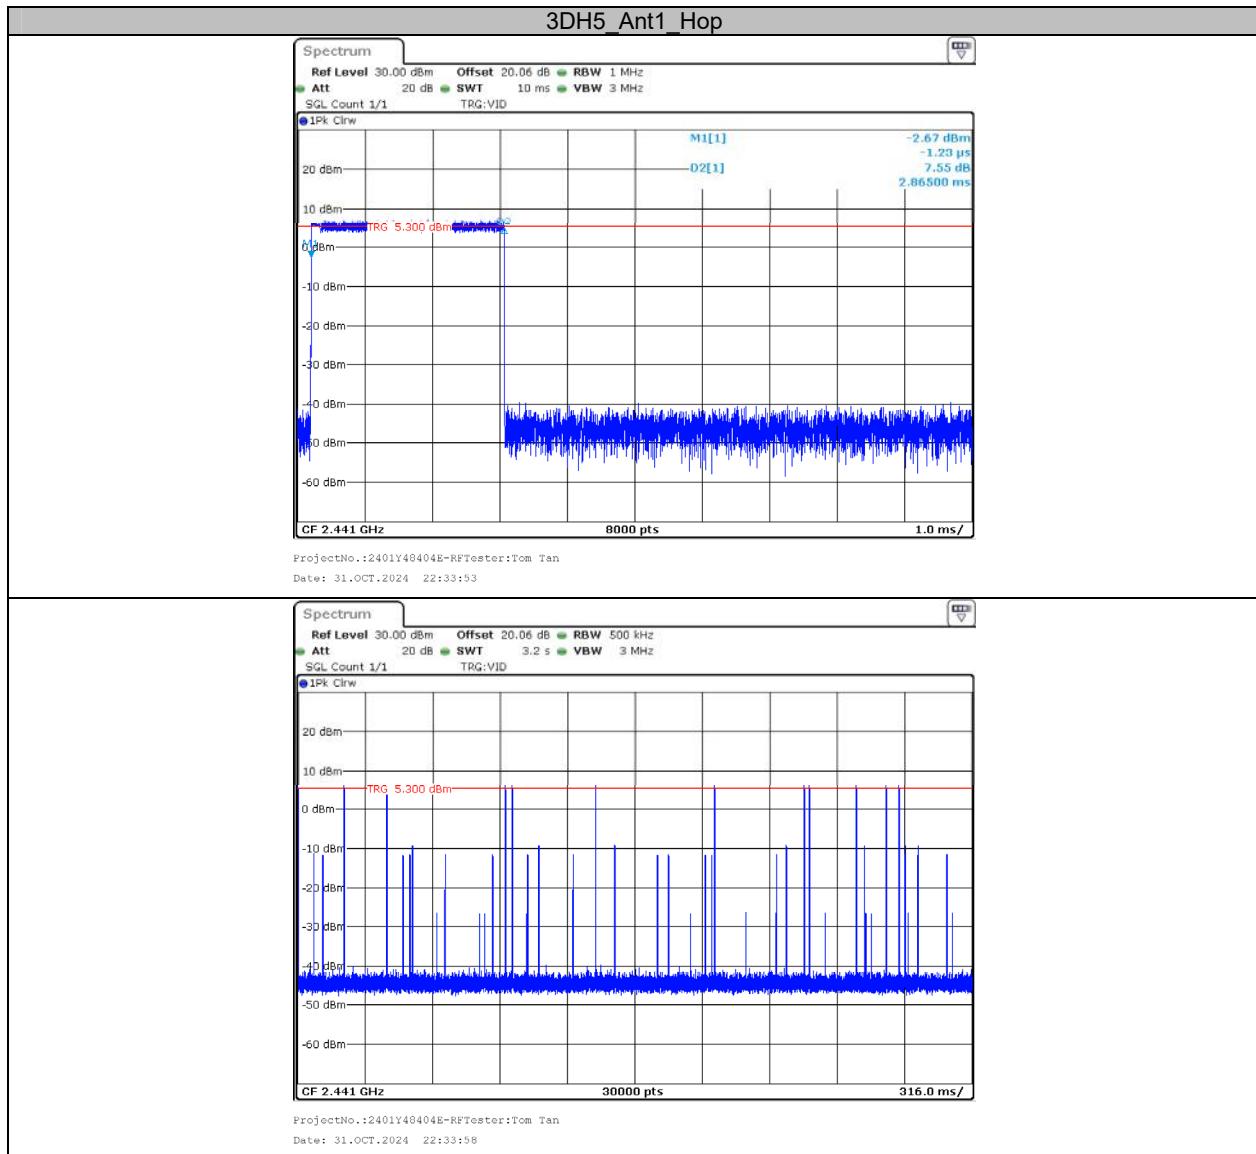


Appendix F: Number of hopping channels**Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


Test Graphs

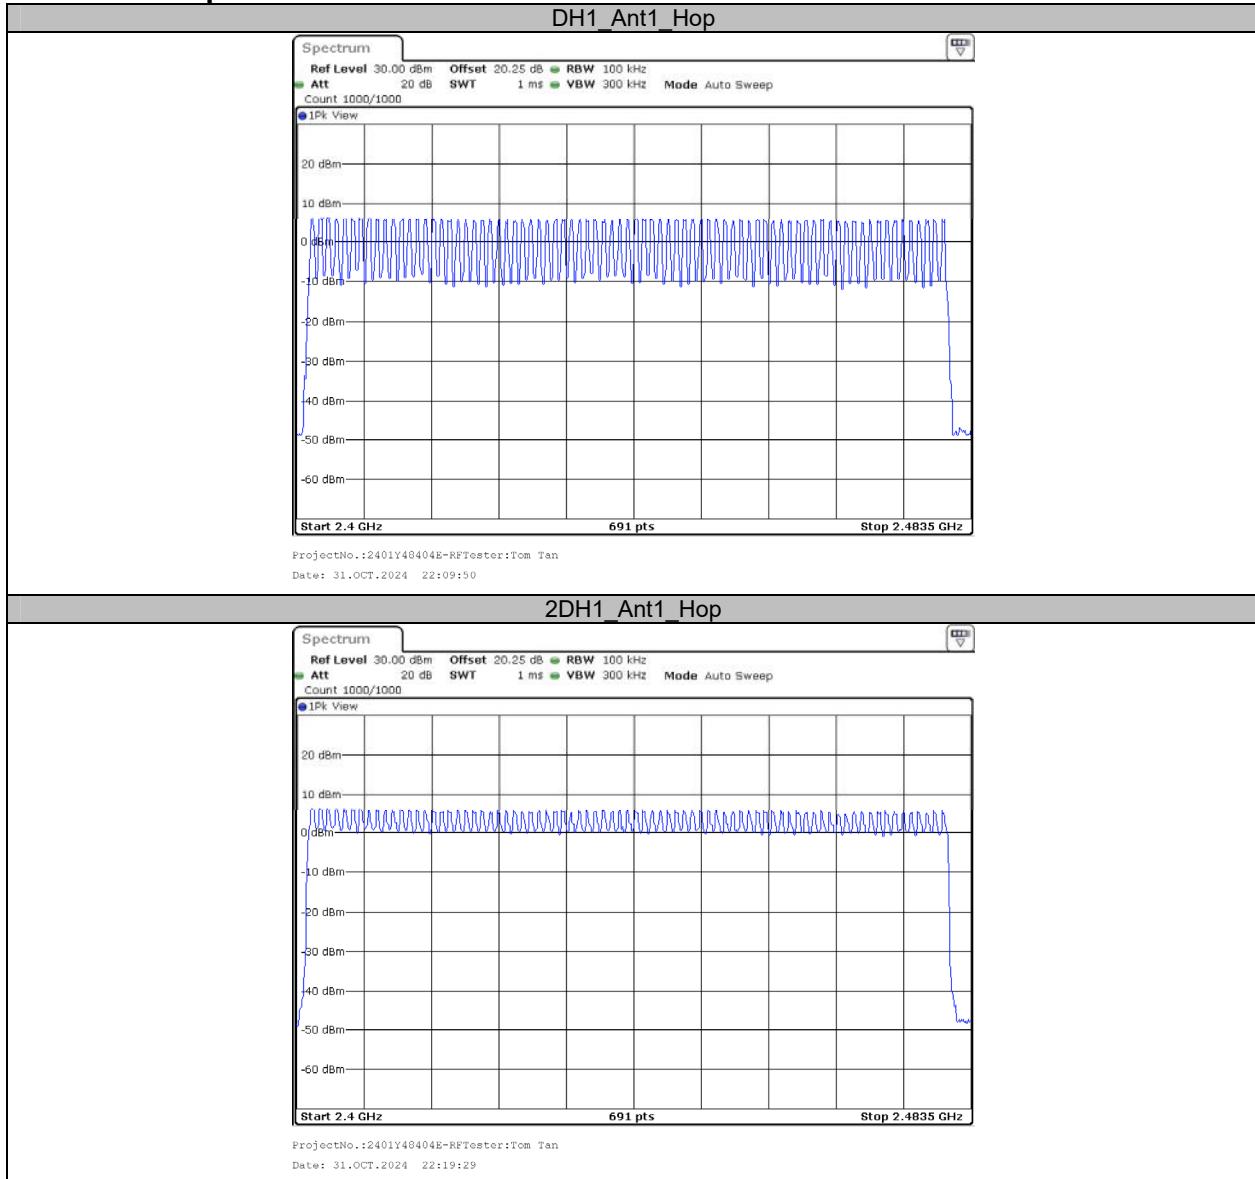

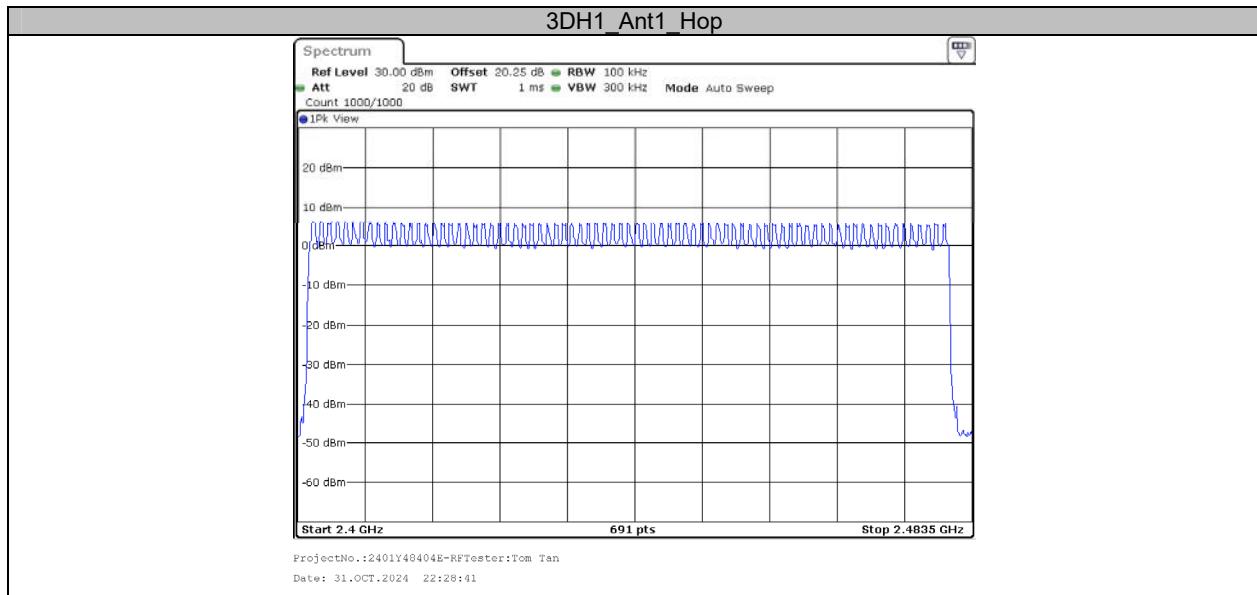



Appendix G: Band edge measurements


Test Graphs

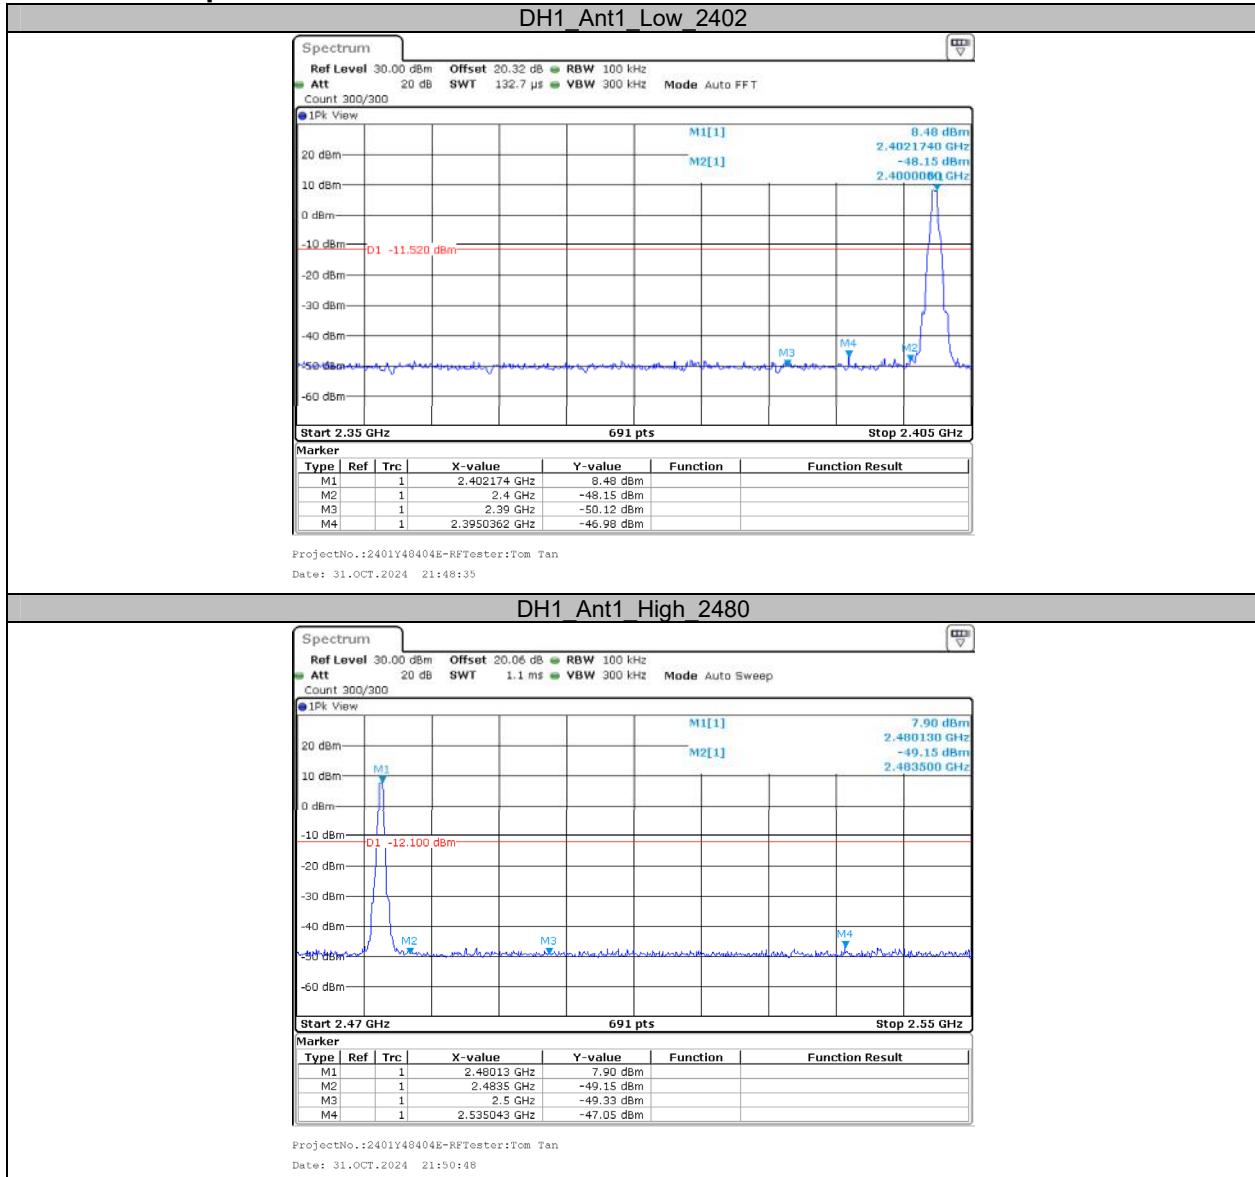



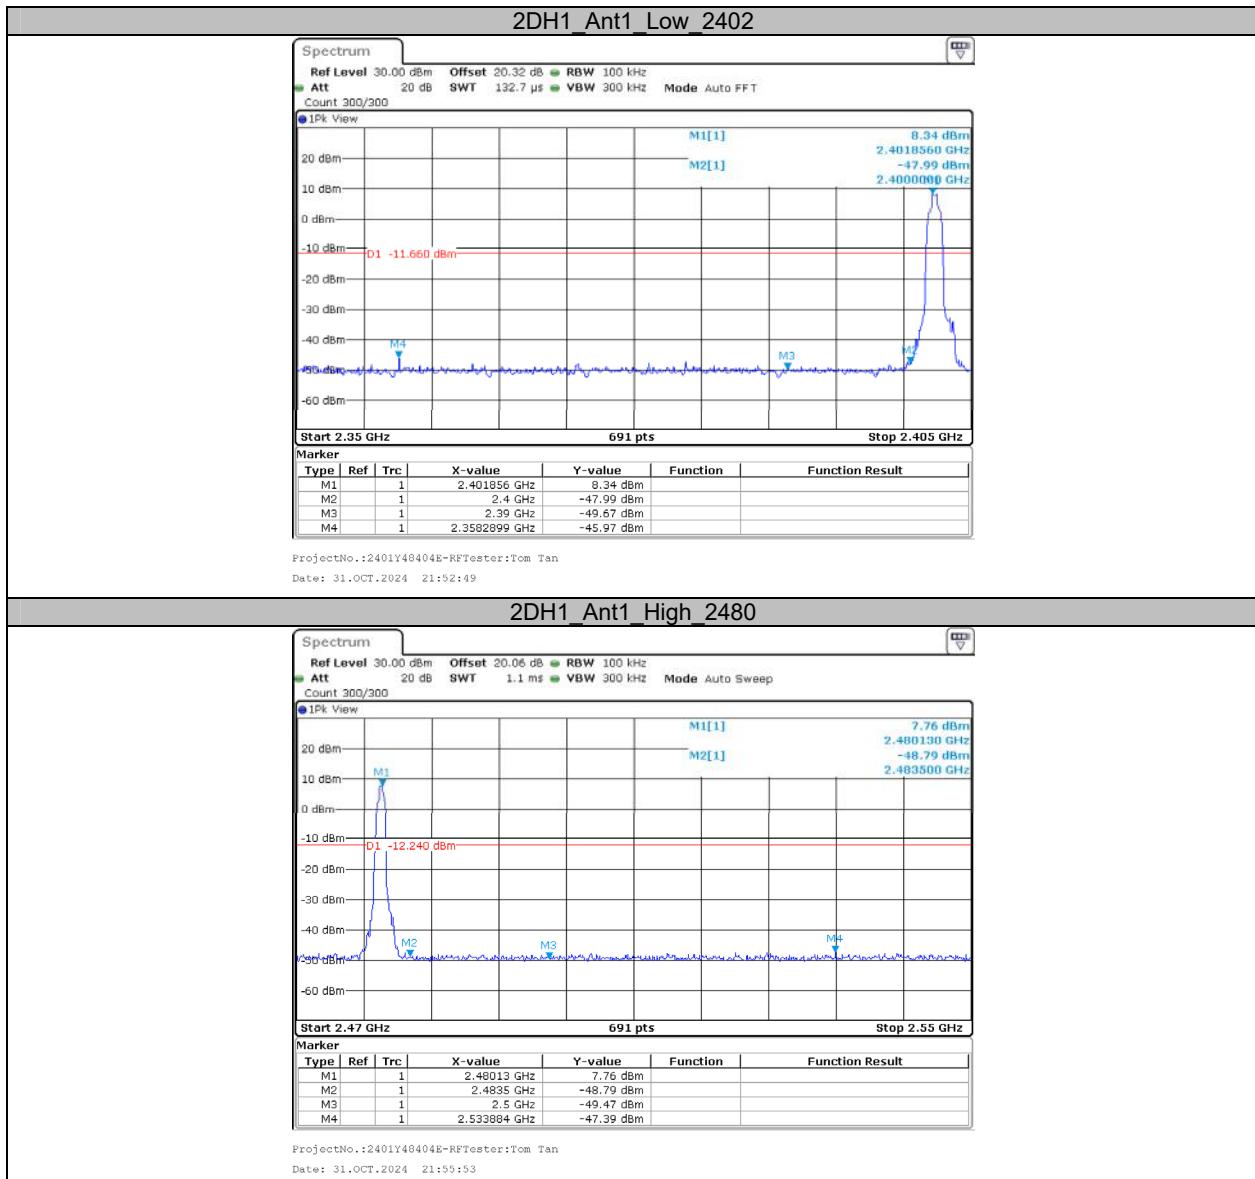

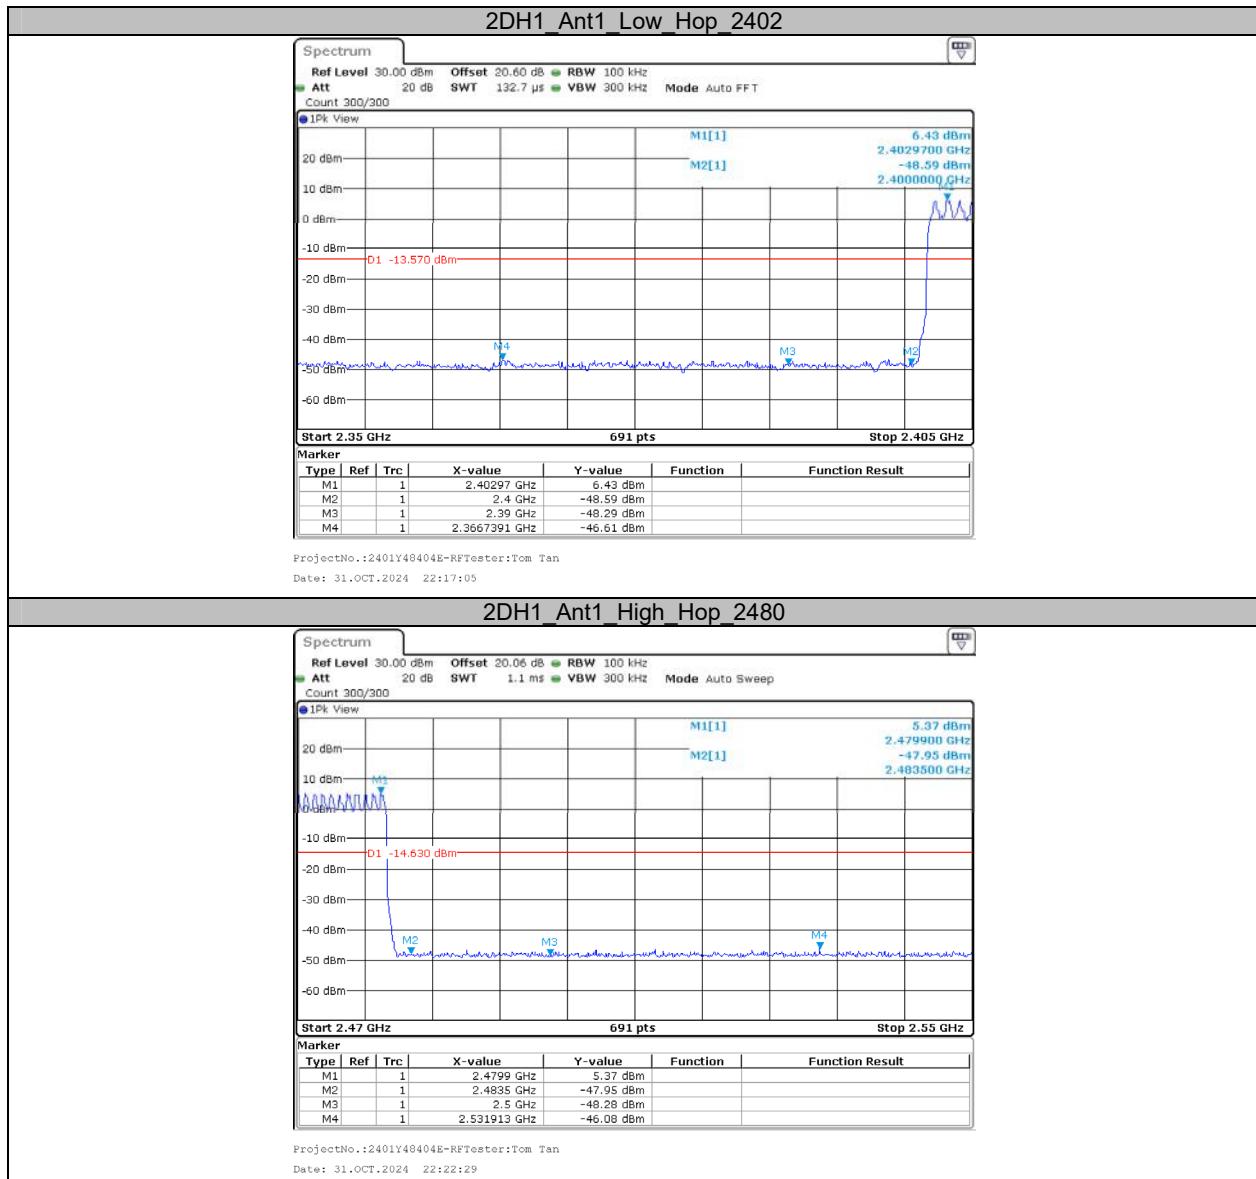

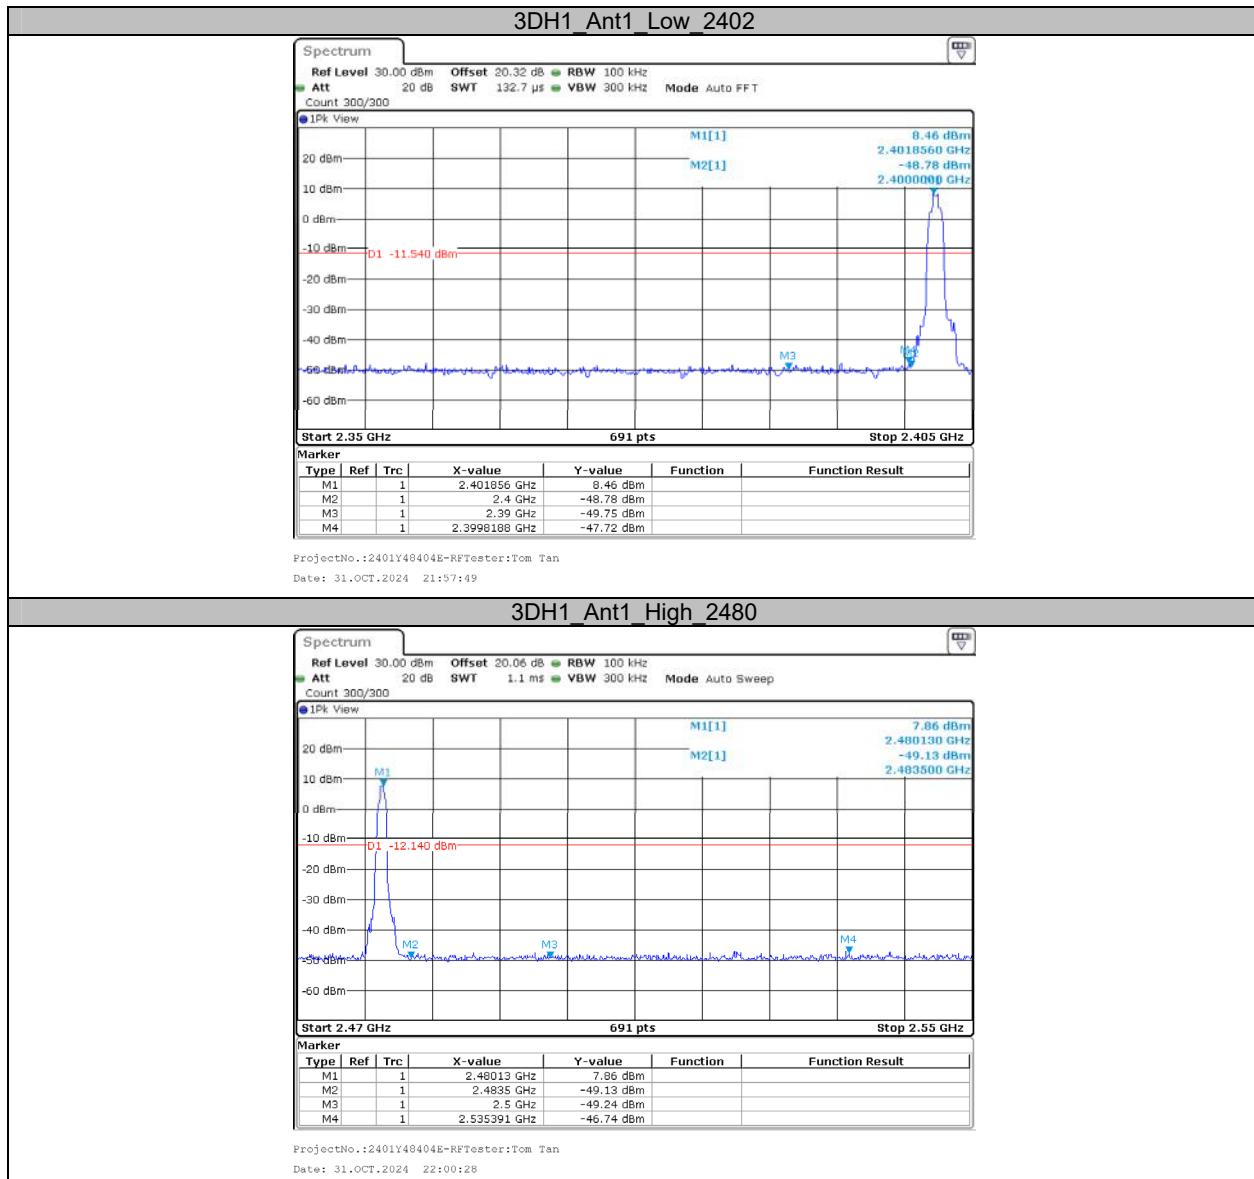



***** END OF REPORT *****