



## FCC PART 15.231


### TEST REPORT

For

**Hangzhou Hamaton Tyre Valves Co., Ltd.**

12 East Zhenxing Road, Linping, Yuhang, Hangzhou, China

**FCC ID: Z27HTS5A433**

<b>Report Type:</b> Original Report	<b>Product Type:</b> TPMS Sensor
<b>Test Engineer:</b> <u>Ares Liu</u> 	
<b>Report Number:</b> <u>R2SH140422051-00</u>	
<b>Report Date:</b> <u>2014-06-16</u>	
<b>Reviewed By:</b> Ivan Cao <u>RF Leader</u>	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
JUSTIFICATION .....	4
EQUIPMENT MODIFICATIONS .....	4
BLOCK DIAGRAM OF TEST SETUP .....	4
<b>SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>6</b>
APPLICABLE STANDARD .....	6
<b>FCC §15.205, §15.209, §15.231 (E) - RADIATED EMISSIONS .....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE .....	9
APPLICABLE STANDARD .....	9
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	9
TEST RESULTS SUMMARY .....	10
TEST DATA .....	10
<b>FCC §15.231(C) – 20 DB BANDWIDTH TESTING.....</b>	<b>16</b>
REQUIREMENT .....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE .....	16
TEST DATA .....	16
<b>FCC §15.231(E) - DEACTIVATION TESTING .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP .....	18
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA .....	19
<b>DECLARATION OF SIMILARITY .....</b>	<b>22</b>

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *Hangzhou Hamaton Tyre Valves Co., Ltd.*'s product, model number: *Eupro3001 (FCC ID: Z27HTS5A433)* (the "EUT") in this report is a *TPMS Sensor*, which was measured approximately: 7.4 cm (L) x 4.9 cm (W) x 2.4 cm (H), rated input voltage: DC 3V from battery.

*Note: The series product, model Eupro3001, DVT-1003A, PRO1003A are electrically identical except for model name, housing color, valves, the data length of RF transmission signal and the time intervals of RF transmission signal, we selected Eupro3001 for fully testing, the details was explained in the attached declaration letter.*

*All measurement and test data in this report was gathered from production sample serial number: 140422051 (Assigned by BACL, Dongguan). The EUT was received on 2014-04-23.*

### Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4-2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

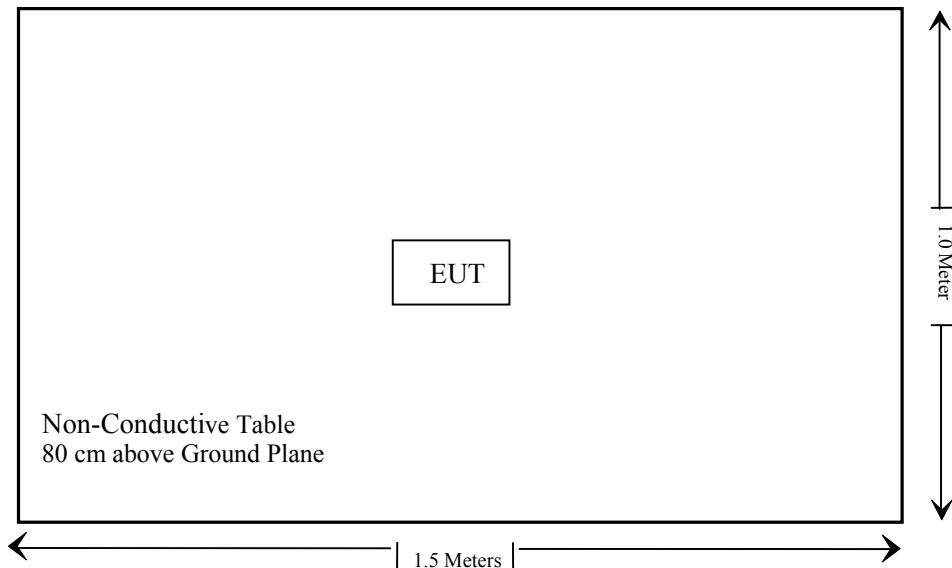
### Justification

The system was configured in testing mode which was provided by manufacturer.

### Equipment Modifications

No modifications were made to the unit tested.

### Block Diagram of Test Setup



**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not applicable*
§15.205, §15.209, §15.231 (e)	Radiated Emissions	Compliance
§15.231 (c)	20dB Bandwidth Testing	Compliance
§15.231 (e)	Deactivation Testing	Compliance

Not applicable\*: The EUT is powered by battery only.

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:** Compliant.

The EUT has an internal antenna welded on the PCB, which complied with 15.203. Please refer to the EUT Internal photos.

## FCC §15.205, §15.209, §15.231 (e) - RADIATED EMISSIONS

### Applicable Standard

FCC §15.205, §15.209, §15.231 (e)

### Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB

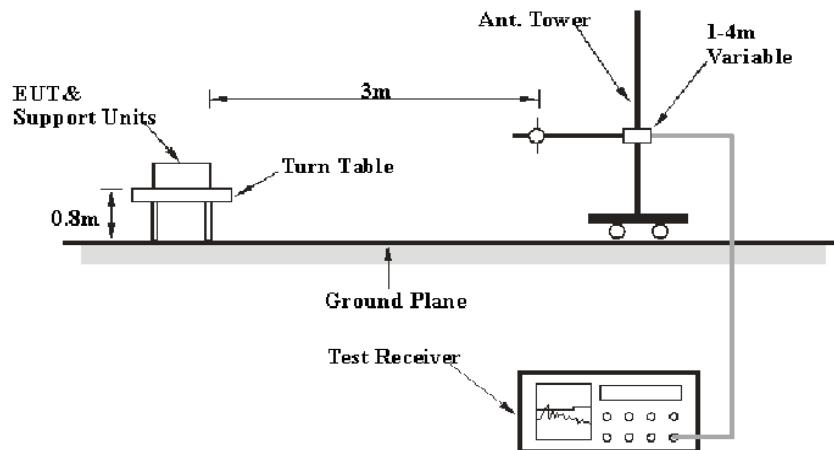
6G~18GHz: 5.23 dB

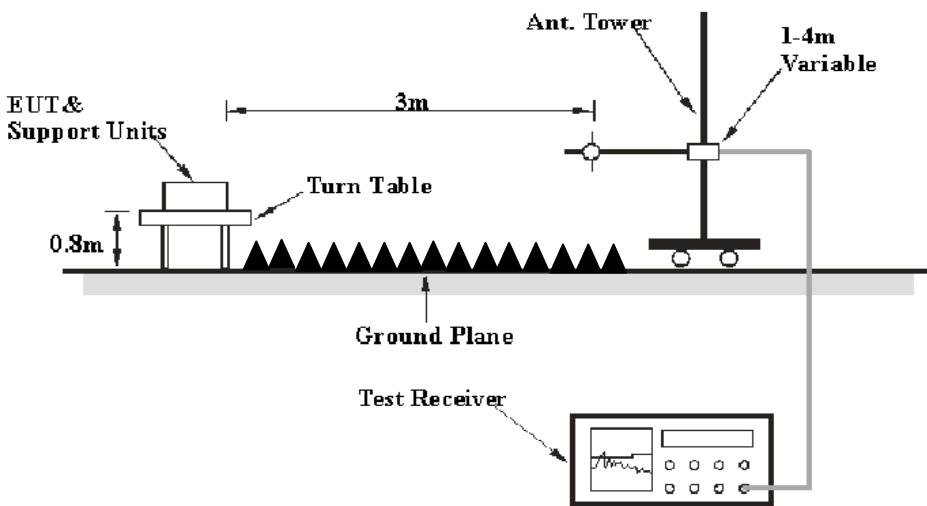
Table 1 – Values of  $U_{\text{cispr}}$

Measurement	$U_{\text{cispr}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1 GHz:



**Above 1 GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

**EMI Test Receiver Setup**

The system was investigated from 30 MHz to 4 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	100kHz	PK
1000 MHz – 4000 MHz	1MHz	3 MHz	/	PK

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-08
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-18

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector

## Applicable Standard

According to §15.231 (e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 *	50 to 150 *
174-260	1,500	150
260-470	1,500 to 5,000*	150 to 500*
Above 470	5,000	500

\*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the CFR47 §15.205, §15.209, §15.231 (e), with the worst margin reading of:

**9.35 dB at 433.92 MHz in the Vertical polarization**

## Test Data

### Environmental Conditions

Temperature:	28.5~28.8 °C
Relative Humidity:	64~67 %
ATM Pressure:	99.6~99.8 kPa

The testing was performed by Ares Liu from 2014-06-15 to 2014-06-19.

Test mode: Transmitting

Field Strength (Peak)

Frequency (MHz)	Receiver	Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	15.231	
		Reading (dB $\mu$ V)	Polar (H/V)				Limit (dB $\mu$ V/m)	Margin (dB)
Operating Frequency: 433.92 MHz								
433.92	80.24	H	16.85	2.49	21.85	77.73	92.87	15.14
433.92	86.03	V	16.85	2.49	21.85	83.52	92.87	9.35
867.84	38.65	H	22.50	3.59	22.23	42.51	72.87	30.36
867.84	37.41	V	22.50	3.59	22.23	41.27	72.87	31.60
1301.76	37.54	H	23.08	2.91	26.91	36.62	74.00	37.38
1301.76	35.86	V	23.08	2.91	26.91	34.94	74.00	39.06
1735.68	38.69	H	24.07	3.60	27.62	38.74	74.00	35.26
1735.68	37.12	V	24.07	3.60	27.62	37.17	74.00	36.83
2169.6	39.67	H	25.04	4.16	27.32	41.55	74.00	32.45
2169.6	38.48	V	25.04	4.16	27.32	40.36	74.00	33.64

## Field Strength (Average)

Frequency (MHz)	Peak Measurement @ 3m (dB $\mu$ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dB $\mu$ V/m)	15.231	
					Limit (dB $\mu$ V/m)	Margin (dB)
Operating Frequency: 433.92 MHz						
433.92	77.73	H	-17.13	60.6	72.87	12.27
433.92	83.52	V	-17.13	66.39	72.87	6.48
867.84	42.51	H	-17.13	25.38	52.87	27.49
867.84	41.27	V	-17.13	24.14	52.87	28.73
1301.76	36.62	H	-17.13	19.49	54	34.51
1301.76	34.94	V	-17.13	17.81	54	36.19
1735.68	38.74	H	-17.13	21.61	54	32.39
1735.68	37.17	V	-17.13	20.04	54	33.96
2169.6	41.55	H	-17.13	24.42	54	29.58
2169.6	40.36	V	-17.13	23.23	54	30.77

\*Within measurement uncertainty!

Note:

Calculate Average value based on duty cycle correction factor:

Duty cycle correction factor=  $20 \times \log(\text{duty cycle})$

For DVT-1003A:

Duty cycle=  $2 \times (2 \times 0.48 + 38 \times 0.12 + 6 \times 0.24) / 100 = 13.92\%$

Duty cycle correction factor=  $20 \times \log(\text{duty cycle}) = -17.13 \text{ dB}$

For Eupro3001:

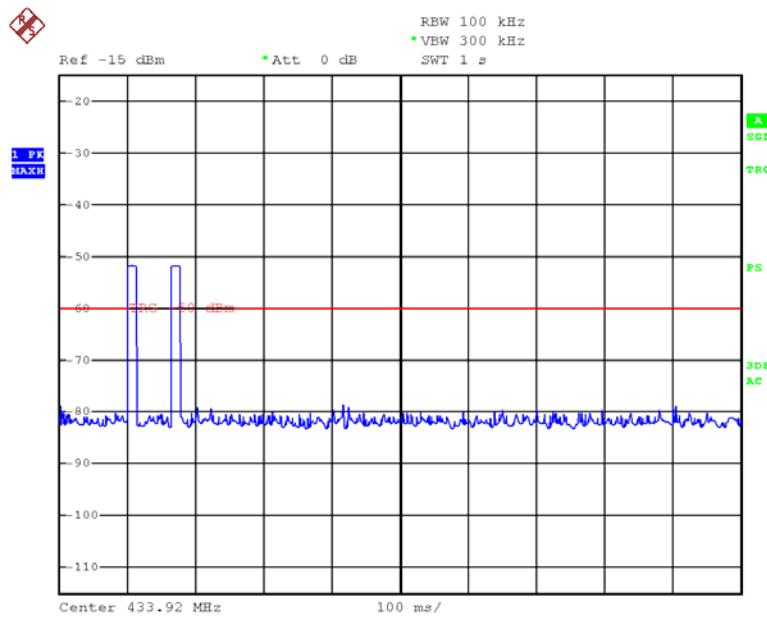
Duty cycle=  $11.32 / 100 = 11.32\%$

Duty cycle correction factor=  $20 \times \log(\text{duty cycle}) = -18.92 \text{ dB}$

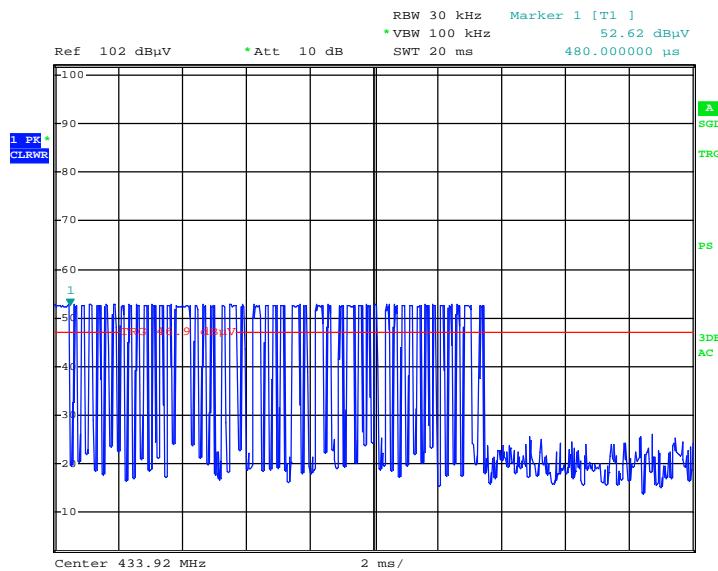
So The Max. duty cycle is 13.92%, and correction factor is -17.13 dB

Please refer to following plot.

Model: DVT-1003A

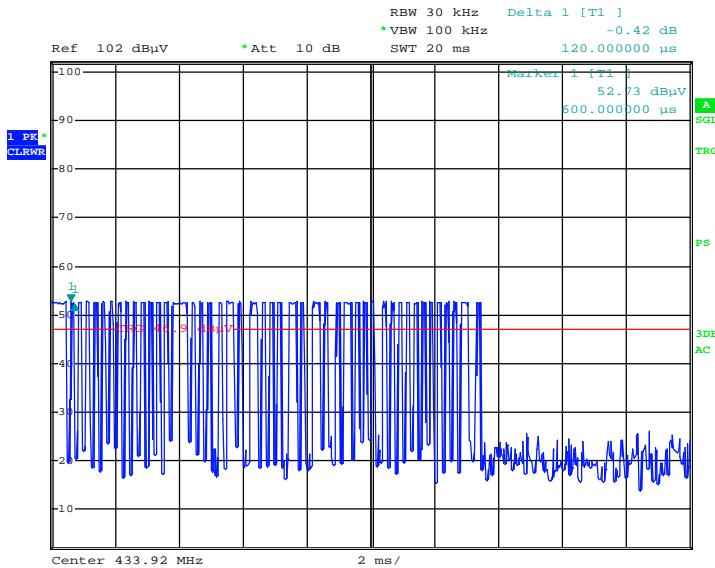
**Two Group pulse in a Duration time**

Date: 19.JUN.2014 13:36:03

**2pcs 480 us pulse in a group**

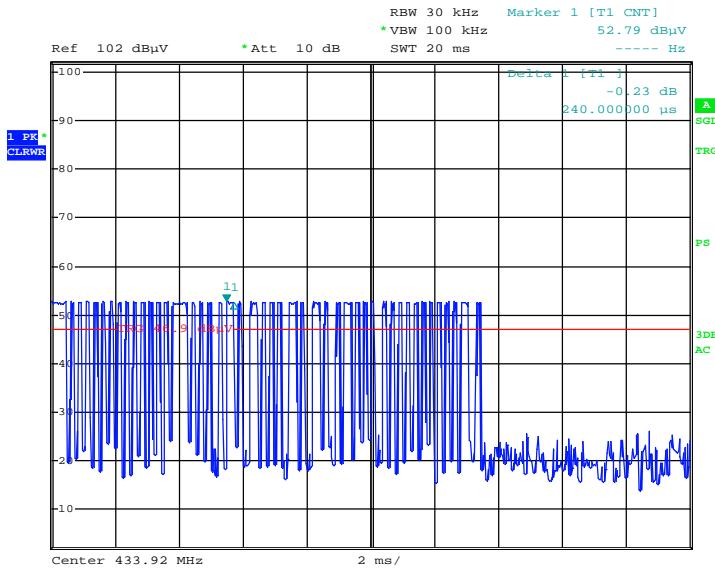
88

Date: 15.JUN.2014 17:01:32

**38pcs 120 us pulse in a group**

88

Date: 15.JUN.2014 17:01:48

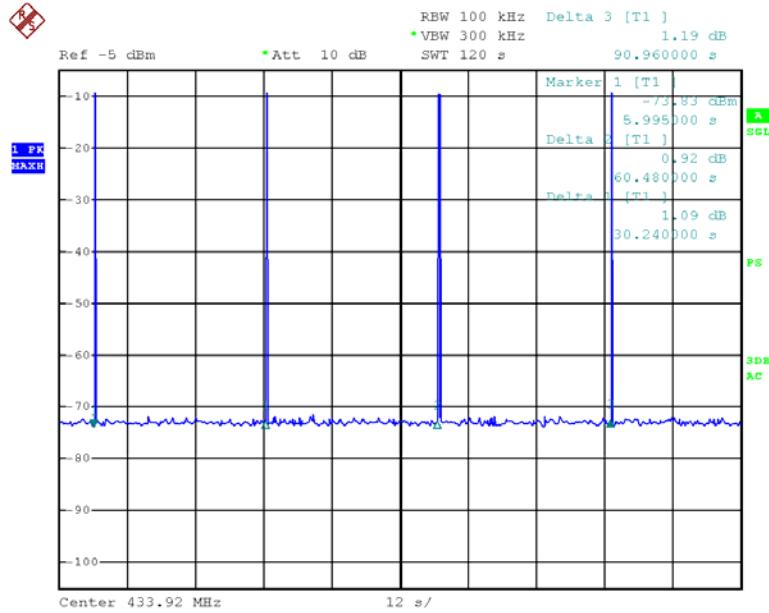
**6pcs 240 us pulse in a group**

88

Date: 15.JUN.2014 17:02:09

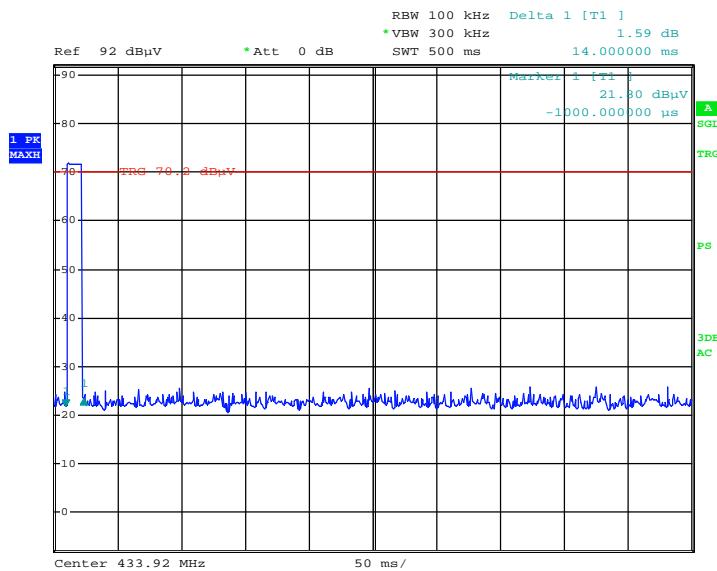
Model: Eupro3001

## Period Time 30.24s



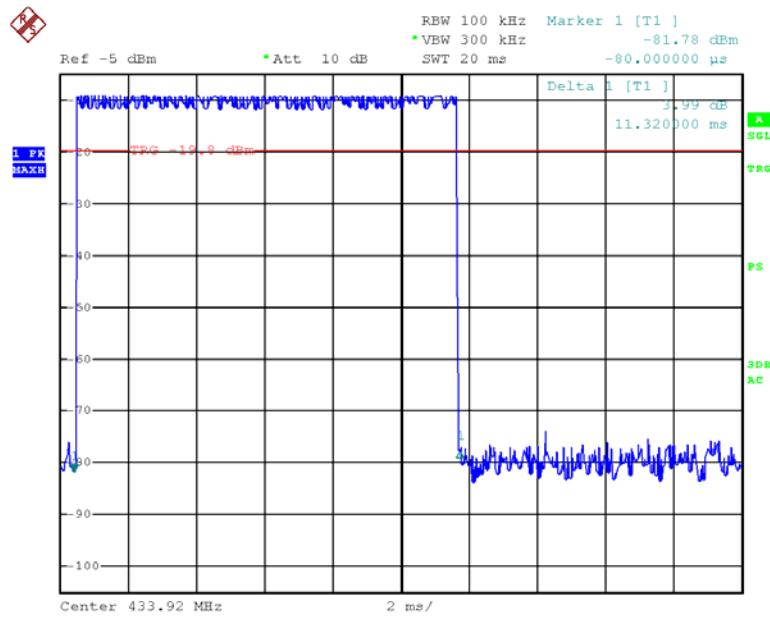
Date: 18.JUN.2014 11:23:18

## A Group Pulse In a Duration Time



88

Date: 25.JUN.2014 00:03:43

**Total On Time 11.32ms**

Date: 18.JUN.2014 11:14:14

## FCC §15.231(c) – 20 dB BANDWIDTH TESTING

### Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

### Test Data

#### Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	63 %
ATM Pressure:	100.6 kPa

*The testing was performed by Ares Liu on 2014-05-04.*

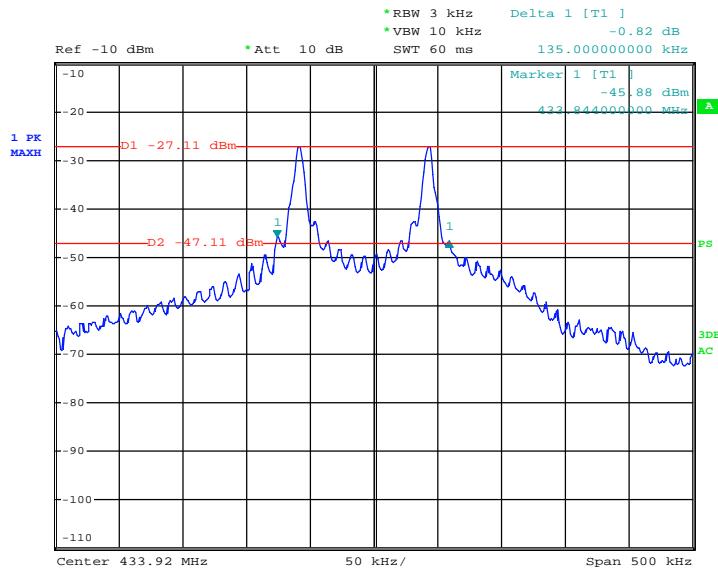
*Test Mode: Transmitting*

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Result
433.92	135	1084.8	Pass

**Note:** Limit = 0.25% \* Center Frequency = 0.25% \* 433.92 MHz = 1084.8 kHz

## 20 dB Bandwidth



88

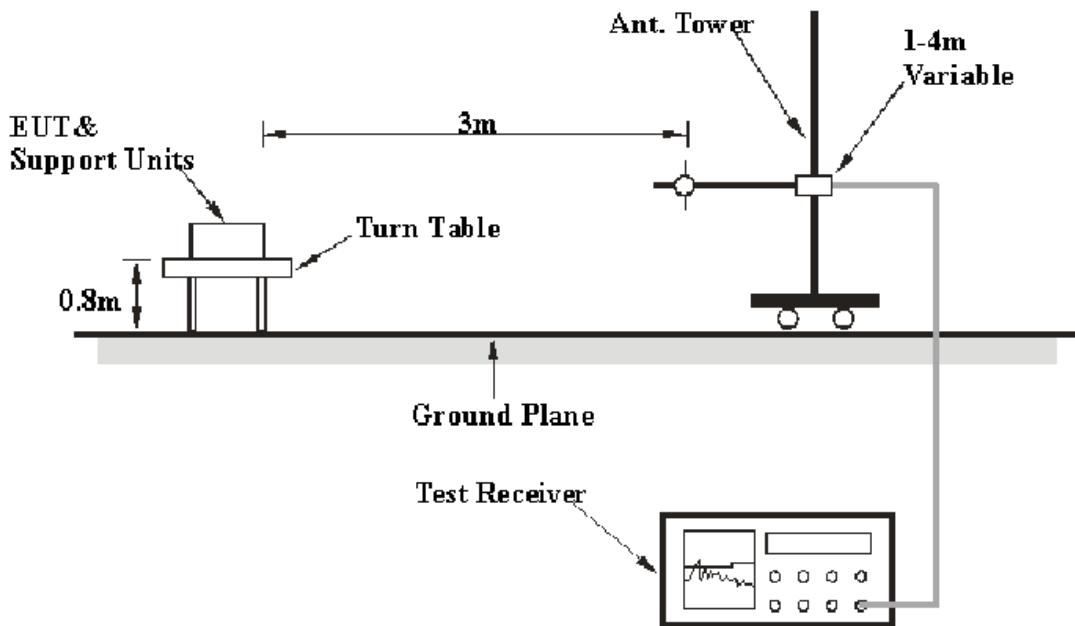
Date: 4.MAY.2014 15:57:30

## FCC §15.231(e) - DEACTIVATION TESTING

### Applicable Standard

Per 15.231(e) , devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### EUT Setup



The deactivation test was performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15.231(e) limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-08
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions

Temperature:	28.5~28.8 °C
Relative Humidity:	64~67 %
ATM Pressure:	99.6~99.8 kPa

The testing was performed by Ares Liu from 2014-06-15 to 2014-06-19.

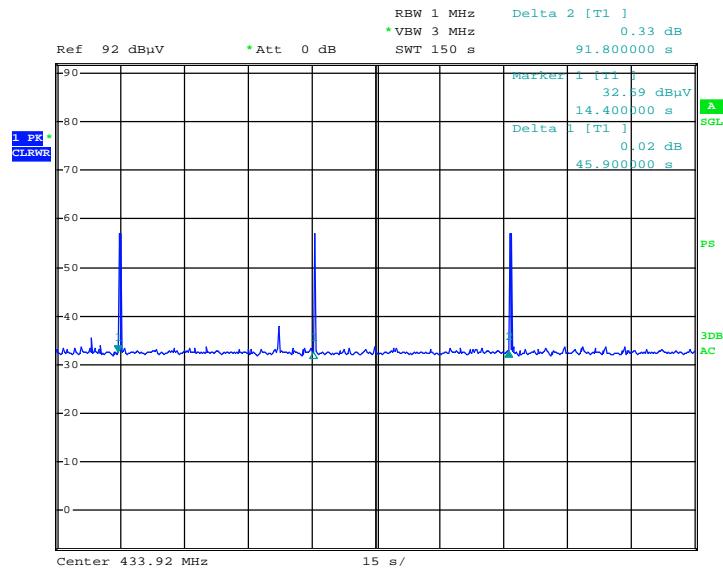
Test Mode: Transmitting

Test Result: Compliance. Please refer to following plot.

Model	Period time	Duration time	Silent time	Silent time Limit	Result
DVT-1003A	45.9s	less than 100ms	more than 45.8s	>10s and >30* Duration time	Pass
Eupro3001	30.24s	11.32ms	more than 30s	>10s and >30* Duration time	Pass

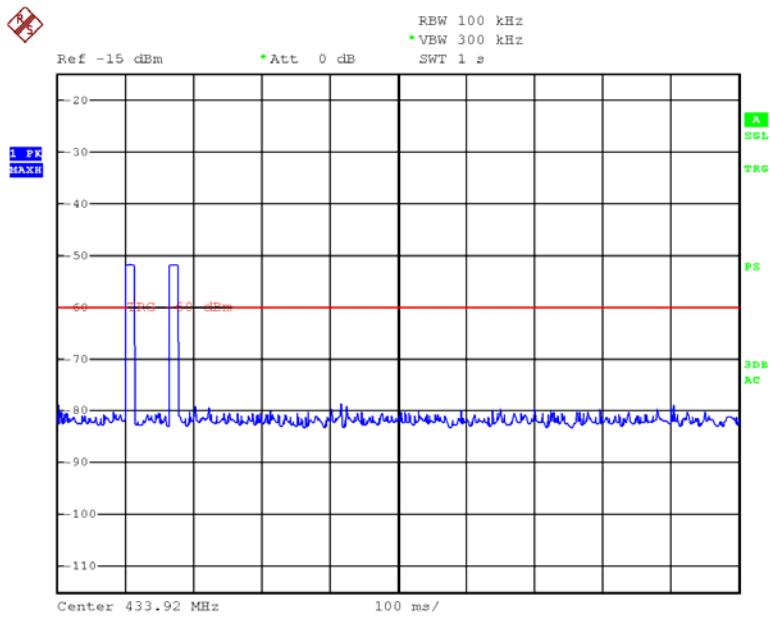
Note: Silent time= Period time- Duration time

Model: DVT-1003A

**Period time =45.9s**

88

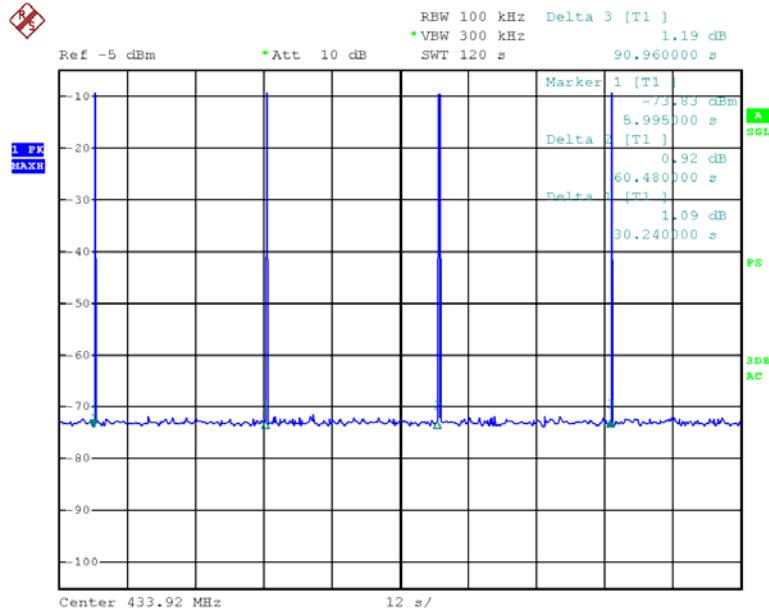
Date: 15.JUN.2014 16:20:50

**Duration Time Less than 100ms**

Date: 19.JUN.2014 13:36:03

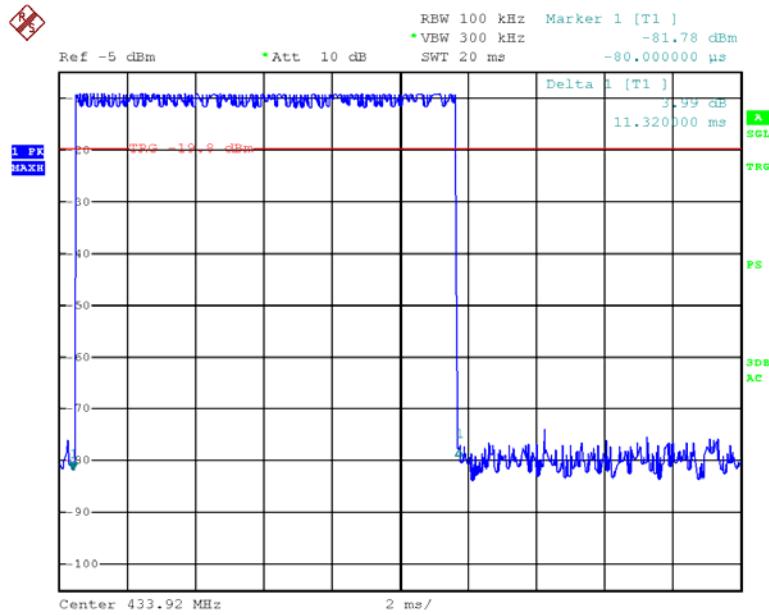
Model: Eupro3001

Period time = 30.24s



Date: 18.JUN.2014 11:23:18

Duration Time = 11.32ms



Date: 18.JUN.2014 11:14:14

## DECLARATION OF SIMILARITY



Hangzhou Hamaton Tyre Valves Co.,Ltd.  
Add: 12 East Zhenxing Road, Linping, Yuhang, Hangzhou, China  
Tel: 0571-86159905 Fax: 0571-86159905

## DECLARATION OF SIMILARITY

Date : 2014-5-14

To:  
Bay Area Compliance Laboratories Corp. (Dongguan)  
No.69 Pulong Village Puxinhu Industry Zone Tangxia,  
Dongguan, China  
<http://www.baclcorp.com>

Dear Sir or Madam:

We, Hangzhou Hamaton Tyre Valves Co.,Ltd., hereby declare that product: TPMS SENSOR, model: Eupro3001, DVT-1003A, PRO1003A is electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model name: Eupro3001 that was tested by BACL.

Eupro3001, DVT-1003A, PRO1003A, are different in below items:

1. Model names;
2. Housing color;

DVT-1003A and PRO1003A are the same time intervals of RF transmission signal. The time intervals of RF transmission signal of Eupro3001 is different from DVT-1003A and PRO1003A.

Please contact me should there be need for any additional clarification or information.

Best Regards,

A handwritten signature in black ink that appears to read 'Xuhua Wang'.

Xuhua Wang

Manager

\*\*\*\*\*END OF REPORT\*\*\*\*\*