




RADIO EXPOSURE TEST REPORT

FCC ID : Z8H89FT0072
Equipment : XE5-8
Brand Name : Cambium Networks
Model Name : XE5-8
Applicant : Cambium Networks Inc.
3800 Golf Road, Suite 360 Rolling Meadows, IL
60008, USA
Manufacturer : Cambium Networks, Ltd.
Ashburton, TQ13 7UP, UK
Standard : 47 CFR Part 2.1091

The product was received on Dec. 07, 2021, and testing was started from Dec. 21, 2021 and completed on Nov. 22, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

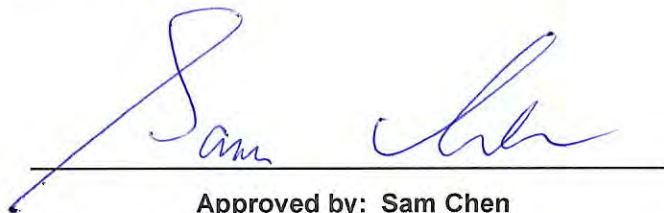

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Table of Radio Function	11
1.4 Accessories	11
1.5 Applicable Standards	11
1.6 Testing Location	11
2 Maximum Permissible Exposure	12
2.1 Limit of Maximum Permissible Exposure	12
2.2 MPE Calculation Method	12
2.3 MPE Exemption	13
2.4 Calculated Result and Limit.....	14

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FA142255-01	01	Initial issue of report	Apr. 29, 2022
FA142255-01	02	Revising Maximum Permissible Exposure Simultaneous Transmission mode, because Radio 2 and 3 can't work simultaneously.	Jun. 16, 2022
FA142255-01	03	Revising Maximum Permissible Exposure Simultaneous Transmission mode, because Radio 2 and 3 can work simultaneously.	Jul. 22, 2022
FA142255-01	04	Revising Results of Maximum Permissible Exposure.	Aug. 02, 2022
FA142255-01	05	Adding Maximum Permissible Exposure from Radio 3 Pine 2	Dec. 13, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Viola Huang



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
6GHz WLAN	5925-7125	5955-7115	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Bluetooth	2400-2483.5	2402-2480	LE: GFSK



1.2 Antenna Information

Radio	Ant.	2.4GHz port	5GHz port	5GHz port	6E port	Bluetooth	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	4	4 (High band)	4 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	Note 1
	2	3	3 (High band)	3 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
	3	2	2 (High band)	2 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
	4	1	1 (High band)	1 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
1	5	-	4 (Low band)	8 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
	6	-	3 (Low band)	7 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
	7	-	2 (Low band)	6 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
	8	-	1 (Low band)	5 (Full band)	-	-	ACCTON	EAP9819A-6E-1120-CAM	PCB antenna	I-PEX	
2	9	-	4		4	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
	10	-	2		2	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
	11	-	3		3	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
	12	-	1		1	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
3	13	-	4		4	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
	14	-	2		2	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
	15	-	3		3	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
	16	-	1		1	-	ACCTON	EAP9819A-6E-1120-CAM	Metal antenna	I-PEX	
4	17	-	-	-	-	1	ACCTON	GT128V007S-001	Chip antenna	N/A	

Note 1:
Radio 1 and Radio 4

Ant.	Antenna Gain (dBi)					
	WLAN 2.4GHz	WLAN 5GHz				Bluetooth
		UNII 1	UNII 2A	UNII 2C	UNII 3	
1	4.51	4.09	3.06	3.82	3.60	-
2	4.97	4.40	5.70	3.79	2.99	-
3	4.66	5.17	5.99	4.38	3.52	-
4	5.95	4.64	4.09	4.19	3.36	-
5	-	3.39	3.58	3.34	2.01	-
6	-	3.70	3.39	2.52	3.03	-
7	-	3.10	3.68	2.83	2.84	-
8	-	2.82	3.13	2.19	2.61	-
17	-	-	-	-	-	3.24

**Mode 1: 2.4GHz 4TX and 5GHz UNII 1~UNII 3 8TX**

Ant.	Directional Gain (dBi)																		
	WLAN 2.4GHz			WLAN 5GHz															
				UNII 1				UNII 2A				UNII 2C				UNII 3			
	4T1S	4T2S	4T4S	8T1S	8T2S	8T4S	8T8S	8T1S	8T2S	8T4S	8T8S	8T1S	8T2S	8T4S	8T8S	8T1S	8T2S	8T4S	8T8S
1	9.91	6.91	3.96	8.39	5.39	5.17	0.57	8.65	5.99	5.99	0.76	7.37	4.38	4.38	0.01	7.13	4.13	3.60	-0.40
2																			
3																			
4																			
5	-	-	-																
6	-	-	-																
7	-	-	-																
8	-	-	-																

Mode 2: 2.4GHz, 5GHz UNII 1~UNII 2A and 5GHz UNII 2C~UNII 3 4TX

Ant.	Directional Gain (dBi)														
	WLAN 2.4GHz			WLAN 5GHz											
				UNII 1			UNII 2A			UNII 2C			UNII 3		
	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S
1	9.91	6.91	3.96	-	-	-	-	-	-	8.67	5.67	2.75	8.15	5.15	2.27
2															
3															
4															
5	-	-	-	7.35	4.35	1.38	7.38	4.38	1.47	-	-	-	-	-	-
6	-	-	-												
7	-	-	-												
8	-	-	-												

**For Radio 2~Radio 3**

Ant.	Antenna Gain (dBi)							
	WLAN 5GHz				WLAN 6E			
	UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
9	3.56	4.37	3.82	4.70	4.96	3.57	3.72	4.44
10	1.25	3.18	3.45	1.86	4.40	3.52	3.12	3.31
11	4.27	4.24	2.25	3.64	4.14	2.03	3.08	4.86
12	1.94	2.59	2.08	3.11	4.85	2.60	3.43	3.41
13	3.25	3.68	3.74	2.90	4.16	2.52	0.71	2.03
14	2.35	4.20	2.48	3.96	4.72	2.06	1.91	2.03
15	3.07	3.84	2.89	2.61	2.24	1.61	2.74	2.45
16	3.41	3.65	1.81	3.31	3.43	3.56	2.35	1.93

For 5GHz UNII 1~UNII 3

Ant.	Directional Gain (dBi)											
	WLAN 5GHz											
	UNII 1			UNII 2A			UNII 2C			UNII 3		
	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S
9	6.84	4.27	0.94	7.38	4.38	1.63	5.12	3.82	-0.67	5.70	4.70	0.08
10												
11												
12												
13	6.79	3.79	0.92	6.16	4.20	0.76	4.51	3.74	-0.79	5.60	3.96	0.29
14												
15												
16												

**For 6GHz UNII 5~8**

Ant.	Directional Gain (dBi)											
	WLAN 6E											
	UNII 5			UNII 6			UNII 7			UNII 8		
	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S
9	7.11	4.96	1.27	6.27	3.57	0.39	6.05	3.72	0.36	7.06	4.86	1.54
10												
11												
12												
13	7.06	4.72	1.39	6.25	3.56	0.34	4.86	2.74	-0.72	5.56	2.56	-0.38
14												
15												
16												

Note 2: The EUT has seventeen antennas.

Note 3: The brand/model/antenna type information was declared by manufacturer.

Note 4: Maximum Directional Gain following KDB662911 D03.

The antenna report is provided in the operational description for this application.

Note 5: Because radio 2 and radio 3 are the same radio, the Directional Gain of radio 2 is higher than radio 3. Thus, radio 2 was tested and recorded in the report.

Note 6: The EUT doesn't enable the DFS band.

For Radio 1**For 2.4GHz:****For IEEE 802.11b/g/n/VHT/ax mode (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz UNII 1 and UNII 3 (SBS Mode):**For IEEE 802.11a/n/ac/ax mode (4TX/4RX):**

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz UNII 1 and UNII 3 (DBS Mode):**For IEEE 802.11a/n/ac/ax mode (8TX/8RX):**

Port 1, Port 2, Port 3, Port 4, Port 5, Port 6, Port 7, Port 8 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3, Port 4, Port 5, Port 6, Port 7, Port 8 could transmit/receive simultaneously.



For Radio 2 and Radio 3

For 5GHz UNII 1 and UNII 3:

For IEEE 802.11a/n/ac/ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 6GHz UNII 5~8:

For IEEE 802.11ax mode (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Radio 4

For Bluetooth:

Only Port 1 can be used as transmitting/receiving antenna.



1.3 Table of Radio Function

Radio (R)	2.4GHz	5GHz	6E	Bluetooth
1	V	V	-	-
2 (Pine 1)	-	V	V	-
3 (Pine 2)	-	V	V	-
4	-	-	-	V

1.4 Table for EUT Operation Function

Mode	Operation Function
1	DBS Mode: R1: 2.4GHz/5GHz UNII 1,UNII 3 in 8TX +R2: 5GHz UNII 1,UNII 3/6GHz+R3: 5GHz UNII 1,UNII 3/6GHz+R4: BT
2	SBS Mode: R1: 2.4GHz/5GHz UNII 1,UNII 3 in 4TX +R2: 5GHz UNII 1,UNII 3/6GHz+R3: 5GHz UNII 1,UNII 3/6GHz+R4: BT

Note1: Only the 5GHz mode of radio 2, and 3 has been performed in the testing, because the output power is larger than 6GHz.

Note2: Radio 2 and Radio 3 can transmit simultaneously but they can't be configured to the same frequency.

1.5 Accessories

Accessories
Cradle*1

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.7 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 75 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= P_{th}.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance

R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.
Note: R is in meters, f is in MHz.	



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For Radio 1

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;D1D	9.91	25.48	35.39	0.50	35.89	3.88150	75	0.05491	1.00000
5.2G;D1D 8TX	8.17	27.68	35.85	0.14	35.99	3.97192	75	0.05619	1.00000
5.8G;D1D 8TX	7.13	28.81	35.94	0.05	35.99	3.97192	75	0.05619	1.00000
5.2G;D1D 4TX	7.35	26.54	33.89	0.50	34.39	2.74789	75	0.03887	1.00000
5.8G;D1D 4TX	8.15	26.75	34.90	0.50	35.40	3.46737	75	0.04905	1.00000

For Radio 2

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	6.84	28.06	34.90	0.50	35.40	3.46737	75	0.04905	1.00000
5.8G;D1D	5.70	29.34	35.04	0.50	35.54	3.58096	75	0.05066	1.00000
6.2G;D1D	-	25.78	25.78	0.50	26.28	0.42462	75	0.00601	1.00000
6.4G;D1D	-	27.37	27.37	0.50	27.87	0.61235	75	0.00866	1.00000
6.7G;D1D	-	28.13	28.13	0.50	28.63	0.72946	75	0.01032	1.00000
7.0G;D1D	-	26.23	26.23	0.50	26.73	0.47098	75	0.00666	1.00000
BT	3.24	10.09	13.33	0.50	13.83	0.02415	75	0.00034	1.00000

For Radio 3

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.8G;D1D	5.60	29.34	34.94	0.50	35.44	3.49945	75	0.04951	1.00000
6.2G;D1D	-	25.90	25.90	0.50	26.40	0.43652	(cm)	0.00618	1.00000
6.4G;D1D	-	23.40	23.40	0.50	23.90	0.24547	(cm)	0.00347	1.00000
6.7G;D1D	-	26.38	26.38	0.50	26.88	0.48753	(cm)	0.00690	1.00000
7.0G;D1D	-	26.60	26.60	0.50	27.10	0.51286	(cm)	0.00726	1.00000

For Radio 4

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
BT	3.24	10.09	13.33	0.50	13.83	0.02415	75	0.00034	1.00000



MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
2437	0.0196	0.75	35.89	33.74	2.366	10.800	Complies
5240	0.0091		35.99	33.84	2.421	10.800	Complies
5785	0.0082		35.99	33.84	2.421	10.800	Complies
5785	0.0082		35.40	33.25	2.113	10.800	Complies
5200	0.0092		34.39	32.24	1.675	10.800	Complies
5200	0.0092		35.35	33.20	2.089	10.800	Complies
5785	0.0082		35.54	33.39	2.183	10.800	Complies
5785	0.0082		35.44	33.29	2.133	10.800	Complies
6825	0.0070		28.63	26.48	0.445	10.800	Complies
6985	0.0068		27.10	24.95	0.313	10.800	Complies
2440	0.0196		13.83	11.68	0.015	10.800	Complies

Simultaneous Transmission Analysis

Mode 1:DBS Mode:R1: 2.4GHz/5GHz UNII 1,UNII 3 in 8TX +R2: 5GHz UNII 1,UNII 3+R3: 5GHz UNII 1,UNII 3 +R4: BT

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.84	<= 1
5785		35.99	33.84	2.421	10.800		
5785		35.54	33.39	2.183	10.800		
5785		35.44	33.29	2.133	10.800		
2440		13.83	11.68	0.015	10.800		



**Mode 2: DBS Mode:R1: 2.4GHz/5GHz UNII 1,UNII 3 in 8TX +R2: 5GHz UNII 1,UNII 3+R3: 6GHz UNII 5~UNII 8
+R4: BT**

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.68	<= 1
5785		35.99	33.84	2.421	10.800		
5785		35.54	33.39	2.183	10.800		
6895		27.10	24.95	0.313	10.800		
2440		13.83	11.68	0.015	10.800		

**Mode 3: DBS Mode:R1: 2.4GHz/5GHz UNII 1,UNII 3 in 8TX +R2: 6GHz UNII 5~UNII 8+R3: 5GHz UNII 1,UNII 3
+R4: BT**

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.68	<= 1
5785		35.99	33.84	2.421	10.800		
6825		28.63	26.48	0.445	10.800		
5785		35.44	33.29	2.133	10.800		
2440		13.83	11.68	0.015	10.800		

**Mode 4: DBS Mode:R1: 2.4GHz/5GHz UNII 1,UNII 3 in 8TX +R2: 6GHz UNII 5~UNII 8+R3: 6GHz UNII 5~UNII 8
+R4: BT**

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.51	<= 1
5785		35.99	33.84	2.421	10.800		
6825		28.63	26.48	0.445	10.800		
6985		27.10	24.95	0.313	10.800		
2440		13.83	11.68	0.015	10.800		



Mode 5: DBS Mode:R1: 2.4GHz/ SBS Mode:5GHz UNII 1+UNII 3 in 4TX +R2: 5GHz UNII 1,UNII 3+R3: 5GHz UNII 1,UNII 3 +R4: BT

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.971	<= 1
5200		34.39	32.24	1.675	10.800		
5745		35.40	33.25	2.113	10.800		
5785		35.54	33.39	2.183	10.800		
5785		35.44	33.29	2.133	10.800		
2440		13.83	11.68	0.015	10.800		

Mode 6: DBS Mode:R1: 2.4GHz/ SBS Mode:5GHz UNII 1+UNII 3 in 4TX +R2: 5GHz UNII 1,UNII 3+R3: 6GHz UNII 5~UNII 8 +R4: BT

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.80	<= 1
5200		34.39	32.24	1.675	10.800		
5745		35.40	33.25	2.113	10.800		
5785		35.54	33.39	2.183	10.800		
6985		27.10	24.95	0.313	10.800		
2440		13.83	11.68	0.015	10.800		

Mode 7: DBS Mode:R1: 2.4GHz/ SBS Mode:5GHz UNII 1+UNII 3 in 4TX +R2: 6GHz UNII 5~UNII 8+R3: 5GHz UNII 1, UNII 3 +R4: BT

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.81	<= 1
5200		34.39	32.24	1.675	10.800		
5745		35.40	33.25	2.113	10.800		
6825		28.63	26.48	0.445	10.800		
5785		35.44	33.29	2.133	10.800		
2440		13.83	11.68	0.015	10.800		



Mode 8: DBS Mode:R1: 2.4GHz/ SBS Mode:5GHz UNII 1+UNII 3 in 4TX +R2: 6GHz UNII 5~UNII 8+R3: 6GHz UNII 5~UNII 8 +R4: BT

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.75	35.89	33.74	2.366	10.800	0.64	<= 1
5200		34.39	32.24	1.675	10.800		
5745		35.40	33.25	2.113	10.800		
6825		28.63	26.48	0.445	10.800		
6895		27.10	24.95	0.313	10.800		
2440		13.83	11.68	0.015	10.800		

————THE END————