



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: pei #9276	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 21:39:52
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2480MHZ	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

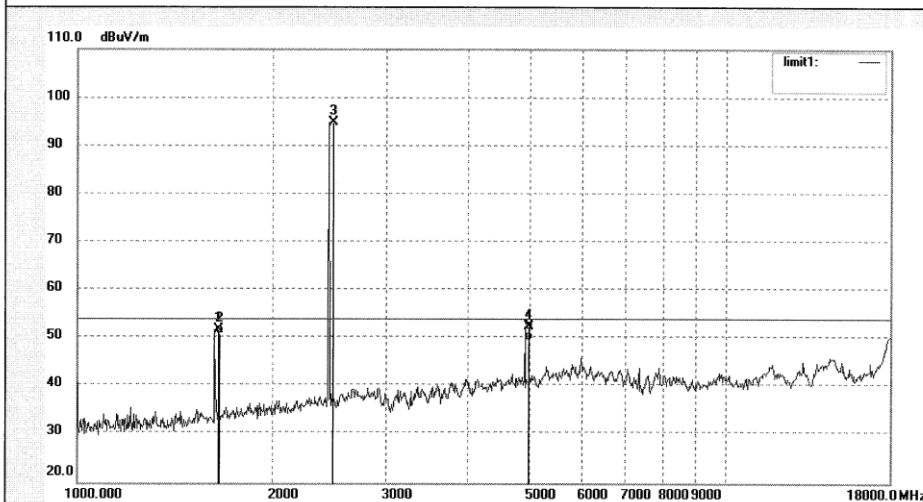

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1654.018	62.63	-10.72	51.91	74.00	-22.09	peak			
2	1654.018	61.72	-10.72	51.00	54.00	-3.00	AVG			
3	2479.934	102.14	-7.37	94.77	/	/	peak			
4	4960.040	51.98	0.52	52.50	74.00	-21.50	peak			
5	4960.040	49.00	0.52	49.52	54.00	-4.48	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pei #9279	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:08:24
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2402MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

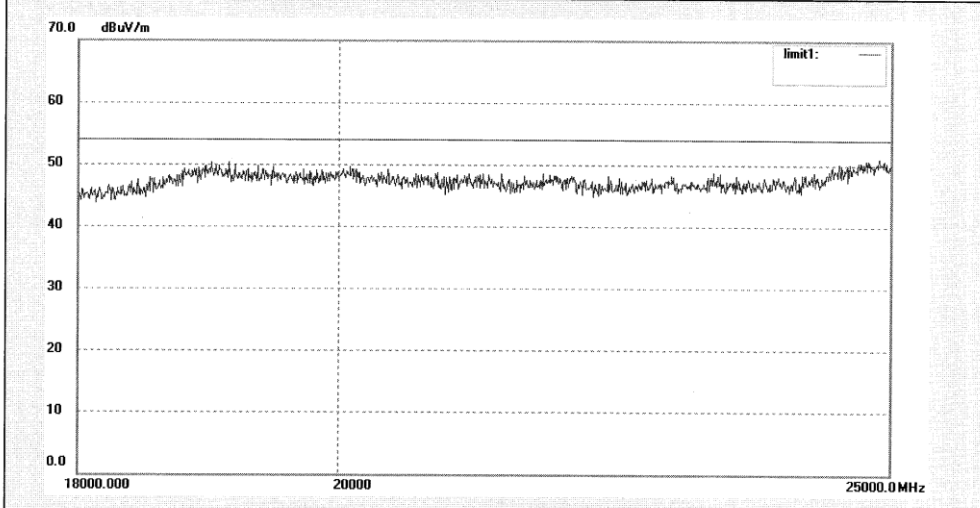

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: pei #9278	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:01:16
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2402MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

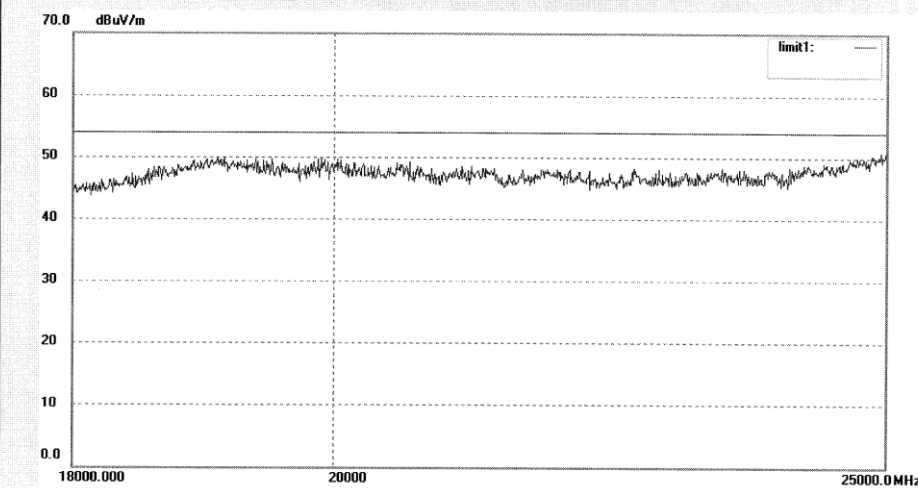

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: pei #9280	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:15:31
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2441MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

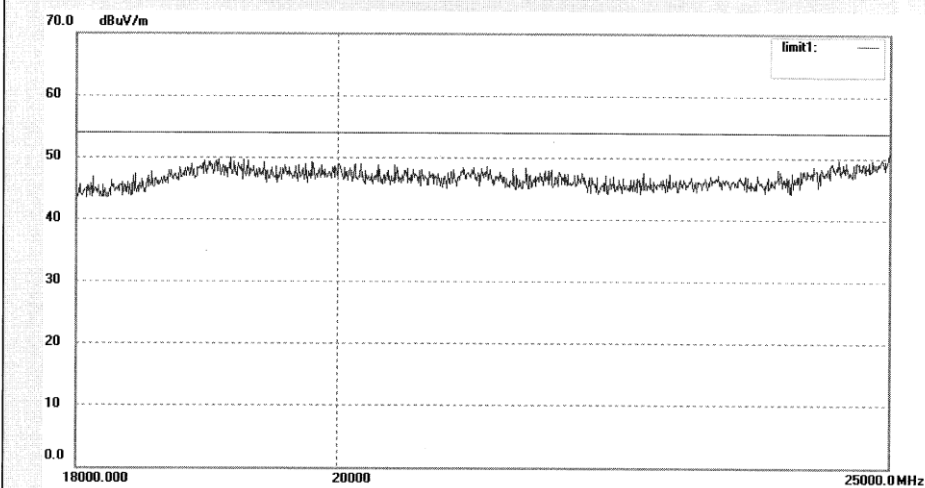

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: pei #9281	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:23:49
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2441MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

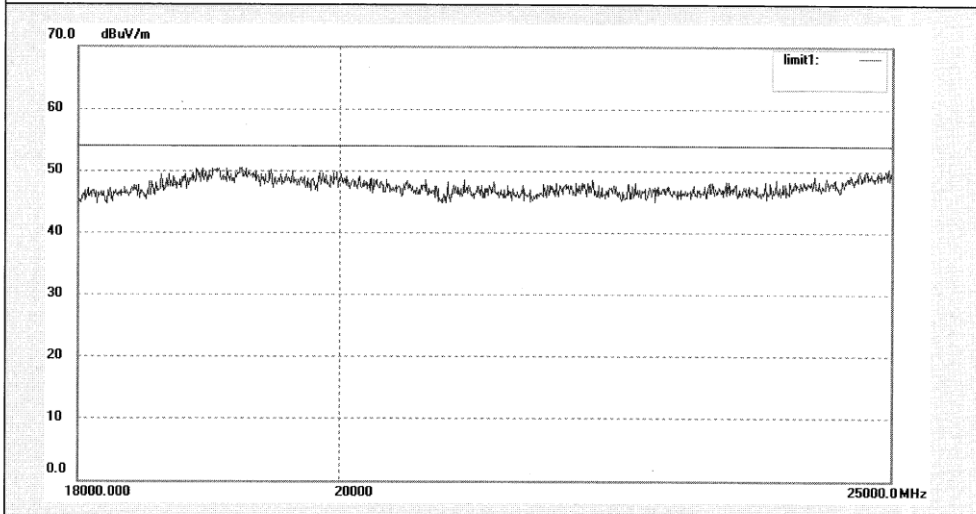

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pei #9283	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:50:45
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2480MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

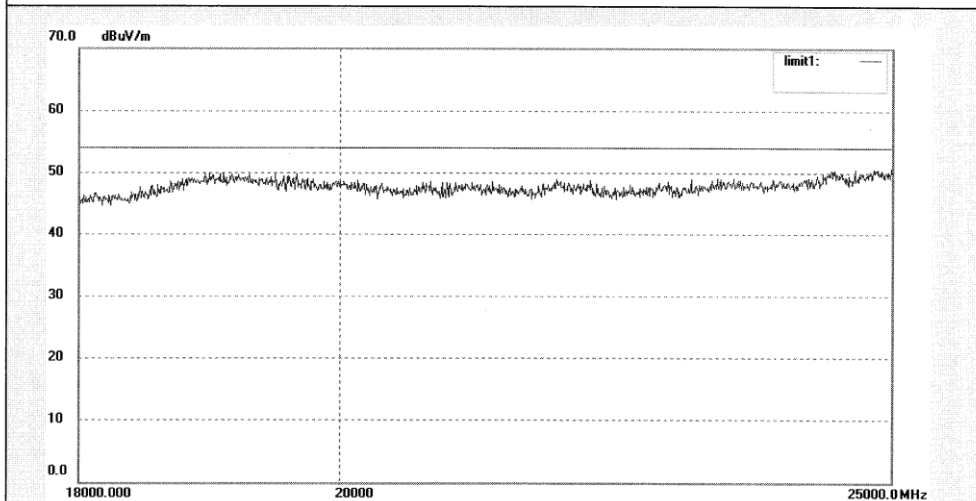

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: pei #9282	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/24
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 22:42:57
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: TX 2480MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	


Note:

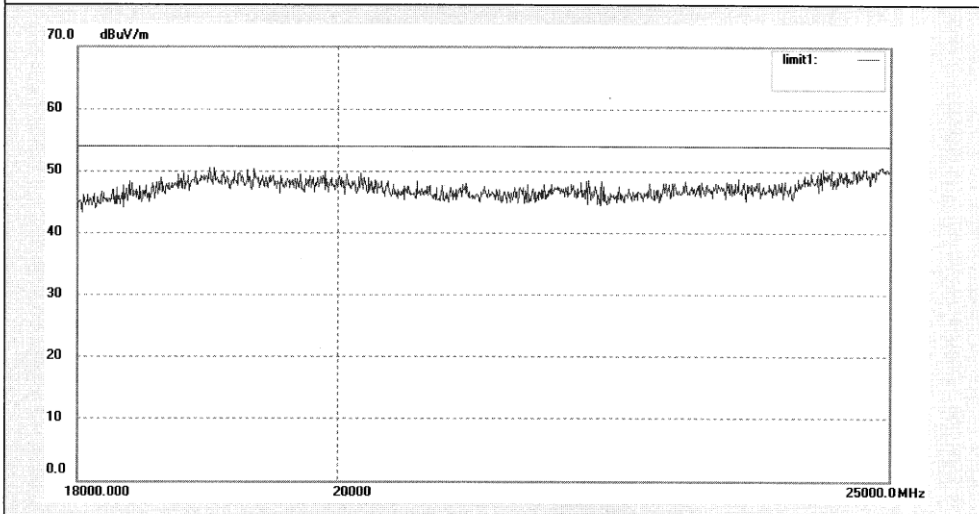


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

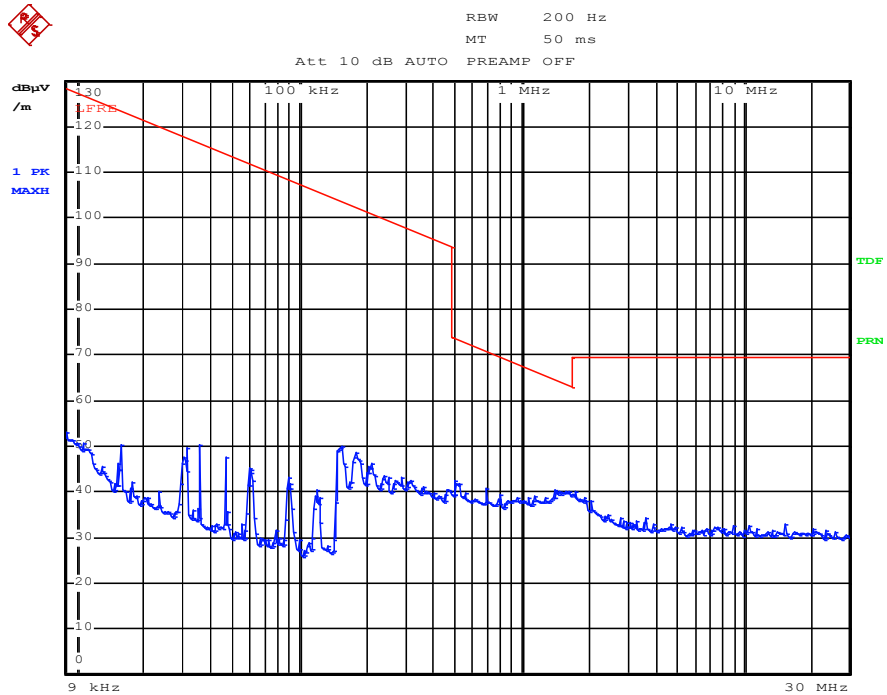


Date: 23.JUN.2012 23:14:46

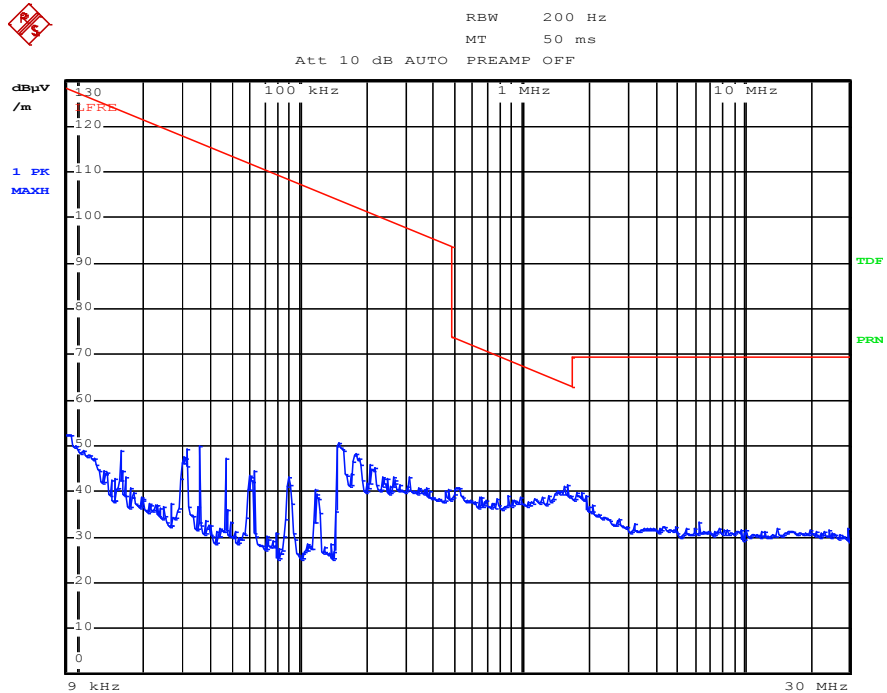


Date: 23.JUN.2012 23:17:16

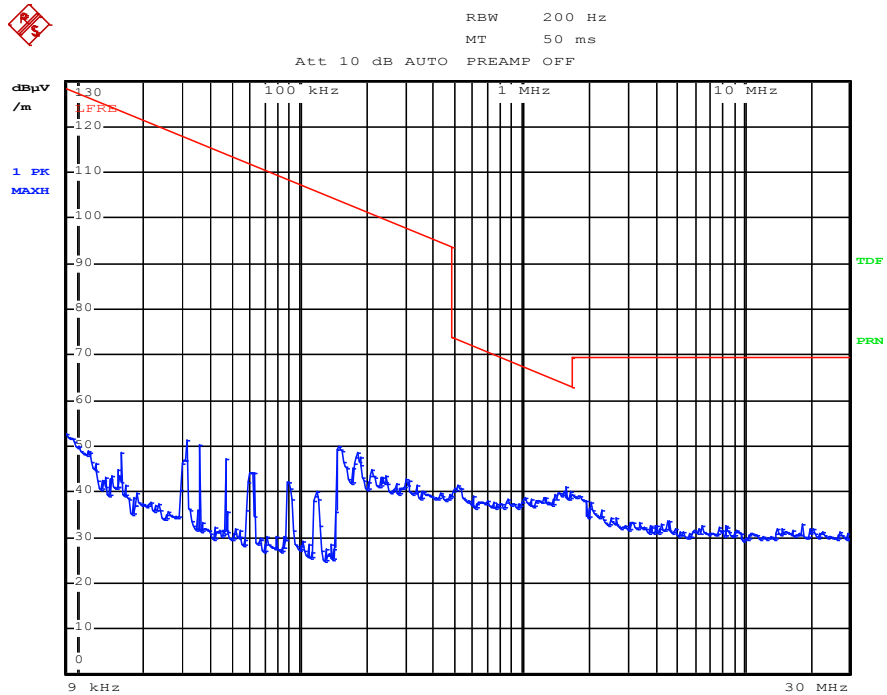


Date: 23.JUN.2012 23:19:14

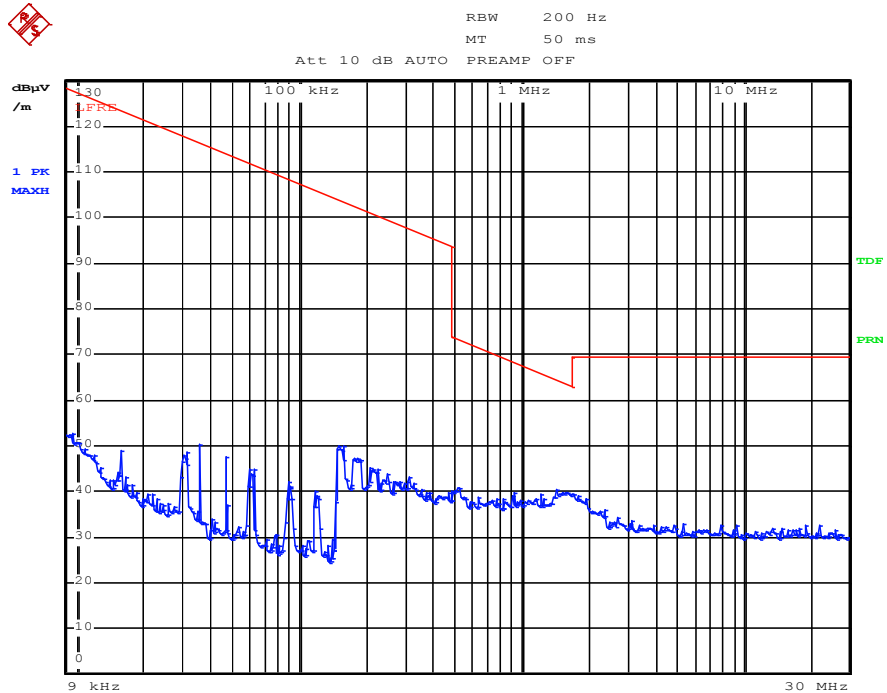


Date: 23.JUN.2012 23:21:39

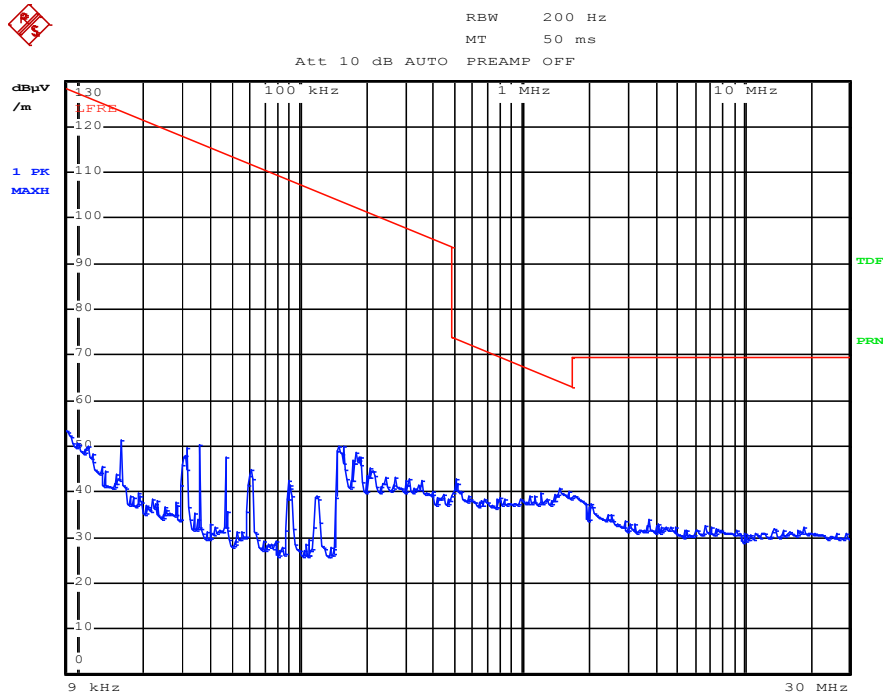


Date: 23.JUN.2012 23:23:51

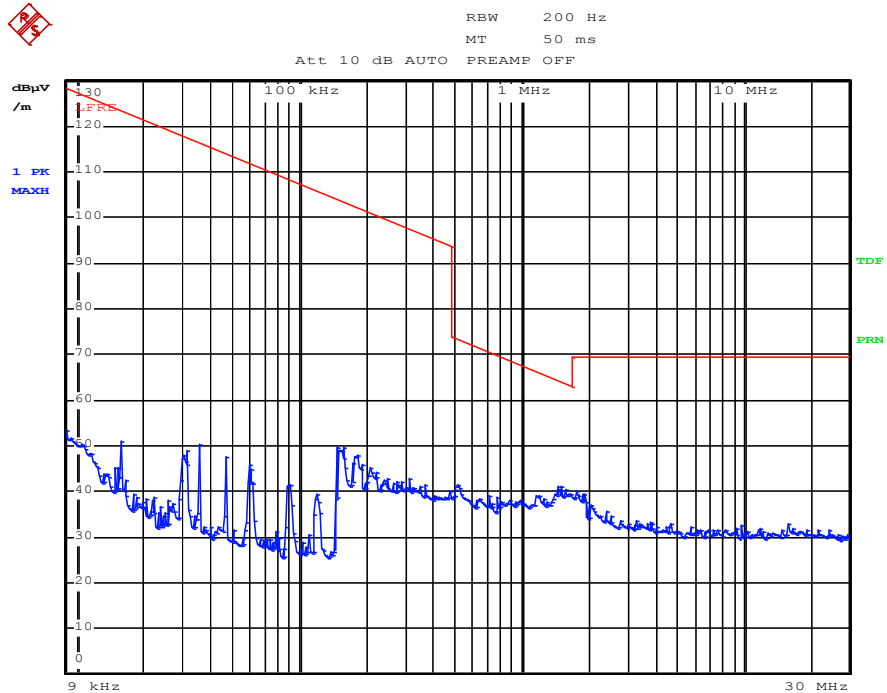


Date: 23.JUN.2012 23:25:59

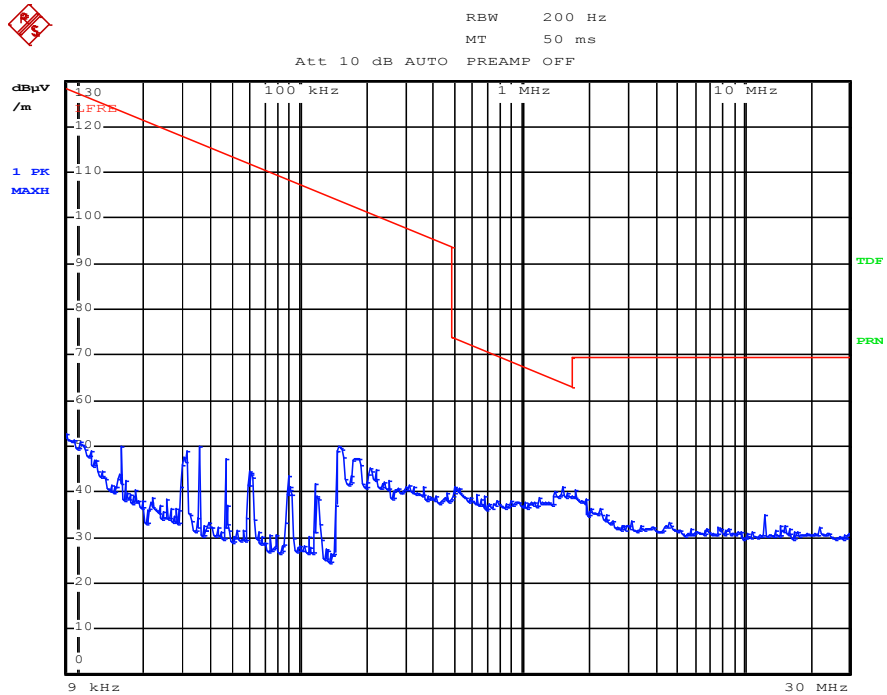

Date: 23.JUN.2012 23:28:00

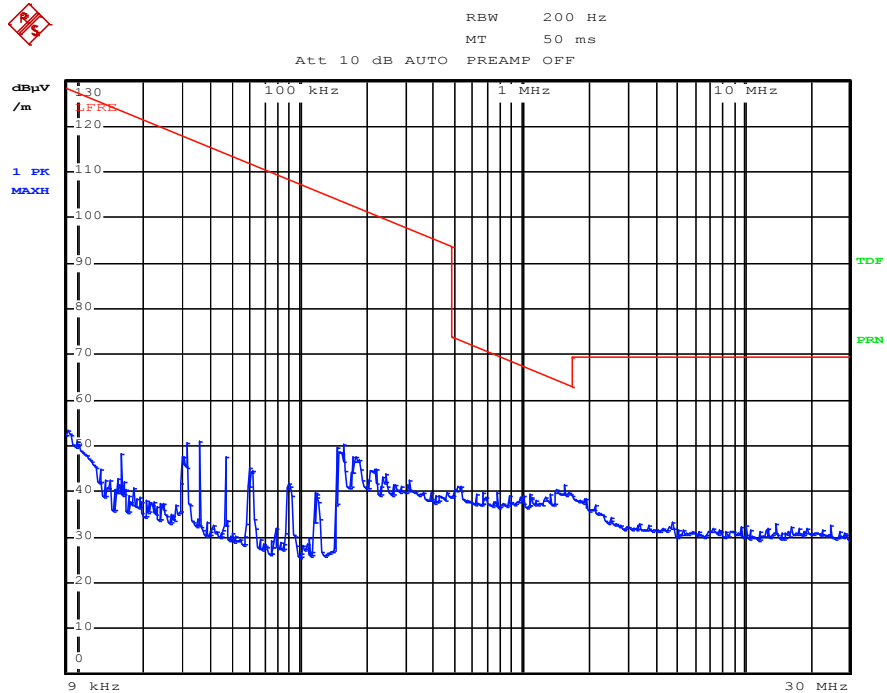

Date: 23.JUN.2012 23:30:00

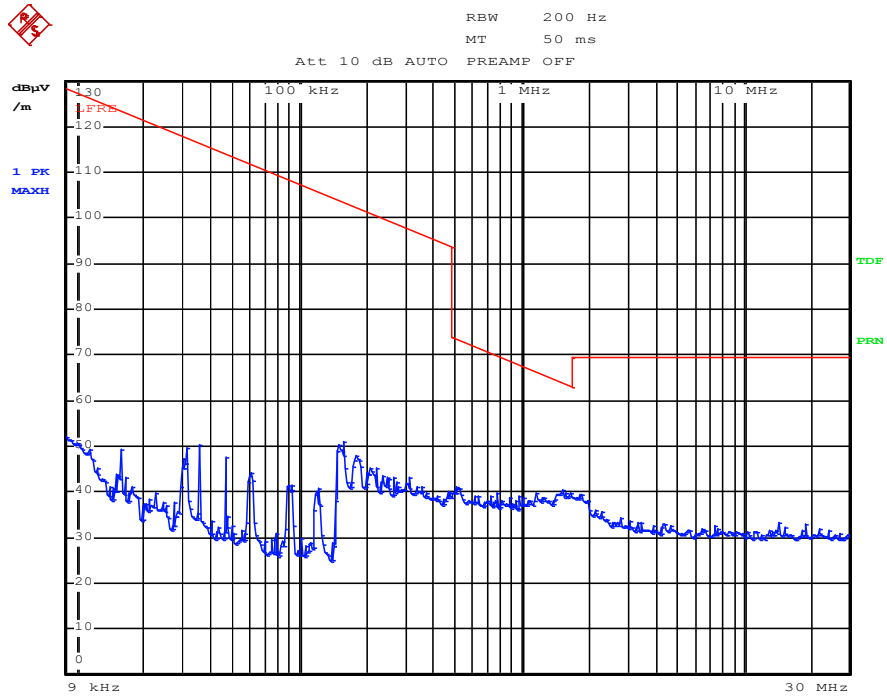

Date: 23.JUN.2012 23:36:37


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pei #9296	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/25
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 0:33:53
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: RX 2402MHZ	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

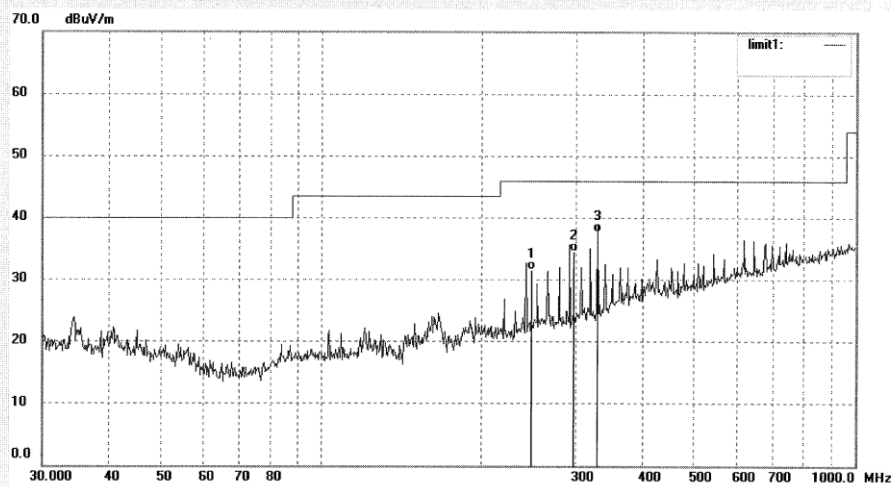

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	245.7690	14.43	17.16	31.59	46.00	-14.41	QP			
2	294.9224	15.99	18.59	34.58	46.00	-11.42	QP			
3	331.7790	17.91	19.79	37.70	46.00	-8.30	QP			



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: pei #9297	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/25
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 0:41:33
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: RX 2402MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

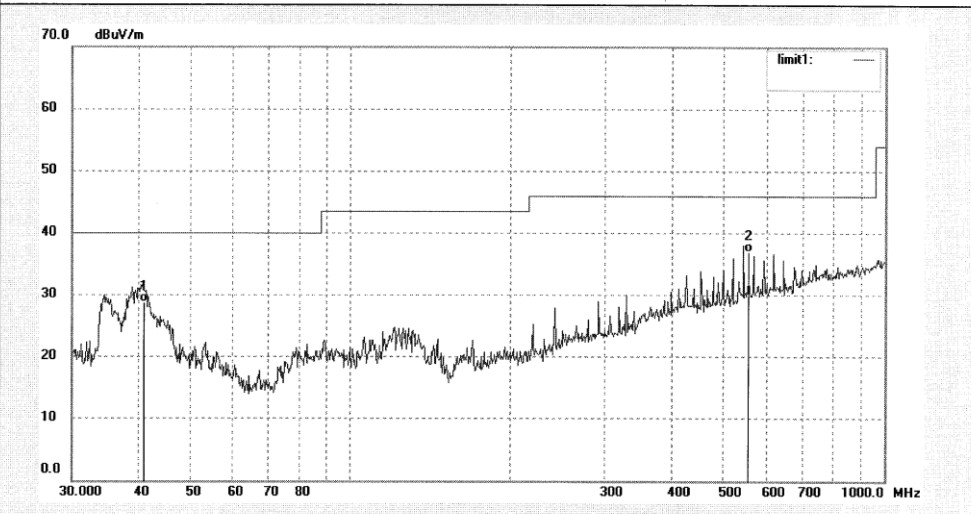

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	40.8699	14.28	14.53	28.81	40.00	-11.19	QP			
2	552.9719	11.78	25.32	37.10	46.00	-8.90	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pei #9299	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/06/25
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 0:58:55
EUT: MULTIMEDIA SPEAKER	Engineer Signature: PEI
Mode: RX 2441MHz	Distance: 3m
Model: iF330BT	
Manufacturer: EDIFIER	

Note:

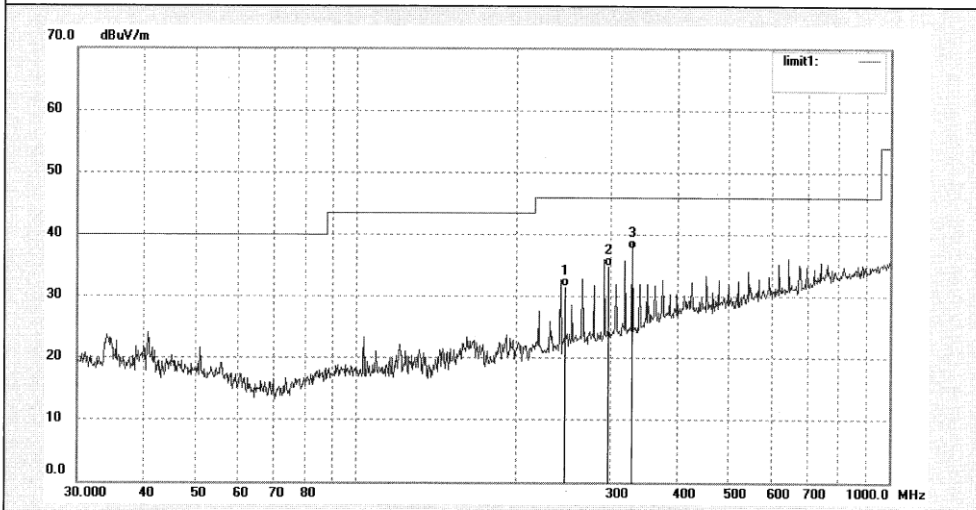

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	245.7626	14.45	17.16	31.61	46.00	-14.39	QP			
2	294.9204	16.33	18.59	34.92	46.00	-11.08	QP			
3	331.7834	17.90	19.79	37.69	46.00	-8.31	QP			