

Report on the FCC and ISED Testing of the

Ecolab, Inc.

92053071

In accordance with FCC 47 CFR Part 15.249 &
ISED Canada's Radio Standards Specifications
RSS-210

Prepared for: Ecolab, Inc.
650 Lone Oak Drive
Eagan, MN 55121

FCC ID: Z9O-92053071 IC: 10060A-92053071



America

Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Document Number: BO72137423.201 | Issue: 02

SIGNATURE

A handwritten signature in blue ink that reads "Pete Walsh".

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Pete Walsh	Service Line Manager	Authorized Signatory	06-Dec-2018

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation
Designation Number US1063 Tampa, FL Test Laboratory
Innovation, Science, and Economic Development Canada
Accreditation
Main Site Number 2087A-2 Tampa, FL Test Laboratory
Satellite Site Number: 4175C Boca Raton, FL Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC Part 15.249, ISED Canada's RSS-210



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America
5610 West Sligh Ave., Suite 100
Tampa, FL 33634

Phone: 813-284-2715
www.tuv-sud-america.com

TÜV SÜD

TÜV®

TABLE OF CONTENTS

1	GENERAL	3
1.1	Purpose	3
1.2	Applicant Information.....	3
1.3	Product Description	3
1.4	Test Methodology and Considerations	3
2	TEST FACILITIES	5
2.1	Location.....	5
2.2	Laboratory Accreditations/Recognitions/Certifications.....	5
2.3	Radiated & Conducted Emissions Test Site Description	6
2.3.1	Semi-Anechoic Chamber Test Site	6
2.3.2	Conducted Emissions Test Site Description.....	7
3	APPLICABLE STANDARD REFERENCES	8
4	LIST OF TEST EQUIPMENT	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM.....	10
7	SUMMARY OF TESTS.....	11
7.1	Antenna Requirement – FCC: Section 15.203.....	12
7.2	20dB / 99% Bandwidth – FCC: Section 15.215; ISED Canada RSS-Gen 6.6	12
7.2.1	Measurement Procedure.....	12
7.2.2	Measurement Results	12
7.3	Radiated Spurious Emissions – FCC: Section 15.249(a),(d); ISED Canada: RSS-210 B.10	14
7.3.1	Measurement Procedure.....	14
7.3.2	Measurement Results	14
7.3.3	Sample Calculations.....	15
8	MEASUREMENT UNCERTAINTIES	16
9	CONCLUSION.....	17

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.249 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-210 for the tests documented herein.

1.2 Applicant Information

Ecolab, Inc.
650 Lone Oak Drive
Ecolab Schuman Center
Eagan, MN 55121

1.3 Product Description

The EUT is a hand hygiene compliance monitoring beacon for the Ecolab NEXA manual soap/sanitizer dispenser. The device includes a 900 MHz and a 125 kHz transceiver.

Technical Details

Mode of Operation:	Low Power 900 MHz
Frequency Range:	917.0 MHz
Number of Channels:	1
Channel Separation:	N/A
Data Rate:	12 kbps
Modulations:	2-FSK
Antenna Type/Gain:	Ceramic Chip Antenna, -2.5 dBi
Input Power:	3 VDC (AA Batteries)
Model Number:	92053071

Test Sample Serial Number(s): 1818-001G-004192 Radiated Emissions,
1818LK546 RF Conducted Emissions

Test Sample Condition: The test samples were in good operating condition without any physical damages.

1.4 Test Methodology and Considerations

The EUT was evaluated for radiated and RF conducted measurements. The devices were set to the maximum user accessible power levels for testing.

The unit is battery operated only without any provision for connection to the AC Mains. The EUT is exempted from the conducted power line emissions requirements.

The RF conducted measurements were performed on a sample modified with an RF connector which allowed direct coupling to the spectrum analyzer.

The EUT was evaluated for radiated emissions in the orientation of normal use. The co-located radios are not capable of transmitting simultaneously.

Compliance of the 125 kHz transceiver as well as the unintentional emissions are documented in separate test reports.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
<http://www.tuv-sud-america.com>

Innovation, Science and Economic Development Canada Lab Code: 4175C

2.2 Laboratory Accreditations/Recognitions/Certifications

TÜV SÜD America, Inc. is accredited to ISO/IEC 17025 by American Association for Laboratory Accreditation (A2LA) and has been issued certificate number 2955.15 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

Main Site Information:

TÜV SÜD America, Inc.
5610 West Sligh Ave., Suite 100
Tampa, FL 33634
Phone: 813-284-2715
www.tuv-sud-america.com

FCC Designation Number US1063
FCC Test Firm Registration #: 160606
Innovation, Science, and Economic Development Canada Lab Code: 2087A-2

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized, and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which can support a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

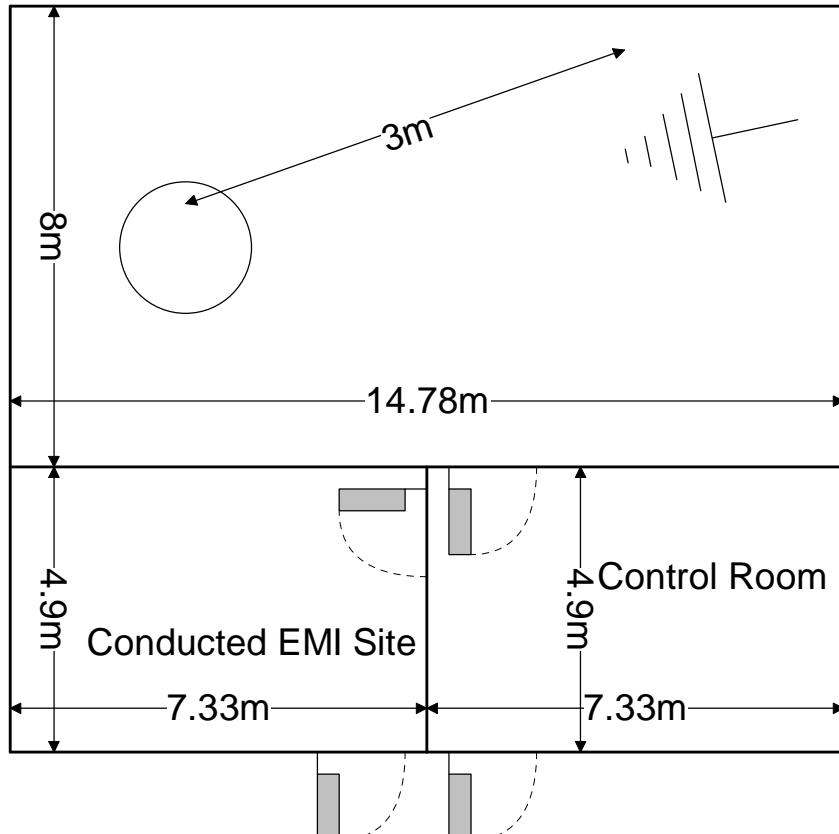


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are $7.3 \times 4.9 \times 3 \text{ m}^3$. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 $50 \Omega/50 \mu\text{H}$ and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

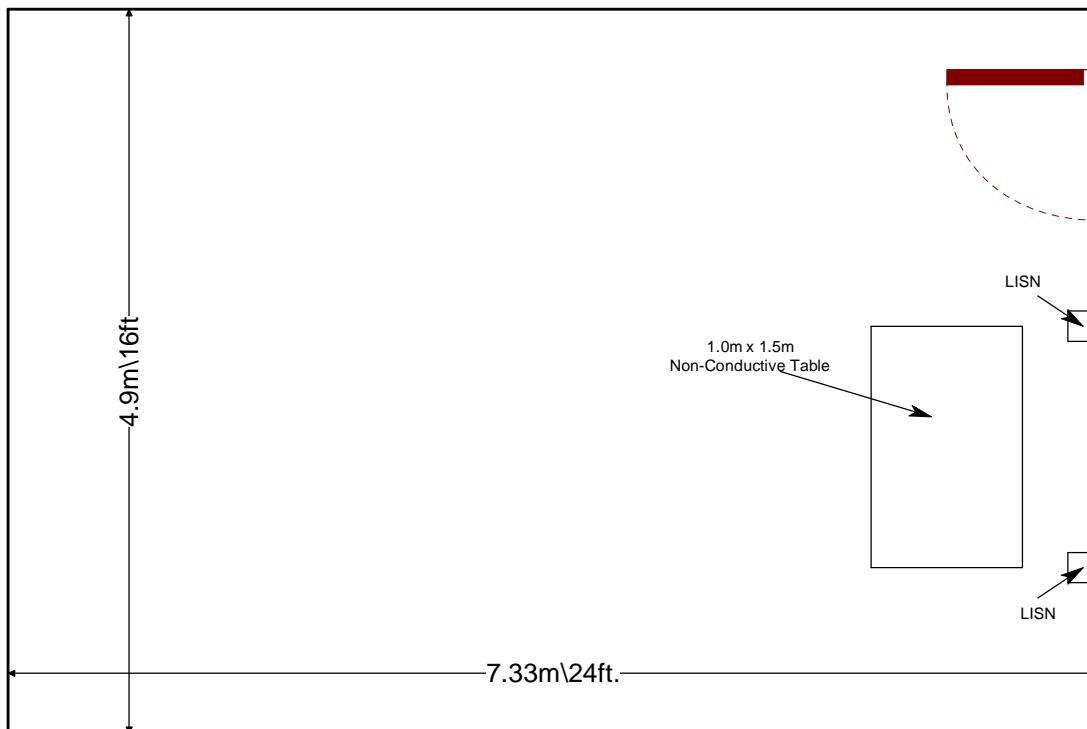


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2018.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2018
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-210 - Licence-Exempt Radio Apparatus: Category I Equipment, Issue 9 August 2016.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment List

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Calibration Performed Date	Calibration Due Date
BEMC00078	EMCO	6502	Active Loop Antenna	9104-2608	5/9/2018	5/9/2020
BEMC00283	Rohde & Schwarz	FSP40	Spectrum Analyzer	1000033	11/28/2017	11/28/2019
BEMC00523	Agilent	E7405A	9kHz-26.5GHz EMC analyzer/HYZ	MY45103293	12/9/2016	12/9/2018
BEMC02002	EMCO	3108	30 MHz to 200 MHz Biconical Antenna	2147	11/28/2017	11/30/2019
BEMC02004	EMCO	3146	200 MHz to 1 GHz Log Periodic Antenna	1385	12/27/2017	12/27/2019
BEMC02006	EMCO	3115	Linear Polarized Horn antenna, 1-18 GHz	2573	4/7/2017	4/7/2019
BEMC02011	Hewlett-Packard	HP 8447D	100 kHz to 1.3 GHz low-noise, high gain amplifier	2443A03952	10/27/2017	10/27/2018
BEMC02069	Trilithic, Inc.	7NM867/122-X1-AA	Notch Filter	200315126	2/28/2018	2/28/2019
BEMC02071	Trilithic, Inc.	4HC1400-1-KK	High Pass Filter	9643263	10/28/2017	10/28/2018
BEMC02086	Merrimac	FAN-6-10K	10dB Attenuator	23148-83-1	10/27/2017	10/27/2018
BEMC02095	ETS Lindgren	TILE4! - Version 4.2.A	Tile Automation Software	85242	NCR	NCR
BEMC02110	Aeroflex Inmet	40AH2W-10	Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	2110	8/5/2018	8/5/2019
BEMC02112	Teledyne Storm Products	921-0101-036	Duratest High Frequency Cable Max. frequency 26.5GHz	12-06-698	10/27/2017	10/27/2018
BEMC02121	Teledyne Storm Products	A81-0303	Radiated Cable Set	2121	7/26/2018	7/26/2019
BEMC02138	Hewlett Packard	8449B	Pre-Amplifier	3008A00320	12/1/2017	12/1/2018

Notes:

- **NCR=No Calibration Required**
- **The assets were only used during the active period of the calibration cycle.**

5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Ecolab, Inc.	92053071	1818-001G-004192

Table 5-2: Cable Description – Radiated Emissions

Cable #	Cable Type	Length	Shield	Termination
The EUT is standalone only and does not connect to other devices.				

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

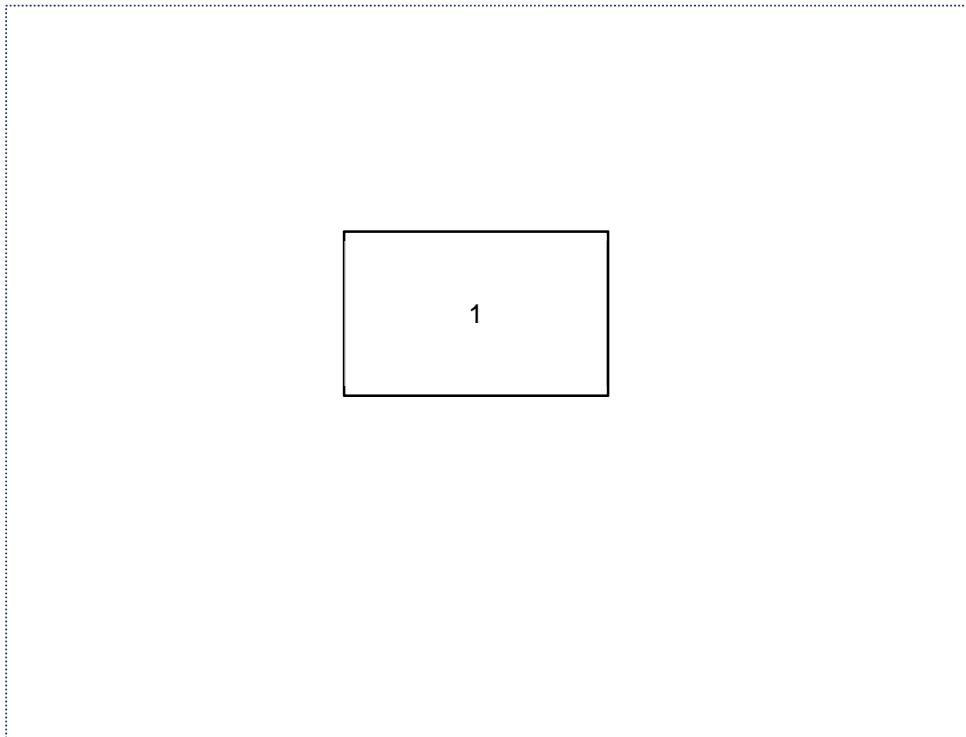


Figure 6-1: EUT and Support Equipment Block Diagram

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

Test Begin Date: October 8, 2018
Test End Date: October 16, 2018

Table 7-1: Summary of Tests

Test Description	FCC 47 CFR Rule Part	ISED Canada RSS Section	Test Results
Antenna Requirements	FCC: Section 15.203		Compliant
20dB / 99% Bandwidth	FCC: Section 15.215	ISED Canada: RSS-Gen 6.6	Compliant
Field Strength of Fundamental and Spurious Emissions	FCC: Sections 15.249(a),(d)	ISED Canada: RSS-210 B.10	Compliant
Power Line Conducted Emissions	FCC: Section 15.207	ISED Canada: RSS-Gen 8.8	N/A

7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses an internal -2.5 dBi ceramic chip antenna that is soldered to the PCB. The antenna is permanently attached and therefore meet the requirements of FCC Section 15.203.

7.2 20dB / 99% Bandwidth – FCC: Section 15.215; ISED Canada RSS-Gen 6.6

7.2.1 Measurement Procedure

The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was set from 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The 20-dB function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.


The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was set from 1% and 5% of the estimated 99% bandwidth. The occupied 99% bandwidth was measured by using the occupied bandwidth function of the spectrum analyzer set to 99% with a peak detector.

7.2.2 Measurement Results


Performed by: Thierry Jean-Charles

Table 7.2.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
917.0	61.35	63.4375

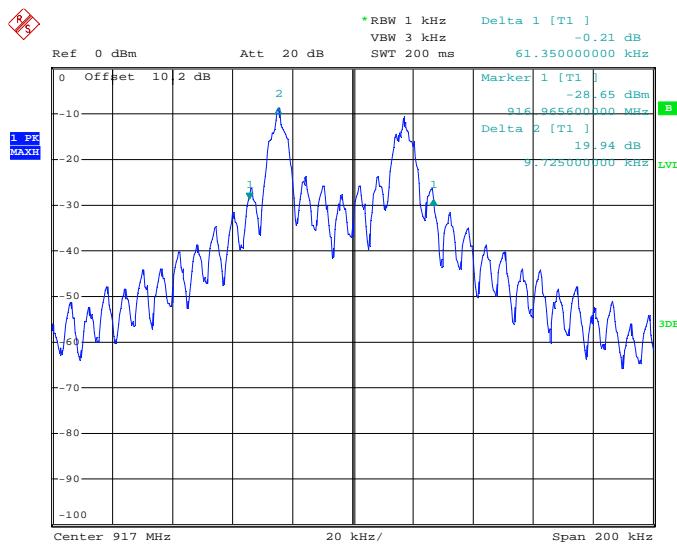

Date: 8.OCT.2018 16:40:25

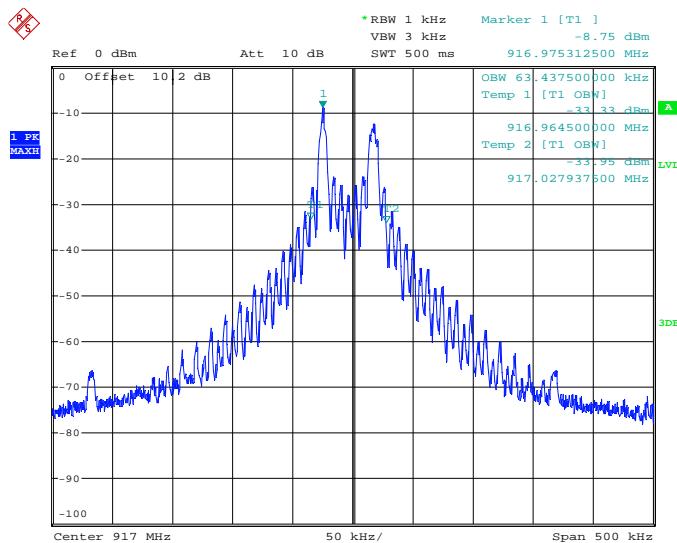Figure 7.2.2-1: 20dB Occupied Bandwidth

Date: 8.OCT.2018 16:31:53

Figure 7.2.2-2: 99% Occupied Bandwidth

7.3 Radiated Spurious Emissions – FCC: Section 15.249(a),(d); ISED Canada: RSS-210 B.10

7.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 10 GHz, 10 times the highest fundamental frequency.

For measurements below 30 MHz, the receive antenna height was set to 1 m and the EUT was rotated through 360°. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1 m to 4 m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements made with RBW and VBW of 1 MHz and 3 MHz respectively.

7.3.2 Measurement Results

Performed by: Thierry Jean-Charles, Jean Rene

Radiated spurious emissions found in the band of 9 kHz to 10 GHz are reported in the Table below.

Table 7.3.2-1: Radiated Spurious Emissions Tabulated Data

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/avg			pk	Qpk/avg	pk	Qpk/avg	pk	Qpk/avg
Fundamental Frequency										
917	-----	50.86	H	25.74	-----	76.60	-----	94	-----	17.4
917	-----	53.57	V	25.74	-----	79.31	-----	94	-----	14.7
Spurious Emissions										
1834	42.57	29.30	H	-1.21	41.36	28.09	74	54	32.6	25.9
1834	42.10	28.88	V	-1.21	40.89	27.67	74	54	33.1	26.3
2751	39.97	26.50	V	2.08	42.05	28.58	74	54	32.0	25.4
3668	41.51	32.62	H	5.20	46.71	37.82	74	54	27.3	16.2
3668	41.04	31.38	V	5.20	46.24	36.58	74	54	27.8	17.4

Notes:

All emissions above 3.67 GHz were attenuated below the limits and the noise floor of the measurement equipment.

7.3.3 Sample Calculations

$$R_C = R_U + CF_T$$

Where:

CF _T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R _U	=	Uncorrected Reading
R _C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $42.57 + (-1.21) = 41.36 \text{ dB}\mu\text{V/m}$

Margin: $74 \text{ dB}\mu\text{V/m} - 41.36 \text{ dB}\mu\text{V/m} = 32.64 \text{ dB}$

Example Calculation: Average

Corrected Level: $29.3 + (-1.21) = 28.09 \text{ dB}\mu\text{V/m}$

Margin: $54 \text{ dB}\mu\text{V/m} - 28.09 \text{ dB}\mu\text{V/m} = 25.91 \text{ dB}$

8 MEASUREMENT UNCERTAINTIES

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 8-1: Measurement Uncertainties

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 1.15 \text{ dB}$
Power Spectral Density	$\pm 1.15 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.15 \text{ dB}$
Radiated Emissions $\leq 1\text{GHz}$	$\pm 5.86 \text{ dB}$
Radiated Emissions $> 1\text{GHz}$	$\pm 4.65 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.72 \text{ dB}$

9 CONCLUSION

In the opinion of TÜV SÜD America, Inc. the model 92053071, manufactured by Ecolab, Inc., meets the requirements of FCC Part 15.249 and Industry Canada's Radio Standards Specification RSS-210 for the tests documented herein.

END REPORT