

## TEST REPORT

<b>Application No.:</b>	HKEM1901000007AT
<b>Applicant:</b>	Ecolab, Inc
<b>Address:</b>	650 Lone Oak Drive, Ecolab Schuman Center, Eagan Minnesota 55121
<b>FCC ID:</b>	Z9O-92053072
<b>Product Description:</b>	HHCM915 Bed Beacon
<b>Model No.:</b>	92053072
<b>Country of Origin:</b>	China
<b>Country of Destination:</b>	United States of America
<b>Standards:</b>	CFR 47 FCC PART 15 SUBPART C, 2018 Intentional Radiators (Section 15.247)
<b>Date of Receipt:</b>	2019-01-03
<b>Date of Test:</b>	2019-03-11 to 2019-03-14
<b>Date of Issue:</b>	2019-03-14
<b>Test Result:</b>	<b>Pass*</b>

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.  
 Please refer to section 3 of this report for further detail.



Ivan Toa  
**EMC Manager**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

## 2 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(1)	ANSI C63.10: Clause 6.9.1	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1)	ANSI C63.10: Clause 7.8.2	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10: Clause 7.8.3	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10: Clause 7.8.4	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 C section 15.247(a)(1)	ANSI C63.10: Clause 7.7.5	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1)	ANSI C63.10: Clause 7.8.5	PASS
Conducted Spurious Emission	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 7.8.8	PASS
Radiated Spurious Emission	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: clause 7.8.6	PASS

### 3 Contents

<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>4</b>
4.1 Client Information .....	4
4.2 General Description of E.U.T .....	4
4.3 Details of E.U.T .....	4
4.4 Modulation configures .....	5
4.5 Description of Support Units .....	5
4.6 Deviation from Standards .....	5
4.7 Abnormalities from Standard Conditions .....	5
4.8 Other Information Requested by the Customer .....	5
4.9 Test Location .....	5
4.10 Test Facility .....	6
4.11 Measurement Uncertainty (95% confidence levels, k=2) .....	6
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>7</b>
<b>6 TEST RESULTS .....</b>	<b>9</b>
6.1 E.U.T. test conditions .....	9
6.2 Antenna Requirement .....	12
6.3 Occupied Bandwidth .....	13
6.4 Carrier Frequencies Separated .....	16
6.5 Hopping Channel Number .....	19
6.6 Dwell Time .....	21
6.7 Pseudorandom Frequency Hopping Sequence .....	25
6.8 Maximum Peak Output Power .....	27
6.9 Conducted Spurious Emissions .....	30
6.10 Radiated Spurious Emissions .....	34
6.11 Band Edges Requirement .....	44

## 4 General Information

### 4.1 Client Information

Applicant: Ecolab, Inc  
Address of Applicant: 650 Lone Oak Drive, Ecolab Schuman Center, Eagan Minnesota 55121

### 4.2 General Description of E.U.T.

Product Name: HHCM915 Bed Beacon  
Model No.: 92053072

### 4.3 Details of E.U.T.

Operating Frequency 913.75 MHz to 916.30 MHz  
Type of Modulation: FHSS  
Number of Channels 50 Channels  
Dwell time Per channel is less than 0.4s.  
Antenna Type Integral  
Antenna gain: -2.50dBi  
Power Supply: DC 3V ("D" size x 2 pcs)

Remark: The device meets the requirements stated within Parts 15.247(g) & (h) in that they were developed under the protocol and operate as a true frequency hopping system. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

#### **4.4 Modulation configures**

None.

#### **4.5 Description of Support Units**

The EUT has been tested as an independent unit for fixed frequency by client.

#### **4.6 Deviation from Standards**

Biconical and log periodic antennas were used instead of dipole antennas.

#### **4.7 Abnormalities from Standard Conditions**

None.

#### **4.8 Other Information Requested by the Customer**

None.

#### **4.9 Test Location**

All tests were performed at:

SGS IECC Limited (Member of the SGS Group (SGS SA))

No. 16-B, Yip Wo Street, On Lok Tsuen, Fanling, N.T., Hong Kong

Tel: +852 2305 2570      Fax: +852 2756 4480.

No tests were sub-contracted.

## 4.10 Test Facility

The test facility is recognized or accredited by the following organizations:

- **HOKLAS (Lab Code: 125)**

SGS IECC Limited has been accepted by HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a HOKLAS Accredited Laboratory, this laboratory meets the requirements of ISO/IEC 17025:2005 and it has been accredited for performing specific test as listed in the scope of accreditation within the test category of Electrical and Electronic Products.

- **FCC Recognized Accredited Test Firm (CAB Registration No.: 446297)**

SGS IECC Limited has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: HK0010, Test Firm Registration Number: 446297.

- **Industry Canada (Site Registration No.: 5193A; CAB Identifier No.: HK0001)**

SGS IECC Limited has been recognized by Department of Innovation, Science and Economic Development (ISED) Canada as a wireless testing laboratory. The acceptance letter from the ISED is maintained in our files. CAB Identifier No: HK0001, Site Registration Number: 5193A.

## 4.11 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio frequency	$\pm 7.25 \times 10^{-8}$
2	RF power (conducted)	$\pm 0.75\text{dB}$
3	Radiated Spurious emission	$\pm 5.26\text{dB}$ (30MHz-1GHz)
		$\pm 5.11\text{dB}$ (1GHz-25GHz)
4	Temperature test	$\pm 1\text{ }^{\circ}\text{C}$
5	Humidity test	$\pm 3\%$
6	DC and low frequency voltages test	$\pm 0.5\%$

## 5 Equipment Used during Test

Radiated Emission			
Equipment	Manufacturer	Model / Serial No.	Cal. Due Date
EMI Test Receiver 9kHz to 3.6GHz	Rohde & Schwarz	ESR3 / 102326	2019/08/12
Antenna	Schaffner	CBL6111C / 2791	2019/10/26
Loop Antenna	Rohde & Schwarz	HFH2-Z2 / 871336/48	2020/12/03
Antenna	Schwarzbeck	BBA9106 / TE039A	2020/01/29
Antenna	Schwarzbeck	UHALP9107 / TE039B	2020/01/29
Millivoltmeter	Rohde & Schwarz	URV5 / 846254/013	2019/09/24
100V insertion Unit	Rohde & Schwarz	URV5-Z4 / 100138	2019/09/24
Amplifier	TESEQ	CBAIG-070 / T43859	--
Antenna Mast System	Schwarzbeck	AM9104 / -	--
Turntable with Controller	Drehtisch	DT312 / -	--
Spectrum Analyzer	Rohde & Schwarz	FSP30 / 101474	2019/05/22
Horn Antenna	Schwarzbeck	BBHA9120D / 9120D-1070	2020/01/29
Horn Antenna	Schwarzbeck	BBHA9170 / 9170-492	2019/10/16
Preamplifier	Schwarzbeck	BBV9718 / 9718-223	2019/01/28
Preamplifier	Schwarzbeck	BBV9719 / 9719-019	2019/12/20
Highpass Filter	Wainwright	WHNX3.5/26.5G-6SS / nil	2019/12/18
Band Reject Filter	Wainwright	WRCJV 2400/2500-2100/2800-40/3S S / nil	2019/12/18
RF cable	HUBER+SUHNER	SF104-26.5/2	2019/12/26

<b>RF Conducted</b>			
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model / Serial No.</b>	<b>Cal. Due Date</b>
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	2019/10/03
OSP	Rohde & Schwarz	OSP-B157W8	2019/10/03
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	2019/08/12
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	2019/08/12
Cable	Rohde & Schwarz	J12J103539-00-2	2019/08/27

## 6 Test Results

### 6.1 E.U.T. test conditions

<b>Test Voltage:</b>	DC 3V
<b>Temperature:</b>	20.0 -25.0 °C
<b>Humidity:</b>	38-50 % RH
<b>Atmospheric Pressure:</b>	1000 -1010 mbar
<b>Requirements:</b>	<p><b>15.31(e):</b> For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.</p> <p><b>15.32:</b> Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.</p>
<b>Test frequencies and frequency range:</b>	<p>According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:</p> <p>According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:</p>

**Number of fundamental frequencies to be tested in EUT transmit band**

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

**Frequency range of radiated emission measurements**

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

EUT channels and frequencies list:

Channel Number	Frequency (MHz)	Channel Index
1	913.75	20
2	913.80	7
3	913.85	1
4	913.90	48
5	913.95	11
6	914.00	44
7	914.05	14
8	914.10	38
9	914.15	50
10	914.20	2
11	914.25	12
12	914.30	36
13	914.35	31
14	914.40	39
15	914.45	9
16	914.50	6
17	914.55	33
18	914.60	13
19	914.65	16
20	914.70	5
21	914.75	Reserved
22	914.80	49
23	914.85	10
24	914.90	23
25	914.95	8
26	915.00	25

Channel Number	Frequency (MHz)	Channel Index
27	915.05	34
28	915.10	3
29	915.15	35
30	915.20	32
31	915.25	Reserved
32	915.30	17
33	915.35	42
34	915.40	15
35	915.45	47
36	915.50	29
37	915.55	37
38	915.60	40
39	915.65	26
40	915.70	22
41	915.75	28
42	915.80	46
43	915.85	18
44	915.90	41
45	915.95	27
46	916.00	30
47	916.05	24
48	916.10	43
49	916.15	21
50	916.20	4
51	916.25	19
52	916.30	45

Test frequencies are the lowest channel 1 channel (913.75MHz), Highest channel 52 channel (916.30MHz)

## 6.2 Antenna Requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed.

Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The maximum gain of the antenna is- 2.50dBi.

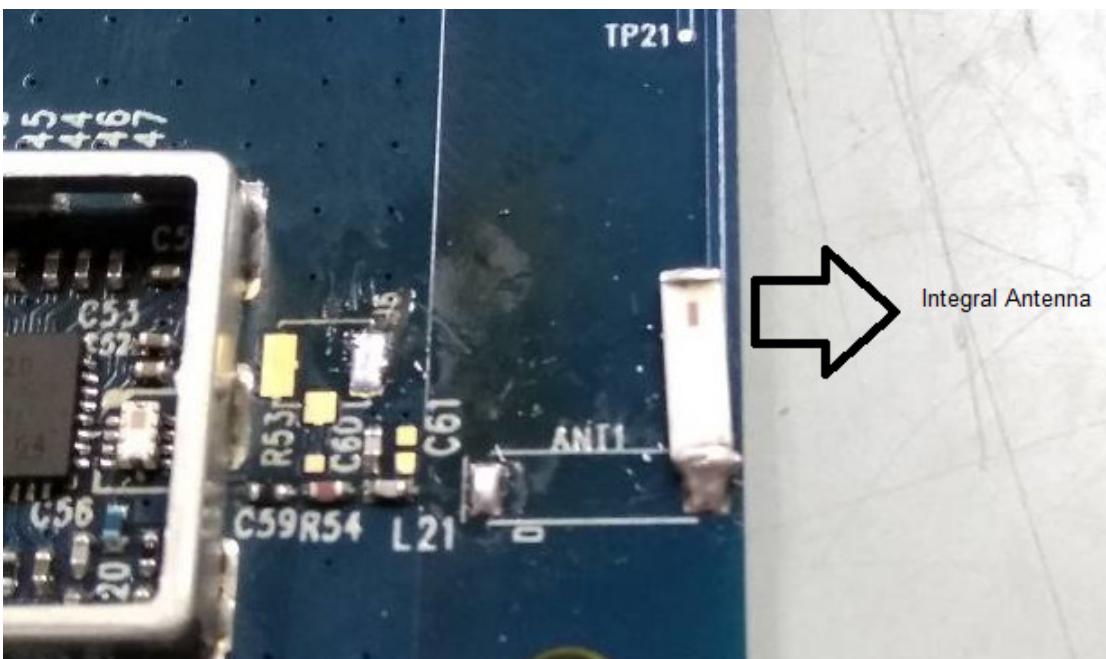

**Test result: The unit does meet the FCC requirements.**

### 6.3 Occupied Bandwidth

**Test Requirement:** FCC Part 15 C section 15.247

(a)(1) (i) For frequency hopping systems operating in the 902-928 MHz band:


If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;

If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**Test Method:** ANSI C63.10 : Clause 6.9.1

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (913.75 MHz) and the highest (916.30 MHz) channel.

**Test Configuration:**

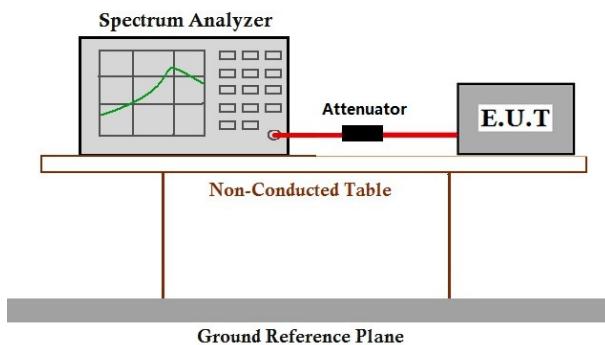

**Test Procedure:**


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyser: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
3. Set the spectrum analyser: RBW  $\geq$  1% of the 20dB bandwidth VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20 dB points bandwidth.

**Test result:**

Test Channel	Bandwidth(kHz)	Limit(kHz)
913.73	13.60	Less than 250
916.29	13.75	Less than 250


**Result plot as follows:**

Channel (913.75 MHz):

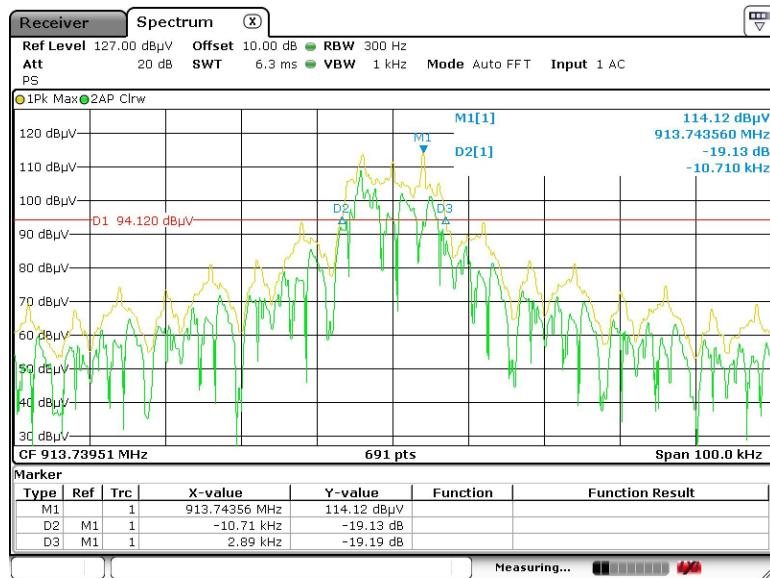

Remark 20dB Bandwidth:  $D_3 - D_2 = 13.60\text{kHz}$

Channel (916.30 MHz):

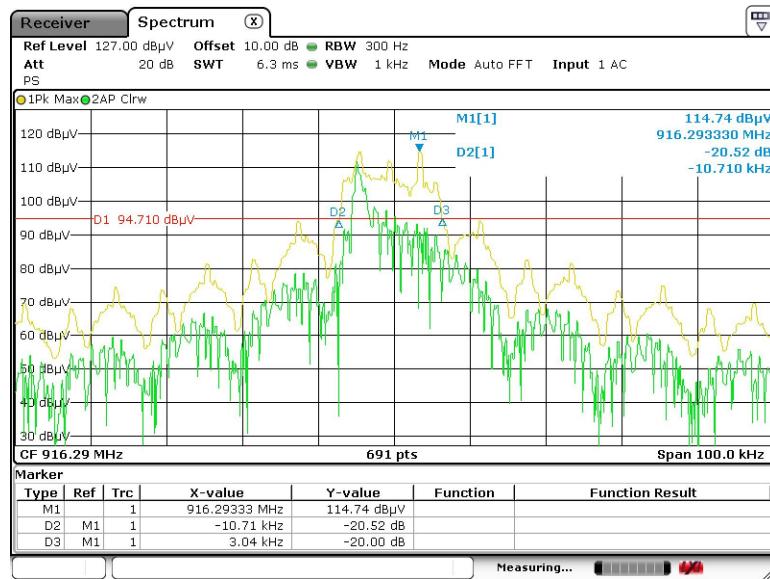

Remark 20dB Bandwidth:  $D_3 - D_2 = 13.75\text{ kHz}$

## 6.4 Carrier Frequencies Separated


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**Test Method:** ANSI C63.10: Clause 7.7.2

**Test Status:** Pre-test the EUT in hopping mode.

### Test Configuration:

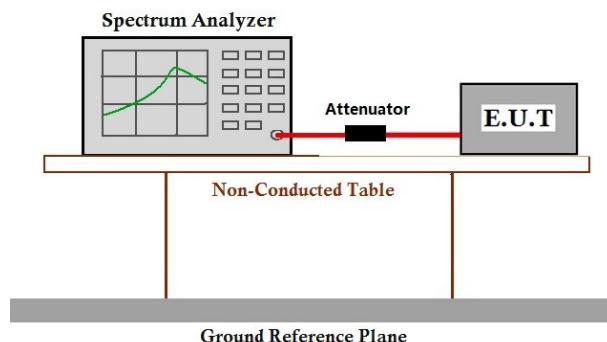

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW  $\geq$  1% of the span, VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

**Test result:**

Test Channel	Carrier Frequencies Separated (kHz)	Limit①(kHz)	Pass/Fail
(channel 1 and channel 2)	49.78	25	Pass
(channel 51 and channel 52)	49.78	25	Pass

**Remark:**

- ① The limit is the 20 dB bandwidth is less than 25 kHz, then use 25 kHz as limit.

**Result plot as follows:****Lowest Channels: Carrier Frequencies Separated****Highest Channels: Carrier Frequencies Separated****Test result: The unit does meet the FCC requirements.**

## 6.5 Hopping Channel Number


**Test Requirement:** FCC Part15 C section 15.247

(a)(1)(i) Frequency hopping systems in the 913.75 - 916.30 MHz band shall use at least 50 channels.

**Test Method:** ANSI C63.10: Clause 7.7.3

**Test Status:** Pre-test the EUT in hopping mode.


### Test Configuration:

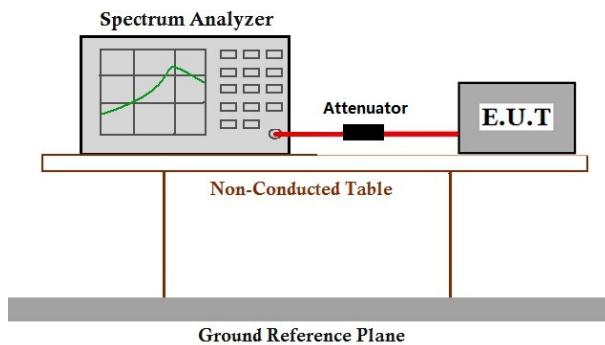

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 10 kHz. VBW = 30 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 913.5 MHz. stop frequency = 916.5 MHz. Submit the test result graph.

**Test result:** Total channels are 50 channels.

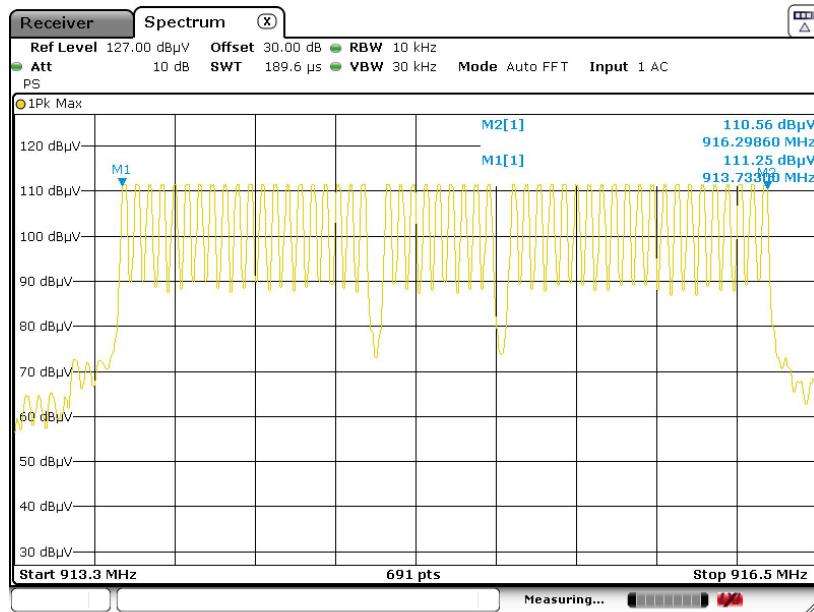

**Test result:** The unit does meet the FCC requirements.

## 6.6 Dwell Time

**Test Requirement:** FCC Part 15 C section 15.247

(a)(1) (i) For frequency hopping systems operating in the 902-928 MHz band:


If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;

If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**Test Method:** ANSI C63.10: Clause 7.7.4

**Test Status:** Test the EUT in hopping mode at the lowest (913.7 MHz and highest (916.3 MHz) channel.

**Test Configuration:**

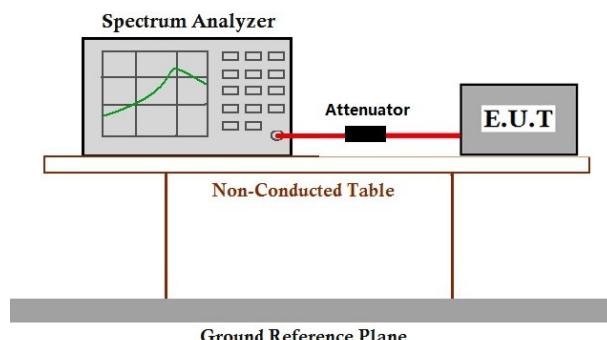

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. centered on a hopping channel;
3. Set RBW = 10 kHz and VBW = 30 kHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g. data rate, modulation format, etc.). Repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

**Test Result:**

The test period: T= 20 s


<b>1. Channel 1: 913.75 MHz</b>
time slot = 375.22 (ms) * 1 = 375.22 ms
<b>2. Channel 52: 916.30 MHz</b>
time slot = 375.22 (ms) * 1 = 375.22 ms

The results are not greater than 0.4 seconds.


**The unit does meet the FCC requirements.**

**Result plot as follows:****1. Lowest channel (913.75 MHz):**

Pulse Width:

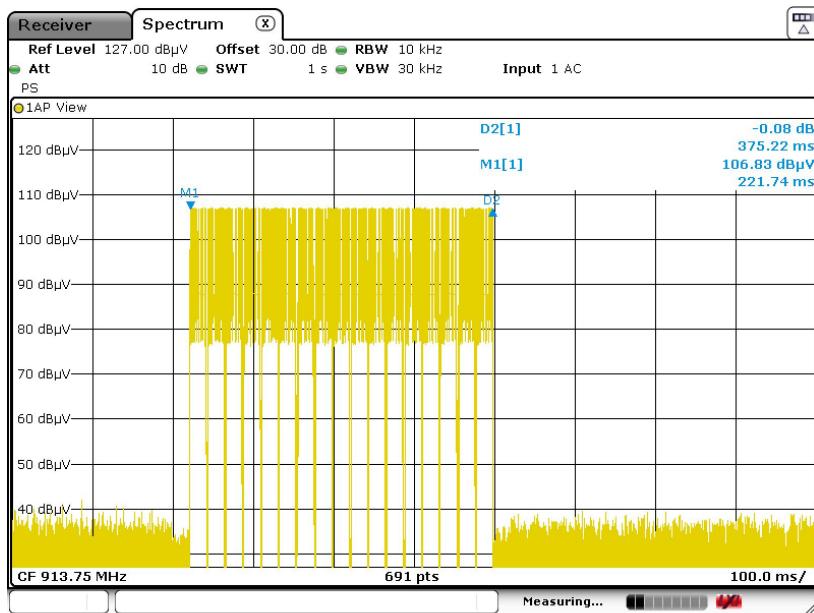


Number of Pulses in 20s observation period:

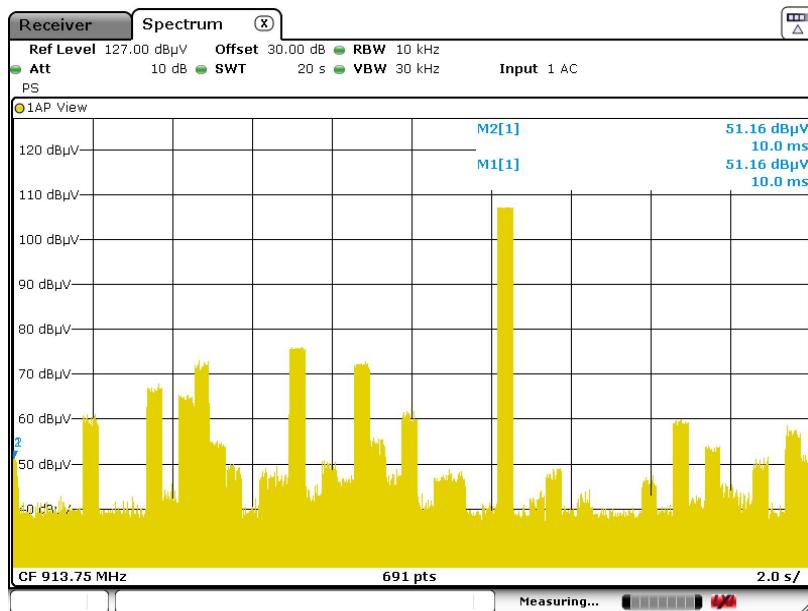


## 2. Middle Channel (916.30 MHz):

Pulse Width:

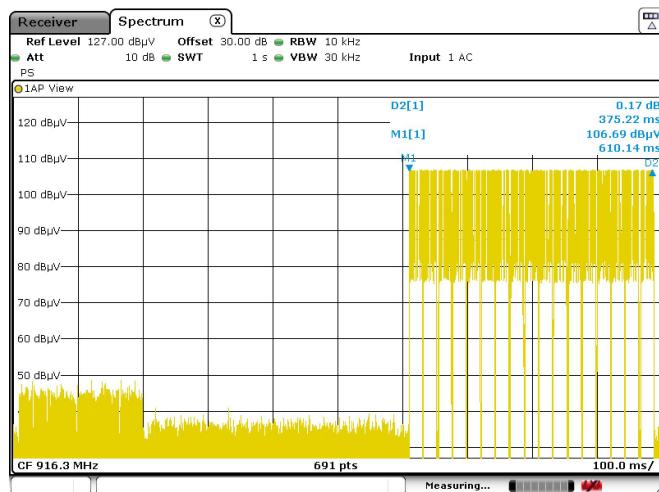

Number of Pulses in 20s observation period:

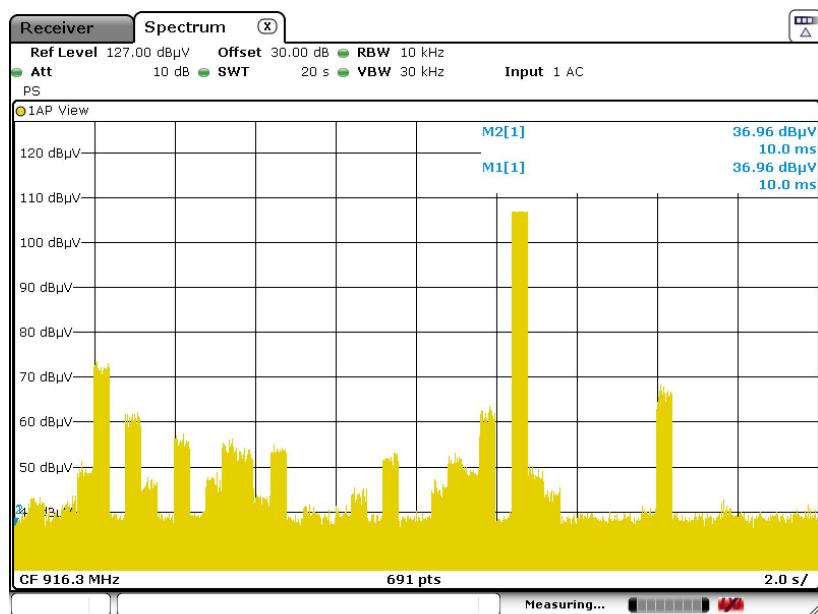

## 6.7 Pseudorandom Frequency Hopping Sequence

### 6.7.1 Standard requirement

15.247(a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 6.7.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

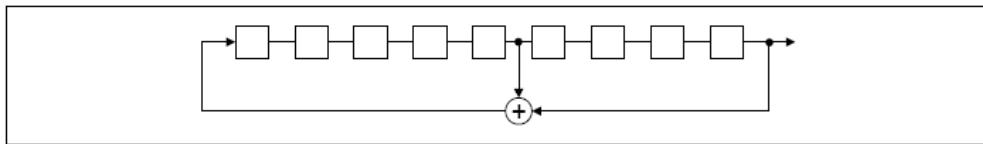

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

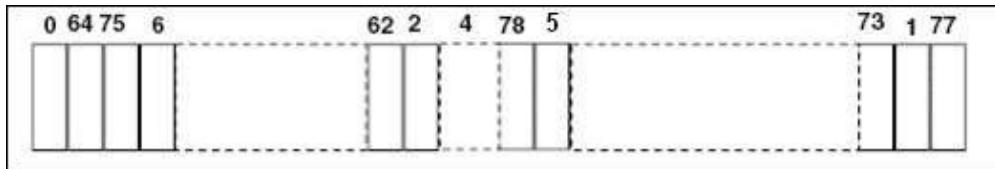

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 6.8 Maximum Peak Output Power

**Test Requirement:** FCC Part 15 C section 15.247

(b)(1) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels.


Refer to the result "Hopping channel number" of this document. The 1 watt (30.0 dBm) limit applies.

**Test Method:** ANSI C63.10: Clause 7.8.5

**Test Limit:**

**Test mode:** Pre-test the EUT in continuous transmitting mode at the lowest (913.75 MHz) and highest (916.30 MHz) channel.

**Test Configuration:**

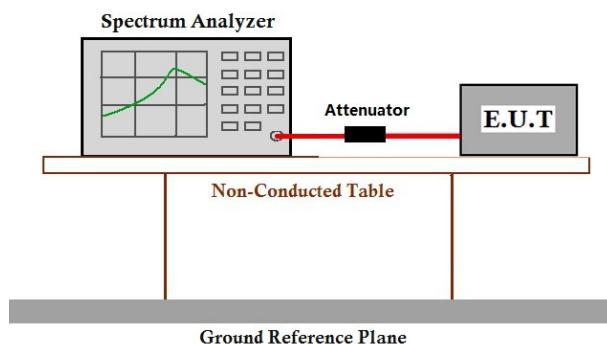

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


**Test Result:**

Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
913.75	5.90	30.0	Pass
916.30	<u>6.46</u>	30.0	Pass


**Remark: cable lose offset in Spectrum****Test result: The unit does meet the FCC requirements.**

**Result plot as follows:**

Channel (913.75 MHz):

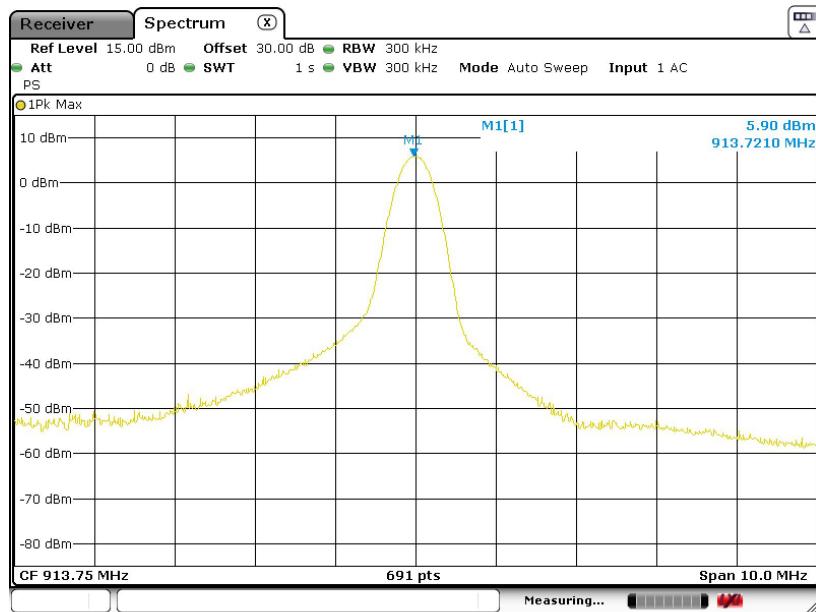

Channel (916.30 MHz):

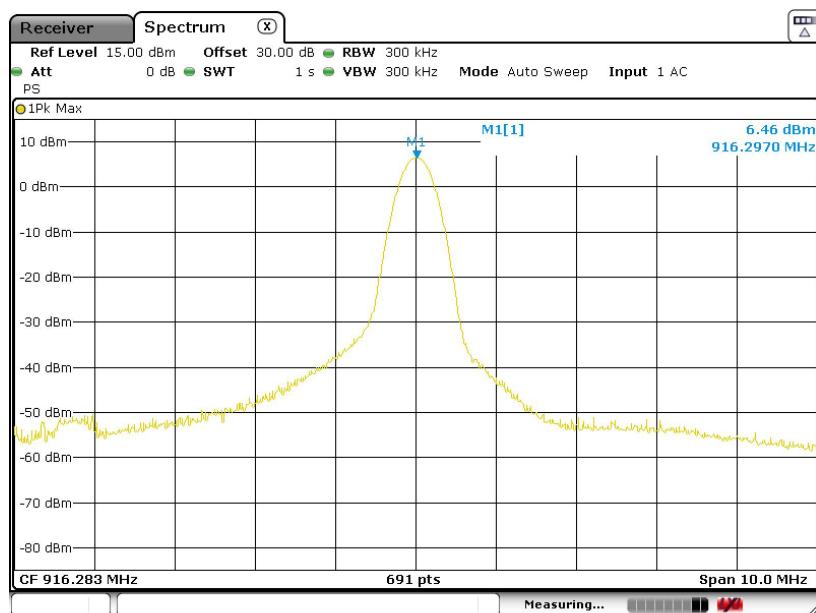

## 6.9 Conducted Spurious Emissions


**Test Requirement:** FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test Method:** ANSI C63.10: Clause 6.7

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (913.75 MHz) and highest (916.30 MHz) channel.

**Test Configuration:**

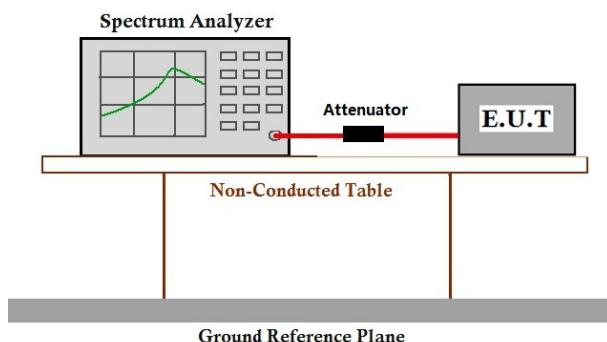


**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 100 kHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).


**Result plot as follows:**

**Channel (913.75 MHz): 30 MHz to 1 GHz**

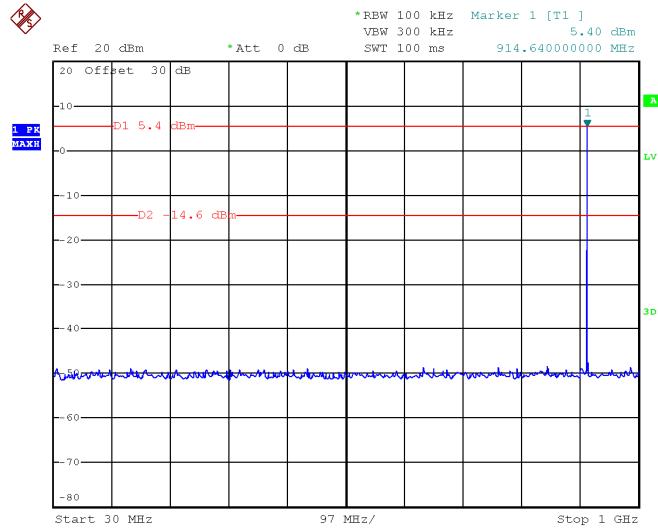


Date: 14.MAR.2019 11:41:25

**Channel (913.75 MHz): 1 GHz to 5 GHz**

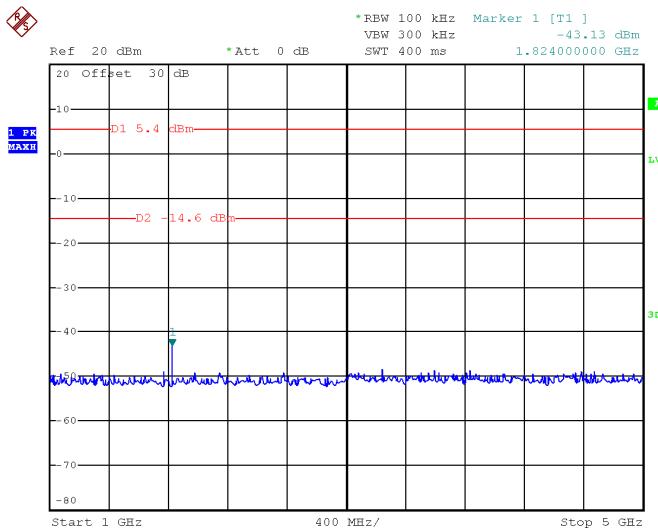


Date: 14.MAR.2019 11:41:44

### Channel (913.75 MHz): 5 GHz to 25 GHz

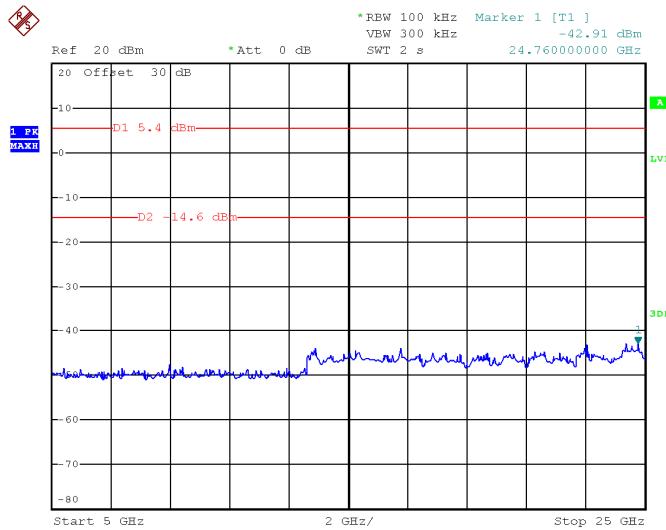


Date: 14.MAR.2019 11:42:16

### Channel (916.30 MHz): 30 MHz to 1 GHz

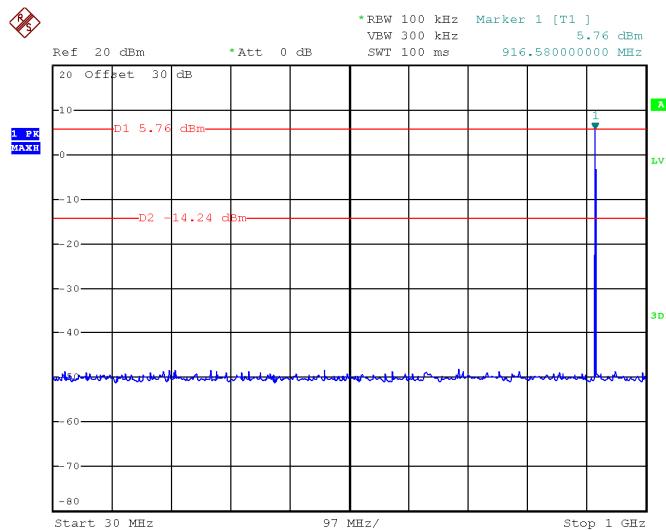


Date: 14.MAR.2019 11:39:09

### Channel (916.30 MHz): 1 GHz to 5 GHz

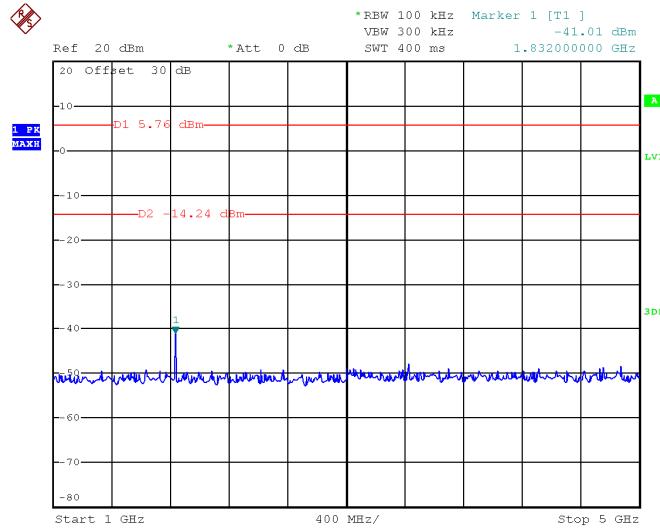

Date: 14.MAR.2019 11:39:28

### Channel (916.30 MHz): 5 GHz to 25 GHz

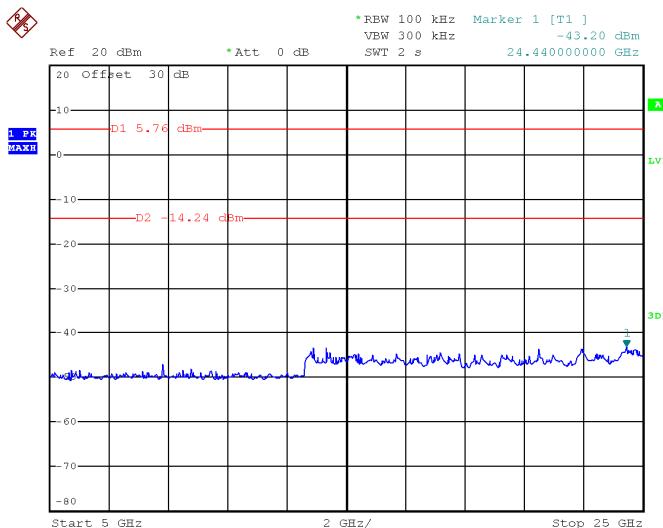


Date: 14.MAR.2019 11:40:04

## 6.10 Radiated Spurious Emissions


<b>Test Requirement:</b>	FCC Part15 C section 15.247
	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
<b>Test Method:</b>	ANSI C63.10: Clause 6.4, 6.5 and 6.6
<b>Test Status:</b>	Pre-test the EUT in continuous transmitting mode at the lowest (913.75 MHz) and highest (916.30 MHz) channel.
<b>Detector:</b>	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, VBW = 10 Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz

**Test Configuration:**


- 1) 9 kHz to 30 MHz emissions:

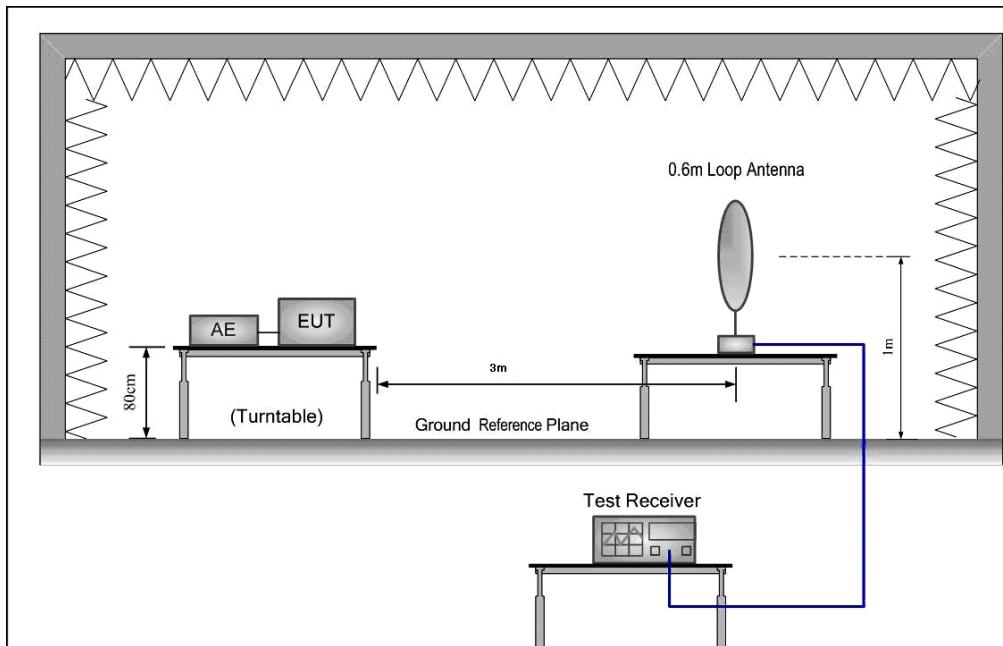

- 2) 30 MHz to 1 GHz emissions:

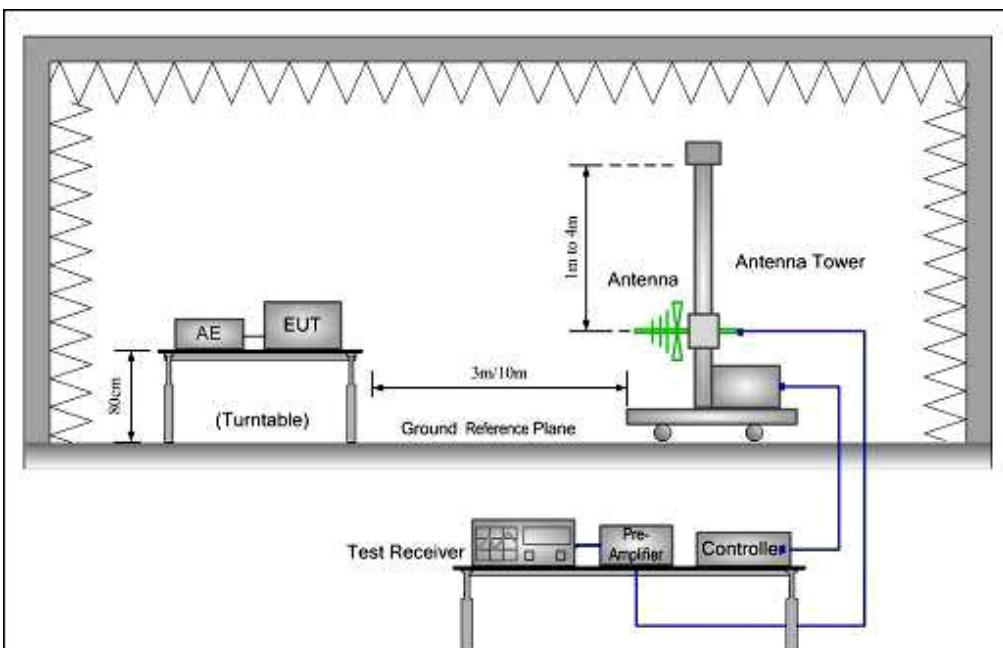

## 3) 1 GHz to 40 GHz emissions:

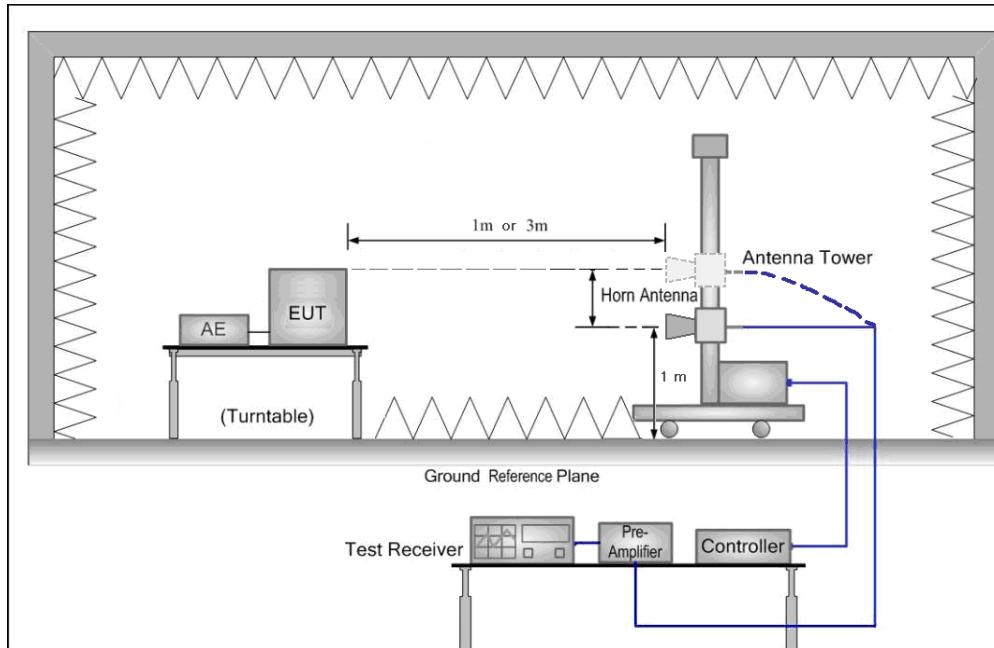**Test Procedure:**

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

The receiver scanned from the lowest frequency generated within the EUT to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst-case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(dwell\ time/100\ ms)$ , in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.

## 6.10.1 Harmonic and other spurious emissions


### 6.10.1.1 Test the lowest Channel in transmitting status

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

#### 30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Quasi-peak measurement:

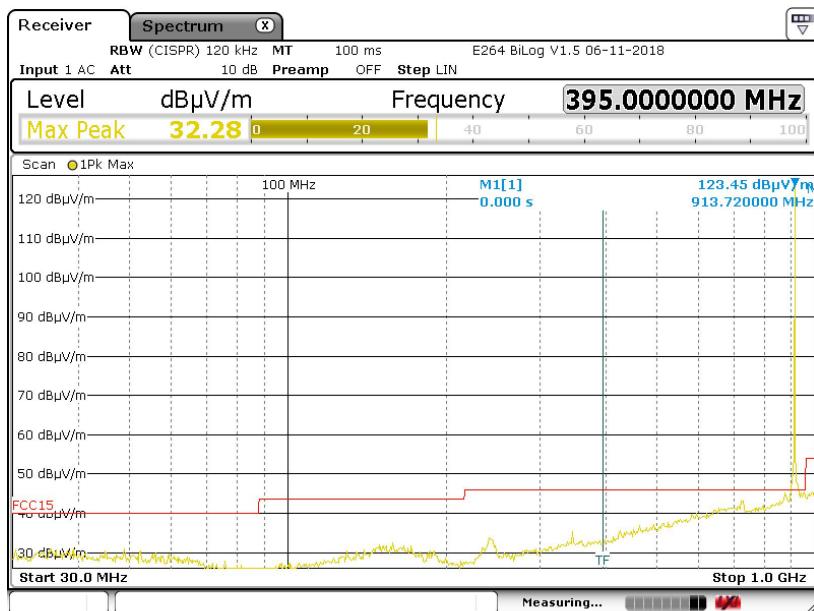

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)
35.970	V	13.7	7.3	21.0	40	-19.0
66.510	H	11.9	5.7	17.6	40	-22.4
71.650	V	11.1	5.8	16.9	40	-23.1
149.490	V	14.3	5.6	19.9	43.5	-23.6
336.340	V	15.4	4.9	20.3	46	-25.7
725.050	V	23.6	6.7	30.3	46	-15.7

1. All readings are Quasi-Peak values.

2. Correction Factor = Antenna Factor + Cable Loss.

**1-25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement:**

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
1833	H	47.91	44.21	74	54	Pass
3665	V	43.96	38.38	74	54	Pass
5510	V	42.26	27.68	74	54	Pass
7314	H	46.54	31.81	74	54	Pass
8565	V	49.35	34.59	74	54	Pass
10526	V	53.47	38.77	74	54	Pass


### 6.10.1.2 Test the highest Channel in transmitting status

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

#### 30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Quasi-peak measurement:

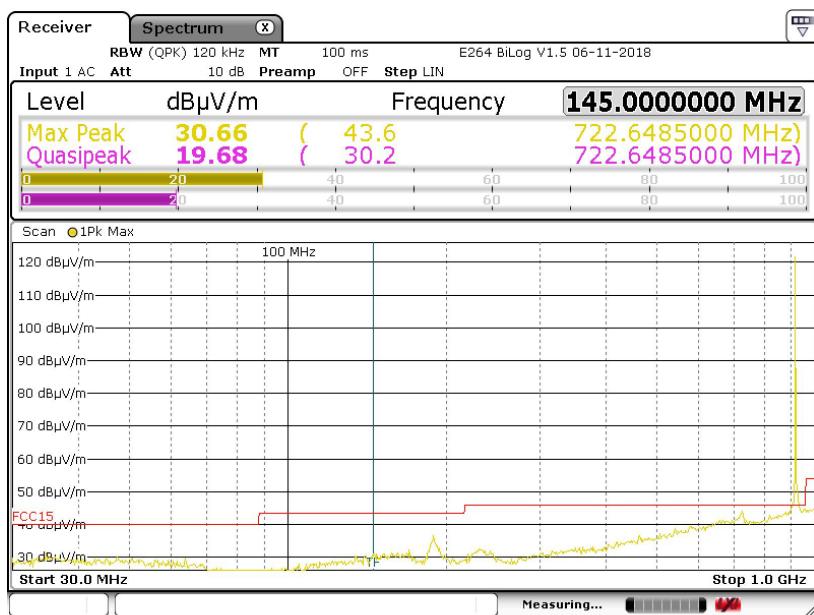

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)
38.140	V	13.7	7.5	21.2	40	-18.8
65.110	V	12.1	6.6	18.7	40	-21.3
71.350	V	11.2	5.9	17.1	40	-22.9
157.690	H	14.6	5.8	20.4	43.5	-23.1
355.910	H	15.9	4.6	20.5	46	-25.5
661.660	V	23.0	5.9	28.9	46	-17.1

1. All readings are Quasi-Peak values.

2. Correction Factor = Antenna Factor + Cable Loss.

**1-25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement:**

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
1827	H	47.05	44.02	74	54	Pass
2726	H	34.59	19.82	74	54	Pass
3442	H	38.44	23.37	74	54	Pass
5153	V	43.59	28.47	74	54	Pass
7513	V	46.81	32.64	74	54	Pass
8546	V	49.38	35.14	74	54	Pass

**Remark:**

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**Test result: The unit does meet the FCC requirements.**

## 6.10.2 Radiated Emissions which fall in the restricted bands

**Test Requirement:** FCC Part15 C Section 15.247

(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Test Method:** ANSI C63.10: Clause 6.4, 6.5 and 6.6

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (913.75 MHz) and highest (916.30 MHz) channel.

**Measurement** 3m (Semi-Anechoic Chamber)

**Distance:**

**Limit:** Section 15.209(a)

40.0 dB $\mu$ V/m between 30MHz & 88MHz;

43.5 dB $\mu$ V/m between 88MHz & 216MHz;

46.0 dB $\mu$ V/m between 216MHz & 960MHz;

54.0 dB $\mu$ V/m above 960MHz.

**Detector:** For PK value:

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for  $f \geq 1$  GHz,

VBW = 10 Hz

Sweep = auto

Detector function = peak

Trace = max hold

**Test Result:**

**Test at lowest Channel (913.75 MHz) in transmitting status**

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)	Remark
		QP	QP		
902	H	30	QP	46	PASS
902	V	25.3	QP	46	PASS

**Test at highest Channel (916.30 MHz) in transmitting status**

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)	Remark
		QP	QP		
928.0	H	33.1	QP	46	PASS
928.0	V	30.3	QP	46	PASS

Remark: above table only record the worse data of emissions in restricted frequency bands.

**Test result: The unit does meet the FCC requirements.**

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

## 6.11 Band Edges Requirement

**Test Requirement:** FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Frequency Band:** 913.75 MHz to 916.30 MHz

**Test Method:** ANSI C63.10 (2013) Section 7.8.6

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (913.75 MHz) and highest (916.30 MHz) channel.

### Test Configuration:

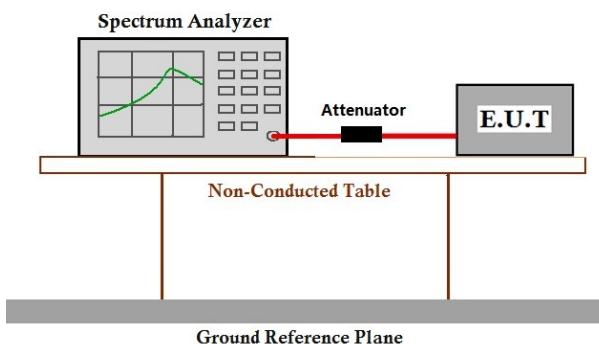

### Test Procedure:

Use the following spectrum analyzer settings:

Span = 10MHz (wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.)

RBW = 100 kHz (1% of the span) and VBW = 300 kHz

Sweep = auto


Detector function = peak

Trace = max hold

### Test Result:


Compare with the output power of the lowest frequency, the Lower Edges attenuated more than 20dB  
Compare with the output power of the highest frequency, the Upper Edges attenuated more than 20dB.

Channel (913.75 MHz):

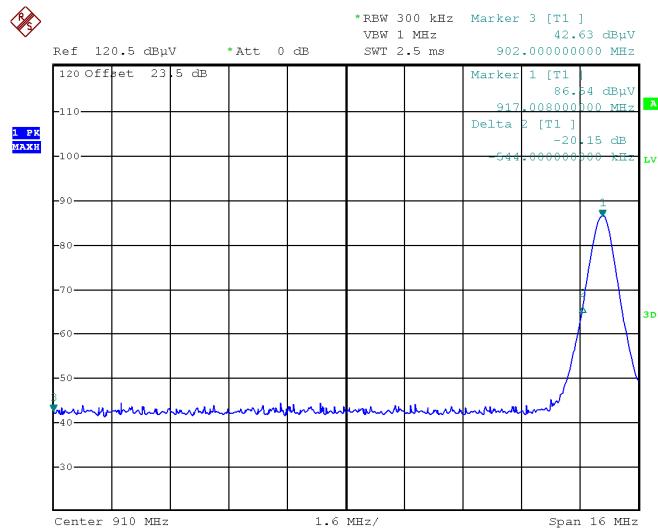

Date: 28.FEB.2019 15:56:01

Channel (916.30 MHz):

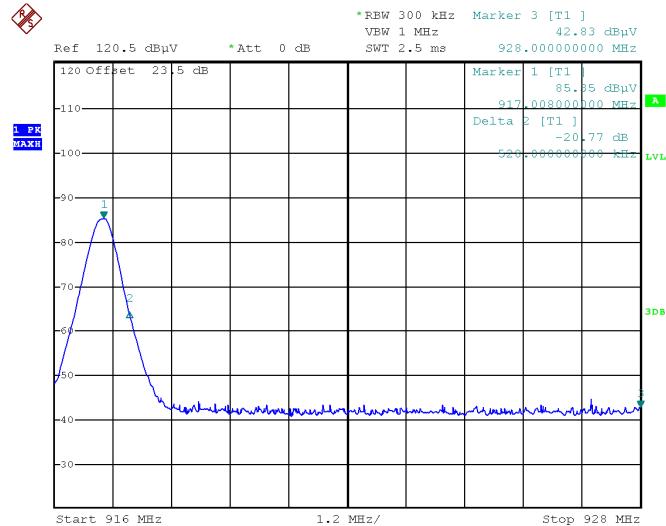

Date: 28.FEB.2019 15:56:52

**Test result: The unit does meet the FCC requirements.**

**--End of Report--**