



# FCC REPORT

**Applicant:** Hunan Space Satellite Communication Co., Ltd

**Address of Applicant:** HangTian yard,Wangchengpo,Changsha,Hunan,PRC

**Equipment Under Test (EUT)**

Product Name: Wireless hd transmission machine

Model No.: WTD-700R, NTD-700R, ETD700R, MTD700R

**FCC ID:** ZBOWTD-700R

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.407:2009

**Date of sample receipt:** 12 Jan. 2011

**Date of Test:** 13 Jan – 1 Mar. 2011

**Date of report issue:** 7 Mar. 2011

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Contents

	Page
1 COVER PAGE .....	1
2 CONTENTS .....	2
3 TEST SUMMARY .....	3
4 GENERAL INFORMATION .....	4
4.1 CLIENT INFORMATION .....	4
4.2 GENERAL DESCRIPTION OF E.U.T. ....	4
4.3 TEST ENVIRONMENT AND MODE.....	4
4.4 TEST FACILITY.....	5
4.5 TEST LOCATION .....	5
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	5
4.7 TEST INSTRUMENTS LIST .....	6
5 TEST RESULTS AND MEASUREMENT DATA.....	7
5.1 ANTENNA REQUIREMENT: .....	7
5.2 CONDUCTED EMISSIONS.....	8
5.3 PEAK TRANSMIT POWER.....	11
5.4 POWER SPECTRAL DENSITY.....	14
5.5 PEAK EXCURSION .....	16
5.6 UNDESIRABLE EMISSION.....	18
5.7 BAND EDGE.....	20
5.8 RADIATED EMISSION.....	23
5.9 FREQUENCY STABILITY .....	27

### 3 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	PASS
AC Power Line Conducted Emission	15.207	PASS
Peak Transmit Power	15.407(a)(1)	PASS
Power Spectral Density	15.407(a)(1)	PASS
Peak Excursion	15.407(a)(6)	PASS
Undesirable Emission	15.407(b)(6), 15.205/15.209	PASS
Radiated Emission	15.205/15.209	PASS
Band Edge	15.205	PASS
Frequency Stability	15.407(f)	PASS

Remark:

- Pass: The EUT complies with the essential requirements in the standard.
- Fail: The EUT does not comply with the essential requirements in the standard.

## 4 General Information

### 4.1 Client Information

Applicant:	Hunan Space Satellite Communication Co., Ltd
Address of Applicant:	HangTian yard,Wangchengpo,Changsha,Hunan,PRC
Manufacturer/ Factory:	Hunan Space Satellite Communication Co., Ltd
Address of Manufacturer/ Factory:	HangTian yard,Wangchengpo,Changsha,Hunan,PRC

### 4.2 General Description of E.U.T.

Product Name:	Wireless hd transmission machine
Model No.:	WTD-700R, NTD-700R, ETD700R, MTD700R
Operation Frequency:	5190MHz, 5230MHz; 5755MHz, 5795MHz, 5835MHz
Channel numbers:	5
Channel separation:	40MHz
Modulation technology:	OFDM
Antenna Type:	PCB Antenna (Transmit antenna: 1pcs; receive antenna: 4pcs)
Antenna gain:	2dBi
Power supply:	AC 120V 60Hz

### 4.3 Test environment and mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Operation mode	Keep the EUT in receiving mode

#### 4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

● **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

#### 4.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

#### 4.6 Other Information Requested by the Customer

None.


## 4.7 Test Instruments list

<b>Radiated Emission:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (dd-mm-yy)</b>	<b>Cal.Due date (dd-mm-yy)</b>
1	3m Semi-Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS201	Mar. 30 2010	Mar. 30 2011
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS202	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Sep. 10 2010	Sep. 10 2011
4	Spectrum analyzer	Rohde & Schwarz	FSP40	GTS203	Sep. 10 2010	Sep. 10 2011
5	8-WAY Power Divider	JFW	50PD-647	GTS203	Sep. 10 2010	Sep. 10 2011
6	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS204	Feb. 26 2011	Feb. 26 2012
7	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS205	June 30 2010	June 30 2011
8	Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9170	GTS205	June 30 2010	June 30 2011
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	Coaxial Cable	GTS	N/A	GTS400	Apr. 01 2010	Apr. 01 2011
11	Coaxial Cable	GTS	N/A	GTS401	Apr. 01 2010	Apr. 01 2011
12	Coaxial cable	GTS	N/A	GTS402	Apr. 01 2010	Apr. 01 2011
13	Coaxial Cable	GTS	N/A	GTS407	Apr. 01 2010	Apr. 01 2011
14	Coaxial Cable	GTS	N/A	GTS408	Apr. 01 2010	Apr. 01 2011
15	Amplifier	Sonnoma Instrument	305-1052	GTS210	Apr. 01 2010	Apr. 01 2011
16	Amplifier	HP	8349B	GTS231	Apr. 01 2010	Apr. 01 2011

<b>Conducted Emission:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (dd-mm-yy)</b>	<b>Cal.Due date (dd-mm-yy)</b>
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS206	Apr. 10 2010	Apr. 10 2011
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS208	Sep. 14 2010	Sep. 14 2011
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS209	Sep. 14 2010	Sep. 14 2011
4	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS207	Apr. 14 2010	Apr. 14 2011
5	Coaxial Cable	GTS	N/A	GTS406	Apr. 01 2010	Apr. 01 2011
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

## 5 Test results and Measurement Data

### 5.1 Antenna requirement:
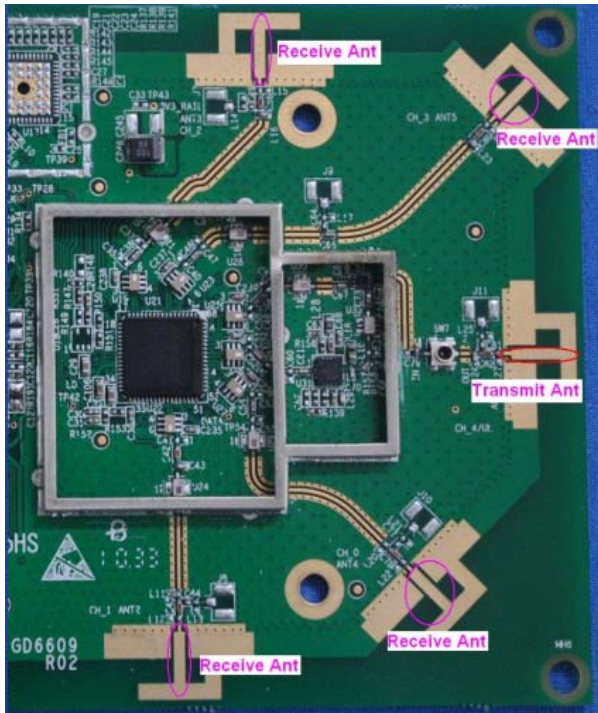
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i>  An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>E.U.T Antenna:</b>	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.</p>	
	


## 5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4: 2003		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</p>		
Test setup:	<div><p style="text-align: center;"><b>Reference Plane</b></p><p style="text-align: center;">Test table/Insulation plane</p><p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>		
Test Instruments:	Refer to section 4.7 for details		
Test mode:	Refer to section 4.3 for details		
Test results:	Passed		

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


## Live Line:

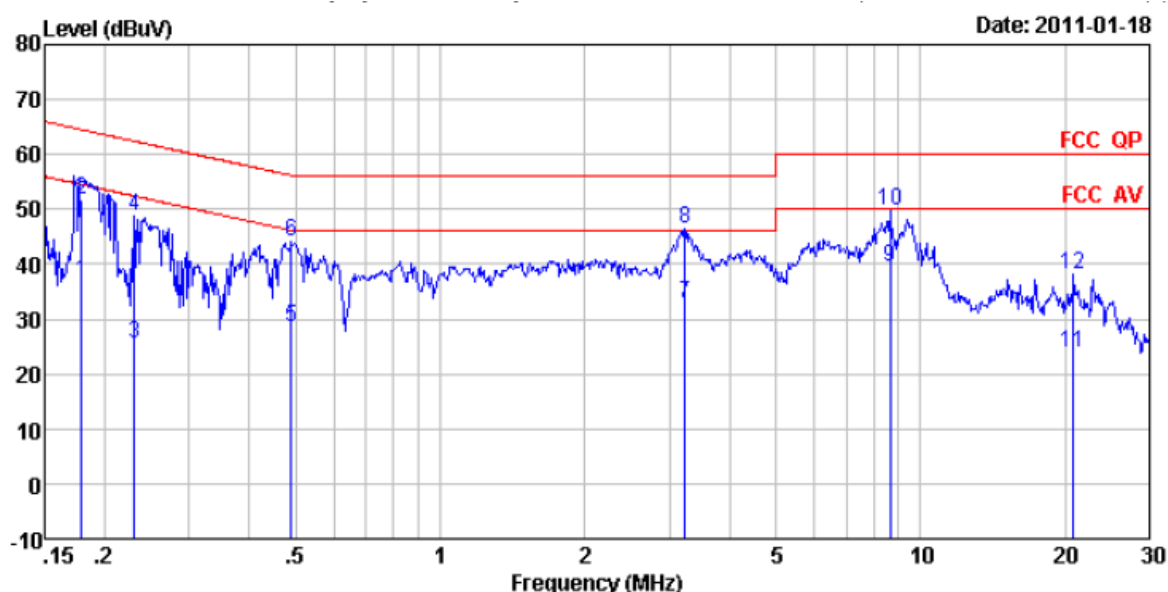

Condition : FCC QP LISN(2011) LINE  
Job No. : 018RF  
EUT : Wireless hd transmission machine  
Test Mode : Operation mode  
Test Engineer: Lau

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.179	36.28	0.67	0.01	36.96	54.53	-17.57	Average
2	0.179	51.10	0.67	0.01	51.78	64.53	-12.75	QP
3	0.230	24.76	0.64	0.01	25.41	52.44	-27.03	Average
4	0.230	48.06	0.64	0.01	48.71	62.44	-13.73	QP
5	0.489	27.85	0.56	0.01	28.42	46.19	-17.77	Average
6	0.489	43.56	0.56	0.01	44.13	56.19	-12.06	QP
7	3.241	32.43	0.35	0.22	33.00	46.00	-13.00	Average
8	3.241	45.98	0.35	0.22	46.55	56.00	-9.45	QP
9	8.637	38.76	0.24	0.38	39.38	50.00	-10.62	Average
10	8.637	49.29	0.24	0.38	49.91	60.00	-10.09	QP
11	20.814	23.28	0.14	0.45	23.87	50.00	-26.13	Average
12	20.814	37.40	0.14	0.45	37.99	60.00	-22.01	QP

## Neutral Line:

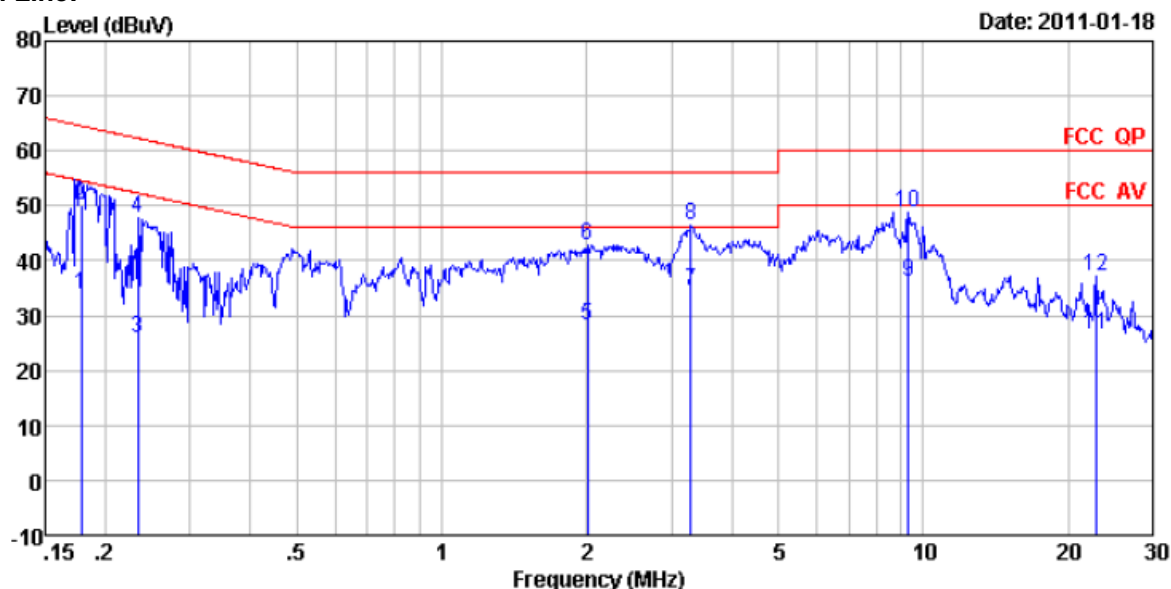


Condition : FCC QP LISN(2011) NEUTRAL  
 Job No. : 018RF  
 EUT : Wireless hd transmission machine  
 Test Mode : Operation mode  
 Test Engineer: Lau

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.179	33.18	0.67	0.01	33.86	54.55	-20.69	Average
2	0.179	49.40	0.67	0.01	50.08	64.55	-14.47	QP
3	0.234	25.17	0.64	0.01	25.82	52.30	-26.48	Average
4	0.234	47.16	0.64	0.01	47.81	62.30	-14.49	QP
5	2.012	27.68	0.40	0.12	28.20	46.00	-17.80	Average
6	2.012	42.39	0.40	0.12	42.91	56.00	-13.09	QP
7	3.293	33.82	0.34	0.22	34.38	46.00	-11.62	Average
8	3.293	45.80	0.34	0.22	46.36	56.00	-9.64	QP
9	9.302	35.69	0.23	0.39	36.31	50.00	-13.69	Average
10	9.302	48.31	0.23	0.39	48.93	60.00	-11.07	QP
11	22.896	25.86	0.13	0.45	26.44	50.00	-23.56	Average
12	22.896	36.65	0.13	0.45	37.23	60.00	-22.77	QP

## Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

### 5.3 Peak Transmit Power

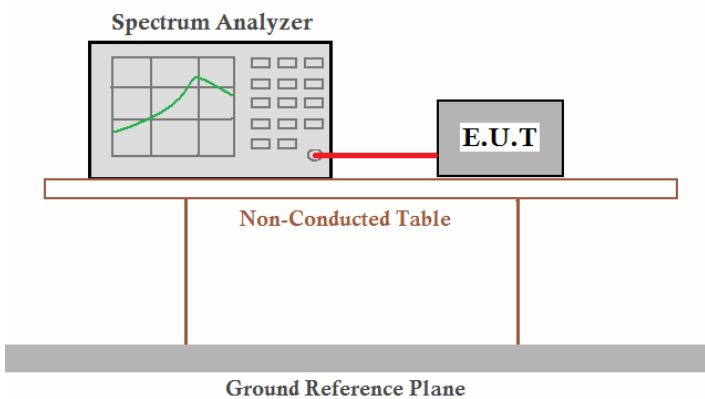
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	ANSI C63.4:2003
Limit:	For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10log B, where B is the 26-dB emission bandwidth in MHz.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test procedure:	<p>As an alternative to Publication: 662911, the test method is “measure and sum”, In the measure and sum approach, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units (e.g., mW—not dBm).</p> <p>The EUT peak power was measured with a peak power meter employing a video bandwidth greater than 6dB BW of the emission under test. Peak output power was read directly from the spectrum analyzer across all data rates, Special care was used to make sure that the EUT was transmitting in continuous mode.</p>
Test Instruments:	Refer to section 4.7 for details
Test mode:	Refer to section 4.3 for details
Test results:	Pass

#### Measurement Data

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Limit		Result
				dBm	dBm+10log(BW)	
Low	5190	40.38	15.96	17.00	20.02	Pass
High	5230	40.30	15.26	17.00	20.02	Pass


Test plot as follows:

Channel:	Low channel	Test item:	Output power
----------	-------------	------------	--------------

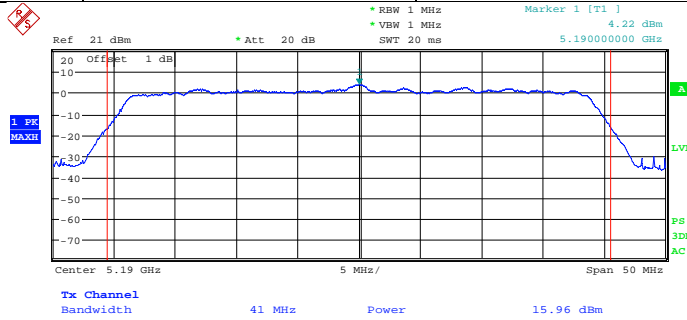


Date: 25.FEB.2011 17:20:16

Channel:	Low channel	Test item:	26dB bandwidth
----------	-------------	------------	----------------

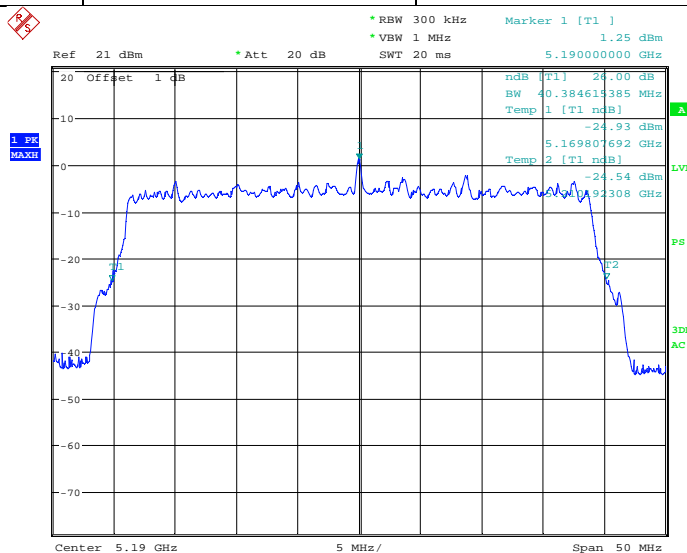


Date: 25.FEB.2011 17:20:50

Channel:	High channel	Test item:	Output power
----------	--------------	------------	--------------

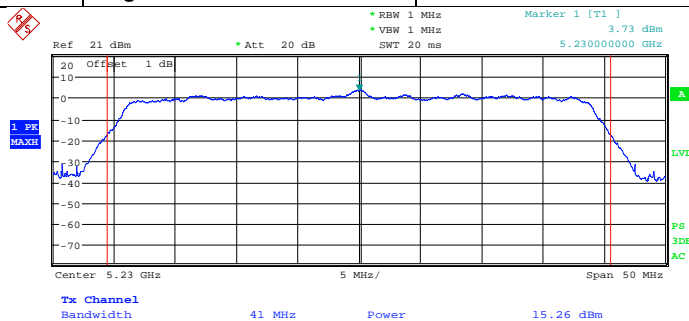


Date: 25.FEB.2011 17:34:09

Channel:	High channel	Test item:	26dB bandwidth
----------	--------------	------------	----------------

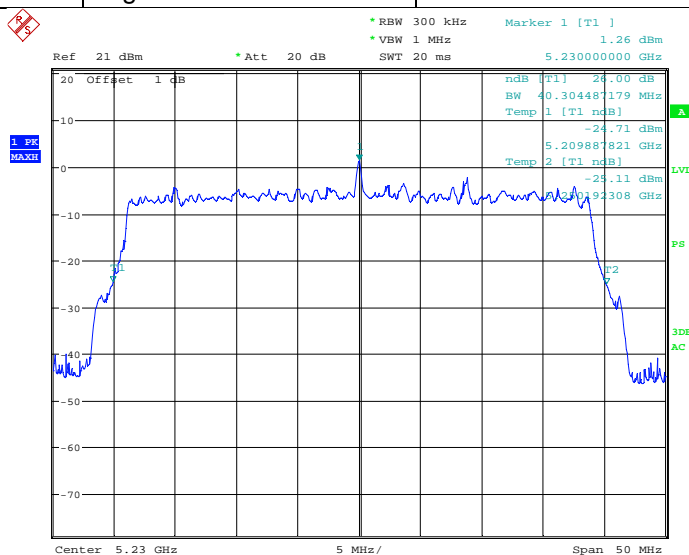

Date: 25.FEB.2011 17:34:32

## 5.4 Power Spectral Density

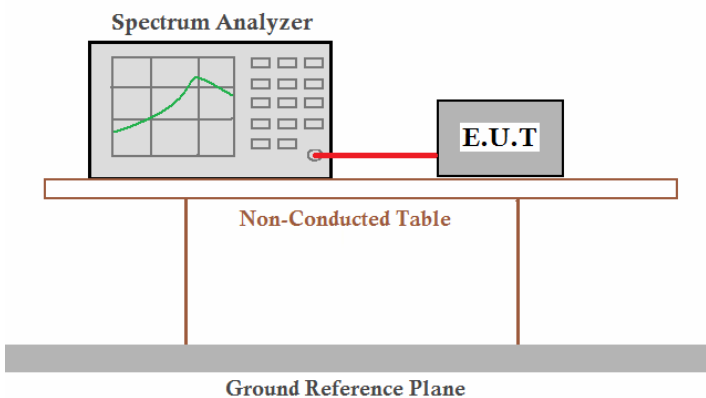
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	ANSI C63.4:2003
Limit:	4dBm
Test setup:	
Test procedure:	As an alternative to Publication: 662911, Measure and sum the PSDs across the outputs. With this technique, PSD is measured at each output of the device. The individual PSDs are then summed mathematically in linear power units
Test Instruments:	Refer to section 4.7 for details
Test mode:	Refer to section 4.3 for details
Test results:	Pass

### Measurement Data

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)	Result
Low	5190	3.86	4.00	Pass
High	5230	3.83	4.00	Pass


Test plot as follows:

Low channel:

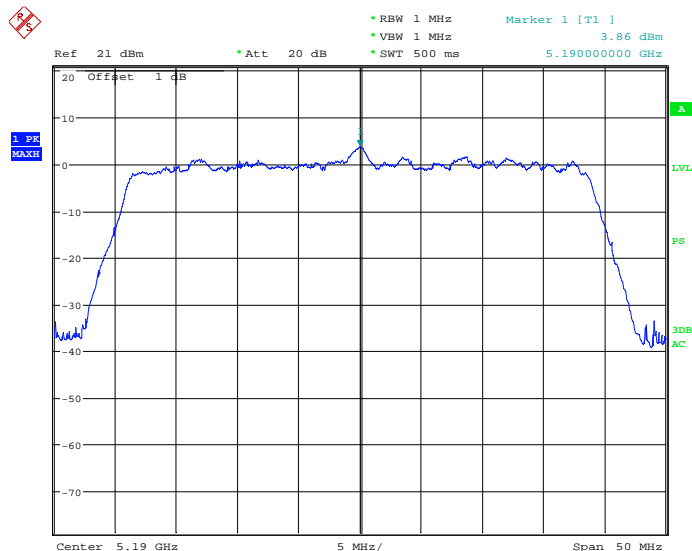


Date: 25.FEB.2011 17:22:41

High channel

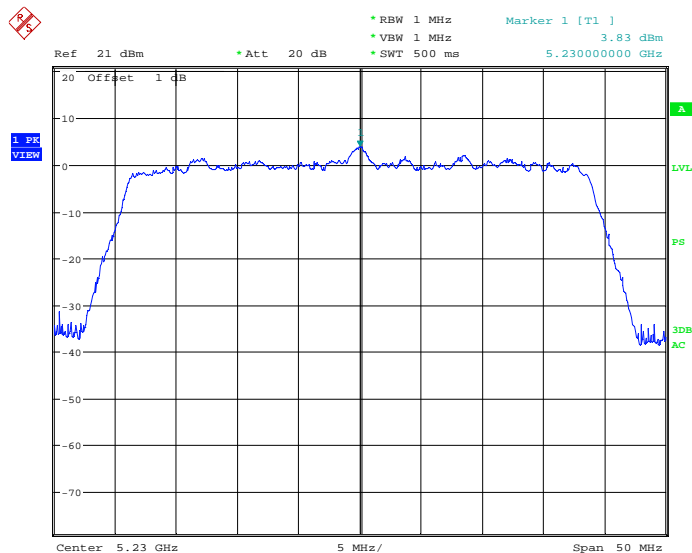

Date: 26.FEB.2011 08:37:49

## 5.5 Peak Excursion

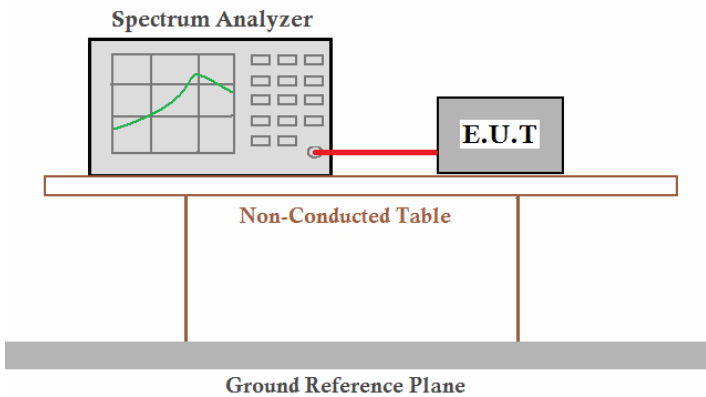
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	ANSI C63.4:2003
Limit:	The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.
Test setup:	 <p>The diagram shows a Spectrum Analyzer and an E.U.T. connected by a red cable. They are both sitting on a table labeled 'Non-Conducted Table'. Below the table is a thick grey bar labeled 'Ground Reference Plane'.</p>
Test procedure:	The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Aug 2002 DA 02-2138 for compliance to FCC 47CFR Subpart E requirements.
Test Instruments:	Refer to section 4.7 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

### Measurement Data

Channel	Frequency (MHz)	Measurement Level (dB)	Limit (dBm)	Result
Low	5190	2.24	13.00	Pass
High	5230	3.11	13.00	Pass


Test plot as follows:

Low channel:

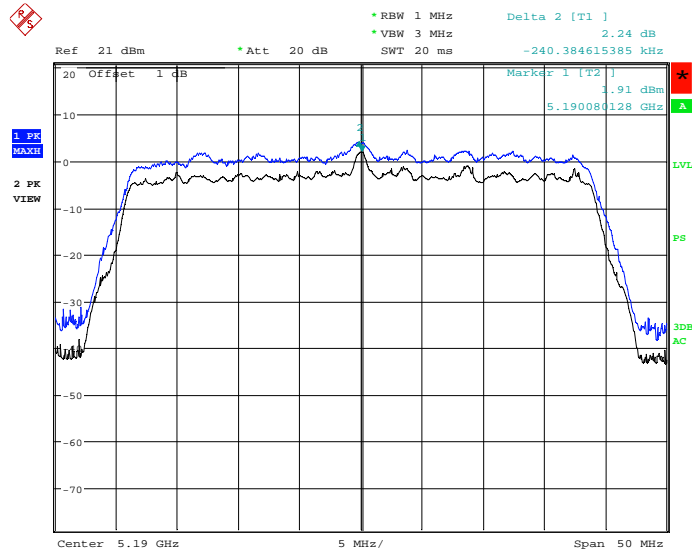


Date: 25.FEB.2011 17:32:23

High channel:

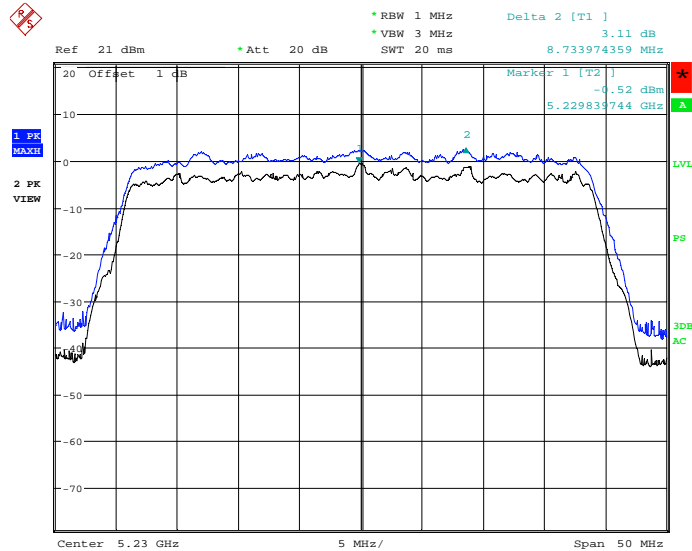


Date: 25.FEB.2011 17:44:41

## 5.6 Undesirable Emission

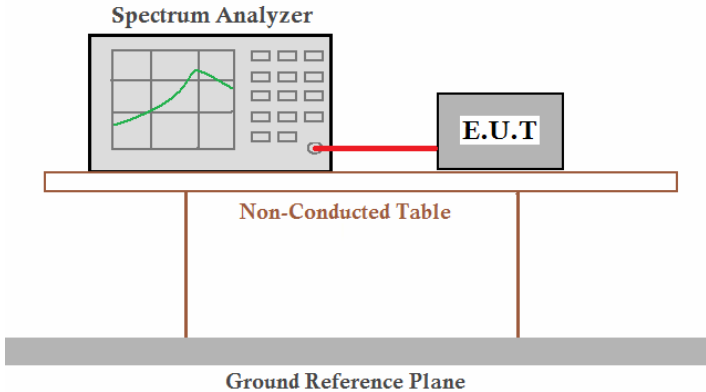
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	ANSI C63.4:2003
Limit:	The 20 dB bandwidth of the emission, not exceed in operation frequency range.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test procedure:	<p>The EUT was setup according to ANSI C63.4, 2003 and tested according to FCC Public Notice DA 02-2138 test procedure for compliance to FCC 47CFR 15. 407 requirements.</p> <p>The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level.</p> <p>This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.</p>
Test Instruments:	Refer to section 4.7 for details
Test mode:	Refer to section 4.3 for details
Test results:	Pass

Operation channel	Reference Frequency (MHz)	Measurement level (dB)	Limit (dB)	Result
Low	5150	-49.51	-20	Pass

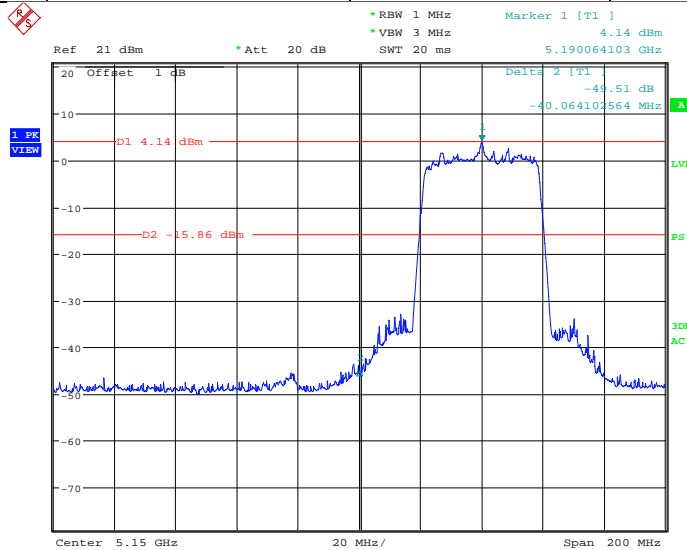

Date: 25.FEB.2011 17:29:47


Operation channel	Reference Frequency (MHz)	Measurement level (dB)	Limit (dB)	Result
High	5350	-52.69	-20	Pass

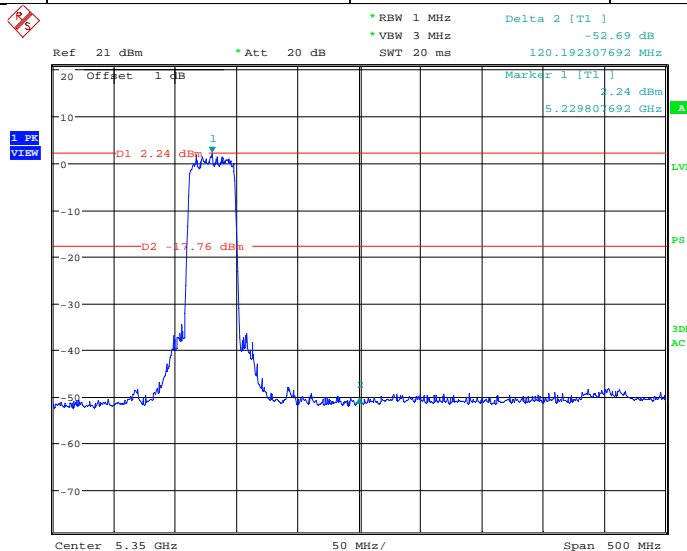

Date: 25.FEB.2011 17:37:06

## 5.7 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205				
Test Method:	ANSI C63.4: 2003				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:					
	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:					
	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
74.0			Peak Value		
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>				
Test setup:	Above 1GHz				

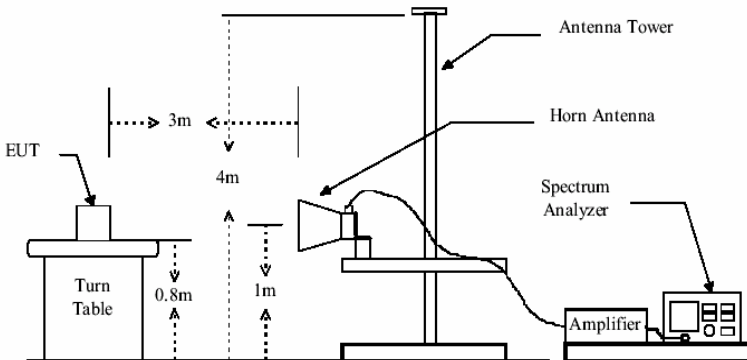			
		Test Instruments:	Refer to section 4.7 for details
		Test mode:	Refer to section 4.3 for details
		Test results:	Passed

Test channel:		Low			Remark:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5100.00	41.34	32.54	5.26	30.75	48.39	74.00	-25.61	Vertical
5150.00	42.25	32.58	5.28	30.82	49.29	74.00	-24.71	Vertical
5250.00	36.34	32.86	5.31	31.05	43.46	74.00	-30.54	Vertical
5350.00	35.26	32.91	5.32	31.12	42.37	74.00	-31.63	Vertical
5100.00	44.08	32.54	5.26	30.75	51.13	74.00	-22.87	Horizontal
5150.00	45.53	32.58	5.28	30.82	52.57	74.00	-21.43	Horizontal
5250.00	40.16	32.86	5.31	31.05	47.28	74.00	-26.72	Horizontal
5350.00	39.62	32.91	5.32	31.12	46.73	74.00	-27.27	Horizontal

Test channel:		Low			Remark:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5100.00	30.56	32.54	5.26	30.75	37.61	54.00	-16.39	Vertical
5150.00	32.74	32.58	5.28	30.82	39.78	54.00	-14.22	Vertical
5250.00	27.11	32.86	5.31	31.05	34.23	54.00	-19.77	Vertical
5350.00	24.60	32.91	5.32	31.12	31.71	54.00	-22.29	Vertical
5100.00	33.30	32.54	5.26	30.75	40.35	54.00	-13.65	Horizontal
5150.00	36.02	32.58	5.28	30.82	43.06	54.00	-10.94	Horizontal
5250.00	30.93	32.86	5.31	31.05	38.05	54.00	-15.95	Horizontal
5350.00	28.96	32.91	5.32	31.12	36.07	54.00	-17.93	Horizontal


Test channel:		High			Remark:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5100.00	39.26	32.54	5.26	30.75	46.31	74.00	-27.69	Vertical
5150.00	40.21	32.58	5.28	30.82	47.25	74.00	-26.75	Vertical
5250.00	49.81	32.86	5.31	31.05	56.93	74.00	-17.07	Vertical
5350.00	39.97	32.91	5.32	31.12	47.08	74.00	-26.92	Vertical
5100.00	40.84	32.54	5.26	30.75	47.89	74.00	-26.11	Horizontal
5150.00	41.97	32.58	5.28	30.82	49.01	74.00	-24.99	Horizontal
5250.00	51.75	32.86	5.31	31.05	58.87	74.00	-15.13	Horizontal
5350.00	42.09	32.91	5.32	31.12	49.20	74.00	-24.80	Horizontal

Test channel:		High			Remark:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5100.00	30.53	32.54	5.26	30.75	37.58	54.00	-16.42	Vertical
5150.00	30.40	32.58	5.28	30.82	37.44	54.00	-16.56	Vertical
5250.00	37.92	32.86	5.31	31.05	45.04	54.00	-8.96	Vertical
5350.00	32.76	32.91	5.32	31.12	39.87	54.00	-14.13	Vertical
5100.00	32.11	32.54	5.26	30.75	39.16	54.00	-14.84	Horizontal
5150.00	32.16	32.58	5.28	30.82	39.20	54.00	-14.80	Horizontal
5250.00	39.86	32.86	5.31	31.05	46.98	54.00	-7.02	Horizontal
5350.00	34.88	32.91	5.32	31.12	41.99	54.00	-12.01	Horizontal

## 5.8 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:					
	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:					
	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
Frequency		Limit (dBm/MHz)		Remark	
Above 1GHz		-27.0		Peak Value	
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT.				
	The following test procedure as below:  1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				

	<p>2&gt;.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>1. On the test site as test setup graph above,the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider.</li> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</li> <li>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</li> <li>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:  <math display="block">EIRP(dBm) = P_g(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBi)}</math>           where:  <math>P_g</math> is the generator output power into the substitution antenna.         </li> </ol>
Test setup:	Below 1GHz

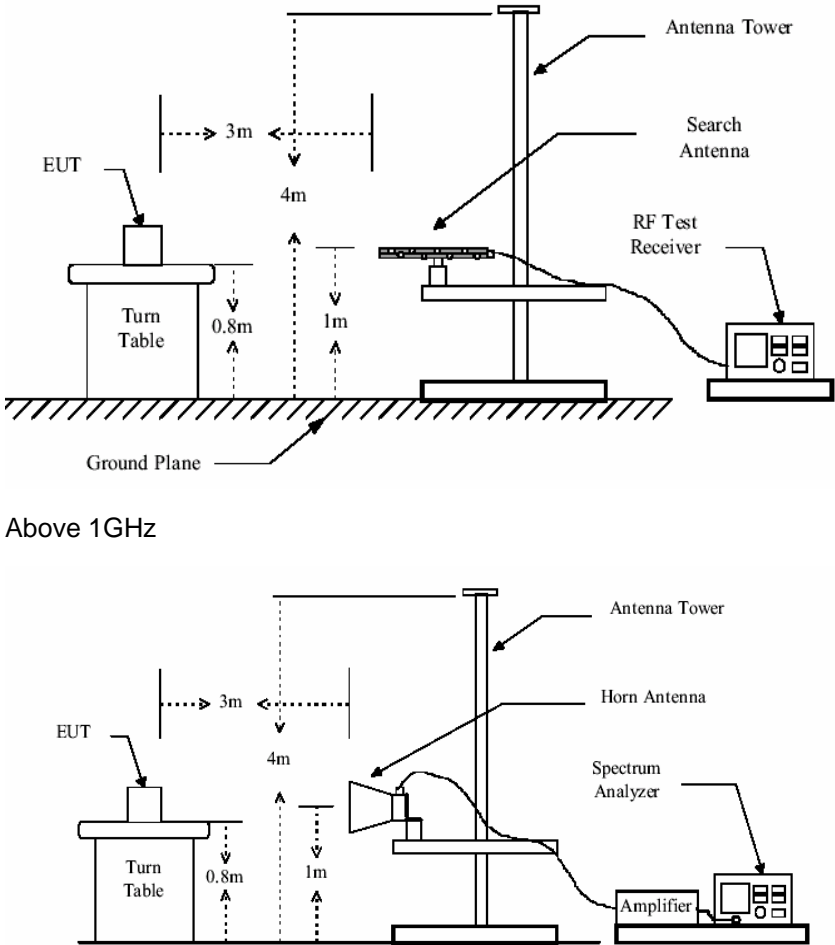	 <p>Above 1GHz</p>
Test Instruments:	Refer to section 4.7 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed


Test channel:		Low		Remark:		Peak	
Frequency (MHz)	Read Level (dBm)	Factor (dB)	Level (dBm)	Limit Line (dBm/MHz)	Over Limit (dB)	polarization	
10380	-74.10	30.24	-43.86	-27.00	-16.86	Vertical	
15570	-73.43	34.58	-38.85	-27.00	-11.85	Vertical	
20760	*	*	*	-27.00	*	Vertical	
25950	*	*	*	-27.00	*	Vertical	
31140	*	*	*	-27.00	*	Vertical	
36330	*	*	*	-27.00	*	Vertical	
10380	-71.87	30.24	-41.63	-27.00	-14.63	Horizontal	
15570	-70.24	34.58	-35.66	-27.00	-8.66	Horizontal	
20760	*	*	*	-27.00	*	Horizontal	
25950	*	*	*	-27.00	*	Horizontal	
31140	*	*	*	-27.00	*	Horizontal	
36330	*	*	*	-27.00	*	Horizontal	

Test channel:		High		Remark:		Peak	
Frequency (MHz)	Read Level (dBm)	Factor (dB)	Level (dBm)	Limit Line (dBm/MHz)	Over Limit (dB)	polarization	
10460	-75.76	30.58	-42.09	-27.00	-15.09	Vertical	
15690	-76.88	34.86	-38.34	-27.00	-11.34	Vertical	
20920	*	*	*	-27.00	*	Vertical	
26150	*	*	*	-27.00	*	Vertical	
31380	*	*	*	-27.00	*	Vertical	
36610	*	*	*	-27.00	*	Vertical	
10460	-71.80	30.58	-40.84	-27.00	-13.84	Horizontal	
15690	-74.95	34.86	-39.60	-27.00	-12.60	Horizontal	
20920	*	*	*	-27.00	*	Horizontal	
26150	*	*	*	-27.00	*	Horizontal	
31380	*	*	*	-27.00	*	Horizontal	
36610	*	*	*	-27.00	*	Horizontal	

**Remark:**

1. " \* ", means this data is the too weak instrument of signal is unable to test.
2. Level = Reading Level + Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 5.9 Frequency stability

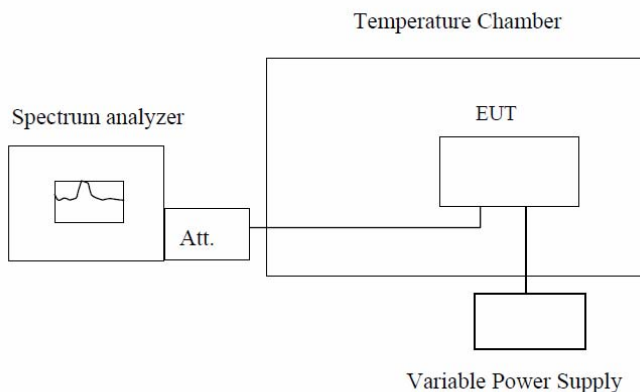Test Requirement:	FCC Part15 C Section 15.407
Test Method:	ANSI C63.4: 2003
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Aug 2002 DA 02-2138 for compliance to FCC 47CFR Subpart E requirements.
Test setup:	 <p><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 4.7 for details
Test mode:	Refer to section 4.3 for details
Test results:	Passed

**Measurement data:**

Frequency stability versus Temp.									
Operating Frequency: 5190MHz									
Temp. (°C)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)
55	120	5190.0023	0.0023	5190.0022	0.0022	5190.0021	0.0021	5190.0024	0.0024
50	120	5190.0020	0.0020	5190.0022	0.0022	5190.0022	0.0022	5190.0023	0.0023
40	120	5190.0018	0.0018	5190.0018	0.0018	5190.0014	0.0014	5190.0016	0.0016
30	120	5190.0013	0.0013	5190.0016	0.0016	5190.0010	0.0010	5190.0012	0.0012
20	120	5190.0012	0.0012	5190.0015	0.0015	5190.0009	0.0009	5190.0012	0.0012
10	120	5190.0011	0.0011	5190.0014	0.0014	5190.0009	0.0009	5190.0012	0.0012
0	120	5190.0014	0.0014	5190.0015	0.0015	5190.0017	0.0017	5190.0015	0.0015
-10	120	5190.0010	0.0010	5190.0011	0.0011	5190.0009	0.0009	5190.0010	0.0010
-20	120	5190.0004	0.0004	5190.0007	0.0007	5190.0003	0.0003	5190.0004	0.0004

Frequency stability versus voltage									
Operating Frequency: 5190MHz									
Temp. (°C)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)
20	102	5190.0008	0.0008	5190.0009	0.0009	5190.0010	0.0010	5190.0011	0.0011
	120	5190.0012	0.0012	5190.0015	0.0015	5190.0009	0.0009	5190.0012	0.0012
	138	5190.0016	0.0016	5190.0020	0.0020	5190.0014	0.0014	5190.0020	0.0020

Frequency stability versus Temp.									
Operating Frequency: 5230MHz									
Temp. (°C)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)
55	120	5230.0022	0.0022	5230.0021	0.0021	5230.0022	0.0022	5230.0017	0.0017
50	120	5230.0019	0.0019	5230.0022	0.0022	5230.0021	0.0021	5230.0015	0.0015
40	120	5230.0019	0.0019	5230.0020	0.0020	5230.0020	0.0020	5230.0015	0.0015
30	120	5230.0017	0.0017	5230.0020	0.0020	5230.0020	0.0020	5230.0013	0.0013
20	120	5230.0016	0.0016	5230.0019	0.0019	5230.0018	0.0018	5230.0014	0.0014
10	120	5230.0016	0.0016	5230.0019	0.0019	5230.0018	0.0018	5230.0012	0.0012
0	120	5230.0014	0.0014	5230.0017	0.0017	5230.0018	0.0018	5230.0012	0.0012
-10	120	5230.0013	0.0013	5230.0017	0.0017	5230.0017	0.0017	5230.0012	0.0012
-20	120	5230.0013	0.0013	5230.0015	0.0015	5230.0018	0.0018	5230.0012	0.0012

Frequency stability versus voltage									
Operating Frequency: 5230MHz									
Temp. (°C)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)	Measured Frequency (MHz)	Frequency drift (MHz)
20	102	5230.0011	0.0011	5230.0016	0.0016	5230.0012	0.0012	5230.0015	0.0015
	120	5230.0016	0.0016	5230.0019	0.0019	5230.0018	0.0018	5230.0014	0.0014
	138	5230.0017	0.0017	5230.0020	0.0020	5230.0017	0.0017	5230.0020	0.0020