

NR n78L- EIRP
Limits: ≤30dBm (1W)

Mod.	Bandwidth	Frequency (MHz)	PMea (dBm)	Pcl (dB)	PAg (dB)	Ga (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Ant.Pol
pi/2 BPSK	10MHz	3455.01	-18.06	9.58	43.61	8.23	24.20	30.00	5.80	H
		3500.01	-19.49	9.70	44.48	8.27	23.57	30.00	6.43	H
		3544.98	-18.72	10.0	43.48	8.27	22.99	30.00	7.01	H
	15MHz	3457.50	-17.19	9.58	43.67	8.23	25.13	30.00	4.87	H
		3500.01	-18.85	9.70	44.48	8.27	24.21	30.00	5.79	H
		3542.49	-18.62	10.0	43.66	8.27	23.28	30.00	6.72	H
	20MHz	3460.02	-17.71	9.58	43.62	8.23	24.55	30.00	5.45	H
		3500.01	-19.46	9.70	44.48	8.27	23.60	30.00	6.40	H
		3540.00	-18.45	10.0	43.49	8.27	23.28	30.00	6.72	H
	25MHz	3462.51	-17.44	9.58	43.65	8.23	24.86	30.00	5.14	H
		3500.01	-19.59	9.70	44.48	8.27	23.47	30.00	6.53	H
		3537.48	-18.20	10.0	43.47	8.27	23.51	30.00	6.49	H
	30MHz	3465.00	-18.06	9.58	43.60	8.23	24.18	30.00	5.82	H
		3500.01	-18.94	9.70	44.48	8.27	24.12	30.00	5.88	H
		3534.99	-17.17	10.0	43.38	8.27	24.45	30.00	5.55	H
	40MHz	3470.01	-19.16	9.58	43.88	8.23	23.36	30.00	6.64	H
		3500.01	-18.93	9.70	44.48	8.27	24.13	30.00	5.87	H
		3529.98	-17.30	10.0	43.72	8.27	24.65	30.00	5.35	H
	50MHz	3475.02	-18.47	9.58	43.73	8.23	23.91	30.00	6.09	H
		3500.01	-19.09	9.70	44.48	8.27	23.97	30.00	6.03	H
		3525.00	-17.68	10.0	43.97	8.27	24.53	30.00	5.47	H
	60MHz	3480.00	-18.40	9.58	44.04	8.23	24.29	30.00	5.71	H
		3500.01	-19.04	9.70	44.48	8.27	24.02	30.00	5.98	H
		3519.99	-18.51	9.69	44.17	8.27	24.24	30.00	5.76	H
	70MHz	3485.01	-18.69	9.58	43.93	8.23	23.89	30.00	6.11	H
		3500.01	-19.24	9.70	44.48	8.27	23.82	30.00	6.18	H
		3514.98	-17.97	9.69	43.97	8.27	24.57	30.00	5.43	H
	80MHz	3490.02	-18.38	9.70	44.11	8.23	24.26	30.00	5.74	H
		3500.01	-19.35	9.70	44.48	8.27	23.71	30.00	6.29	H
		3510.00	-17.57	9.69	44.20	8.27	25.20	30.00	4.80	H
	90MHz	3495.00	-19.65	9.70	44.13	8.23	23.02	30.00	6.98	H
		3500.01	-19.96	9.70	44.48	8.27	23.10	30.00	6.90	H
		3504.99	-19.91	9.69	44.39	8.27	23.06	30.00	6.94	H
	100MHz	3500.01	-18.99	9.70	44.48	8.27	24.07	30.00	5.93	H
		3499.98	-18.96	9.70	44.70	8.23	24.27	30.00	5.73	H
QPSK	10MHz	3455.01	-18.03	9.58	43.61	8.23	24.23	30.00	5.77	H
		3500.01	-19.39	9.70	44.48	8.27	23.67	30.00	6.33	H
		3544.98	-18.96	10.0	43.48	8.27	22.75	30.00	7.25	H
	15MHz	3457.50	-17.72	9.58	43.67	8.23	24.60	30.00	5.40	H
		3500.01	-19.24	9.70	44.48	8.27	23.82	30.00	6.18	H
		3542.49	-18.70	10.0	43.66	8.27	23.20	30.00	6.80	H
	20MHz	3460.02	-17.75	9.58	43.62	8.23	24.51	30.00	5.49	H
		3500.01	-18.85	9.70	44.48	8.27	24.21	30.00	5.79	H
		3540.00	-18.91	10.0	43.49	8.27	22.82	30.00	7.18	H

	25MHz	3462.51	-18.00	9.58	43.65	8.23	24.30	30.00	5.70	H
		3500.01	-19.41	9.70	44.48	8.27	23.65	30.00	6.35	H
		3537.48	-18.30	10.0	43.47	8.27	23.41	30.00	6.59	H
	30MHz	3465.00	-18.00	9.58	43.60	8.23	24.24	30.00	5.76	H
		3500.01	-19.36	9.70	44.48	8.27	23.70	30.00	6.30	H
		3534.99	-17.04	10.0	43.38	8.27	24.58	30.00	5.42	H
	40MHz	3470.01	-18.22	9.58	43.88	8.23	24.30	30.00	5.70	H
		3500.01	-17.27	9.70	44.48	8.27	25.79	30.00	4.21	H
		3529.98	-17.58	10.0	43.72	8.27	24.37	30.00	5.63	H
	50MHz	3475.02	-17.93	9.58	43.73	8.23	24.45	30.00	5.55	H
		3500.01	-19.26	9.70	44.48	8.27	23.80	30.00	6.20	H
		3525.00	-17.51	10.0	43.97	8.27	24.70	30.00	5.30	H
	60MHz	3480.00	-18.80	9.58	44.04	8.23	23.89	30.00	6.11	H
		3500.01	-19.49	9.70	44.48	8.27	23.57	30.00	6.43	H
		3519.99	-18.41	9.69	44.17	8.27	24.34	30.00	5.66	H
	70MHz	3485.01	-18.85	9.58	43.93	8.23	23.73	30.00	6.27	H
		3500.01	-19.14	9.70	44.48	8.27	23.92	30.00	6.08	H
		3514.98	-17.86	9.69	43.97	8.27	24.68	30.00	5.32	H
	80MHz	3490.02	-18.06	9.70	44.11	8.23	24.58	30.00	5.42	H
		3500.01	-19.15	9.70	44.48	8.27	23.91	30.00	6.09	H
		3510.00	-18.26	9.69	44.20	8.27	24.51	30.00	5.49	H
	90MHz	3495.00	-19.99	9.70	44.13	8.23	22.68	30.00	7.32	H
		3500.01	-19.74	9.70	44.48	8.27	23.32	30.00	6.68	H
		3504.99	-19.21	9.69	44.39	8.27	23.76	30.00	6.24	H
	100MHz	3500.01	-19.17	9.70	44.48	8.27	23.89	30.00	6.11	H
		3499.98	-19.12	9.70	44.70	8.23	24.11	30.00	5.89	H
16QAM	10MHz	3455.01	-19.01	9.58	43.61	8.23	23.25	30.00	6.75	H
		3500.01	-20.21	9.70	44.48	8.27	22.85	30.00	7.15	H
		3544.98	-19.72	10.0	43.48	8.27	21.99	30.00	8.01	H
	15MHz	3457.50	-18.84	9.58	43.67	8.23	23.48	30.00	6.52	H
		3500.01	-20.19	9.70	44.48	8.27	22.87	30.00	7.13	H
		3542.49	-19.75	10.0	43.66	8.27	22.15	30.00	7.85	H
	20MHz	3460.02	-18.74	9.58	43.62	8.23	23.52	30.00	6.48	H
		3500.01	-20.30	9.70	44.48	8.27	22.76	30.00	7.24	H
		3540.00	-19.19	10.0	43.49	8.27	22.54	30.00	7.46	H
	25MHz	3462.51	-18.98	9.58	43.65	8.23	23.32	30.00	6.68	H
		3500.01	-20.30	9.70	44.48	8.27	22.76	30.00	7.24	H
		3537.48	-19.46	10.0	43.47	8.27	22.25	30.00	7.75	H
	30MHz	3465.00	-19.12	9.58	43.60	8.23	23.12	30.00	6.88	H
		3500.01	-20.18	9.70	44.48	8.27	22.88	30.00	7.12	H
		3534.99	-18.03	10.0	43.38	8.27	23.59	30.00	6.41	H
	40MHz	3470.01	-20.56	9.58	43.88	8.23	21.96	30.00	8.04	H
		3500.01	-20.50	9.70	44.48	8.27	22.56	30.00	7.44	H
		3529.98	-18.13	10.0	43.72	8.27	23.82	30.00	6.18	H
	50MHz	3475.02	-19.22	9.58	43.73	8.23	23.16	30.00	6.84	H
		3500.01	-19.78	9.70	44.48	8.27	23.28	30.00	6.72	H
		3525.00	-18.67	10.0	43.97	8.27	23.54	30.00	6.46	H
	60MHz	3480.00	-19.52	9.58	44.04	8.23	23.17	30.00	6.83	H
		3500.01	-20.04	9.70	44.48	8.27	23.02	30.00	6.98	H

	70MHz	3519.99	-19.54	9.69	44.17	8.27	23.21	30.00	6.79	H
		3485.01	-19.29	9.58	43.93	8.23	23.29	30.00	6.71	H
		3500.01	-19.90	9.70	44.48	8.27	23.16	30.00	6.84	H
		3514.98	-19.58	9.69	43.97	8.27	22.96	30.00	7.04	H
	80MHz	3490.02	-18.99	9.70	44.11	8.23	23.65	30.00	6.35	H
		3500.01	-19.89	9.70	44.48	8.27	23.17	30.00	6.83	H
		3510.00	-19.84	9.69	44.20	8.27	22.93	30.00	7.07	H
	90MHz	3495.00	-20.34	9.70	44.13	8.23	22.33	30.00	7.67	H
		3500.01	-20.67	9.70	44.48	8.27	22.39	30.00	7.61	H
		3504.99	-20.20	9.69	44.39	8.27	22.77	30.00	7.23	H
	100MHz	3500.01	-19.61	9.70	44.48	8.27	23.45	30.00	6.55	H
		3499.98	-20.37	9.70	44.70	8.23	22.86	30.00	7.14	H
64QAM	10MHz	3455.01	-20.32	9.58	43.61	8.23	21.94	30.00	8.06	H
	15MHz	3457.50	-20.22	9.58	43.67	8.23	22.10	30.00	7.90	H
	20MHz	3460.02	-19.88	9.58	43.62	8.23	22.38	30.00	7.62	H
	25MHz	3462.51	-20.40	9.58	43.65	8.23	21.90	30.00	8.10	H
	30MHz	3465.00	-20.40	9.58	43.60	8.23	21.84	30.00	8.16	H
	40MHz	3470.01	-22.46	9.58	43.88	8.23	20.06	30.00	9.94	H
	50MHz	3475.02	-20.98	9.58	43.73	8.23	21.40	30.00	8.60	H
	60MHz	3480.00	-20.92	9.58	44.04	8.23	21.77	30.00	8.23	H
	70MHz	3485.01	-20.78	9.58	43.93	8.23	21.80	30.00	8.20	H
	80MHz	3490.02	-20.68	9.70	44.11	8.23	21.96	30.00	8.04	H
	90MHz	3495.00	-22.29	9.70	44.13	8.23	20.38	30.00	9.62	H
	100MHz	3500.01	-21.38	9.70	44.48	8.27	21.68	30.00	8.32	H
256QAM	10MHz	3455.01	-21.91	9.58	43.61	8.23	20.35	30.00	9.65	H
	15MHz	3457.50	-22.39	9.58	43.67	8.23	19.93	30.00	10.07	H
	20MHz	3460.02	-21.47	9.58	43.62	8.23	20.79	30.00	9.21	H
	25MHz	3462.51	-21.44	9.58	43.65	8.23	20.86	30.00	9.14	V
	30MHz	3465.00	-22.36	9.58	43.60	8.23	19.88	30.00	10.12	H
	40MHz	3470.01	-23.82	9.58	43.88	8.23	18.70	30.00	11.30	V
	50MHz	3475.02	-22.71	9.58	43.73	8.23	19.67	30.00	10.33	H
	60MHz	3480.00	-22.14	9.58	44.04	8.23	20.55	30.00	9.45	H
	70MHz	3485.01	-22.59	9.58	43.93	8.23	19.99	30.00	10.01	H
	80MHz	3490.02	-22.93	9.70	44.11	8.23	19.71	30.00	10.29	H
	90MHz	3495.00	-23.71	9.70	44.13	8.23	18.96	30.00	11.04	H
	100MHz	3500.01	-23.52	9.70	44.48	8.27	19.54	30.00	10.46	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 3.37 \text{ dB}$, $k = 2$.

A.2 Emission Limit


A.2.1 Measurement Method

The measurement procedures in TIA-603E-2016 are used.


The spectrum was scanned from 9 kHz to the lower of the 10th harmonic of the highest fundamental frequency and 40GHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of each NR Band.

The procedure of radiated spurious emissions is as follows:

For measurements performed at frequencies less than or equal to 1 GHz, the EUT was placed on a 80cm-high non-conductive support; For measurements performed at frequencies above 1GHz,EUT was placed on a 1.5-meter-high non-conductive support. A measurement antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. In the initial test, the height of the measurement antenna was varied from 1 m to 4 m for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

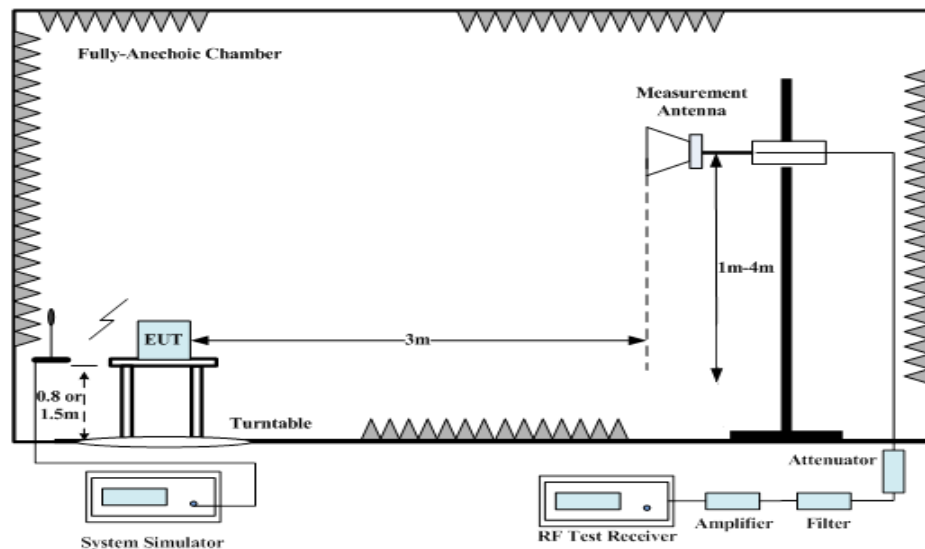

1. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
2. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

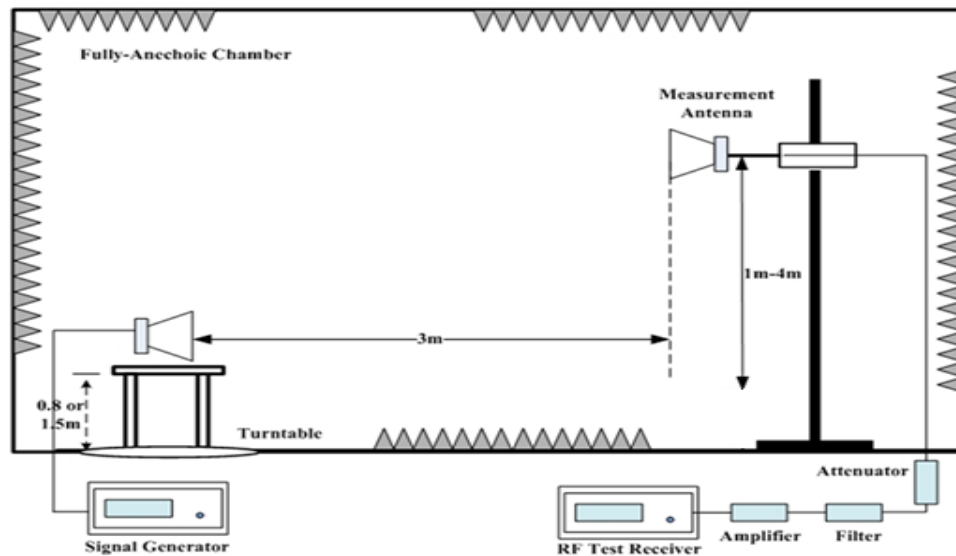

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. The height of measurement antenna varied between 1 m to 4 m to maximize the received signal amplitude for each emission that was detected and measured in the initial test. A power (P_{Mea}) is applied to the input of the substitution antenna and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test was performed with the measurement antenna in both vertical and horizontal polarization.

3. The Path loss (P_{pl}) between the Signal Source and the Substitution Antenna and the Substitution Antenna Gain (G_a) were recorded after test. A amplifier was connected in for the test. The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.
4. The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

NR n5: 22.917 specifies that Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

NR n26 (814MHz~824MHz): Part 90.691 states that out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116\text{Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee’s frequency block

greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

NR n7/n41: 27.53(m) (4) specifies " For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. ".

NR n66: 27.53(h) specifies "AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB"

NR n78: Part 27.53(n) states for mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of each NR Band. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of each NR Band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

For NR operation, all subcarrier spacing (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration.

Spurious emissions shown in this section measured while operating in EN-DC mode with sub 6GHz NR carrier as well as an LTE (anchor). Spurious emission from the NR carrier device is subject to the rules under which the NR carrier operates. Spurious emissions caused by the LTE carrier must meet the requirement of the rules under which the LTE carrier operates.

The range of evaluated frequency is from 9 kHz to 10th harmonic of the fundamental frequency of the transmitter. Measurement value showed only up to 6 maximum emissions noted.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
NR Bands	Low	9kHz-40GHz	Pass
	Middle	9kHz-40GHz	Pass
	High	9kHz-40GHz	Pass

A.2.5 Sweep Table

Subrange	RBW	VBW
9~150 kHz	0.2kHz	0.6kHz
150kHz~30MHz	9kHz	27kHz
30MHz~1 GHz	100KHz	300KHz
1~40 GHz	1 MHz	3 MHz

A.2.6 Measurement Result

NR n5, 5MHz, PI/2 BPSK, Channel 165300

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1660.50	-58.09	2.97	9.48	2.15	-53.73	-13.00	40.73	V
2479.50	-40.30	4.34	10.34	2.15	-36.45	-13.00	23.45	V
5789.50	-56.16	5.70	11.06	2.15	-52.95	-13.00	39.95	V
6609.00	-51.26	7.01	10.32	2.15	-50.10	-13.00	37.10	V
7433.50	-49.01	7.90	10.10	2.15	-48.96	-13.00	35.96	H
8251.00	-51.13	7.59	11.20	2.15	-49.67	-13.00	36.67	V

NR n5, 5MHz, PI/2 BPSK, Channel 167300

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
2509.50	-39.64	4.42	10.30	2.15	-35.91	-13.00	22.91	V
4188.50	-57.59	4.10	10.08	2.15	-53.76	-13.00	40.76	H
5844.50	-56.01	5.59	11.00	2.15	-52.75	-13.00	39.75	V
6691.50	-52.90	6.20	10.48	2.15	-50.77	-13.00	37.77	H
7529.00	-49.58	7.71	10.26	2.15	-49.18	-13.00	36.18	V
8369.50	-50.40	8.19	11.30	2.15	-49.44	-13.00	36.44	V

NR n5, 5MHz, PI/2 BPSK, Channel 169300

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
2539.50	-40.35	4.65	10.30	2.15	-36.85	-13.00	23.85	H
5076.50	-57.91	5.30	11.60	2.15	-53.76	-13.00	40.76	V
5933.00	-55.15	6.03	10.73	2.15	-52.60	-13.00	39.60	H
6776.00	-52.37	6.40	10.35	2.15	-50.57	-13.00	37.57	H
7625.50	-51.12	6.69	10.35	2.15	-49.61	-13.00	36.61	V
8456.50	-50.19	8.02	11.30	2.15	-49.06	-13.00	36.06	V

NR EN-DC B2-n5, 5MHz, PI/2 BPSK, Channel 165300

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3697.50	-63.72	3.45	10.40	0.00	-56.77	-13.00	43.77	V
5566.50	-60.20	5.39	11.23	0.00	-54.36	-13.00	41.36	V
7410.50	-51.86	8.04	10.10	0.00	-49.80	-13.00	36.80	V
1653.50	-47.10	2.56	9.49	2.15	-42.32	-13.00	29.32	V
2488.50	-39.46	4.48	10.32	2.15	-35.77	-13.00	22.77	H
5796.50	-57.35	5.70	11.02	2.15	-54.18	-13.00	41.18	V

NR EN-DC B2-n5, 5MHz, PI/2 BPSK, Channel 167300

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765.50	-63.77	3.78	10.14	0.00	-57.41	-13.00	44.41	V
5640.50	-60.18	5.61	11.38	0.00	-54.41	-13.00	41.41	V
7517.00	-52.89	7.71	10.23	0.00	-50.37	-13.00	37.37	V
1660.00	-46.21	2.97	9.48	2.15	-41.85	-13.00	28.85	V
2507.00	-39.32	4.43	10.30	2.15	-35.60	-13.00	22.60	H
5841.50	-57.85	5.58	11.00	2.15	-54.58	-13.00	41.58	H

NR EN-DC B2-n5, 5MHz, PI/2 BPSK, Channel 169300

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3809.50	-62.97	3.95	9.98	0.00	-56.94	-13.00	43.94	V
5733.00	-59.64	5.88	11.33	0.00	-54.19	-13.00	41.19	V
7632.50	-53.81	6.73	10.36	0.00	-50.18	-13.00	37.18	H
1706.50	-46.15	2.84	9.43	2.15	-41.71	-13.00	28.71	H
2553.00	-38.61	4.56	10.30	2.15	-35.02	-13.00	22.02	H
5917.00	-55.62	6.13	10.77	2.15	-53.13	-13.00	40.13	V

NR n7, 5MHz, PI/2 BPSK, Channel 500500

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5005.00	-48.45	5.15	0.00	-53.60	-25.00	28.60	V
7507.50	-23.31	7.70	0.00	-31.01	-25.00	6.01	H
10024.50	-38.27	9.34	0.00	-47.61	-25.00	22.61	H
12512.50	-33.66	12.37	0.00	-46.03	-25.00	21.03	H
15003.00	-32.51	14.75	0.00	-47.26	-25.00	22.26	H
17513.50	-22.62	19.71	0.00	-42.33	-25.00	17.33	H

NR n7, 5MHz, PI/2 BPSK, Channel 507000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5070.00	-45.56	5.30	0.00	-50.86	-25.00	25.86	V
7605.00	-26.47	7.58	0.00	-34.05	-25.00	9.05	V
10130.50	-40.39	8.94	0.00	-49.33	-25.00	24.33	V
12675.50	-36.00	11.69	0.00	-47.69	-25.00	22.69	H
15215.50	-30.82	15.69	0.00	-46.51	-25.00	21.51	H
17735.50	-22.82	19.56	0.00	-42.38	-25.00	17.38	H

NR n7, 5MHz, PI/2 BPSK, Channel 513500

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5135.00	-46.78	5.55	0.00	-52.33	-25.00	27.33	V
7702.50	-25.20	6.72	0.00	-31.92	-25.00	6.92	V
10284.00	-36.80	10.65	0.00	-47.45	-25.00	22.45	H
12837.00	-32.32	13.05	0.00	-45.37	-25.00	20.37	H
15393.00	-32.32	14.87	0.00	-47.19	-25.00	22.19	H
17981.00	-22.15	19.98	0.00	-42.13	-25.00	17.13	V

NR EN-DC B5-n7, 5MHz, PI/2 BPSK, Channel 500500

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1649.00	-46.40	2.60	9.49	-41.66	-13.00	28.66	H
2479.00	-39.38	4.33	10.34	-35.52	-13.00	22.52	H
5793.00	-57.40	5.70	11.04	-54.21	-13.00	41.21	H
5004.00	-61.57	5.15	11.32	-55.40	-25.00	30.40	H
7494.50	-52.00	7.70	10.19	-49.51	-25.00	24.51	H
10004.00	-50.99	9.36	11.80	-48.55	-25.00	23.55	H

NR EN-DC B5-n7, 5MHz, PI/2 BPSK, Channel 507000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1661.00	-58.89	2.96	9.48	-54.52	-13.00	41.52	H
2495.50	-51.71	4.46	10.31	-48.01	-13.00	35.01	H
5017.00	-69.00	5.11	11.40	-64.86	-13.00	51.86	H
5082.00	-62.15	5.30	11.60	-55.85	-25.00	30.85	H
7592.00	-53.71	7.56	10.30	-50.97	-25.00	25.97	V
10126.50	-52.09	8.92	11.75	-49.26	-25.00	24.26	H

NR EN-DC B5-n7, 5MHz, PI/2 BPSK, Channel 513500

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1705.50	-46.22	2.85	9.42	-41.80	-13.00	28.80	H
2547.00	-38.80	4.60	10.30	-35.25	-13.00	22.25	V
4240.50	-57.10	4.44	10.26	-53.43	-13.00	40.43	H
5138.50	-61.03	5.54	11.60	-54.97	-25.00	29.97	V
7706.50	-54.32	6.73	10.61	-50.44	-25.00	25.44	V
10260.00	-48.62	10.84	11.90	-47.56	-25.00	22.56	V

NR n41, 100MHz, PI/2 BPSK, Channel 509202

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5092.00	-42.49	5.30	0.00	-47.79	-25.00	22.79	V
7638.00	-25.25	6.77	0.00	-32.02	-25.00	7.02	V
10185.50	-39.30	9.57	0.00	-48.87	-25.00	23.87	V
12734.50	-33.60	13.83	0.00	-47.43	-25.00	22.43	V
15299.50	-30.99	15.52	0.00	-46.51	-25.00	21.51	V
17786.00	-23.14	19.55	0.00	-42.69	-25.00	17.69	H

NR n41, 100MHz, PI/2 BPSK, Channel 518598

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5185.50	-46.20	5.75	0.00	-51.95	-25.00	26.95	V
7778.50	-26.79	7.37	0.00	-34.16	-25.00	9.16	V
10400.00	-35.21	10.64	0.00	-45.85	-25.00	20.85	H
12938.00	-35.27	12.46	0.00	-47.73	-25.00	22.73	V
15512.00	-32.13	15.10	0.00	-47.23	-25.00	22.23	V
17993.50	-21.22	19.95	0.00	-41.17	-25.00	16.17	H

NR n41, 100MHz, PI/2 BPSK, Channel 528000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5279.50	-47.81	5.07	0.00	-52.88	-25.00	27.88	V
7920.00	-26.52	8.89	0.00	-35.41	-25.00	10.41	V
10538.00	-37.33	10.41	0.00	-47.74	-25.00	22.74	V
13245.00	-32.66	13.24	0.00	-45.90	-25.00	20.90	V
15859.00	-29.46	16.33	0.00	-45.79	-25.00	20.79	V
17999.00	-21.67	19.94	0.00	-41.61	-25.00	16.61	H

NR EN-DC B66-n41, 20MHz, PI/2 BPSK, Channel 501204

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7518.00	-37.84	7.71	10.24	-35.31	-25.00	10.31	V
17521.00	-35.62	19.70	13.12	-42.20	-25.00	17.20	V
15020.50	-47.70	14.74	14.66	-47.78	-25.00	22.78	H
12506.00	-49.39	12.36	13.58	-48.17	-25.00	23.17	H
5012.00	-54.46	5.12	11.37	-48.21	-25.00	23.21	H
10030.50	-50.83	9.33	11.77	-48.39	-25.00	23.39	H

NR EN-DC B66-n41, 20MHz, PI/2 BPSK, Channel 518598

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7779.00	-44.91	7.37	10.76	-41.52	-25.00	16.52	V
17973.50	-36.10	19.99	13.45	-42.64	-25.00	17.64	H
15565.00	-45.89	16.67	15.60	-46.96	-25.00	21.96	V
10369.50	-48.84	10.73	11.97	-47.60	-25.00	22.60	V
12944.50	-48.86	12.47	12.76	-48.57	-25.00	23.57	V
5204.00	-60.64	5.69	11.70	-54.63	-25.00	29.63	H

NR EN-DC B66-n41, 20MHz, PI/2 BPSK, Channel 535998

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
17977.00	-36.00	19.98	13.45	-42.53	-25.00	17.53	H
13389.50	-45.29	12.43	12.41	-45.31	-25.00	20.31	H
16064.00	-44.88	17.28	15.21	-46.95	-25.00	21.95	V
10732.00	-50.76	9.88	12.13	-48.51	-25.00	23.51	H
8019.50	-52.85	7.66	11.16	-49.35	-25.00	24.35	H
17459.00	-36.02	19.26	13.06	-42.22	-25.00	17.22	V

NR n66, 10MHz, Channel 343000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5145.00	-64.38	5.52	11.60	-58.30	-13.00	45.30	H
10272.00	-59.06	10.74	11.90	-57.90	-13.00	44.90	V
12012.00	-57.69	11.97	13.12	-56.54	-13.00	43.54	V
13716.00	-53.50	13.12	12.18	-54.44	-13.00	41.44	H
15447.00	-57.83	14.98	15.49	-57.32	-13.00	44.32	H
17128.50	-48.86	18.44	13.47	-53.83	-13.00	40.83	V

NR n66, 10MHz, Channel 349000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5235.00	-64.87	4.70	11.70	-57.87	-13.00	44.87	V
10473.50	-59.88	10.36	11.93	-58.31	-13.00	45.31	V
12209.50	-59.61	12.17	13.40	-58.38	-13.00	45.38	V
13956.00	-52.69	14.65	12.16	-55.18	-13.00	42.18	H
15705.50	-55.57	16.64	15.51	-56.70	-13.00	43.70	V
17469.00	-45.50	19.26	13.07	-51.69	-13.00	38.69	H

NR n66, 10MHz, Channel 355000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3550.00	-63.39	2.94	10.30	-56.03	-13.00	43.03	V
5325.00	-49.93	5.08	11.75	-43.26	-13.00	30.26	V
12435.00	-57.78	13.05	13.47	-57.36	-13.00	44.36	V
14176.50	-52.92	14.40	12.53	-54.79	-13.00	41.79	H
15989.50	-55.26	17.56	15.42	-57.40	-13.00	44.40	V
17767.00	-46.70	19.56	13.47	-52.79	-13.00	39.79	H

NR EN-DC B7-n66, 10MHz, Channel 343000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
17759.00	-47.16	19.56	13.46	-53.26	-25.00	28.26	H
15213.50	-56.99	15.70	15.03	-57.66	-25.00	32.66	H
12668.00	-60.03	11.66	13.16	-58.53	-25.00	33.53	V
10131.00	-62.14	8.94	11.76	-59.32	-25.00	34.32	H
7617.00	-64.24	6.63	10.33	-60.54	-25.00	35.54	V
5060.00	-71.53	5.34	11.60	-65.27	-25.00	40.27	H

NR EN-DC B7-n66, 10MHz, Channel 349000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
17741.50	-47.32	19.56	13.44	-53.44	-25.00	28.44	H
15208.00	-57.66	15.11	15.02	-57.75	-25.00	32.75	H
12664.50	-59.94	11.64	13.17	-58.41	-25.00	33.41	H
10151.00	-61.37	9.70	11.80	-59.27	-25.00	34.27	H
7605.50	-63.16	7.58	10.31	-60.43	-25.00	35.43	H
17442.00	-46.16	19.25	13.04	-52.37	-13.00	39.37	V

NR EN-DC B7-n66, 10MHz, Channel 355000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
17732.00	-47.25	19.56	13.43	-53.38	-25.00	28.38	H
15212.50	-57.19	15.70	15.02	-57.87	-25.00	32.87	H
12671.50	-59.76	11.68	13.16	-58.28	-25.00	33.28	V
10132.50	-62.25	8.95	11.76	-59.44	-25.00	34.44	H
7606.50	-63.59	7.58	10.31	-60.86	-25.00	35.86	H
17761.00	-47.09	19.56	13.46	-53.19	-13.00	40.19	V

NR n78L, PI/2 BPSK, Channel 630668

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
6919.50	-47.15	7.73	11.50	-43.38	-13.00	30.38	H
8664.00	-53.67	8.41	13.03	-49.05	-13.00	36.05	V
10380.00	-49.53	9.77	13.05	-46.25	-13.00	33.25	V
12091.00	-49.64	10.32	13.04	-46.92	-13.00	33.92	H
13816.00	-48.95	10.64	14.39	-45.20	-13.00	32.20	H
17324.00	-44.39	12.40	14.51	-42.28	-13.00	29.28	V

NR n78L, PI/2 BPSK, Channel 633334

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
7000.00	-44.97	8.30	11.60	-41.67	-13.00	28.67	V
8750.00	-53.20	8.51	13.05	-48.66	-13.00	35.66	H
10499.50	-48.82	9.65	13.10	-45.37	-13.00	32.37	V
12239.50	-49.62	10.03	13.10	-46.55	-13.00	33.55	V
13970.50	-48.91	10.84	14.48	-45.27	-13.00	32.27	H
17470.50	-44.61	12.66	14.84	-42.43	-13.00	29.43	H

NR n78L, PI/2 BPSK, Channel 636000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
7079.50	-51.23	8.19	11.70	-47.72	-13.00	34.72	H
8874.00	-53.03	8.80	13.07	-48.76	-13.00	35.76	V
10619.50	-48.66	9.28	13.12	-44.82	-13.00	31.82	H
12398.50	-49.90	10.43	13.16	-47.17	-13.00	34.17	V
14144.00	-49.15	10.99	14.47	-45.67	-13.00	32.67	V
17673.00	-45.31	12.43	15.14	-42.60	-13.00	29.60	H

NR EN-DC B4-n78L, PI/2 BPSK, Channel 630668

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
8669.50	-53.45	8.40	13.03	-48.82	-13.00	35.82	H
12103.00	-50.36	10.34	13.04	-47.66	-13.00	34.66	V
15573.00	-49.48	11.50	13.70	-47.28	-13.00	34.28	H
6945.00	-54.84	7.87	11.53	-51.18	-13.00	38.18	H
10379.50	-49.96	9.77	13.05	-46.68	-13.00	33.68	V
13846.00	-48.88	10.70	14.41	-45.17	-13.00	32.17	V

NR EN-DC B4-n78L, PI/2 BPSK, Channel 633334

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
6940.00	-54.98	7.84	11.53	-51.29	-13.00	38.29	H
8682.50	-53.93	8.38	13.04	-49.27	-13.00	36.27	V
10415.50	-50.57	9.78	13.07	-47.28	-13.00	34.28	H
7015.00	-53.67	8.28	11.62	-50.33	-13.00	37.33	V
10521.50	-50.33	9.57	13.10	-46.80	-13.00	33.80	V
13978.50	-48.47	10.84	14.49	-44.82	-13.00	31.82	V

NR EN-DC B4-n78L, PI/2 BPSK, Channel 636000

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
6957.50	-54.57	7.97	11.55	-50.99	-13.00	37.99	V
8684.00	-53.96	8.38	13.04	-49.30	-13.00	36.30	H
10418.00	-50.22	9.77	13.07	-46.92	-13.00	33.92	V
7082.00	-55.07	8.18	11.70	-51.55	-13.00	38.55	H
10621.00	-52.26	9.29	13.12	-48.43	-13.00	35.43	H
14157.50	-50.45	10.96	14.47	-46.94	-13.00	33.94	V

Note: Peak EIRP (dBm) = P_{Mea}(dBm) - Path Loss(dB) + Antenna Gain(dBi)

Note: The maximum value of expanded measurement uncertainty for this test item is U = 3.37 dB, k = 2.

A.3 Frequency Stability

A.3.1 Method of Measurement

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as F_L and F_H respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of MT8000A.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the MT8000A, and in a simulated call on middle channel for each NR band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the MT8000A and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

n5

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.88	824.256	847.640		
50				-3.60	0.0043
40				0.40	0.0005
30				-1.80	0.0022
10				-1.30	0.0016
0				-1.00	0.0012
-10				-2.50	0.0030
-20				-0.30	0.0004
-30				-0.30	0.0004

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	824.256	847.640	-3.80	0.0045
4.3				-0.30	0.0004

n7

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.88	2500.592	2569.376		
50				1.10	0.0004
40				12.80	0.0050
30				6.70	0.0026
10				2.60	0.0010
0				1.60	0.0006
-10				1.80	0.0007
-20				6.80	0.0027
-30				3.80	0.0015

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	2500.592	2569.376	2.10	0.0008
4.3				4.40	0.0017

n41
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.88	2496.752	2688.128		
50				-4.20	0.0016
40				-3.60	0.0014
30				-22.60	0.0087
10				-10.10	0.0039
0				-9.30	0.0036
-10				-7.20	0.0028
-20				-1.60	0.0006
-30				-7.30	0.0028

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	2496.752	2688.128	-3.20	0.0012
4.3				9.60	0.0037

n66
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.88	1710.096	1779.888		
50				1.30	0.0007
40				2.80	0.0016
30				-5.90	0.0034
10				-1.60	0.0009
0				0.30	0.0002
-10				-0.20	0.0001
-20				-0.20	0.0001
-30				1.30	0.0007

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1710.096	1779.888	1.80	0.0010
4.3				-0.70	0.0004

n78L
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.88	3450.720	3548.208		
50				-13.30	0.0038
40				1.10	0.0003
30				10.70	0.0031
10				3.90	0.0011
0				2.80	0.0008
-10				6.20	0.0018
-20				12.50	0.0036
-30				6.00	0.0017

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	3450.720	3548.208	9.60	0.0027
4.3				1.70	0.0005

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 0.047\text{k Hz}$, $k = 2$.

A.4 Occupied Bandwidth

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the mid frequencies frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

n5


n5,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
836.5	4.518	4.498

n5,5MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

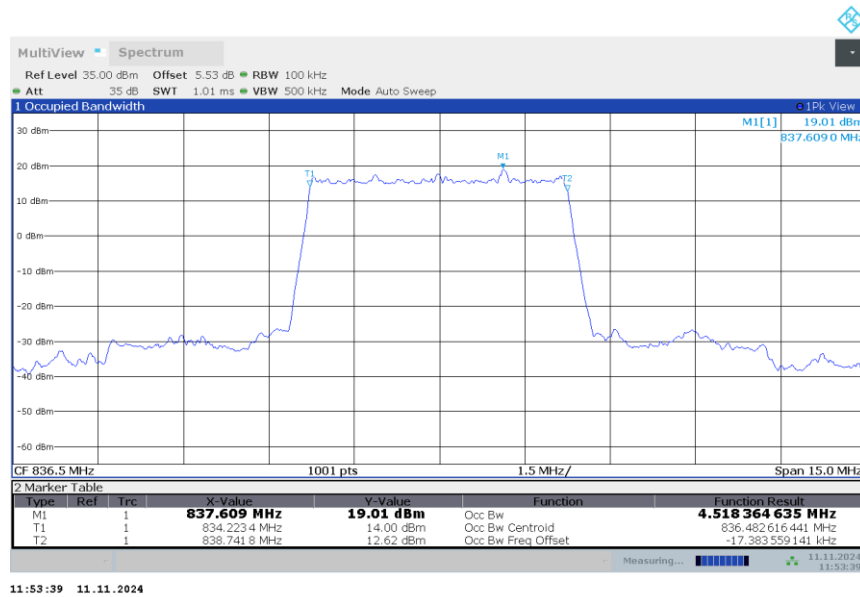

n5,5MHz Bandwidth,DFT-s-QPSK (99% BW)

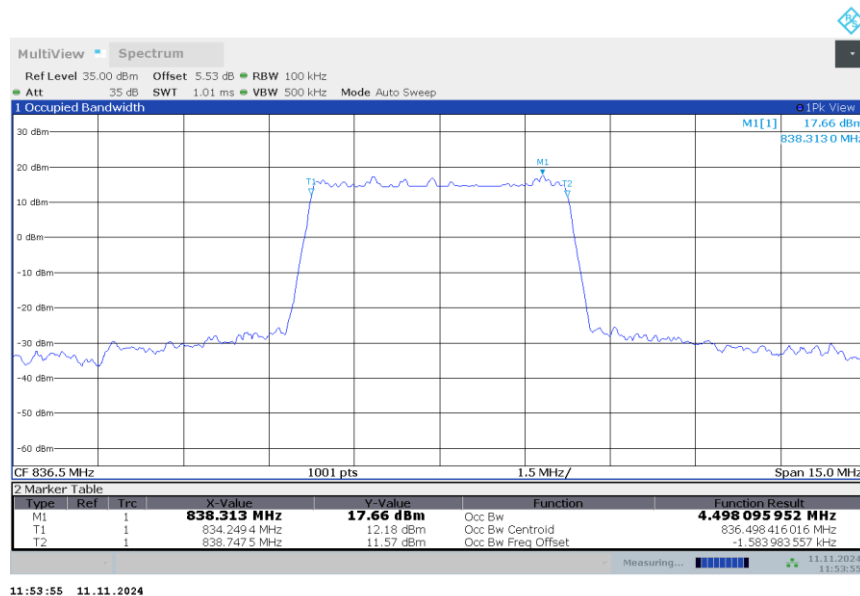


n5


n5,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
836.5	9.001	8.982

n5,10MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

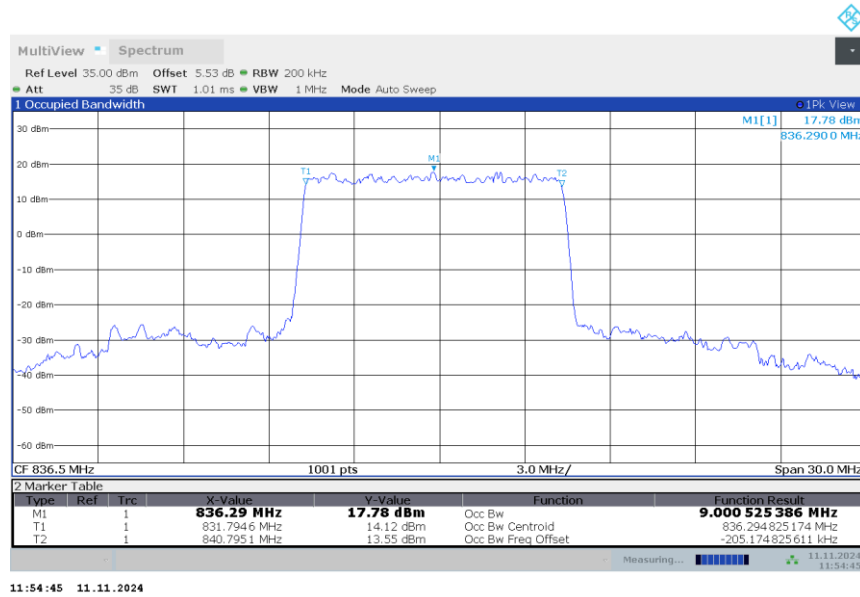

n5,10MHz Bandwidth,DFT-s-QPSK (99% BW)

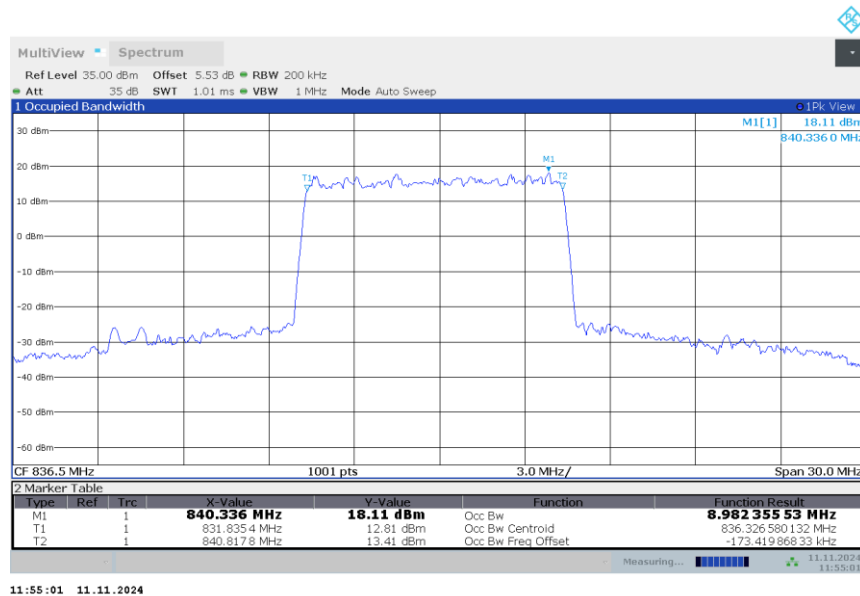


n5


n5,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
836.5	13.493	13.442

n5,15MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

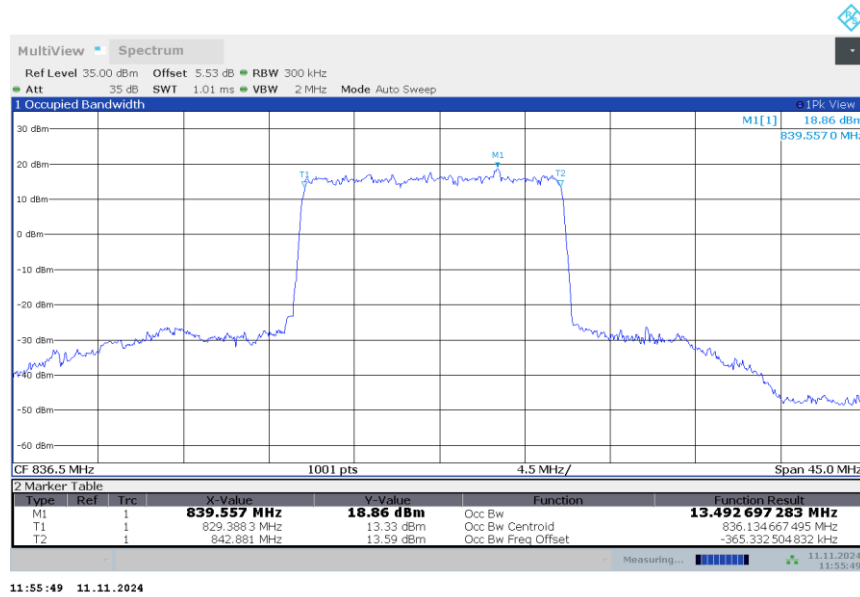

n5,15MHz Bandwidth,DFT-s-QPSK (99% BW)

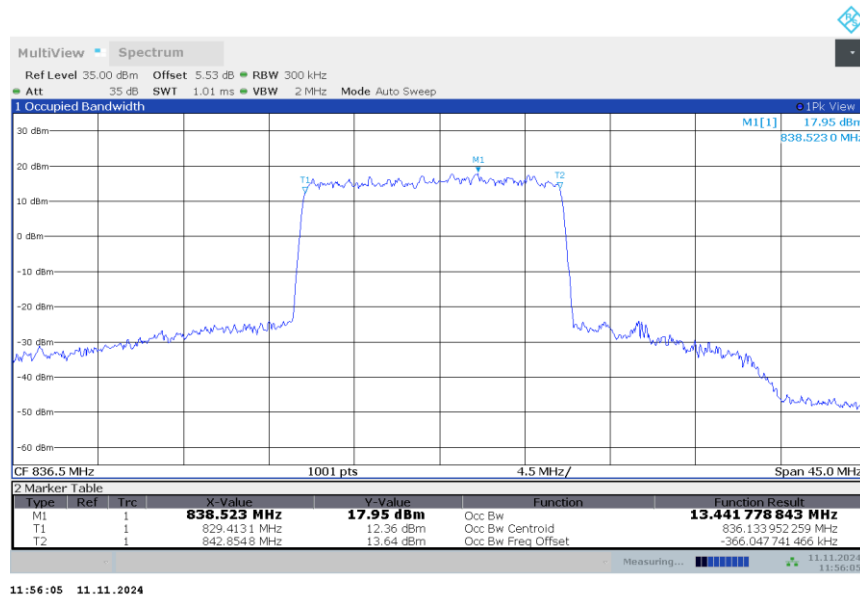

n5


n5,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
836.5	18.061	17.969

n5,20MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)



n5,20MHz Bandwidth,DFT-s-QPSK (99% BW)

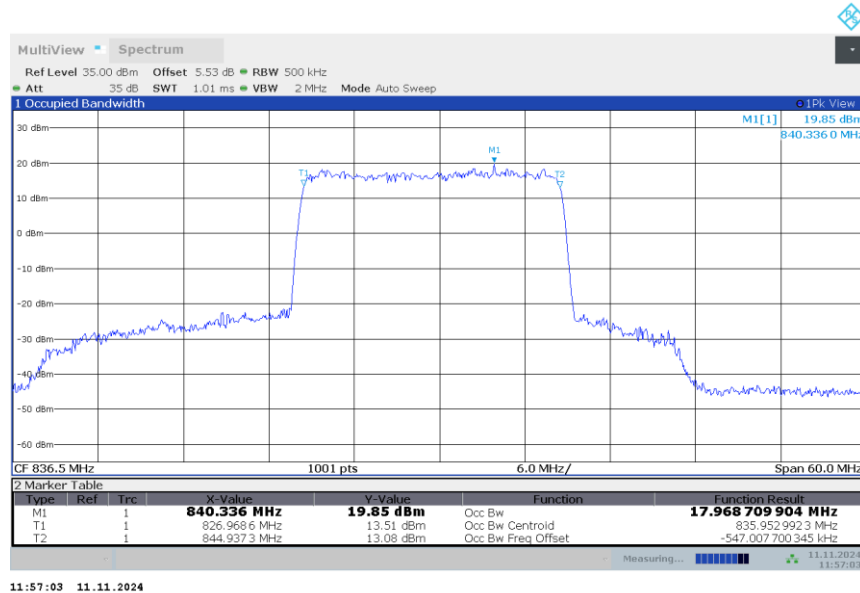


n7


n7,5MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	4.519	4.492

n7,5MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

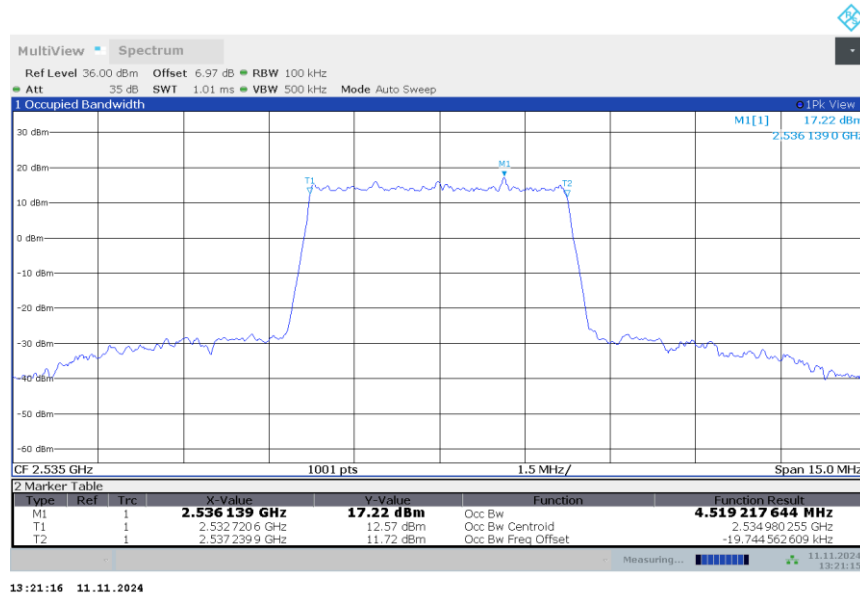

n7,5MHz Bandwidth,DFT-s-QPSK (99% BW)

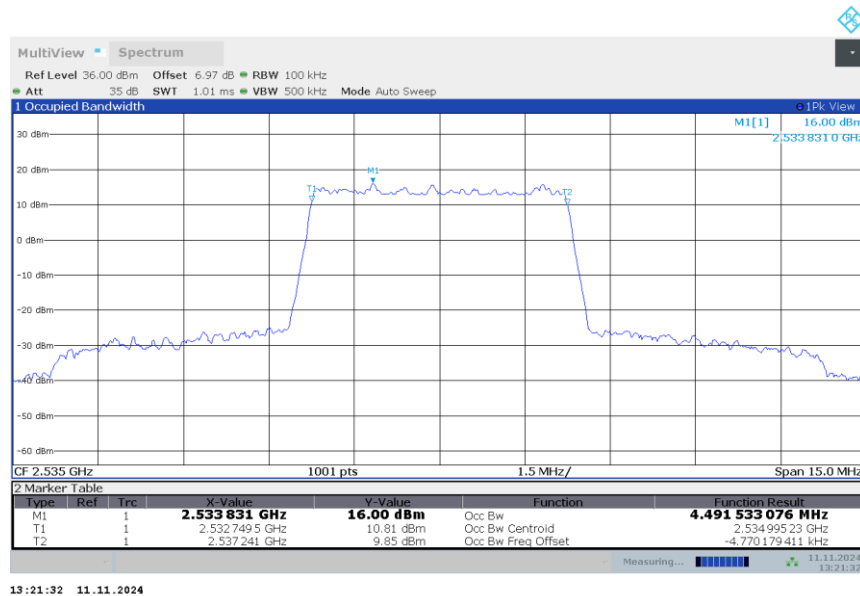


n7


n7,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	8.988	8.974

n7,10MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

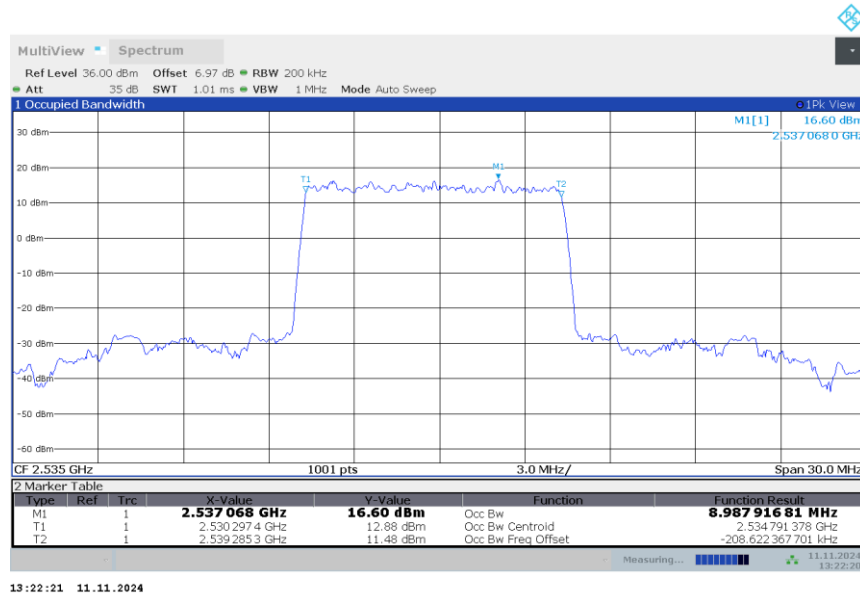

n7,10MHz Bandwidth,DFT-s-QPSK (99% BW)

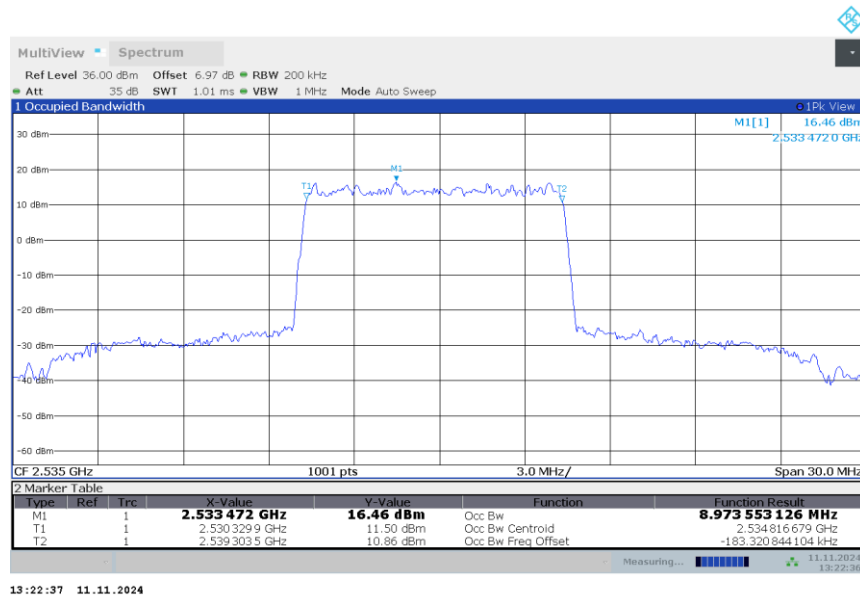


n7


n7,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	13.520	13.445

n7,15MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

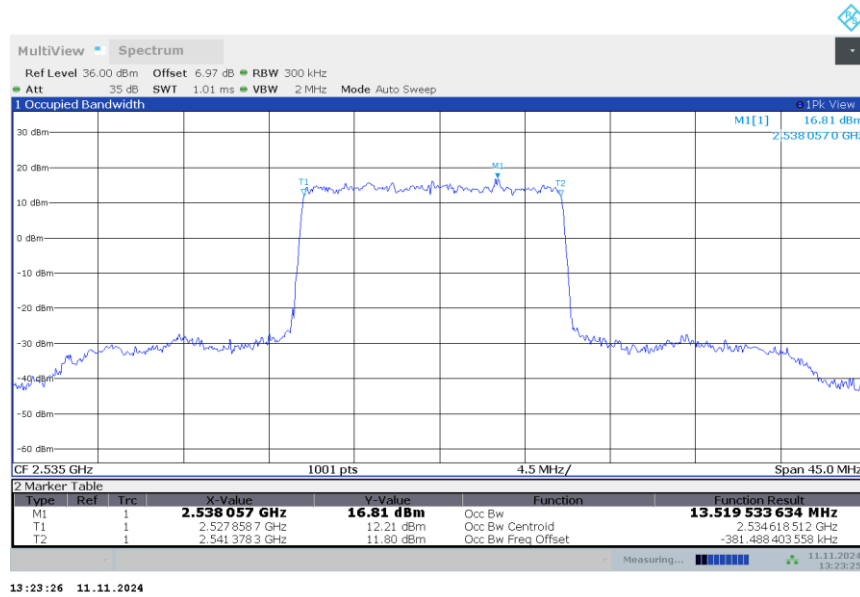

n7,15MHz Bandwidth,DFT-s-QPSK (99% BW)

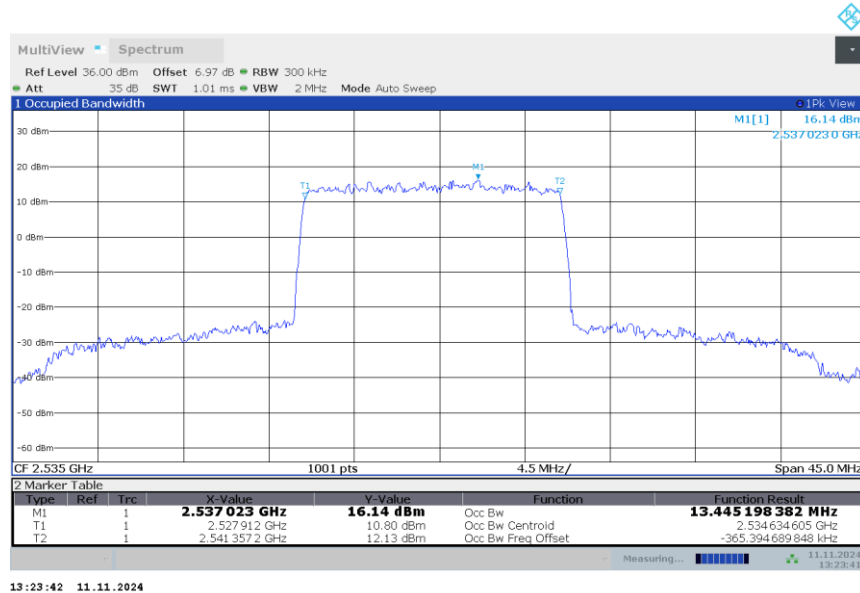


n7


n7,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	18.032	17.995

n7,20MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

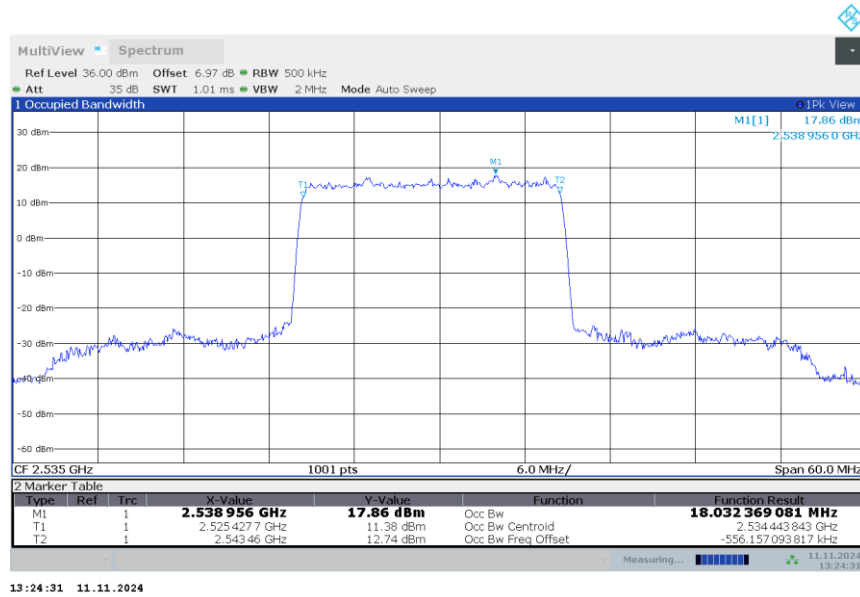

n7,20MHz Bandwidth,DFT-s-QPSK (99% BW)

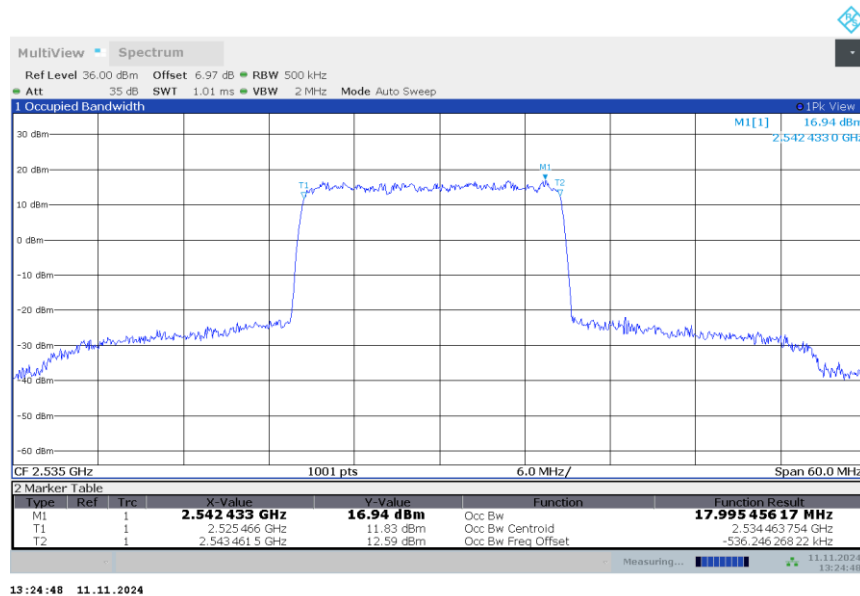


n7


n7,25MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	22.985	22.936

n7,25MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

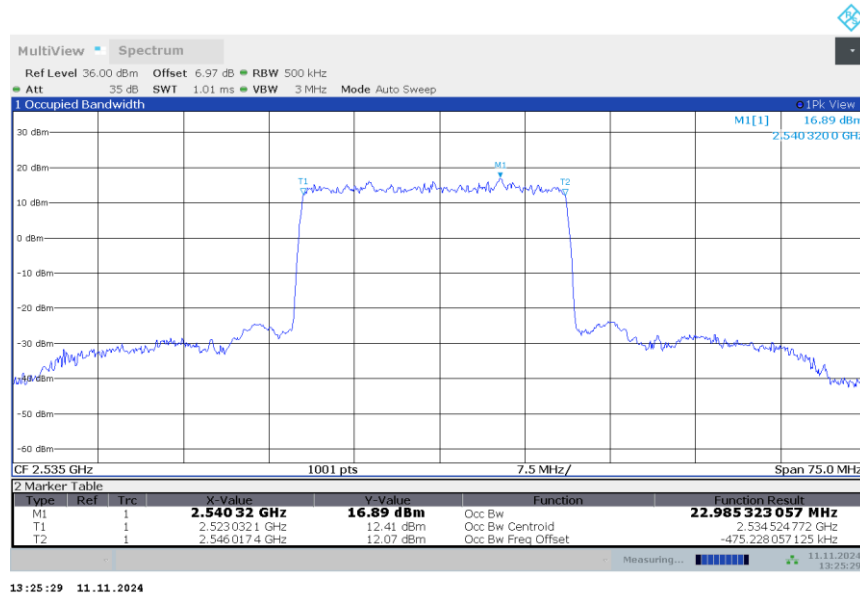

n7,25MHz Bandwidth,DFT-s-QPSK (99% BW)

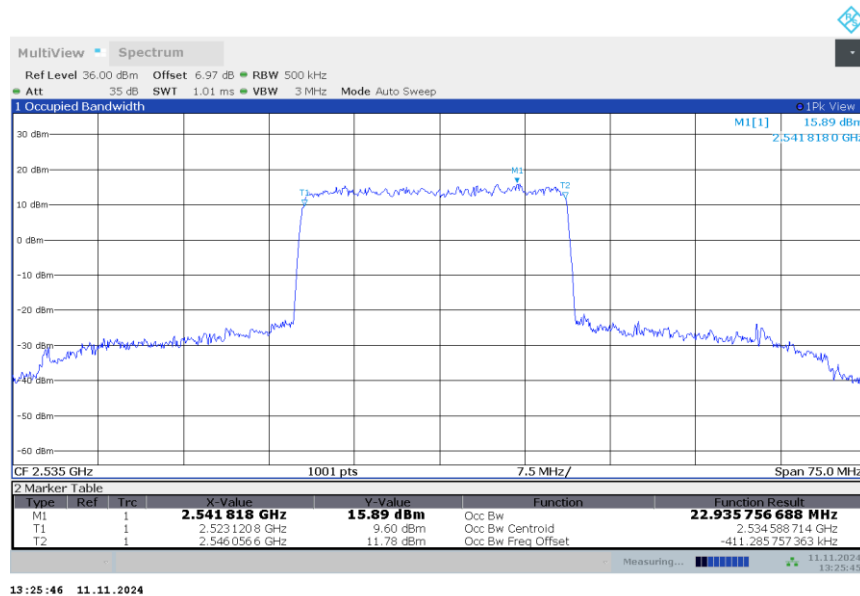


n7


n7,30MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	28.678	28.606

n7,30MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

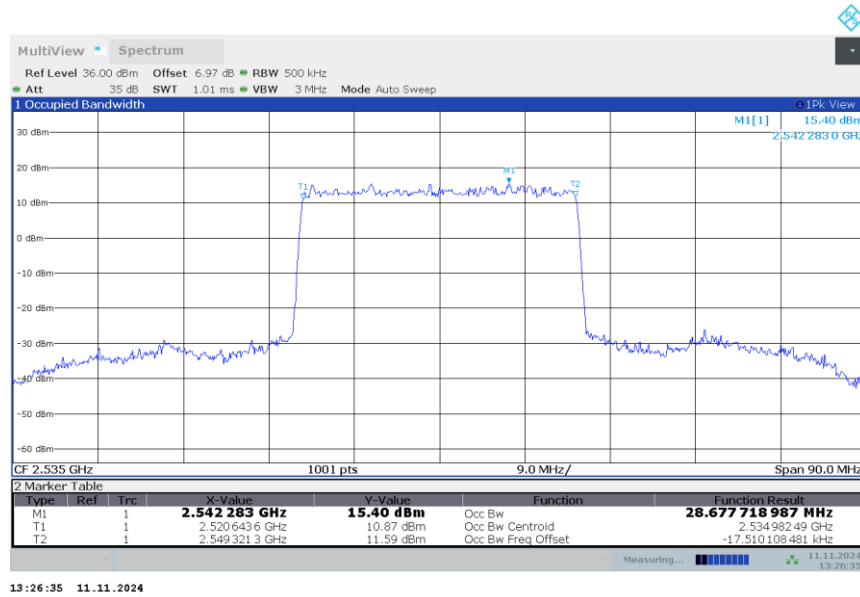

n7,30MHz Bandwidth,DFT-s-QPSK (99% BW)

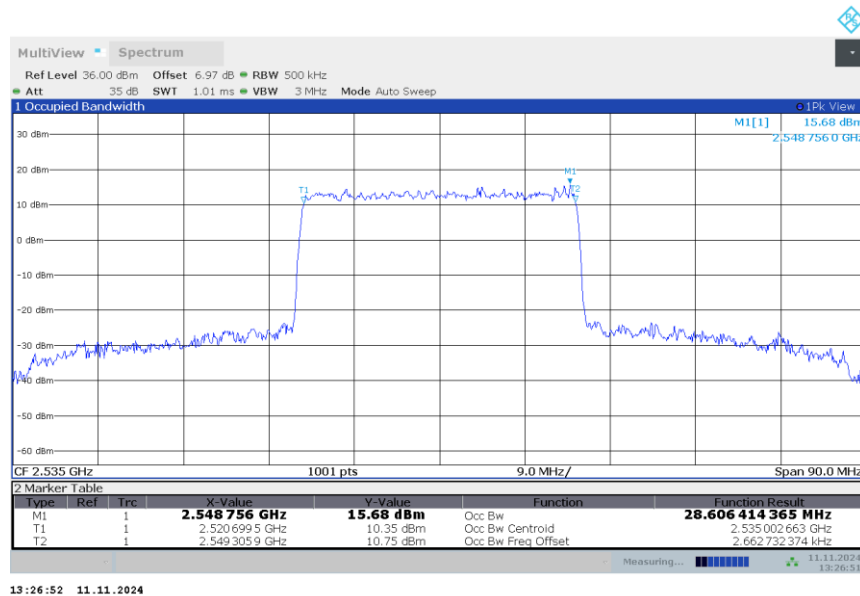


n7


n7,40MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	38.852	38.753

n7,40MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

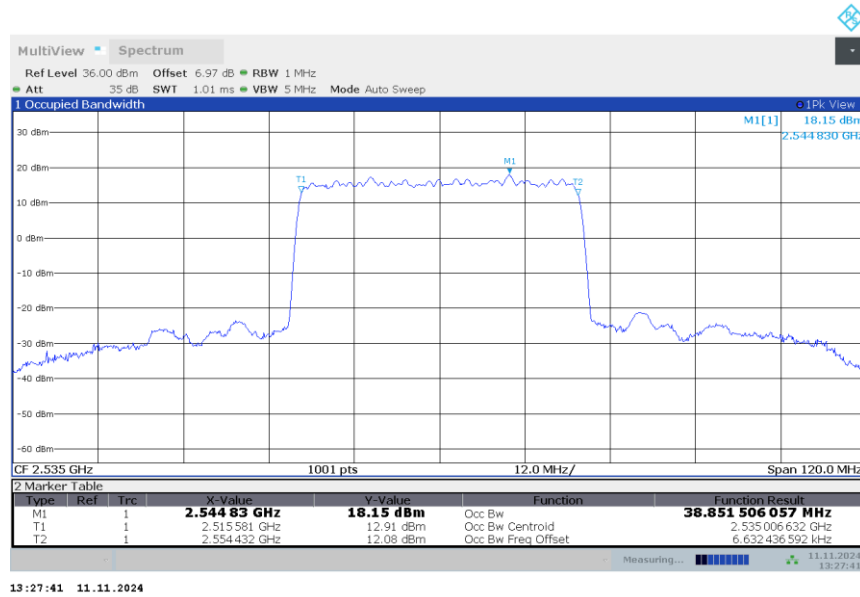

n7,40MHz Bandwidth,DFT-s-QPSK (99% BW)

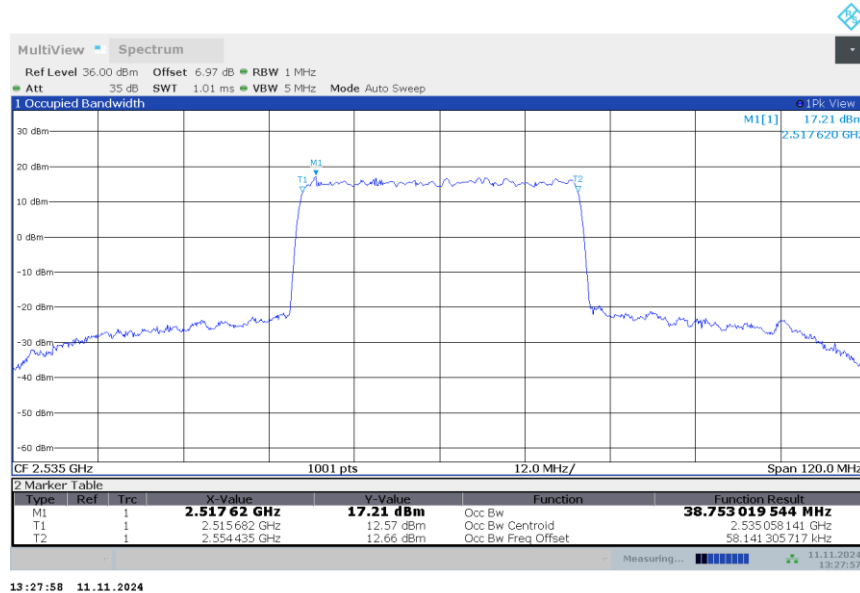


n7


n7,50MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2535	48.444	48.206

n7,50MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

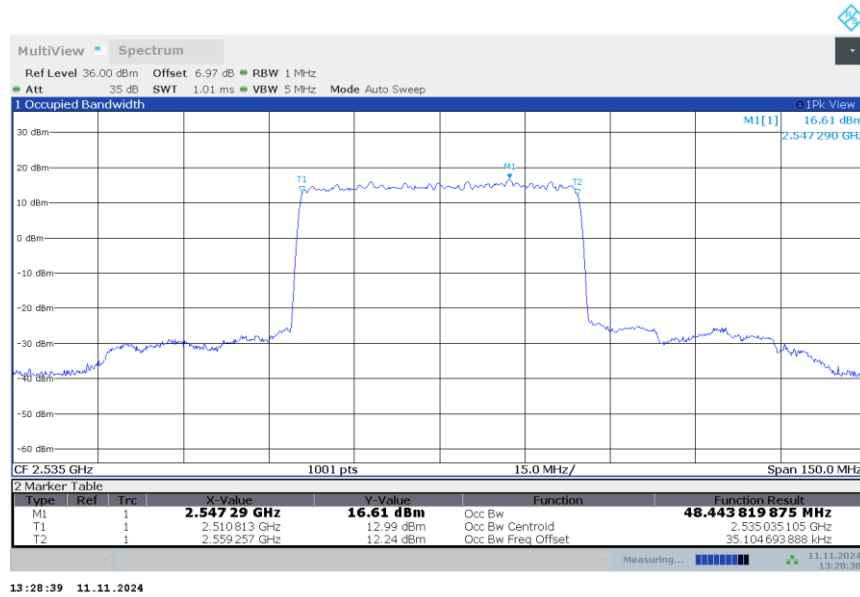

n7,50MHz Bandwidth,DFT-s-QPSK (99% BW)

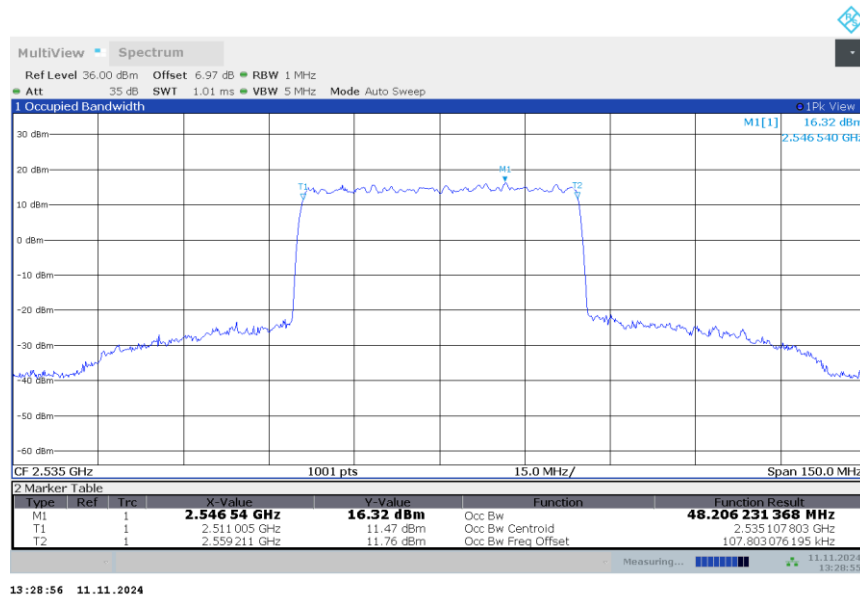


n41


n41,10MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2592.99	8.611	8.610

n41,10MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

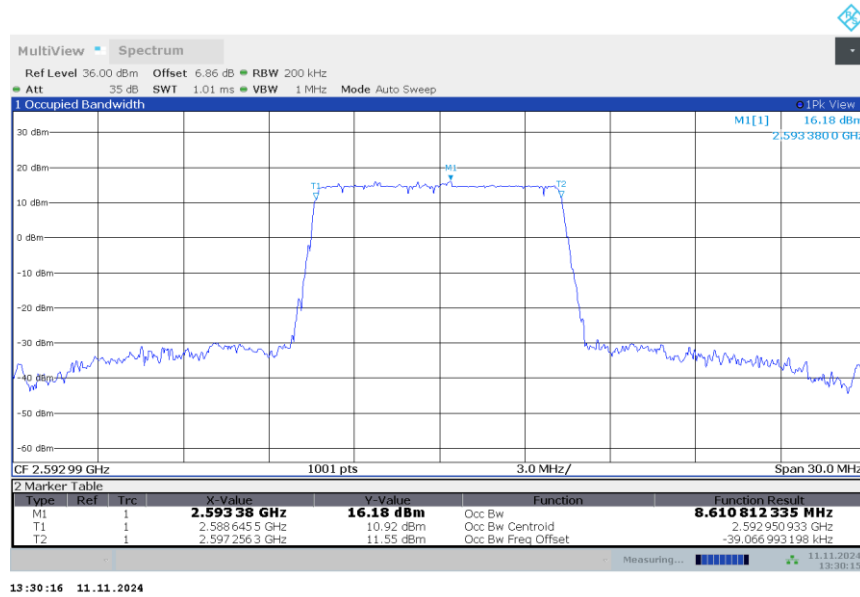

n41,10MHz Bandwidth,DFT-s-QPSK (99% BW)

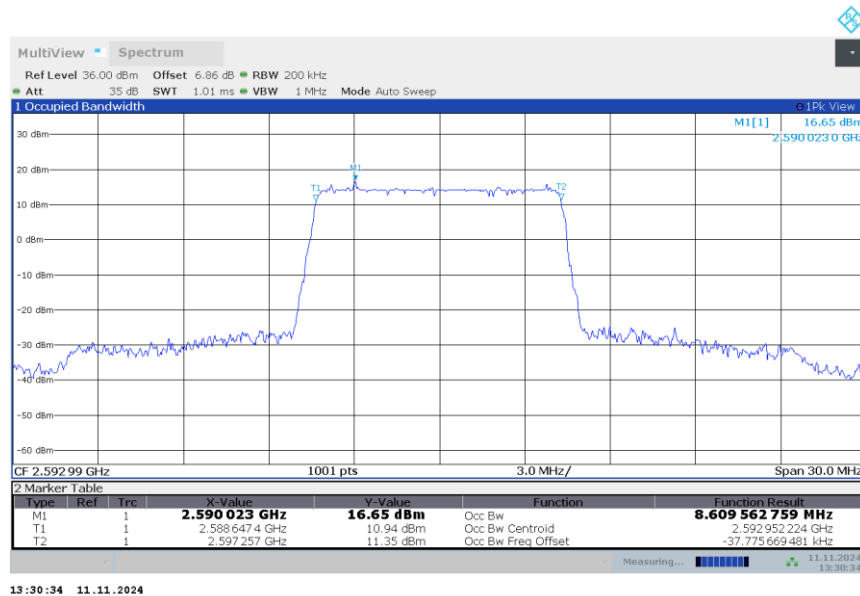


n41


n41,15MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2592.99	12.923	12.931

n41,15MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

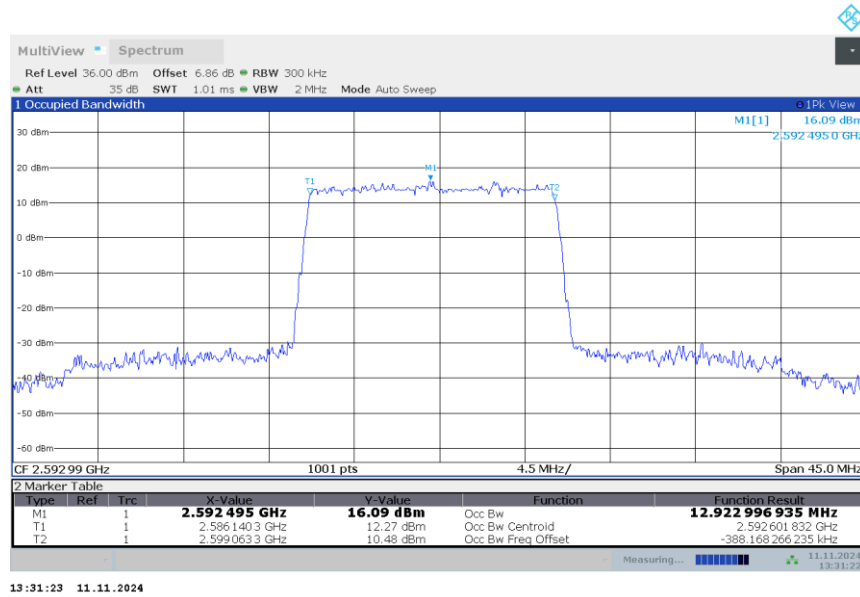

n41,15MHz Bandwidth,DFT-s-QPSK (99% BW)

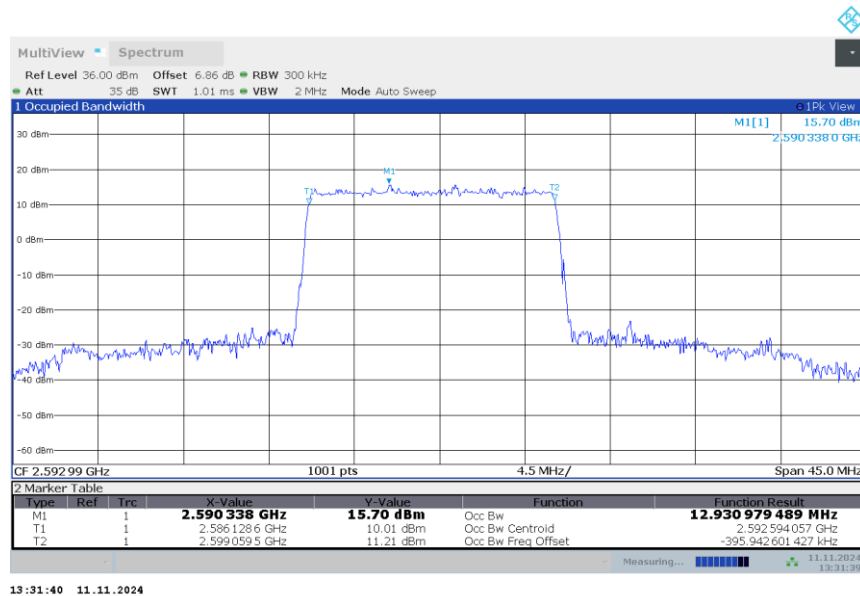


n41


n41,20MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2592.99	17.987	18.028

n41,20MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

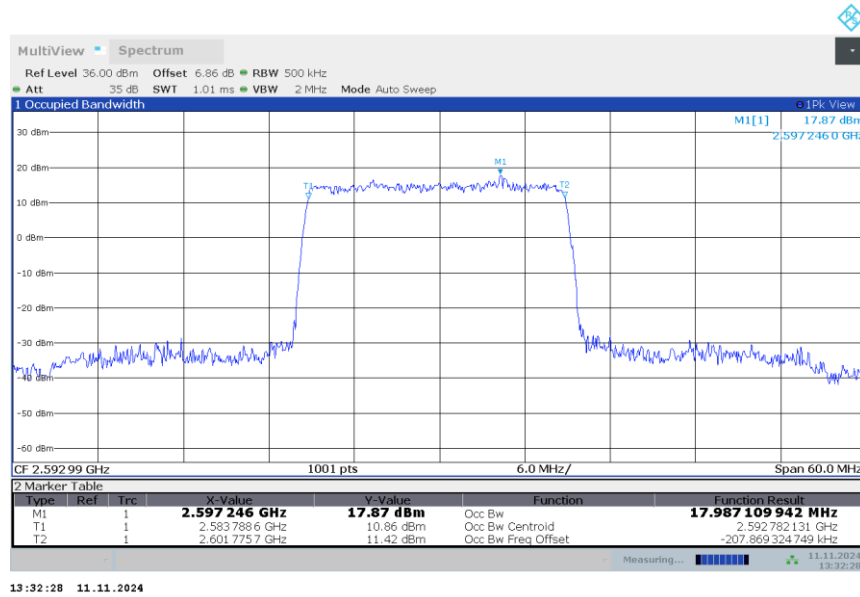

n41,20MHz Bandwidth,DFT-s-QPSK (99% BW)

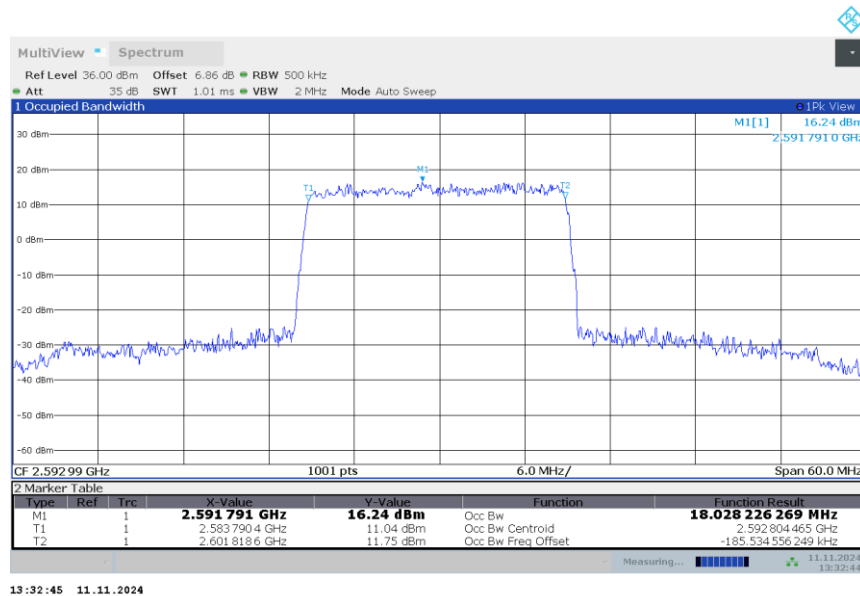


n41


n41,30MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2592.99	26.954	26.883

n41,30MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

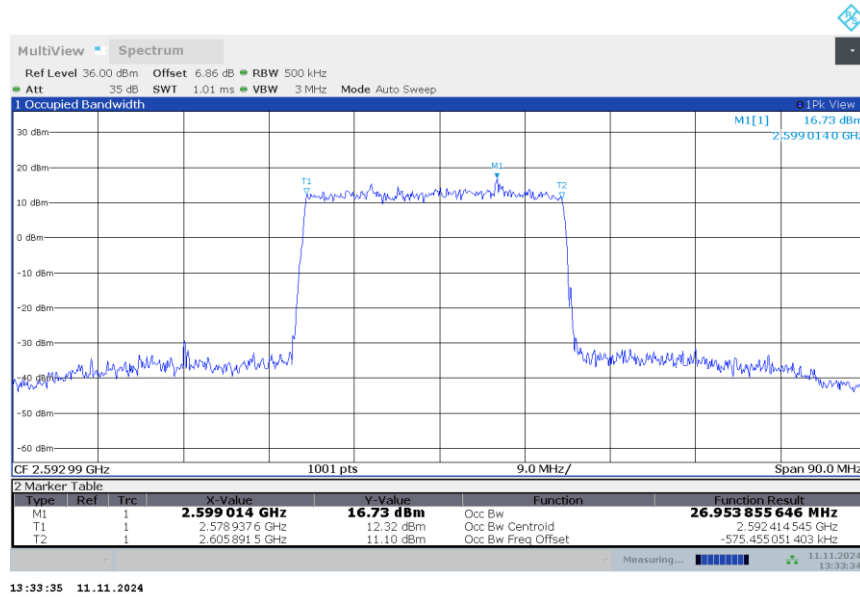

n41,30MHz Bandwidth,DFT-s-QPSK (99% BW)

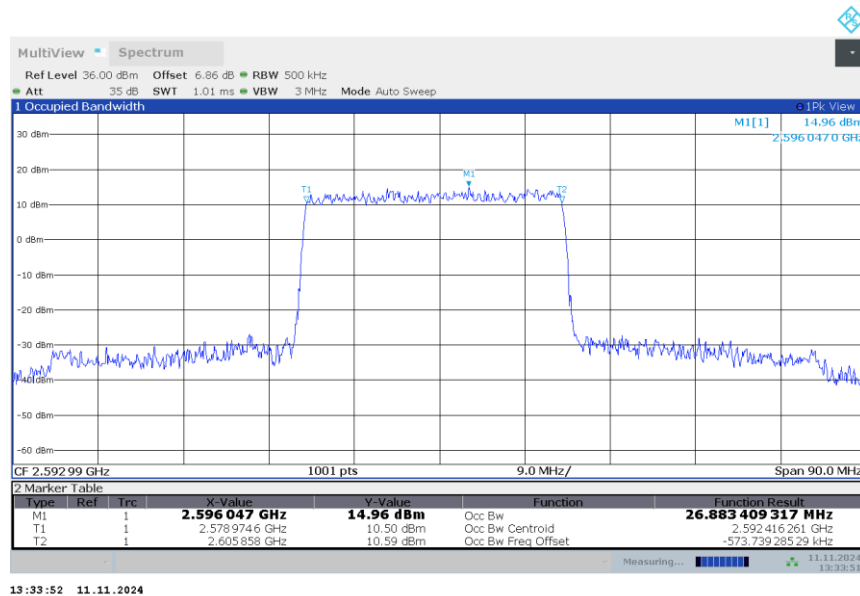


n41


n41,40MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2592.99	36.017	35.885

n41,40MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

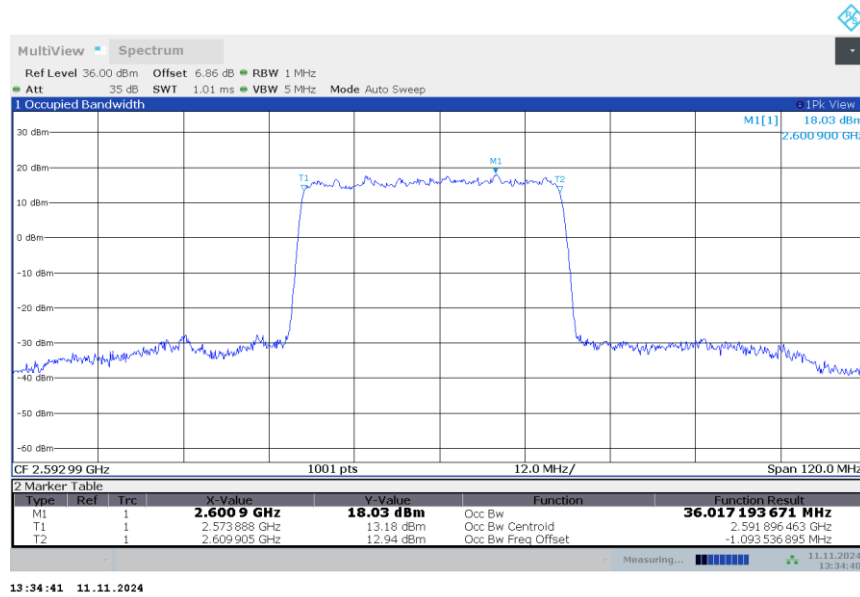

n41,40MHz Bandwidth,DFT-s-QPSK (99% BW)

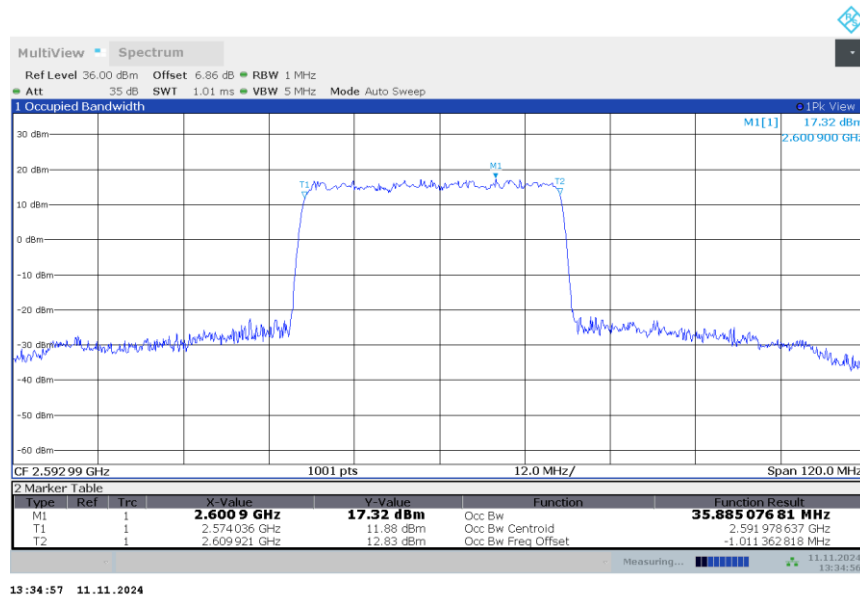


n41

n41,50MHz(99%)

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
2592.99	45.950	45.929

n41,50MHz Bandwidth,DFT-s-pi/2 BPSK (99% BW)

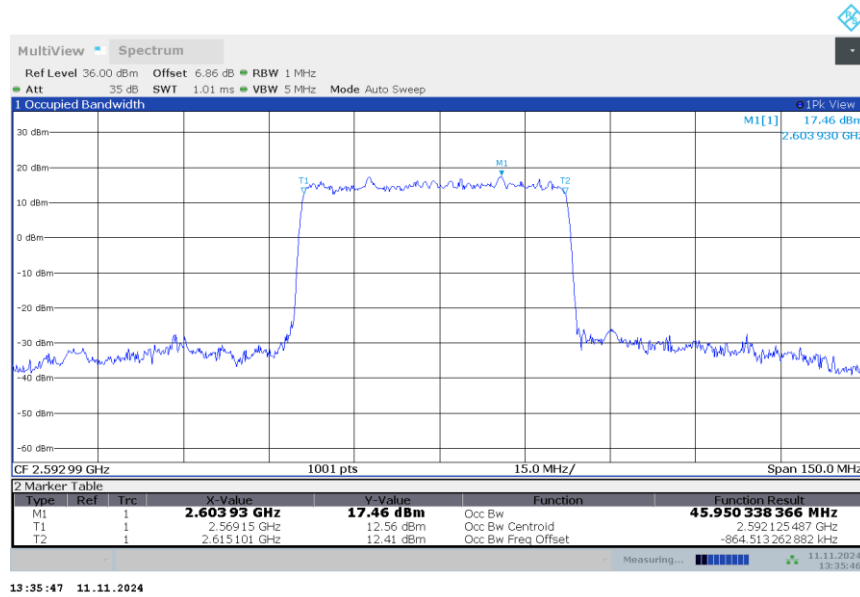

n41,50MHz Bandwidth,DFT-s-QPSK (99% BW)

