

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82th District,
Bao'an, Shenzhen, China.
Telephone: +86-755-29451282
Fax: +86-755-22639141

Report No.: FCC13-RTE060602E
Page: 1 of 31

FCC REPORT

Applicant: Shenzhen Phaeton Nice Electronic Hi-Tech Co., Ltd.

Address of Applicant: Block B2, Hexialing Industrial Park, Pingxin Road, Pinghu
Town, Longgang District, Shenzhen

Equipment Under Test (EUT)

Product Name: Bluetooth Keyboard

Model No.: KB-1302

FCC ID: ZCFHT-1302

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2012

Date of sample receipt: May 27, 2013

Date of Test: May 27- June 4, 2013

Date of report issued: June 6, 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Kavin Yu

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	June 6, 2013	<i>Original</i>

Prepared By:



Project Engineer

Date: June 6, 2013

Check By:



Reviewer

Date: June 6, 2013

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 <i>CLIENT INFORMATION</i>	5
5.2 <i>GENERAL DESCRIPTION OF EUT</i>	5
5.3 <i>TEST MODE</i>	7
5.4 <i>DESCRIPTION OF SUPPORT UNITS</i>	7
5.5 <i>TEST FACILITY</i>	7
5.6 <i>TEST LOCATION</i>	7
5.7 <i>OTHER INFORMATION REQUESTED BY THE CUSTOMER</i>	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT:	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD	14
7.3.1 <i>FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL</i>	16
7.3.2 <i>SPURIOUS EMISSIONS</i>	17
7.3.3 <i>BANDEDGE EMISSIONS</i>	21
7.4 20dB OCCUPY BANDWIDTH	23
8 TEST SETUP PHOTO	25
9 EUT CONSTRUCTIONAL DETAILS	27

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: not applicable.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Phaeton Nice Electronic Hi-Tech Co., Ltd.
Address of Applicant:	Block B2, Hexialing Industrial Park, Pingxin Road, Pinghu Town, Longgang District, Shenzhen
Manufacturer:	Shenzhen Phaeton Nice Electronic Hi-Tech Co., Ltd.
Address of Manufacturer:	Block B2, Hexialing Industrial Park, Pingxin Road, Pinghu Town, Longgang District, Shenzhen

5.2 General Description of EUT

Product Name:	Bluetooth Keyboard
Model No.:	KB-1302
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK
Antenna Type:	PCB Antenna
Antenna gain:	-4.1dBi
Power supply:	DC 3.7V Li-ion Battery

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 6 of 31

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode with GFSK modulation.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.			
We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:			
Axis	X	Y	Z
Field Strength(dBuV/m)	88.46	92.35	90.54
Final Test Mode:			
According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup": Y axis (see the test setup photo)			

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
IBM	Notebook PC	2374	L3-G0686	DoC
IBM	AC Adapter	92P1024	N/A	VoC

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.6 Test Location

All tests were performed at:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Global United Technology Services Co., Ltd.
Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China
Tel: 0755-29451282
Fax: 0755-22639141

5.7 Other Information Requested by the Customer

None.

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 9 of 31

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2013	Mar. 28 2014
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 6, 2012	Dec. 5 2013
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 24 2013	Feb. 23 2014
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2012	June 28 2013
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 29 2013	Mar. 28 2014
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 30 2013	Mar. 29 2014
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 30 2013	Mar. 29 2014
11	Coaxial cable	GTS	N/A	GTS210	Mar. 30 2013	Mar. 29 2014
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 30 2013	Mar. 29 2014
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2012	June 28 2013
16	Band filter	Amindeon	82346	GTS219	Mar. 30 2013	Mar. 29 2014


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2011	Sep. 07 2013
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2012	Jul. 02 2013
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2012	Jul. 02 2013
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2012	Jul. 02 2013
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2012	Jul. 02 2013
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2012	Jul. 02 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
<i>The antenna is PCB Antenna, the best case gain of the antenna is -4.1dBi</i>	

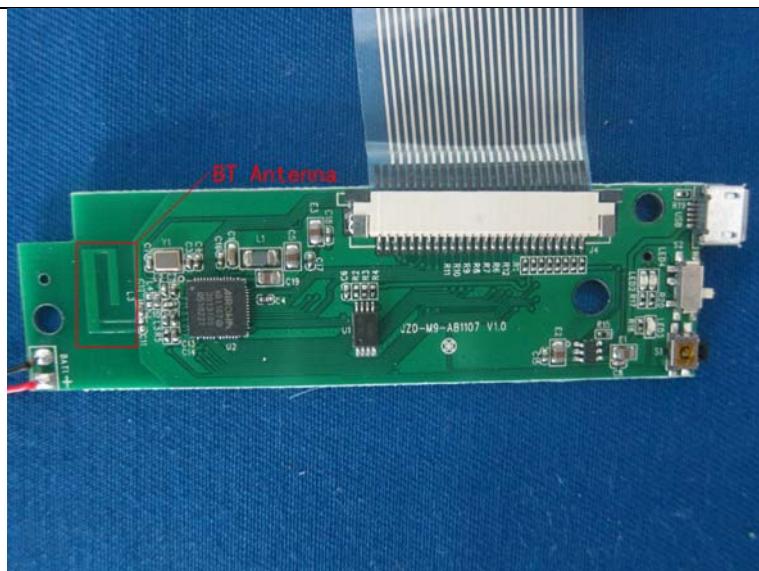


7.2 Conducted Emissions

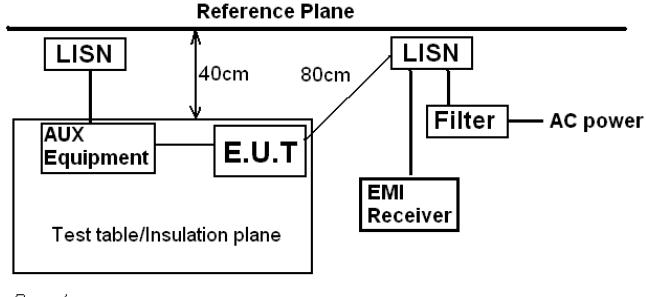Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.4:2003																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<p>* Decreases with the logarithm of the frequency.</p>																
Test setup:	 <p>Reference Plane</p> <p>Test table/Insulation plane</p> <p>Remark: E.U.T Equipment Under Test LISN Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																

Measurement data:

Test Mode: Charging and Keep the EUT in continuously transmitting with GFSK modulation.

Line:

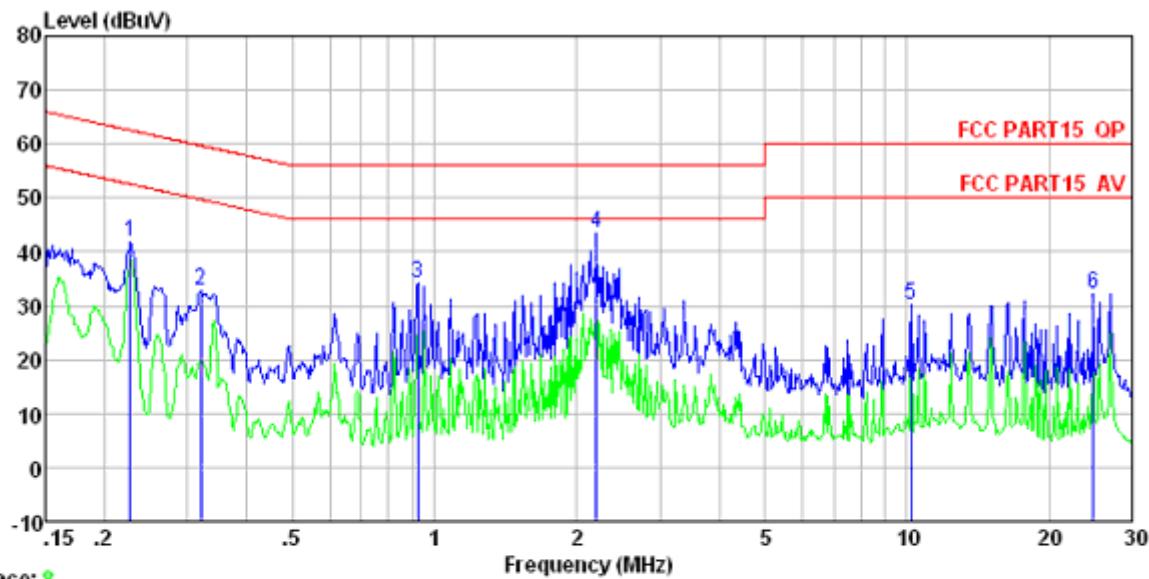


Trace: 8

Condition : FCC PART15 QP LISN-2012 LINE

Test Engineer: Jim

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dB	dBuV	dBuV	dB	
1	0.227	41.95	-0.23	0.10	41.82	62.57	-20.75	QP
2	0.320	32.98	-0.22	0.10	32.86	59.71	-26.85	QP
3	0.923	34.29	-0.21	0.10	34.18	56.00	-21.82	QP
4	2.201	43.60	-0.24	0.10	43.46	56.00	-12.54	QP
5	10.233	30.44	-0.42	0.20	30.22	60.00	-29.78	QP
6	24.790	32.86	-0.83	0.21	32.24	60.00	-27.76	QP

Neutral:

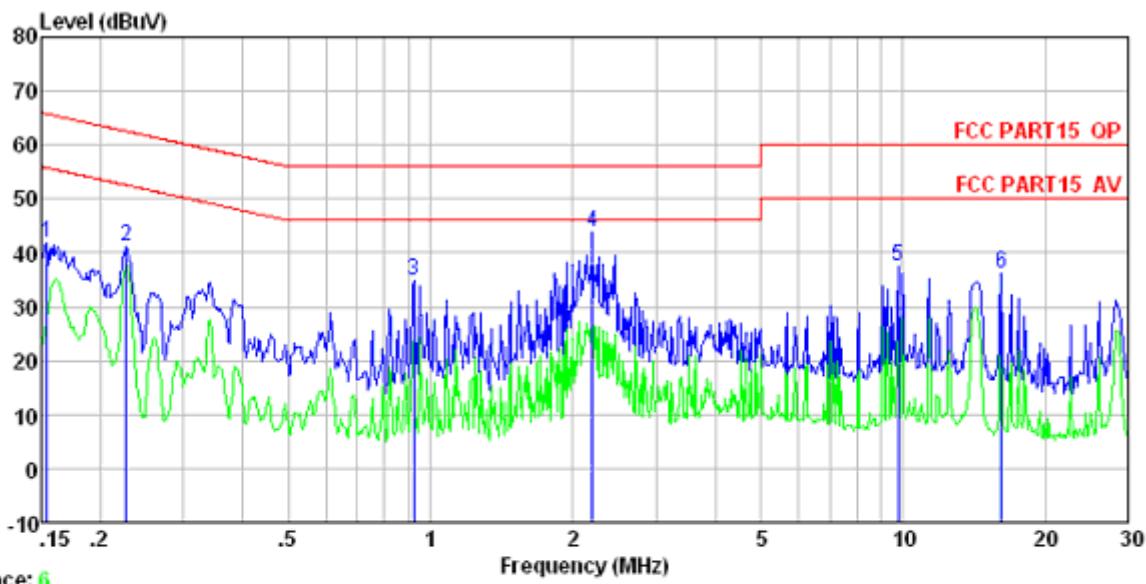


Freq	Read	LISN	Cable	Limit	Over	Remark	
	Freq	Level	Factor				
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	41.85	-0.13	0.10	41.82	65.78	-23.96 QP
2	0.227	41.27	-0.09	0.10	41.28	62.57	-21.29 QP
3	0.923	34.69	-0.09	0.10	34.70	56.00	-21.30 QP
4	2.201	43.76	-0.11	0.10	43.75	56.00	-12.25 QP
5	9.757	37.47	-0.29	0.20	37.38	60.00	-22.62 QP
6	16.140	36.44	-0.42	0.20	36.22	60.00	-23.78 QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

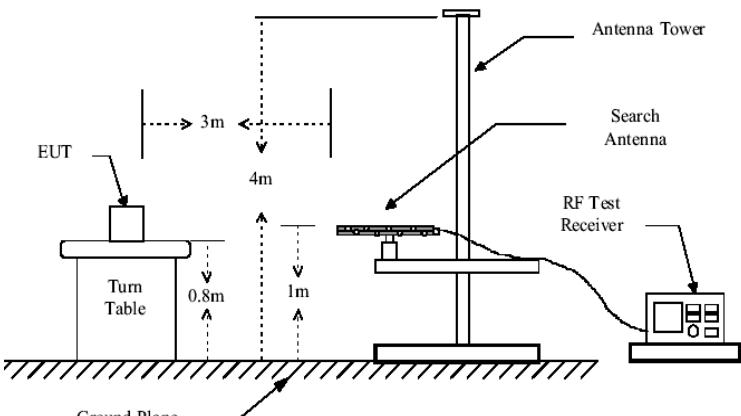Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.4:2003								
Test Frequency Range:	30MHz to 25GHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark					
	2400MHz-2483.5MHz	94.00		Average Value					
		114.00		Peak Value					
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)		Remark					
	30MHz-88MHz	40.00		Quasi-peak Value					
	88MHz-216MHz	43.50		Quasi-peak Value					
	216MHz-960MHz	46.00		Quasi-peak Value					
	960MHz-1GHz	54.00		Quasi-peak Value					
	Above 1GHz	54.00		Average Value					
		74.00		Peak Value					
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.								
Test setup:	Below 1GHz								
									

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

	<p>Above 1GHz</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement data:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	88.23	27.58	5.39	30.18	91.02	114.00	-22.98	Horizontal
2402.00	85.98	27.58	5.39	30.18	88.77	114.00	-25.23	Vertical
2441.00	86.73	27.55	5.43	30.06	89.65	114.00	-24.35	Horizontal
2441.00	84.94	27.55	5.43	30.06	87.86	114.00	-26.14	Vertical
2480.00	89.29	27.52	5.47	29.93	92.35	114.00	-21.65	Horizontal
2480.00	86.34	27.52	5.47	29.93	89.40	114.00	-24.60	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	76.98	27.58	5.39	30.18	79.77	94.00	-14.23	Horizontal
2402.00	74.68	27.58	5.39	30.18	77.47	94.00	-16.53	Vertical
2441.00	75.25	27.55	5.43	30.06	78.17	94.00	-15.83	Horizontal
2441.00	72.25	27.55	5.43	30.06	75.17	94.00	-18.83	Vertical
2480.00	78.03	27.52	5.47	29.93	81.09	94.00	-12.91	Horizontal
2480.00	75.08	27.52	5.47	29.93	78.14	94.00	-15.86	Vertical

According to the follow transmitter output power (P_t) formula:

$$P_t = (E \times d)^2 / (30 \times g_t)$$

P_t =transmitter output power in watts

g_t =numeric gain of the transmitting antenna (unitless)

E =electric field strength in V/m

d = measurement distance in meters (m).

According to the above test data, $E_{max}=92.35 \text{ dBuV/m} = 0.04145 \text{ V/m}$, $d=3 \text{ m}$, $g_t=0.389$

$$P_t = (E \times d)^2 / (30 \times g_t) = (0.04145 \times 3)^2 / (30 \times 0.389) = 0.001324 \text{ W} = 1.324 \text{ mW}$$

7.3.2 Spurious emissions

■ Below 1GHz

Remark: The test were performed at lowest, middle, highest channel and the lowest is the worst mode. The data exhibited in the report is the worst mode's.

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
47.83	39.24	16.49	0.75	31.98	24.50	40.00	-15.50	Vertical
93.44	38.60	15.76	1.14	31.73	23.77	43.50	-19.73	Vertical
239.15	38.70	15.06	2.06	32.16	23.66	46.00	-22.34	Vertical
297.22	38.40	16.03	2.35	32.18	24.60	46.00	-21.40	Vertical
658.84	38.72	21.28	3.94	31.13	32.81	46.00	-13.19	Vertical
945.44	38.32	23.92	5.03	31.21	36.06	46.00	-9.94	Vertical
41.57	38.85	16.58	0.68	32.04	24.07	40.00	-15.93	Horizontal
103.81	39.13	15.73	1.22	31.78	24.30	43.50	-19.20	Horizontal
242.53	39.28	15.09	2.08	32.16	24.29	46.00	-21.71	Horizontal
404.67	39.21	17.22	2.88	31.87	27.44	46.00	-18.56	Horizontal
704.23	39.15	21.86	4.10	31.20	33.91	46.00	-12.09	Horizontal
912.86	39.29	24.04	4.90	31.19	37.04	46.00	-8.96	Horizontal

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 18 of 31

■ Above 1GHz

Test channel:	Lowest channel							
---------------	----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	39.18	31.78	8.60	24.17	55.39	74.00	-18.61	Vertical
7206.00	37.80	36.15	11.65	26.39	59.21	74.00	-14.79	Vertical
9608.00	35.52	38.01	14.14	25.45	62.22	74.00	-11.78	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	35.21	31.78	8.60	24.17	51.42	74.00	-22.58	Horizontal
7206.00	35.70	36.15	11.65	26.39	57.11	74.00	-16.89	Horizontal
9608.00	32.21	38.01	14.14	25.45	58.91	74.00	-15.09	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	23.96	31.78	8.60	24.17	40.17	54.00	-13.83	Vertical
7206.00	22.84	36.15	11.65	26.39	44.25	54.00	-9.75	Vertical
9608.00	17.99	38.01	14.14	25.45	44.69	54.00	-9.31	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	19.95	31.78	8.60	24.17	36.16	54.00	-17.84	Horizontal
7206.00	19.91	36.15	11.65	26.39	41.32	54.00	-12.68	Horizontal
9608.00	15.56	38.01	14.14	25.45	42.26	54.00	-11.74	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 19 of 31

Test channel:				Middle channel				
---------------	--	--	--	----------------	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	39.63	31.85	8.66	24.10	56.04	74.00	-17.96	Vertical
7323.00	38.98	36.37	11.72	26.71	60.36	74.00	-13.64	Vertical
9764.00	34.94	38.35	14.25	25.36	62.18	74.00	-11.82	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	35.85	31.85	8.66	24.10	52.26	74.00	-21.74	Horizontal
7323.00	34.80	36.37	11.72	26.71	56.18	74.00	-17.82	Horizontal
9764.00	31.23	38.35	14.25	25.36	58.47	74.00	-15.53	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	24.41	31.85	8.66	24.10	40.82	54.00	-13.18	Vertical
7323.00	22.91	36.37	11.72	26.71	44.29	54.00	-9.71	Vertical
9764.00	17.07	38.35	14.25	25.36	44.31	54.00	-9.69	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	20.59	31.85	8.66	24.10	37.00	54.00	-17.00	Horizontal
7323.00	19.98	36.37	11.72	26.71	41.36	54.00	-12.64	Horizontal
9764.00	15.35	38.35	14.25	25.36	42.59	54.00	-11.41	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 20 of 31

Test channel:	Highest channel							
---------------	-----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	38.44	31.93	8.73	24.03	55.07	74.00	-18.93	Vertical
7440.00	38.00	36.59	11.79	27.03	59.35	74.00	-14.65	Vertical
9920.00	32.47	38.81	14.38	25.26	60.40	74.00	-13.60	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	35.45	31.93	8.73	24.03	52.08	74.00	-21.92	Horizontal
7440.00	35.01	36.59	11.79	27.03	56.36	74.00	-17.64	Horizontal
9920.00	29.77	38.81	14.38	25.26	57.70	74.00	-16.30	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	23.22	31.93	8.73	24.03	39.85	54.00	-14.15	Vertical
7440.00	23.46	36.59	11.79	27.03	44.81	54.00	-9.19	Vertical
9920.00	14.92	38.81	14.38	25.26	42.85	54.00	-11.15	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	20.19	31.93	8.73	24.03	36.82	54.00	-17.18	Horizontal
7440.00	20.59	36.59	11.79	27.03	41.94	54.00	-12.06	Horizontal
9920.00	14.67	38.81	14.38	25.26	42.60	54.00	-11.40	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

7.3.3 Bandedge emissions

Test channel:	Lowest channel							
---------------	----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	41.59	27.59	5.38	30.18	44.38	74.00	-29.62	Horizontal
2400.00	58.60	27.58	5.39	30.18	61.39	74.00	-12.61	Horizontal
2390.00	42.27	27.59	5.38	30.18	45.06	74.00	-28.94	Vertical
2400.00	60.74	27.58	5.39	30.18	63.53	74.00	-10.47	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.68	27.59	5.38	30.18	35.47	54.00	-18.53	Horizontal
2400.00	44.12	27.58	5.39	30.18	46.91	54.00	-7.09	Horizontal
2390.00	32.81	27.59	5.38	30.18	35.60	54.00	-18.40	Vertical
2400.00	45.99	27.58	5.39	30.18	48.78	54.00	-5.22	Vertical

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 22 of 31

Test channel:	Highest channel							
---------------	-----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.08	27.53	5.47	29.93	49.15	74.00	-24.85	Horizontal
2500.00	45.36	27.55	5.49	29.93	48.47	74.00	-25.53	Horizontal
2483.50	45.34	27.53	5.47	29.93	48.41	74.00	-25.59	Vertical
2500.00	44.43	27.55	5.49	29.93	47.54	74.00	-26.46	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.22	27.53	5.47	29.93	41.29	54.00	-12.71	Horizontal
2500.00	34.91	27.55	5.49	29.93	38.02	54.00	-15.98	Horizontal
2483.50	37.19	27.53	5.47	29.93	40.26	54.00	-13.74	Vertical
2500.00	35.18	27.55	5.49	29.93	38.29	54.00	-15.71	Vertical

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*

7.4 20dB Occupy Bandwidth

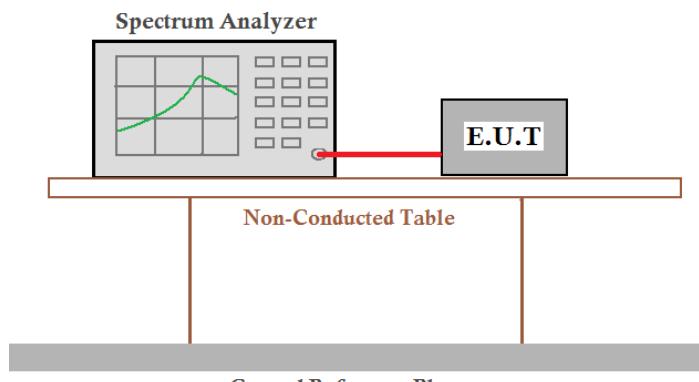
Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.4:2003
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup for 20dB Occupied Bandwidth. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Worst case GFSK modulation

Test channel	20dB bandwidth(MHz)	Result
Lowest	0.846	Pass
Middle	0.831	Pass
Highest	0.843	Pass

Test plot as follows:

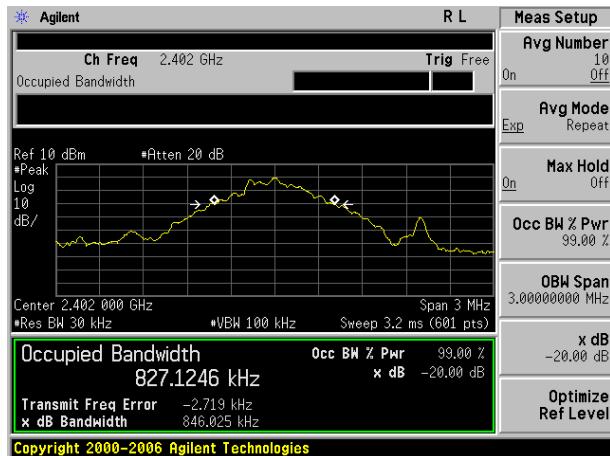

Lowest channel

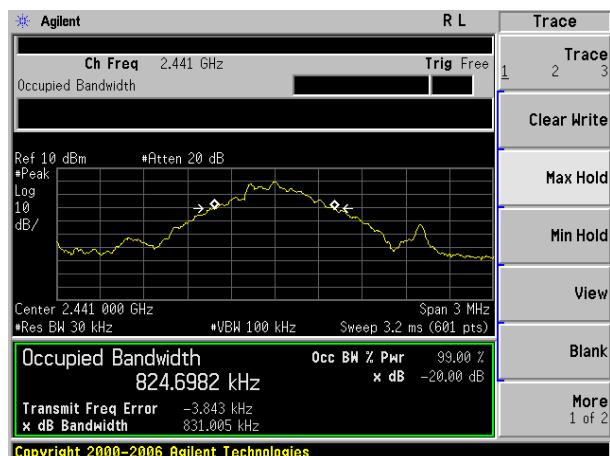

Middle channel




Highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

8 Test Setup Photo

Radiated Emission

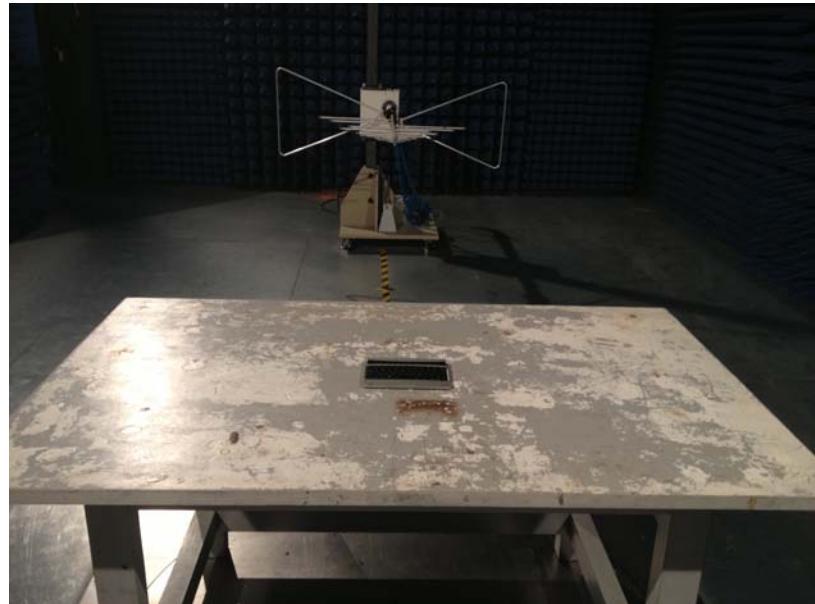

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 26 of 31

Conducted Emission



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

9 EUT Constructional Details



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 28 of 31



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Shenzhen EBO Technology Co., Ltd.


Report No.: FCC13-RTE060602E
Page: 29 of 31



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Shenzhen EBO Technology Co., Ltd.



Report No.: FCC13-RTE060602E
Page: 30 of 31

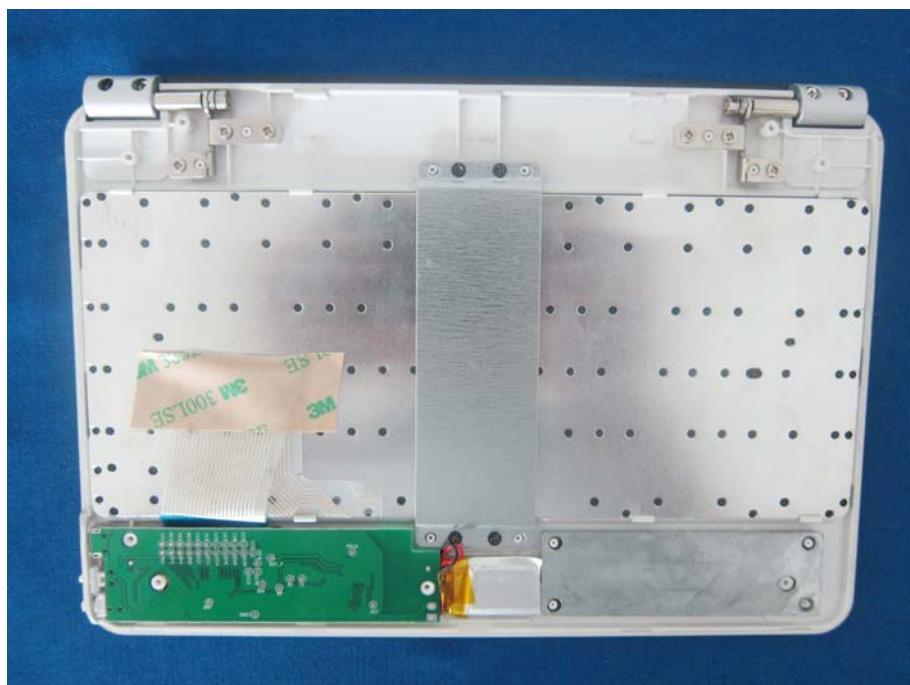

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Shenzhen EBO Technology Co., Ltd.

Report No.: FCC13-RTE060602E
Page: 31 of 31

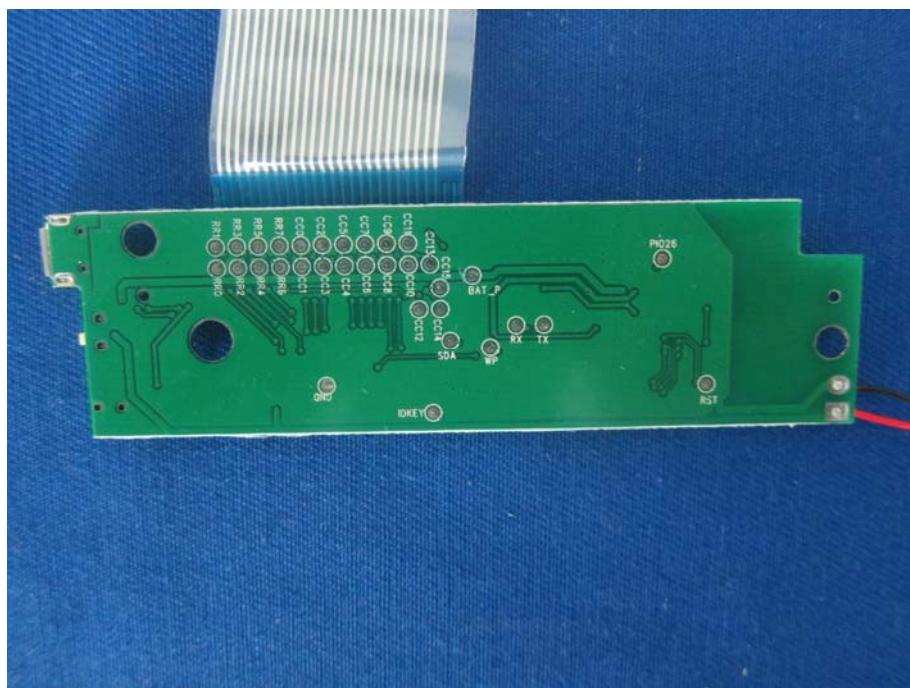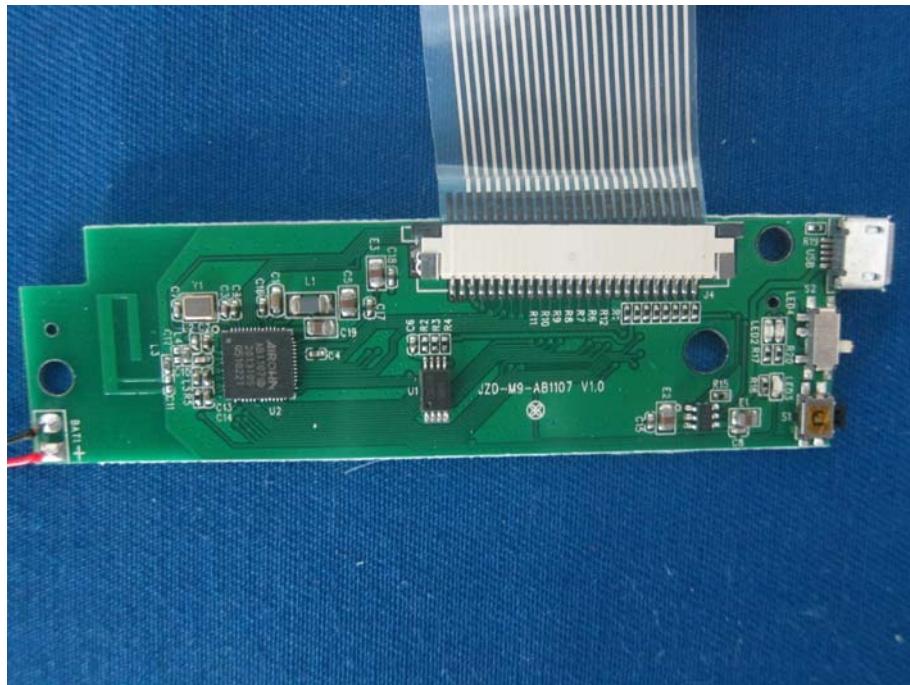

-----End-----

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."