



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	200mW or 10dBm +10logB whichever is less
5725~5850	N/A

Note: Where "B" is the 99% emission bandwidth in MHz

6.2 TEST PROCEDURE

. Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).



a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP





6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC 3.3V

5150-5250MHz					
Operating mode	Test Channel MHz	Output Power			Limit (dBm)
		Chain A(dBm)	Chain B(dBm)	Total(dBm)	
802.11a	5180	15.42	15.38	/	23.98
	5200	15.09	15.08	/	23.98
	5240	16.02	15.91	/	23.98
802.11n-HT20	5180	15.65	15.54	18.61	23.97
	5200	15.39	15.31	18.36	23.97
	5240	14.69	14.64	17.68	23.97
802.11n-HT40	5190	14.70	14.51	17.62	23.97
	5230	14.09	14.34	17.23	23.97

Antenna A gain: 3dBi, Antenna B gain: 3dBi, Directional gain=[10log(GA+ G B)] dbi =6.01dbi



5725-5850MHz					
Operating mode	Test Channel MHz	Output Power			Limit (dBm)
		Chain A(dBm)	Chain B(dBm)	Total(dBm)	
802.11a	5745	16.41	16.39	/	30
	5785	15.25	15.94	/	30
	5825	15.86	15.77	/	30
802.11n-HT20	5745	16.37	16.37	19.38	29.99
	5785	16.06	16.05	19.07	29.99
	5825	15.64	16.04	18.85	29.99
802.11n-HT40	5755	15.73	15.39	18.57	29.99
	5795	15.09	14.97	18.04	29.99

Antenna A gain: 3dBi, Antenna B gain: 3dBi, Directional gain= $[10\log(GA+G B)]$ dbi =6.01dbi



7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP





7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC 3.3V

5.2G


5.15~5.25 GHz

(802.11a) Band Edge, Left Side

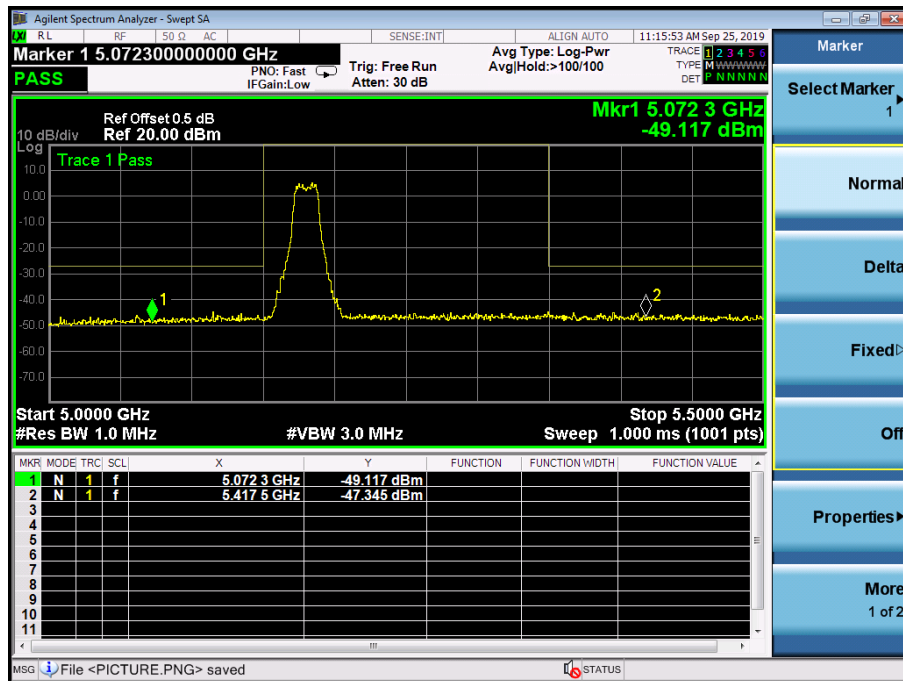




(802.11n20) Band Edge, Left Side

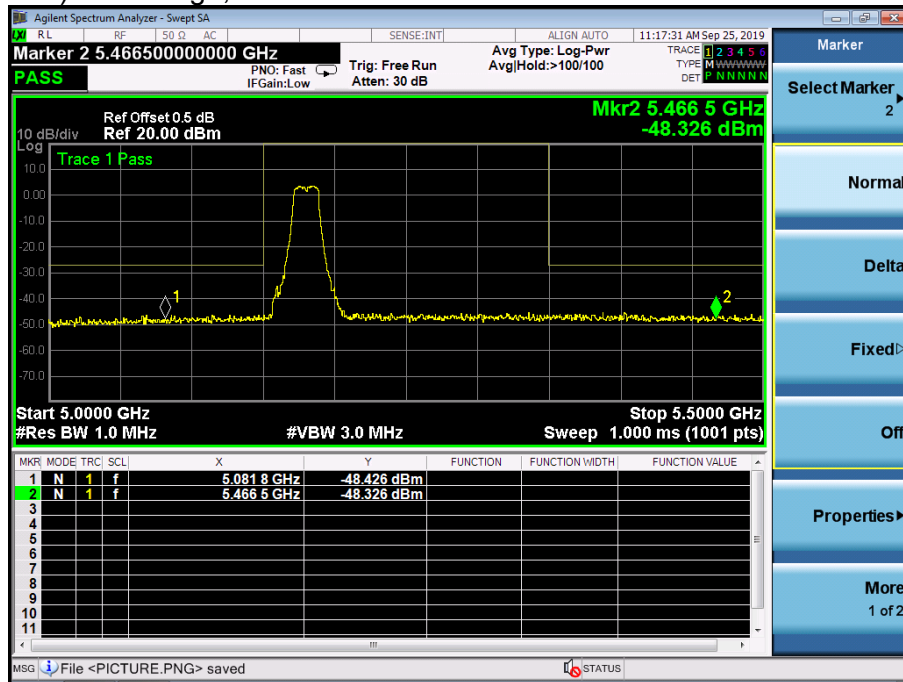


(802.11a) Band Edge, Right Side

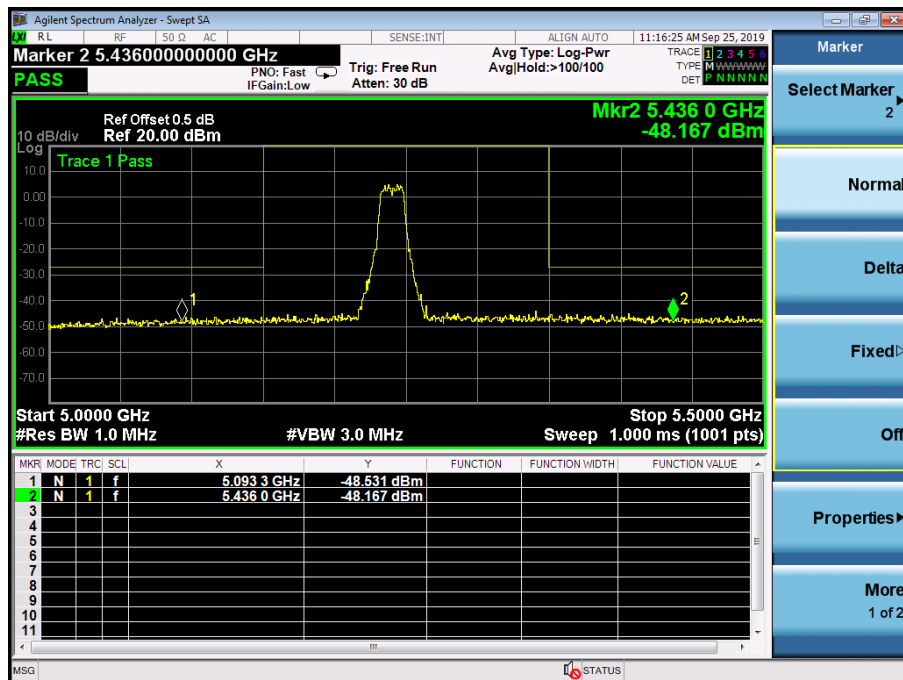




(802.11n20) Band Edge, Right Side

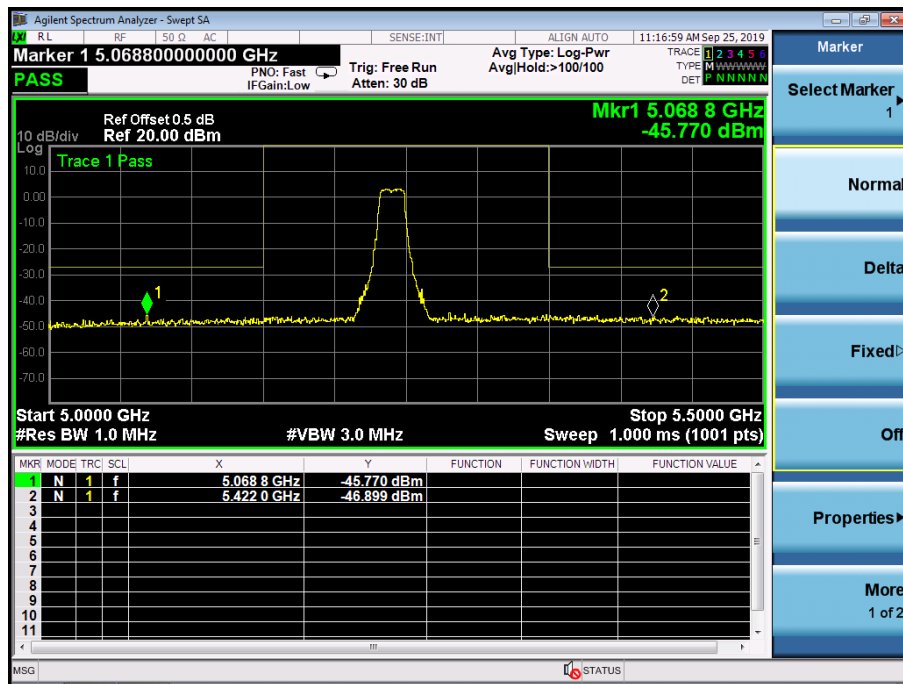


5.15~5.25 GHz

(802.11n40) Band Edge, Left Side

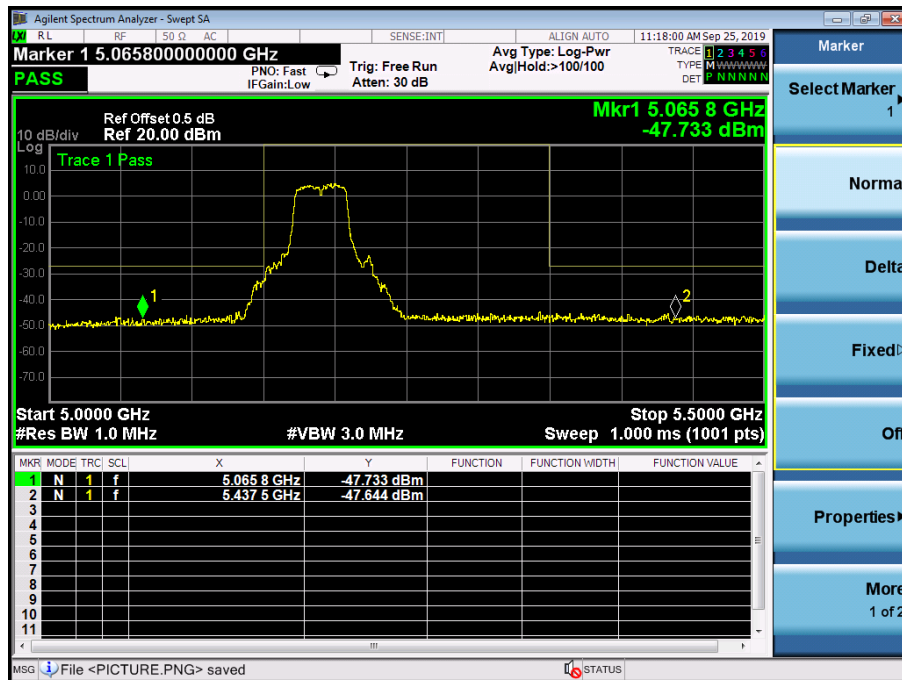



(802.11n40) Band Edge, Right Side

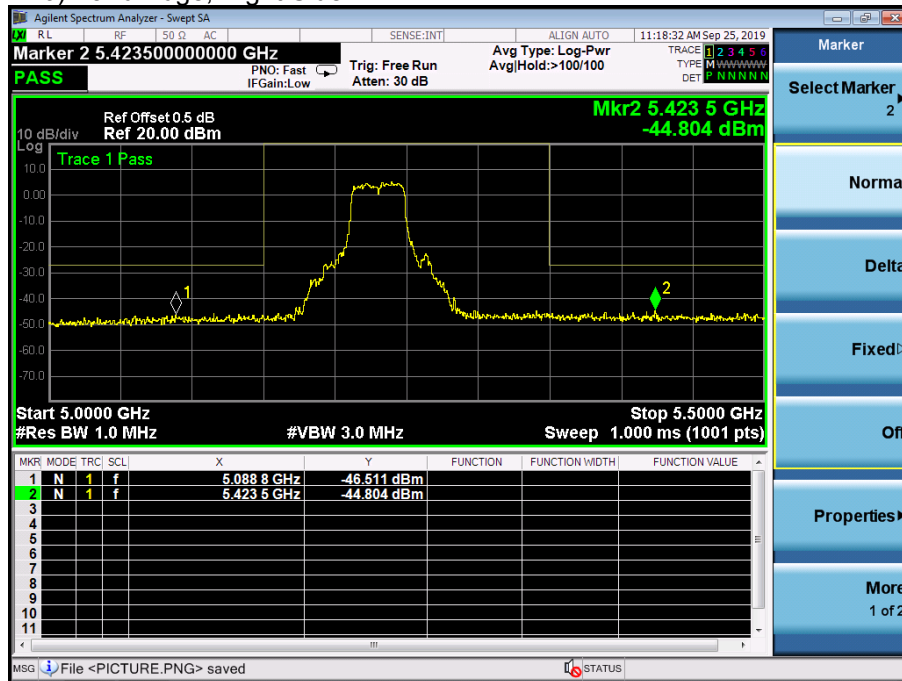


Antenna A: 5725-5850MHz

5.8G


5.75~5.85 GHz

(802.11a) Band Edge, Left Side

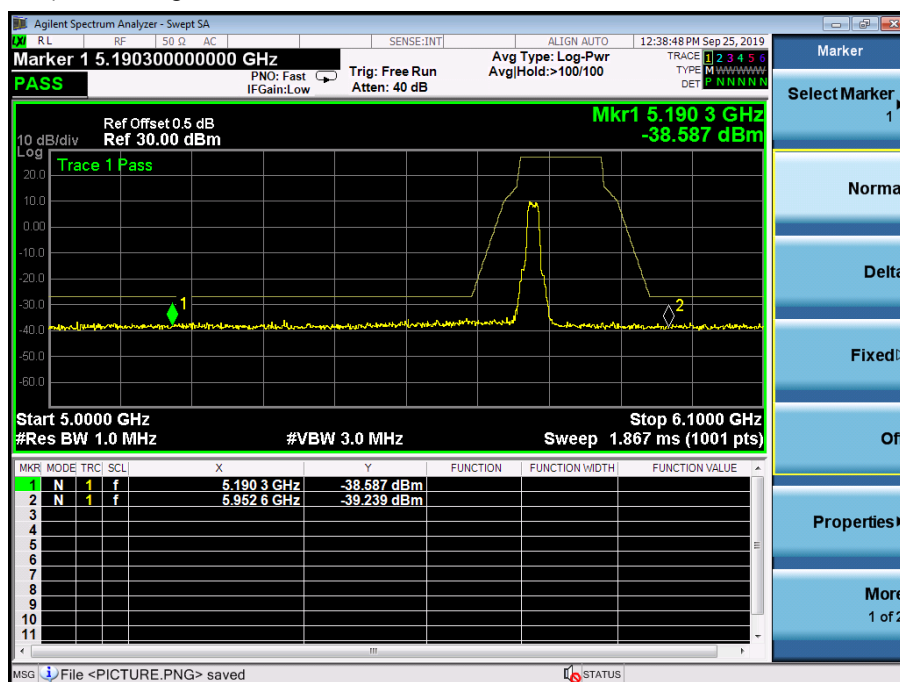




(802.11n20) Band Edge, Left Side

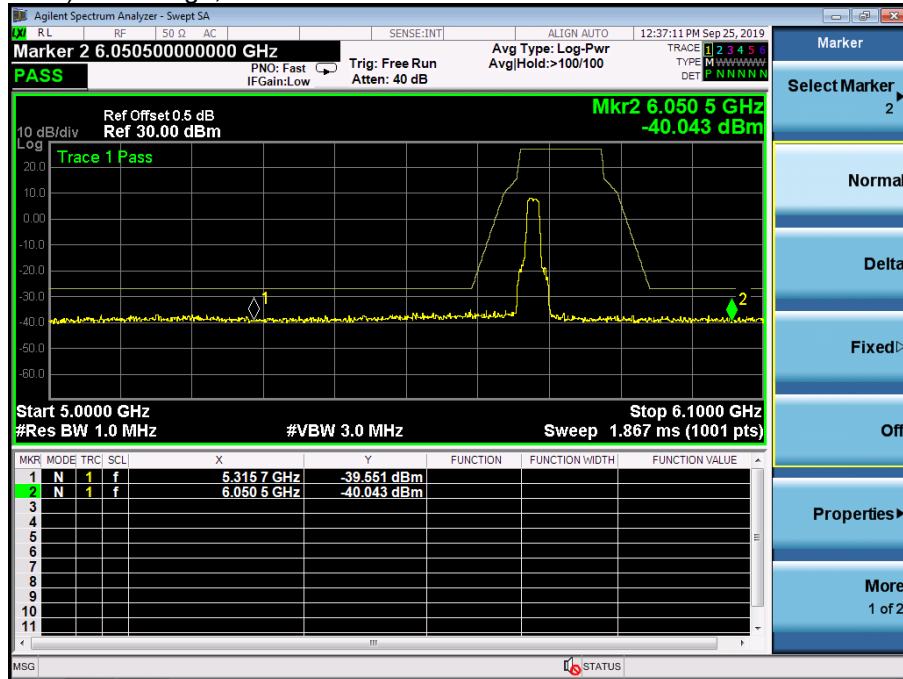


(802.11a) Band Edge, Right Side

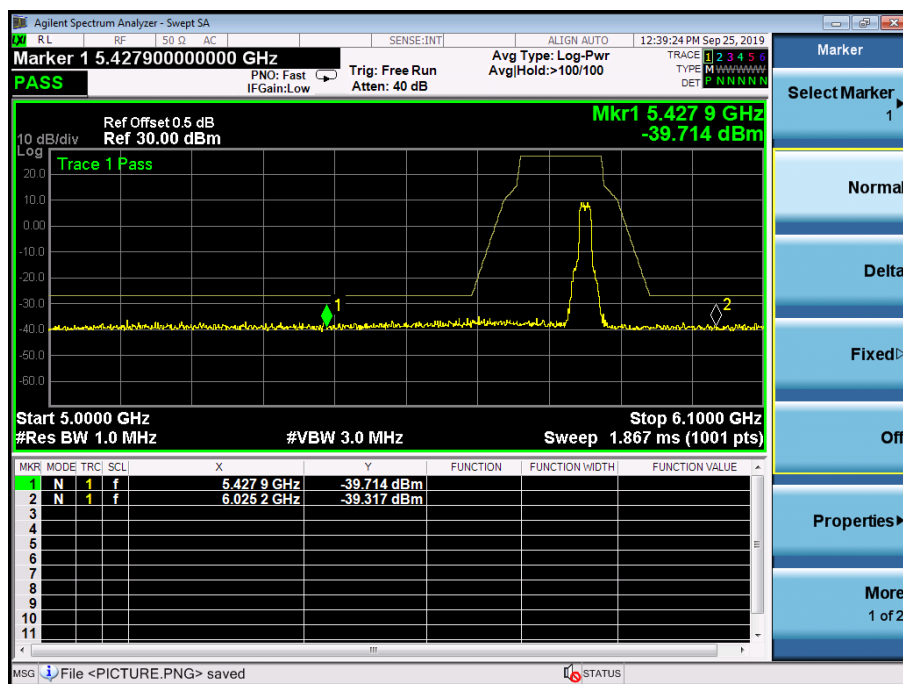




(802.11n20) Band Edge, Right Side

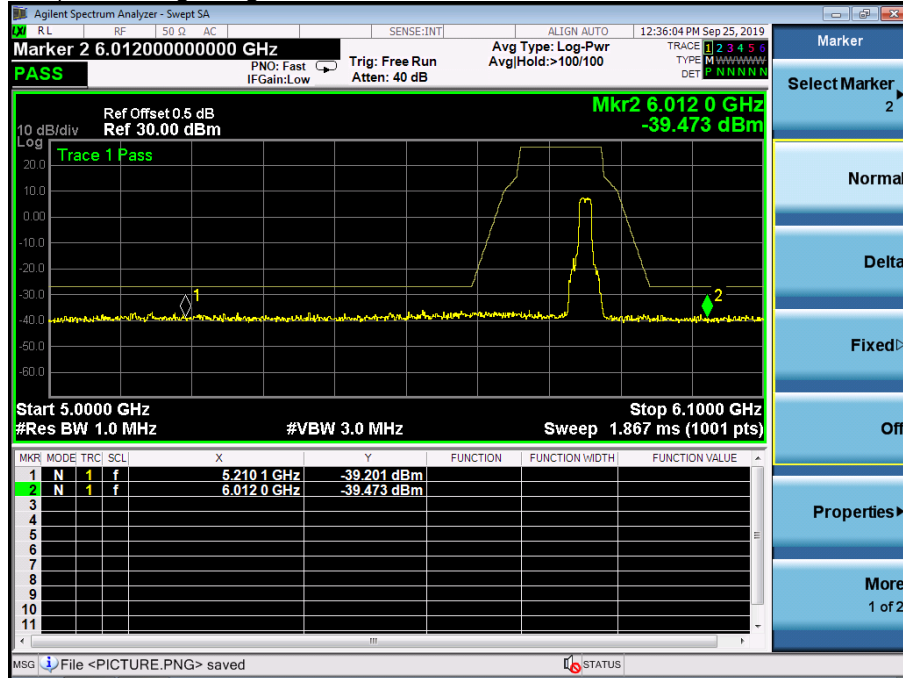


5.75~5.85 GHz

(802.11n40) Band Edge, Left Side

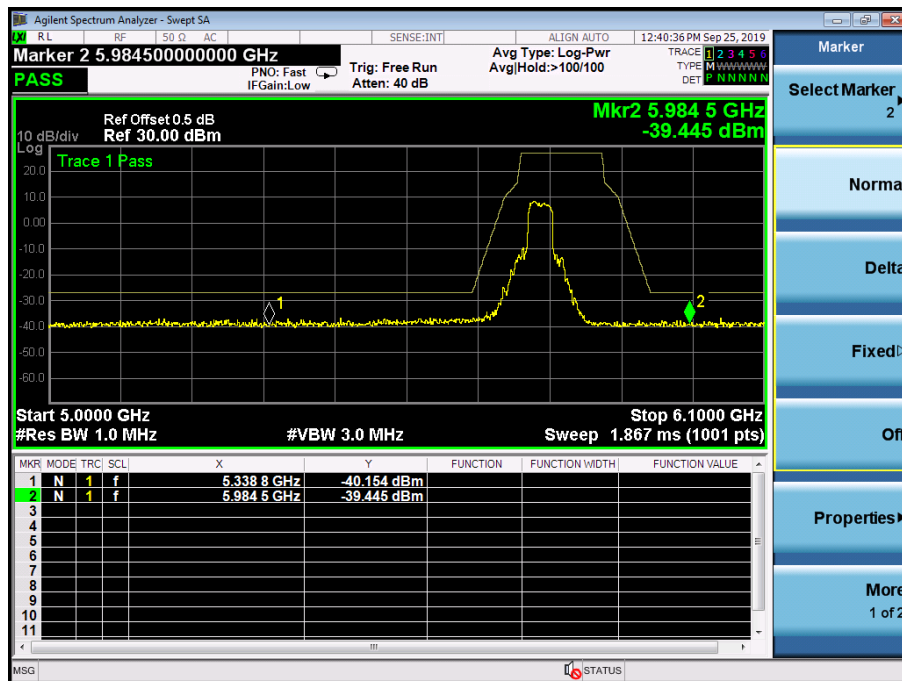



(802.11n40) Band Edge, Right Side

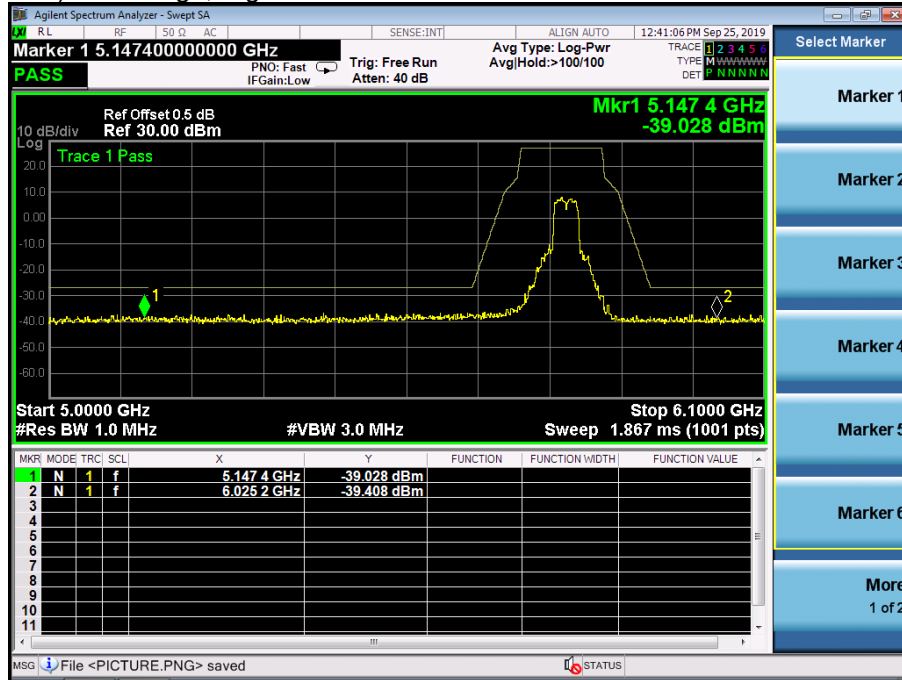




Antenna B: 5150-5250MHz


5.2G

5.15~5.25 GHz

(802.11a) Band Edge, Left Side

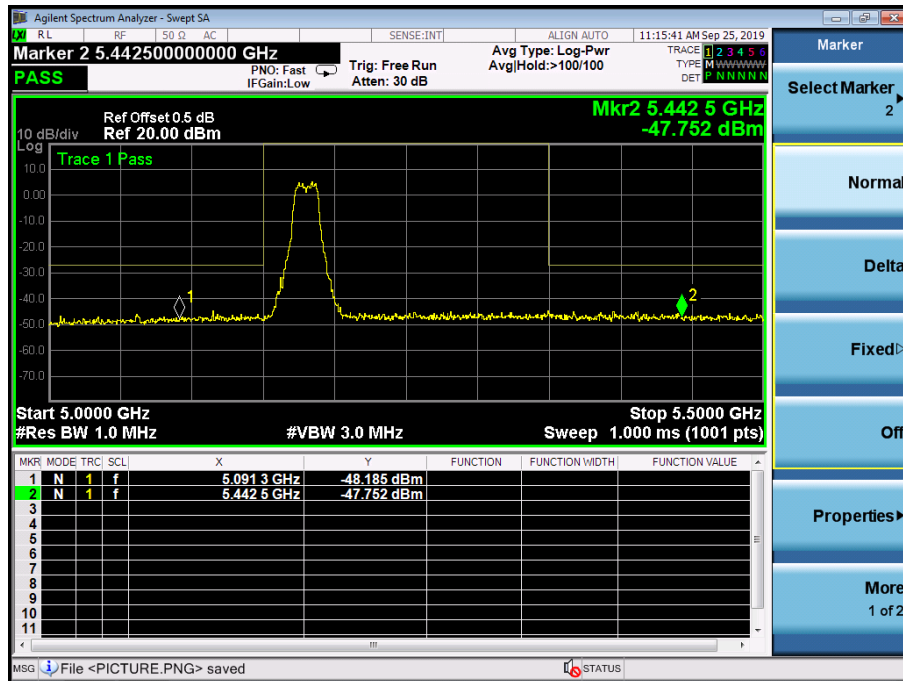


(802.11n20) Band Edge, Left Side

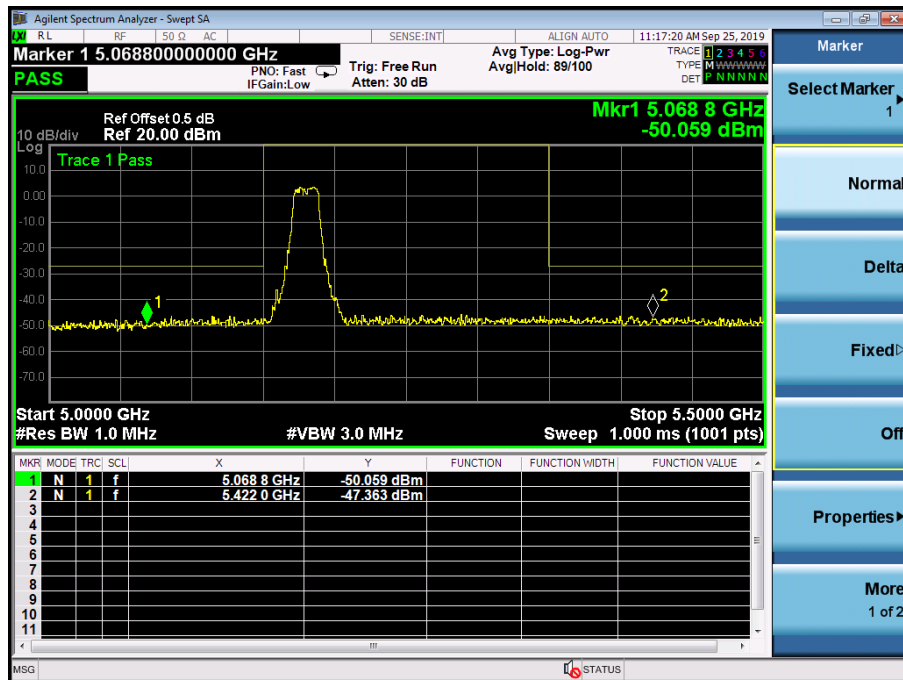




(802.11a) Band Edge, Right Side

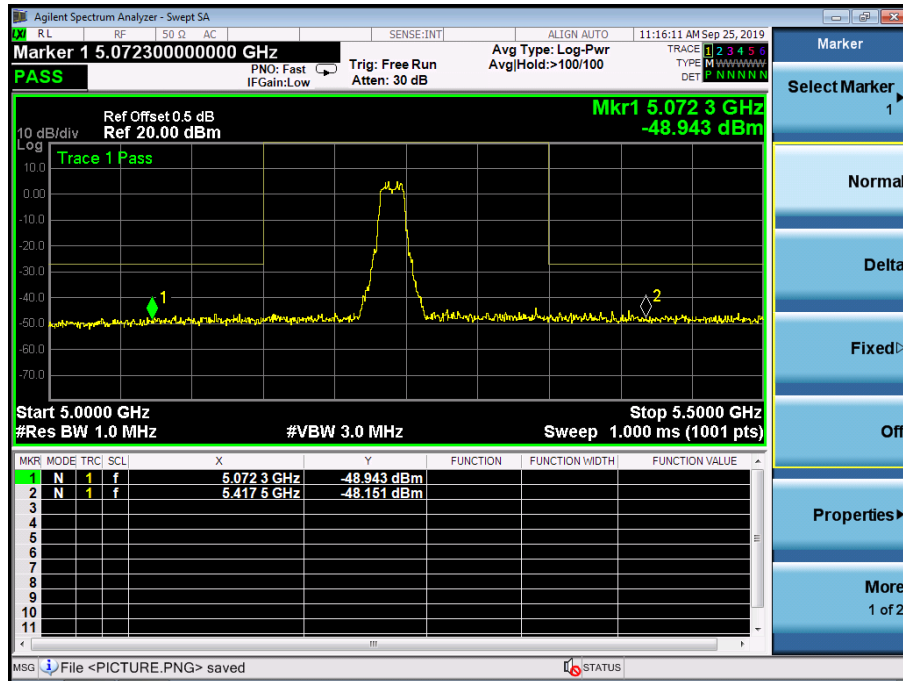


(802.11n20) Band Edge, Right Side

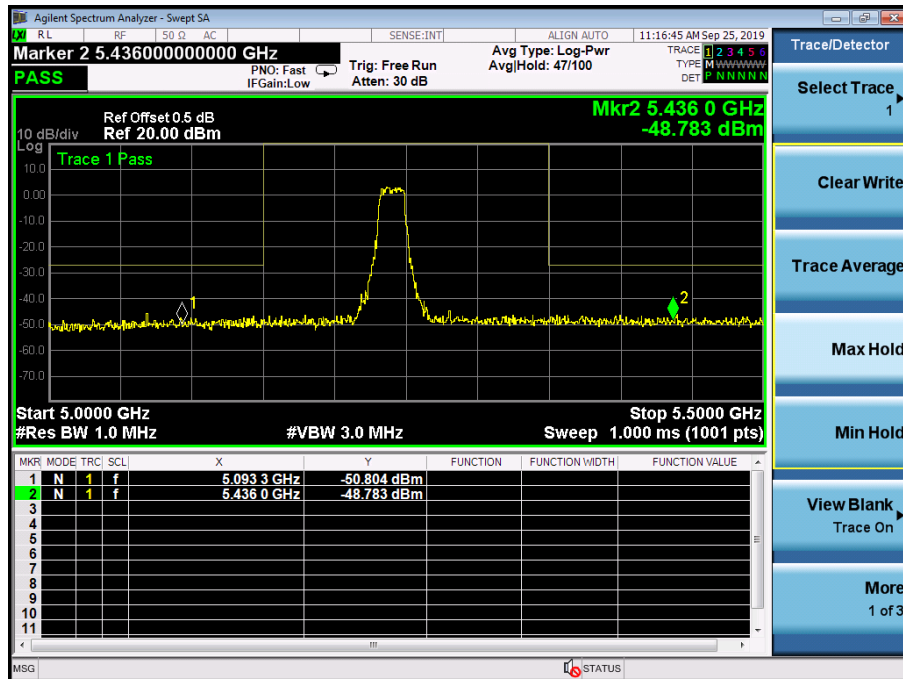




5.15~5.25 GHz

(802.11n40) Band Edge, Left Side

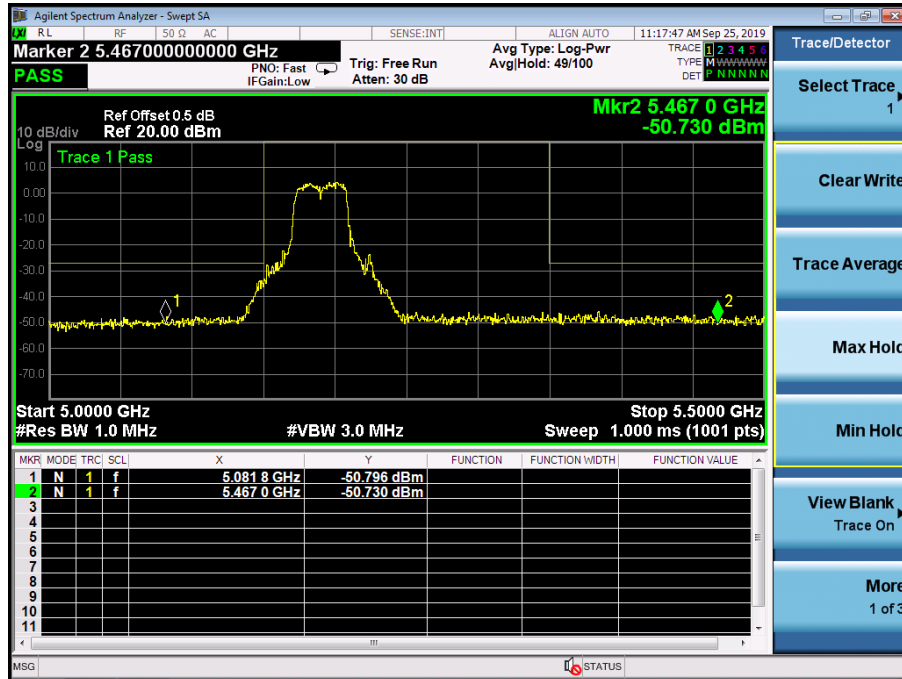

(802.11n40) Band Edge, Right Side

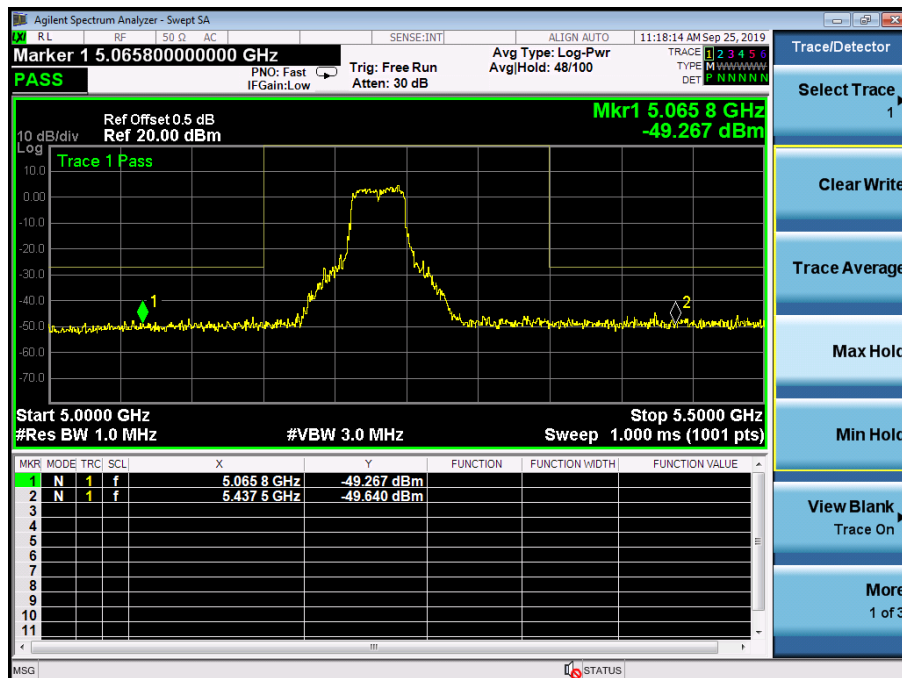




Antenna B: 5725-5850MHz


5.8G

5.75~5.85 GHz

(802.11a) Band Edge, Left Side

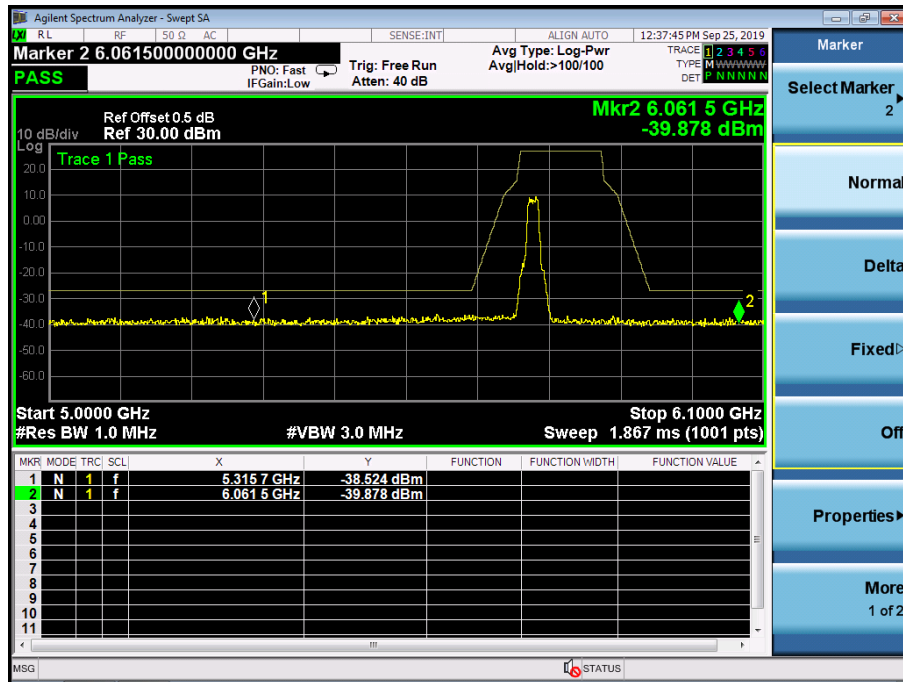


(802.11n20) Band Edge, Left Side

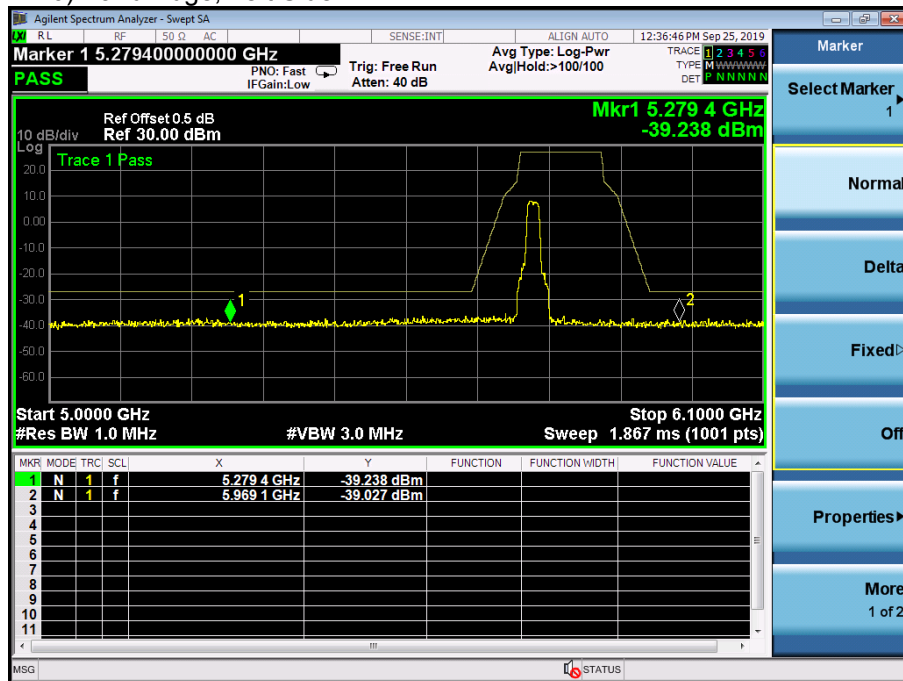




(802.11a) Band Edge, Right Side

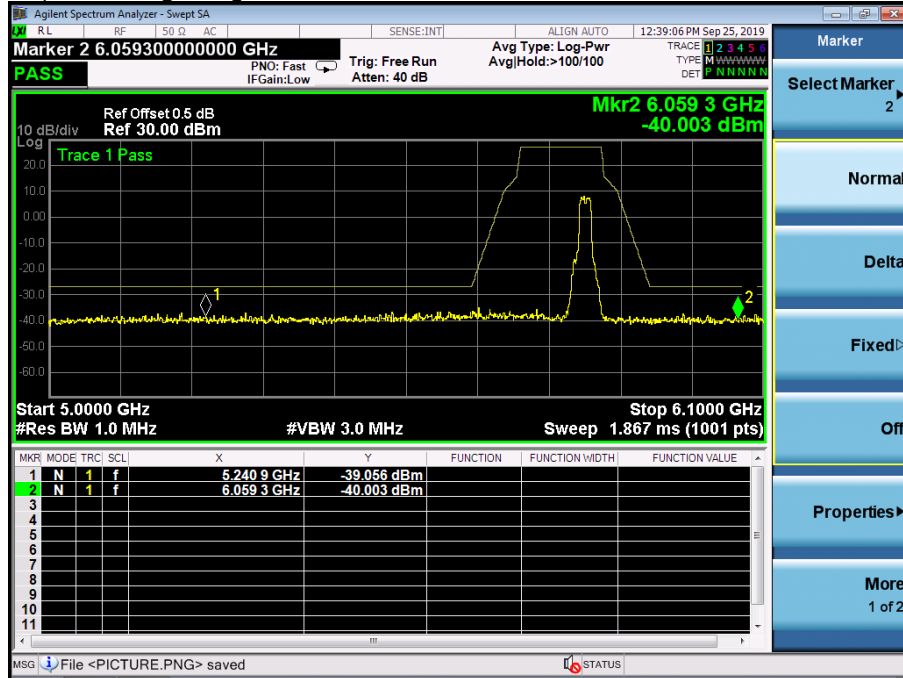


(802.11n20) Band Edge, Right Side

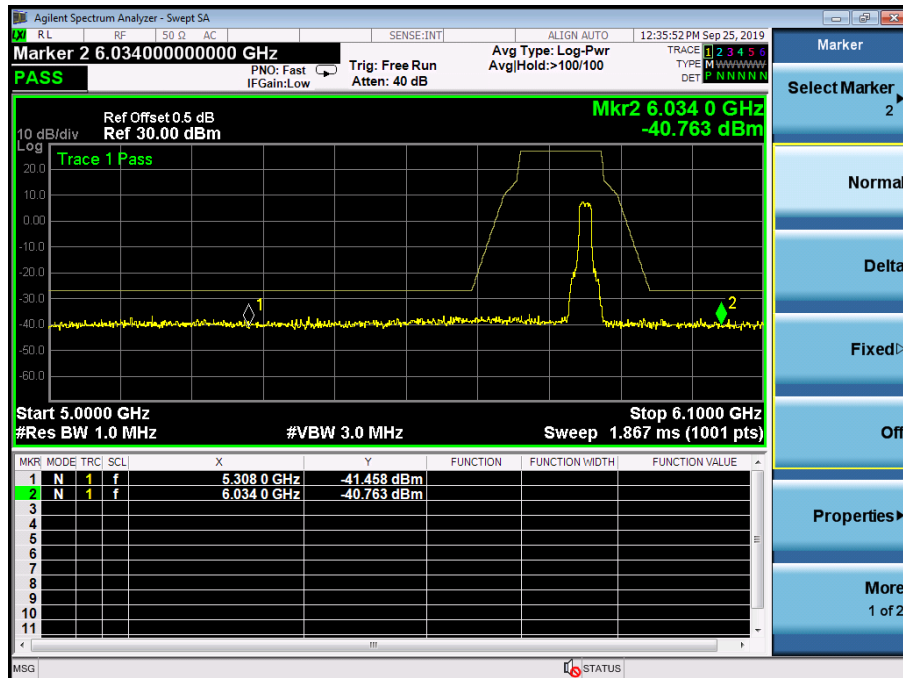




5.75~5.85 GHz

(802.11n40) Band Edge, Left Side

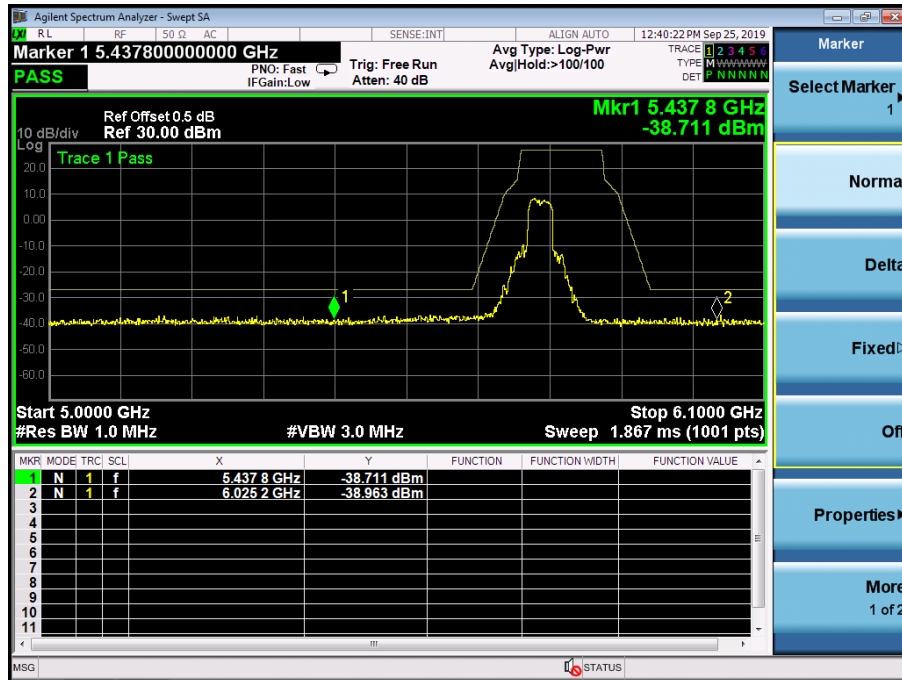

(802.11n40) Band Edge, Right Side

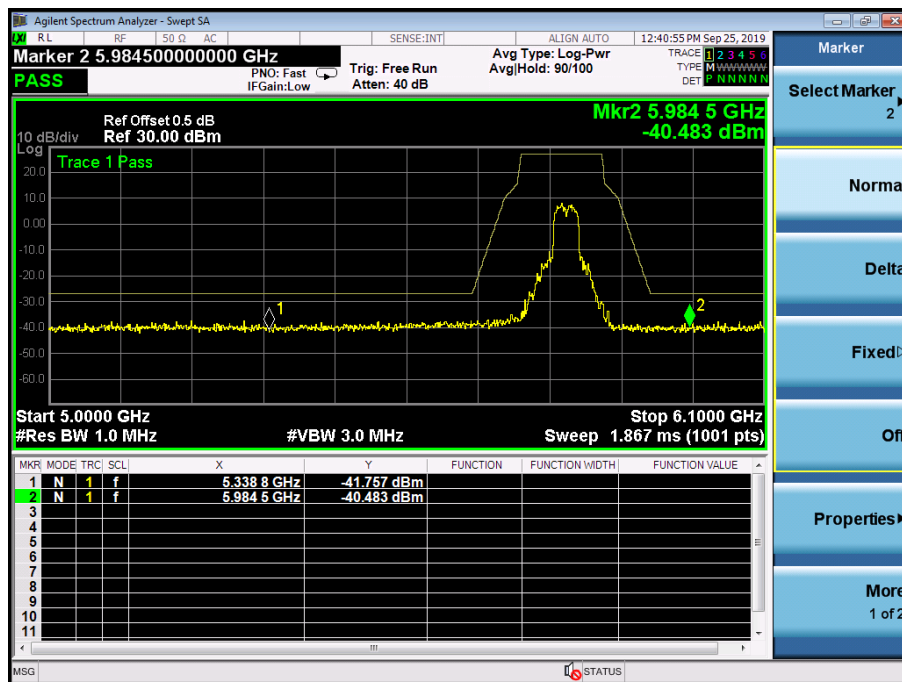



8.SPURIOUS RF CONDUCTED EMISSIONS

8.1CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

8.2MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

8.3TEST SETUP

Please refer to Section 6.1 of this test report.

8.4TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

8.5TEST RESULTS


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.




5.2G

Test Plot


802.11a on channel 36

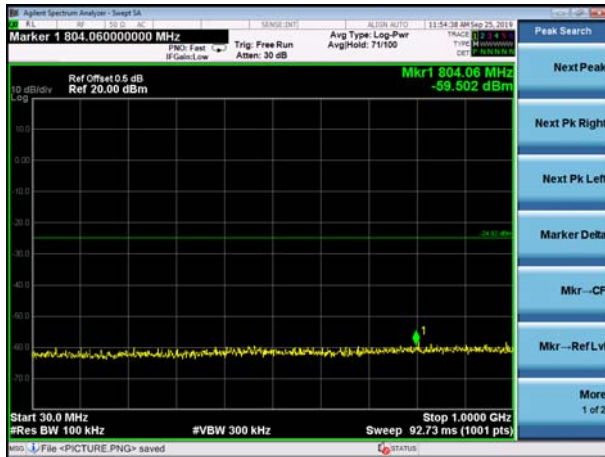

802.11a on channel 40

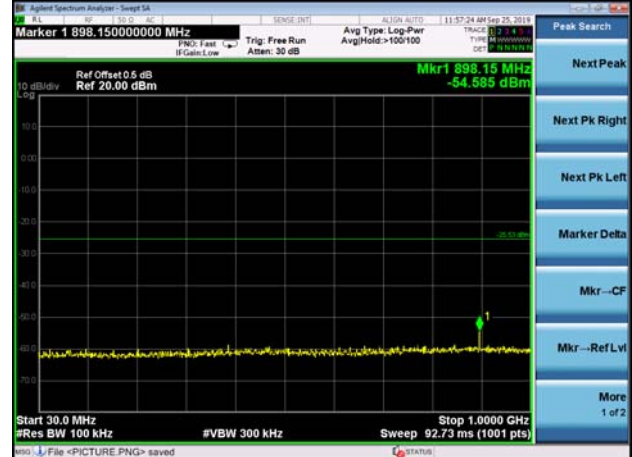

802.11a on channel 36

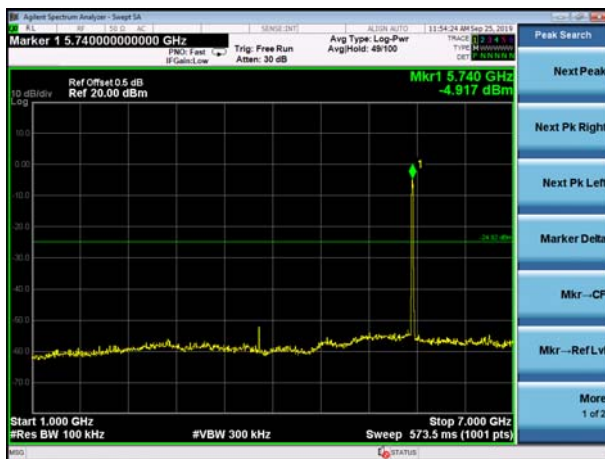

802.11a on channel 40



802.11a on channel 36




802.11a on channel 40






Test Plot


802.11a on channel 48

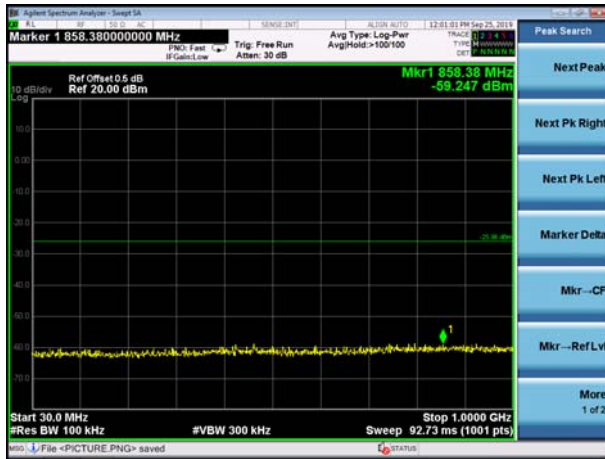


802.11n20 on channel 36

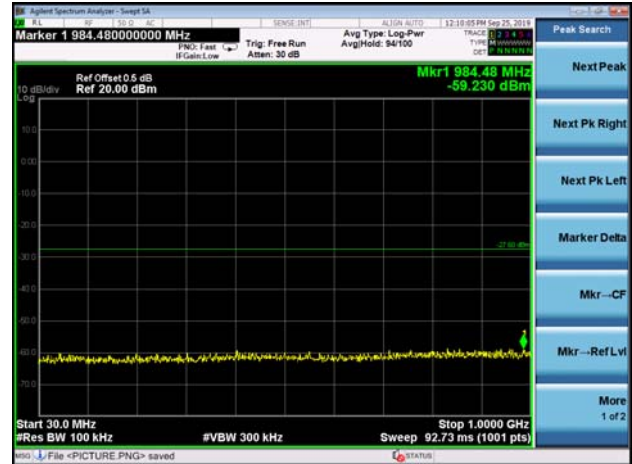

802.11a on channel 48

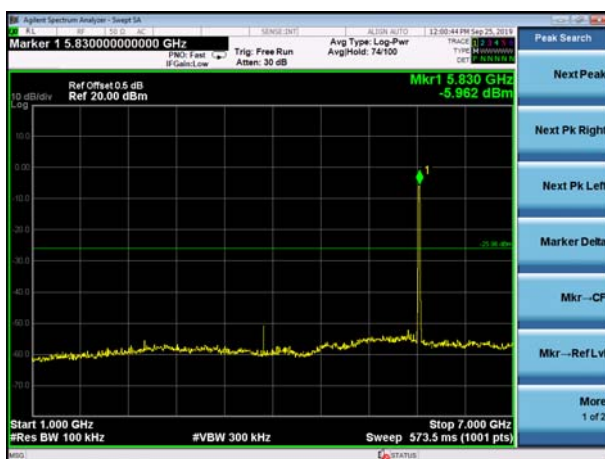

802.11n20 on channel 36

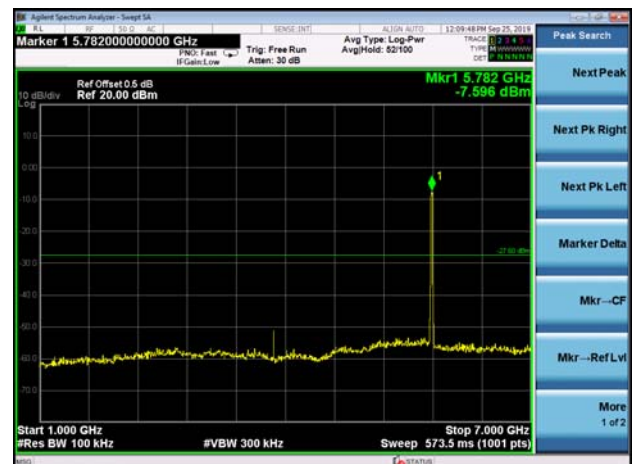

802.11a on channel 48




802.11n20 on channel 36






Test Plot


802.11n20 on channel 40

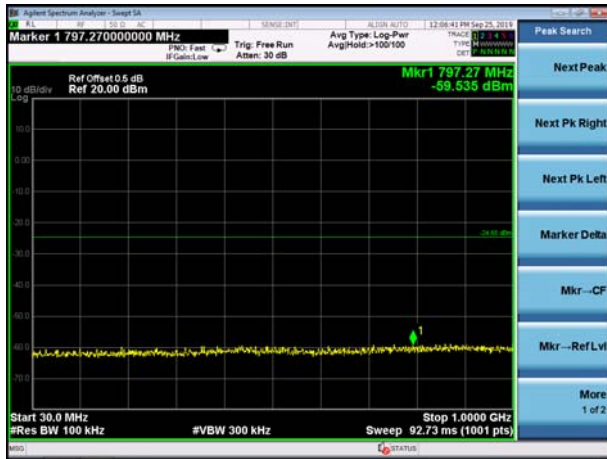

802.11n20 on channel 48

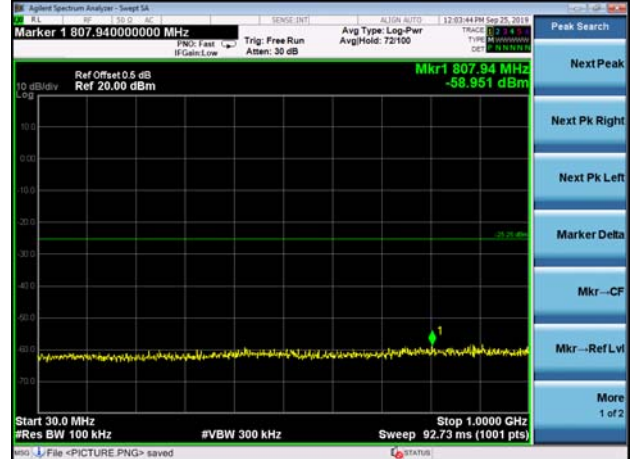

802.11n20 on channel 40

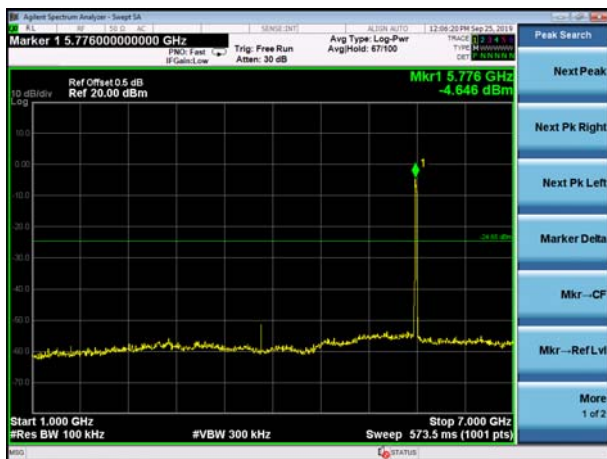

802.11n20 on channel 48



802.11n20 on channel 40




802.11n20 on channel 48






Test Plot

802.11n40 on channel 38

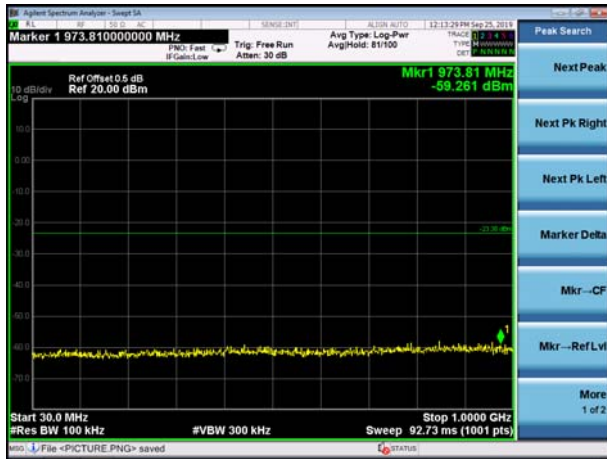


802.11n40 on channel 46

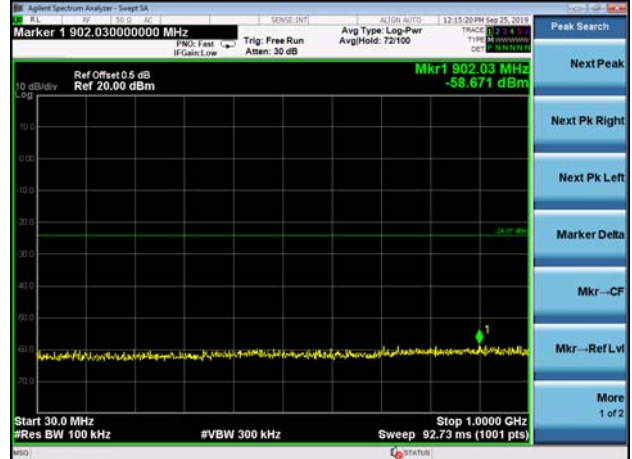

802.11n40 on channel 38



802.11n40 on channel 46

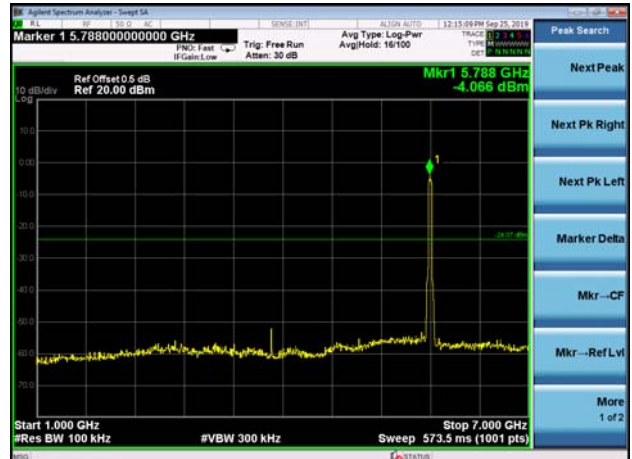

802.11n40 on channel 38



802.11n40 on channel 46







5.8G

Test Plot


802.11a on channel 149

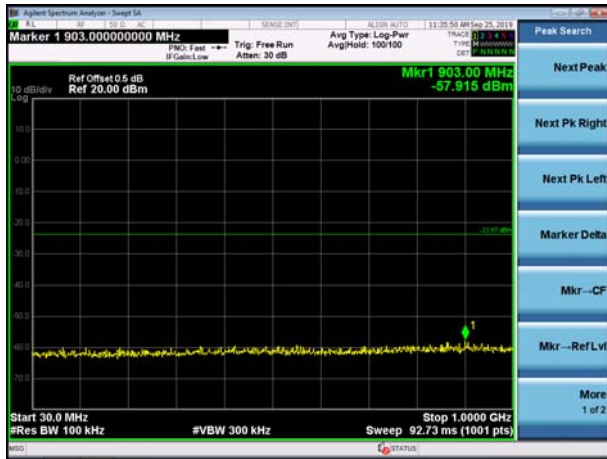

802.11a on channel 157

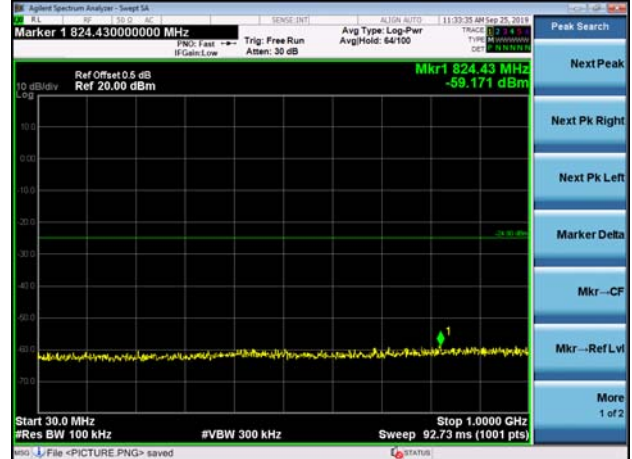

802.11a on channel 149

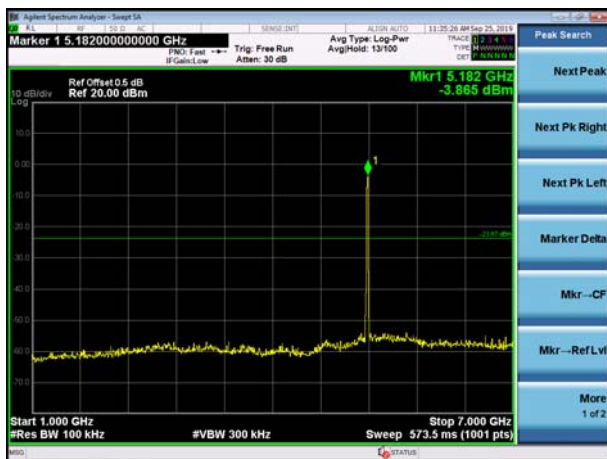

802.11a on channel 157



802.11a on channel 149




802.11a on channel 157






Test Plot


802.11a on channel 165

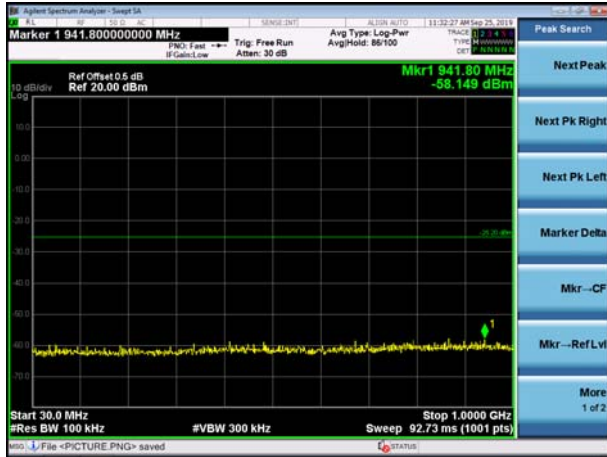

802.11n20 on channel 149

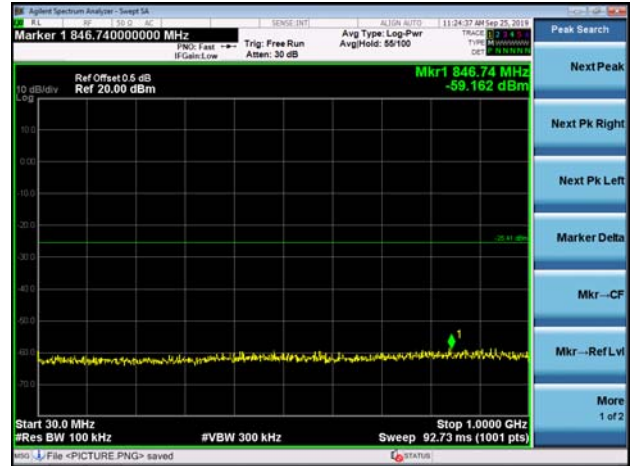

802.11a on channel 165

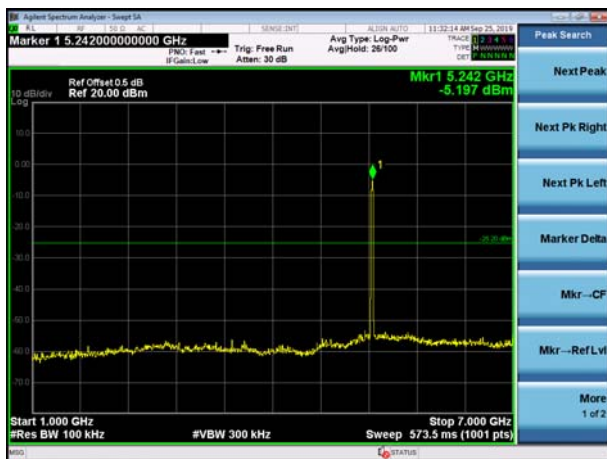

802.11n20 on channel 149



802.11a on channel 165




802.11n20 on channel 149






Test Plot


802.11n20 on channel 157

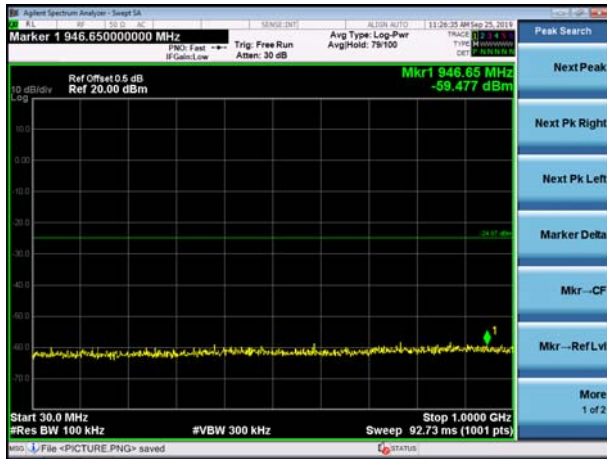

802.11n20 on channel 165

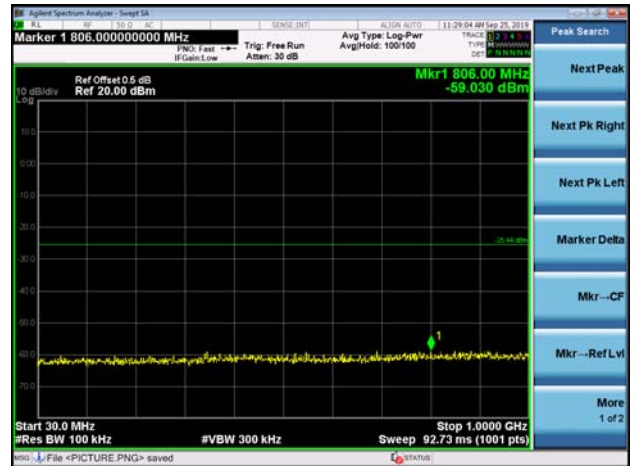

802.11n20 on channel 157

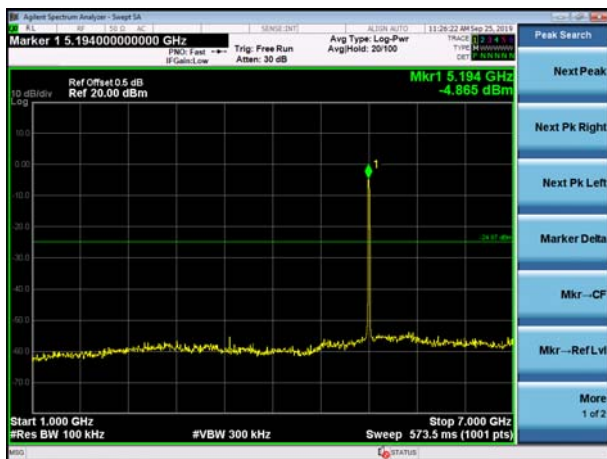

802.11n20 on channel 165



802.11n20 on channel 157




802.11n20 on channel 165






Test Plot


802.11n40 on channel 151

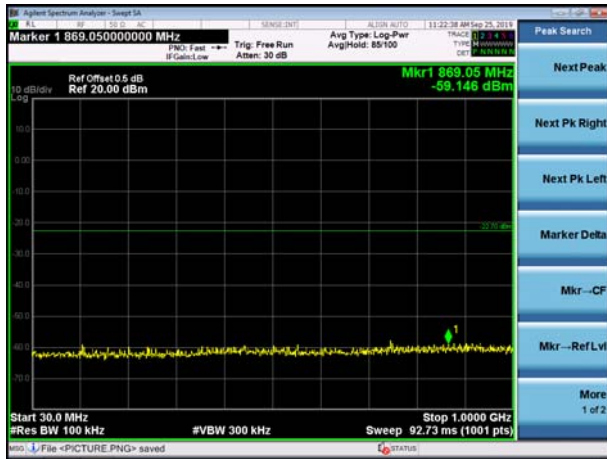


802.11n40 on channel 159

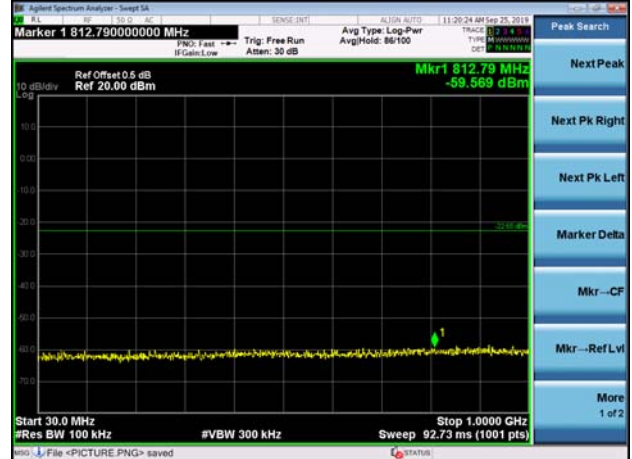

802.11n40 on channel 151

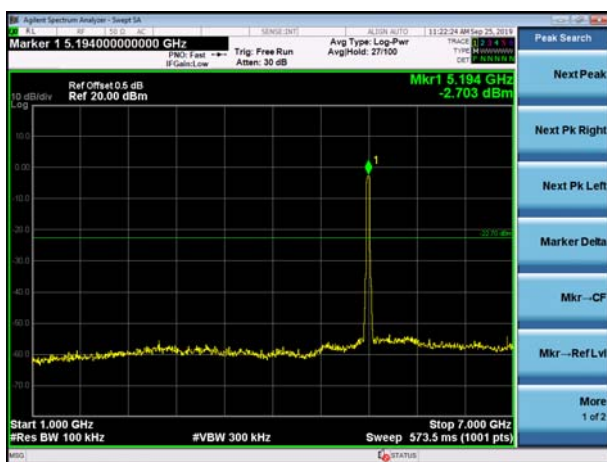

802.11n40 on channel 159

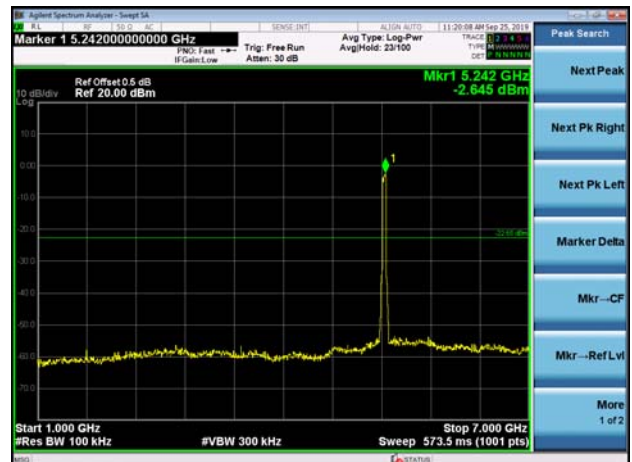

802.11n40 on channel 151



802.11n40 on channel 159







5.2G

Test Plot


802.11a on channel 36

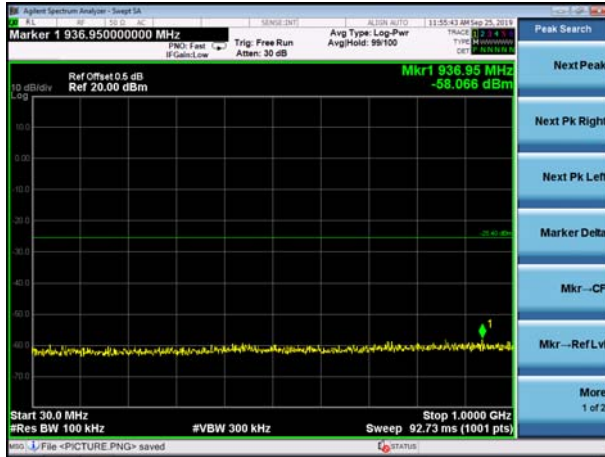

802.11a on channel 40

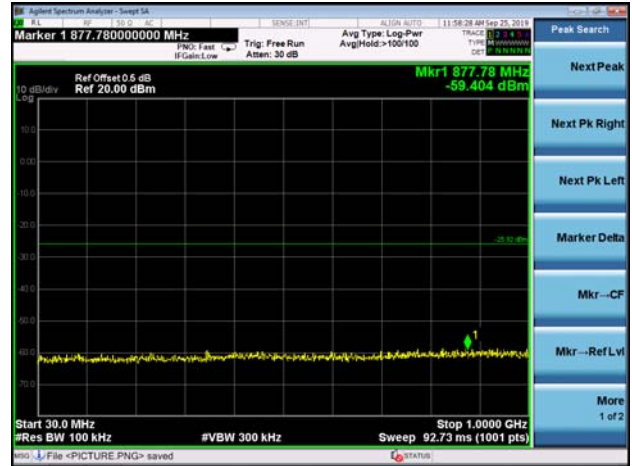

802.11a on channel 36

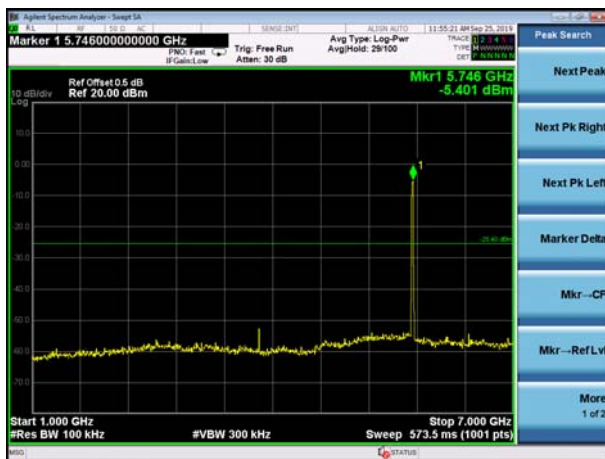

802.11a on channel 40



802.11a on channel 36




802.11a on channel 40






Test Plot

802.11a on channel 48

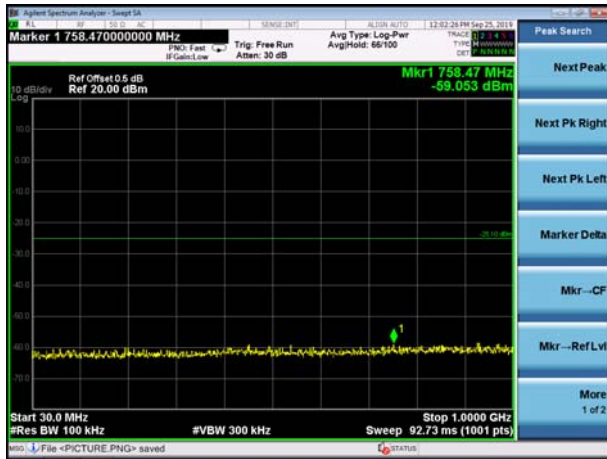

802.11n20 on channel 36

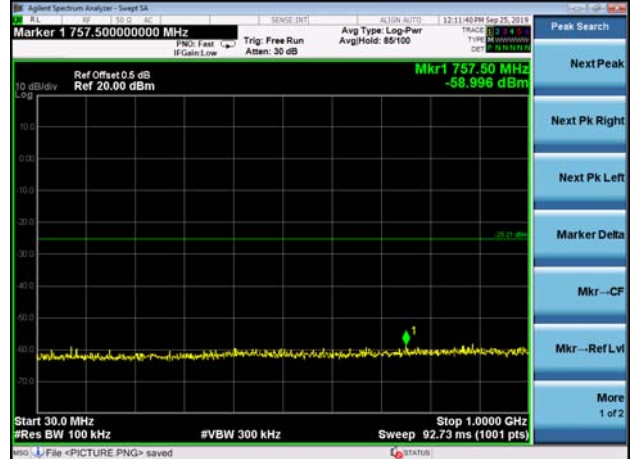

802.11a on channel 48



802.11n20 on channel 36



802.11a on channel 48




802.11n20 on channel 36






Test Plot


802.11n20 on channel 40

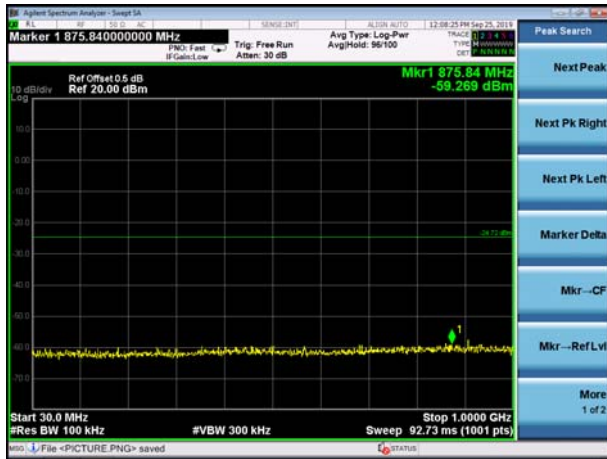


802.11n20 on channel 48

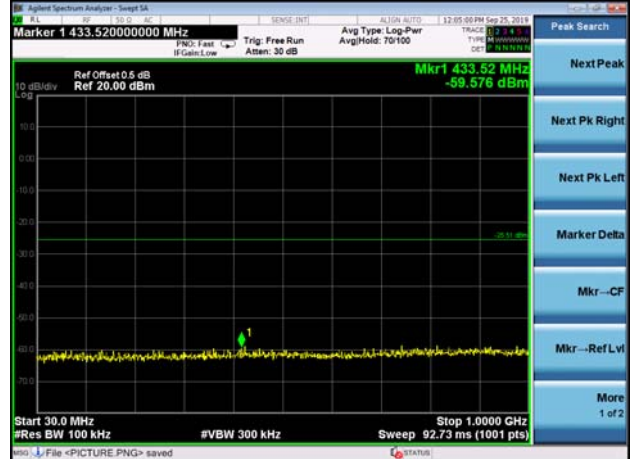

802.11n20 on channel 40

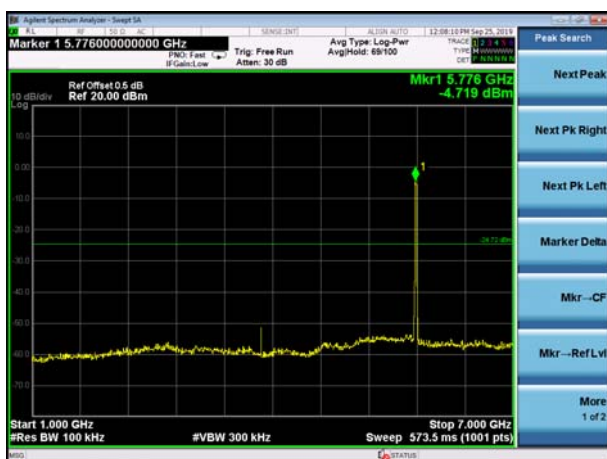

802.11n20 on channel 48

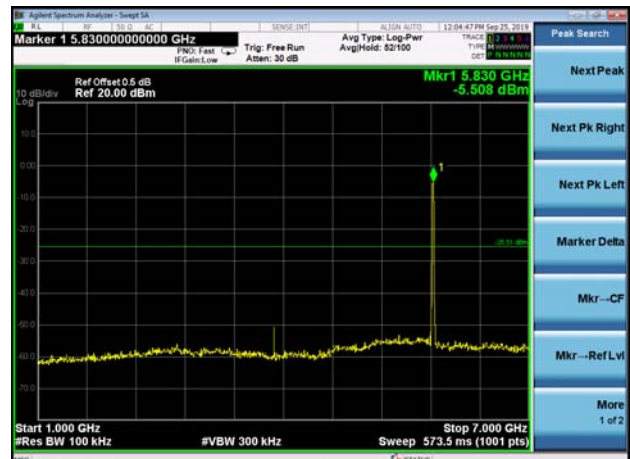

802.11n20 on channel 40




802.11n20 on channel 48






Test Plot


802.11n40 on channel 38

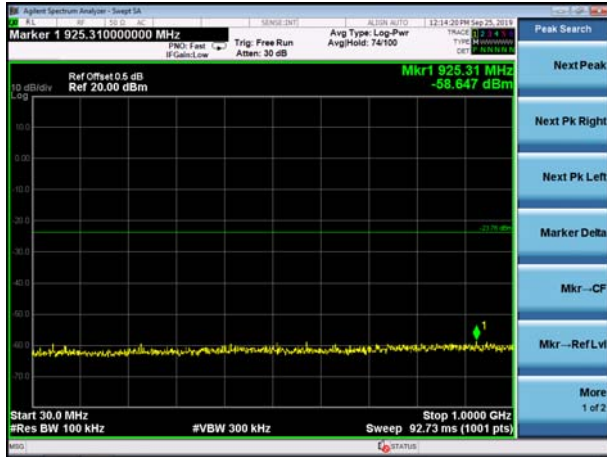


802.11n40 on channel 46

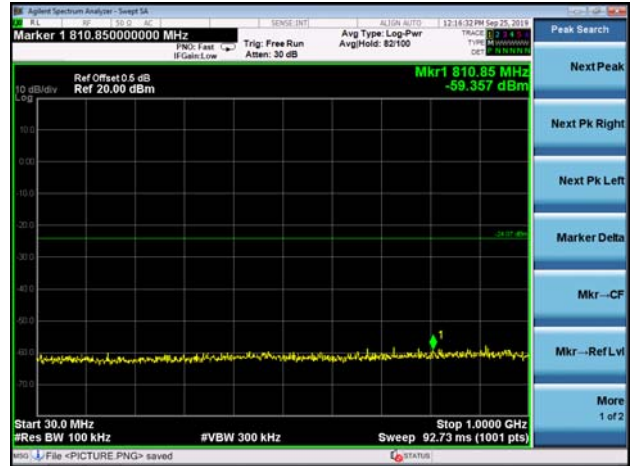

802.11n40 on channel 38

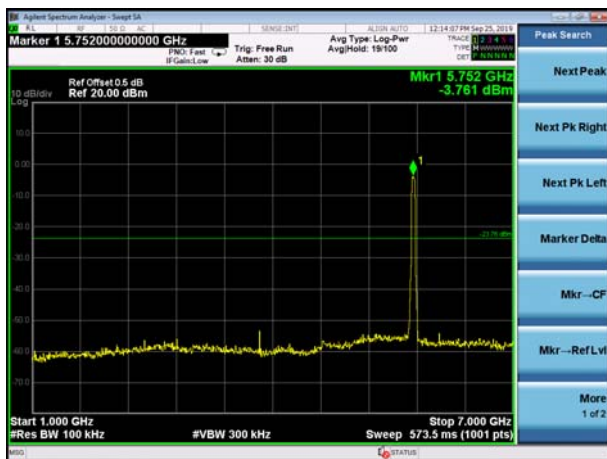

802.11n40 on channel 46

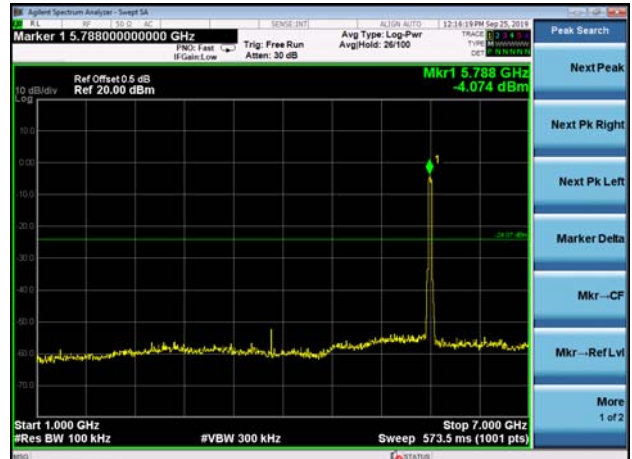

802.11n40 on channel 38



802.11n40 on channel 46







5.8G

Test Plot


802.11a on channel 149

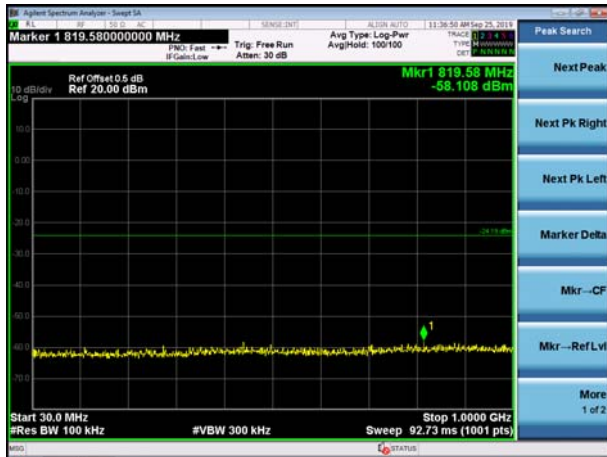

802.11a on channel 157

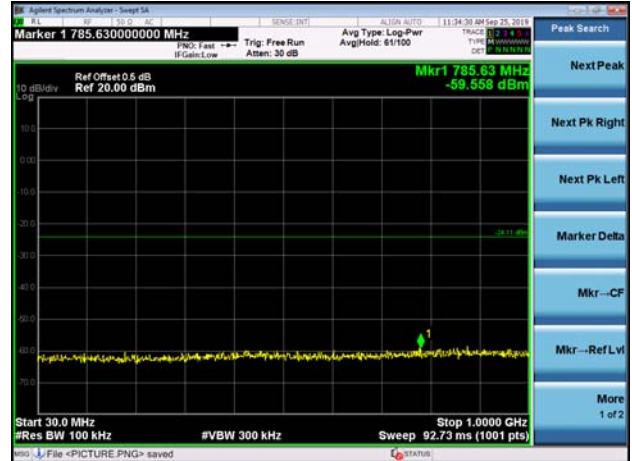

802.11a on channel 149

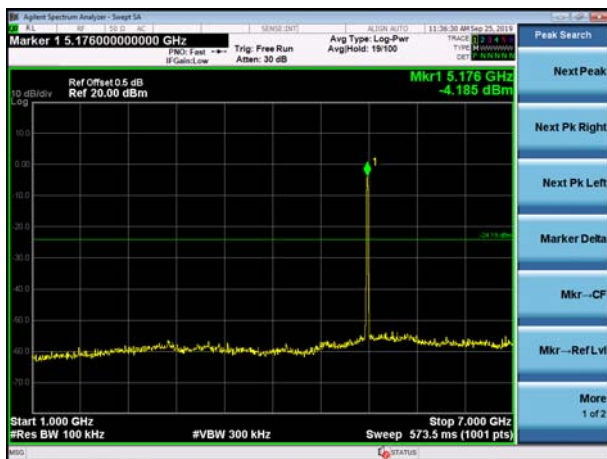

802.11a on channel 157



802.11a on channel 149




802.11a on channel 157






Test Plot

802.11a on channel 165

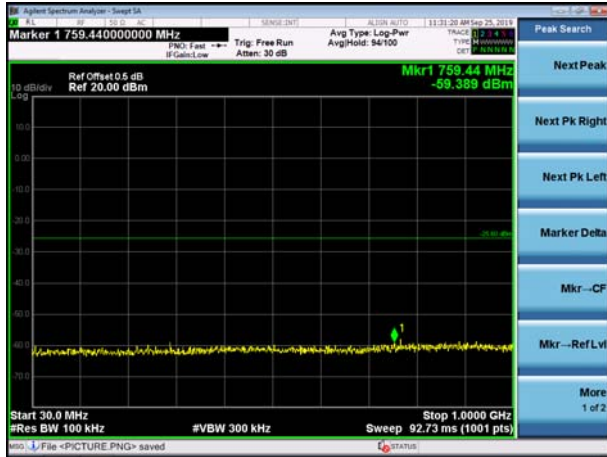


802.11n20 on channel 149

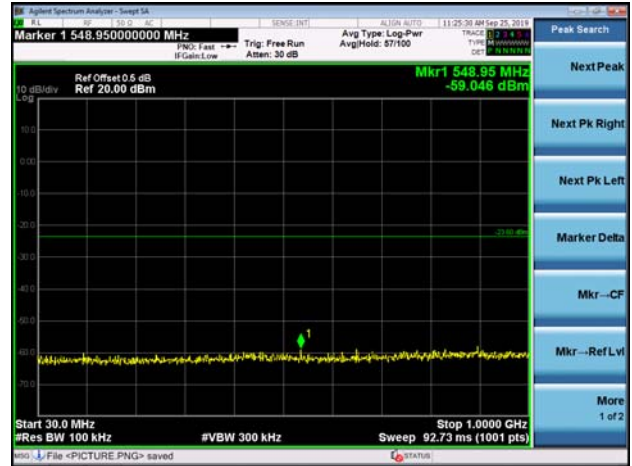

802.11a on channel 165



802.11n20 on channel 149

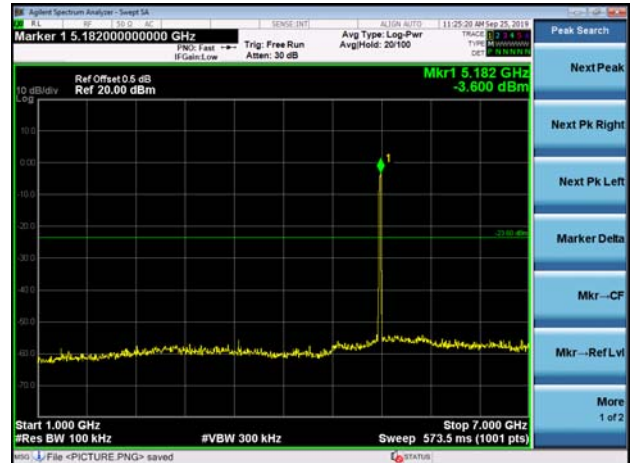

802.11a on channel 165




802.11n20 on channel 149






Test Plot


802.11n20 on channel 157

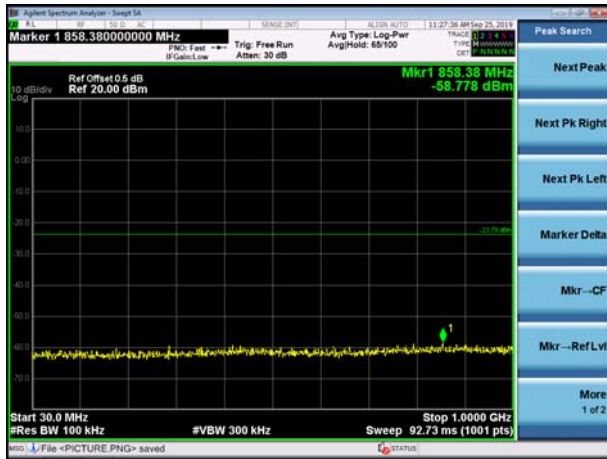


802.11n20 on channel 165

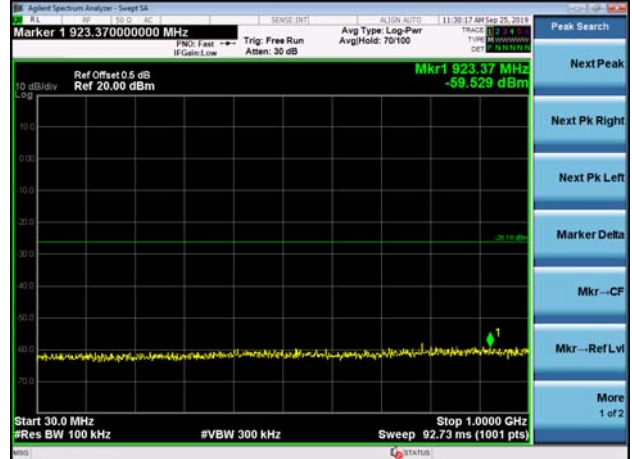

802.11n20 on channel 157

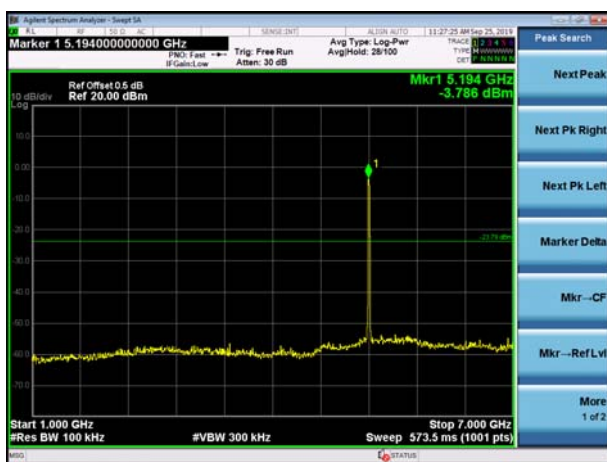

802.11n20 on channel 165

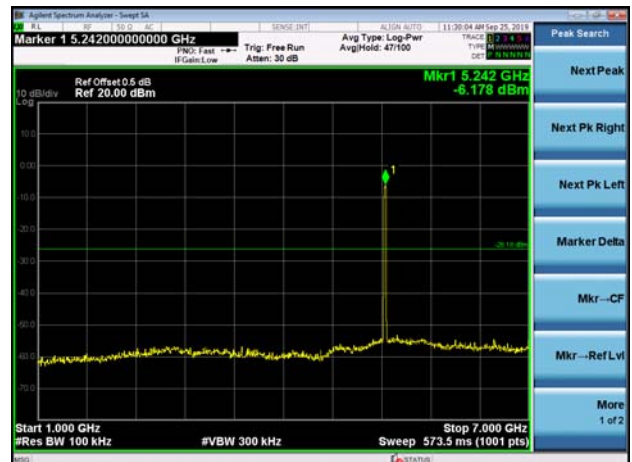

802.11n20 on channel 157




802.11n20 on channel 165






Test Plot


802.11n40 on channel 151

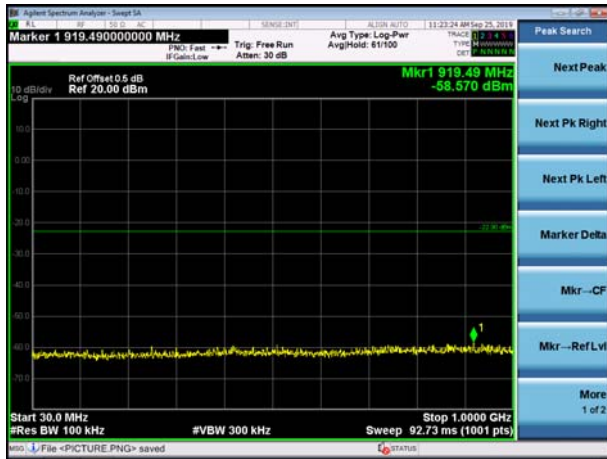


802.11n40 on channel 159

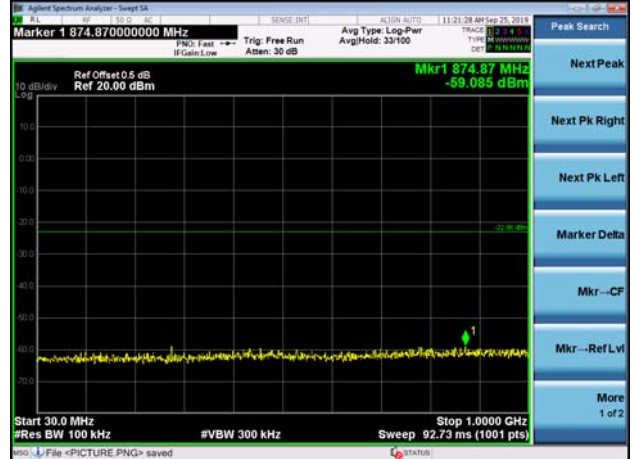

802.11n40 on channel 151

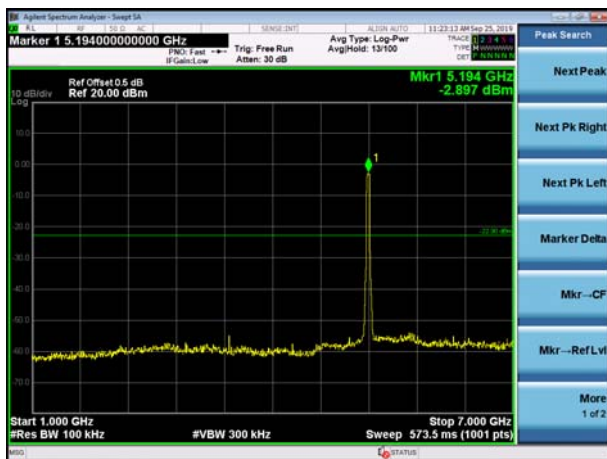

802.11n40 on channel 159

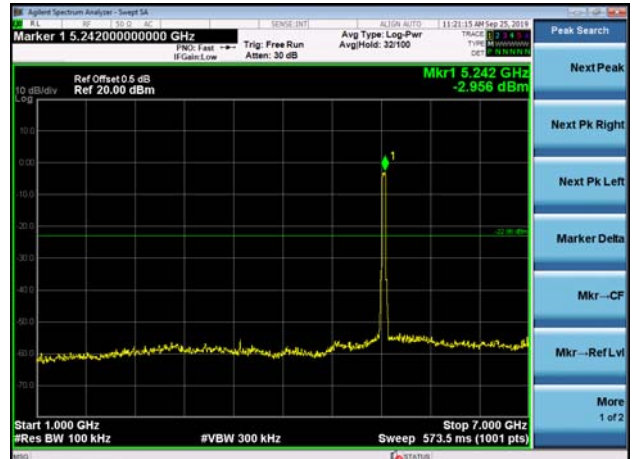

802.11n40 on channel 151



802.11n40 on channel 159





9. Frequency Stability Measurement

9.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

9.3 TEST SETUP LAYOUT

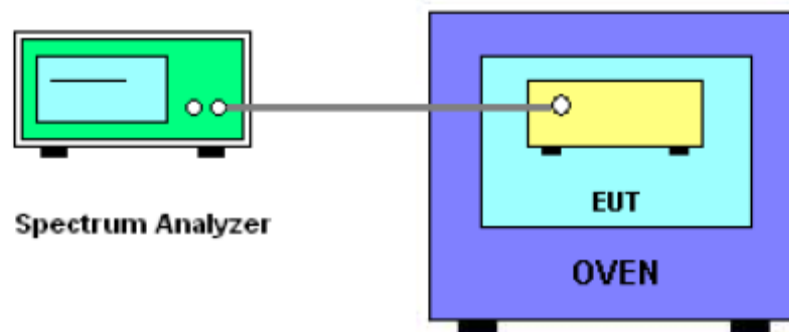

9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.



9.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.30	5180.0523	5180	0.0523	-10.0965
		V max (V)	3.80	5180.0324	5180	0.0324	-6.2548
		V min (V)	2.81	5180.0242	5180	0.0242	-4.6718
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5180.0052	5180	0.0052	-1.0039
		T (°C)	-10	5180.0104	5180	0.0104	-2.0077
		T (°C)	0	5180.0322	5180	0.0322	-6.2162
		T (°C)	10	5180.0384	5180	0.0384	-7.4131
		T (°C)	20	5180.0293	5180	0.0293	-5.6564
		T (°C)	30	5180.0215	5180	0.0215	-4.1506
		T (°C)	40	5180.0122	5180	0.0122	-2.3552
		T (°C)	50	5180.0094	5180	0.0094	-1.8147
		T (°C)	60	5180.0414	5180	0.0414	-7.9923
		T (°C)	70	5180.0696	5180	0.0696	-13.4363
Limits				± 20 ppm			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.30	5200.0252	5200	0.0252	-4.8462
		V max (V)	3.80	5200.0425	5200	0.0425	-8.1731
		V min (V)	2.81	5200.0693	5200	0.0693	-13.3269
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5200.0635	5200	0.0635	-12.2115
		T (°C)	-10	5200.0525	5200	0.0525	-10.0962
		T (°C)	0	5200.0434	5200	0.0434	-8.3462
		T (°C)	10	5200.0923	5200	0.0923	-17.7500
		T (°C)	20	5200.0637	5200	0.0637	-12.2500
		T (°C)	30	5200.0123	5200	0.0123	-2.3654
		T (°C)	40	5200.0736	5200	0.0736	-14.1538
		T (°C)	50	5200.0413	5200	0.0413	-7.9423
		T (°C)	60	5200.0328	5200	0.0328	-6.3077
		T (°C)	70	5200.0424	5200	0.0424	-8.1538
Limits				± 20 ppm			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.30	5240.0133	5240	0.0133	-2.5382
		V max (V)	3.80	5240.0412	5240	0.0412	-7.8626
		V min (V)	2.81	5240.0097	5240	0.0097	-1.8511
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5240.0636	5240	0.0636	-12.1374
		T (°C)	-10	5240.0524	5240	0.0524	-10.0000
		T (°C)	0	5240.0438	5240	0.0438	-8.3588
		T (°C)	10	5240.0924	5240	0.0924	-17.6336
		T (°C)	20	5240.0635	5240	0.0635	-12.1183
		T (°C)	30	5240.0124	5240	0.0124	-2.3664
		T (°C)	40	5240.0735	5240	0.0735	-14.0267
		T (°C)	50	5240.0413	5240	0.0413	-7.8817
		T (°C)	60	5240.0325	5240	0.0325	-6.2023
		T (°C)	70	5240.0423	5240	0.0423	-8.0725
Limits				± 20 ppm			
Result				Complies			



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC 3.3V
Test Mode :	TX Frequency(5745-5850MHz)		

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.30	5745.0136	5745	0.0136	-2.3673
		V max (V)	3.80	5745.0415	5745	0.0415	-7.2237
		V min (V)	2.81	5745.0097	5745	0.0097	-1.6884
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5745.0634	5745	0.0634	-11.0357
		T (°C)	-10	5745.0527	5745	0.0527	-9.1732
		T (°C)	0	5745.0435	5745	0.0435	-7.5718
		T (°C)	10	5745.0926	5745	0.0926	-16.1184
		T (°C)	20	5745.0635	5745	0.0635	-11.0531
		T (°C)	30	5745.0124	5745	0.0124	-2.1584
		T (°C)	40	5745.0736	5745	0.0736	-12.8111
		T (°C)	50	5745.0414	5745	0.0414	-7.2063
		T (°C)	60	5745.0326	5745	0.0326	-5.6745
		T (°C)	70	5745.0423	5745	0.0423	-7.3629
Limits				± 20 ppm			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.30	5785.00994	5785	0.00994	-1.7190
		V max (V)	3.80	5785.00791	5785	0.00791	-1.3678
		V min (V)	2.81	5785.00409	5785	0.00409	-0.7077
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5785.0635	5785	0.0635	-10.9767
		T (°C)	-10	5785.0525	5785	0.0525	-9.0752
		T (°C)	0	5785.0437	5785	0.0437	-7.5540
		T (°C)	10	5785.0924	5785	0.0924	-15.9723
		T (°C)	20	5785.0638	5785	0.0638	-11.0285
		T (°C)	30	5785.0124	5785	0.0124	-2.1435
		T (°C)	40	5785.0734	5785	0.0734	-12.6880
		T (°C)	50	5785.0412	5785	0.0412	-7.1219
		T (°C)	60	5785.0322	5785	0.0322	-5.5661
		T (°C)	70	5785.0423	5785	0.0423	-7.3120
Limits				± 20 ppm			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.30	5825.00234	5825	0.00234	-0.4014
		V max (V)	3.80	5825.01026	5825	0.01026	-1.7610
		V min (V)	2.81	5825.00766	5825	0.00766	-1.3148
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.3	T (°C)	-20	5825.0636	5825	0.0636	-10.9185
		T (°C)	-10	5825.0524	5825	0.0524	-8.9957
		T (°C)	0	5825.0437	5825	0.0437	-7.5021
		T (°C)	10	5825.0924	5825	0.0924	-15.8627
		T (°C)	20	5825.0638	5825	0.0638	-10.9528
		T (°C)	30	5825.0124	5825	0.0124	-2.1288
		T (°C)	40	5825.0737	5825	0.0737	-12.6524
		T (°C)	50	5825.0413	5825	0.0413	-7.0901
		T (°C)	60	5825.0328	5825	0.0328	-5.6309
		T (°C)	70	5825.0423	5825	0.0423	-7.2618
Limits				± 20 ppm			
Result				Complies			



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is U.FL ANT. It comply with the standard requirement.






11. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

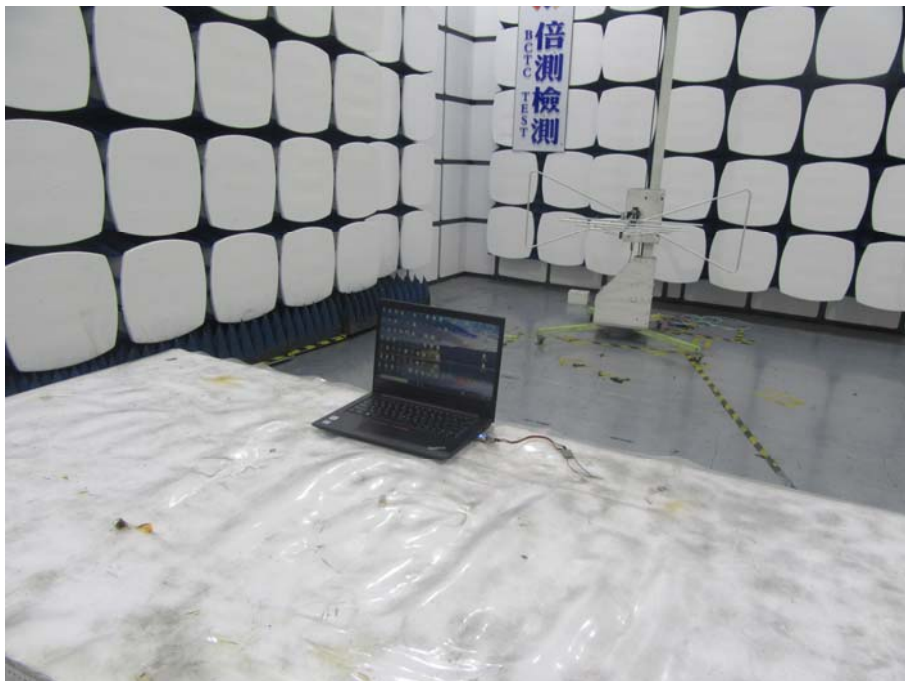

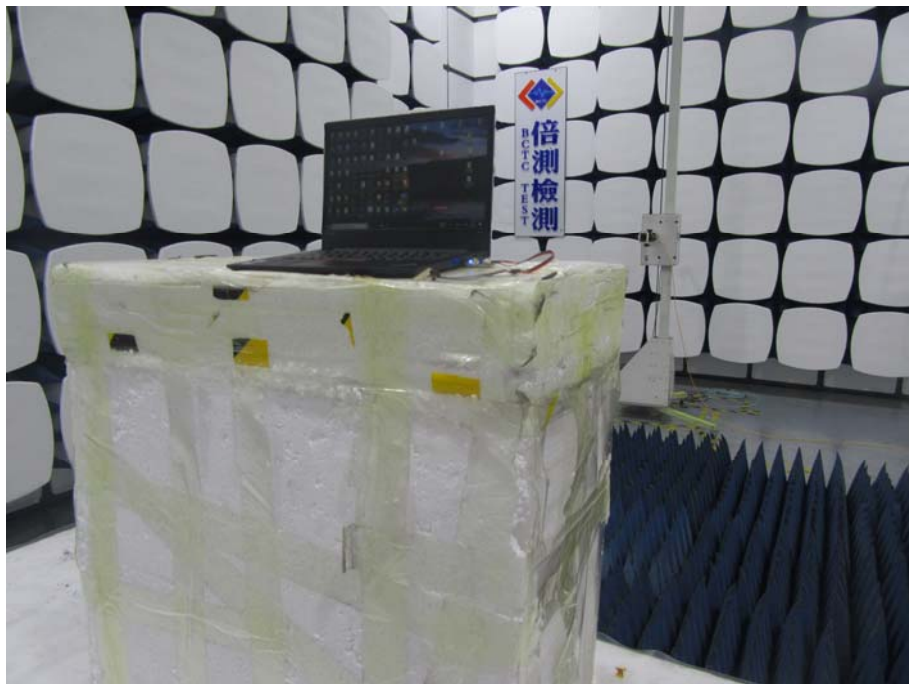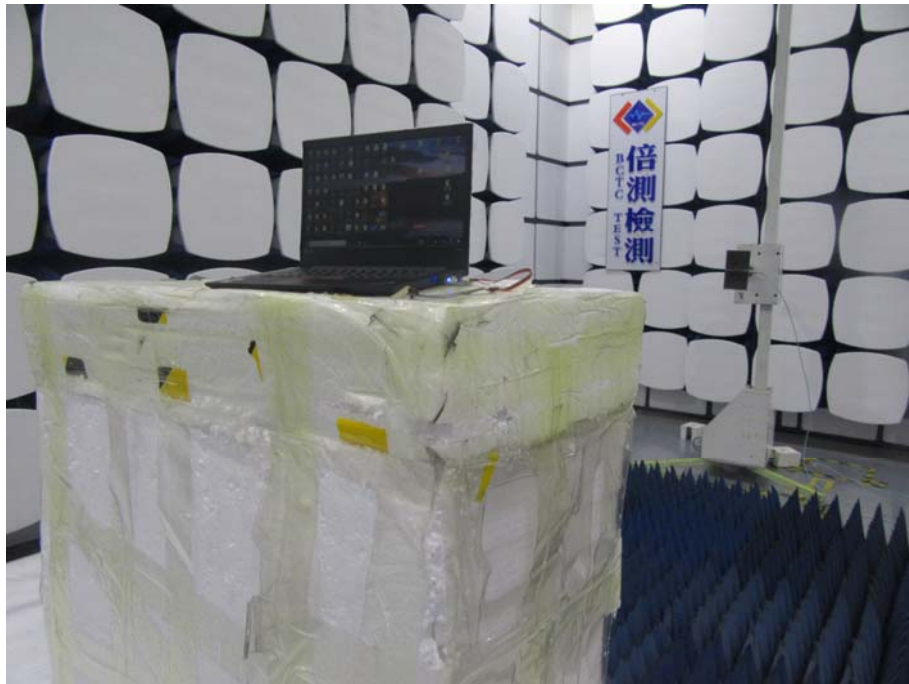



12. EUT PHOTO

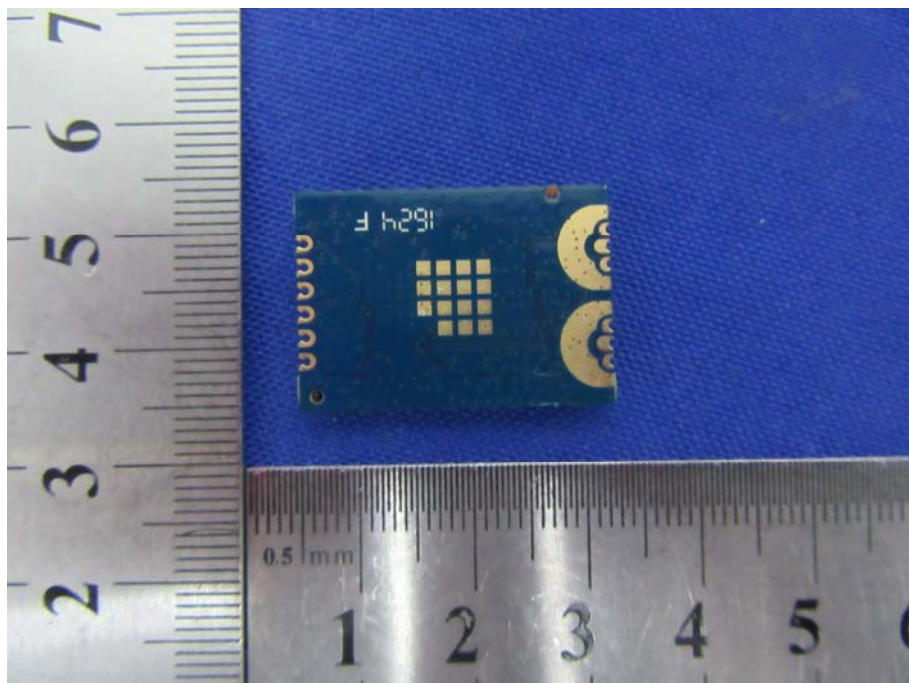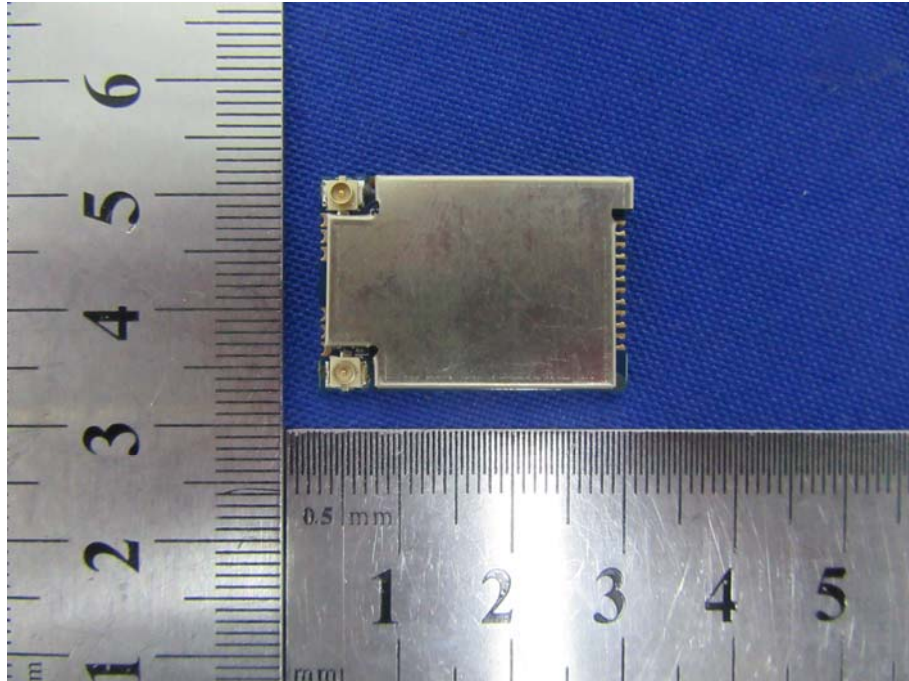

***** END OF REPORT *****