



## SAR EVALUATION REPORT

**Applicant Name:**  
LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
11/11/13 – 11/26/13  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
0Y1311192196-R1.ZNF

**FCC ID:** ZNFLS995

**APPLICANT:** LG ELECTRONICS MOBILECOMM U.S.A., INC.

**DUT Type:** Portable Handset  
**Application Type:** Class II Permissive Change  
**FCC Rule Part(s):** CFR §2.1093  
**Model(s):** LG-LS995, LS995, LGLS995  
**Class II Permissive Change:** See FCC Change Document  
**Original Grant Date:** November 20, 2013


Equipment Class	Band & Mode	Tx Frequency	Measured Conducted Power [dBm]	SAR			
				1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)	10 gm Extremity (W/kg)
PCE	CDMA/EVDO BC10 (\$90S)	817.90 - 822.75 MHz	25.04	0.66	0.74	0.73	
PCE	CDMA/EVDO BC0 (\$22H)	824.70 - 848.31 MHz	24.98	0.56	0.65	0.71	
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	23.99	0.44	1.16	1.20	
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	33.12	0.73	0.75	0.84	
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	29.44	0.21	0.63	0.63	
PCE	UMTS 850	826.40 - 846.60 MHz	23.60	0.44	0.45	0.71	
PCE	UMTS 1900	1852.4 - 1907.6 MHz	23.10	0.15	0.59	0.72	
PCE	LTE Band 26	814.7 - 848.3 MHz	24.12	0.51	0.56	0.59	
PCE	LTE Band 25 (PCS)	1851.5 - 1913.5 MHz	23.66	0.26	0.77	0.91	
PCE	LTE Band 41	2501 - 2685 MHz	23.00	0.36	0.40	0.86	
DTS	2.4 GHz WLAN	2412 - 2462 MHz	16.48	0.44	0.21	0.21	0.25
DTS/NII	5.8 GHz WLAN	5745 - 5825 MHz	10.91	< 0.1	< 0.1	< 0.1	
NII	5.2 GHz WLAN	5180 - 5240 MHz	11.19	0.16	0.13		
NII	5.3 GHz WLAN	5260 - 5320 MHz	11.61	0.16	0.13		
NII	5.5 GHz WLAN	5500 - 5700 MHz	11.38	0.15	0.11		0.14
DSS/DTS	Bluetooth	2402 - 2480 MHz	8.12	N/A			
Simultaneous SAR per KDB 690783 D01v01r02:				1.06	1.39	1.41	0.25

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.



This revised Test Report (S/N: 0Y1311192196-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.



  
Randy Ortanez  
President



FCC ID: ZNFLS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 1 of 79	

# T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	11
3	INTRODUCTION .....	12
4	DOSIMETRIC ASSESSMENT .....	13
5	DEFINITION OF REFERENCE POINTS .....	14
6	TEST CONFIGURATION POSITIONS FOR HANDSETS .....	15
7	RF EXPOSURE LIMITS .....	19
8	FCC MEASUREMENT PROCEDURES.....	20
9	RF CONDUCTED POWERS.....	26
10	SYSTEM VERIFICATION.....	43
11	SAR DATA SUMMARY .....	47
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	64
13	SAR MEASUREMENT VARIABILITY .....	73
14	EQUIPMENT LIST .....	74
15	MEASUREMENT UNCERTAINTIES .....	75
16	CONCLUSION.....	77
17	REFERENCES .....	78
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 2 of 79	

# 1 DEVICE UNDER TEST



## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 822.75 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 26	Data	814.7 - 848.3 MHz
LTE Band 25 (PCS)	Data	1851.5 - 1913.5 MHz
LTE Band 41	Data	2501 - 2685 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

## 1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	25.2
	Nominal	24.7
CDMA/EVDO BC0 (§22H)	Maximum	25.2
	Nominal	24.7
PCS CDMA/EVDO	Maximum	24.2
	Nominal	23.7



FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 3 of 79	

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)		Burst Average 8- PSK (dBm)	
		1 TX Slot	1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GSM/GPRS/EDGE 850	Maximum	<b>33.2</b>	<b>33.2</b>	<b>31.2</b>	<b>27.2</b>	<b>27.2</b>
	Nominal	<b>32.7</b>	<b>32.7</b>	<b>30.7</b>	<b>26.7</b>	<b>26.7</b>
GSM/GPRS/EDGE 1900	Maximum	<b>30.2</b>	<b>30.2</b>	<b>28.2</b>	<b>26.2</b>	<b>26.2</b>
	Nominal	<b>29.7</b>	<b>29.7</b>	<b>27.7</b>	<b>25.7</b>	<b>25.7</b>


Mode / Band		Modulated Average		
		3GPP RMC/AMR	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	<b>23.7</b>	<b>23.7</b>	<b>23.7</b>
	Nominal	<b>23.2</b>	<b>23.2</b>	<b>23.2</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>23.2</b>	<b>23.2</b>	<b>23.2</b>
	Nominal	<b>22.7</b>	<b>22.7</b>	<b>22.7</b>

Mode / Band		Modulated Average (dBm)
LTE Band 26	Maximum	<b>24.2</b>
	Nominal	<b>23.7</b>
LTE Band 25 (PCS)	Maximum	<b>23.7</b>
	Nominal	<b>23.2</b>
LTE Band 41	Maximum	<b>23.2</b>
	Nominal	<b>22.7</b>

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	<b>17.0</b>
	Nominal	<b>16.0</b>
IEEE 802.11g (2.4 GHz)	Maximum	<b>14.3</b>
	Nominal	<b>13.3</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>13.4</b>
	Nominal	<b>12.4</b>
IEEE 802.11a (5 GHz)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
IEEE 802.11n (5 GHz - 20 MHz BW)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
IEEE 802.11n (5 GHz - 40 MHz BW)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
IEEE 802.11ac (5 GHz - 80 MHz BW)	Maximum	<b>11.5</b>
	Nominal	<b>10.5</b>
Bluetooth	Maximum	<b>9.5</b>
	Nominal	<b>8.0</b>
Bluetooth LE	Maximum	<b>6.0</b>
	Nominal	<b>3.0</b>

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 4 of 79	

## 1.3 DUT Antenna Locations

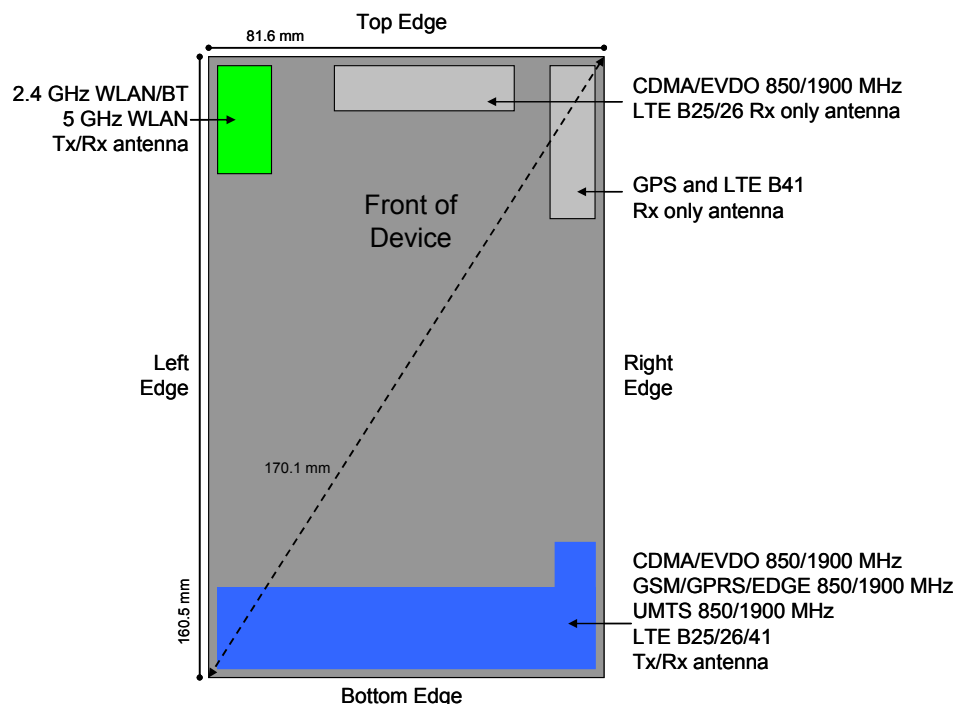

### Notes:

- Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.
- Since the diagonal dimension of this device is > 160mm but < 200mm, it is considered a "phablet."



**Figure 1-1**  
**DUT Antenna Locations**

**Table 1-1**  
**Sides for SAR Testing**

Mode	Configuration	Back	Front	Top	Bottom	Right	Left
EVDO BC10 (\$90S)	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (\$22H)	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
GPRS 850	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
LTE Band 25 (PCS)	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Wireless Router	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Wireless Router	Yes	Yes	Yes	No	No	Yes
5.2-5.7 GHz WLAN	Extremity	Yes	Yes	Yes	No	No	Yes
5.8 GHz WLAN	Wireless Router	Yes	Yes	Yes	No	No	Yes


### Notes:

- Particular DUT edges were not required to be evaluated for Wireless Router and/or Extremity SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v01 guidance, page 2. When Hotspot is enabled, all 5 GHz bands are disabled. Therefore no 5 GHz WIFI Hotspot SAR Data was required.
- 5 GHz Wifi Direct GO is supported in the 5.8 GHz band only. The manufacturer expects 5.8 GHz Wifi Direct GO may be used similar to wireless router usage. Therefore, 5.8 GHz Wifi Direct GO was evaluated for SAR similar to wireless router SAR procedures in FCC KDB Publication 941225.

FCC ID: ZNFLS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 5 of 79

## 1.4 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the battery cover. The SAR tests were performed with the battery cover containing the NFC antenna.

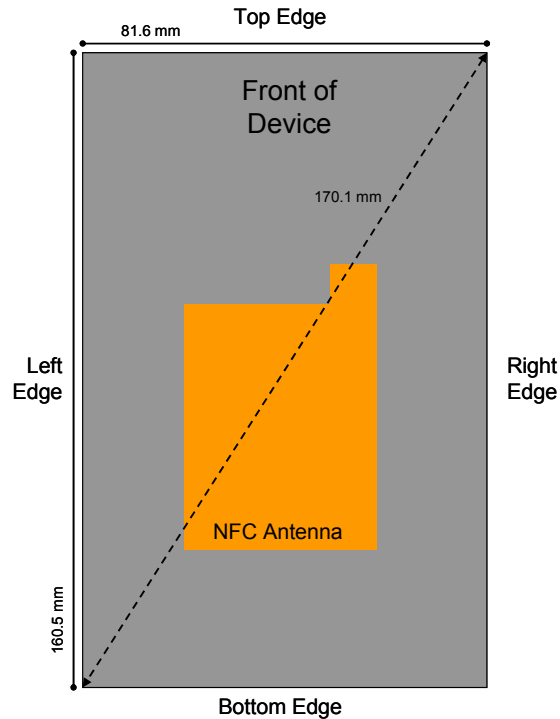



**Figure 1-2**  
**NFC Antenna Locations**

## 1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-3 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



**Figure 1-3**  
**Simultaneous Transmission Paths**

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 6 of 79



This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

**Table 1-2**  
**Simultaneous Transmission Scenarios**

No.	Capable TX Configuration	Head SAR	Body Worn SAR	Wireless Router SAR	Extremity SAR	Note
1	CDMA BC0 voice + WiFi 2.4GHz	yes	yes	no	yes	CDMA voice + WiFi 2.4GHz
2	CDMA BC1 voice + WiFi 2.4GHz	yes	yes	no	yes	
3	CDMA BC10 voice + WiFi 2.4GHz	yes	yes	no	yes	
4	CDMA BC0 voice + WiFi 5GHz	yes	yes	no	yes	CDMA voice + WiFi 5GHz
5	CDMA BC1 voice + WiFi 5GHz	yes	yes	no	yes	
6	CDMA BC10 voice + WiFi 5GHz	yes	yes	no	yes	
7	CDMA/EVDO BC0 data + WiFi 2.4GHz	yes*	yes*	yes	yes	CDMA/EVDO data + WiFi 2.4GHz
8	CDMA/EVDO BC1 data + WiFi 2.4GHz	yes*	yes*	yes	yes	
9	CDMA/EVDO BC10 data + WiFi 2.4GHz	yes*	yes*	yes	yes	
10	CDMA/EVDO BC0 data + WiFi 5GHz	yes*	yes*	yes	yes	CDMA/EVDO data + WiFi 5GHz (WiFi 5GHz Direct)
11	CDMA/EVDO BC1 data + WiFi 5GHz	yes*	yes*	yes	yes	
12	CDMA/EVDO BC10 data + WiFi 5GHz	yes*	yes*	yes	yes	
13	GSM 850 Voice + WiFi 2.4GHz	yes	yes	no	yes	GSM voice + WiFi 2.4GHz
14	GSM 1900 Voice + WiFi 2.4GHz	yes	yes	no	yes	GSM voice + WiFi 5GHz
15	GSM 850 Voice + WiFi 5GHz	yes	yes	no	yes	
16	GSM 1900 Voice + WiFi 5GHz	yes	yes	no	yes	
17	GSM 850 GPRS/EDGE + WiFi 2.4GHz	yes*	yes*	yes	yes	GPRS/EDGE + WiFi 2.4GHz
18	GSM 1900 GPRS/EDGE + WiFi 2.4GHz	yes*	yes*	yes	yes	
19	GSM 850 GPRS/EDGE + WiFi 5GHz	yes*	yes*	yes	yes	
20	GSM 1900 GPRS/EDGE + WiFi 5GHz	yes*	yes*	yes	yes	GPRS/EDGE + WiFi 5GHz (WiFi 5GHz Direct)
21	UMTS 850 + WiFi 2.4GHz	yes	yes	yes	yes	WCDMA + WiFi 2.4GHz
22	UMTS 1900 + WiFi 2.4GHz	yes	yes	yes	yes	
23	UMTS 850 + WiFi 5GHz	yes	yes	yes	yes	
24	UMTS 1900 + WiFi 5GHz	yes	yes	yes	yes	WCDMA + WiFi 5GHz (WiFi 5GHz Direct)
25	LTE B25 + WiFi 2.4GHz	yes*	yes*	yes	yes	LTE + WiFi 2.4GHz
26	LTE B26 + WiFi 2.4GHz	yes*	yes*	yes	yes	
27	LTE B41 + WiFi 2.4GHz	yes*	yes*	yes	yes	
28	LTE B25 + WiFi 5GHz	yes*	yes*	yes	yes	LTE + WiFi 5GHz (WiFi 5GHz Direct)
29	LTE B26 + WiFi 5GHz	yes*	yes*	yes	yes	
30	LTE B41 + WiFi 5GHz	yes*	yes*	yes	yes	
31	CDMA BC0 voice + Bluetooth	no	yes	no	yes	
32	CDMA BC1 voice + Bluetooth	no	yes	no	yes	
33	CDMA BC10 voice + Bluetooth	no	yes	no	yes	
34	GSM 850 Voice + Bluetooth	no	yes	no	yes	
35	GSM 1900 Voice + Bluetooth	no	yes	no	yes	
19	GSM 850 GPRS/EDGE + Bluetooth	no	yes*	no	yes	
20	GSM 1900 GPRS/EDGE + Bluetooth	no	yes*	no	yes	
36	UMTS 850 + Bluetooth	no	yes	no	yes	
37	UMTS 1900 + Bluetooth	no	yes	no	yes	
38	LTE B25 + Bluetooth	no	yes*	no	yes	
39	LTE B26 + Bluetooth	no	yes*	no	yes	
40	LTE B41 + Bluetooth	no	yes*	no	yes	

1. Hotspot and WiFi-Direct(GO/GC) are supported for WiFi 2.4 GHz.  
2. Hotspot is not supported for WiFi 5 GHz. WiFi-Direct GC is supported for WiFi 5 GHz. WiFi-Direct GO is supported for 5.8 GHz only.  
3. EVDO, LTE, WCDMA, GPRS/EDGE is supported Hotspot.  
4. VoIP is supported in EVDO, LTE, UMTS, GPRS (e.g. 3rd party VoIP)  
5. Bluetooth and WiFi can not transmit simultaneously since they share the same chip.  
6. CDMA, GSM, UMTS and LTE can not transmit simultaneously since they share the same chip.

- (\*) = for VOIP 3<sup>rd</sup> party applications possibly installed and used by the end-user
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPDCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WIFI direct are specified above.

FCC ID: ZNLS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 7 of 79

## 1.6 SAR Test Exclusions Applied

### (A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using 5.2 – 5.7 GHz NII WIFI, only 2.4 GHz WIFI Hotspot and 5.8 GHz Wifi Direct GO SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v01.

5 GHz Wifi Direct GO is supported in the 5.8 GHz band only. The manufacturer expects 5.8 GHz Wifi Direct GO may be used similar to wireless router usage. Therefore, 5.8 GHz Wifi Direct GO was evaluated for SAR similar to wireless router SAR procedures in FCC KDB Publication 941225.

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because WIFI Direct GO is supported for 5.8 GHz WLAN, but not for all other 5 GHz WIFI bands, extremity SAR was evaluated for 5.2-5.7 GHz WIFI. Extremity SAR was not evaluated for 2.4 GHz WIFI since Hotspot SAR for 2.4 GHz WIFI < 1.2 W/kg.

Per FCC KDB 447498 D01v05, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth 1g SAR was not required;  $[(9/10) * \sqrt{2.441}] = 1.4 < 3.0$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth LE 1g SAR was not required;  $[(4/10) * \sqrt{2.440}] = 0.6 < 3.0$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.



Per FCC KDB 447498 D01v05, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth 10g SAR was not required;  $[(9/5) * \sqrt{2.441}] = 2.8 < 7.5$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth LE 10g SAR was not required;  $[(4/5) * \sqrt{2.440}] = 1.2 < 7.5$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac for 2.4 GHz WIFI. IEEE 802.11ac was not evaluated for SAR since the average output power of was not more than 0.25 dB higher than the average output power of IEEE 802.11b

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 8 of 79



This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported

Full SAR evaluations for all IEEE 802.11ac configurations were not required since the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.

## (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

Per KDB Publication 941225 D03v01 EDGE testing was excluded for SAR testing because the frame-averaged output powers were lower than the frame-averaged output powers for GPRS.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

CDMA 1X Advanced technology was not required for SAR since the maximum output powers for 1x Advanced was not more than 0.25 dB higher than the maximum measured powers for 1x and the reported SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg.

Per FCC KDB Publication 648474 D04 Handset SAR v01r01, since this device is a “phablet” and all hotspot SAR was < 1.2 W/kg, hand SAR was not required for licensed transmitters.

## 1.7 SAR Test Positioning Based on Form Factor



Due to the embowed design of the device, Body SAR was configured per FCC Guidance.

### 1g SAR:

For Back side, the device was tested at a distance of 8 mm at the center of the device. For Front side, the device was tested at a distance of 8 mm from the outer ends of the device. The remaining surface or edges within 25 mm of a Tx antenna were tested at a distance of 10 mm.

### 10g SAR:

For Back side, the device was tested at a distance of 0mm at the center. If the 10g SAR > 2.5 W/kg, the device was additionally tested bottom end touching the phantom as well as the top end touching the phantom. The remaining surface or edges within 25 mm of a Tx antenna were tested at a distance of 0 mm.

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 9 of 79	

## 1.8 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.



## 1.9 Guidance Applied

- FCC OET Bulletin 65 Supplement C [June 2001]
- IEEE 1528-2003
- FCC KDB Publication 941225 D01-D06 (2G/3G/4G, 1x Advanced and Hotspot)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D03-D04 (Phablet Procedures)
- April 2013 TCB Workshop Notes (IEEE 802.11ac)
- October 2013 TCB Workshop Notes

## 1.10 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.



Mode/Band	Head Serial Number	Body-Worn Serial Number	Wireless Router Serial Number	Extremity Serial Number
CDMA/EVDO BC10 (\$90S)	1881	1881	1881	-
CDMA/EVDO BC0 (\$22H)	1881	1881	1881	-
PCS CDMA/EVDO	1881	1881	1881	-
GSM/GPRS/EDGE 850	1880	1880	1880	-
GSM/GPRS/EDGE 1900	1880	1880	1880	-
UMTS 850	1876	1876	1876	-
UMTS 1900	1876	1876	1876	-
LTE Band 26	1877	1877	1877	-
LTE Band 25 (PCS)	1879	1879	1879	-
LTE Band 41	1875	1875	1875	-
2.4 GHz WLAN	1890	1890	1890	-
5.2 - 5.7 GHz WLAN	1890	1890	-	1890
5.8 GHz WLAN	1890	1890	1890	-

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 10 of 79	

## 2

## LTE INFORMATION

LTE Information					
FCC ID	ZNFLS995				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 26 (814.7 - 848.3 MHz)				
	LTE Band 25 (PCS) (1851.5 - 1913.5 MHz)				
	LTE Band 41 (2501 - 2685 MHz)				
Channel Bandwidths	LTE Band 26: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 25 (PCS): 3 MHz, 5 MHz, 10 MHz				
	LTE Band 41: 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 26: 1.4 MHz	814.7 (26697)	N/A	831.5 (26865)	N/A	848.3 (27033)
LTE Band 26: 3 MHz	815.5 (26705)	N/A	831.5 (26865)	N/A	847.5 (27025)
LTE Band 26: 5 MHz	816.5 (26715)	N/A	831.5 (26865)	N/A	846.5 (27015)
LTE Band 26: 10 MHz	819 (26740)	N/A	831.5 (26865)	N/A	844 (26990)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	N/A	1882.5 (26365)	N/A	1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	N/A	1882.5 (26365)	N/A	1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)	N/A	1882.5 (26365)	N/A	1910 (26640)
LTE Band 41: 10 MHz	2501 (39700)	2547 (40160)	2593 (40620)	2639 (41080)	2685 (41540)
LTE Band 41: 15 MHz	2503.5 (39725)	2548.3 (40173)	2593 (40620)	2637.8 (41068)	2682.5 (41515)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	3				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				

FCC ID: ZNFLS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 11 of 79	

### 3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1  
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material ( $\text{kg/m}^3$ )
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 12 of 79


## 4

## DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure:



1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4-1**  
**Sample SAR Area Scan**

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01**

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22


FCC ID: ZNFS995		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset			Page 13 of 79

## 5

## DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view  
of ERP

### 5.2 HANDSET REFERENCE POINTS



Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

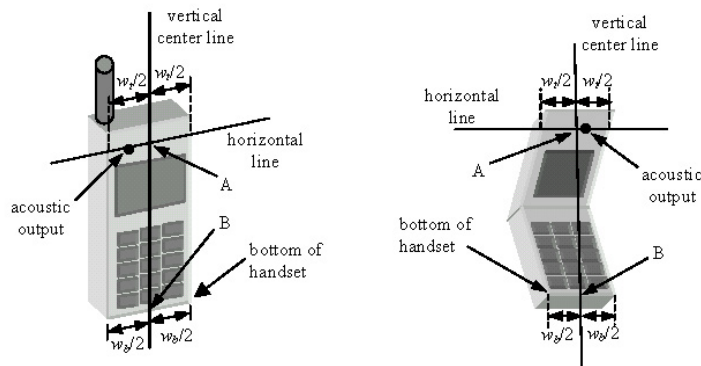

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 14 of 79


## 6 TEST CONFIGURATION POSITIONS FOR HANDSETS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

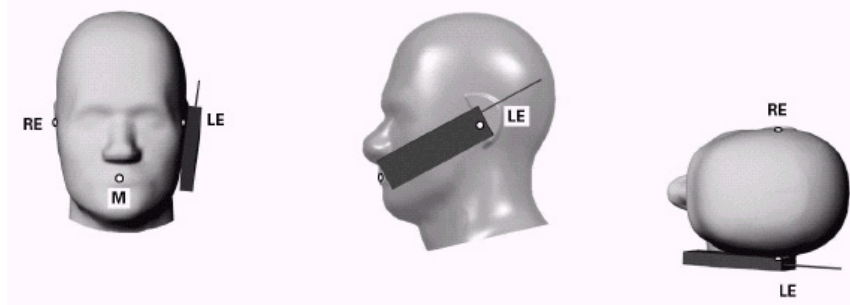



**Figure 6-1 Front, Side and Top View of Cheek Position**

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).


### 6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:


1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 15 of 79	



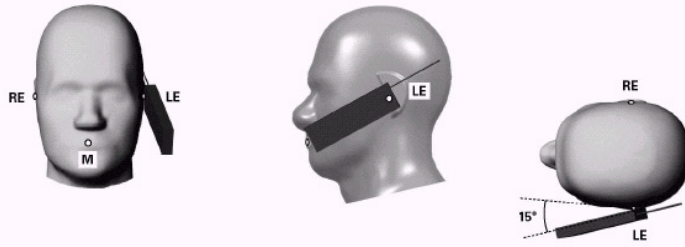

**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**




**Figure 6-3 Side view w/ relevant markings**

## 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom



Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04\_v01. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

The latest IEEE 1528 committee developments propose the usage of a tilted phantom when the antenna of the phone is mounted at the bottom or in all cases the peak absorption is in the chin region. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed individually from the table for emptying and cleaning.




**Figure 6-4 Twin SAM Chin20**

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 16 of 79



## 6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-5). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

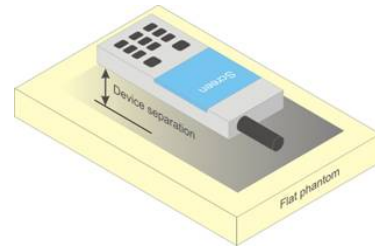

**Figure 6-5**  
**Sample Body-Worn Diagram**



Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.



For smart phones with a display diagonal dimension  $> 15.0 \text{ cm}$  or an overall diagonal dimension  $> 16.0 \text{ cm}$  that provide similar mobile web access and multimedia support found in mini-tablets or UMPC minitables that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04 v01r01DR04 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25 \text{ mm}$  from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g SAR  $> 1.2 \text{ W/kg}$ .

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 17 of 79

## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 18 of 79	

## 7 RF EXPOSURE LIMITS

### 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



### 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 19 of 79	

Power measurements were performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

### 8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.



### 8.3 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

#### 8.3.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices" v02, October 2007. Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the "All Up" condition.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 20 of 79

**Table 8-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

**Table 8-2**  
**Parameters for Max. Power for RC3**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

### 8.3.2 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers were measured using SO75 with RC8 on the uplink and RC11 on the downlink per April 2013 TCB Workshop notes. Smart blanking was disabled for all measurements. The EUT was configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers were measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

Based on the maximum output power measured for 1x Advanced, SAR is required for 1x advanced when if the maximum output for 1x Advanced is more than 0.25 dB higher than the maximum measured for 1x. Also, if the reported SAR in any 1x mode exposure conditions (head, body etc.) is larger than 1.2 W/kg, the highest of those configurations above 1.2 W/kg for each exposure condition in 1x Advanced has to be repeated. All measured SAR in 1x mode higher than 1.5 W/kg must be repeated for 1x Advanced.

### 8.3.3 Head SAR Measurements



SAR for head exposure configurations is measured in RC3 with the DUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

Head SAR was additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.3.5 for EVDO Rev. A configuration parameters.

### 8.3.4 Body SAR Measurements

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH<sub>n</sub>) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is measured on the maximum output channel (FCH + SCH<sub>n</sub>) with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only. When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR was measured using TDSO / SO32 with power control bits in the “All Up”

Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 21 of 79

### 8.3.5 Handsets with EVDO

For handsets with Ev-Do capabilities, when the maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT), body SAR for EV-DO is not required. Otherwise, SAR for Rev. 0 is measured on the maximum output channel at 153.6 kbps using the body exposure configuration that results in the highest SAR for that channel in RC3. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel for Rev. A using a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots would be configured in the downlink for both Rev. 0 and Rev. A.

### 8.3.6 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 per KDB Publication 941225 D01 procedures for “1x Ev-Do data Devices”. SAR for Subtype 2 Physical layer configurations is not required for Rev. A when the maximum average output of each RF channels is less than that measured in Subtype 0/1 Physical layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configuration that results in the highest SAR for the RF channels in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

SAR is not required for 1x RTT for Ev-Do devices that also support 1x RTT voice and/or data operations, when the maximum average output of each channel is less than 1/4 dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0. Otherwise, CDMA “Body-SAR Measurement” procedures for “CDMA 2000 1x Handsets” were applied.

## 8.4 SAR Measurement Conditions for UMTS



### 8.4.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

### 8.4.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 22 of 79	



### 8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”.

### 8.4.4 SAR Measurements for Handsets with Rel 5 HSDPA

Body SAR for HSDPA is not required for handsets with HSDPA capabilities when the maximum average output power of each RF channel with HSDPA active is less than 0.25 dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration measured in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that resulted in the highest SAR in 12.2 kbps RMC mode for that RF channel.

The H-set used in FRC for HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HSPDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the applicable H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the FRC for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 2 ms to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors of  $\beta_c=9$  and  $\beta_d=15$ , and power offset parameters of  $\Delta_{ACK} = \Delta_{NACK} = 5$  and  $\Delta_{CQI}=2$  is used. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the FRC.



Sub-Test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: $\Delta_{ACK}$ , $\Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{HS} = \beta_{HS}/\beta_c = 30/15 \Leftrightarrow \beta_{HS} = 30/15 * \beta_c$ . Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, $\Delta_{ACK}$ and $\Delta_{NACK} = 8$ ( $A_{HS} = 30/15$ ) with $\beta_{HS} = 30/15 * \beta_c$ , and $\Delta_{CQI} = 7$ ( $A_{HS} = 24/15$ ) with $\beta_{HS} = 24/15 * \beta_c$ . Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$ , $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.							

Figure 8-1  
Table C.10.1.4 of TS 234.121-1

### 8.4.5 SAR Measurements for Handsets with Rel 6 HSUPA

Body SAR for HSUPA is not required when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25 dB higher than as measured without HSUPA/HSDPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise SAR is measured on the maximum output channel for the body exposure configuration produced highest SAR in 12.2 kbps RMC for that RF channel, using the additional procedures under “Release 6 HSPA data devices”

Head SAR for VOIP operations under HSPA is not required when maximum average output of each RF channel with HSPA is less than 0.25 dB higher than as measured using 12.2 kbps RMC. Otherwise SAR is measured using same HSPA configuration as used for body SAR.

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 23 of 79

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{cc}^{(1)}$	$\beta_{cc}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{d1}: 47/15$ $\beta_{d2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{10} = \beta_{10}/\beta_c = 30/15 \Leftrightarrow \beta_{10} = 30/15 * \beta_c$ .  
Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{10}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCCH, HS-DPCCH, E-DPDCCH and E-DPCCH the MPR is based on the relative CM difference.  
Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .  
Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .  
Note 5: Testing UE using E-DPDCCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.  
Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

## 8.5 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

### 8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.



### 8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - The required channel and offset combination with the highest maximum output power is required for SAR.
  - When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 24 of 79



power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.

- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to ½ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is <1.45 W/kg.

### 8.5.5 TDD

LTE TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225. SAR testing was performed using the normal cyclic prefix and then scaling up the measured SAR result to the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

## 8.6 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

### 8.6.1 General Device Setup



Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

### 8.6.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n/ac modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode. 802.11ac SAR was evaluated for highest 802.11a configuration in each 5 GHz band and each exposure condition. 802.11ac modes were additionally evaluated for SAR if the output power for the respective mode was more than 0.25 dB higher than powers of 802.11a modes.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 25 of 79	

## 9 RF CONDUCTED POWERS

### 9.1 CDMA Conducted Powers

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
BC 10	564	90S	820.1	25.01	24.98	25.10	25.04	25.02	25.04	25.01
BC 0	1013	22H	824.7	24.88	24.90	25.07	24.93	24.93	25.01	24.95
	384	22H	836.52	24.89	24.85	25.02	24.91	24.92	24.98	24.96
	777	22H	848.31	24.97	24.95	25.14	25.03	24.97	24.99	24.95
BC 1	25	24E	1851.25	23.96	23.92	24.00	23.94	23.95	23.95	23.94
	600	24E	1880	23.92	23.93	23.85	23.92	23.93	23.99	23.96
	1175	24E	1908.75	23.97	23.93	24.02	23.92	23.92	23.96	23.92

**General Notes:**


1. RC1 is only applicable for IS-95 compatibility.
2. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v05 4.1.6, only one channel is required since the device operates within the transmission range of 817.90 – 822.75 MHz.

**Per KDB Publication 941225 D01v02:**



1. Head SAR was tested with SO55 RC3. SO55 RC1 was not required since the average output power was not more than 0.25 dB than the SO55 RC3 powers.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. Ev-Do and TDSO / SO32 FCH+SCH SAR tests were not required since the average output power was not more than 0.25 dB higher than the TDSO / SO32 FCH only powers.
3. Hotspot SAR was measured using Subtype 0/1 Physical Layer configurations for Rev. 0. Since the average output power of Subtype 2 for Rev. A is less than the Rev. 0 power levels, Rev. A SAR is not required. SAR is not required for 1x RTT for Ev-Do hotspot devices since the maximum average output of each channel is less than 1/4 dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0
4. Head SAR was additionally evaluated with EVDO Rev. A to determine compliance for held-to-ear VoIP operations.

**1x Advanced Considerations per FCC KDB publication 941225 D02 v02r02:**

1. CDMA 1X Advanced technology was not required for SAR since the maximum output powers for 1x Advanced was not more than 0.25 dB higher than the maximum measured powers for 1x and the reported SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg. See Section 8.3.2 for 1x Advanced test set up.



**Figure 9-1**  
**Power Measurement Setup**



FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 26 of 79	

## 9.2 GSM Conducted Powers

		Maximum Burst-Averaged Output Power				
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
<b>GSM 850</b>	128	33.20	33.20	<b>30.66</b>	27.20	26.43
	190	33.12	33.14	<b>30.80</b>	27.13	26.40
	251	33.19	33.19	<b>30.77</b>	27.05	26.37
<b>GSM 1900</b>	512	29.84	29.89	<b>28.02</b>	26.05	25.55
	661	29.44	29.49	<b>27.61</b>	25.75	25.15
	810	29.81	29.85	<b>27.86</b>	25.75	25.06
		Calculated Maximum Frame-Averaged Output Power				
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
<b>GSM 850</b>	128	24.17	24.17	<b>24.64</b>	18.17	20.41
	190	24.09	24.11	<b>24.78</b>	18.10	20.38
	251	24.16	24.16	<b>24.75</b>	18.02	20.35
<b>GSM 1900</b>	512	20.81	20.86	<b>22.00</b>	17.02	19.53
	661	20.41	20.46	<b>21.59</b>	16.72	19.13
	810	20.78	20.82	<b>21.84</b>	16.72	19.04

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- The bolded GPRS modes were selected for SAR testing according to the highest frame-averaged output power table according to KDB 941225 D03v01 and October 2013 TCB Workshop notes.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

FCC ID: ZNFLS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 27 of 79

**GSM Class: B**  
**GPRS Multislot class: 10** (Max 2 Tx uplink slots)  
**EDGE Multislot class: 10** (Max 2 Tx uplink slots)  
**DTM Multislot Class: N/A**



**Figure 9-2**  
**Power Measurement Setup**

### 9.3 UMTS Conducted Powers



3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.34	23.60	23.39	23.00	23.10	22.97	-
99		12.2 kbps AMR	23.22	23.30	23.33	22.98	23.05	22.88	-
6	HSDPA	Subtest 1	23.25	23.40	23.15	22.90	23.00	22.96	0
6		Subtest 2	23.17	23.38	23.10	22.84	22.97	22.90	0
6		Subtest 3	22.36	22.89	22.74	22.57	22.68	22.47	0.5
6		Subtest 4	22.88	22.84	22.60	22.48	22.59	22.40	0.5
6	HSPA	Subtest 1	22.78	22.70	22.79	22.58	22.51	22.79	0
6		Subtest 2	20.84	20.92	21.08	20.41	20.40	20.39	2
6		Subtest 3	21.79	22.00	21.85	21.52	21.65	21.47	1
6		Subtest 4	21.26	21.37	21.32	20.72	20.71	20.78	2
6		Subtest 5	22.71	22.80	22.74	22.74	22.61	22.74	0

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

This device does not support DC-HSDPA.



**Figure 9-3**  
**Power Measurement Setup**

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 28 of 79	

## 9.4 LTE Conducted Powers



### 9.4.1 LTE Band 26

Table 9-1  
LTE Band 26 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	819	26740	10	QPSK	1	0	23.90	0	0
	819	26740	10	QPSK	1	25	24.08	0	0
	819	26740	10	QPSK	1	49	24.05	0	0
	819	26740	10	QPSK	25	0	22.85	1	0-1
	819	26740	10	QPSK	25	12	22.93	1	0-1
	819	26740	10	QPSK	25	25	22.94	1	0-1
	819	26740	10	QPSK	50	0	22.72	1	0-1
	819	26740	10	16QAM	1	0	22.84	1	0-1
	819	26740	10	16QAM	1	25	23.10	1	0-1
	819	26740	10	16QAM	1	49	22.74	1	0-1
	819	26740	10	16QAM	25	0	21.81	2	0-2
	819	26740	10	16QAM	25	12	21.82	2	0-2
Mid	819	26740	10	16QAM	25	25	21.89	2	0-2
	819	26740	10	16QAM	50	0	21.76	2	0-2
	831.5	26865	10	QPSK	1	0	<b>24.12</b>	0	0
	831.5	26865	10	QPSK	1	25	24.04	0	0
	831.5	26865	10	QPSK	1	49	24.05	0	0
	831.5	26865	10	QPSK	25	0	<b>22.98</b>	1	0-1
	831.5	26865	10	QPSK	25	12	22.85	1	0-1
	831.5	26865	10	QPSK	25	25	22.94	1	0-1
	831.5	26865	10	QPSK	50	0	22.87	1	0-1
	831.5	26865	10	16QAM	1	0	22.93	1	0-1
	831.5	26865	10	16QAM	1	25	22.82	1	0-1
	831.5	26865	10	16QAM	1	49	22.98	1	0-1
High	844	26990	10	16QAM	25	0	21.99	2	0-2
	844	26990	10	16QAM	25	12	21.98	2	0-2
	844	26990	10	16QAM	25	25	21.92	2	0-2
	844	26990	10	16QAM	50	0	21.88	2	0-2
	844	26990	10	QPSK	1	0	24.10	0	0
	844	26990	10	QPSK	1	25	24.08	0	0
	844	26990	10	QPSK	1	49	24.00	0	0
	844	26990	10	QPSK	25	0	22.94	1	0-1
	844	26990	10	QPSK	25	12	22.94	1	0-1
	844	26990	10	QPSK	25	25	22.96	1	0-1
	844	26990	10	QPSK	50	0	22.90	1	0-1
	844	26990	10	16QAM	1	0	23.20	1	0-1
	844	26990	10	16QAM	1	25	23.08	1	0-1
	844	26990	10	16QAM	1	49	22.82	1	0-1
	844	26990	10	16QAM	25	0	22.04	2	0-2
	844	26990	10	16QAM	25	12	22.00	2	0-2
	844	26990	10	16QAM	25	25	22.13	2	0-2
	844	26990	10	16QAM	50	0	21.88	2	0-2



**Table 9-2**  
**LTE Band 26 Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	816.5	26715	5	QPSK	1	0	23.99	0	0
	816.5	26715	5	QPSK	1	12	24.04	0	0
	816.5	26715	5	QPSK	1	24	24.06	0	0
	816.5	26715	5	QPSK	12	0	22.89	1	0-1
	816.5	26715	5	QPSK	12	6	22.94	1	0-1
	816.5	26715	5	QPSK	12	13	23.00	1	0-1
	816.5	26715	5	QPSK	25	0	22.82	1	0-1
	816.5	26715	5	16-QAM	1	0	23.11	1	0-1
	816.5	26715	5	16-QAM	1	12	22.95	1	0-1
	816.5	26715	5	16-QAM	1	24	22.91	1	0-1
	816.5	26715	5	16-QAM	12	0	21.86	2	0-2
	816.5	26715	5	16-QAM	12	6	21.92	2	0-2
	816.5	26715	5	16-QAM	12	13	21.94	2	0-2
	816.5	26715	5	16-QAM	25	0	21.84	2	0-2
Mid	831.5	26865	5	QPSK	1	0	24.10	0	0
	831.5	26865	5	QPSK	1	12	24.14	0	0
	831.5	26865	5	QPSK	1	24	23.98	0	0
	831.5	26865	5	QPSK	12	0	23.04	1	0-1
	831.5	26865	5	QPSK	12	6	22.93	1	0-1
	831.5	26865	5	QPSK	12	13	22.95	1	0-1
	831.5	26865	5	QPSK	25	0	22.83	1	0-1
	831.5	26865	5	16-QAM	1	0	22.82	1	0-1
	831.5	26865	5	16-QAM	1	12	22.93	1	0-1
	831.5	26865	5	16-QAM	1	24	23.06	1	0-1
	831.5	26865	5	16-QAM	12	0	21.92	2	0-2
	831.5	26865	5	16-QAM	12	6	22.06	2	0-2
	831.5	26865	5	16-QAM	12	13	22.12	2	0-2
	831.5	26865	5	16-QAM	25	0	21.95	2	0-2
High	846.5	27015	5	QPSK	1	0	24.04	0	0
	846.5	27015	5	QPSK	1	12	24.10	0	0
	846.5	27015	5	QPSK	1	24	23.77	0	0
	846.5	27015	5	QPSK	12	0	23.15	1	0-1
	846.5	27015	5	QPSK	12	6	23.07	1	0-1
	846.5	27015	5	QPSK	12	13	22.91	1	0-1
	846.5	27015	5	QPSK	25	0	22.96	1	0-1
	846.5	27015	5	16-QAM	1	0	23.10	1	0-1
	846.5	27015	5	16-QAM	1	12	23.16	1	0-1
	846.5	27015	5	16-QAM	1	24	22.91	1	0-1
	846.5	27015	5	16-QAM	12	0	22.19	2	0-2
	846.5	27015	5	16-QAM	12	6	22.20	2	0-2
	846.5	27015	5	16-QAM	12	13	22.14	2	0-2
	846.5	27015	5	16-QAM	25	0	22.09	2	0-2

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 30 of 79	



**Table 9-3**  
**LTE Band 26 Conducted Powers - 3 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	815.5	26705	3	QPSK	1	0	24.00	0	0
	815.5	26705	3	QPSK	1	7	24.02	0	0
	815.5	26705	3	QPSK	1	14	24.03	0	0
	815.5	26705	3	QPSK	8	0	22.88	1	0-1
	815.5	26705	3	QPSK	8	4	22.85	1	0-1
	815.5	26705	3	QPSK	8	7	22.89	1	0-1
	815.5	26705	3	QPSK	15	0	22.82	1	0-1
	815.5	26705	3	16-QAM	1	0	22.94	1	0-1
	815.5	26705	3	16-QAM	1	7	23.07	1	0-1
	815.5	26705	3	16-QAM	1	14	23.03	1	0-1
	815.5	26705	3	16-QAM	8	0	21.80	2	0-2
	815.5	26705	3	16-QAM	8	4	21.92	2	0-2
	815.5	26705	3	16-QAM	8	7	21.81	2	0-2
	815.5	26705	3	16-QAM	15	0	21.77	2	0-2
Mid	831.5	26865	3	QPSK	1	0	24.02	0	0
	831.5	26865	3	QPSK	1	7	23.99	0	0
	831.5	26865	3	QPSK	1	14	23.97	0	0
	831.5	26865	3	QPSK	8	0	22.91	1	0-1
	831.5	26865	3	QPSK	8	4	22.98	1	0-1
	831.5	26865	3	QPSK	8	7	22.92	1	0-1
	831.5	26865	3	QPSK	15	0	22.95	1	0-1
	831.5	26865	3	16-QAM	1	0	22.79	1	0-1
	831.5	26865	3	16-QAM	1	7	22.84	1	0-1
	831.5	26865	3	16-QAM	1	14	22.90	1	0-1
	831.5	26865	3	16-QAM	8	0	21.87	2	0-2
	831.5	26865	3	16-QAM	8	4	21.96	2	0-2
	831.5	26865	3	16-QAM	8	7	21.90	2	0-2
	831.5	26865	3	16-QAM	15	0	21.88	2	0-2
High	847.5	27025	3	QPSK	1	0	24.12	0	0
	847.5	27025	3	QPSK	1	7	24.01	0	0
	847.5	27025	3	QPSK	1	14	23.77	0	0
	847.5	27025	3	QPSK	8	0	23.08	1	0-1
	847.5	27025	3	QPSK	8	4	22.97	1	0-1
	847.5	27025	3	QPSK	8	7	22.85	1	0-1
	847.5	27025	3	QPSK	15	0	22.95	1	0-1
	847.5	27025	3	16-QAM	1	0	23.11	1	0-1
	847.5	27025	3	16-QAM	1	7	22.93	1	0-1
	847.5	27025	3	16-QAM	1	14	22.79	1	0-1
	847.5	27025	3	16-QAM	8	0	21.99	2	0-2
	847.5	27025	3	16-QAM	8	4	21.90	2	0-2
	847.5	27025	3	16-QAM	8	7	21.77	2	0-2
	847.5	27025	3	16-QAM	15	0	21.80	2	0-2

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 31 of 79	

**Table 9-4**  
**LTE Band 26 Conducted Powers -1.4 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	814.7	26697	1.4	QPSK	1	0	24.11	0	0
	814.7	26697	1.4	QPSK	1	2	24.02	0	0
	814.7	26697	1.4	QPSK	1	5	23.89	0	0
	814.7	26697	1.4	QPSK	3	0	23.88	0	0
	814.7	26697	1.4	QPSK	3	2	23.81	0	0
	814.7	26697	1.4	QPSK	3	3	23.94	0	0
	814.7	26697	1.4	QPSK	6	0	23.02	1	0-1
	814.7	26697	1.4	16-QAM	1	0	23.06	1	0-1
	814.7	26697	1.4	16-QAM	1	2	23.01	1	0-1
	814.7	26697	1.4	16-QAM	1	5	22.99	1	0-1
	814.7	26697	1.4	16-QAM	3	0	22.84	1	0-1
	814.7	26697	1.4	16-QAM	3	2	22.89	1	0-1
	814.7	26697	1.4	16-QAM	3	3	22.88	1	0-1
	814.7	26697	1.4	16-QAM	6	0	21.97	2	0-2
Mid	831.5	26865	1.4	QPSK	1	0	24.05	0	0
	831.5	26865	1.4	QPSK	1	2	23.98	0	0
	831.5	26865	1.4	QPSK	1	5	23.99	0	0
	831.5	26865	1.4	QPSK	3	0	23.91	0	0
	831.5	26865	1.4	QPSK	3	2	23.88	0	0
	831.5	26865	1.4	QPSK	3	3	23.90	0	0
	831.5	26865	1.4	QPSK	6	0	22.93	1	0-1
	831.5	26865	1.4	16-QAM	1	0	23.06	1	0-1
	831.5	26865	1.4	16-QAM	1	2	22.75	1	0-1
	831.5	26865	1.4	16-QAM	1	5	22.77	1	0-1
	831.5	26865	1.4	16-QAM	3	0	22.95	1	0-1
	831.5	26865	1.4	16-QAM	3	2	23.10	1	0-1
	831.5	26865	1.4	16-QAM	3	3	22.99	1	0-1
	831.5	26865	1.4	16-QAM	6	0	22.02	2	0-2
High	848.3	27033	1.4	QPSK	1	0	24.02	0	0
	848.3	27033	1.4	QPSK	1	2	24.00	0	0
	848.3	27033	1.4	QPSK	1	5	23.94	0	0
	848.3	27033	1.4	QPSK	3	0	23.99	0	0
	848.3	27033	1.4	QPSK	3	2	23.78	0	0
	848.3	27033	1.4	QPSK	3	3	23.84	0	0
	848.3	27033	1.4	QPSK	6	0	23.03	1	0-1
	848.3	27033	1.4	16-QAM	1	0	22.89	1	0-1
	848.3	27033	1.4	16-QAM	1	2	22.93	1	0-1
	848.3	27033	1.4	16-QAM	1	5	22.91	1	0-1
	848.3	27033	1.4	16-QAM	3	0	22.89	1	0-1
	848.3	27033	1.4	16-QAM	3	2	22.80	1	0-1
	848.3	27033	1.4	16-QAM	3	3	22.85	1	0-1
	848.3	27033	1.4	16-QAM	6	0	22.00	2	0-2

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 32 of 79	





## 9.4.2

## LTE Band 25 (PCS)



**Table 9-5**  
**LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1855	26090	10	QPSK	1	0	23.52	0	0
	1855	26090	10	QPSK	1	25	23.43	0	0
	1855	26090	10	QPSK	1	49	23.40	0	0
	1855	26090	10	QPSK	25	0	22.44	1	0-1
	1855	26090	10	QPSK	25	12	22.53	1	0-1
	1855	26090	10	QPSK	25	25	22.49	1	0-1
	1855	26090	10	QPSK	50	0	22.43	1	0-1
	1855	26090	10	16QAM	1	0	22.26	1	0-1
	1855	26090	10	16QAM	1	25	22.23	1	0-1
	1855	26090	10	16QAM	1	49	22.27	1	0-1
	1855	26090	10	16QAM	25	0	21.62	2	0-2
	1855	26090	10	16QAM	25	12	21.50	2	0-2
	1855	26090	10	16QAM	25	25	21.48	2	0-2
	1855	26090	10	16QAM	50	0	21.60	2	0-2
Mid	1882.5	26365	10	QPSK	1	0	23.59	0	0
	1882.5	26365	10	QPSK	1	25	23.43	0	0
	1882.5	26365	10	QPSK	1	49	<b>23.66</b>	0	0
	1882.5	26365	10	QPSK	25	0	22.52	1	0-1
	1882.5	26365	10	QPSK	25	12	22.54	1	0-1
	1882.5	26365	10	QPSK	25	25	<b>22.57</b>	1	0-1
	1882.5	26365	10	QPSK	50	0	22.52	1	0-1
	1882.5	26365	10	16QAM	1	0	22.55	1	0-1
	1882.5	26365	10	16QAM	1	25	22.53	1	0-1
	1882.5	26365	10	16QAM	1	49	22.55	1	0-1
	1882.5	26365	10	16QAM	25	0	21.54	2	0-2
	1882.5	26365	10	16QAM	25	12	21.59	2	0-2
	1882.5	26365	10	16QAM	25	25	21.63	2	0-2
	1882.5	26365	10	16QAM	50	0	21.56	2	0-2
High	1910	26640	10	QPSK	1	0	23.51	0	0
	1910	26640	10	QPSK	1	25	23.43	0	0
	1910	26640	10	QPSK	1	49	23.20	0	0
	1910	26640	10	QPSK	25	0	22.53	1	0-1
	1910	26640	10	QPSK	25	12	22.36	1	0-1
	1910	26640	10	QPSK	25	25	22.40	1	0-1
	1910	26640	10	QPSK	50	0	22.41	1	0-1
	1910	26640	10	16QAM	1	0	22.32	1	0-1
	1910	26640	10	16QAM	1	25	22.36	1	0-1
	1910	26640	10	16QAM	1	49	22.51	1	0-1
	1910	26640	10	16QAM	25	0	21.42	2	0-2
	1910	26640	10	16QAM	25	12	21.50	2	0-2
	1910	26640	10	16QAM	25	25	21.32	2	0-2
	1910	26640	10	16QAM	50	0	21.47	2	0-2

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 33 of 79

**Table 9-6**  
**LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1852.5	26065	5	QPSK	1	0	23.43	0	0
	1852.5	26065	5	QPSK	1	12	23.55	0	0
	1852.5	26065	5	QPSK	1	24	23.66	0	0
	1852.5	26065	5	QPSK	12	0	22.48	1	0-1
	1852.5	26065	5	QPSK	12	6	22.54	1	0-1
	1852.5	26065	5	QPSK	12	13	22.45	1	0-1
	1852.5	26065	5	QPSK	25	0	22.34	1	0-1
	1852.5	26065	5	16-QAM	1	0	22.43	1	0-1
	1852.5	26065	5	16-QAM	1	12	22.58	1	0-1
	1852.5	26065	5	16-QAM	1	24	22.64	1	0-1
	1852.5	26065	5	16-QAM	12	0	21.48	2	0-2
	1852.5	26065	5	16-QAM	12	6	21.51	2	0-2
	1852.5	26065	5	16-QAM	12	13	21.49	2	0-2
	1852.5	26065	5	16-QAM	25	0	21.41	2	0-2
Mid	1882.5	26365	5	QPSK	1	0	23.61	0	0
	1882.5	26365	5	QPSK	1	12	23.53	0	0
	1882.5	26365	5	QPSK	1	24	23.51	0	0
	1882.5	26365	5	QPSK	12	0	22.57	1	0-1
	1882.5	26365	5	QPSK	12	6	22.62	1	0-1
	1882.5	26365	5	QPSK	12	13	22.57	1	0-1
	1882.5	26365	5	QPSK	25	0	22.41	1	0-1
	1882.5	26365	5	16-QAM	1	0	22.46	1	0-1
	1882.5	26365	5	16-QAM	1	12	22.34	1	0-1
	1882.5	26365	5	16-QAM	1	24	22.44	1	0-1
	1882.5	26365	5	16-QAM	12	0	21.30	2	0-2
	1882.5	26365	5	16-QAM	12	6	21.64	2	0-2
	1882.5	26365	5	16-QAM	12	13	21.47	2	0-2
	1882.5	26365	5	16-QAM	25	0	21.63	2	0-2
High	1912.5	26665	5	QPSK	1	0	23.64	0	0
	1912.5	26665	5	QPSK	1	12	23.60	0	0
	1912.5	26665	5	QPSK	1	24	23.20	0	0
	1912.5	26665	5	QPSK	12	0	22.38	1	0-1
	1912.5	26665	5	QPSK	12	6	22.25	1	0-1
	1912.5	26665	5	QPSK	12	13	22.36	1	0-1
	1912.5	26665	5	QPSK	25	0	22.24	1	0-1
	1912.5	26665	5	16-QAM	1	0	22.42	1	0-1
	1912.5	26665	5	16-QAM	1	12	22.25	1	0-1
	1912.5	26665	5	16-QAM	1	24	22.20	1	0-1
	1912.5	26665	5	16-QAM	12	0	21.47	2	0-2
	1912.5	26665	5	16-QAM	12	6	21.29	2	0-2
	1912.5	26665	5	16-QAM	12	13	21.42	2	0-2
	1912.5	26665	5	16-QAM	25	0	21.27	2	0-2

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 34 of 79	

**Table 9-7**  
**LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1851.5	26055	3	QPSK	1	0	23.52	0	0
	1851.5	26055	3	QPSK	1	7	23.57	0	0
	1851.5	26055	3	QPSK	1	14	23.62	0	0
	1851.5	26055	3	QPSK	8	0	22.65	1	0-1
	1851.5	26055	3	QPSK	8	4	22.63	1	0-1
	1851.5	26055	3	QPSK	8	7	22.64	1	0-1
	1851.5	26055	3	QPSK	15	0	22.62	1	0-1
	1851.5	26055	3	16-QAM	1	0	22.37	1	0-1
	1851.5	26055	3	16-QAM	1	7	22.42	1	0-1
	1851.5	26055	3	16-QAM	1	14	22.52	1	0-1
	1851.5	26055	3	16-QAM	8	0	21.67	2	0-2
	1851.5	26055	3	16-QAM	8	4	21.57	2	0-2
	1851.5	26055	3	16-QAM	8	7	21.55	2	0-2
	1851.5	26055	3	16-QAM	15	0	21.64	2	0-2
Mid	1882.5	26365	3	QPSK	1	0	23.70	0	0
	1882.5	26365	3	QPSK	1	7	23.58	0	0
	1882.5	26365	3	QPSK	1	14	23.60	0	0
	1882.5	26365	3	QPSK	8	0	22.61	1	0-1
	1882.5	26365	3	QPSK	8	4	22.59	1	0-1
	1882.5	26365	3	QPSK	8	7	22.62	1	0-1
	1882.5	26365	3	QPSK	15	0	22.62	1	0-1
	1882.5	26365	3	16-QAM	1	0	22.54	1	0-1
	1882.5	26365	3	16-QAM	1	7	22.35	1	0-1
	1882.5	26365	3	16-QAM	1	14	22.55	1	0-1
	1882.5	26365	3	16-QAM	8	0	21.42	2	0-2
	1882.5	26365	3	16-QAM	8	4	21.39	2	0-2
	1882.5	26365	3	16-QAM	8	7	21.44	2	0-2
	1882.5	26365	3	16-QAM	15	0	21.57	2	0-2
High	1913.5	26675	3	QPSK	1	0	23.47	0	0
	1913.5	26675	3	QPSK	1	7	23.46	0	0
	1913.5	26675	3	QPSK	1	14	23.47	0	0
	1913.5	26675	3	QPSK	8	0	22.51	1	0-1
	1913.5	26675	3	QPSK	8	4	22.48	1	0-1
	1913.5	26675	3	QPSK	8	7	22.53	1	0-1
	1913.5	26675	3	QPSK	15	0	22.42	1	0-1
	1913.5	26675	3	16-QAM	1	0	22.44	1	0-1
	1913.5	26675	3	16-QAM	1	7	22.65	1	0-1
	1913.5	26675	3	16-QAM	1	14	22.59	1	0-1
	1913.5	26675	3	16-QAM	8	0	21.41	2	0-2
	1913.5	26675	3	16-QAM	8	4	21.42	2	0-2
	1913.5	26675	3	16-QAM	8	7	21.45	2	0-2
	1913.5	26675	3	16-QAM	15	0	21.59	2	0-2



### 9.4.3

### LTE Band 41

Table 9-8  
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	2506	39750	20	QPSK	1	0	22.47	0	0
	2506	39750	20	QPSK	1	50	22.79	0	0
	2506	39750	20	QPSK	1	99	22.79	0	0
	2506	39750	20	QPSK	50	0	21.63	1	0-1
	2506	39750	20	QPSK	50	25	21.67	1	0-1
	2506	39750	20	QPSK	50	50	21.74	1	0-1
	2506	39750	20	QPSK	100	0	21.62	1	0-1
	2506	39750	20	16QAM	1	0	21.72	1	0-1
	2506	39750	20	16QAM	1	50	21.52	1	0-1
	2506	39750	20	16QAM	1	99	21.52	1	0-1
	2506	39750	20	16QAM	50	0	20.52	2	0-2
	2506	39750	20	16QAM	50	25	20.59	2	0-2
	2506	39750	20	16QAM	50	50	20.61	2	0-2
	2506	39750	20	16QAM	100	0	20.53	2	0-2
	2549.5	40185	20	QPSK	1	0	22.70	0	0
	2549.5	40185	20	QPSK	1	50	22.67	0	0
Low Mid	2549.5	40185	20	QPSK	1	99	22.74	0	0
	2549.5	40185	20	QPSK	50	0	21.65	1	0-1
	2549.5	40185	20	QPSK	50	25	21.57	1	0-1
	2549.5	40185	20	QPSK	50	50	21.60	1	0-1
	2549.5	40185	20	QPSK	100	0	21.58	1	0-1
	2549.5	40185	20	16-QAM	1	0	21.96	1	0-1
	2549.5	40185	20	16-QAM	1	50	21.98	1	0-1
	2549.5	40185	20	16-QAM	1	99	22.07	1	0-1
	2549.5	40185	20	16-QAM	50	0	20.50	2	0-2
	2549.5	40185	20	16-QAM	50	25	20.46	2	0-2
	2549.5	40185	20	16-QAM	50	50	20.45	2	0-2
	2549.5	40185	20	16-QAM	100	0	20.62	2	0-2
Mid	2593	40620	20	QPSK	1	0	22.82	0	0
	2593	40620	20	QPSK	1	50	22.76	0	0
	2593	40620	20	QPSK	1	99	22.70	0	0
	2593	40620	20	QPSK	50	0	21.67	1	0-1
	2593	40620	20	QPSK	50	25	21.65	1	0-1
	2593	40620	20	QPSK	50	50	21.68	1	0-1
	2593	40620	20	QPSK	100	0	21.67	1	0-1
	2593	40620	20	16-QAM	1	0	22.16	1	0-1
	2593	40620	20	16-QAM	1	50	22.10	1	0-1
	2593	40620	20	16-QAM	1	99	22.05	1	0-1
	2593	40620	20	16-QAM	50	0	20.70	2	0-2
	2593	40620	20	16-QAM	50	25	20.72	2	0-2
	2593	40620	20	16-QAM	50	50	20.74	2	0-2
	2593	40620	20	16-QAM	100	0	20.66	2	0-2
Mid High	2636.5	41055	20	QPSK	1	0	22.93	0	0
	2636.5	41055	20	QPSK	1	50	23.00	0	0
	2636.5	41055	20	QPSK	1	99	22.90	0	0
	2636.5	41055	20	QPSK	50	0	21.71	1	0-1
	2636.5	41055	20	QPSK	50	25	21.78	1	0-1
	2636.5	41055	20	QPSK	50	50	21.72	1	0-1
	2636.5	41055	20	QPSK	100	0	21.73	1	0-1
	2636.5	41055	20	16-QAM	1	0	21.52	1	0-1
	2636.5	41055	20	16-QAM	1	50	21.62	1	0-1
	2636.5	41055	20	16-QAM	1	99	21.51	1	0-1
	2636.5	41055	20	16-QAM	50	0	20.69	2	0-2
	2636.5	41055	20	16-QAM	50	25	20.73	2	0-2
	2636.5	41055	20	16-QAM	50	50	20.72	2	0-2
	2636.5	41055	20	16-QAM	100	0	20.79	2	0-2
High	2680	41490	20	QPSK	1	0	22.77	0	0
	2680	41490	20	QPSK	1	50	22.76	0	0
	2680	41490	20	QPSK	1	99	22.34	0	0
	2680	41490	20	QPSK	50	0	21.70	1	0-1
	2680	41490	20	QPSK	50	25	21.66	1	0-1
	2680	41490	20	QPSK	50	50	21.60	1	0-1
	2680	41490	20	QPSK	100	0	21.64	1	0-1
	2680	41490	20	16-QAM	1	0	22.06	1	0-1
	2680	41490	20	16-QAM	1	50	22.11	1	0-1
	2680	41490	20	16-QAM	1	99	21.70	1	0-1
	2680	41490	20	16-QAM	50	0	20.57	2	0-2
	2680	41490	20	16-QAM	50	25	20.53	2	0-2
	2680	41490	20	16-QAM	50	50	20.50	2	0-2
	2680	41490	20	16-QAM	100	0	20.70	2	0-2



Note: LTE Band 41 has 5 required test channels per FCC KDB Publication 447498 D01.

FCC ID: ZNLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 36 of 79	

**Table 9-9**  
**LTE Band 41 Conducted Powers - 15 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	2503.5	39725	15	QPSK	1	0	22.40	0	0
	2503.5	39725	15	QPSK	1	36	22.75	0	0
	2503.5	39725	15	QPSK	1	74	22.86	0	0
	2503.5	39725	15	QPSK	36	0	21.52	1	0-1
	2503.5	39725	15	QPSK	36	18	21.66	1	0-1
	2503.5	39725	15	QPSK	36	37	21.50	1	0-1
	2503.5	39725	15	QPSK	75	0	21.54	1	0-1
	2503.5	39725	15	16QAM	1	0	21.63	1	0-1
	2503.5	39725	15	16QAM	1	36	22.20	1	0-1
	2503.5	39725	15	16QAM	1	74	22.12	1	0-1
	2503.5	39725	15	16QAM	36	0	20.48	2	0-2
	2503.5	39725	15	16QAM	36	18	20.57	2	0-2
	2503.5	39725	15	16QAM	36	37	20.62	2	0-2
	2503.5	39725	15	16QAM	75	0	20.58	2	0-2
Low Mid	2548.25	40173	15	QPSK	1	0	22.67	0	0
	2548.25	40173	15	QPSK	1	36	22.73	0	0
	2548.25	40173	15	QPSK	1	74	22.79	0	0
	2548.25	40173	15	QPSK	36	0	21.57	1	0-1
	2548.25	40173	15	QPSK	36	18	21.57	1	0-1
	2548.25	40173	15	QPSK	36	37	21.56	1	0-1
	2548.25	40173	15	QPSK	75	0	21.57	1	0-1
	2548.25	40173	15	16-QAM	1	0	21.73	1	0-1
	2548.25	40173	15	16-QAM	1	36	22.00	1	0-1
	2548.25	40173	15	16-QAM	1	74	22.08	1	0-1
	2548.25	40173	15	16-QAM	36	0	20.65	2	0-2
	2548.25	40173	15	16-QAM	36	18	20.59	2	0-2
	2548.25	40173	15	16-QAM	36	37	20.57	2	0-2
	2548.25	40173	15	16-QAM	75	0	20.59	2	0-2
Mid	2593	40620	15	QPSK	1	0	22.93	0	0
	2593	40620	15	QPSK	1	36	22.98	0	0
	2593	40620	15	QPSK	1	74	22.95	0	0
	2593	40620	15	QPSK	36	0	21.61	1	0-1
	2593	40620	15	QPSK	36	18	21.66	1	0-1
	2593	40620	15	QPSK	36	37	21.63	1	0-1
	2593	40620	15	QPSK	75	0	21.61	1	0-1
	2593	40620	15	16-QAM	1	0	21.37	1	0-1
	2593	40620	15	16-QAM	1	36	21.43	1	0-1
	2593	40620	15	16-QAM	1	74	21.40	1	0-1
	2593	40620	15	16-QAM	36	0	20.65	2	0-2
	2593	40620	15	16-QAM	36	18	20.72	2	0-2
	2593	40620	15	16-QAM	36	37	20.76	2	0-2
	2593	40620	15	16-QAM	75	0	20.66	2	0-2
Mid High	2637.75	41068	15	QPSK	1	0	22.75	0	0
	2637.75	41068	15	QPSK	1	36	22.84	0	0
	2637.75	41068	15	QPSK	1	74	22.72	0	0
	2637.75	41068	15	QPSK	36	0	21.66	1	0-1
	2637.75	41068	15	QPSK	36	18	21.75	1	0-1
	2637.75	41068	15	QPSK	36	37	21.68	1	0-1
	2637.75	41068	15	QPSK	75	0	21.72	1	0-1
	2637.75	41068	15	16-QAM	1	0	22.10	1	0-1
	2637.75	41068	15	16-QAM	1	36	22.18	1	0-1
	2637.75	41068	15	16-QAM	1	74	21.92	1	0-1
	2637.75	41068	15	16-QAM	36	0	20.67	2	0-2
	2637.75	41068	15	16-QAM	36	18	20.73	2	0-2
	2637.75	41068	15	16-QAM	36	37	20.72	2	0-2
	2637.75	41068	15	16-QAM	75	0	20.71	2	0-2
High	2682.5	41515	15	QPSK	1	0	22.78	0	0
	2682.5	41515	15	QPSK	1	36	22.80	0	0
	2682.5	41515	15	QPSK	1	74	22.33	0	0
	2682.5	41515	15	QPSK	36	0	21.66	1	0-1
	2682.5	41515	15	QPSK	36	18	21.63	1	0-1
	2682.5	41515	15	QPSK	36	37	21.47	1	0-1
	2682.5	41515	15	QPSK	75	0	21.54	1	0-1
	2682.5	41515	15	16-QAM	1	0	22.07	1	0-1
	2682.5	41515	15	16-QAM	1	36	22.05	1	0-1
	2682.5	41515	15	16-QAM	1	74	21.91	1	0-1
	2682.5	41515	15	16-QAM	36	0	20.70	2	0-2
	2682.5	41515	15	16-QAM	36	18	20.65	2	0-2
	2682.5	41515	15	16-QAM	36	37	20.55	2	0-2
	2682.5	41515	15	16-QAM	75	0	20.61	2	0-2



Note: LTE Band 41 has 5 required test channels per FCC KDB Publication 447498 D01.

FCC ID: ZNLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 37 of 79	

**Table 9-10**  
**LTE Band 41 Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	2501	39700	10	QPSK	1	0	22.56	0	0
	2501	39700	10	QPSK	1	25	22.88	0	0
	2501	39700	10	QPSK	1	49	22.96	0	0
	2501	39700	10	QPSK	25	0	21.51	1	0-1
	2501	39700	10	QPSK	25	12	21.61	1	0-1
	2501	39700	10	QPSK	25	25	21.73	1	0-1
	2501	39700	10	QPSK	50	0	21.54	1	0-1
	2501	39700	10	16QAM	1	0	21.67	1	0-1
	2501	39700	10	16QAM	1	25	21.40	1	0-1
	2501	39700	10	16QAM	1	49	21.43	1	0-1
	2501	39700	10	16QAM	25	0	20.45	2	0-2
	2501	39700	10	16QAM	25	12	20.53	2	0-2
	2501	39700	10	16QAM	25	25	20.69	2	0-2
	2501	39700	10	16QAM	50	0	20.48	2	0-2
	2547	40160	10	QPSK	1	0	22.72	0	0
Low Mid	2547	40160	10	QPSK	1	25	22.75	0	0
	2547	40160	10	QPSK	1	49	22.75	0	0
	2547	40160	10	QPSK	25	0	21.66	1	0-1
	2547	40160	10	QPSK	25	12	21.66	1	0-1
	2547	40160	10	QPSK	25	25	21.69	1	0-1
	2547	40160	10	QPSK	50	0	21.59	1	0-1
	2547	40160	10	16-QAM	1	0	22.13	1	0-1
	2547	40160	10	16-QAM	1	25	22.19	1	0-1
	2547	40160	10	16-QAM	1	49	22.12	1	0-1
	2547	40160	10	16-QAM	25	0	20.65	2	0-2
	2547	40160	10	16-QAM	25	12	20.62	2	0-2
	2547	40160	10	16-QAM	25	25	20.64	2	0-2
	2547	40160	10	16-QAM	50	0	20.58	2	0-2
	2593	40620	10	QPSK	1	0	22.85	0	0
	2593	40620	10	QPSK	1	25	22.88	0	0
Mid	2593	40620	10	QPSK	1	49	22.83	0	0
	2593	40620	10	QPSK	25	0	21.85	1	0-1
	2593	40620	10	QPSK	25	12	21.76	1	0-1
	2593	40620	10	QPSK	25	25	21.76	1	0-1
	2593	40620	10	QPSK	50	0	21.70	1	0-1
	2593	40620	10	16-QAM	1	0	22.08	1	0-1
	2593	40620	10	16-QAM	1	25	22.20	1	0-1
	2593	40620	10	16-QAM	1	49	22.19	1	0-1
	2593	40620	10	16-QAM	25	0	20.85	2	0-2
	2593	40620	10	16-QAM	25	12	20.88	2	0-2
	2593	40620	10	16-QAM	25	25	20.80	2	0-2
	2593	40620	10	16-QAM	50	0	20.80	2	0-2
	2639	41080	10	QPSK	1	0	22.81	0	0
	2639	41080	10	QPSK	1	25	22.82	0	0
	2639	41080	10	QPSK	1	49	22.79	0	0
Mid High	2639	41080	10	QPSK	25	0	21.81	1	0-1
	2639	41080	10	QPSK	25	12	21.80	1	0-1
	2639	41080	10	QPSK	25	25	21.72	1	0-1
	2639	41080	10	QPSK	50	0	21.80	1	0-1
	2639	41080	10	16-QAM	1	0	22.05	1	0-1
	2639	41080	10	16-QAM	1	25	22.18	1	0-1
	2639	41080	10	16-QAM	1	49	22.14	1	0-1
	2639	41080	10	16-QAM	25	0	20.92	2	0-2
	2639	41080	10	16-QAM	25	12	20.94	2	0-2
	2639	41080	10	16-QAM	25	25	20.85	2	0-2
	2639	41080	10	16-QAM	50	0	20.83	2	0-2
	2685	41540	10	QPSK	1	0	23.05	0	0
	2685	41540	10	QPSK	1	25	22.93	0	0
	2685	41540	10	QPSK	1	49	22.53	0	0
	2685	41540	10	QPSK	25	0	21.65	1	0-1
High	2685	41540	10	QPSK	25	12	21.63	1	0-1
	2685	41540	10	QPSK	25	25	21.44	1	0-1
	2685	41540	10	QPSK	50	0	21.56	1	0-1
	2685	41540	10	16-QAM	1	0	21.58	1	0-1
	2685	41540	10	16-QAM	1	25	21.48	1	0-1
	2685	41540	10	16-QAM	1	49	21.55	1	0-1
	2685	41540	10	16-QAM	25	0	20.66	2	0-2
	2685	41540	10	16-QAM	25	12	20.60	2	0-2
	2685	41540	10	16-QAM	25	25	20.48	2	0-2
	2685	41540	10	16-QAM	50	0	20.58	2	0-2

Note: LTE Band 41 has 5 required test channels per FCC KDB Publication 447498 D01.

FCC ID: ZNLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 38 of 79	

## 9.5 WLAN Conducted Powers

**Table 9-11**  
**IEEE 802.11b Average RF Power**



Mode	Freq	Channel	802.11b (2.4 GHz) Conducted Power [dBm]			
			Data Rate [Mbps]			
	[MHz]		1	2	5.5	11
802.11b	2412	1*	15.59	15.51	15.52	15.58
802.11b	2437	6*	16.48	16.51	16.52	16.54
802.11b	2462	11*	16.48	16.46	16.45	16.52

**Table 9-12**  
**IEEE 802.11g Average RF Power**

Mode	Freq	Channel	802.11g (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6	9	12	18	24	36	48	54
802.11g	2412	1	12.99	13.08	13.13	13.15	13.14	13.07	13.26	13.12
802.11g	2437	6	13.80	13.89	13.89	13.94	13.91	13.95	14.06	13.75
802.11g	2462	11	13.65	13.85	13.81	13.92	13.86	13.95	14.11	13.74

**Table 9-13**  
**IEEE 802.11n Average RF Power**

Mode	Freq	Channel	802.11n (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6.5	13	20	26	39	52	58	65
802.11n	2412	1	12.33	12.16	12.30	12.34	12.37	12.44	12.44	12.39
802.11n	2437	6	13.04	13.16	13.15	13.23	13.21	13.13	13.32	13.09
802.11n	2462	11	12.91	12.97	12.92	12.85	13.03	13.04	13.03	13.05



FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 39 of 79

**Table 9-14**  
**IEEE 802.11a Average RF Power**

Mode	Freq	Channel	802.11a (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6	9	12	18	24	36	48	54
802.11a	5180	36*	9.43	9.49	9.48	9.43	9.44	9.33	9.46	9.24
802.11a	5200	40	10.29	10.29	10.35	10.44	10.26	10.32	10.27	10.15
802.11a	5220	44	10.41	10.36	10.42	10.41	10.39	10.25	10.40	10.14
802.11a	5240	48*	11.19	11.20	11.26	11.22	11.18	11.16	11.10	10.92
802.11a	5260	52*	11.61	11.62	11.60	11.55	11.40	11.58	11.45	11.26
802.11a	5280	56	11.39	11.30	11.41	11.44	11.30	11.49	11.45	11.20
802.11a	5300	60	11.31	11.50	11.41	11.49	11.43	11.44	11.44	11.34
802.11a	5320	64*	11.26	11.30	11.15	11.43	11.37	11.16	11.28	11.08
802.11a	5500	100	10.52	10.56	10.55	10.52	10.54	10.37	10.46	10.31
802.11a	5520	104*	11.38	11.28	11.24	11.30	11.32	11.23	11.28	11.31
802.11a	5540	108	11.28	11.35	11.34	11.26	11.23	11.24	11.25	11.13
802.11a	5560	112	11.35	11.26	11.38	11.28	11.23	11.28	11.28	11.11
802.11a	5580	116*	11.08	11.16	11.24	11.14	11.23	11.24	11.18	10.96
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	11.00	10.99	11.10	11.10	11.01	10.88	10.88	10.54
802.11a	5680	136*	10.82	10.93	10.85	10.88	10.52	10.68	10.60	10.55
802.11a	5700	140	10.71	10.77	10.64	10.77	10.68	10.69	10.73	10.64
802.11a	5720	144	10.57	10.76	10.83	10.75	10.64	10.59	10.75	10.50
802.11a	5745	149*	10.79	10.91	10.94	10.85	10.95	10.75	10.91	10.65
802.11a	5765	153	10.91	10.85	10.83	10.90	10.70	10.78	10.73	10.64
802.11a	5785	157*	10.80	10.81	10.83	10.72	10.64	10.64	10.81	10.48
802.11a	5805	161*	10.61	10.59	10.57	10.68	10.62	10.63	10.57	10.49
802.11a	5825	165	10.49	10.54	10.58	10.55	10.40	10.51	10.65	10.32

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(\*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power then the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 40 of 79	



**Table 9-15**  
**IEEE 802.11n Average RF Power – 20 MHz Bandwidth**



Mode	Freq	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	9.37	9.41	9.34	9.36	9.34	9.28	9.30	9.23
802.11n	5200	40	10.38	10.30	10.33	10.27	10.20	10.28	10.35	10.30
802.11n	5220	44	10.30	10.35	10.19	10.13	10.17	10.24	10.14	10.20
802.11n	5240	48	11.13	11.19	11.11	11.11	11.09	11.13	11.13	11.15
802.11n	5260	52	11.52	11.50	11.39	11.45	11.40	11.35	11.39	11.34
802.11n	5280	56	11.32	11.39	11.34	11.35	11.31	11.31	11.34	11.37
802.11n	5300	60	11.41	11.37	11.40	11.31	11.32	11.22	11.28	11.20
802.11n	5320	64	11.27	11.33	11.35	11.35	11.16	11.14	11.13	11.28
802.11n	5500	100	10.42	10.44	10.42	10.33	10.46	10.40	10.44	10.33
802.11n	5520	104	11.32	11.37	11.39	11.29	11.27	11.29	11.37	11.22
802.11n	5540	108	11.21	11.23	11.21	11.08	11.30	11.14	11.14	11.22
802.11n	5560	112	10.99	11.00	11.04	11.23	11.20	11.12	11.14	11.26
802.11n	5580	116	11.07	11.11	11.18	11.22	11.08	10.96	11.12	11.11
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	10.97	10.93	11.00	10.87	11.00	10.88	10.87	10.88
802.11n	5680	136	10.83	10.78	10.60	10.77	10.69	10.79	10.85	10.76
802.11n	5700	140	10.76	10.72	10.79	10.74	10.72	10.63	10.58	10.63
802.11n	5720	144	10.72	10.71	10.65	10.74	10.76	10.71	10.56	10.66
802.11n	5745	149	10.84	10.72	10.84	10.89	10.71	10.78	10.75	10.71
802.11n	5765	153	10.80	10.73	10.69	10.73	10.72	10.64	10.63	10.66
802.11n	5785	157	10.66	10.71	10.66	10.68	10.65	10.56	10.68	10.63
802.11n	5805	161	10.50	10.44	10.43	10.55	10.44	10.32	10.43	10.49
802.11n	5825	165	10.46	10.49	10.44	10.49	10.54	10.46	10.42	10.37

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

**Table 9-16**  
**IEEE 802.11n Average RF Power – 40 MHz Bandwidth**

Mode	Freq	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	9.73	9.39	9.84	9.37	9.32	9.71	9.49	9.31
802.11n	5230	46	11.08	11.41	11.29	11.42	11.00	10.79	10.97	11.27
802.11n	5270	54	11.78	11.49	11.35	11.27	11.48	11.32	11.40	11.29
802.11n	5310	62	11.68	11.59	11.65	11.20	11.27	11.18	11.27	11.16
802.11n	5510	102	10.41	10.34	10.37	10.40	10.29	10.10	10.29	10.27
802.11n	5550	110	11.28	11.39	11.33	11.42	11.41	11.44	11.42	11.18
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	10.91	10.77	10.98	10.78	10.58	10.71	10.94	10.73
802.11n	5710	142	10.78	10.98	10.66	10.72	10.67	10.75	10.64	10.64
802.11n	5755	151	10.30	10.33	10.49	10.24	10.03	10.32	10.42	10.43
802.11n	5795	159	10.82	10.50	10.00	9.89	9.97	10.57	10.51	9.94

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.


FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 41 of 79	

**Table 9-17**  
**IEEE 802.11ac Average RF Power – 80 MHz Bandwidth**


Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac	5210	42	<b>9.74</b>	9.47	9.31	9.25	9.46	9.37	9.26	9.34	9.30	9.37
802.11ac	5290	58	<b>11.26</b>	11.28	11.32	11.19	11.06	11.21	11.01	11.24	11.28	11.24
802.11ac	5530	106	10.40	10.32	10.31	10.27	10.21	10.29	10.12	10.30	10.36	10.35
802.11ac	5690	138	10.89	10.99	10.61	10.68	10.69	10.58	10.51	10.71	10.87	10.60
802.11ac	5775	155	<b>10.82</b>	10.90	11.00	10.73	10.95	11.00	10.62	10.75	10.89	10.83

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

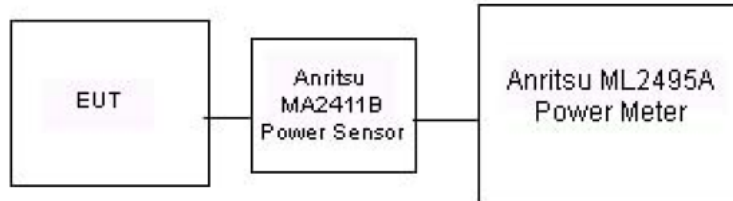

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n/ac) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- Full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-4**  
**Power Measurement Setup for Bandwidths < 50 MHz**



**Figure 9-5**  
**Power Measurement Setup for Bandwidths > 50 MHz**



FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 42 of 79	

## 10 SYSTEM VERIFICATION

### 10.1 Tissue Verification

**Table 10-1**  
**Head Measured Tissue Properties**



Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
11/14/2013	835H	21.2	820	0.863	40.274	0.899	41.578	-4.00%	-3.14%
			835	0.877	40.224	0.900	41.500	-2.56%	-3.07%
			850	0.892	40.090	0.916	41.500	-2.62%	-3.40%
11/13/2013	1900H	21.4	1850	1.397	40.805	1.400	40.000	-0.21%	2.01%
			1880	1.436	40.639	1.400	40.000	2.57%	1.60%
			1910	1.456	40.513	1.400	40.000	4.00%	1.28%
11/19/2013	1900H	21.9	1850	1.375	39.748	1.400	40.000	-1.79%	-0.63%
			1880	1.401	39.642	1.400	40.000	0.07%	-0.89%
			1910	1.432	39.424	1.400	40.000	2.29%	-1.44%
11/12/2013	2450H	22.3	2401	1.779	40.256	1.756	39.287	1.31%	2.47%
			2450	1.832	40.058	1.800	39.200	1.78%	2.19%
			2499	1.894	39.862	1.853	39.138	2.21%	1.85%
11/18/2013	2600H	21.3	2600	1.981	39.176	1.964	39.009	0.87%	0.43%
			2650	2.030	39.027	2.018	38.945	0.59%	0.21%
			2700	2.089	38.847	2.073	38.882	0.77%	-0.09%
11/26/2013	5200H - 5800H	22.1	5200	4.500	35.078	4.655	35.986	-3.33%	-2.52%
			5220	4.521	35.048	4.676	35.963	-3.31%	-2.54%
			5240	4.556	35.023	4.696	35.940	-2.98%	-2.55%
			5260	4.570	35.053	4.717	35.917	-3.12%	-2.41%
			5280	4.578	35.031	4.737	35.894	-3.36%	-2.40%
			5300	4.587	34.954	4.758	35.871	-3.59%	-2.56%
			5500	4.809	34.681	4.963	35.643	-3.10%	-2.70%
			5520	4.825	34.702	4.983	35.620	-3.17%	-2.58%
			5600	4.905	34.516	5.065	35.529	-3.16%	-2.85%
			5680	4.977	34.448	5.147	35.437	-3.30%	-2.79%
			5700	4.996	34.406	5.168	35.414	-3.33%	-2.85%
			5765	5.087	34.379	5.234	35.340	-2.81%	-2.72%
			5785	5.085	34.375	5.255	35.317	-3.24%	-2.67%
			5800	5.088	34.302	5.270	35.300	-3.45%	-2.83%

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 43 of 79

**Table 10-2**  
**Body Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
11/12/2013	835B	22.6	820	0.962	53.858	0.969	55.258	-0.72%	-2.53%
			835	0.977	53.690	0.970	55.200	0.72%	-2.74%
			850	0.990	53.597	0.988	55.154	0.20%	-2.82%
11/14/2013	835B	23.5	820	0.972	55.582	0.969	55.258	0.31%	0.59%
			835	0.989	55.428	0.970	55.200	1.96%	0.41%
			850	1.001	55.348	0.988	55.154	1.32%	0.35%
11/14/2013	1900B	21.0	1850	1.509	54.578	1.520	53.300	-0.72%	2.40%
			1880	1.544	54.492	1.520	53.300	1.58%	2.24%
			1910	1.585	54.283	1.520	53.300	4.28%	1.84%
11/19/2013	1900B	23.7	1850	1.533	51.579	1.520	53.300	0.86%	-3.23%
			1880	1.564	51.539	1.520	53.300	2.89%	-3.30%
			1910	1.594	51.411	1.520	53.300	4.87%	-3.54%
11/11/2013	2450B	23.0	2401	1.936	53.595	1.903	52.765	1.73%	1.57%
			2450	1.991	53.360	1.950	52.700	2.10%	1.25%
			2499	2.050	53.215	2.019	52.638	1.54%	1.10%
11/18/2013	2450 - 2600B	23.6	2401	1.943	52.600	1.903	52.765	2.10%	-0.31%
			2450	2.003	52.362	1.950	52.700	2.72%	-0.64%
			2499	2.082	52.259	2.019	52.638	3.12%	-0.72%
			2500	2.086	52.228	2.021	52.636	3.22%	-0.78%
			2550	2.160	52.024	2.092	52.573	3.25%	-1.04%
			2600	2.220	51.836	2.163	52.509	2.64%	-1.28%
			2650	2.293	51.743	2.234	52.445	2.64%	-1.34%
11/12/2013	5200B - 5800B	21.3	2700	2.361	51.442	2.305	52.382	2.43%	-1.79%
			5200	5.468	46.966	5.299	49.014	3.19%	-4.18%
			5220	5.500	46.938	5.323	48.987	3.33%	-4.18%
			5240	5.525	46.862	5.346	48.960	3.35%	-4.29%
			5260	5.558	46.854	5.369	48.933	3.52%	-4.25%
			5280	5.575	46.806	5.393	48.906	3.37%	-4.29%
			5300	5.598	46.773	5.416	48.879	3.36%	-4.31%
			5500	5.866	46.391	5.650	48.607	3.82%	-4.56%
			5520	5.887	46.372	5.673	48.580	3.77%	-4.55%
			5600	6.007	46.227	5.766	48.471	4.18%	-4.63%
			5680	6.116	46.099	5.860	48.363	4.37%	-4.68%
			5700	6.145	46.051	5.883	48.336	4.45%	-4.73%
			5765	6.227	45.954	5.959	48.248	4.50%	-4.75%
			5785	6.252	45.938	5.982	48.220	4.51%	-4.73%
			5800	6.281	45.926	6.000	48.200	4.68%	-4.72%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per IEEE 1528 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 44 of 79	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.


**Table 10-3**  
**System Verification Results – 1 g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
D	835	HEAD	11/14/2013	24.0	21.2	0.100	4d119	3022	0.978	9.680	9.780	1.03%
H	1900	HEAD	11/13/2013	22.2	21.5	0.100	5d148	3318	4.080	39.700	40.800	2.77%
F	1900	HEAD	11/19/2013	24.0	21.5	0.040	5d148	3213	1.710	39.700	42.750	7.68%
G	2450	HEAD	11/12/2013	22.6	22.3	0.100	797	3209	4.960	52.500	49.600	-5.52%
E	2600	HEAD	11/18/2013	23.6	22.1	0.100	1004	3914	6.020	58.200	60.200	3.44%
E	5200	HEAD	11/26/2013	22.1	21.7	0.040	1120	3914	3.020	76.000	75.500	-0.66%
E	5300	HEAD	11/26/2013	22.1	21.7	0.040	1120	3914	3.040	78.700	76.000	-3.43%
E	5500	HEAD	11/26/2013	22.1	21.7	0.040	1120	3914	3.180	80.100	79.500	-0.75%
E	5600	HEAD	11/26/2013	22.1	21.7	0.040	1120	3914	3.440	79.900	86.000	7.63%
E	5800	HEAD	11/26/2013	22.1	21.7	0.040	1120	3914	3.050	74.900	76.250	1.80%
G	835	BODY	11/12/2013	24.5	22.9	0.100	4d119	3209	0.956	9.540	9.560	0.21%
G	835	BODY	11/14/2013	24.5	23.8	0.100	4d119	3209	0.979	9.540	9.790	2.62%
I	1900	BODY	11/14/2013	21.1	21.0	0.100	5d148	3319	4.040	40.800	40.400	-0.98%
G	1900	BODY	11/19/2013	23.7	23.6	0.100	5d148	3209	4.350	40.800	43.500	6.62%
C	2450	BODY	11/11/2013	24.1	21.5	0.100	882	3263	4.970	49.900	49.700	-0.40%
D	2450	BODY	11/18/2013	24.1	23.7	0.100	797	3022	5.150	49.600	51.500	3.83%
D	2600	BODY	11/18/2013	23.9	23.6	0.100	1004	3022	6.100	57.500	61.000	6.09%
A	5200	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	7.500	75.500	75.000	-0.66%
A	5300	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	7.950	75.300	79.500	5.58%
A	5500	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	7.960	80.800	79.600	-1.49%
A	5600	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	8.320	80.300	83.200	3.61%
A	5800	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	7.480	75.100	74.800	-0.40%

FCC ID: ZNFS995	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 45 of 79

**Table 10-4**  
**System Verification Results – Extremity**

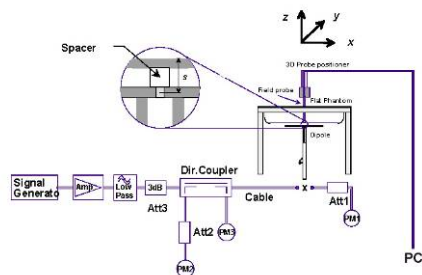

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
A	5200	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	2.100	21.100	21.000	-0.47%
A	5300	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	2.210	21.100	22.100	4.74%
A	5500	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	2.210	22.400	22.100	-1.34%
A	5600	BODY	11/12/2013	21.5	20.4	0.100	1057	3589	2.300	22.300	23.000	3.14%



**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 46 of 79	

# 11 SAR DATA SUMMARY



## 11.1 Standalone Head SAR Data

**Table 11-1**  
**CDMA BC10 (§90S) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.98	-0.01	Right	Cheek	1881	1:1	0.494	1.052	0.520	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.98	0.02	Right	Tilt	1881	1:1	0.312	1.052	0.328	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.98	-0.01	Left	Cheek	1881	1:1	0.597	1.052	0.628	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.98	-0.07	Left	Tilt	1881	1:1	0.347	1.052	0.365	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.01	-0.11	Right	Cheek	1881	1:1	0.486	1.045	0.508	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.01	0.09	Right	Tilt	1881	1:1	0.337	1.045	0.352	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.01	-0.03	Left	Cheek	1881	1:1	0.628	1.045	0.656	A1
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.01	0.03	Left	Tilt	1881	1:1	0.356	1.045	0.372	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-2**  
**CDMA BC0 (§22H) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.85	0.03	Right	Cheek	1881	1:1	0.450	1.084	0.488	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.85	-0.04	Right	Tilt	1881	1:1	0.273	1.084	0.296	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.85	-0.06	Left	Cheek	1881	1:1	0.512	1.084	0.555	A2
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.85	-0.02	Left	Tilt	1881	1:1	0.286	1.084	0.310	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.96	-0.05	Right	Cheek	1881	1:1	0.419	1.057	0.443	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.96	-0.01	Right	Tilt	1881	1:1	0.270	1.057	0.285	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.96	-0.08	Left	Cheek	1881	1:1	0.508	1.057	0.537	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.96	-0.01	Left	Tilt	1881	1:1	0.265	1.057	0.280	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 47 of 79





**Table 11-3**  
**PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	24.2	23.93	0.03	Right	Cheek	1881	1:1	0.240	1.064	0.255	
1880.00	600	PCS CDMA	RC3 / SO55	24.2	23.93	0.07	Right	Tilt	1881	1:1	0.239	1.064	0.254	
1880.00	600	PCS CDMA	RC3 / SO55	24.2	23.93	0.07	Left	Cheek	1881	1:1	0.415	1.064	0.442	A3
1880.00	600	PCS CDMA	RC3 / SO55	24.2	23.93	-0.15	Left	Tilt	1881	1:1	0.173	1.064	0.184	
1880.00	600	PCS CDMA	EVDO Rev. A	24.2	23.96	-0.05	Right	Cheek	1881	1:1	0.252	1.057	0.266	
1880.00	600	PCS CDMA	EVDO Rev. A	24.2	23.96	-0.11	Right	Tilt	1881	1:1	0.189	1.057	0.200	
1880.00	600	PCS CDMA	EVDO Rev. A	24.2	23.96	0.11	Left	Cheek	1881	1:1	0.293	1.057	0.310	
1880.00	600	PCS CDMA	EVDO Rev. A	24.2	23.96	-0.15	Left	Tilt	1881	1:1	0.131	1.057	0.138	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-4**  
**GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	33.12	0.04	Right	Cheek	1880	1	1:8.3	0.442	1.019	0.450	
836.60	190	GSM 850	GSM	33.2	33.12	0.00	Right	Tilt	1880	1	1:8.3	0.333	1.019	0.339	
836.60	190	GSM 850	GSM	33.2	33.12	-0.12	Left	Cheek	1880	1	1:8.3	0.490	1.019	0.499	
836.60	190	GSM 850	GSM	33.2	33.12	-0.01	Left	Tilt	1880	1	1:8.3	0.299	1.019	0.305	
836.60	190	GSM 850	GPRS	31.2	30.80	-0.07	Right	Cheek	1880	2	1:4.15	0.567	1.096	0.621	
836.60	190	GSM 850	GPRS	31.2	30.80	-0.04	Right	Tilt	1880	2	1:4.15	0.379	1.096	0.415	
836.60	190	GSM 850	GPRS	31.2	30.80	0.04	Left	Cheek	1880	2	1:4.15	0.669	1.096	0.733	A4
836.60	190	GSM 850	GPRS	31.2	30.80	-0.01	Left	Tilt	1880	2	1:4.15	0.390	1.096	0.427	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 48 of 79	

**Table 11-5**  
**GSM 1900 Head SAR**



MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.2	29.44	0.06	Right	Cheek	1880	1	1:8.3	0.106	1.191	0.126	
1880.00	661	GSM 1900	GSM	30.2	29.44	0.02	Right	Tilt	1880	1	1:8.3	0.075	1.191	0.089	
1880.00	661	GSM 1900	GSM	30.2	29.44	0.01	Left	Cheek	1880	1	1:8.3	0.127	1.191	0.151	
1880.00	661	GSM 1900	GSM	30.2	29.44	0.05	Left	Tilt	1880	1	1:8.3	0.049	1.191	0.058	
1880.00	661	GSM 1900	GPRS	28.2	27.61	-0.03	Right	Cheek	1880	2	1:4.15	0.186	1.146	0.213	A5
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.05	Right	Tilt	1880	2	1:4.15	0.111	1.146	0.127	
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.07	Left	Cheek	1880	2	1:4.15	0.146	1.146	0.167	
1880.00	661	GSM 1900	GPRS	28.2	27.61	-0.04	Left	Tilt	1880	2	1:4.15	0.066	1.146	0.076	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-6**  
**UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.7	23.60	0.09	Right	Cheek	1876	1:1	0.366	1.023	0.374	
836.60	4183	UMTS 850	RMC	23.7	23.60	0.00	Right	Tilt	1876	1:1	0.233	1.023	0.238	
836.60	4183	UMTS 850	RMC	23.7	23.60	-0.01	Left	Cheek	1876	1:1	0.427	1.023	0.437	A6
836.60	4183	UMTS 850	RMC	23.7	23.60	0.05	Left	Tilt	1876	1:1	0.241	1.023	0.247	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-7**  
**UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.06	Right	Cheek	1876	1:1	0.116	1.023	0.119	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.08	Right	Tilt	1876	1:1	0.085	1.023	0.087	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.17	Left	Cheek	1876	1:1	0.142	1.023	0.145	A7
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.06	Left	Tilt	1876	1:1	0.058	1.023	0.059	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 49 of 79	

**Table 11-8**  
**LTE Band 26 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	0.07	0	Right	Cheek	QPSK	1	0	1877	1:1	0.395	1.019	0.403	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.09	1	Right	Cheek	QPSK	25	0	1877	1:1	0.299	1.052	0.315	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	0.08	0	Right	Tilt	QPSK	1	0	1877	1:1	0.252	1.019	0.257	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.03	1	Right	Tilt	QPSK	25	0	1877	1:1	0.195	1.052	0.205	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	0.03	0	Left	Cheek	QPSK	1	0	1877	1:1	0.499	1.019	0.508	A8
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.02	1	Left	Cheek	QPSK	25	0	1877	1:1	0.376	1.052	0.396	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	-0.06	0	Left	Tilt	QPSK	1	0	1877	1:1	0.297	1.019	0.303	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	-0.17	1	Left	Tilt	QPSK	25	0	1877	1:1	0.223	1.052	0.235	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak									Head										
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g)										
									averaged over 1 gram										

**Table 11-9**  
**LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	0.08	0	Right	Cheek	QPSK	1	49	1879	1:1	0.236	1.009	0.238	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	0.05	1	Right	Cheek	QPSK	25	25	1879	1:1	0.188	1.030	0.194	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	-0.16	0	Right	Tilt	QPSK	1	49	1879	1:1	0.163	1.009	0.164	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	0.10	1	Right	Tilt	QPSK	25	25	1879	1:1	0.129	1.030	0.133	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	0.02	0	Left	Cheek	QPSK	1	49	1879	1:1	0.254	1.009	0.256	A9
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	-0.02	1	Left	Cheek	QPSK	25	25	1879	1:1	0.204	1.030	0.210	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	0.09	0	Left	Tilt	QPSK	1	49	1879	1:1	0.103	1.009	0.104	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	0.03	1	Left	Tilt	QPSK	25	25	1879	1:1	0.074	1.030	0.076	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 50 of 79	

**Table 11-10**  
**LTE Band 41 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor (Conducted Power)	Scaling Factor (CP Duty)	Scaled SAR (1g)	Plot #
																(W/kg)			(W/kg)	
2636.50	41055	Mid-High	LTE Band 41	20	23.2	23.00	-0.02	0	Right	Cheek	QPSK	1	50	1875	1:1.59	0.344	1.047	1.01	0.364	A10
2636.50	41055	Mid-High	LTE Band 41	20	22.2	21.78	0.05	1	Right	Cheek	QPSK	50	25	1875	1:1.59	0.262	1.102	1.01	0.292	
2636.50	41055	Mid-High	LTE Band 41	20	23.2	23.00	0.04	0	Right	Tilt	QPSK	1	50	1875	1:1.59	0.106	1.047	1.01	0.112	
2636.50	41055	Mid-High	LTE Band 41	20	22.2	21.78	0.11	1	Right	Tilt	QPSK	50	25	1875	1:1.59	0.079	1.102	1.01	0.088	
2636.50	41055	Mid-High	LTE Band 41	20	23.2	23.00	0.07	0	Left	Cheek	QPSK	1	50	1875	1:1.59	0.166	1.047	1.01	0.176	
2636.50	41055	Mid-High	LTE Band 41	20	22.2	21.78	0.02	1	Left	Cheek	QPSK	50	25	1875	1:1.59	0.130	1.102	1.01	0.144	
2636.50	41055	Mid-High	LTE Band 41	20	23.2	23.00	0.02	0	Left	Tilt	QPSK	1	50	1875	1:1.59	0.185	1.047	1.01	0.196	
2636.50	41055	Mid-High	LTE Band 41	20	22.2	21.78	0.14	1	Left	Tilt	QPSK	50	25	1875	1:1.59	0.132	1.102	1.01	0.146	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Head											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											



**Table 11-11**  
**DTS Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	-0.03	Right	Cheek	1890	1	1:1	0.388	1.127	0.437	A11
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.20	Right	Tilt	1890	1	1:1	0.231	1.127	0.260	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.14	Left	Cheek	1890	1	1:1	0.141	1.127	0.159	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.19	Left	Tilt	1890	1	1:1	0.105	1.127	0.118	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.14	Right	Cheek	1890	6	1:1	0.019	1.285	0.024	A12
5775	155	IEEE 802.11ac	OFDM	11.5	10.82	0.18	Right	Cheek	1890	29.3	1:1	0.009	1.169	0.011	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.06	Right	Tilt	1890	6	1:1	0.011	1.285	0.014	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.19	Left	Cheek	1890	6	1:1	0.008	1.285	0.010	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.13	Left	Tilt	1890	6	1:1	0.008	1.285	0.010	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 51 of 79	

**Table 11-12**  
**NII Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	-0.02	Right	Cheek	1890	6	1:1	0.131	1.205	0.158	
5210	42	IEEE 802.11ac	OFDM	11.5	9.74	0.04	Right	Cheek	1890	29.3	1:1	0.058	1.500	0.087	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	0.14	Right	Tilt	1890	6	1:1	0.060	1.205	0.072	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	-0.09	Left	Cheek	1890	6	1:1	0.017	1.205	0.020	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	0.20	Left	Tilt	1890	6	1:1	0.042	1.205	0.051	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	-0.10	Right	Cheek	1890	6	1:1	0.142	1.094	0.155	A13
5290	58	IEEE 802.11ac	OFDM	11.5	11.26	0.15	Right	Cheek	1890	29.3	1:1	0.062	1.057	0.066	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	0.13	Right	Tilt	1890	6	1:1	0.141	1.094	0.154	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	0.05	Left	Cheek	1890	6	1:1	0.022	1.094	0.024	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	0.04	Left	Tilt	1890	6	1:1	0.024	1.094	0.026	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.06	Right	Cheek	1890	6	1:1	0.131	1.153	0.151	
5690	138	IEEE 802.11ac	OFDM	11.5	10.89	0.04	Right	Cheek	1890	29.3	1:1	0.006	1.151	0.007	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	-0.09	Right	Tilt	1890	6	1:1	0.123	1.153	0.142	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.08	Left	Cheek	1890	6	1:1	0.032	1.153	0.037	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.05	Left	Tilt	1890	6	1:1	0.025	1.153	0.029	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 52 of 79	

## 11.2 Standalone Body-Worn SAR Data

**Table 11-13**  
**CDMA/GSM/UMTS Body-Worn SAR Data**



MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	TDSO / SO32	25.2	25.02	-0.04	8 mm	1881	N/A	1:1	back	0.707	1.042	0.737	A14
836.52	384	CDMA BC0 (§22H)	TDSO / SO32	25.2	24.92	0.00	8 mm	1881	N/A	1:1	back	0.611	1.067	0.652	A16
1851.25	25	PCS CDMA	TDSO / SO32	24.2	23.95	0.00	8 mm	1881	N/A	1:1	back	0.925	1.059	0.980	
1880.00	600	PCS CDMA	TDSO / SO32	24.2	23.93	-0.02	8 mm	1881	N/A	1:1	back	1.090	1.064	1.160	A18
1908.75	1175	PCS CDMA	TDSO / SO32	24.2	23.92	0.00	8 mm	1881	N/A	1:1	back	1.080	1.067	1.152	
836.60	190	GSM 850	GSM	33.2	33.12	0.00	8 mm	1880	1	1:8.3	back	0.569	1.019	0.580	
836.60	190	GSM 850	GPRS	31.2	30.80	0.00	8 mm	1880	2	1:4.15	back	0.684	1.096	0.750	A20
1880.00	661	GSM 1900	GSM	30.2	29.44	0.07	8 mm	1880	1	1:8.3	back	0.396	1.191	0.472	
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.00	8 mm	1880	2	1:4.15	back	0.545	1.146	0.625	A22
836.60	4183	UMTS 850	RMC	23.7	23.60	0.02	8 mm	1876	N/A	1:1	back	0.442	1.023	0.452	A23
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.03	8 mm	1876	N/A	1:1	back	0.579	1.023	0.592	A25
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-14**  
**LTE Band 26 / Band 25 Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	0.01	0	1877	QPSK	1	0	8 mm	back	1:1	0.552	1.019	0.562	A27
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.05	1	1877	QPSK	25	0	8 mm	back	1:1	0.406	1.052	0.427	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	-0.05	0	1879	QPSK	1	49	8 mm	back	1:1	0.767	1.009	0.774	A29
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	-0.01	1	1879	QPSK	25	25	8 mm	back	1:1	0.625	1.030	0.644	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

**Table 11-15**  
**LTE Band 41 Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor (Conducted Power)	Scaling Factor (CP Duty)	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)			(W/kg)		
2636.50	41055	Mid-High	LTE Band 41	20	23.2	23.00	0.06	0	1875	QPSK	1	50	8 mm	back	1:1.59	0.374	1.047	1.01	0.396	A31
2636.50	41055	Mid-High	LTE Band 41	20	22.2	21.78	-0.02	1	1875	QPSK	50	25	8 mm	back	1:1.59	0.287	1.102	1.01	0.319	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 53 of 79

**Table 11-16**  
**DTS Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.10	8 mm	1890	1	back	1:1	0.187	1.127	0.211	A33
5765	153	IEEE 802.11a	OFDM	12.0	10.91	-0.08	8 mm	1890	6	back	1:1	0.026	1.285	0.033	A34
5775	155	IEEE 802.11ac	OFDM	11.5	10.82	0.05	8 mm	1890	29.3	back	1:1	0.026	1.169	0.030	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-17**  
**NII Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	0.02	8 mm	1890	6	back	1:1	0.108	1.205	0.130	
5210	42	IEEE 802.11ac	OFDM	11.5	9.74	0.06	8 mm	1890	29.3	back	1:1	0.062	1.500	0.093	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	0.04	8 mm	1890	6	back	1:1	0.116	1.094	0.127	A35
5290	58	IEEE 802.11ac	OFDM	11.5	11.26	-0.05	8 mm	1890	29.3	back	1:1	0.095	1.057	0.100	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.09	8 mm	1890	6	back	1:1	0.092	1.153	0.106	
5690	138	IEEE 802.11ac	OFDM	11.5	10.89	0.03	8 mm	1890	29.3	back	1:1	0.058	1.151	0.067	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 54 of 79	





## 11.3 Standalone Wireless Router SAR Data

Table 11-18  
CDMA Hotspot SAR Data



MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.04	0.01	8 mm	1881	1:1	back	0.702	1.038	0.729	A15
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.04	-0.03	8 mm	1881	1:1	front	0.694	1.038	0.720	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.04	-0.02	10 mm	1881	1:1	bottom	0.325	1.038	0.337	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.04	0.08	10 mm	1881	1:1	right	0.456	1.038	0.473	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	25.04	-0.01	10 mm	1881	1:1	left	0.636	1.038	0.660	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.98	-0.01	8 mm	1881	1:1	back	0.608	1.052	0.640	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.98	0.00	8 mm	1881	1:1	front	0.674	1.052	0.709	A17
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.98	0.00	10 mm	1881	1:1	bottom	0.323	1.052	0.340	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.98	-0.05	10 mm	1881	1:1	right	0.368	1.052	0.387	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.98	-0.02	10 mm	1881	1:1	left	0.524	1.052	0.551	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.2	23.95	-0.01	8 mm	1881	1:1	back	0.962	1.059	1.019	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	23.99	-0.01	8 mm	1881	1:1	back	1.140	1.050	1.197	A19
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.2	23.96	-0.05	8 mm	1881	1:1	back	1.130	1.057	1.194	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.2	23.95	-0.02	8 mm	1881	1:1	front	0.912	1.059	0.966	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	23.99	-0.04	8 mm	1881	1:1	front	1.040	1.050	1.092	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.2	23.96	-0.03	8 mm	1881	1:1	front	0.979	1.057	1.035	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.2	23.95	-0.03	10 mm	1881	1:1	bottom	0.795	1.059	0.842	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	23.99	-0.02	10 mm	1881	1:1	bottom	0.975	1.050	1.024	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.2	23.96	-0.01	10 mm	1881	1:1	bottom	0.895	1.057	0.946	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	23.99	-0.01	10 mm	1881	1:1	right	0.255	1.050	0.268	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	23.99	-0.05	10 mm	1881	1:1	left	0.272	1.050	0.286	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	23.99	-0.06	8 mm	1881	1:1	back	1.090	1.050	1.145	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Blue entry represents variability measurement.

FCC ID: ZNFS995	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 55 of 79

**Table 11-19**  
**GPRS/UMTS Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	31.2	30.80	0.00	8 mm	1880	2	1:4.15	back	0.684	1.096	0.750	
824.20	128	GSM 850	GPRS	31.2	30.66	-0.04	8 mm	1880	2	1:4.15	front	0.678	1.132	0.767	
836.60	190	GSM 850	GPRS	31.2	30.80	0.02	8 mm	1880	2	1:4.15	front	0.765	1.096	0.838	A21
848.80	251	GSM 850	GPRS	31.2	30.77	0.01	8 mm	1880	2	1:4.15	front	0.655	1.104	0.723	
836.60	190	GSM 850	GPRS	31.2	30.80	-0.18	10 mm	1880	2	1:4.15	bottom	0.442	1.096	0.484	
836.60	190	GSM 850	GPRS	31.2	30.80	-0.15	10 mm	1880	2	1:4.15	right	0.495	1.096	0.543	
836.60	190	GSM 850	GPRS	31.2	30.80	0.07	10 mm	1880	2	1:4.15	left	0.650	1.096	0.712	
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.00	8 mm	1880	2	1:4.15	back	0.545	1.146	0.625	A22
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.01	8 mm	1880	2	1:4.15	front	0.519	1.146	0.595	
1880.00	661	GSM 1900	GPRS	28.2	27.61	-0.02	10 mm	1880	2	1:4.15	bottom	0.425	1.146	0.487	
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.04	10 mm	1880	2	1:4.15	right	0.123	1.146	0.141	
1880.00	661	GSM 1900	GPRS	28.2	27.61	0.08	10 mm	1880	2	1:4.15	left	0.121	1.146	0.139	
836.60	4183	UMTS 850	RMC	23.7	23.60	0.02	8 mm	1876	N/A	1:1	back	0.442	1.023	0.452	
836.60	4183	UMTS 850	RMC	23.7	23.60	-0.01	8 mm	1876	N/A	1:1	front	0.696	1.023	0.712	A24
836.60	4183	UMTS 850	RMC	23.7	23.60	-0.01	10 mm	1876	N/A	1:1	bottom	0.258	1.023	0.264	
836.60	4183	UMTS 850	RMC	23.7	23.60	0.00	10 mm	1876	N/A	1:1	right	0.286	1.023	0.293	
836.60	4183	UMTS 850	RMC	23.7	23.60	-0.09	10 mm	1876	N/A	1:1	left	0.414	1.023	0.424	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.03	8 mm	1876	N/A	1:1	back	0.579	1.023	0.592	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.07	8 mm	1876	N/A	1:1	front	0.702	1.023	0.718	A26
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.07	10 mm	1876	N/A	1:1	bottom	0.580	1.023	0.593	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.13	10 mm	1876	N/A	1:1	right	0.119	1.023	0.122	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.04	10 mm	1876	N/A	1:1	left	0.144	1.023	0.147	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 56 of 79	

**Table 11-20**  
**LTE Band 26 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.															(W/kg)		(W/kg)	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	0.01	0	1877	QPSK	1	0	8 mm	back	1:1	0.552	1.019	0.562	A28
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.05	1	1877	QPSK	25	0	8 mm	back	1:1	0.406	1.052	0.427	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	-0.03	0	1877	QPSK	1	0	8 mm	front	1:1	0.577	1.019	0.588	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.01	1	1877	QPSK	25	0	8 mm	front	1:1	0.431	1.052	0.453	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	-0.17	0	1877	QPSK	1	0	10 mm	bottom	1:1	0.267	1.019	0.272	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.04	1	1877	QPSK	25	0	10 mm	bottom	1:1	0.208	1.052	0.219	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	0.02	0	1877	QPSK	1	0	10 mm	right	1:1	0.400	1.019	0.408	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	0.04	1	1877	QPSK	25	0	10 mm	right	1:1	0.291	1.052	0.306	
831.50	26865	Mid	LTE Band 26	10	24.2	24.12	-0.07	0	1877	QPSK	1	0	10 mm	left	1:1	0.548	1.019	0.558	
831.50	26865	Mid	LTE Band 26	10	23.2	22.98	-0.01	1	1877	QPSK	25	0	10 mm	left	1:1	0.410	1.052	0.431	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



**Table 11-21**  
**LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	PR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	-0.05	0	1879	QPSK	1	49	8 mm	back	1:1	0.767	1.009	0.774	A30
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	-0.01	1	1879	QPSK	25	25	8 mm	back	1:1	0.625	1.030	0.644	
1855.00	26090	Low	LTE Band 25 (PCS)	10	23.7	23.52	0.10	0	1879	QPSK	1	0	8 mm	front	1:1	0.857	1.042	0.893	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	0.05	0	1879	QPSK	1	49	8 mm	front	1:1	0.850	1.009	0.858	
1910.00	26640	High	LTE Band 25 (PCS)	10	23.7	23.51	0.06	0	1879	QPSK	1	0	8 mm	front	1:1	0.873	1.045	0.912	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	-0.04	1	1879	QPSK	25	25	8 mm	front	1:1	0.694	1.030	0.715	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.52	0.14	1	1879	QPSK	50	0	8 mm	front	1:1	0.707	1.042	0.737	
1855.00	26090	Low	LTE Band 25 (PCS)	10	23.7	23.52	0.01	0	1879	QPSK	1	0	10 mm	bottom	1:1	0.695	1.042	0.724	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	0.02	0	1879	QPSK	1	49	10 mm	bottom	1:1	0.807	1.009	0.814	
1910.00	26640	High	LTE Band 25 (PCS)	10	23.7	23.51	0.03	0	1879	QPSK	1	0	10 mm	bottom	1:1	0.845	1.045	0.883	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	0.03	1	1879	QPSK	25	25	10 mm	bottom	1:1	0.660	1.030	0.680	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.52	-0.02	1	1879	QPSK	50	0	10 mm	bottom	1:1	0.695	1.042	0.724	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	0.03	0	1879	QPSK	1	49	10 mm	right	1:1	0.239	1.009	0.241	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	-0.01	1	1879	QPSK	25	25	10 mm	right	1:1	0.193	1.030	0.199	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	23.7	23.66	-0.09	0	1879	QPSK	1	49	10 mm	left	1:1	0.223	1.009	0.225	
1882.50	26365	Mid	LTE Band 25 (PCS)	10	22.7	22.57	-0.05	1	1879	QPSK	25	25	10 mm	left	1:1	0.182	1.030	0.187	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Body											
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 57 of 79	



**Table 11-22**  
**LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor (Conducted Power)	Scaling Factor (CP Duty)	Scaled SAR (1g)	Plot #
																(W/kg)			(W/kg)	
2636.50	41055	Mid-high	LTE Band 41	20	23.2	23.00	0.06	0	1875	QPSK	1	50	8 mm	back	1:1.59	0.374	1.047	1.01	0.396	A32
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.78	-0.02	1	1875	QPSK	50	25	8 mm	back	1:1.59	0.287	1.102	1.01	0.319	
2506.00	39750	Low	LTE Band 41	20	23.2	22.79	0.07	0	1875	QPSK	1	50	8 mm	front	1:1.59	0.771	1.099	1.01	0.855	
2549.50	40185	Low-mid	LTE Band 41	20	23.2	22.74	-0.12	0	1875	QPSK	1	99	8 mm	front	1:1.59	0.708	1.112	1.01	0.795	
2593.00	40620	Mid	LTE Band 41	20	23.2	22.82	-0.03	0	1875	QPSK	1	0	8 mm	front	1:1.59	0.633	1.091	1.01	0.698	
2636.50	41055	Mid-high	LTE Band 41	20	23.2	23.00	0.01	0	1875	QPSK	1	50	8 mm	front	1:1.59	0.678	1.047	1.01	0.717	
2680.00	41490	High	LTE Band 41	20	23.2	22.77	-0.03	0	1875	QPSK	1	0	8 mm	front	1:1.59	0.603	1.104	1.01	0.673	
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.78	0.00	1	1875	QPSK	50	25	8 mm	front	1:1.59	0.507	1.102	1.01	0.565	
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.73	-0.01	1	1875	QPSK	100	0	8 mm	front	1:1.59	0.541	1.114	1.01	0.609	
2506.00	39750	Low	LTE Band 41	20	23.2	22.79	-0.06	0	1875	QPSK	1	50	10 mm	bottom	1:1.59	0.438	1.099	1.01	0.486	
2549.50	40185	Low-mid	LTE Band 41	20	23.2	22.74	-0.03	0	1875	QPSK	1	99	10 mm	bottom	1:1.59	0.610	1.112	1.01	0.685	
2593.00	40620	Mid	LTE Band 41	20	23.2	22.82	0.03	0	1875	QPSK	1	0	10 mm	bottom	1:1.59	0.701	1.091	1.01	0.773	
2636.50	41055	Mid-high	LTE Band 41	20	23.2	23.00	-0.01	0	1875	QPSK	1	50	10 mm	bottom	1:1.59	0.754	1.047	1.01	0.797	
2680.00	41490	High	LTE Band 41	20	23.2	22.77	0.00	0	1875	QPSK	1	0	10 mm	bottom	1:1.59	0.608	1.104	1.01	0.678	
2506.00	39750	Low	LTE Band 41	20	22.2	21.74	-0.02	1	1875	QPSK	50	50	10 mm	bottom	1:1.59	0.331	1.112	1.01	0.372	
2549.50	40185	Low-mid	LTE Band 41	20	22.2	21.65	-0.17	1	1875	QPSK	50	0	10 mm	bottom	1:1.59	0.381	1.135	1.01	0.436	
2593.00	40620	Mid	LTE Band 41	20	22.2	21.68	0.11	1	1875	QPSK	50	50	10 mm	bottom	1:1.59	0.512	1.127	1.01	0.583	
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.78	-0.06	1	1875	QPSK	50	25	10 mm	bottom	1:1.59	0.605	1.102	1.01	0.674	
2680.00	41490	High	LTE Band 41	20	22.2	21.70	-0.01	1	1875	QPSK	50	0	10 mm	bottom	1:1.59	0.472	1.122	1.01	0.535	
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.73	-0.07	1	1875	QPSK	100	0	10 mm	bottom	1:1.59	0.612	1.114	1.01	0.689	
2636.50	41055	Mid-high	LTE Band 41	20	23.2	23.00	-0.02	0	1875	QPSK	1	50	10 mm	right	1:1.59	0.303	1.047	1.01	0.320	
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.78	0.06	1	1875	QPSK	50	25	10 mm	right	1:1.59	0.241	1.102	1.01	0.269	
2636.50	41055	Mid-high	LTE Band 41	20	23.2	23.00	-0.04	0	1875	QPSK	1	50	10 mm	left	1:1.59	0.045	1.047	1.01	0.047	
2636.50	41055	Mid-high	LTE Band 41	20	22.2	21.78	0.00	1	1875	QPSK	50	25	10 mm	left	1:1.59	0.035	1.102	1.01	0.039	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 58 of 79	

**Table 11-23**  
**WLAN Wireless Router SAR**



MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.10	8 mm	1890	1	back	1:1	0.187	1.127	0.211	A33
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.02	8 mm	1890	1	front	1:1	0.107	1.127	0.121	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.01	10 mm	1890	1	top	1:1	0.035	1.127	0.039	
2462	11	IEEE 802.11b	DSSS	17.0	16.48	0.05	10 mm	1890	1	left	1:1	0.164	1.127	0.185	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	-0.08	8 mm	1890	6	back	1:1	0.026	1.285	0.033	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.00	8 mm	1890	6	front	1:1	0.000	1.285	0.000	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.00	10 mm	1890	6	top	1:1	0.001	1.285	0.001	
5765	153	IEEE 802.11a	OFDM	12.0	10.91	0.04	10 mm	1890	6	left	1:1	0.051	1.285	0.066	A36
5775	155	IEEE 802.11ac	OFDM	11.5	10.82	-0.04	10 mm	1890	29.3	left	1:1	0.007	1.169	0.008	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 59 of 79	

## 11.4 Standalone Hand SAR Data

**Table 11-24**  
**WLAN Hand SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (10g)	Scaling Factor	Scaled SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	-0.21	0 mm	1890	6	back	1:1	0.159	1.205	0.192	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	0.02	0 mm	1890	6	front	1:1	0.087	1.205	0.105	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	0.04	0 mm	1890	6	top	1:1	0.070	1.205	0.084	
5240	48	IEEE 802.11a	OFDM	12.0	11.19	-0.16	0 mm	1890	6	left	1:1	0.207	1.205	0.249	
5210	42	IEEE 802.11ac	OFDM	11.5	9.74	-0.05	0 mm	1890	29.3	left	1:1	0.110	1.500	0.165	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	-0.01	0 mm	1890	6	back	1:1	0.151	1.094	0.165	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	0.20	0 mm	1890	6	front	1:1	0.099	1.094	0.108	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	0.06	0 mm	1890	6	top	1:1	0.080	1.094	0.088	
5260	52	IEEE 802.11a	OFDM	12.0	11.61	-0.13	0 mm	1890	6	left	1:1	0.218	1.094	0.238	A37
5290	58	IEEE 802.11ac	OFDM	11.5	11.26	-0.03	0 mm	1890	29.3	left	1:1	0.163	1.057	0.172	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.17	0 mm	1890	6	back	1:1	0.108	1.153	0.125	
5690	138	IEEE 802.11ac	OFDM	11.5	10.89	0.02	0 mm	1890	29.3	back	1:1	0.125	1.151	0.144	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.04	0 mm	1890	6	front	1:1	0.097	1.153	0.112	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.00	0 mm	1890	6	top	1:1	0.098	1.153	0.113	
5520	104	IEEE 802.11a	OFDM	12.0	11.38	0.04	0 mm	1890	6	left	1:1	0.076	1.153	0.088	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Hand 4.0 W/kg (mW/g) averaged over 10 grams								

FCC ID: ZNFS995			SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset			Page 60 of 79

## 11.5 SAR Test Notes

### General Notes:



1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, FCC/OET Bulletin 65, Supplement C [June 2001] and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Per FCC KDB Publication 648474 D04v01, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset cable were required.
7. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
9. Per FCC KDB Publication 648474 D04v01r01, this device is considered a “phablet” since the diagonal dimension is  $> 160$  mm but  $< 200$  mm. However, extremity SAR tests for the licensed transmitter were not required since Hotspot SAR was  $< 1.2$  W/kg.
10. Due to the embowed design of the device, Body SAR was configured per FCC Guidance. See section 1.7 for more information.

### GSM/GPRS Test Notes:

1. This device supports GSM VOIP in the head and the body-worn configurations therefore GPRS was additionally evaluated for head and body-worn compliance.
2. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
3. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop notes: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power was evaluated for SAR for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

### CDMA/EVDO Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v02.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO and TDSO / SO32 FCH+SCH SAR tests were not required since the average output power was not more than 0.25 dB higher than the TDSO / SO32 FCH only powers, per FCC KDB Publication 941225 D01v02.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01 procedures for data devices. Since the average output power of Subtype 2 for Rev. A is less than the Rev. 0 power levels, then EVDO Rev. A SAR is not required. SAR is not required for 1x RTT for Ev-Do hotspot devices when the maximum average

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 61 of 79	



output of each channel is less than 1/4 dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0.



4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum output powers for 1x Advanced was not more than 0.25 dB higher than the maximum measured powers for 1x and the reported SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg.

#### UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### LTE Notes:



1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.
4. TDD LTE was tested using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using normal cyclic prefix only and special subframe configuration 6. Due to equipment setup issues with extended cyclic prefix as a result of test samples configured for normal cyclic prefix, SAR tests were performed at maximum output power and worst-case transmission duty factor in normal cyclic prefix. Results were then scaled to the duty factor required for extended cyclic prefix listed in 3GPP TS 36.211 Section 4. The cyclic prefix scaling factor for LTE Band 41 was calculated by dividing the extended cyclic prefix duty factor by the normal cyclic prefix duty factor. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using normal cyclic prefix is 0.629. The duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
5. Per FCC KDB Publication 447498 D01v05, when the reported (scaled) LTE Band 41 SAR measured at the highest output power channel for each test configuration is  $> 0.6$  W/kg then testing at the other channels is required for such test configuration(s). If the reported (scaled) LTE Band 25 or LTE Band 26 SAR measured at the highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s).
6. LTE B41 high channel SAR was evaluated using probe 3914 and DASY software measurement version 52.8. Per KDB Publication 865664 D01 Section 2.6, at 300 MHz to 6 GHz, measurements must be within  $\pm 100$  MHz of the probe calibration point frequency or the valid frequency range supported by the probe calibration, whichever is less. Footnote C on page 5 and page 6 of the calibration certificate for probe s/n 3914 states that a frequency validity of  $\pm 100$

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 62 of 79	

MHz applies when using DASY measurement software version 4.4 and higher. Therefore, there are no additional requirements for SAR measurements at LTE B41 high channel.

**WLAN Notes:**

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n/ac) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz bandwidths) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. Per April 2013 TCB Workshop notes, full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
4. When Hotspot is enabled, all 5 GHz bands are disabled. Therefore no 5 GHz WIFI Hotspot SAR Data was required.
5. 5 GHz Wifi Direct GO is supported in the 5.8 GHz band only. The manufacturer expects 5.8 GHz Wifi Direct GO may be used similar to wireless router usage. Therefore, 5.8 GHz Wifi Direct GO was evaluated for SAR similar to wireless router SAR procedures in FCC KDB Publication 941225.
6. WIFI transmission was verified using an uncalibrated spectrum analyzer.
7. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other default channels was not required.
8. Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is > 160 mm but < 200 mm. Therefore, hand SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Since wireless router operations are not supported for 5.2 – 5.7 GHz NII WLAN, Extremity SAR was evaluated for 5 GHz NII WLAN. Extremity SAR was not evaluated for 2.4 GHz and 5 GHz DTS WIFI since Hotspot/ WIFI Direct GO 1g SAR < 1.2 W/kg.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 63 of 79	

## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n/ac and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.



$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1**  
**Estimated SAR**

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2441	9.50	8	<b>0.234</b>

**Notes:**



1. Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.
2. Main antenna SAR testing was not required for extremity exposure conditions per FCC KDB 648474. Therefore, no further analysis was required to determine that possible simultaneous scenarios would not exceed the SAR limit.

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset	Page 64 of 79	

## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-2**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Simult Tx	Configuration	CDMA BC10 (\$90S) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC10 (\$90S) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.520	0.437	<b>0.957</b>	Head SAR	Right Cheek	0.508	0.437	<b>0.945</b>
	Right Tilt	0.328	0.260	0.588		Right Tilt	0.352	0.260	0.612
	Left Cheek	0.628	0.159	0.787		Left Cheek	0.656	0.159	0.815
	Left Tilt	0.365	0.118	0.483		Left Tilt	0.372	0.118	0.490
Simult Tx	Configuration	CDMA BC0 (\$22H) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (\$22H) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.488	0.437	<b>0.925</b>	Head SAR	Right Cheek	0.443	0.437	<b>0.880</b>
	Right Tilt	0.296	0.260	0.556		Right Tilt	0.285	0.260	0.545
	Left Cheek	0.555	0.159	0.714		Left Cheek	0.537	0.159	0.696
	Left Tilt	0.310	0.118	0.428		Left Tilt	0.280	0.118	0.398
Simult Tx	Configuration	PCS CDMA SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.255	0.437	<b>0.692</b>	Head SAR	Right Cheek	0.266	0.437	<b>0.703</b>
	Right Tilt	0.254	0.260	0.514		Right Tilt	0.200	0.260	0.460
	Left Cheek	0.442	0.159	0.601		Left Cheek	0.310	0.159	0.469
	Left Tilt	0.184	0.118	0.302		Left Tilt	0.138	0.118	0.256
Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.450	0.437	<b>0.887</b>	Head SAR	Right Cheek	0.621	0.437	<b>1.058</b>
	Right Tilt	0.339	0.260	0.599		Right Tilt	0.415	0.260	0.675
	Left Cheek	0.499	0.159	0.658		Left Cheek	0.733	0.159	0.892
	Left Tilt	0.305	0.118	0.423		Left Tilt	0.427	0.118	0.545
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.126	0.437	<b>0.563</b>	Head SAR	Right Cheek	0.213	0.437	<b>0.650</b>
	Right Tilt	0.089	0.260	0.349		Right Tilt	0.127	0.260	0.387
	Left Cheek	0.151	0.159	0.310		Left Cheek	0.167	0.159	0.326
	Left Tilt	0.058	0.118	0.176		Left Tilt	0.076	0.118	0.194

FCC ID: ZNFS995		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 65 of 79



Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.374	0.437	0.811	Head SAR	Right Cheek	0.119	0.437	0.556
	Right Tilt	0.238	0.260	0.498		Right Tilt	0.087	0.260	0.347
	Left Cheek	0.437	0.159	0.596		Left Cheek	0.145	0.159	0.304
	Left Tilt	0.247	0.118	0.365		Left Tilt	0.059	0.118	0.177
Simult Tx	Configuration	LTE Band 26 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.403	0.437	0.840	Head SAR	Right Cheek	0.238	0.437	0.675
	Right Tilt	0.257	0.260	0.517		Right Tilt	0.164	0.260	0.424
	Left Cheek	0.508	0.159	0.667		Left Cheek	0.256	0.159	0.415
	Left Tilt	0.303	0.118	0.421		Left Tilt	0.104	0.118	0.222
		Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)			
		Head SAR	Right Cheek	0.364	0.437	0.801			
			Right Tilt	0.112	0.260	0.372			
			Left Cheek	0.176	0.159	0.335			
			Left Tilt	0.196	0.118	0.314			

**Table 12-3**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Simult Tx	Configuration	CDMA BC10 (\$90S) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC10 (\$90S) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.520	0.158	<b>0.678</b>	Head SAR	Right Cheek	0.508	0.158	0.666
	Right Tilt	0.328	0.154	0.482		Right Tilt	0.352	0.154	0.506
	Left Cheek	0.628	0.037	0.665		Left Cheek	0.656	0.037	<b>0.693</b>
	Left Tilt	0.365	0.051	0.416		Left Tilt	0.372	0.051	0.423
Simult Tx	Configuration	CDMA BC0 (\$22H) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (\$22H) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.488	0.158	<b>0.646</b>	Head SAR	Right Cheek	0.443	0.158	<b>0.601</b>
	Right Tilt	0.296	0.154	0.450		Right Tilt	0.285	0.154	0.439
	Left Cheek	0.555	0.037	0.592		Left Cheek	0.537	0.037	0.574
	Left Tilt	0.310	0.051	0.361		Left Tilt	0.280	0.051	0.331

Simult Tx	Configuration	PCS CDMA SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.255	0.158	0.413	Head SAR	Right Cheek	0.266	0.158	<b>0.424</b>
	Right Tilt	0.254	0.154	0.408		Right Tilt	0.200	0.154	0.354
	Left Cheek	0.442	0.037	<b>0.479</b>		Left Cheek	0.310	0.037	0.347
	Left Tilt	0.184	0.051	0.235		Left Tilt	0.138	0.051	0.189
Simult Tx	Configuration	GSM 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.450	0.158	<b>0.608</b>	Head SAR	Right Cheek	0.621	0.158	<b>0.779</b>
	Right Tilt	0.339	0.154	0.493		Right Tilt	0.415	0.154	0.569
	Left Cheek	0.499	0.037	0.536		Left Cheek	0.733	0.037	0.770
	Left Tilt	0.305	0.051	0.356		Left Tilt	0.427	0.051	0.478
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.126	0.158	<b>0.284</b>	Head SAR	Right Cheek	0.213	0.158	<b>0.371</b>
	Right Tilt	0.089	0.154	0.243		Right Tilt	0.127	0.154	0.281
	Left Cheek	0.151	0.037	0.188		Left Cheek	0.167	0.037	0.204
	Left Tilt	0.058	0.051	0.109		Left Tilt	0.076	0.051	0.127
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.374	0.158	<b>0.532</b>	Head SAR	Right Cheek	0.119	0.158	<b>0.277</b>
	Right Tilt	0.238	0.154	0.392		Right Tilt	0.087	0.154	0.241
	Left Cheek	0.437	0.037	0.474		Left Cheek	0.145	0.037	0.182
	Left Tilt	0.247	0.051	0.298		Left Tilt	0.059	0.051	0.110
Simult Tx	Configuration	LTE Band 26 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.403	0.158	<b>0.561</b>	Head SAR	Right Cheek	0.238	0.158	<b>0.396</b>
	Right Tilt	0.257	0.154	0.411		Right Tilt	0.164	0.154	0.318
	Left Cheek	0.508	0.037	0.545		Left Cheek	0.256	0.037	0.293
	Left Tilt	0.303	0.051	0.354		Left Tilt	0.104	0.051	0.155
		Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)			
		Head SAR	Right Cheek	0.364	0.158	<b>0.522</b>			
			Right Tilt	0.112	0.154	0.266			
			Left Cheek	0.176	0.037	0.213			
			Left Tilt	0.196	0.051	0.247			

Note: The worst case 5 GHz head SAR value was used to evaluate potential combinations using WIFI Direct.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 67 of 79	

## 12.4 Body-Worn Simultaneous Transmission Analysis



**Table 12-4**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn)**

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Back Side	CDMA BC10 (§90S)	0.737	0.211	0.948
Back Side	CDMA BC0 (§22H)	0.652	0.211	0.863
Back Side	PCS CDMA	1.160	0.211	<b>1.371</b>
Back Side	GSM 850	0.580	0.211	0.791
Back Side	GPRS 850	0.750	0.211	0.961
Back Side	GSM 1900	0.472	0.211	0.683
Back Side	GPRS 1900	0.625	0.211	0.836
Back Side	UMTS 850	0.452	0.211	0.663
Back Side	UMTS 1900	0.592	0.211	0.803
Back Side	LTE Band 26	0.562	0.211	0.773
Back Side	LTE Band 25 (PCS)	0.774	0.211	0.985
Back Side	LTE Band 41	0.396	0.211	0.607

**Table 12-5**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn)**

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Back Side	CDMA BC10 (§90S)	0.737	0.130	0.867
Back Side	CDMA BC0 (§22H)	0.652	0.130	0.782
Back Side	PCS CDMA	1.160	0.130	<b>1.290</b>
Back Side	GSM 850	0.580	0.130	0.710
Back Side	GPRS 850	0.750	0.130	0.880
Back Side	GSM 1900	0.472	0.130	0.602
Back Side	GPRS 1900	0.625	0.130	0.755
Back Side	UMTS 850	0.452	0.130	0.582
Back Side	UMTS 1900	0.592	0.130	0.722
Back Side	LTE Band 26	0.562	0.130	0.692
Back Side	LTE Band 25 (PCS)	0.774	0.130	0.904
Back Side	LTE Band 41	0.396	0.130	0.526

Note: The worst case 5 GHz body-worn accessory SAR value was used to evaluate potential combinations using WIFI Direct.



FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 68 of 79	



**Table 12-6**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn)**

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	$\Sigma$ SAR (W/kg)
Back Side	CDMA BC10 (§90S)	0.737	0.234	0.971
Back Side	CDMA BC0 (§22H)	0.652	0.234	0.886
Back Side	PCS CDMA	1.160	0.234	<b>1.394</b>
Back Side	GSM 850	0.580	0.234	0.814
Back Side	GPRS 850	0.750	0.234	0.984
Back Side	GSM 1900	0.472	0.234	0.706
Back Side	GPRS 1900	0.625	0.234	0.859
Back Side	UMTS 850	0.452	0.234	0.686
Back Side	UMTS 1900	0.592	0.234	0.826
Back Side	LTE Band 26	0.562	0.234	0.796
Back Side	LTE Band 25 (PCS)	0.774	0.234	1.008
Back Side	LTE Band 41	0.396	0.234	0.630

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated Bluetooth SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> 0Y1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 69 of 79	





## 12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

**Table 12-7**  
**Simultaneous Transmission Scenario (2.4 GHz Hotspot)**



Simult Tx	Configuration	EVDO BC10 (\$90S) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (\$22H) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.729	0.211	<b>0.940</b>	Body SAR	Back	0.640	0.211	<b>0.851</b>
	Front	0.720	0.121	0.841		Front	0.709	0.121	0.830
	Top	-	0.039	0.039		Top	-	0.039	0.039
	Bottom	0.337	-	0.337		Bottom	0.340	-	0.340
	Right	0.473	-	0.473		Right	0.387	-	0.387
	Left	0.660	0.185	0.845		Left	0.551	0.185	0.736
Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.197	0.211	<b>1.408</b>	Body SAR	Back	0.750	0.211	<b>0.961</b>
	Front	1.092	0.121	1.213		Front	0.838	0.121	0.959
	Top	-	0.039	0.039		Top	-	0.039	0.039
	Bottom	1.024	-	1.024		Bottom	0.484	-	0.484
	Right	0.268	-	0.268		Right	0.543	-	0.543
	Left	0.286	0.185	0.471		Left	0.712	0.185	0.897
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.625	0.211	<b>0.836</b>	Body SAR	Back	0.452	0.211	0.663
	Front	0.595	0.121	0.716		Front	0.712	0.121	<b>0.833</b>
	Top	-	0.039	0.039		Top	-	0.039	0.039
	Bottom	0.487	-	0.487		Bottom	0.264	-	0.264
	Right	0.141	-	0.141		Right	0.293	-	0.293
	Left	0.139	0.185	0.324		Left	0.424	0.185	0.609
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 26 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.592	0.211	0.803	Body SAR	Back	0.562	0.211	<b>0.773</b>
	Front	0.718	0.121	<b>0.839</b>		Front	0.588	0.121	0.709
	Top	-	0.039	0.039		Top	-	0.039	0.039
	Bottom	0.593	-	0.593		Bottom	0.272	-	0.272
	Right	0.122	-	0.122		Right	0.408	-	0.408
	Left	0.147	0.185	0.332		Left	0.558	0.185	0.743

FCC ID: ZNFS995		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 70 of 79	

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body SAR	Back	0.774	0.211	0.985	Body SAR	Back	0.396	0.211	0.607
	Front	0.912	0.121	<b>1.033</b>		Front	0.855	0.121	<b>0.976</b>
	Top	-	0.039	0.039		Top	-	0.039	0.039
	Bottom	0.883	-	0.883		Bottom	0.797	-	0.797
	Right	0.241	-	0.241		Right	0.320	-	0.320
	Left	0.225	0.185	0.410		Left	0.047	0.185	0.232

**Table 12-8**  
**Simultaneous Transmission Scenario (5.8 GHz WIFI Direct)**



Simult Tx	Configuration	EVDO BC10 (\$90S) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	EVDO BC0 (\$22H) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body SAR	Back	0.729	0.033	<b>0.762</b>	Body SAR	Back	0.640	0.033	0.673
	Front	0.720	0.000	0.720		Front	0.709	0.000	<b>0.709</b>
	Top	-	0.001	0.001		Top	-	0.001	0.001
	Bottom	0.337	-	0.337		Bottom	0.340	-	0.340
	Right	0.473	-	0.473		Right	0.387	-	0.387
	Left	0.660	0.066	0.726		Left	0.551	0.066	0.617
Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body SAR	Back	1.197	0.033	<b>1.230</b>	Body SAR	Back	0.750	0.033	0.783
	Front	1.092	0.000	1.092		Front	0.838	0.000	<b>0.838</b>
	Top	-	0.001	0.001		Top	-	0.001	0.001
	Bottom	1.024	-	1.024		Bottom	0.484	-	0.484
	Right	0.268	-	0.268		Right	0.543	-	0.543
	Left	0.286	0.066	0.352		Left	0.712	0.066	0.778
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body SAR	Back	0.625	0.033	<b>0.658</b>	Body SAR	Back	0.452	0.033	0.485
	Front	0.595	0.000	0.595		Front	0.712	0.000	<b>0.712</b>
	Top	-	0.001	0.001		Top	-	0.001	0.001
	Bottom	0.487	-	0.487		Bottom	0.264	-	0.264
	Right	0.141	-	0.141		Right	0.293	-	0.293
	Left	0.139	0.066	0.205		Left	0.424	0.066	0.490

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 71 of 79	

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	LTE Band 26 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body SAR	Back	0.592	0.033	0.625	Body SAR	Back	0.562	0.033	0.595
	Front	0.718	0.000	<b>0.718</b>		Front	0.588	0.000	0.588
	Top	-	0.001	0.001		Top	-	0.001	0.001
	Bottom	0.593	-	0.593		Bottom	0.272	-	0.272
	Right	0.122	-	0.122		Right	0.408	-	0.408
	Left	0.147	0.066	0.213		Left	0.558	0.066	<b>0.624</b>
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body SAR	Back	0.774	0.033	0.807	Body SAR	Back	0.396	0.033	0.429
	Front	0.912	0.000	<b>0.912</b>		Front	0.855	0.000	<b>0.855</b>
	Top	-	0.001	0.001		Top	-	0.001	0.001
	Bottom	0.883	-	0.883		Bottom	0.797	-	0.797
	Right	0.241	-	0.241		Right	0.320	-	0.320
	Left	0.225	0.066	0.291		Left	0.047	0.066	0.113

## 12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05.

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 72 of 79

## 13 SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:



- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**Table 13-1**  
**Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1880.00	600	PCS CDMA	EVDO Rev. 0	back	8 mm	1.140	1.090	1.05	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram							

### 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.



FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 73 of 79	

## 14

## EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/16/2013	Annual	4/16/2014	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/16/2013	Annual	4/16/2014	JP38020182
Agilent	8753E	(30kHz-6GHz) Network Analyzer	7/23/2013	Annual	7/23/2014	US37390350
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/17/2013	Annual	4/17/2014	3629U00687
Agilent	85070C	Dielectric Probe Kit	2/14/2013	Annual	2/14/2014	MY44300633
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Agilent	N5182A	MXG Vector Signal Generator	10/28/2013	Annual	10/28/2014	US46240505
Agilent	8753ES	S-Parameter Network Analyzer	10/29/2013	Annual	10/29/2014	US39170122
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Agilent	E5515C	Wireless Communications Test Set	10/18/2012	Biennial	10/18/2014	GB43193563
Amplifier Research	551G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	ML2495A	Power Meter	10/31/2013	Annual	10/31/2014	1039008
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5318
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5821
Anritsu	MA2411B	Pulse Power Sensor	12/4/2012	Annual	12/4/2013	1207364
Anritsu	MT8820C	Radio Communication Analyzer	6/28/2013	Annual	6/28/2014	6201240328
Anritsu	MA2481D	Universal Sensor	12/17/2012	Annual	12/17/2013	1204419
Anritsu	MA2481D	Universal Sensor	12/17/2012	Annual	12/17/2013	1204343
Anritsu	MA24106A	USB Power Sensor	12/7/2012	Annual	12/7/2013	1244515
Anritsu	MA24106A	USB Power Sensor	12/7/2012	Annual	12/7/2013	1244512
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2013	Annual	10/30/2014	1833460
Gigatronics	8651A	Universal Power Meter	10/30/2013	Annual	10/30/2014	8650319
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	VL6-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VL6-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	9/23/2013	Annual	9/23/2014	109892
Rohde & Schwarz	NRVD	Dual Channel Power Meter	10/12/2012	Biennial	10/12/2014	101695
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	2/8/2013	Annual	2/8/2014	101699
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	6/6/2013	Annual	6/6/2014	111427
Rohde & Schwarz	NRV-232	Peak Power Sensor	10/12/2012	Biennial	10/12/2014	836019/013
Rohde & Schwarz	SMI003B	Signal Generator	4/17/2013	Annual	4/17/2014	DE72759
Rohde & Schwarz	SME06	Signal Generator	10/30/2013	Annual	10/30/2014	832026
Rohde & Schwarz	NRVS	Single Channel Power Meter	10/31/2013	Annual	10/31/2014	835360/0079
Seekonk	NC-100	Torque Wrench (8" lb)	11/29/2011	Triennial	11/29/2014	21053
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
SPEAG	D1900V2	1900 MHz SAR Dipole	2/6/2013	Annual	2/6/2014	5d148
SPEAG	D2450V2	2450 MHz SAR Dipole	1/8/2013	Annual	1/8/2014	797
SPEAG	D2450V2	2450 MHz SAR Dipole	2/11/2013	Annual	2/11/2014	882
SPEAG	D2600V2	2600 MHz SAR Dipole	5/2/2013	Annual	5/2/2014	1004
SPEAG	D5GHZV2	5 GHz SAR Dipole	1/11/2013	Annual	1/11/2014	1057
SPEAG	D5GHZV2	5 GHz SAR Dipole	2/14/2013	Annual	2/14/2014	1120
SPEAG	D835V2	835 MHz SAR Dipole	4/25/2013	Annual	4/25/2014	4d119
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/17/2013	Annual	1/17/2014	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/6/2013	Annual	2/6/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2013	Annual	3/8/2014	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/22/2013	Annual	4/22/2014	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/22/2013	Annual	4/22/2014	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/22/2013	Annual	4/22/2014	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/13/2013	Annual	5/13/2014	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/21/2013	Annual	8/21/2014	1322
SPEAG	DAK-3.5	Dielectric Assessment Kit	12/11/2012	Annual	12/11/2013	1091
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/14/2013	Annual	5/14/2014	1070
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/18/2013	Annual	8/18/2014	1008
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/18/2013	Annual	8/18/2014	1009
SPEAG	EX3DV4	SAR Probe	1/17/2013	Annual	1/17/2014	3589
SPEAG	ES3DV3	SAR Probe	3/15/2013	Annual	3/15/2014	3209
SPEAG	EX3DV4	SAR Probe	10/23/2013	Annual	10/23/2014	3914
SPEAG	ES3DV3	SAR Probe	4/29/2013	Annual	4/29/2014	3213
SPEAG	ES3DV3	SAR Probe	4/29/2013	Annual	4/29/2014	3318
SPEAG	ES3DV3	SAR Probe	4/29/2013	Annual	4/29/2014	3319
SPEAG	ES3DV3	SAR Probe	5/16/2013	Annual	5/16/2014	3263
SPEAG	ES3DV2	SAR Probe	8/22/2013	Annual	8/22/2014	3022
Tektronix	RS6114A	Real Time Spectrum Analyzer	4/17/2013	Annual	4/17/2014	B010177
VWR	23226-658	Long Stem Thermometer	6/27/2012	Biennial	6/27/2014	122363923
VWR	23226-658	Long Stem Thermometer	7/11/2012	Biennial	7/11/2014	122389334
VWR	23226-658	Long Stem Thermometer	7/11/2012	Biennial	7/11/2014	122389330

Notes: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.



FCC ID: ZNLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 74 of 79

## 15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
<b>Combined Standard Uncertainty (k=1)</b>							RSS	12.1	11.7
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)							k=2	24.2	23.5



The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: ZNFS995		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1311192196-R1.ZNF	Test Dates: 11/11/13 – 11/26/13	DUT Type: Portable Handset		Page 75 of 79

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
<b>Combined Standard Uncertainty (k=1)</b>							RSS	12.4	12.0
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003



FCC ID: ZNFS995		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 76 of 79	

## 16 CONCLUSION

### 16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.



Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: ZNFLS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 77 of 79	





## 17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: ZNFS995	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset		Page 78 of 79

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [29] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [30] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [31] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [32] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [33] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFS995	 <b>SAR EVALUATION REPORT</b> 		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1311192196-R1.ZNF	<b>Test Dates:</b> 11/11/13 – 11/26/13	<b>DUT Type:</b> Portable Handset	Page 79 of 79

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.863 \text{ S/m}$ ;  $\epsilon_r = 40.274$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-14-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.2°C

Probe: ES3DV2 - SN3022; ConvF(6.09, 6.09, 6.09); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: Cell. EVDO RevA BC10, Left Head, Cheek, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 29.130 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.791 W/kg

**SAR(1 g) = 0.628 W/kg**

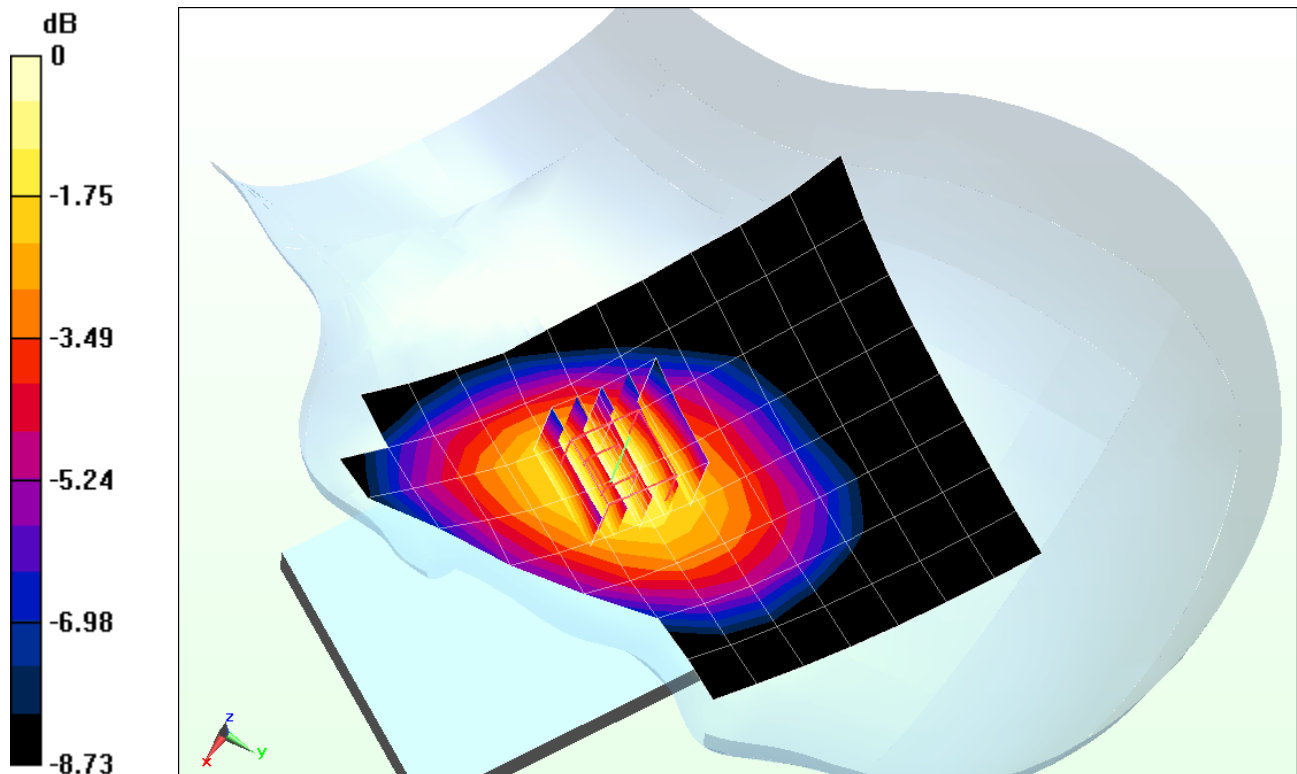

0 dB = 0.657 W/kg = -1.82 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.879 \text{ S/m}$ ;  $\epsilon_r = 40.21$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-14-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.2°C

Probe: ES3DV2 - SN3022; ConvF(6.09, 6.09, 6.09); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

**Mode: Cell. CDMA BC0, Left Head, Cheek, Mid.ch**


**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.746 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.645 W/kg

**SAR(1 g) = 0.512 W/kg**

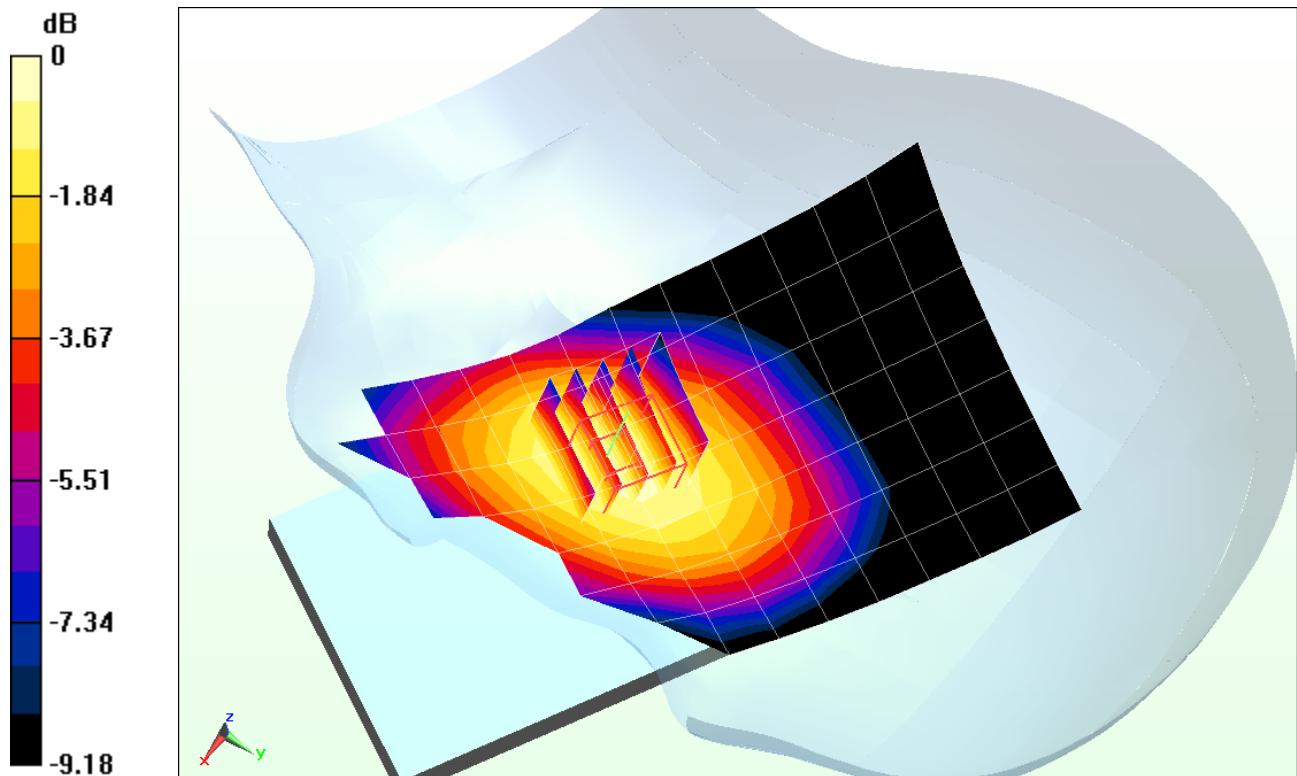

0 dB = 0.539 W/kg = -2.68 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.436 \text{ S/m}$ ;  $\epsilon_r = 40.639$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-13-2013; Ambient Temp: 22.2°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(5.22, 5.22, 5.22); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 4/22/2013

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: PCS CDMA, Left Head, Cheek, Mid.ch**


**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.460 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.666 W/kg

**SAR(1 g) = 0.415 W/kg**

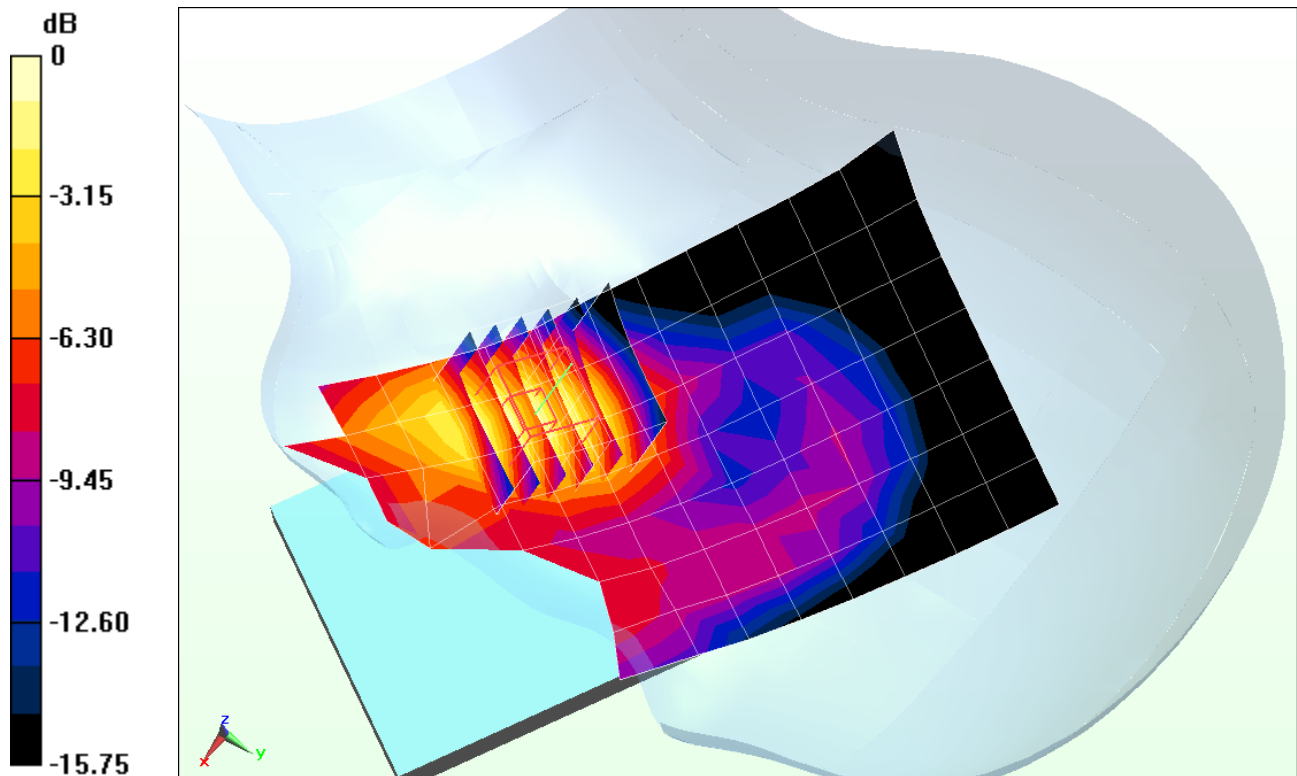

0 dB = 0.454 W/kg = -3.43 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1880**

Communication System: GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.879 \text{ S/m}$ ;  $\epsilon_r = 40.21$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-14-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.2°C

Probe: ES3DV2 - SN3022; ConvF(6.09, 6.09, 6.09); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 850, Left Head, Cheek, Mid.ch, 2 Tx slots**


**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 28.283 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.864 W/kg

**SAR(1 g) = 0.669 W/kg**

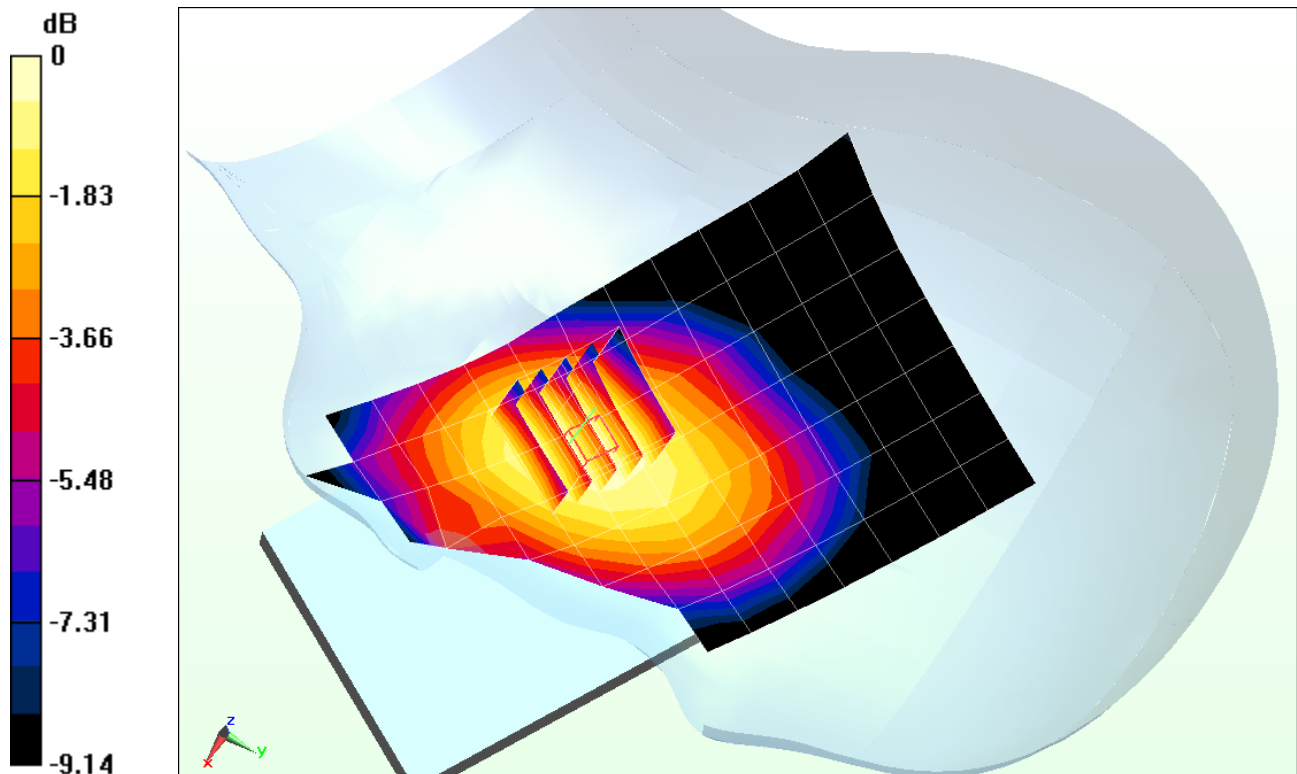

0 dB = 0.695 W/kg = -1.58 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1880**

Communication System: GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.401 \text{ S/m}$ ;  $\epsilon_r = 39.642$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-19-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(5.08, 5.08, 5.08); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/22/2013

Phantom: SAM Front; Type: QD000P40CD; Serial: 1717

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 1900, Right Head, Cheek, Mid.ch, 2 Tx Slots**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.607 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.296 W/kg

**SAR(1 g) = 0.186 W/kg**

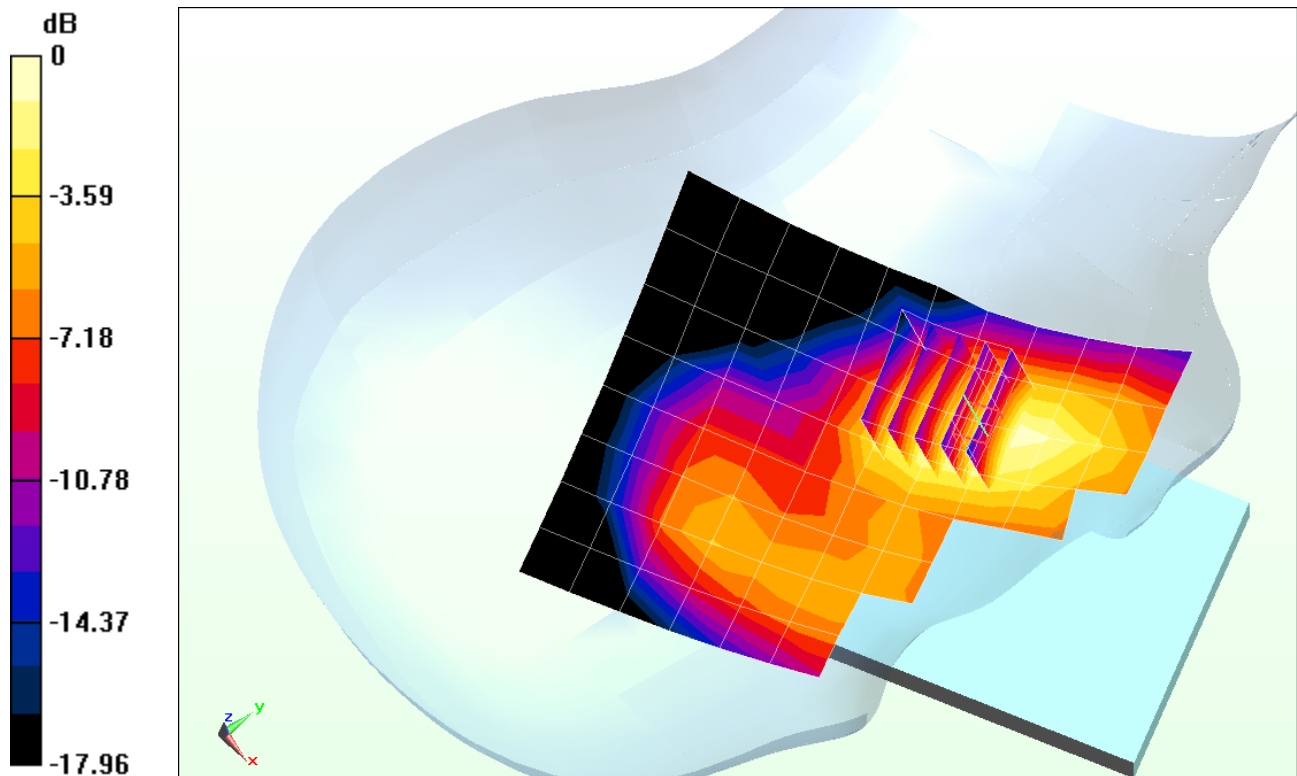

0 dB = 0.201 W/kg = -6.97 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1876**

Communication System: UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.879 \text{ S/m}$ ;  $\epsilon_r = 40.21$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-14-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.2°C

Probe: ES3DV2 - SN3022; ConvF(6.09, 6.09, 6.09); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 850, Left Head, Cheek, Mid.ch**


**Area Scan (9x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 22.762 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.427 W/kg**

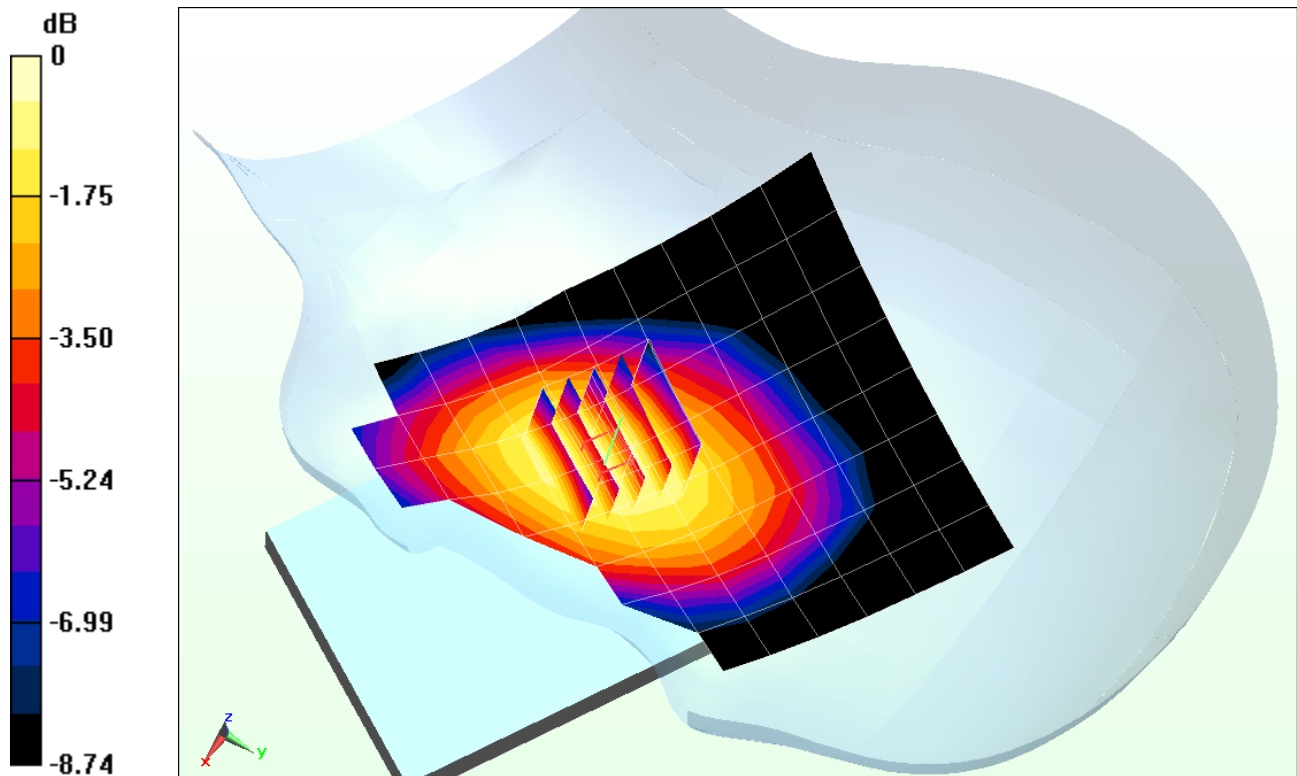

0 dB = 0.447 W/kg = -3.50 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1876**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.436 \text{ S/m}$ ;  $\epsilon_r = 40.639$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-13-2013; Ambient Temp: 22.2°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(5.22, 5.22, 5.22); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 4/22/2013

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 1900, Left Head, Cheek, Mid.ch**


**Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.441 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.222 W/kg

**SAR(1 g) = 0.142 W/kg**

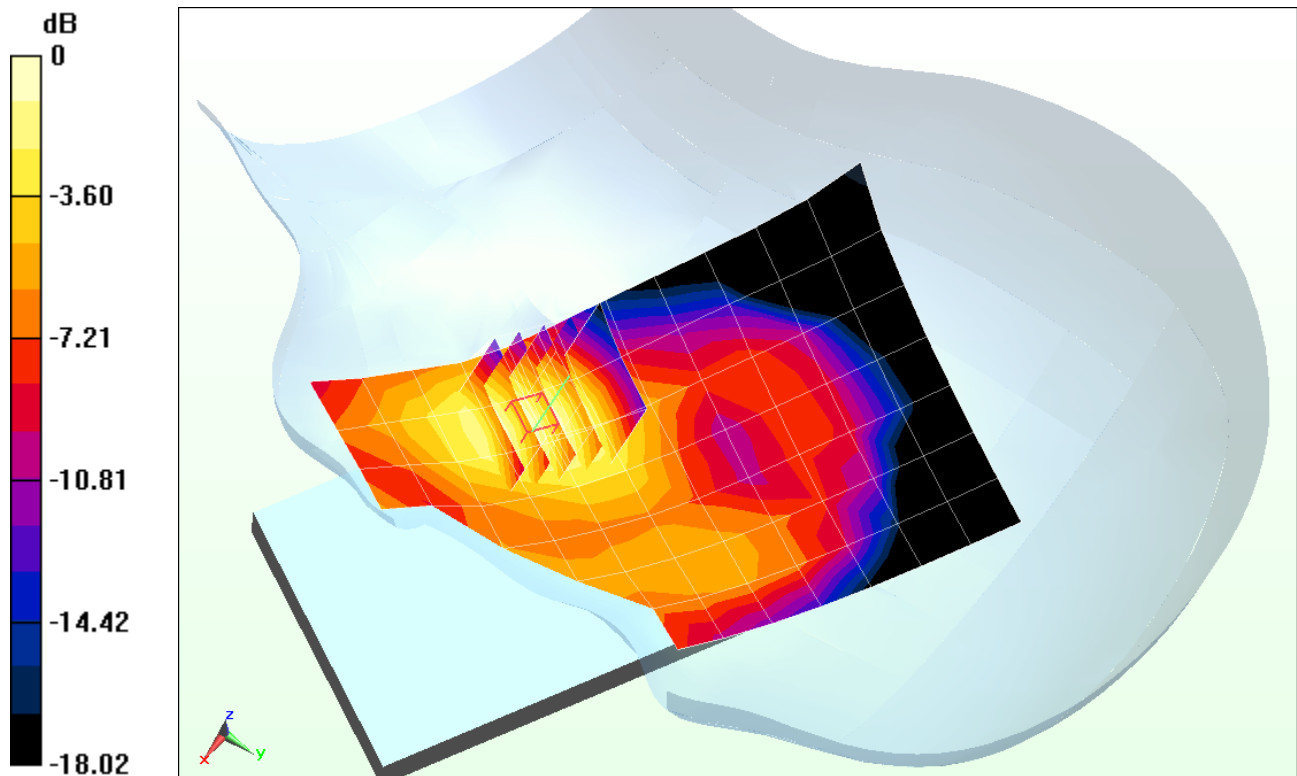

0 dB = 0.150 W/kg = -8.24 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1877**

Communication System: LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 40.236$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-14-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.2°C

Probe: ES3DV2 - SN3022; ConvF(6.09, 6.09, 6.09); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 26, Left Head, Cheek, Mid.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.654 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.624 W/kg

**SAR(1 g) = 0.499 W/kg**

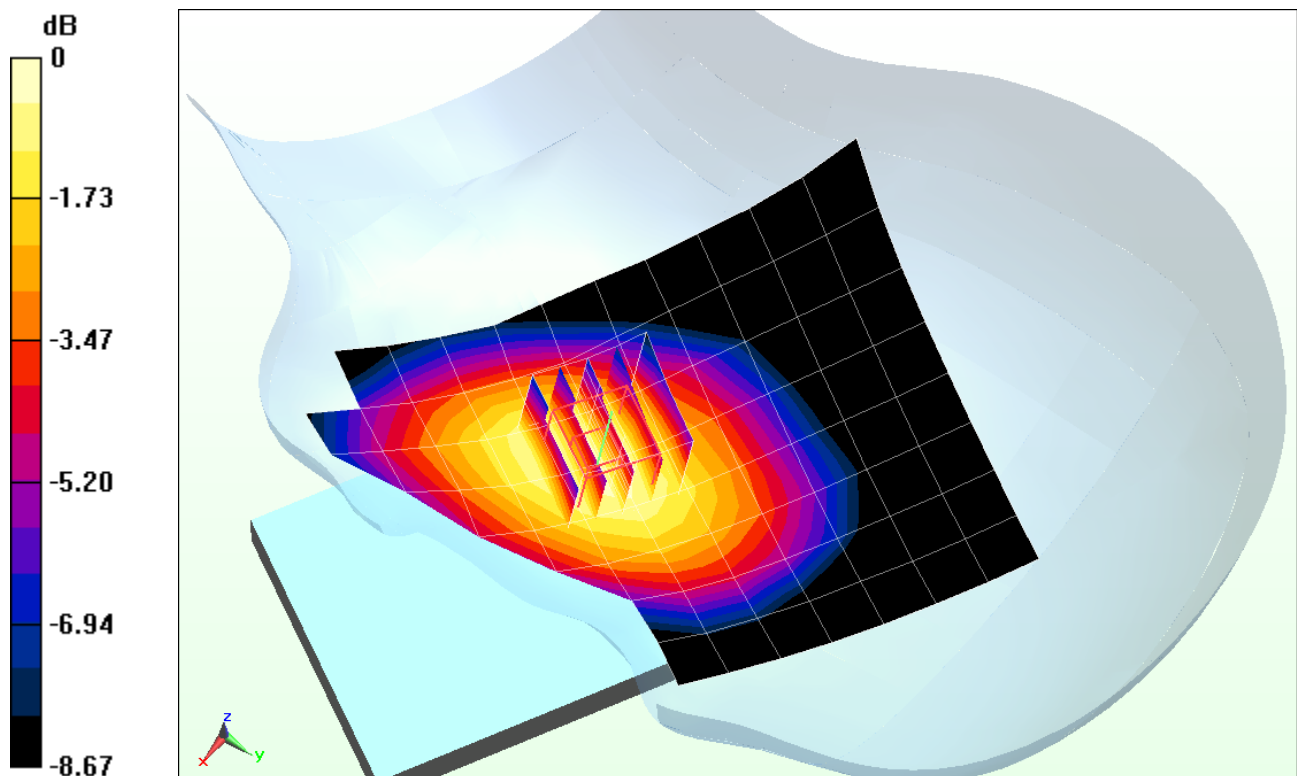

0 dB = 0.523 W/kg = -2.81 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1879**

Communication System: LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.438 \text{ S/m}$ ;  $\epsilon_r = 40.629$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-13-2013; Ambient Temp: 22.2°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(5.22, 5.22, 5.22); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 4/22/2013

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Mid.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 49 RB Offset**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.200 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.254 W/kg**

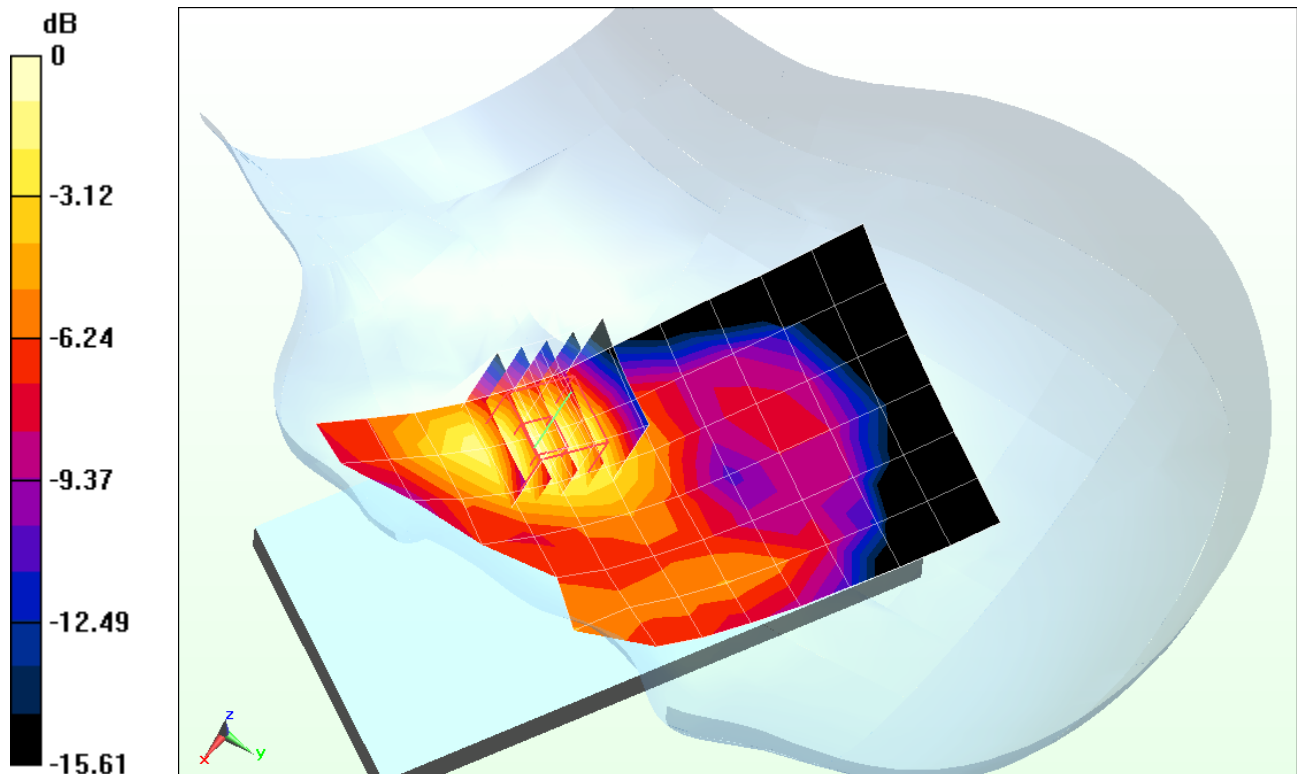

0 dB = 0.277 W/kg = -5.58 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1875**

Communication System: LTE Band 41; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: 2600 Head; Medium parameters used (interpolated):

$f = 2636.5 \text{ MHz}$ ;  $\sigma = 2.017 \text{ S/m}$ ;  $\epsilon_r = 39.067$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-18-2013; Ambient Temp: 23.6°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3914; ConvF(6.79, 6.79, 6.79); Calibrated: 10/23/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 41, Right Head, Cheek, Mid-High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.300 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.611 W/kg

**SAR(1 g) = 0.344 W/kg**

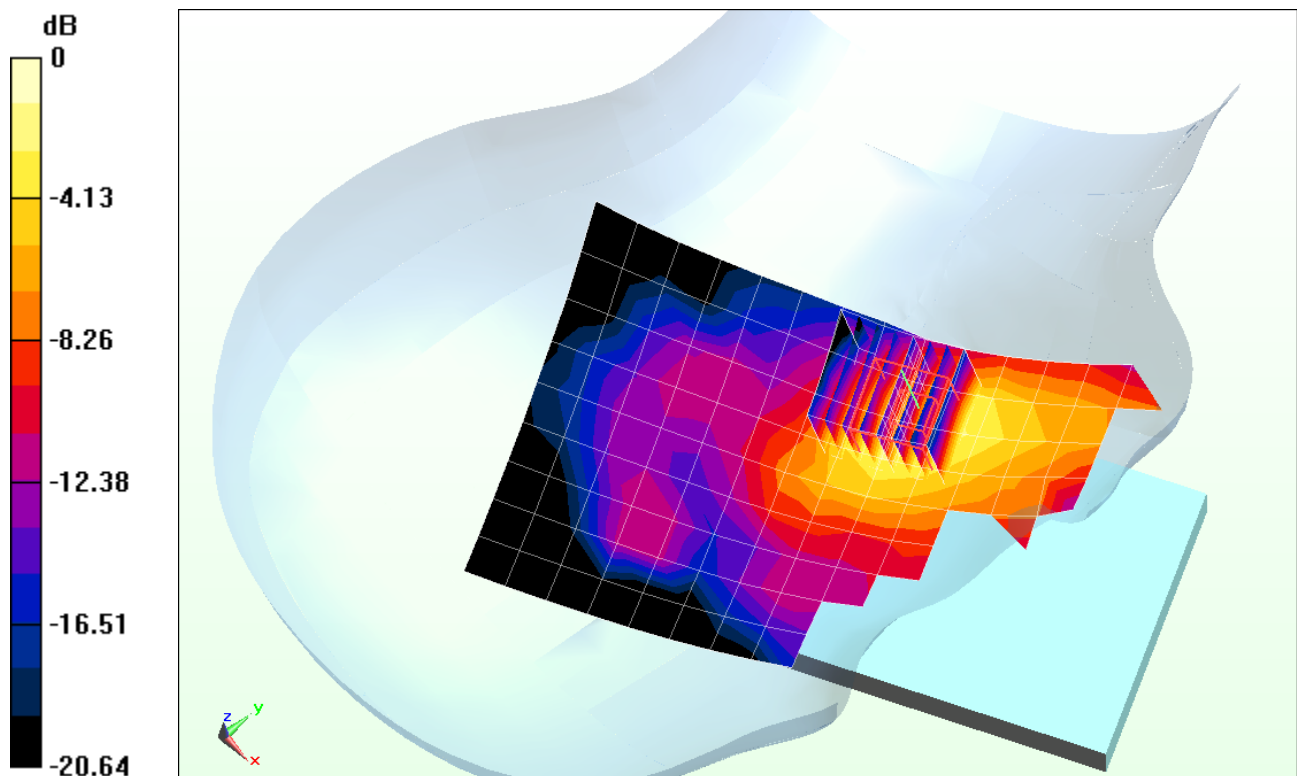

0 dB = 0.420 W/kg = -3.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 1.847 \text{ S/m}$ ;  $\epsilon_r = 40.01$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-12-2013; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3209; ConvF(4.57, 4.57, 4.57); Calibrated: 3/15/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: SAM Right; Type: QD000P40CD; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11b, Right Head, Cheek, Ch 11, 1 Mbps**


**Area Scan (11x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.748 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.795 W/kg

**SAR(1 g) = 0.388 W/kg**

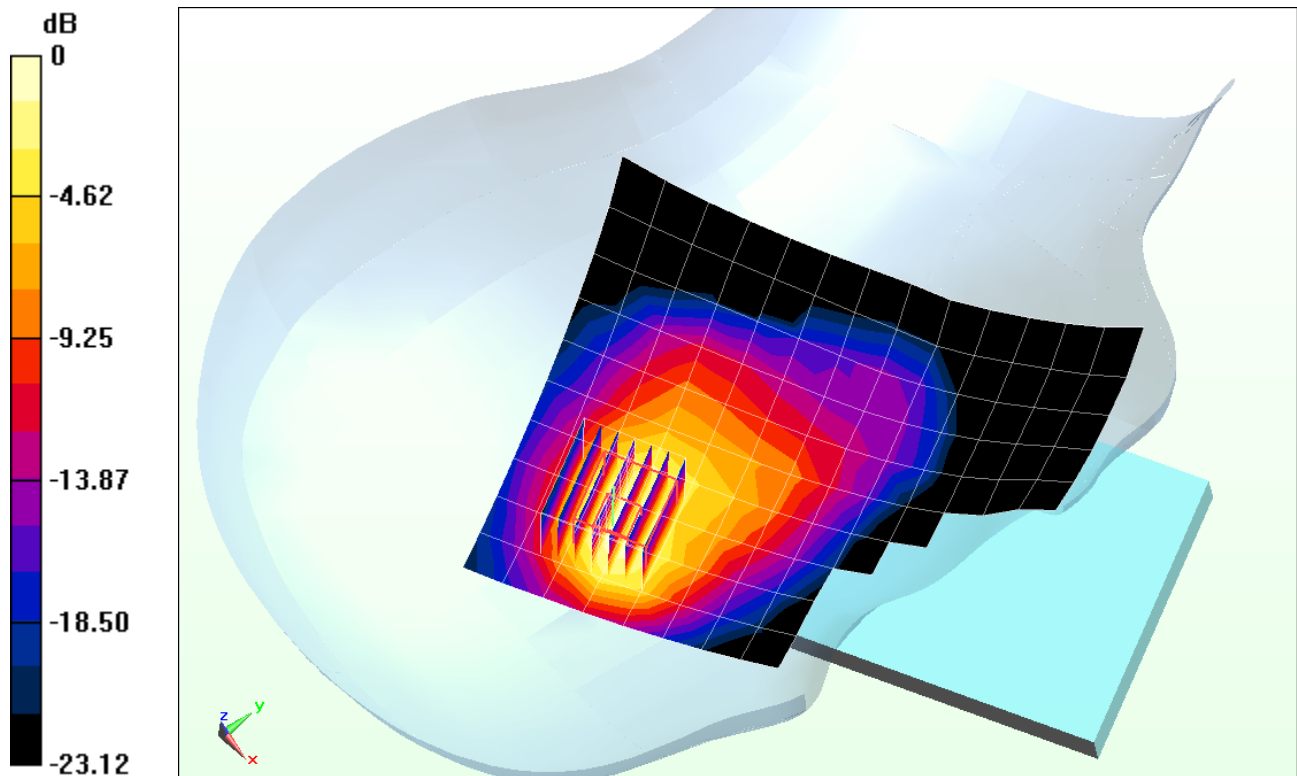

0 dB = 0.493 W/kg = -3.07 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11a; Frequency: 5765 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5765 \text{ MHz}$ ;  $\sigma = 5.087 \text{ S/m}$ ;  $\epsilon_r = 34.379$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.52, 4.52, 4.52); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.8 GHz, Right Head, Cheek, Ch 153, 6 Mbps**


**Area Scan (11x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 1.867 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.019 W/kg**

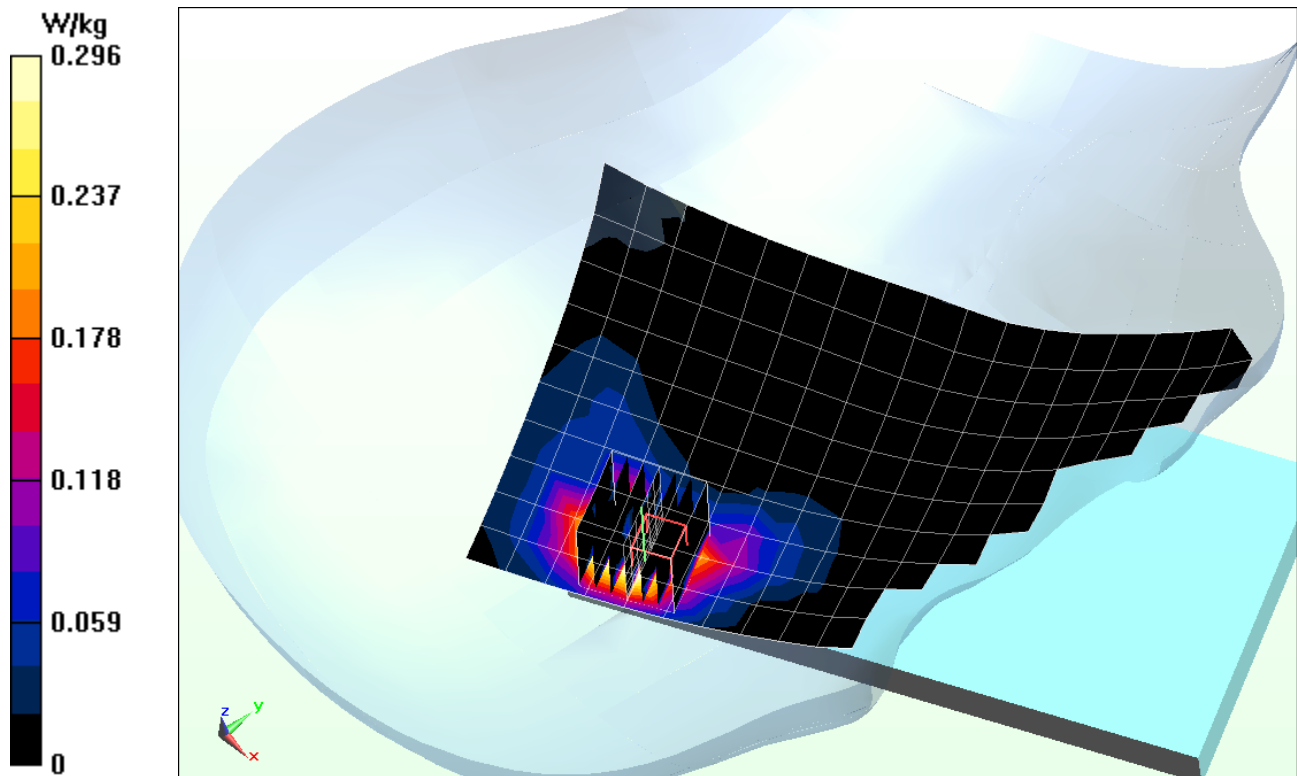

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5260 \text{ MHz}$ ;  $\sigma = 4.57 \text{ S/m}$ ;  $\epsilon_r = 35.053$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.82, 4.82, 4.82); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.3 GHz, Right Head, Cheek, Ch 52, 6 Mbps**


**Area Scan (11x21x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 5.185 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.554 W/kg

**SAR(1 g) = 0.142 W/kg**

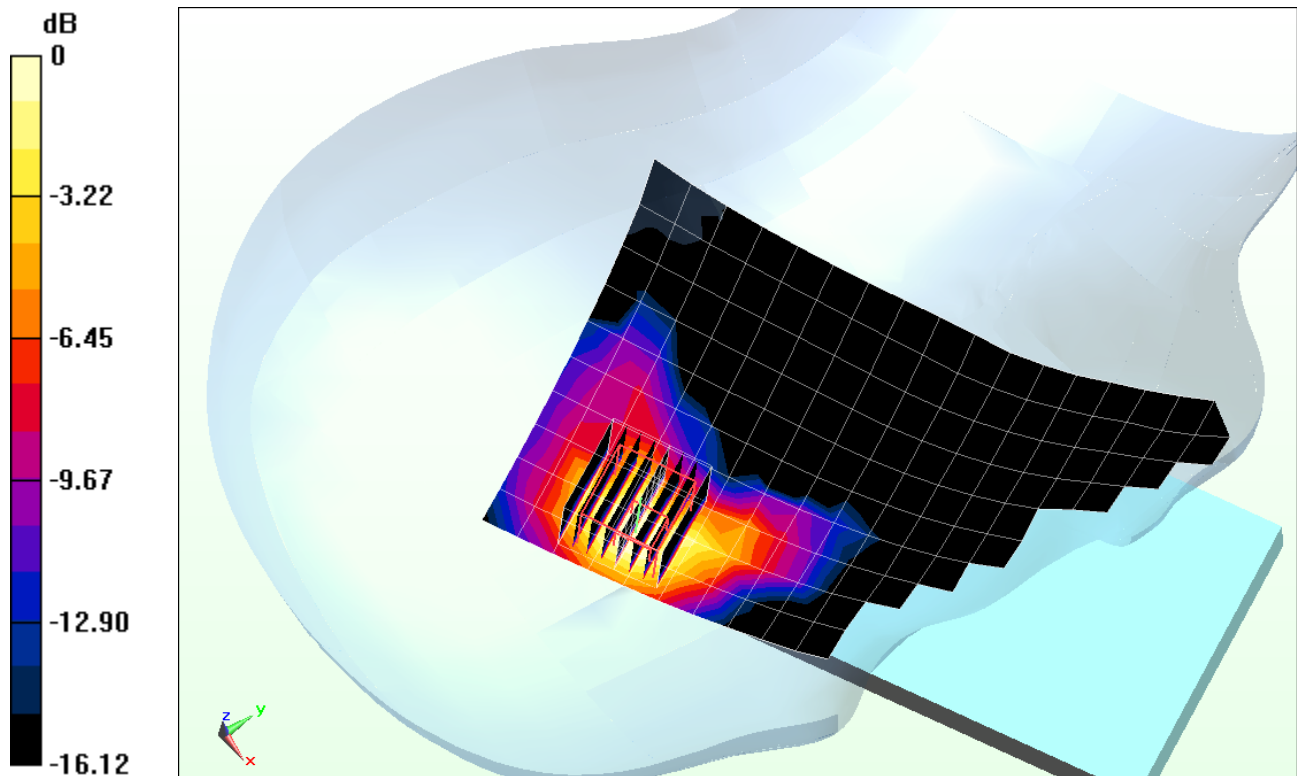



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.857$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: Cell. CDMA BC 10, Body SAR, Back side, Mid.ch**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.114 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.913 W/kg

**SAR(1 g) = 0.707 W/kg**

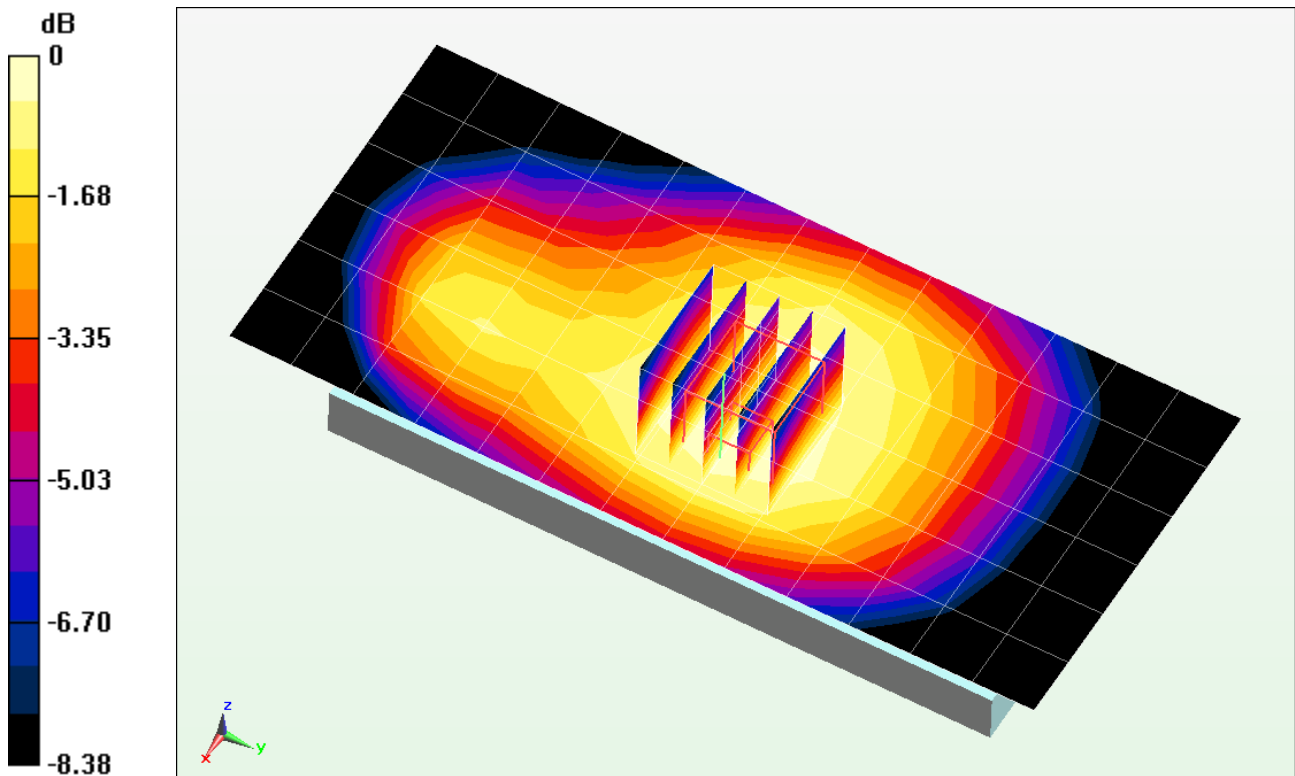

0 dB = 0.736 W/kg = -1.33 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.857$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: Cell. EVDO Rev0, BC 10, Body SAR, Back side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.346 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.891 W/kg

**SAR(1 g) = 0.702 W/kg**

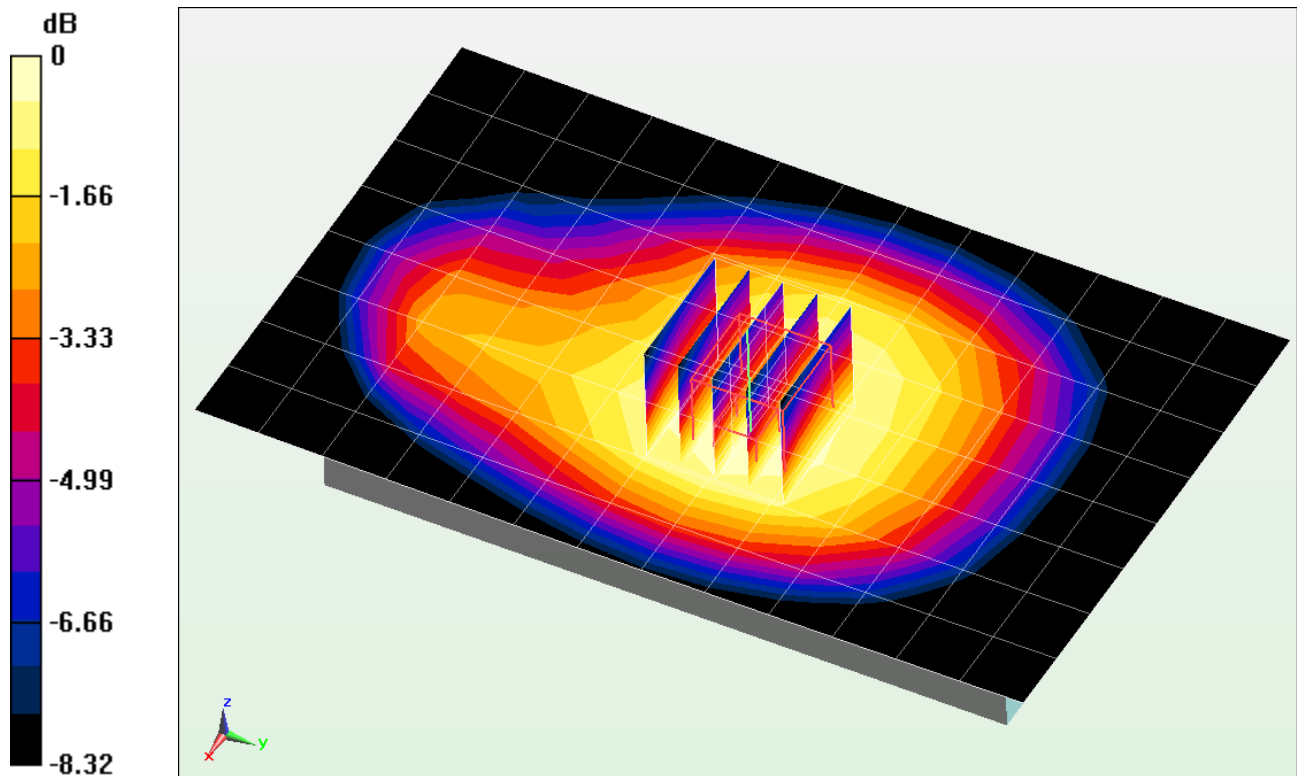

0 dB = 0.734 W/kg = -1.34 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.978 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

**Mode: Cell. CDMA BC 0, Body SAR, Back side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.824 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.778 W/kg

**SAR(1 g) = 0.611 W/kg**

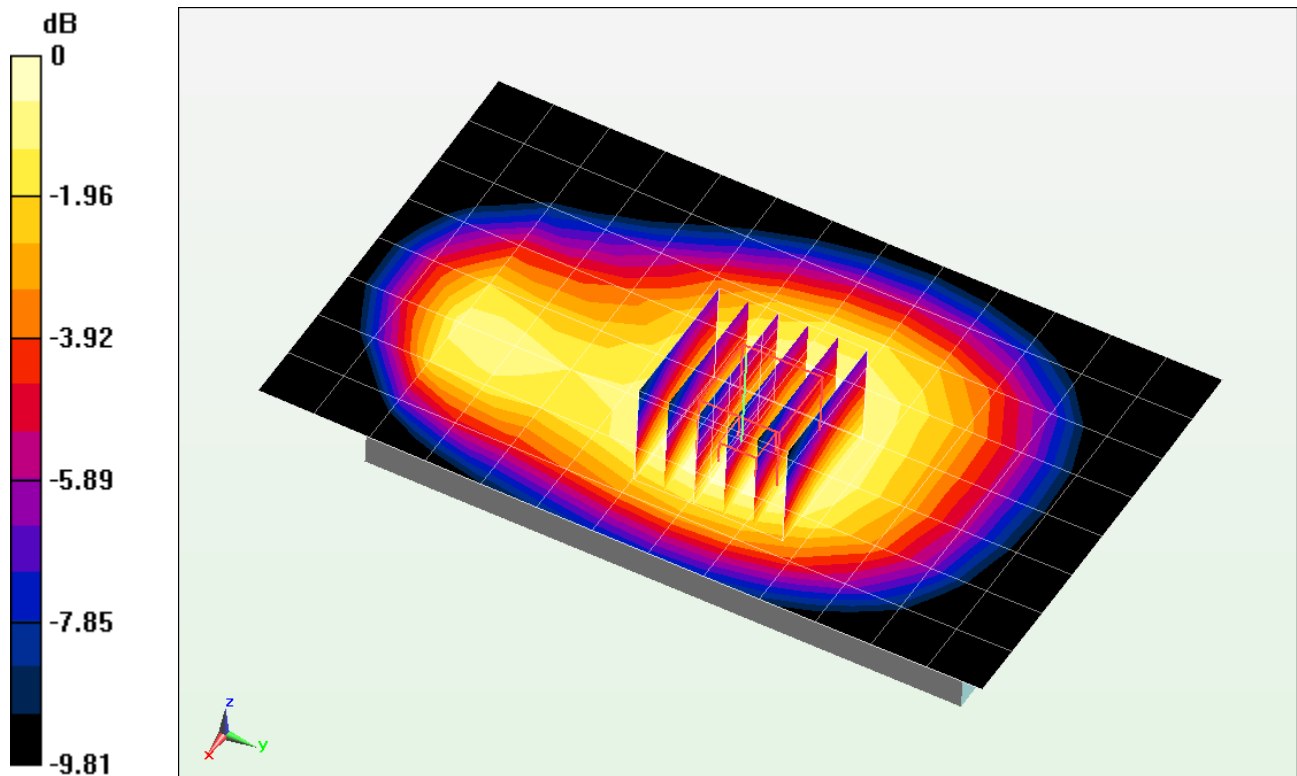

0 dB = 0.637 W/kg = -1.96 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.978 \text{ S/m}$ ;  $\epsilon_r = 53.681$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: Cell. EVDO Rev0, BC 0, Body SAR, Front side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.044 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.674 W/kg**

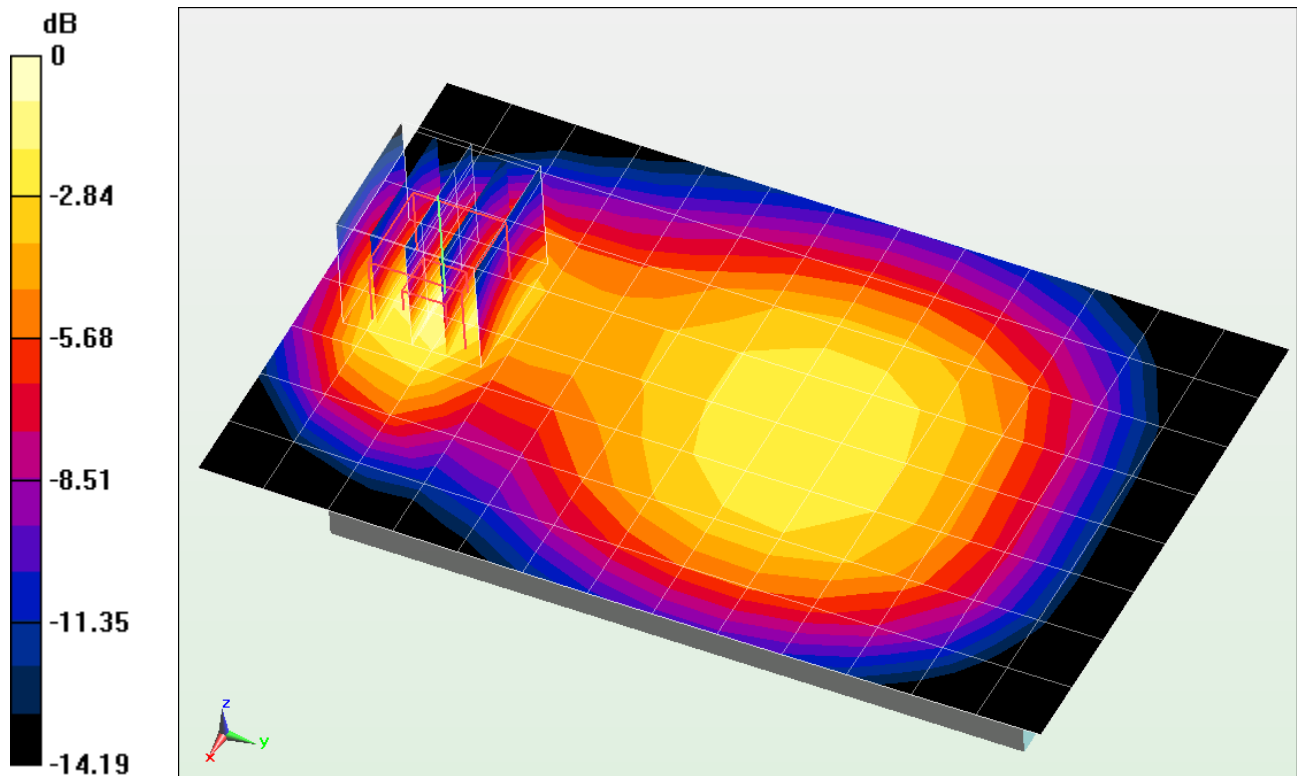

0 dB = 0.748 W/kg = -1.26 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.544 \text{ S/m}$ ;  $\epsilon_r = 54.492$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: PCS CDMA, Body SAR, Back side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.057 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 1.09 W/kg**

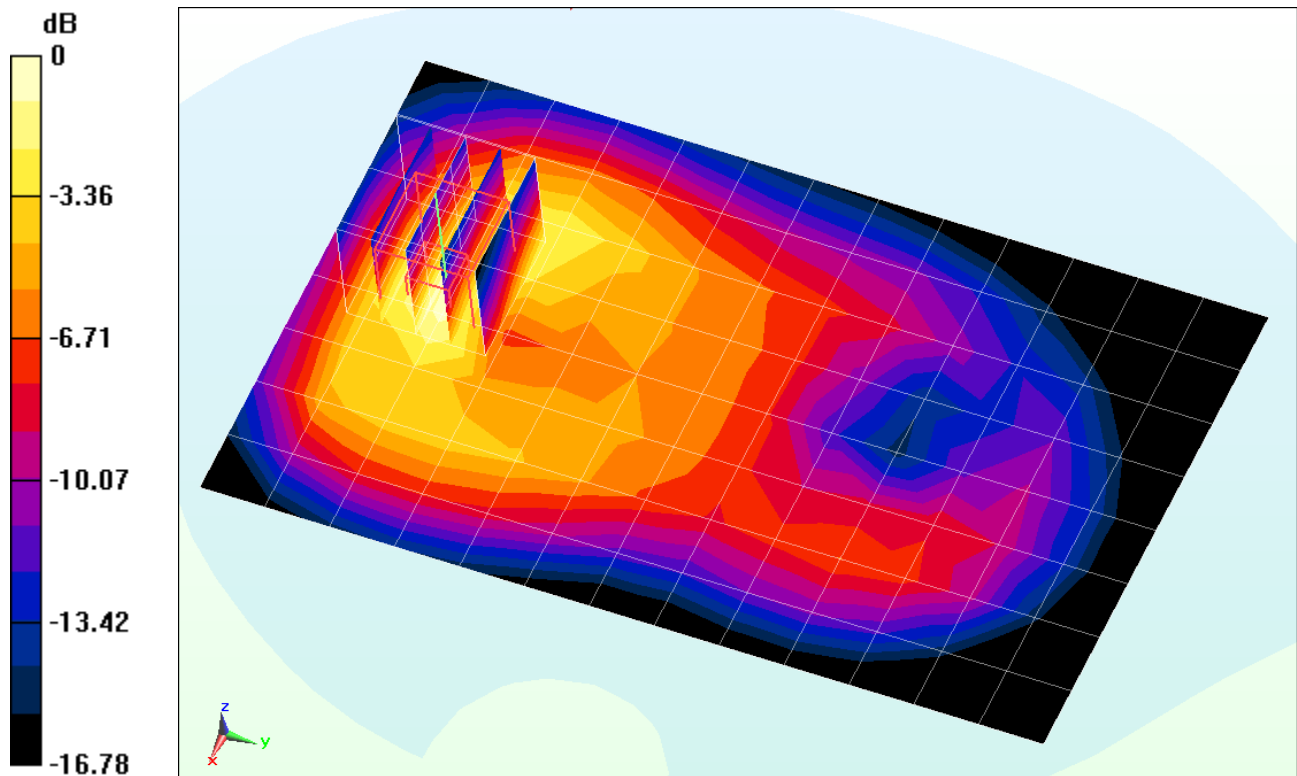

0 dB = 1.22 W/kg = 0.86 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1881**

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.544 \text{ S/m}$ ;  $\epsilon_r = 54.492$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: PCS EVDO Rev 0, Body SAR, Back side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.702 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.14 W/kg**

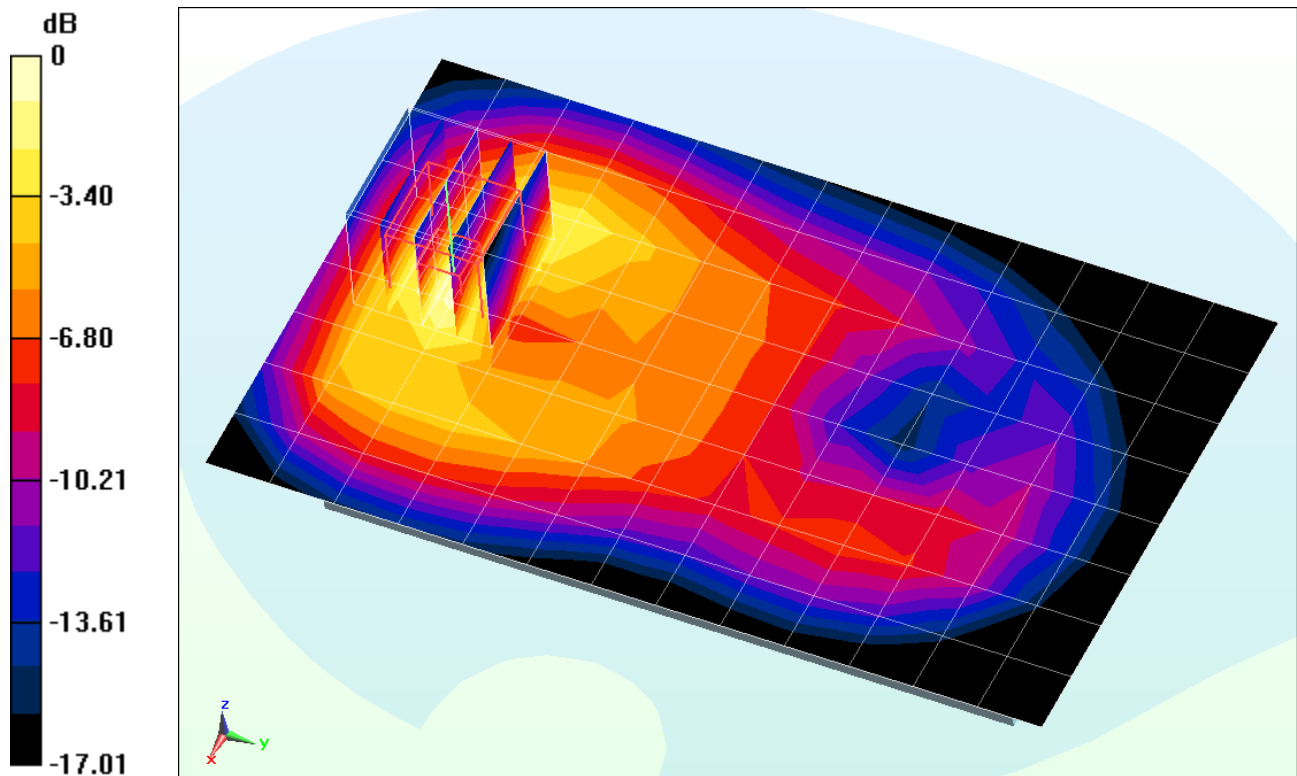

0 dB = 1.29 W/kg = 1.11 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1880**

Communication System: GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body; Medium parameters used (interpolated):

$$f = 836.6 \text{ MHz}; \sigma = 0.978 \text{ S/m}; \epsilon_r = 53.68; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.386 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.861 W/kg

**SAR(1 g) = 0.684 W/kg**

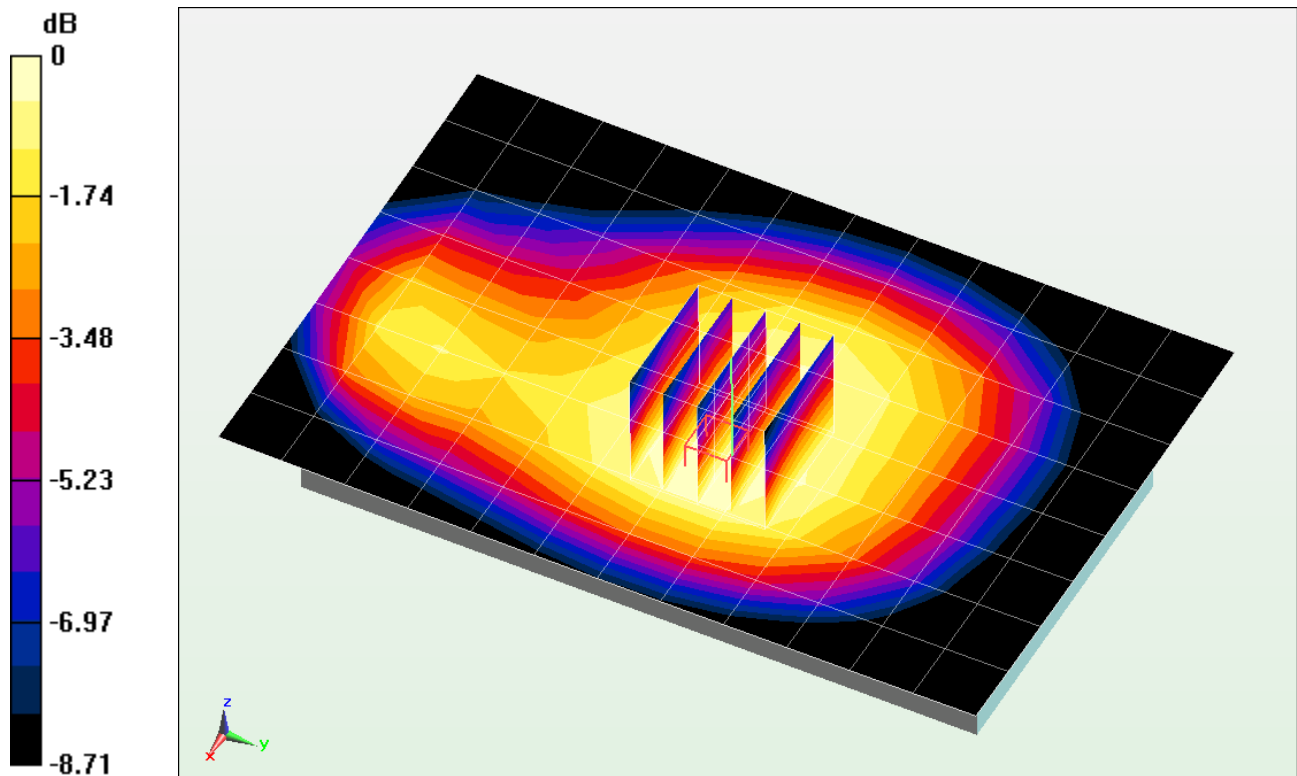

0 dB = 0.713 W/kg = -1.47 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1880**

Communication System: GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body; Medium parameters used (interpolated):

$$f = 836.6 \text{ MHz}; \sigma = 0.978 \text{ S/m}; \epsilon_r = 53.68; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 850, Body SAR, Front side, Mid.ch, 2 Tx Slots**


**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.549 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.765 W/kg**

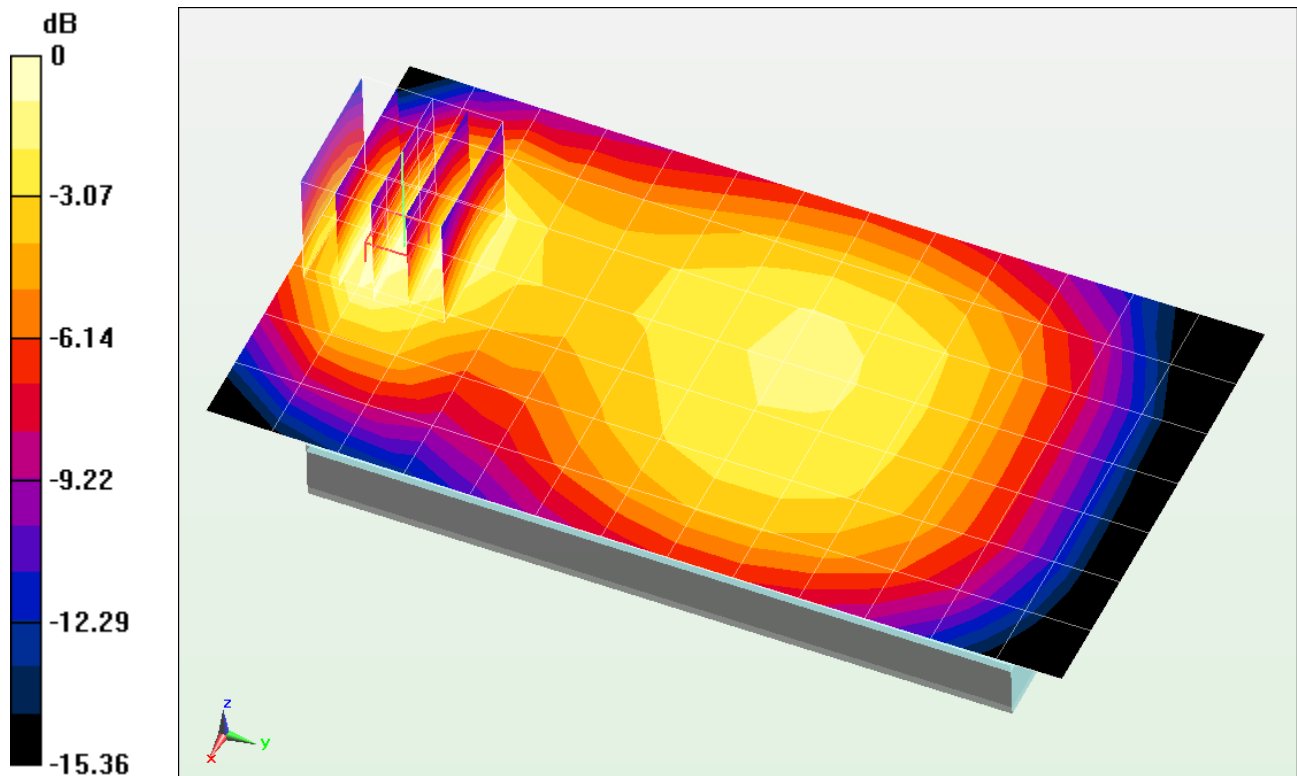

0 dB = 0.606 W/kg = -2.18 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1880**

Communication System: GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.544 \text{ S/m}$ ;  $\epsilon_r = 54.492$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.105 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.899 W/kg

**SAR(1 g) = 0.545 W/kg**

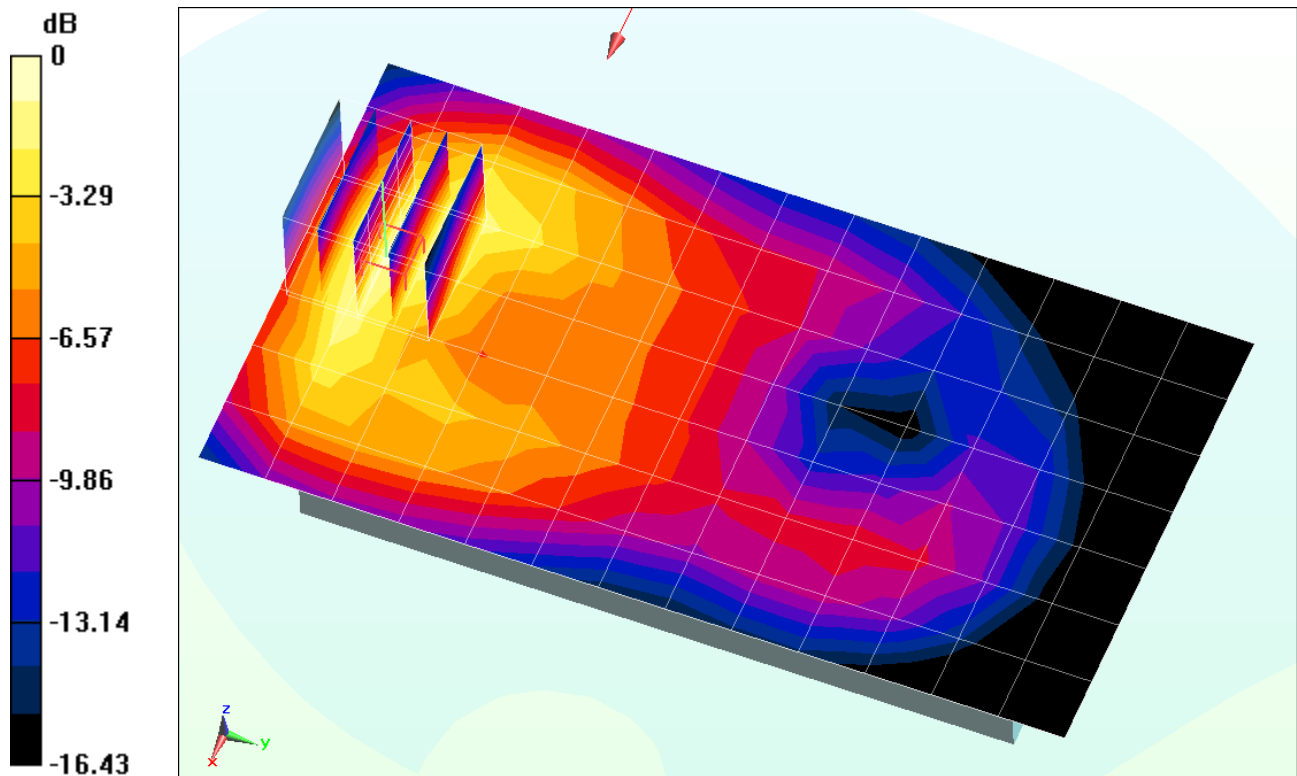

0 dB = 0.599 W/kg = -2.23 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1876**

Communication System: UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 55.419$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.768 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.442 W/kg**

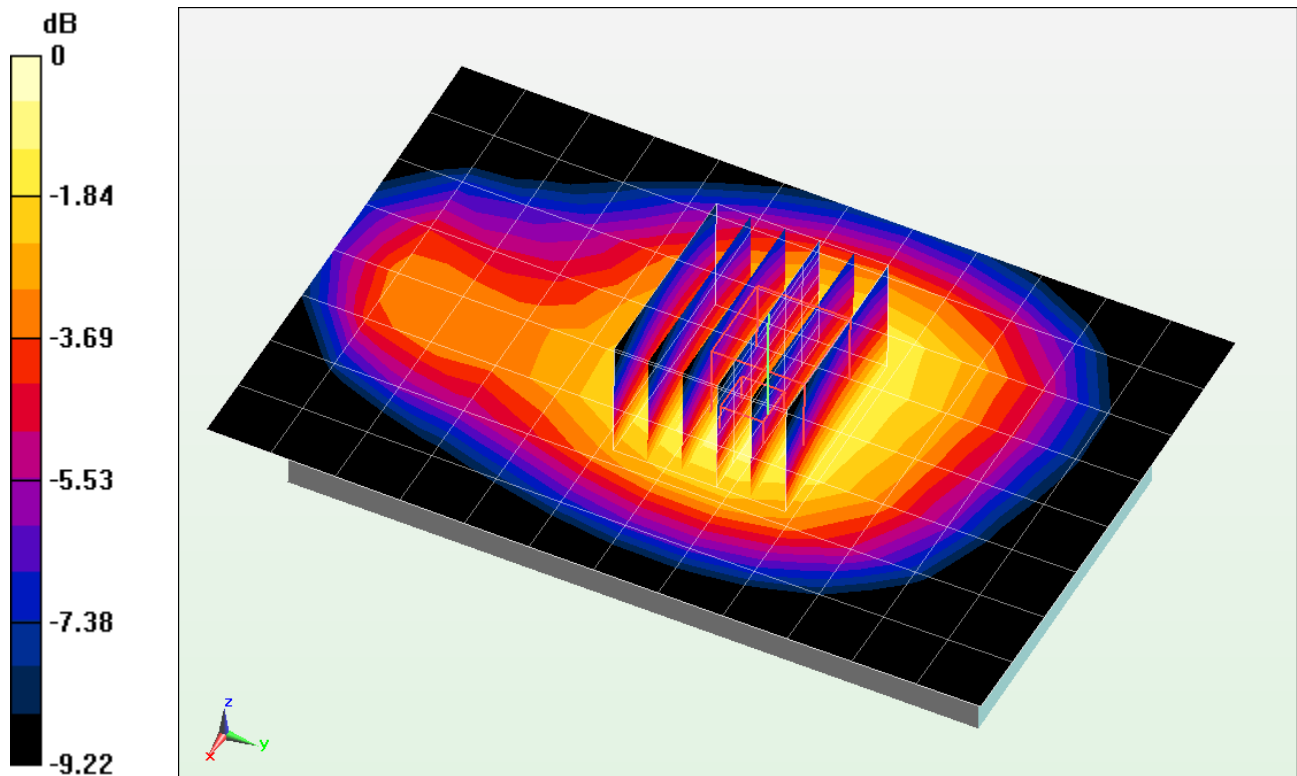

0 dB = 0.560 W/kg = -2.52 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1876**

Communication System: UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 55.419$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 850, Body SAR, Front side, Mid.ch**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 28.186 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.696 W/kg**

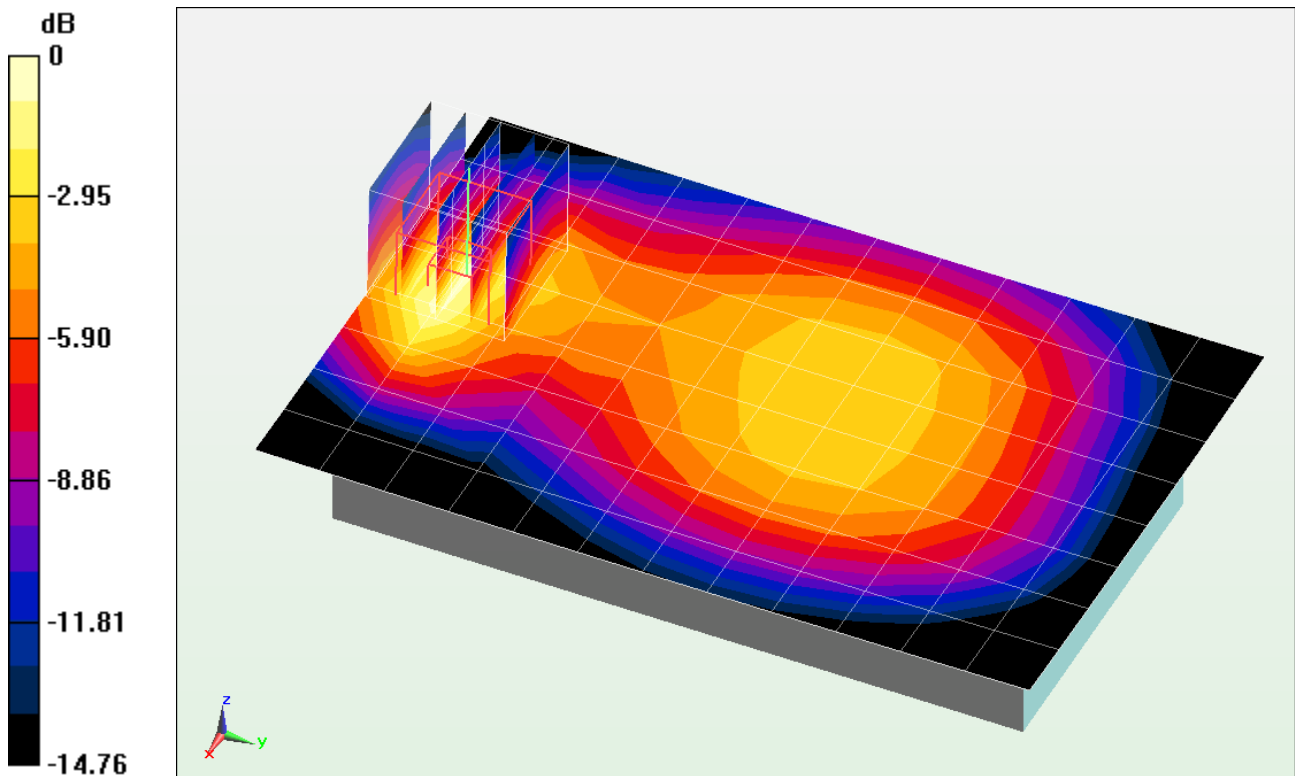

0 dB = 0.785 W/kg = -1.05 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1876**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.544 \text{ S/m}$ ;  $\epsilon_r = 54.492$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 1900, Body SAR, Back side, Mid.ch**


**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.065 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.944 W/kg

**SAR(1 g) = 0.579 W/kg**

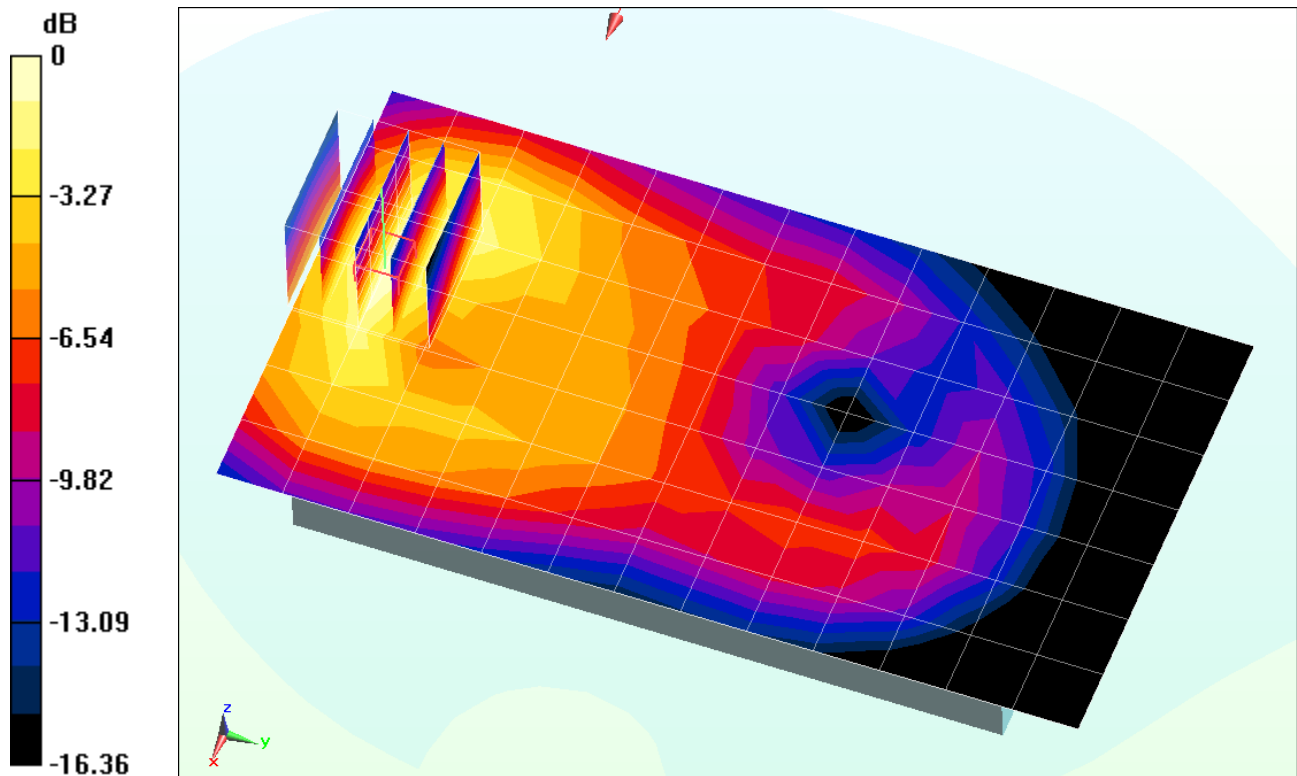

0 dB = 0.649 W/kg = -1.88 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1876**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.544 \text{ S/m}$ ;  $\epsilon_r = 54.492$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 1900, Body SAR, Front side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.970 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.702 W/kg**

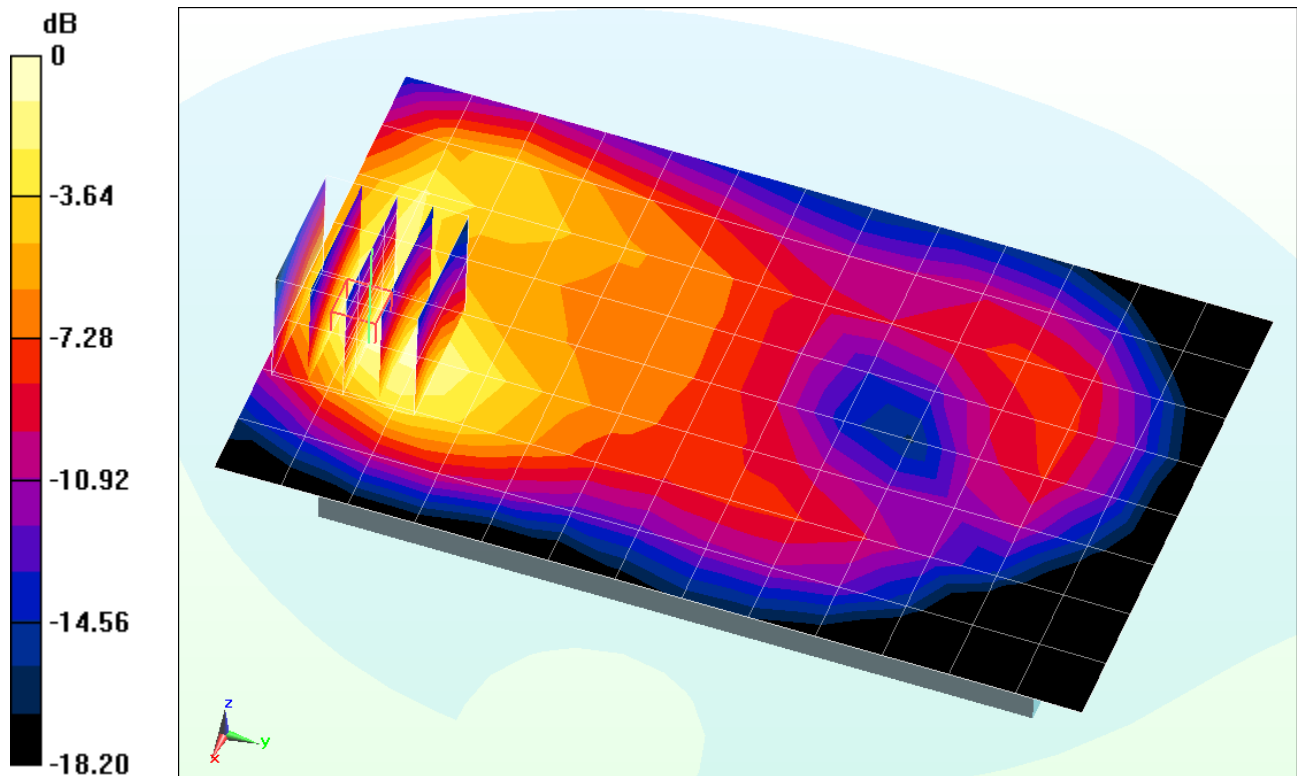

0 dB = 0.740 W/kg = -1.31 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1877**

Communication System: LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.973 \text{ S/m}$ ;  $\epsilon_r = 53.729$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 26, Body SAR, Back side, Mid.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.709 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.831 W/kg

**SAR(1 g) = 0.552 W/kg**

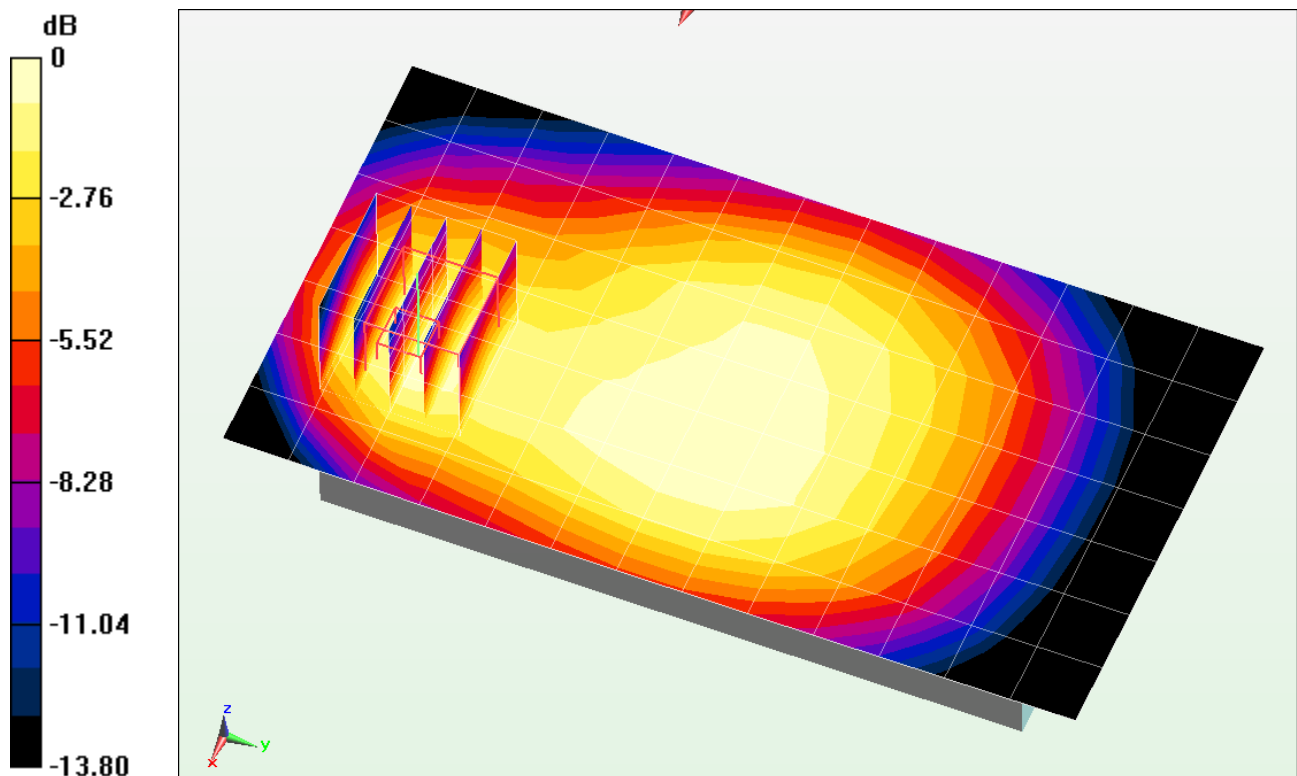

0 dB = 0.588 W/kg = -2.31 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1877**

Communication System: LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.973 \text{ S/m}$ ;  $\epsilon_r = 53.729$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 26, Body SAR, Front side, Mid.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.583 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.949 W/kg

**SAR(1 g) = 0.577 W/kg**

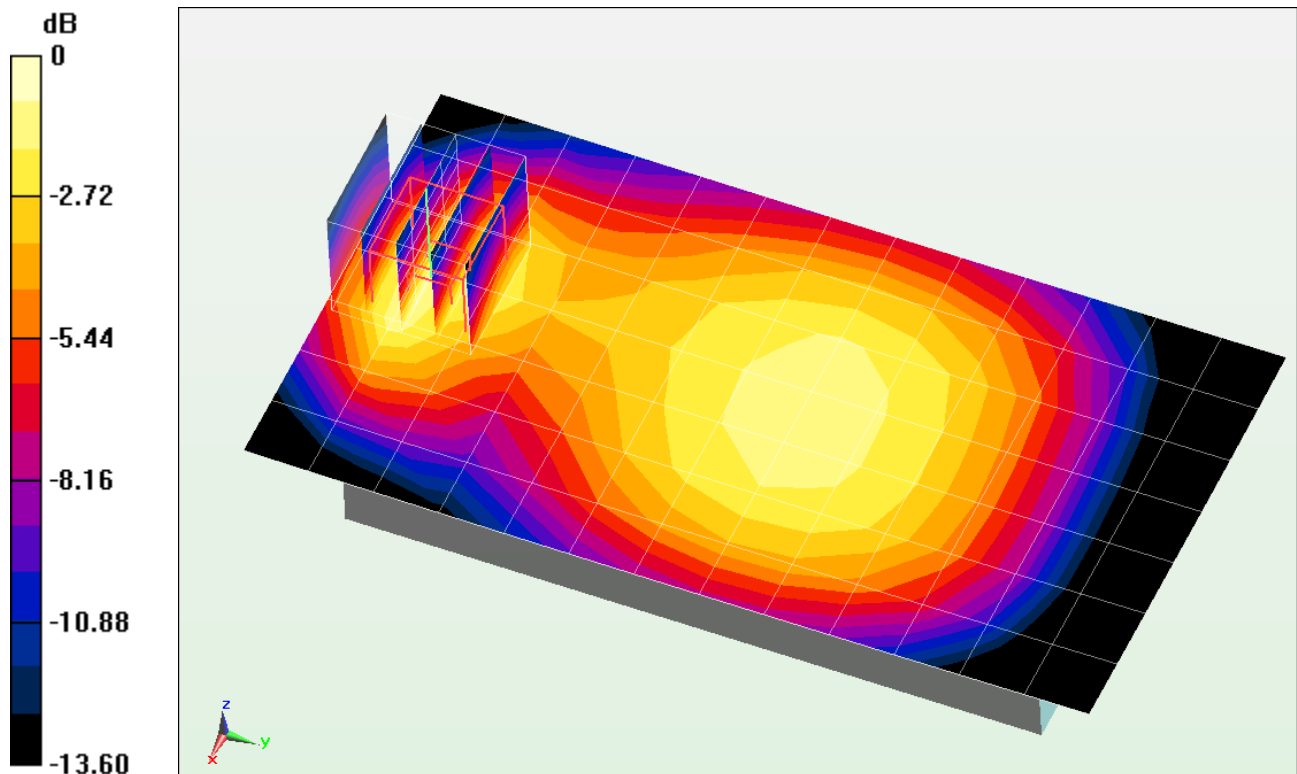

0 dB = 0.629 W/kg = -2.01 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1879**

Communication System: LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.547 \text{ S/m}$ ;  $\epsilon_r = 54.475$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Mid.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 49 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.521 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.767 W/kg**

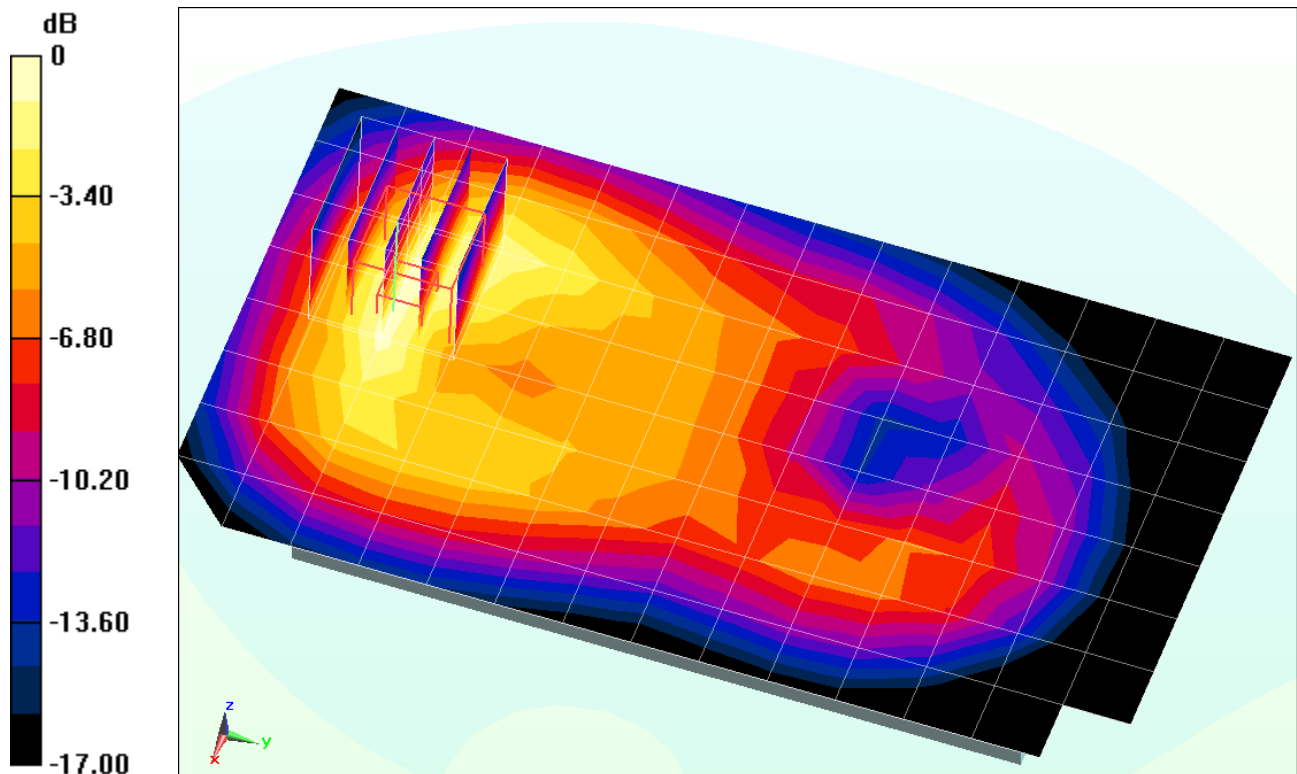

0 dB = 0.848 W/kg = -0.72 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1879**

Communication System: LTE Band 25 (PCS); Frequency: 1910 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1910 \text{ MHz}$ ;  $\sigma = 1.585 \text{ S/m}$ ;  $\epsilon_r = 54.283$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 25 (PCS), Body SAR, Front side, High.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.267 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.873 W/kg**

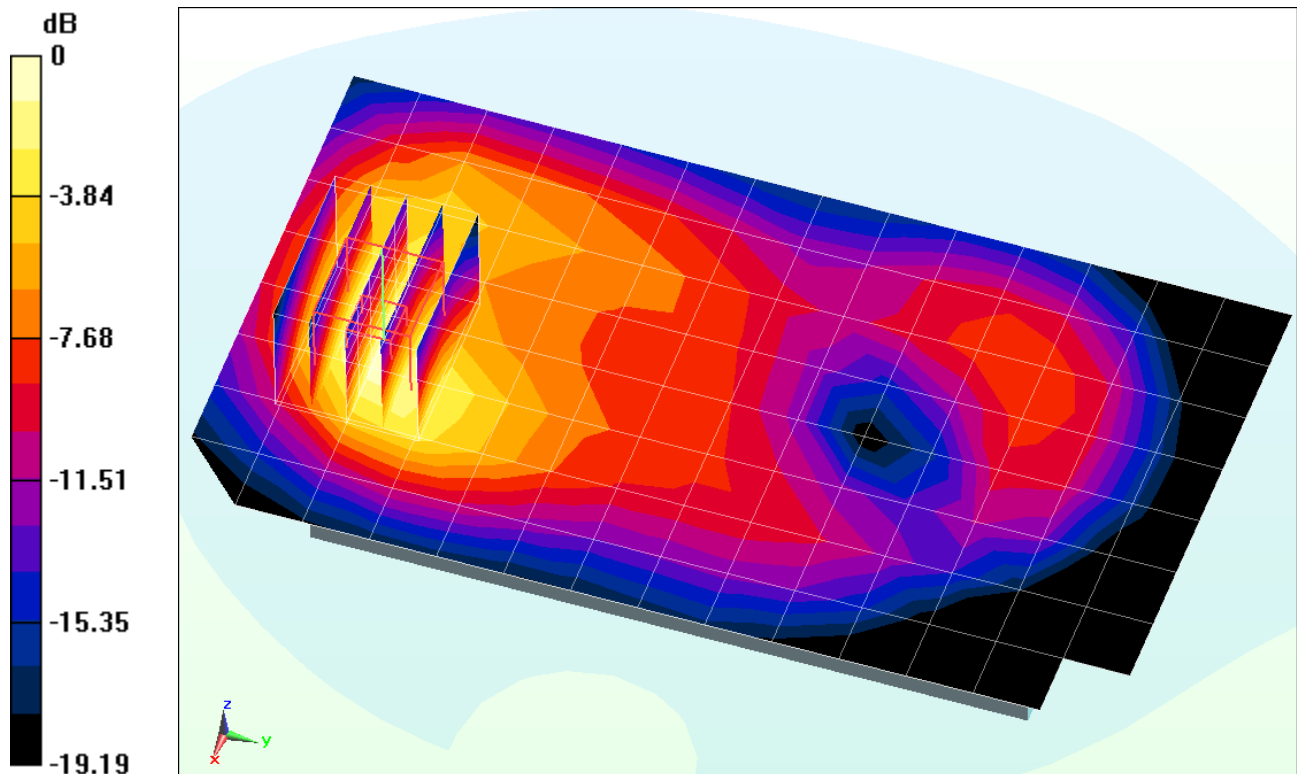

0 dB = 0.976 W/kg = -0.11 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1875**

Communication System: LTE Band 41; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2636.5 \text{ MHz}$ ;  $\sigma = 2.273 \text{ S/m}$ ;  $\epsilon_r = 51.768$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-18-2013; Ambient Temp: 23.9°C; Tissue Temp: 23.6°C

Probe: ES3DV2 - SN3022; ConvF(3.85, 3.85, 3.85); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 41, Body SAR, Back side, Mid-High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.147 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.789 W/kg

**SAR(1 g) = 0.374 W/kg**

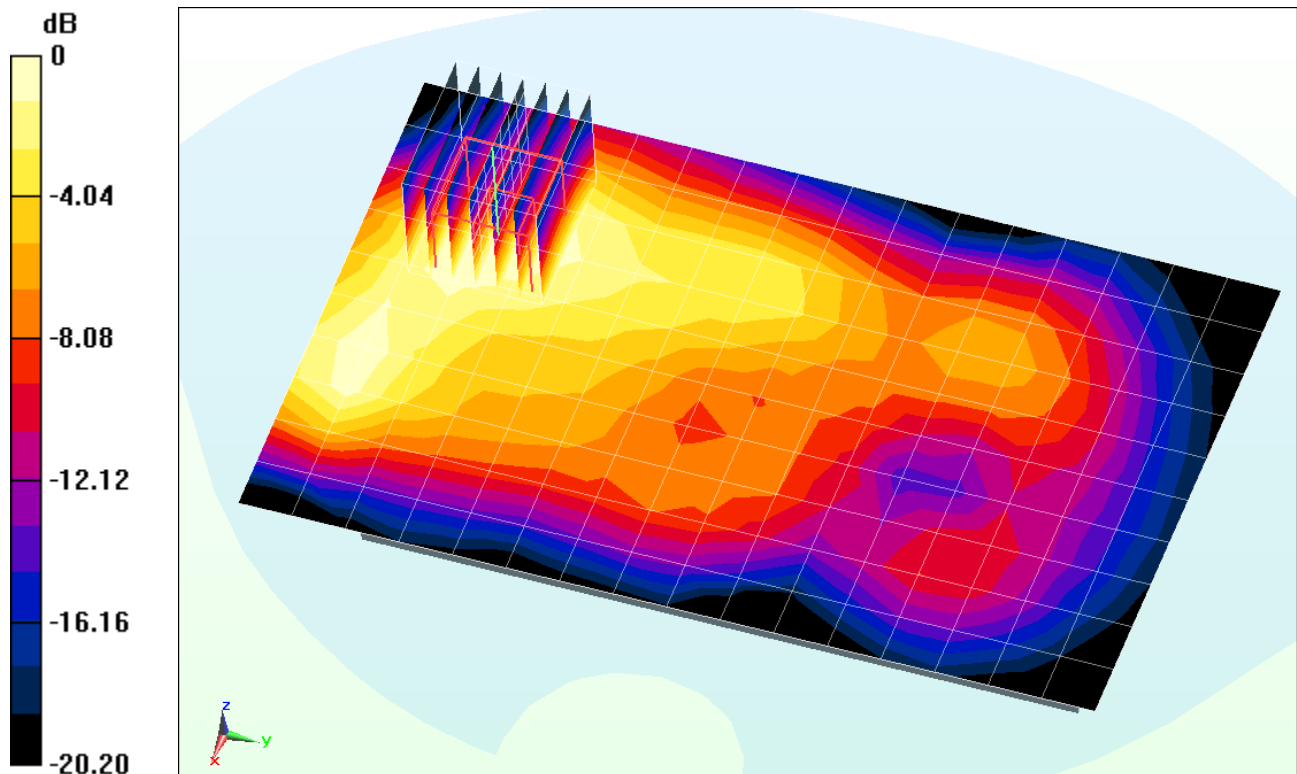

0 dB = 0.461 W/kg = -3.36 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1875**

Communication System: LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.59

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$ ;  $\sigma = 2.095 \text{ S/m}$ ;  $\epsilon_r = 52.204$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-18-2013; Ambient Temp: 24.1°C; Tissue Temp: 23.7°C

Probe: ES3DV2 - SN3022; ConvF(4.01, 4.01, 4.01); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 41, Body SAR, Front side, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.694 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.771 W/kg**

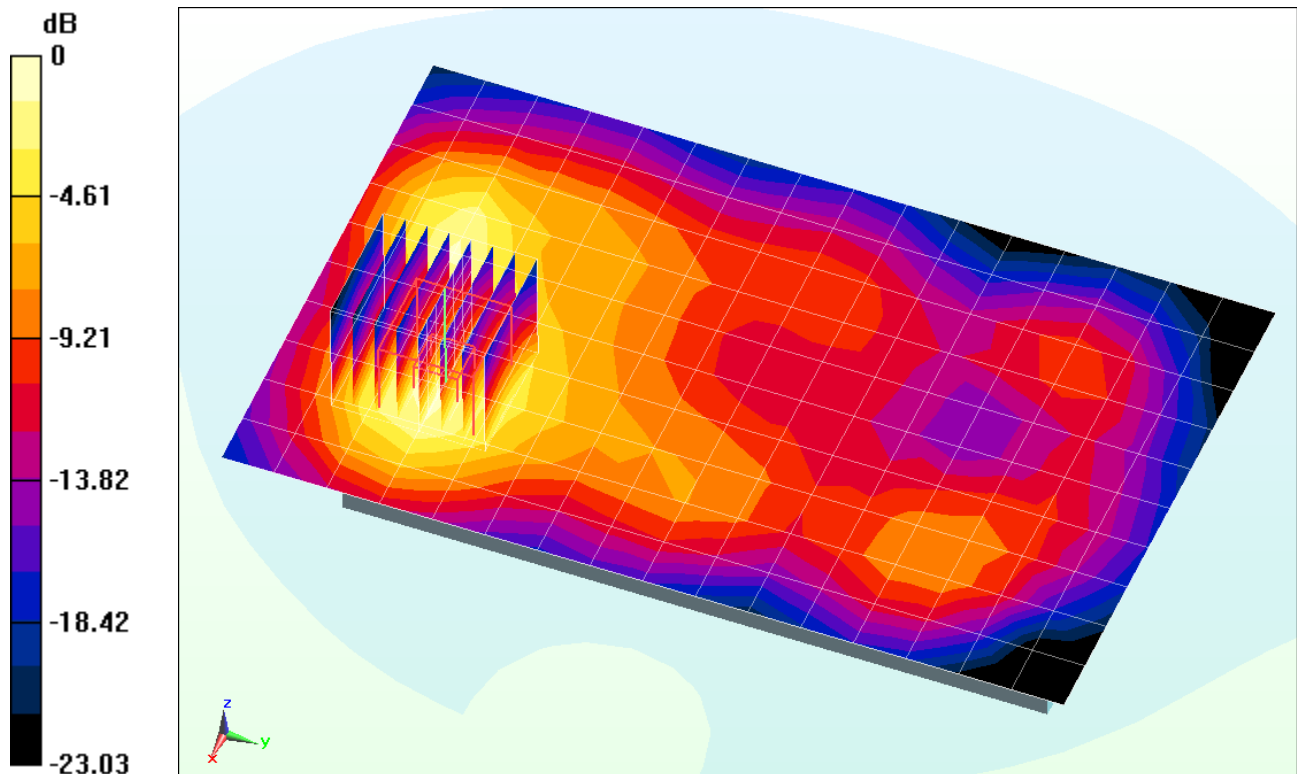

0 dB = 0.954 W/kg = -0.20 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 2.005 \text{ S/m}$ ;  $\epsilon_r = 53.324$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-11-2013; Ambient Temp: 24.1°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3263; ConvF(4.33, 4.33, 4.33); Calibrated: 5/16/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/13/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11b, Body SAR, Ch 11, 1 Mbps, Back Side**


**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.551 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.391 W/kg

**SAR(1 g) = 0.187 W/kg**

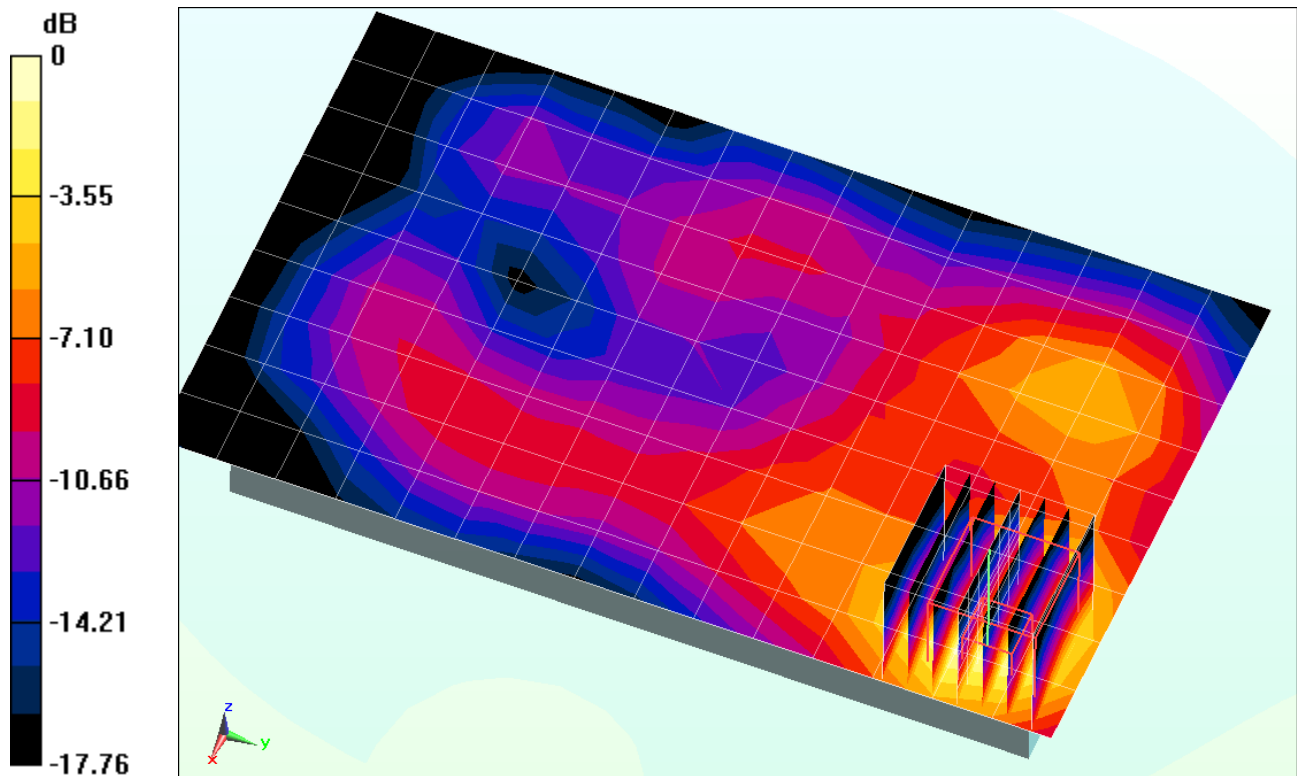

0 dB = 0.238 W/kg = -6.23 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5765 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used:

$$f = 5765 \text{ MHz}; \sigma = 6.227 \text{ S/m}; \epsilon_r = 45.954; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.8 GHz, Body SAR, Ch 153, 6 Mbps, Back Side**


**Area Scan (14x23x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 1.623 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.325 W/kg

**SAR(1 g) = 0.026 W/kg**

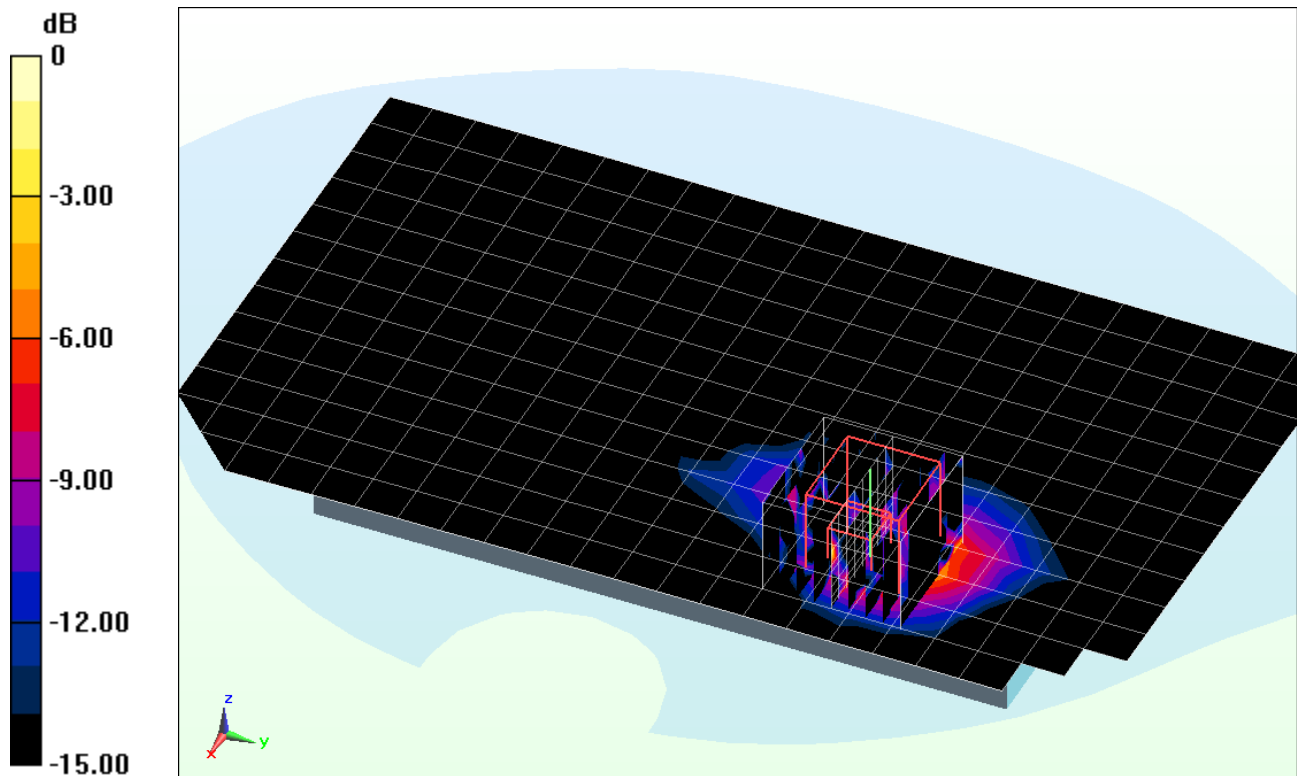

0 dB = 0.500 W/kg = -3.01 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5260 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used:

$$f = 5260 \text{ MHz}; \sigma = 5.558 \text{ S/m}; \epsilon_r = 46.854; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.8 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.3 GHz, Body SAR, Ch 52, 6 Mbps, Back Side**


**Area Scan (14x23x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.386 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.504 W/kg

**SAR(1 g) = 0.116 W/kg**

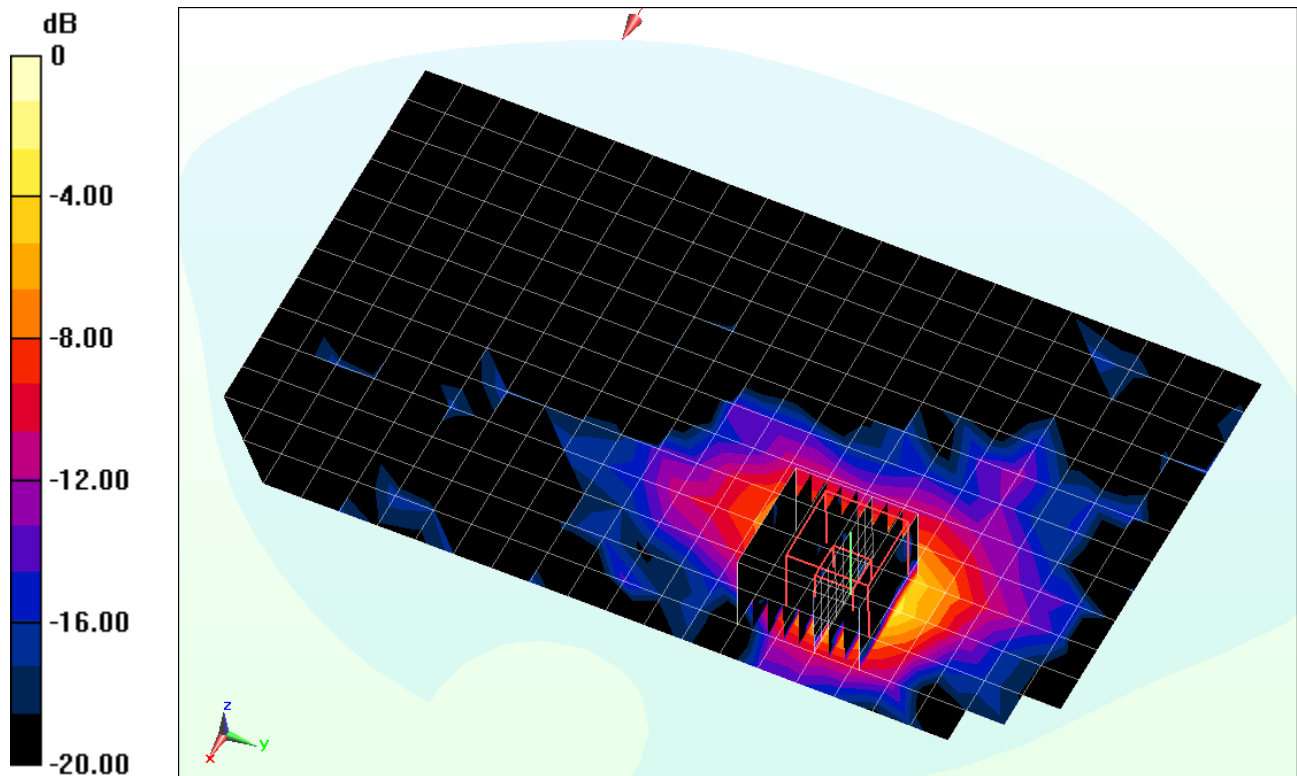

0 dB = 0.324 W/kg = -4.89 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5765 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used:

$$f = 5765 \text{ MHz}; \sigma = 6.227 \text{ S/m}; \epsilon_r = 45.954; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.8 GHz, Body SAR, Ch 153, 6 Mbps, Left Edge**


**Area Scan (13x23x1):** Measurement grid: dx=5mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.758 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.2 W/kg

**SAR(1 g) = 0.051 W/kg**

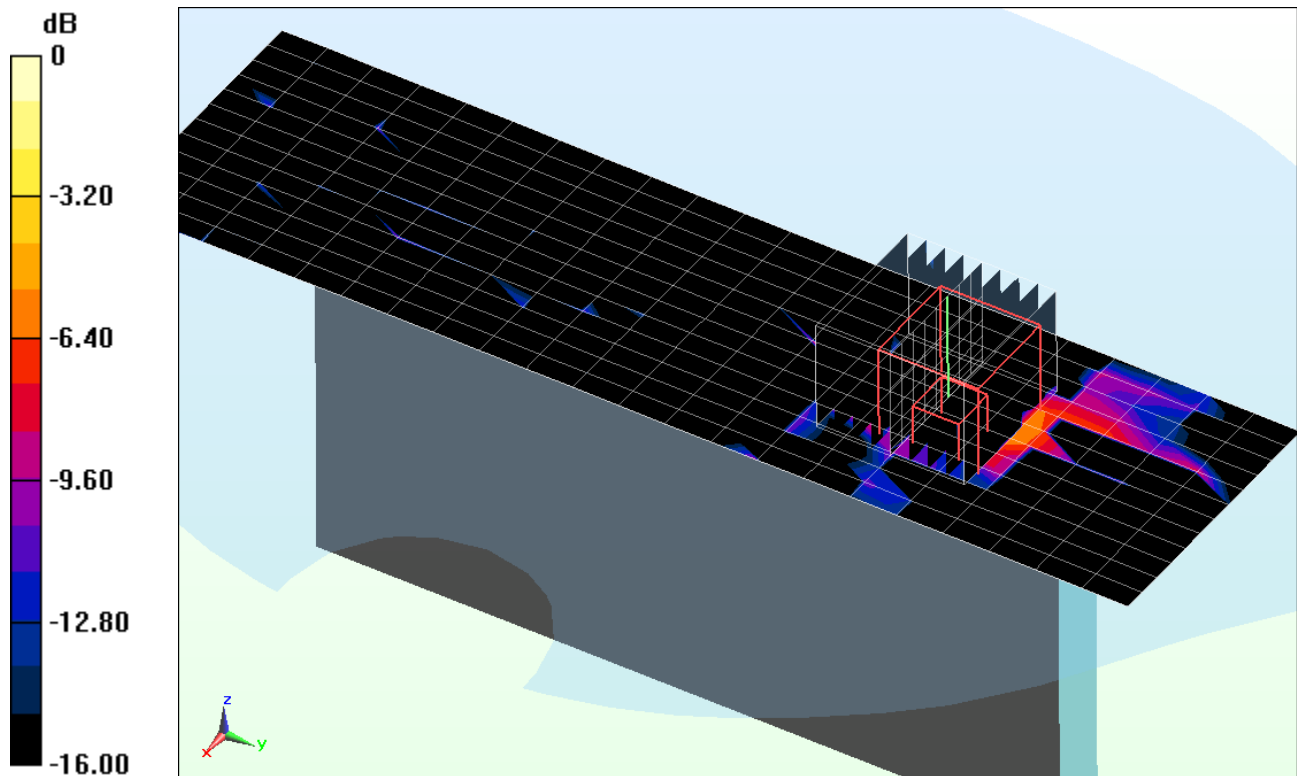

0 dB = 0.0600 W/kg = -12.22 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS995; Type: Portable Handset; Serial: 1890**

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5260 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body; Medium parameters used:

$$f = 5260 \text{ MHz}; \sigma = 5.558 \text{ S/m}; \epsilon_r = 46.854; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.3 GHz, Hand SAR, Ch 52, 6 Mbps, Left Edge**


**Area Scan (13x21x1):** Measurement grid: dx=5mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 14.492 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.37 W/kg

**SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.218 W/kg**

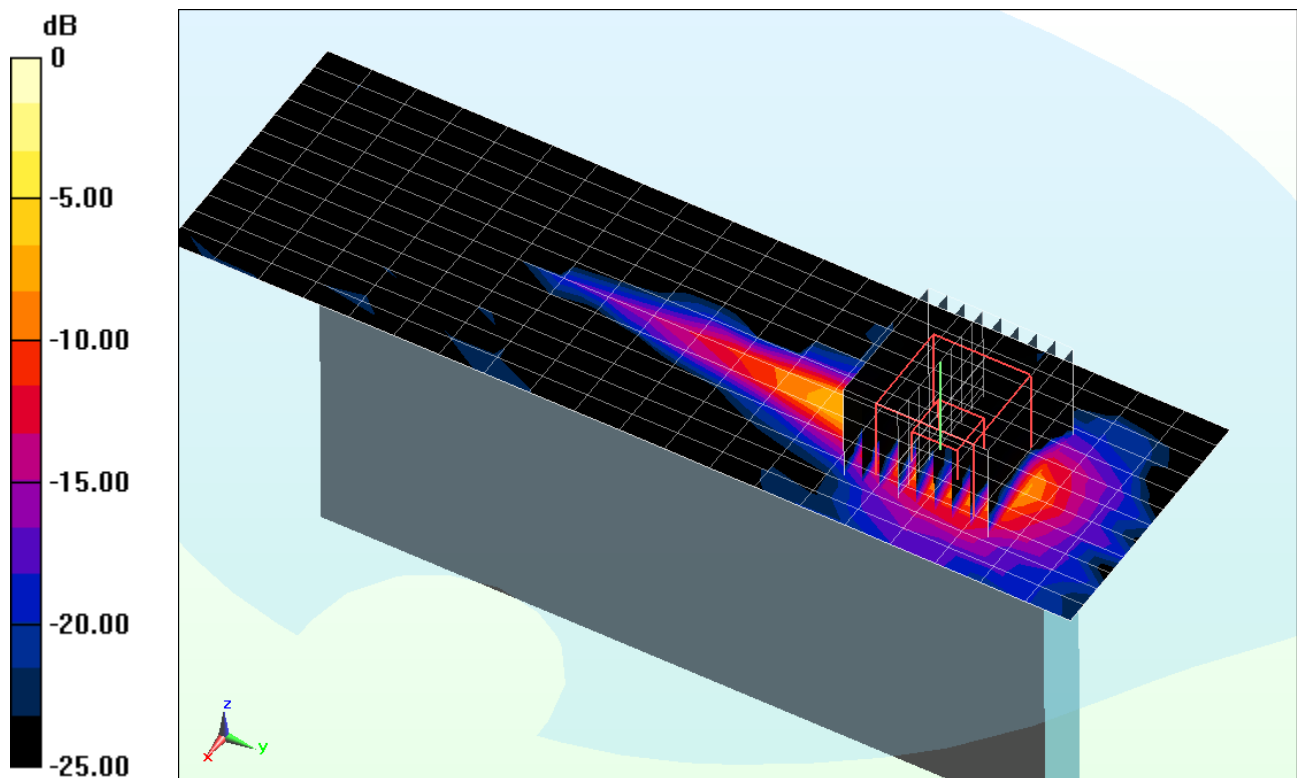

0 dB = 2.31 W/kg = 3.64 dBW/kg



## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d119**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.877 \text{ S/m}$ ;  $\epsilon_r = 40.224$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-14-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.2°C

Probe: ES3DV2 - SN3022; ConvF(6.09, 6.09, 6.09); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.978 W/kg**

Deviation = 1.03%

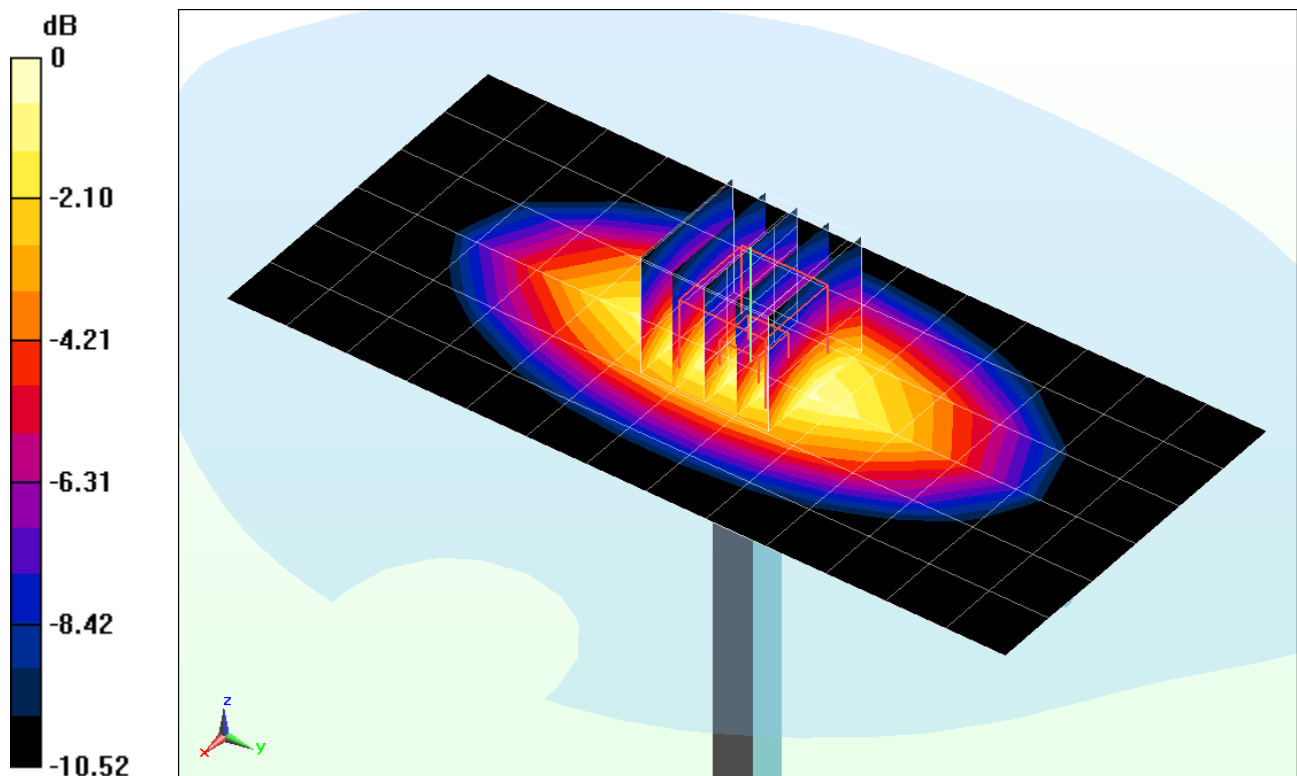

0 dB = 1.05 W/kg = 0.21 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.449 \text{ S/m}$ ;  $\epsilon_r = 40.555$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-13-2013; Ambient Temp: 22.2°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(5.22, 5.22, 5.22); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 4/22/2013

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.56 W/kg

**SAR(1 g) = 4.08 W/kg**

Deviation = 2.77%

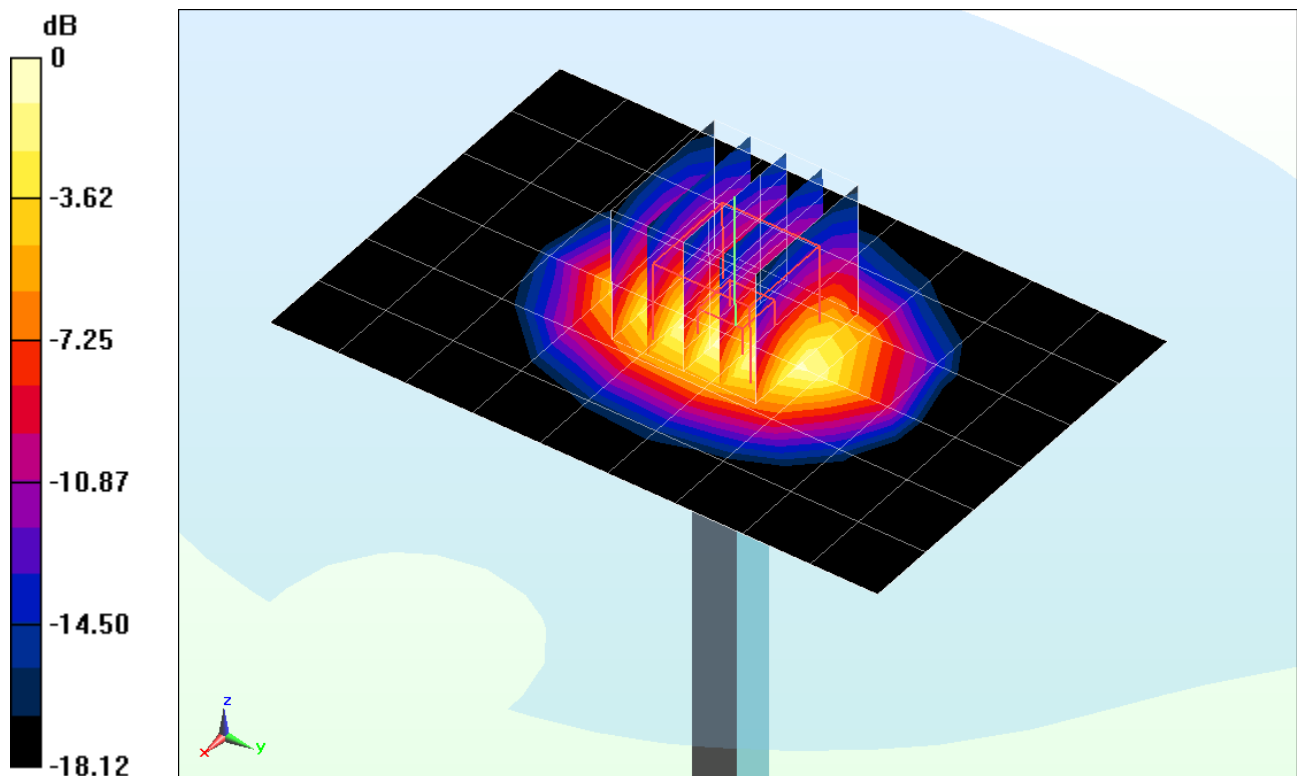

0 dB = 4.56 W/kg = 6.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 39.497$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-19-2013; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(5.08, 5.08, 5.08); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 4/22/2013

Phantom: SAM Front; Type: QD000P40CD; Serial: 1717

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 3.19 W/kg

**SAR(1 g) = 1.71 W/kg**

Deviation = 7.68%

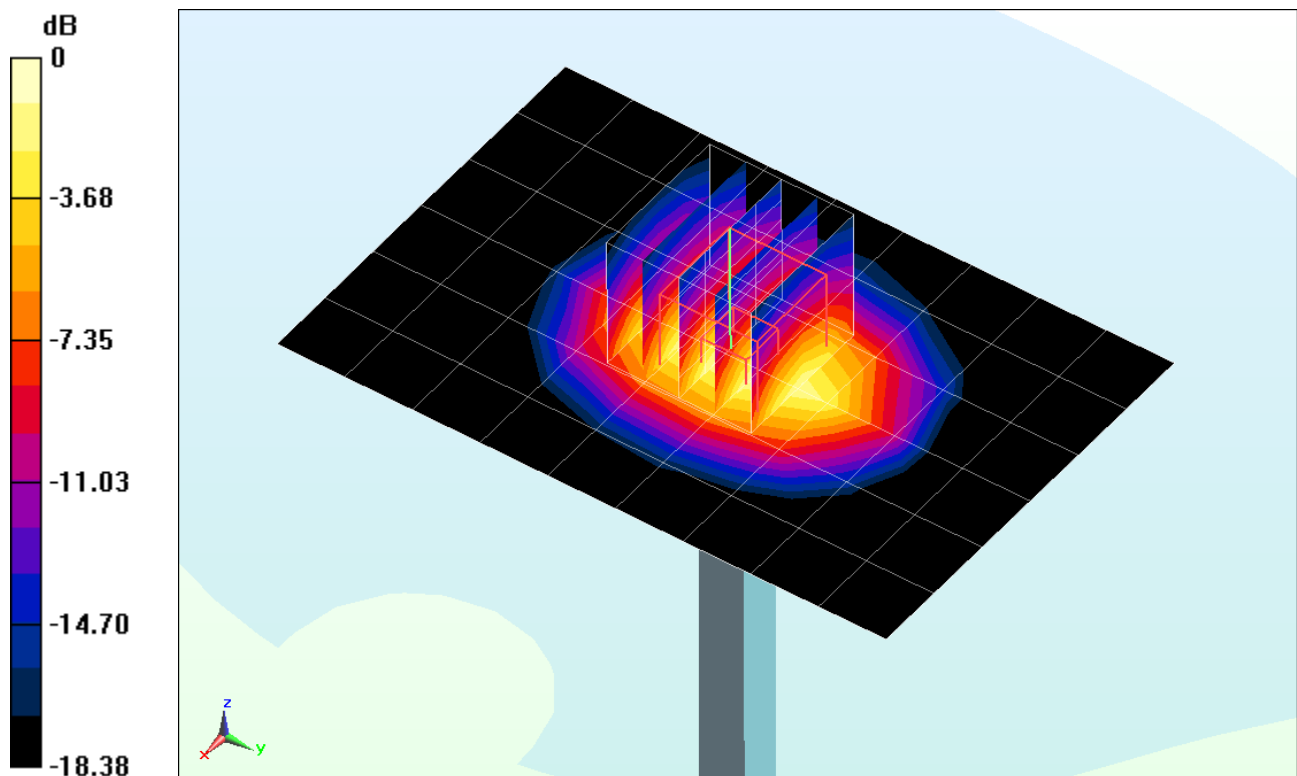

0 dB = 1.89 W/kg = 2.76 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.832 \text{ S/m}$ ;  $\epsilon_r = 40.058$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-14-2013; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3209; ConvF(4.57, 4.57, 4.57); Calibrated: 3/15/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: SAM Right; Type: QD000P40CD; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2450 MHz System Validation

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.1 W/kg

**SAR(1 g) = 4.96 W/kg**

Deviation = -5.52%

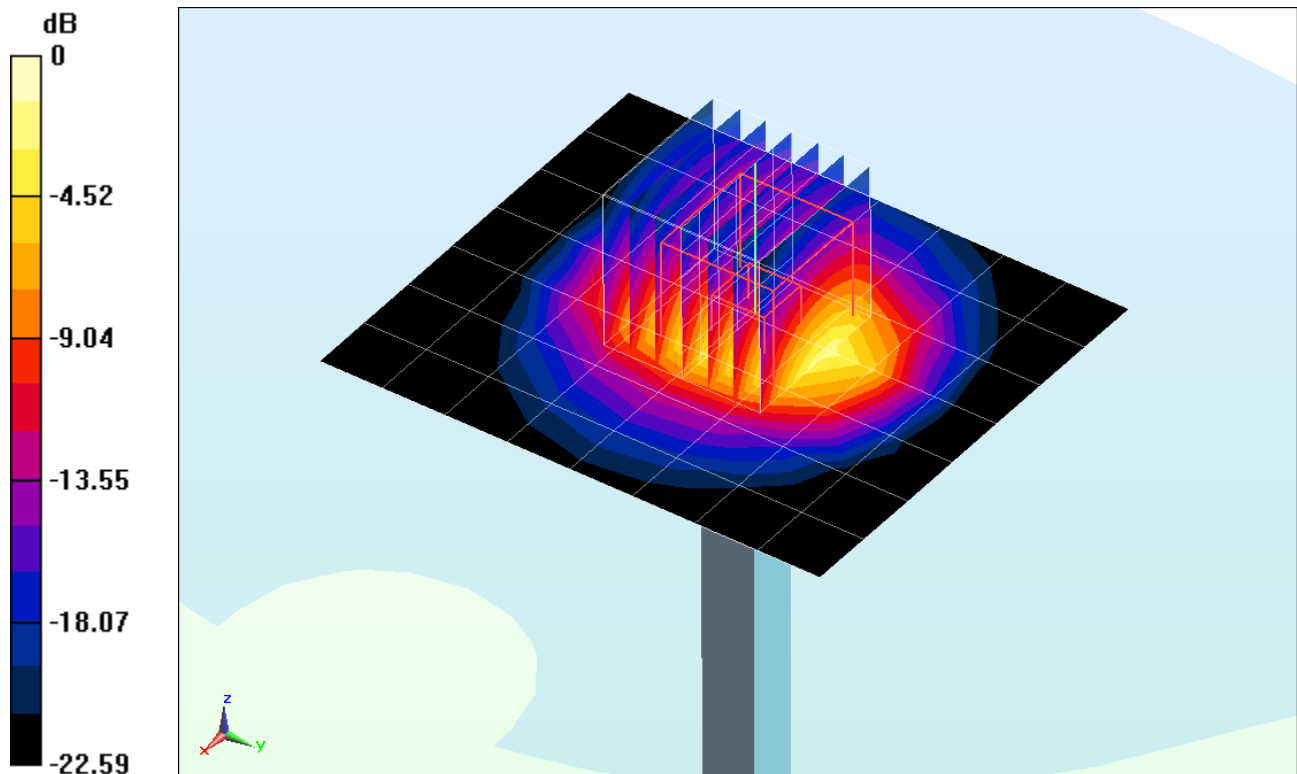

0 dB = 6.29 W/kg = 7.99 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head; Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 1.981 \text{ S/m}$ ;  $\epsilon_r = 39.176$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2013; Ambient Temp: 23.6°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3914; ConvF(6.79, 6.79, 6.79); Calibrated: 10/23/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2600 MHz System Verification

**Area Scan (9x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 12.9 W/kg

**SAR(1 g) = 6.02 W/kg**

Deviation = 3.44%

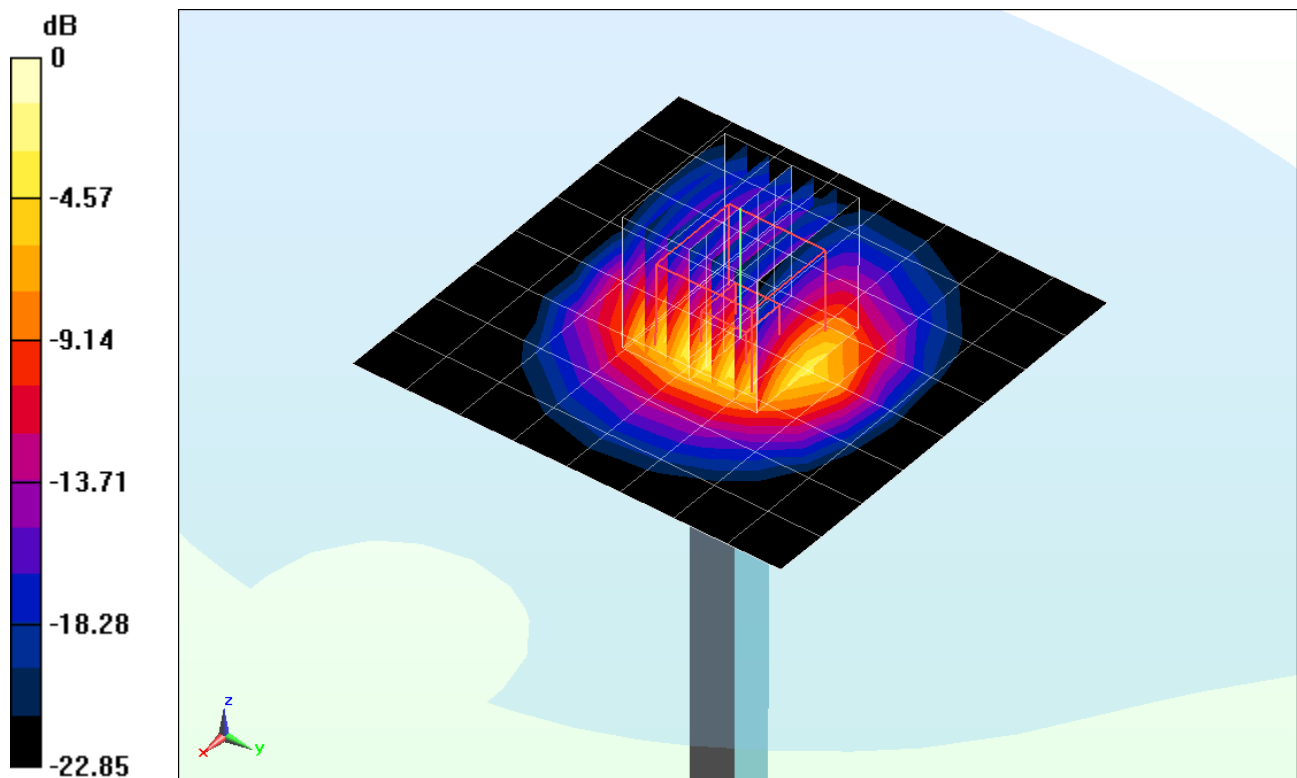

0 dB = 8.04 W/kg = 9.05 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5200 \text{ MHz}$ ;  $\sigma = 4.5 \text{ S/m}$ ;  $\epsilon_r = 35.078$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.99, 4.99, 4.99); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

## 5200 MHz System Verification

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 12.7 W/kg

**SAR(1 g) = 3.02 W/kg**

Deviation = -0.66%

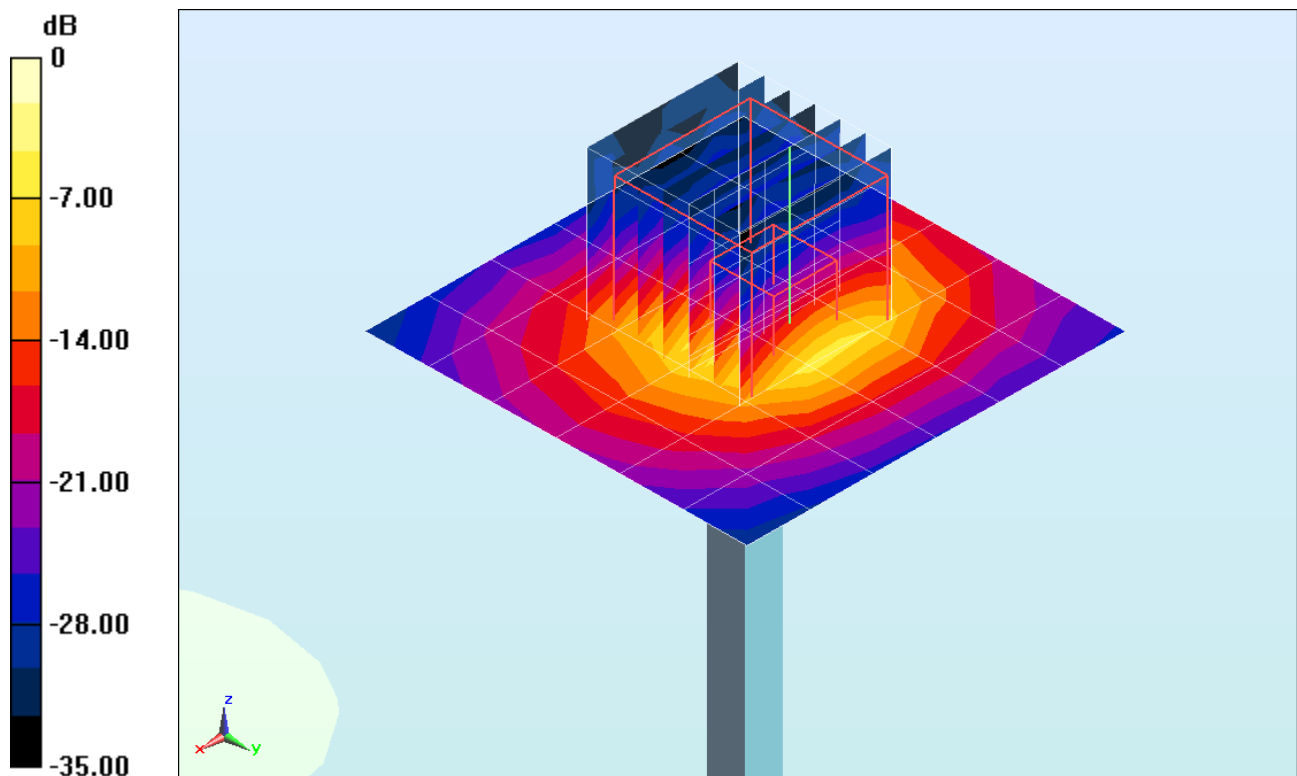

0 dB = 7.20 W/kg = 8.57 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 4.587 \text{ S/m}$ ;  $\epsilon_r = 34.954$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.82, 4.82, 4.82); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5300 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 12.9 W/kg

**SAR(1 g) = 3.04 W/kg**

Deviation = -3.43%

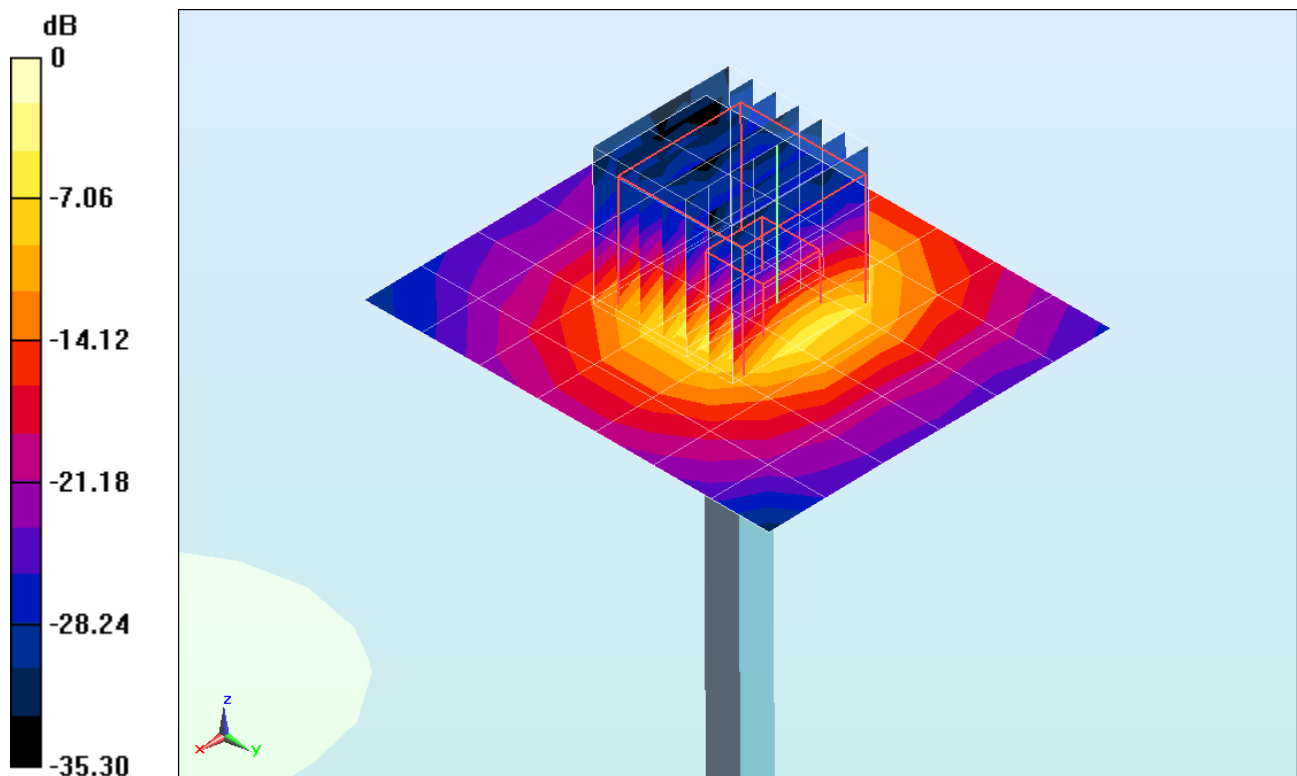

0 dB = 6.03 W/kg = 7.80 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 4.809 \text{ S/m}$ ;  $\epsilon_r = 34.681$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.55, 4.55, 4.55); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5500 MHz System Verification

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 14.0 W/kg

**SAR(1 g) = 3.18 W/kg**

Deviation = -0.75%

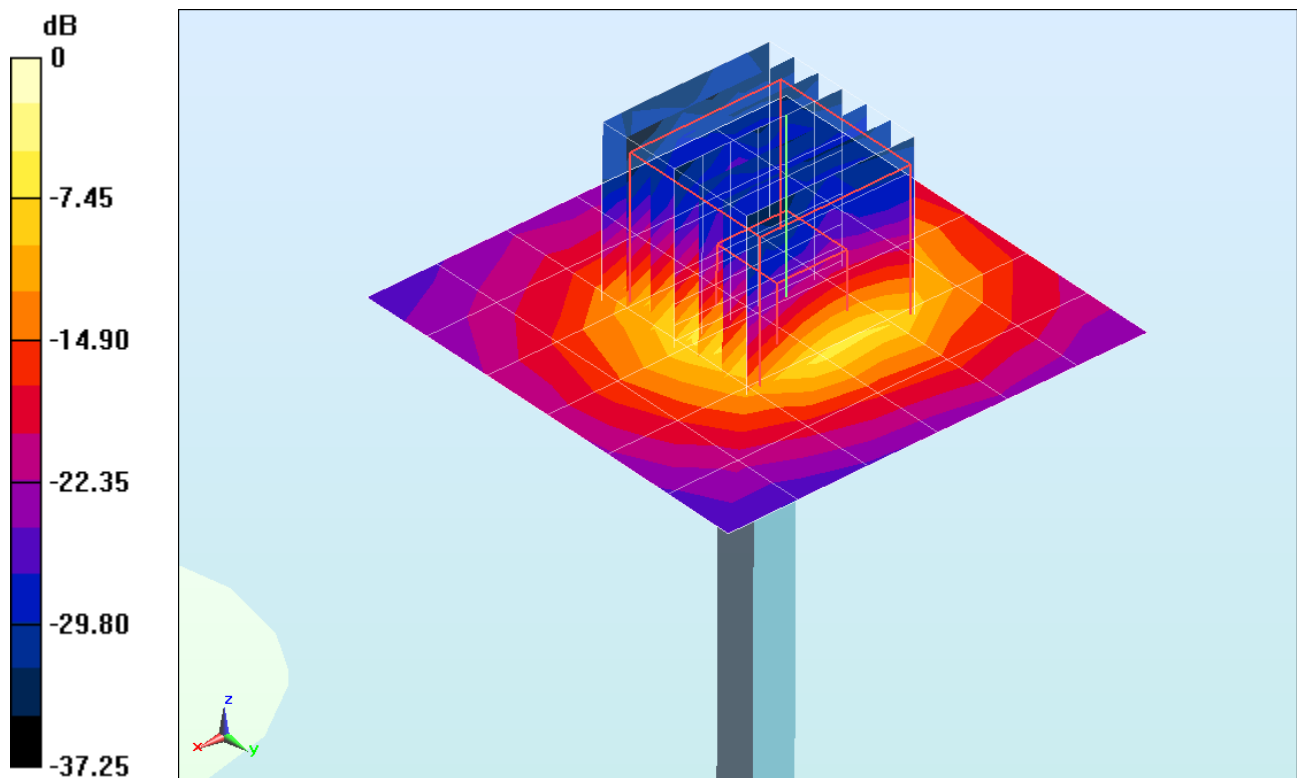

0 dB = 7.67 W/kg = 8.85 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 4.905 \text{ S/m}$ ;  $\epsilon_r = 34.516$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.37, 4.37, 4.37); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5600 MHz System Verification

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 15.3 W/kg

**SAR(1 g) = 3.44 W/kg**

Deviation = 7.63%

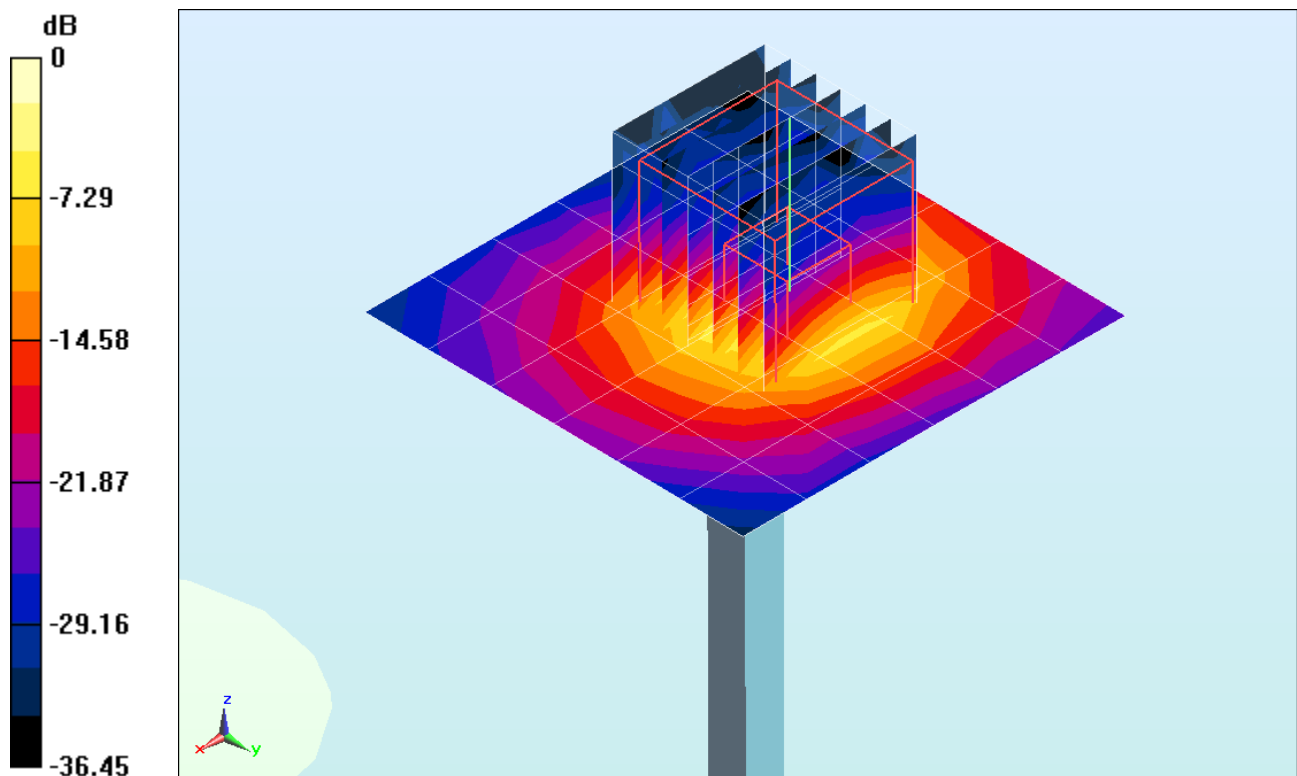

0 dB = 8.17 W/kg = 9.12 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head; Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 5.088 \text{ S/m}$ ;  $\epsilon_r = 34.302$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.52, 4.52, 4.52); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5800 MHz System Verification

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 14.3 W/kg

**SAR(1 g) = 3.05 W/kg**

Deviation = 1.80%

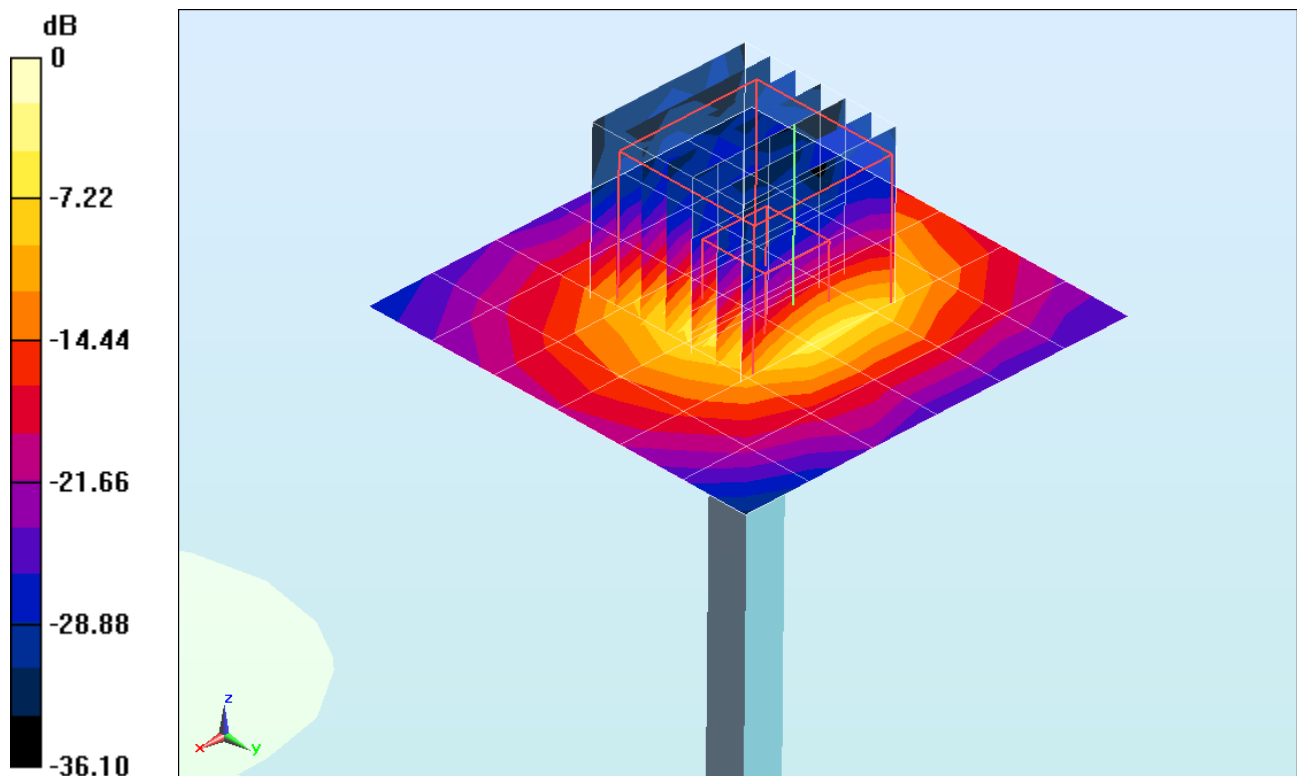

0 dB = 7.37 W/kg = 8.67 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d119**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.989 \text{ S/m}$ ;  $\epsilon_r = 55.428$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-14-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.979 W/kg**

Deviation = 2.62%

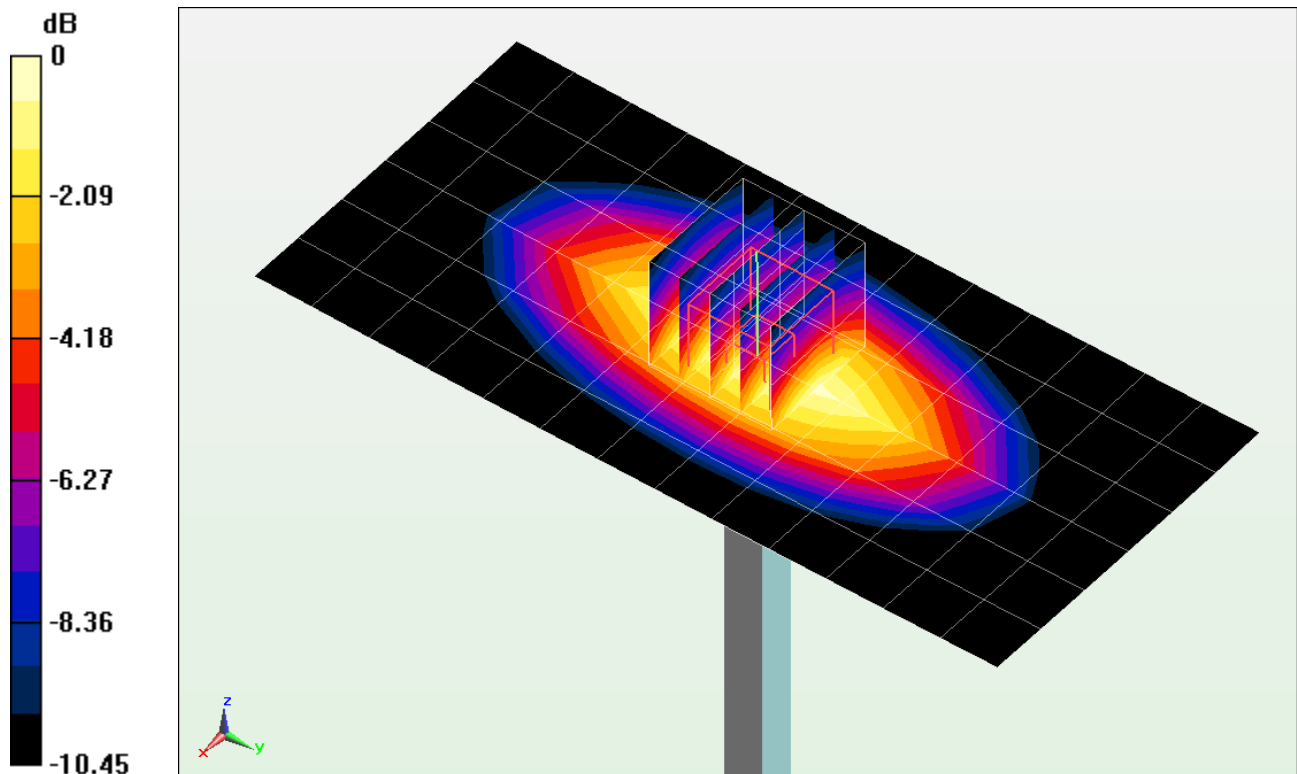

0 dB = 1.06 W/kg = 0.25 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.571 \text{ S/m}$ ;  $\epsilon_r = 54.353$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-14-2013; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.27 W/kg

**SAR(1 g) = 4.04 W/kg**

Deviation = -0.98%

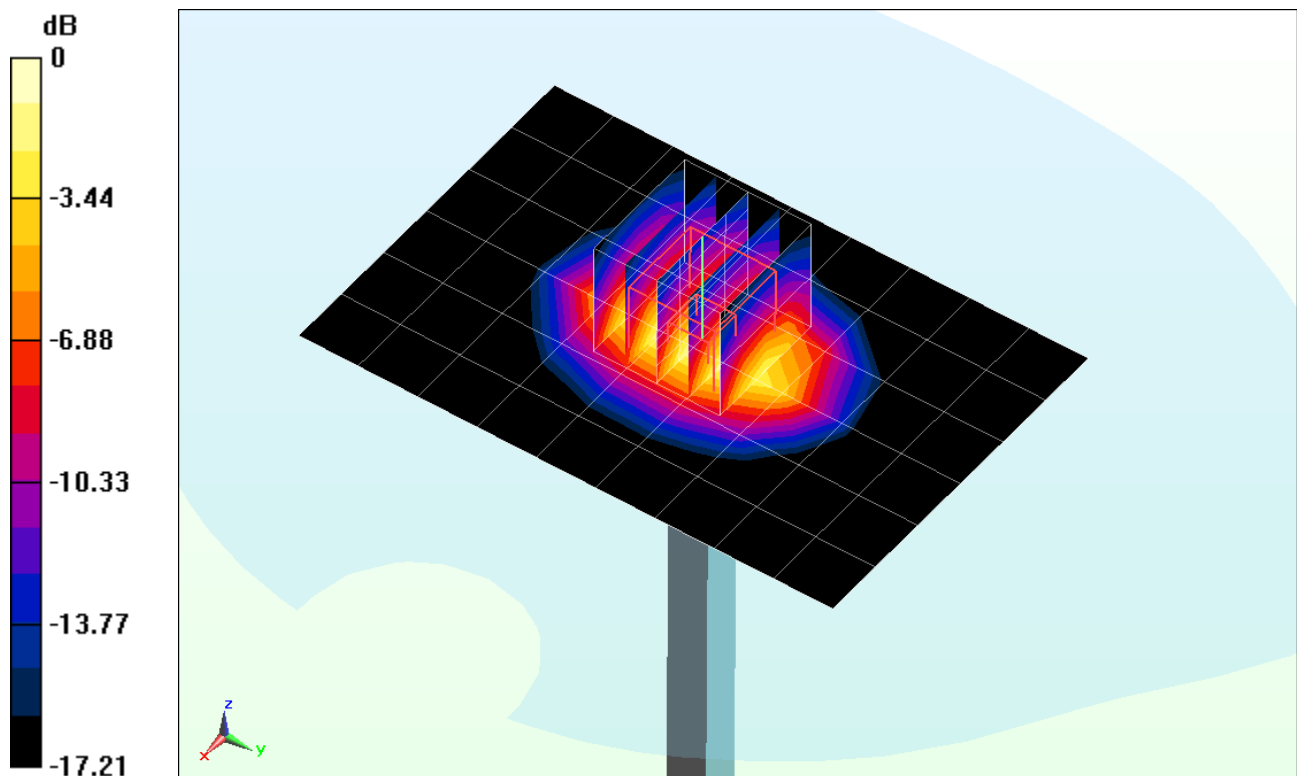

0 dB = 4.56 W/kg = 6.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.584 \text{ S/m}$ ;  $\epsilon_r = 51.454$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-19-2013; Ambient Temp: 23.7°C; Tissue Temp: 23.6°C

Probe: ES3DV3 - SN3209; ConvF(4.77, 4.77, 4.77); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.98 W/kg

**SAR(1 g) = 4.35 W/kg**

Deviation = 6.62%

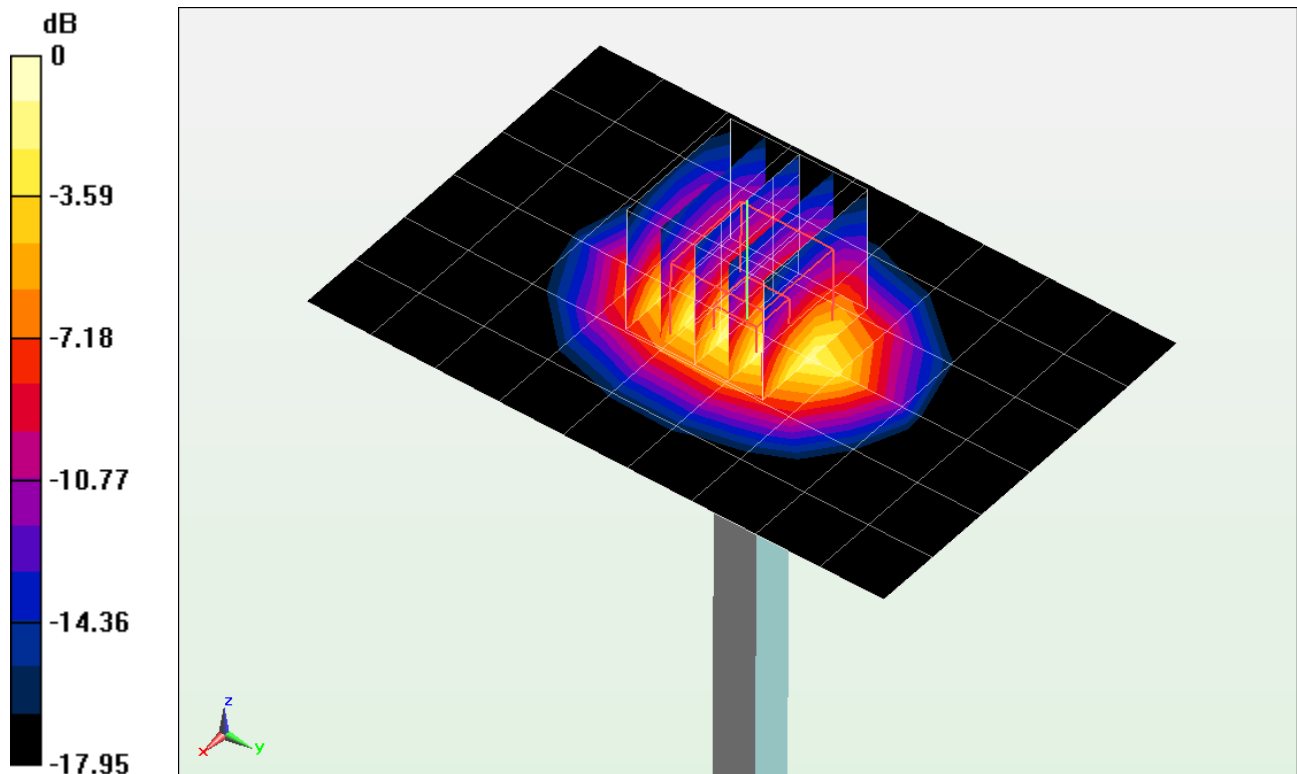

0 dB = 4.86 W/kg = 6.87 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 882**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.991 \text{ S/m}$ ;  $\epsilon_r = 53.36$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-11-2013; Ambient Temp: 24.1°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3263; ConvF(4.33, 4.33, 4.33); Calibrated: 5/16/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/13/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 2450MHz System Verification

**Area Scan (6x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 11.0 W/kg

**SAR(1 g) = 4.97 W/kg**

Deviation = -0.40%

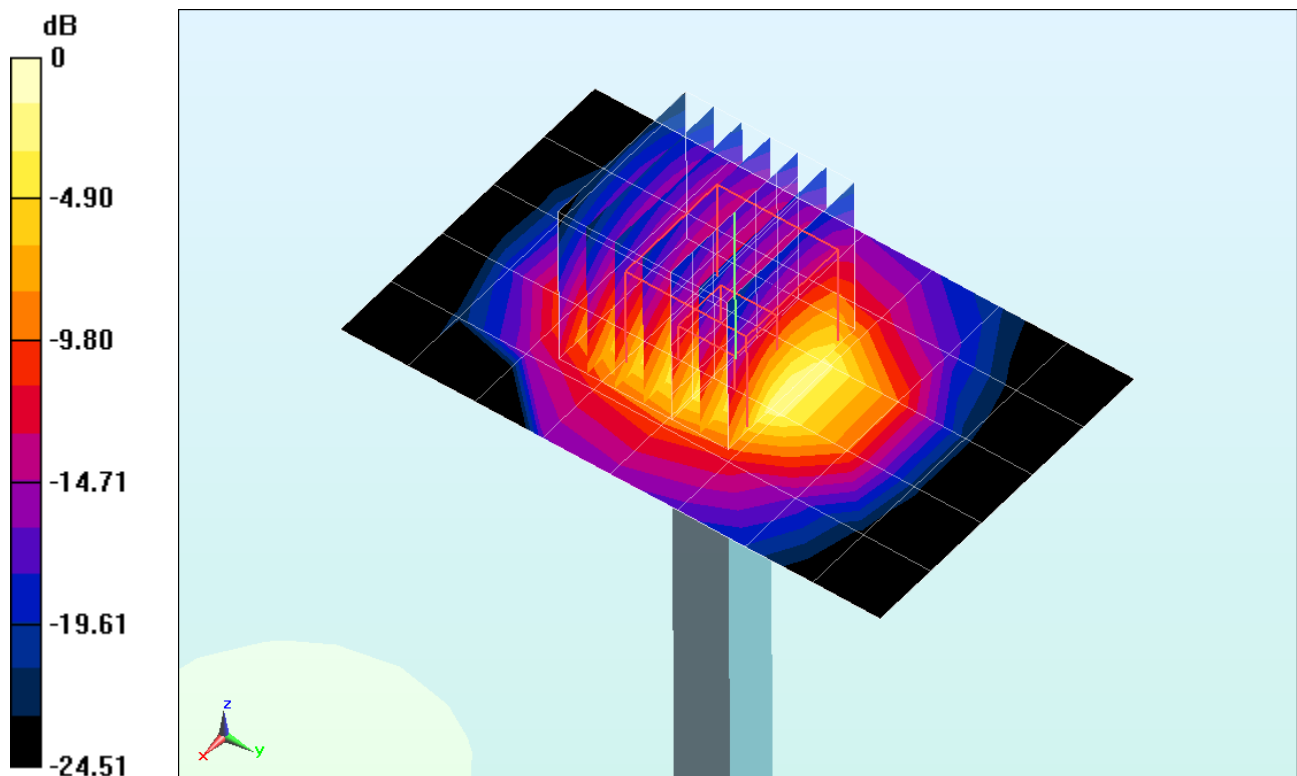

0 dB = 6.52 W/kg = 8.14 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.003 \text{ S/m}$ ;  $\epsilon_r = 52.362$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2013; Ambient Temp: 24.1°C; Tissue Temp: 23.7°C

Probe: ES3DV2 - SN3022; ConvF(4.01, 4.01, 4.01); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 5.15 W/kg**

Deviation = 3.83%

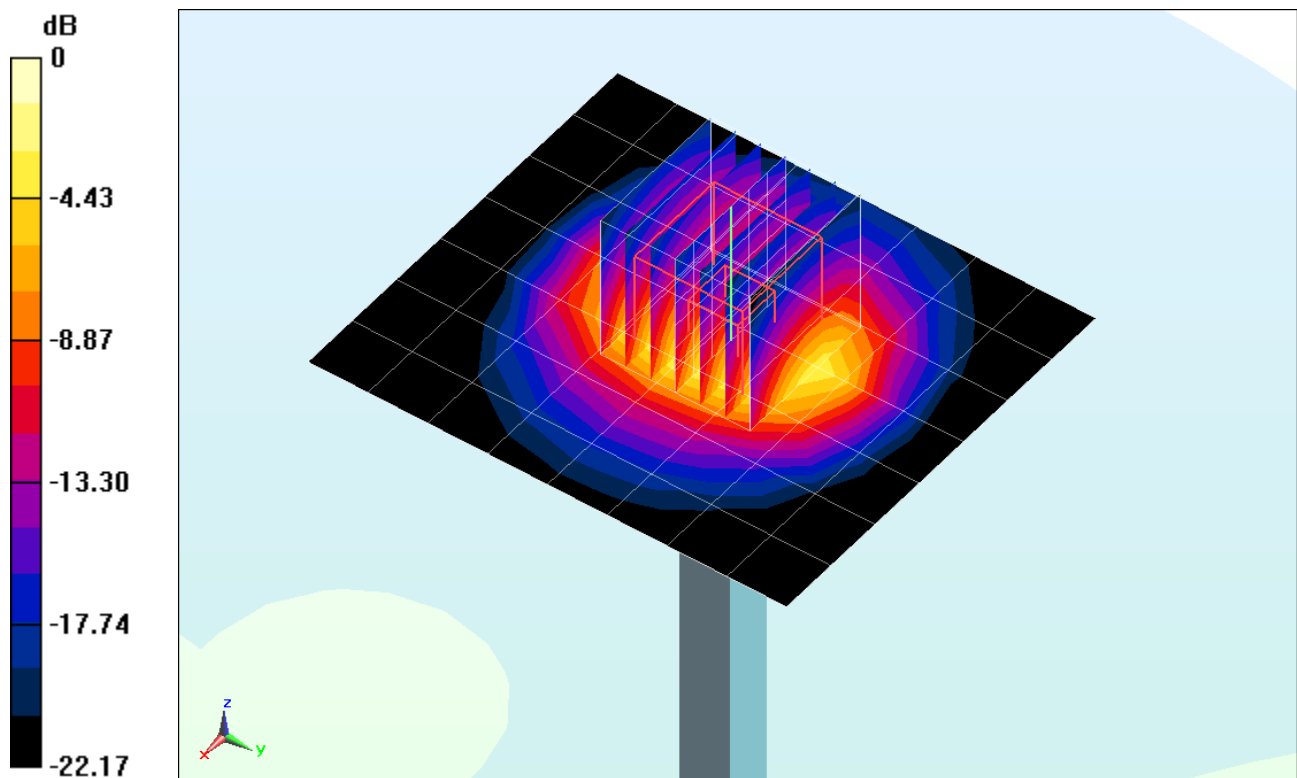

0 dB = 6.45 W/kg = 8.10 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.22 \text{ S/m}$ ;  $\epsilon_r = 51.836$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2013; Ambient Temp: 23.9°C; Tissue Temp: 23.6°C

Probe: ES3DV2 - SN3022; ConvF(3.85, 3.85, 3.85); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 13.9 W/kg

**SAR(1 g) = 6.1 W/kg**

Deviation = 6.09%

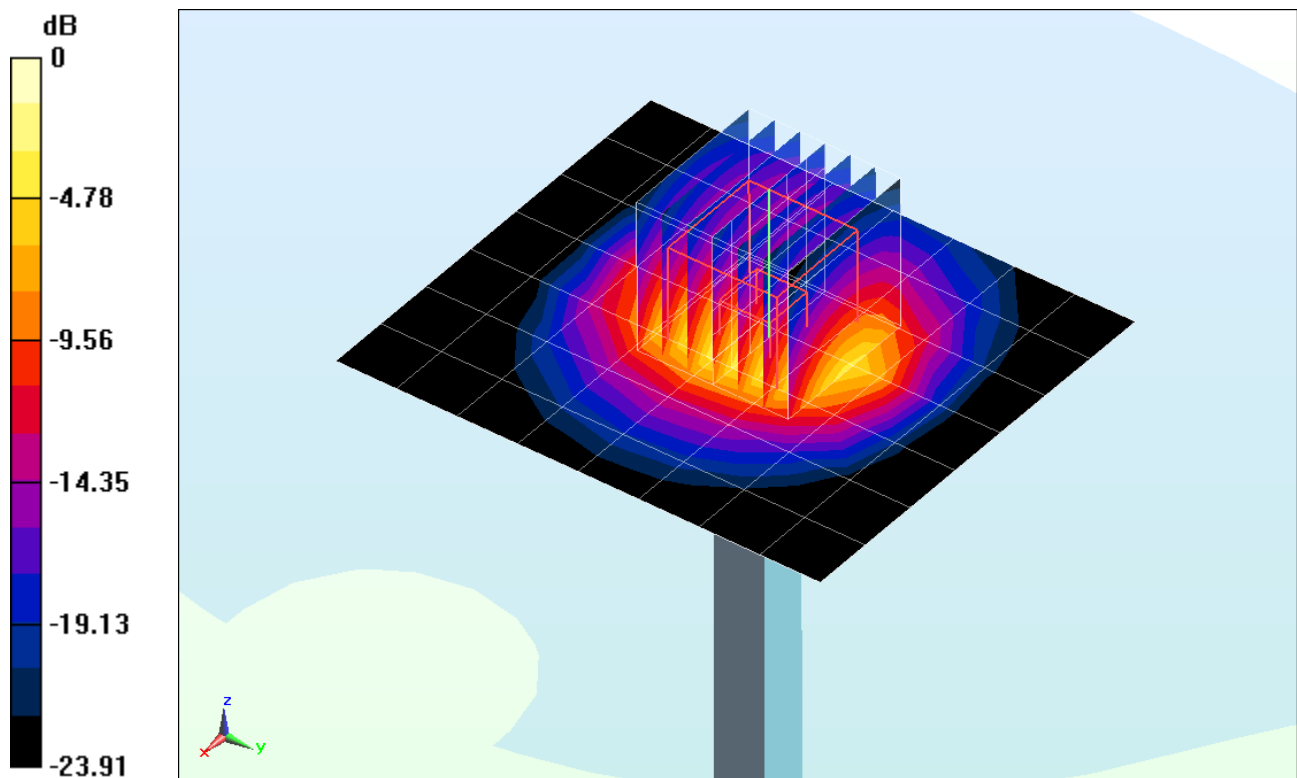

0 dB = 8.02 W/kg = 9.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5200 \text{ MHz}$ ;  $\sigma = 5.468 \text{ S/m}$ ;  $\epsilon_r = 46.966$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.99, 3.99, 3.99); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5200MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 29.7 W/kg

**SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.1 W/kg**

Deviation (1 g) = -0.66%

Deviation (10 g) = -0.47%

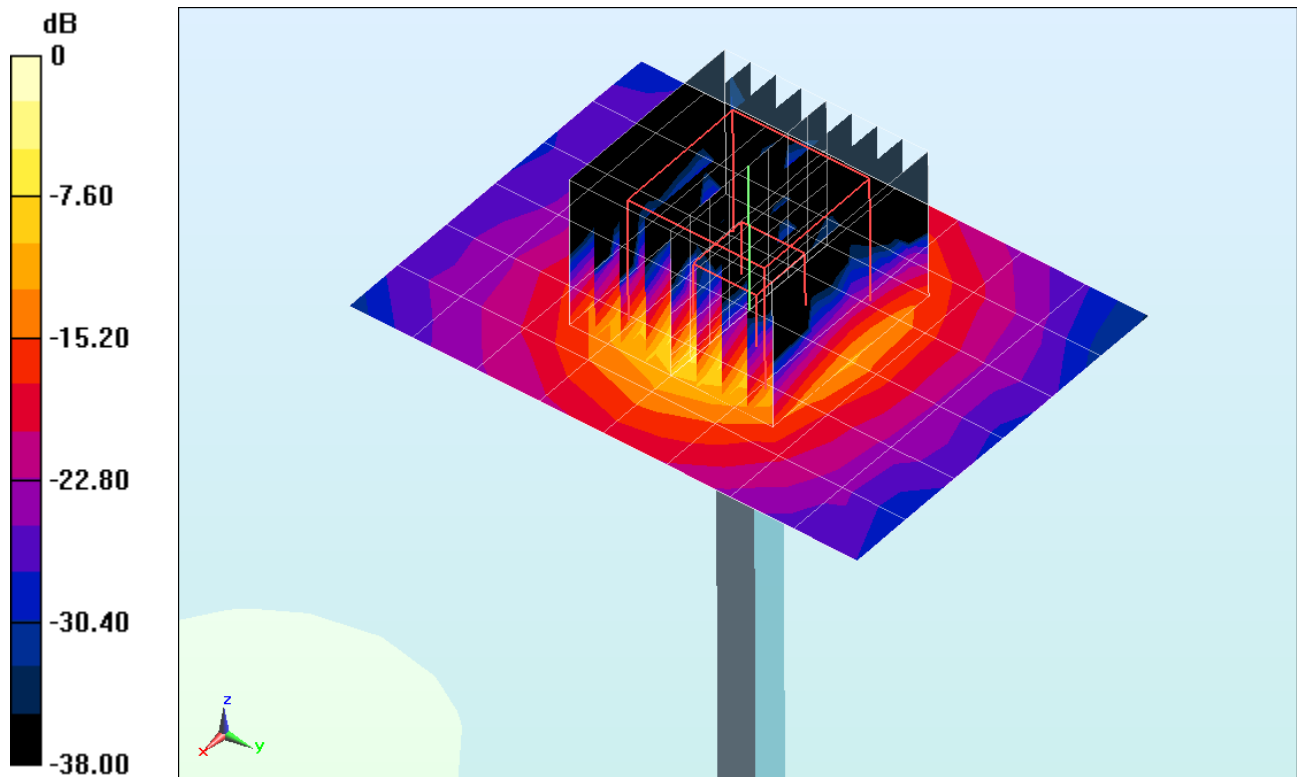

0 dB = 18.7 W/kg = 12.72 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 5.598 \text{ S/m}$ ;  $\epsilon_r = 46.773$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5300MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.2 W/kg

**SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.21 W/kg**

Deviation (1 g) = 5.58%

Deviation (10 g) = 4.74%

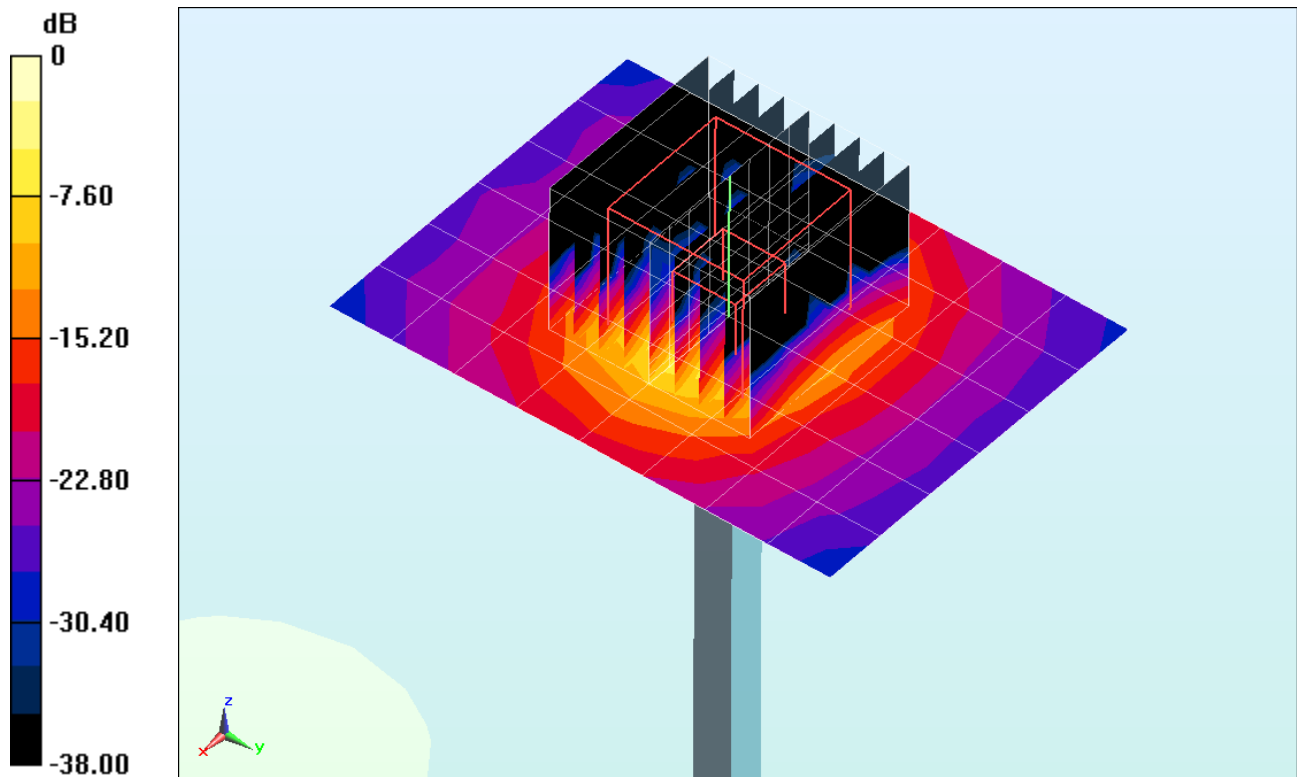

0 dB = 19.8 W/kg = 12.97 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.866 \text{ S/m}$ ;  $\epsilon_r = 46.391$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.52, 3.52, 3.52); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5500MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.6 W/kg

**SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.21 W/kg**

Deviation (1 g) = -1.49%

Deviation (10 g) = -1.34%

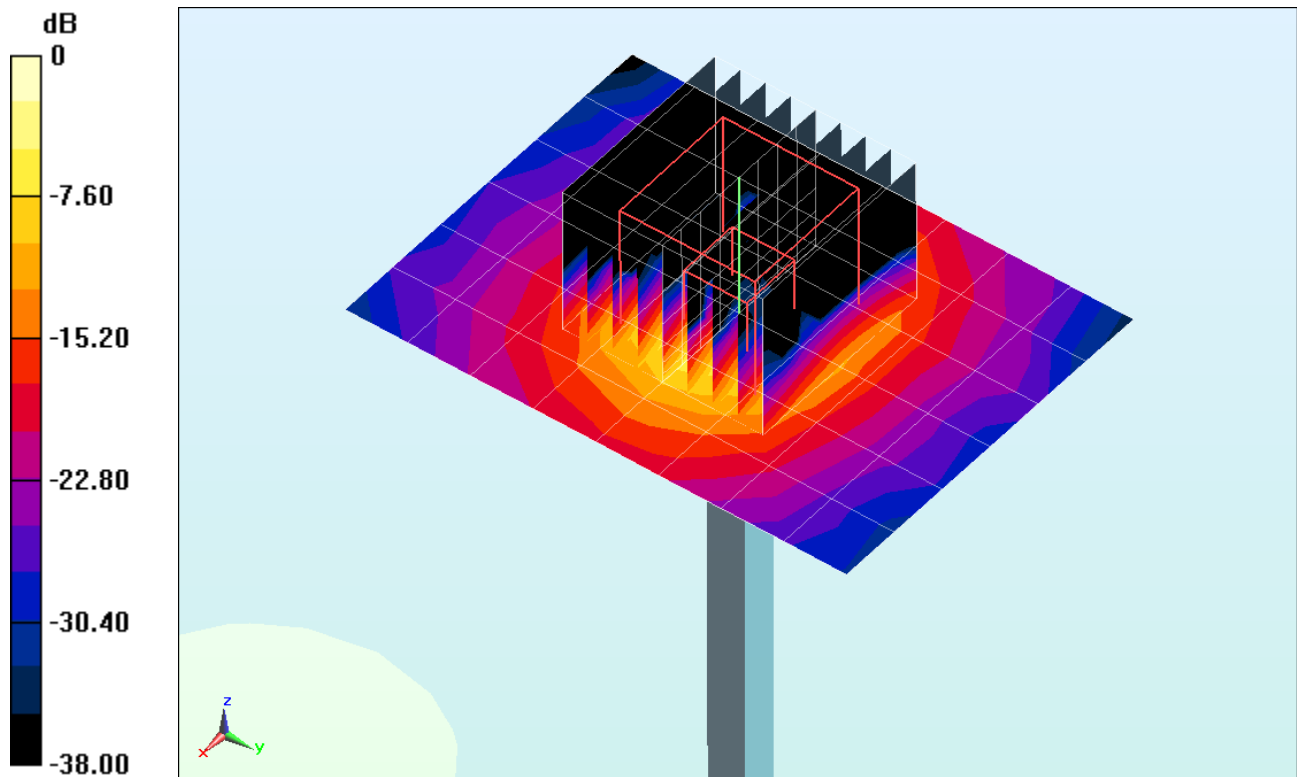

0 dB = 20.1 W/kg = 13.03 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 6.007 \text{ S/m}$ ;  $\epsilon_r = 46.227$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5600MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.9 W/kg

**SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.3 W/kg**

Deviation (1 g) = 3.61%

Deviation (10 g) = 3.14%

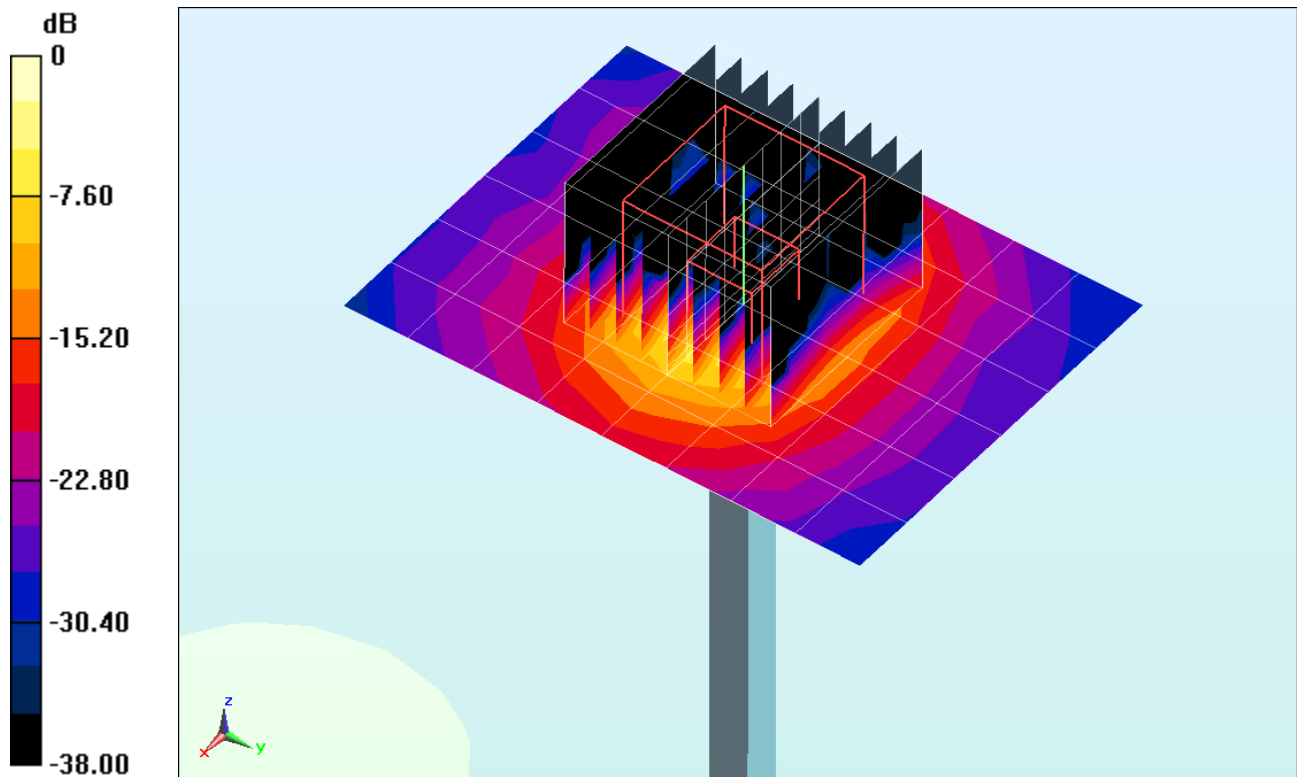

0 dB = 21.2 W/kg = 13.26 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 6.281 \text{ S/m}$ ;  $\epsilon_r = 45.926$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2013; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5800MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 31.7 W/kg

**SAR(1 g) = 7.48 W/kg**

Deviation = -0.40%

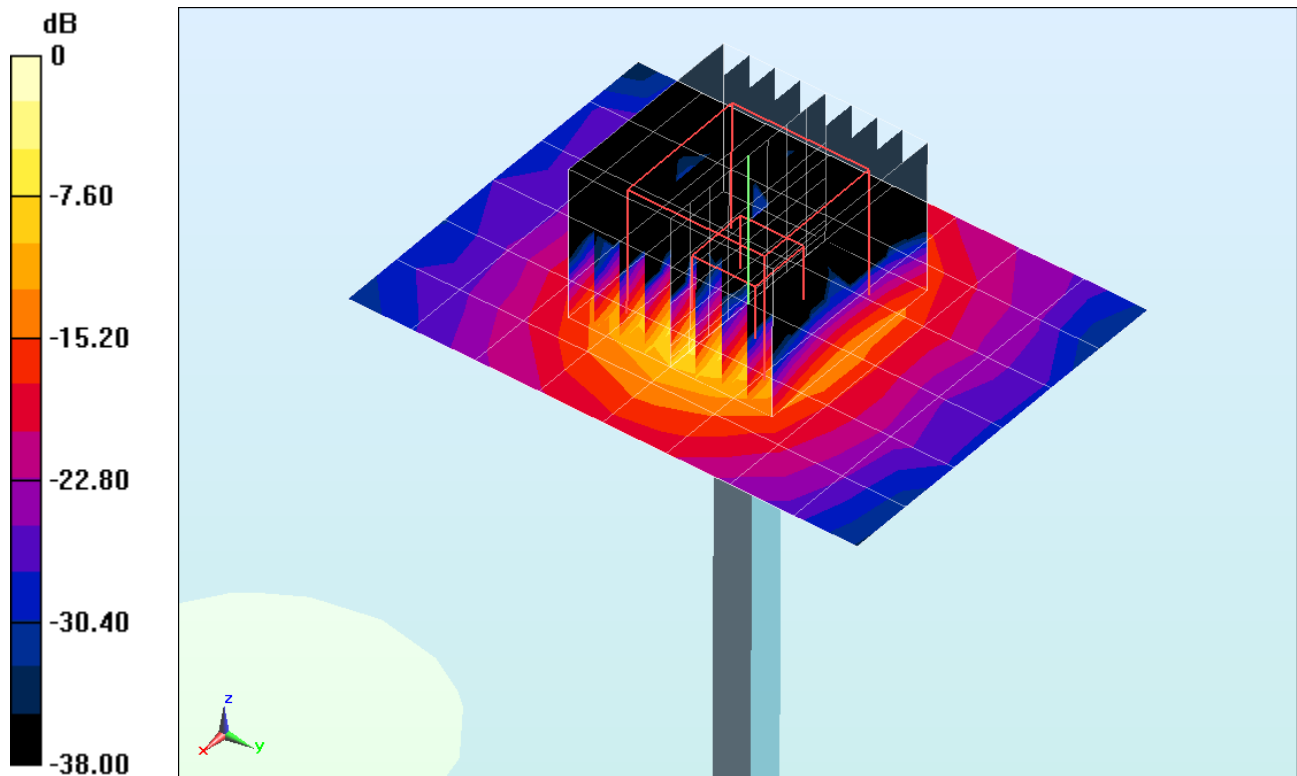

0 dB = 19.6 W/kg = 12.92 dBW/kg

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d119\_Apr13**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d119**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **April 25, 2013**

✓  
KOK  
5/8/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 909	11-Sep-12 (No. DAE4-909_Sep12)	Sep-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Claudio Leubler** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Issued: April 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.51 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.68 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.30 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.0 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.54 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.31 W/kg $\pm$ 16.5 % (k=2)

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.1 $\Omega$ - 4.7 j $\Omega$
Return Loss	- 26.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.8 $\Omega$ - 6.3 j $\Omega$
Return Loss	- 22.1 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.385 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 29, 2010

## DASY5 Validation Report for Head TSL

Date: 25.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 40.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.05, 6.05, 6.05); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.387 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.86 W/kg

**SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 2.93 W/kg

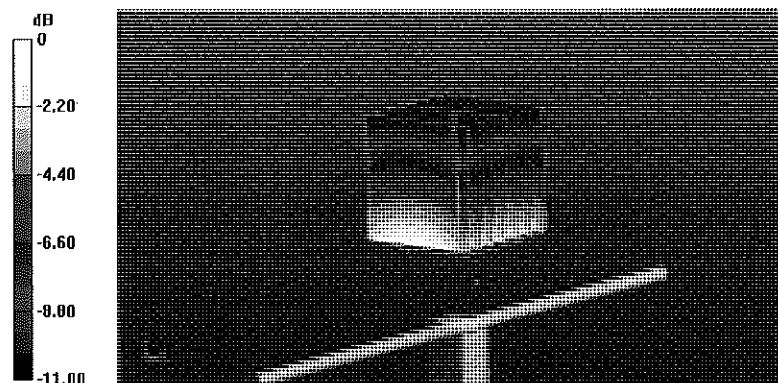


0 dB = 2.93 W/kg = 4.67 dBW/kg

## Impedance Measurement Plot for Head TSL

25 Apr 2013 09:11:06  
CH1 S11 1 U FS 1: 50.061  $\Omega$  -4.6621  $\Omega$  40.884 pF 835.000 000 MHz

\*  
Del  
CA

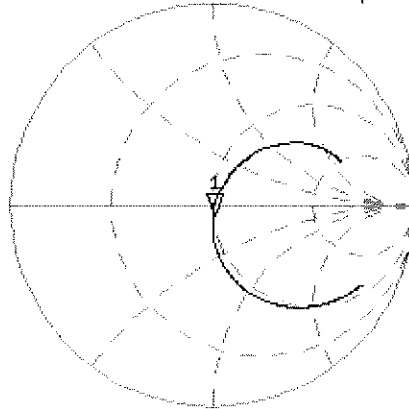


Avs  
16  
H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1:-26.641 dB 835.000 000 MHz

CA

Avs  
16

H1 d

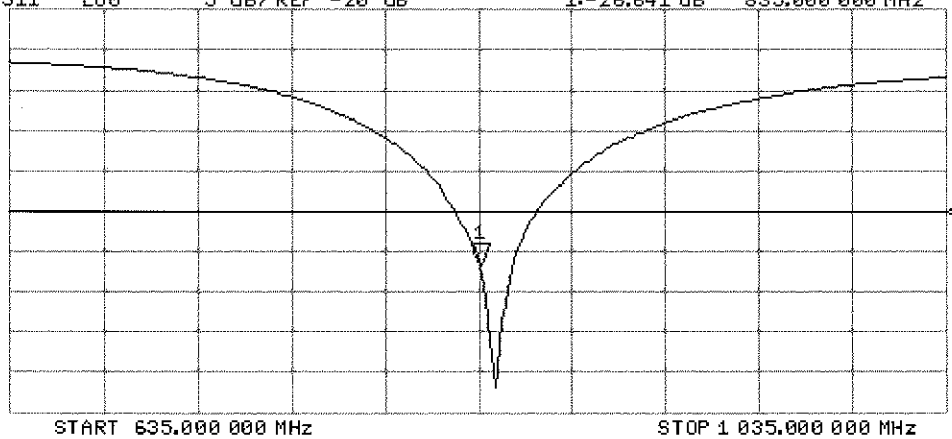

## DASY5 Validation Report for Body TSL

Date: 24.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 1.01 \text{ S/m}$ ;  $\epsilon_r = 54$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.178 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.68 W/kg


**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 2.89 W/kg

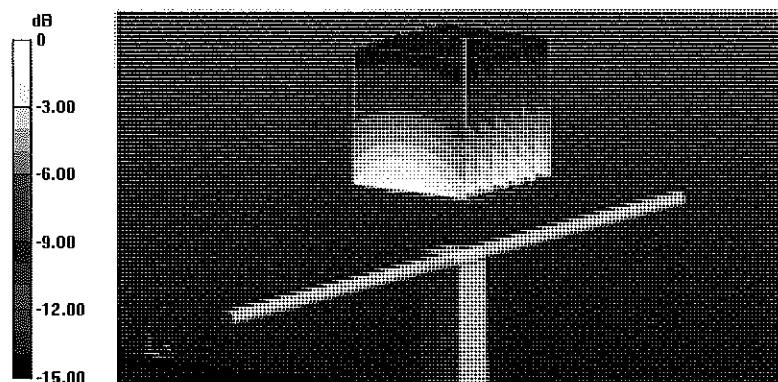

0 dB = 2.89 W/kg = 4.61 dBW/kg

Impedance Measurement Plot for Body TSL

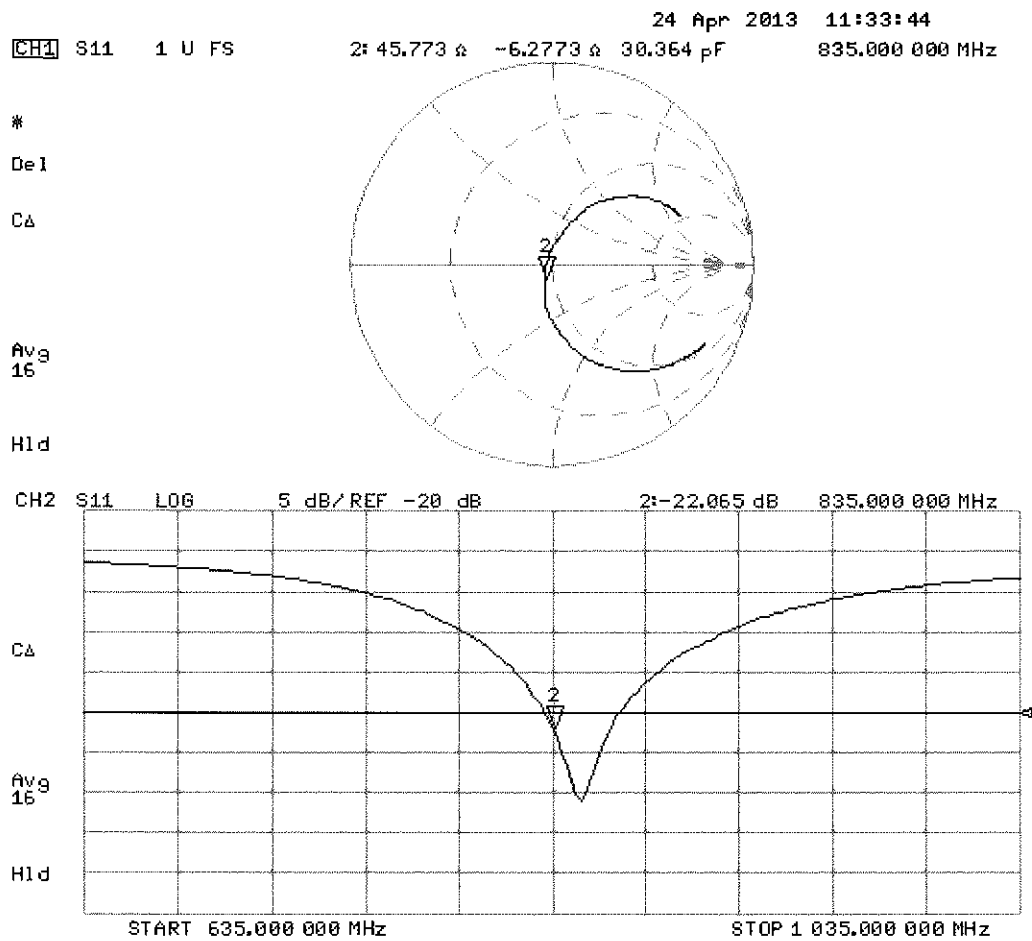



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1900V2-5d148\_Feb13**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d148**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **February 06, 2013**

✓  
KOK  
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Leif Klysner**      Name: **Leif Klysner**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Technical Manager

Signature

Issued: February 6, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.4 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.87 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.9 $\pm$ 6 %	1.53 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.7 W/kg $\pm$ 16.5 % (k=2)

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.1 $\Omega$ + 5.9 j $\Omega$
Return Loss	- 24.3 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 $\Omega$ + 6.3 j $\Omega$
Return Loss	- 23.6 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

## DASY5 Validation Report for Head TSL

Date: 06.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.98, 4.98, 4.98); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.534 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.18 W/kg**

Maximum value of SAR (measured) = 12.1 W/kg

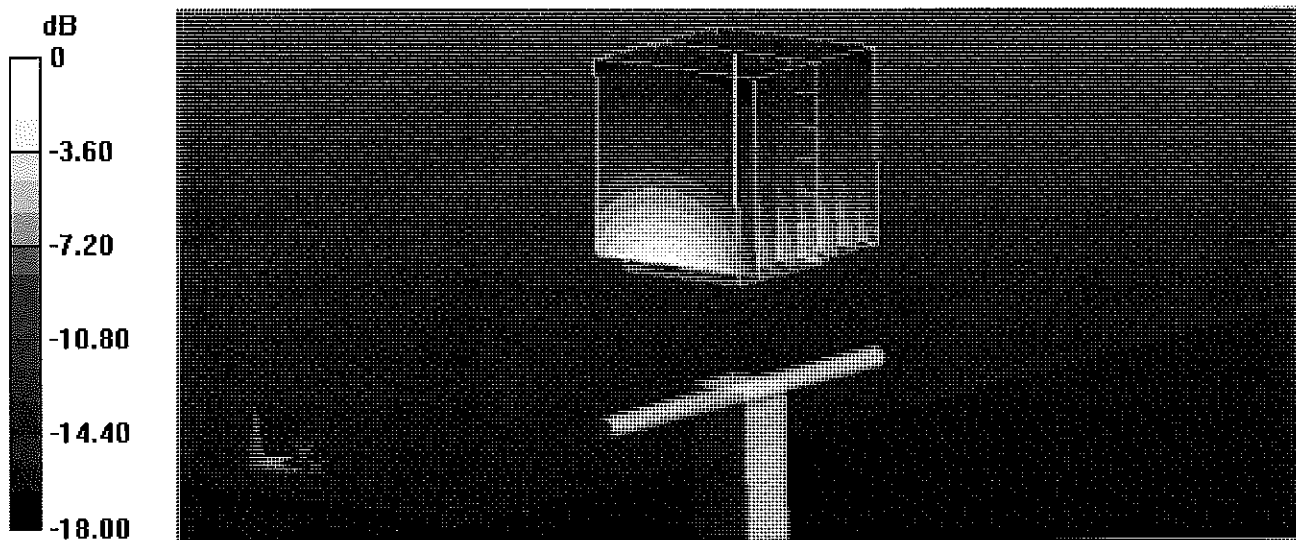


0 dB = 12.1 W/kg = 10.83 dBW/kg

# Impedance Measurement Plot for Head TSL


6 Feb 2013 09:25:10  
 CH1 S11 1 U FS 1: 52.125  $\angle$  5.8711  $\angle$  491.80  $\mu$ H 1 900.000 000 MHz

\*  
 Del  
 CA  
 Avg  
 16  
 H1d

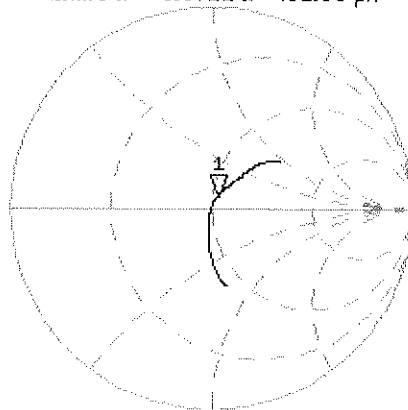

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.287 dB 1 900.000 000 MHz

CA  
 Avg  
 16  
 H1d

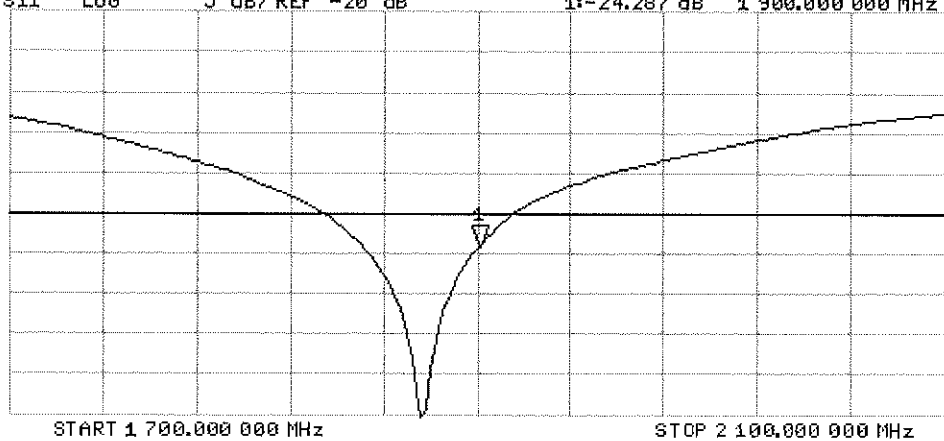

## DASY5 Validation Report for Body TSL

Date: 06.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.53$  S/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.6, 4.6, 4.6); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.534 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.45 W/kg**

Maximum value of SAR (measured) = 13.1 W/kg

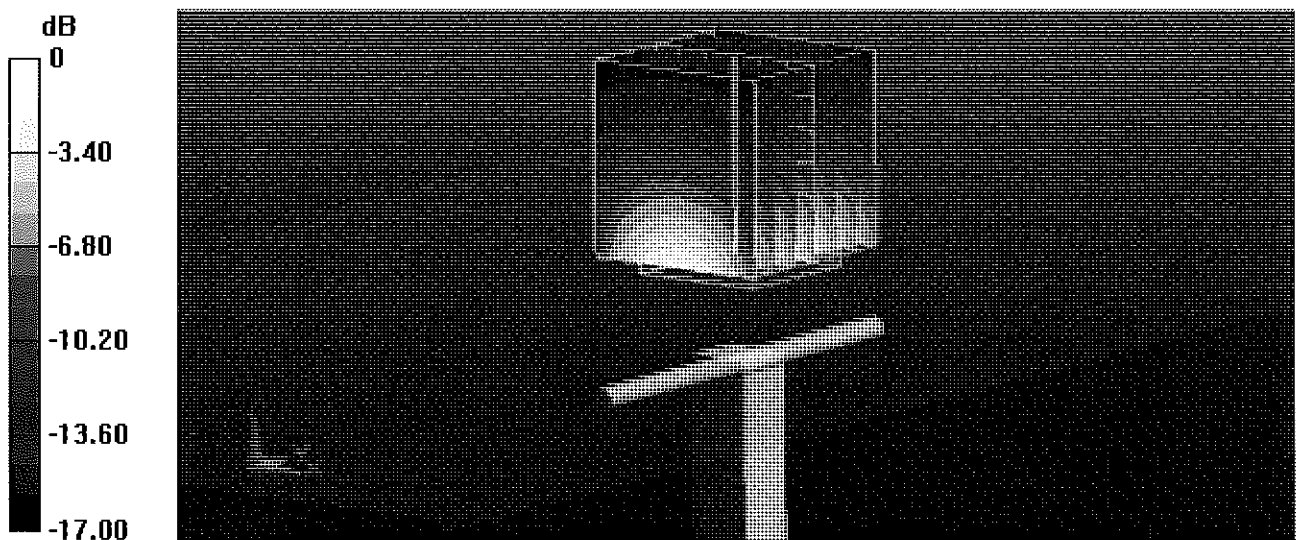


0 dB = 13.1 W/kg = 11.17 dBW/kg

Impedance Measurement Plot for Body TSL

6 Feb 2013 09:24:17  
CH1 S11 1 U FS 1: 48.344  $\Omega$  6.2715  $\Omega$  525.34  $\mu$ H 1 900.000 000 MHz


\*  
De1  
CA

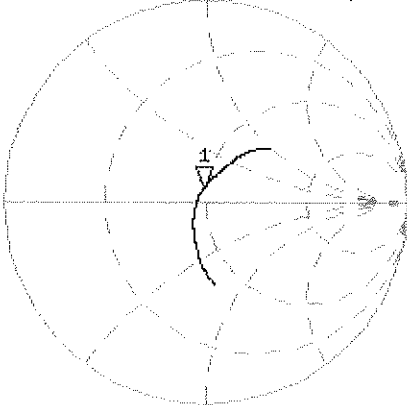

Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.628 dB 1 900.000 000 MHz

CA  
Avg  
16  
H1d

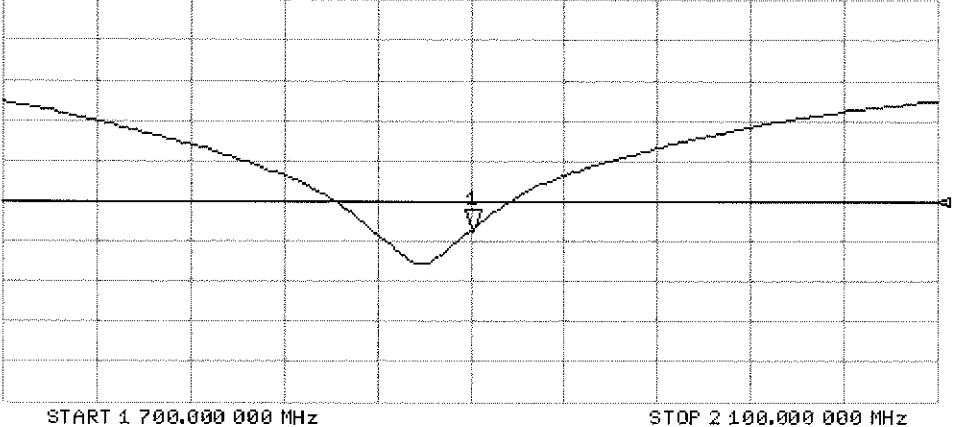



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D2450V2-797\_Jan13**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 797**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 08, 2013**

✓  
KOK  
1/28/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 8, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.5 $\pm$ 6 %	2.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.88 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.2 W/kg $\pm$ 16.5 % (k=2)

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.3 \Omega + 3.1 j\Omega$
Return Loss	- 27.1 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.1 \Omega + 4.9 j\Omega$
Return Loss	- 26.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 24, 2006

## DASY5 Validation Report for Head TSL

Date: 08.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 37.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

### Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 99.154 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.8 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.2 W/kg**

Maximum value of SAR (measured) = 17.0 W/kg

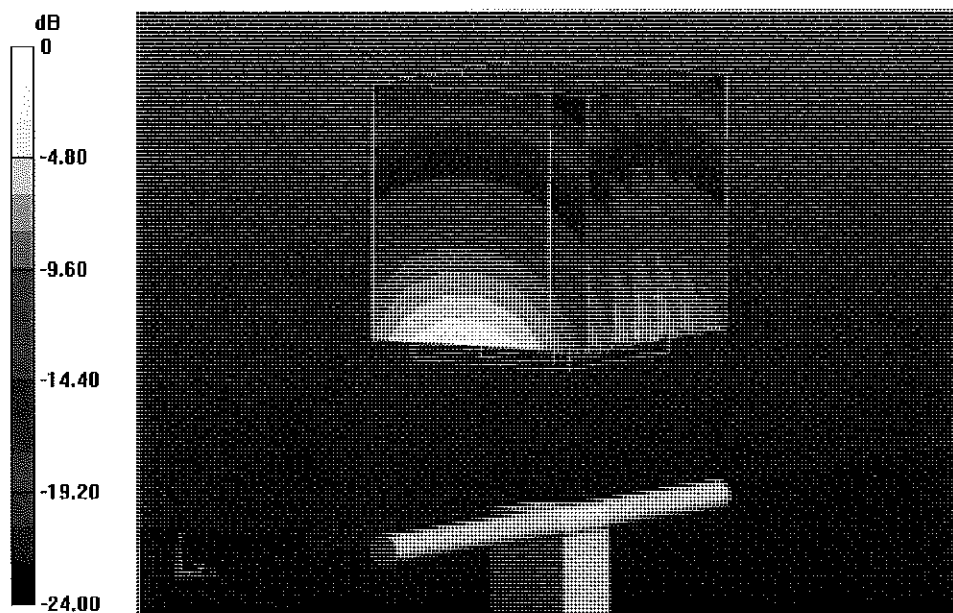


0 dB = 17.0 W/kg = 12.30 dBW/kg

Impedance Measurement Plot for Head TSL


8 Jan 2013 12:37:14  
CH1 S11 1 U FS 1: 53.346  $\angle$  3.0762  $\angle$  199.83 pH 2 450.000 000 MHz

\*  
De1  
Cor  
Avg  
16  
H1d

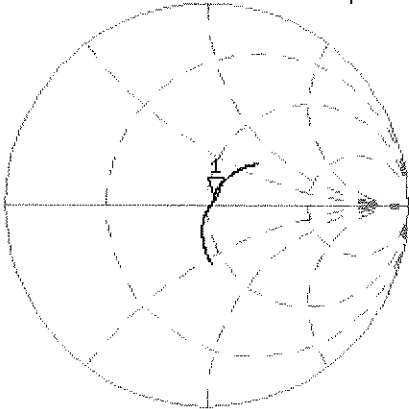

CH2 S11 LOG 5 dB/REF -20 dB 1: -27.136 dB 2 450.000 000 MHz

Cor  
Avg  
16  
H1d

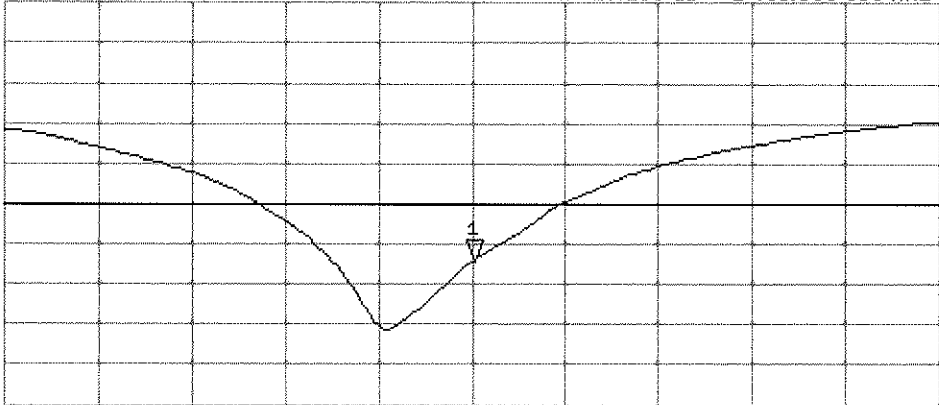

START 2 250.000 000 MHz STOP 2 650.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 08.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.01$  S/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.935 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.7 W/kg


**SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.88 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

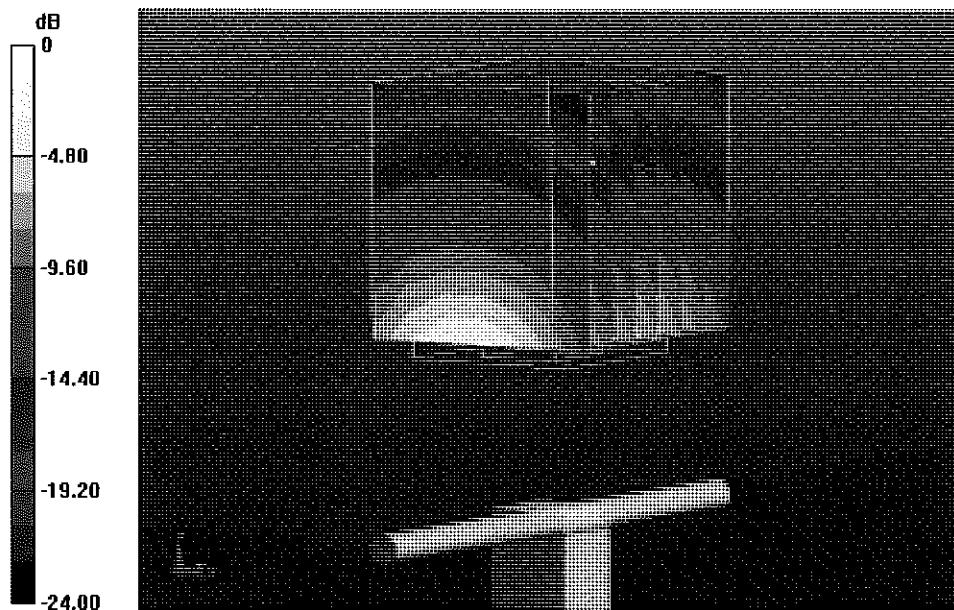

0 dB = 16.7 W/kg = 12.23 dBW/kg

Impedance Measurement Plot for Body TSL

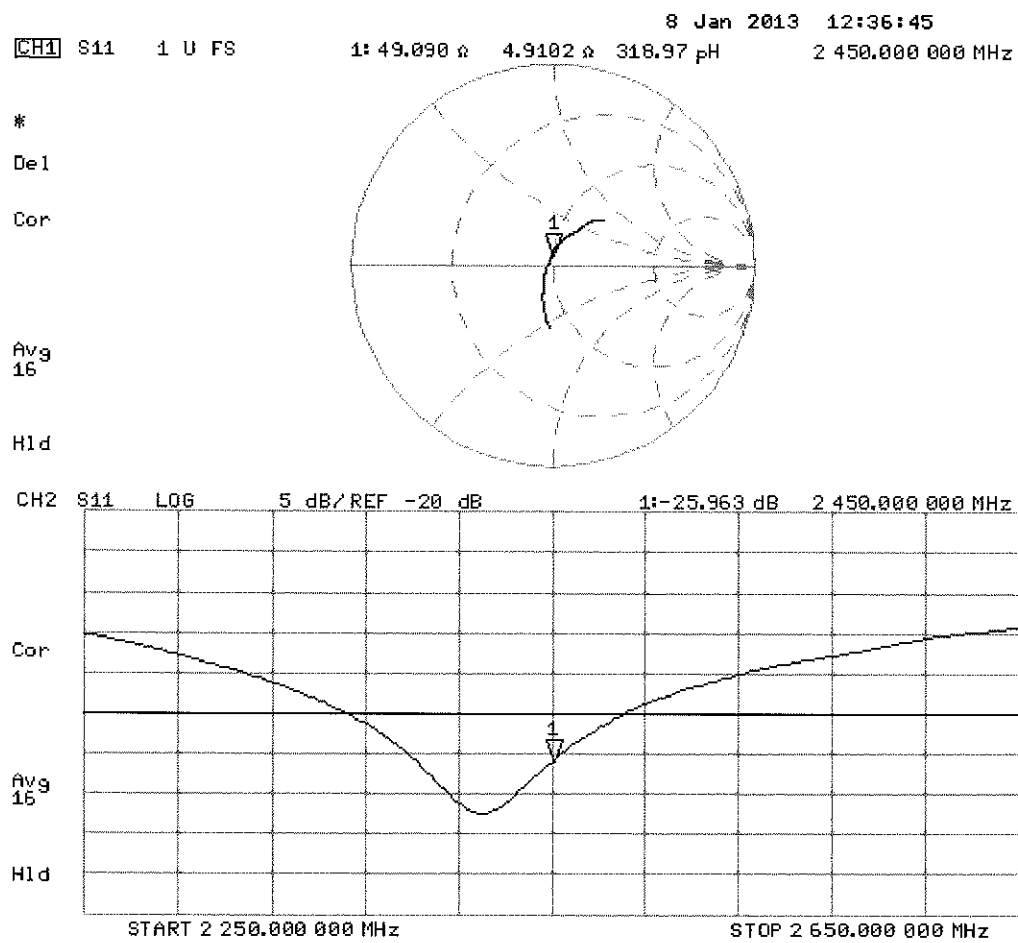



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2600V2-1004\_May13**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1004**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **May 02, 2013**

✓  
100k  
5/8/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
DAE4	SN: 909	11-Sep-12 (No. DAE4-909_Sep12)	Sep-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Claudio Leubler**      Name: **Claudio Leubler**      Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Issued: May 2, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.2 $\pm$ 6 %	1.99 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>58.2 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.57 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>26.0 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.8 $\pm$ 6 %	2.20 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	14.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>57.5 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>25.5 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.0 $\Omega$ - 4.3 j $\Omega$
Return Loss	- 27.3 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 $\Omega$ - 2.9 j $\Omega$
Return Loss	- 26.8 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

## DASY5 Validation Report for Head TSL

Date: 02.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1004**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.99$  S/m;  $\epsilon_r = 37.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.3 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 31.9 W/kg

**SAR(1 g) = 14.8 W/kg; SAR(10 g) = 6.57 W/kg**

Maximum value of SAR (measured) = 19.0 W/kg

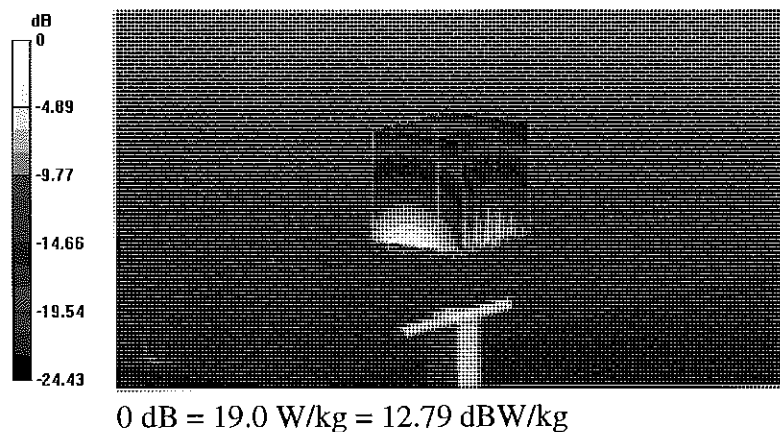

# Impedance Measurement Plot for Head TSL

2 May 2013 10:13:16  
 [CH1] S11 1 U FS 1: 49.990  $\Omega$  -4.3359  $\Omega$  14.118 pF 2 600.000 000 MHz


#

De1

CA

Avg  
16

H1d

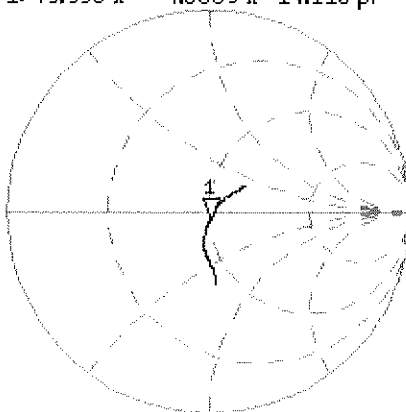


CH2 S11 LOG 5 dB/REF -20 dB 1: -27.259 dB 2 600.000 000 MHz

CA

Avg  
16

H1d

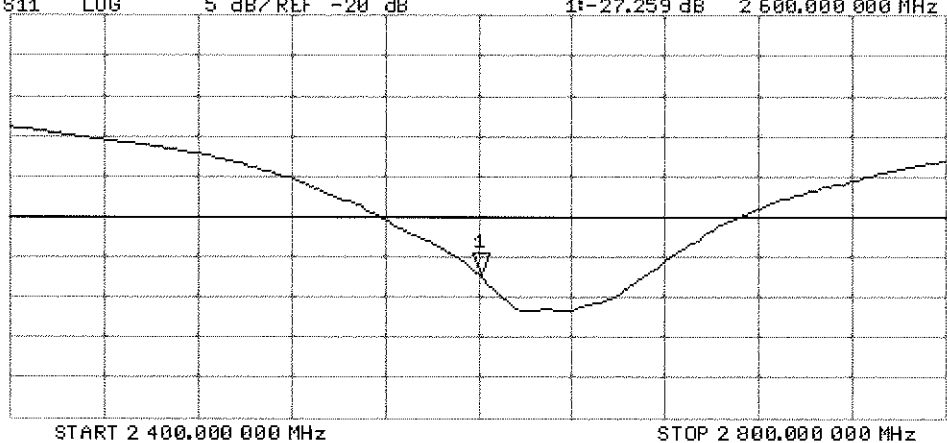

## DASY5 Validation Report for Body TSL

Date: 25.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1004**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.2$  S/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.605 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 32.0 W/kg


**SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.43 W/kg**

Maximum value of SAR (measured) = 19.4 W/kg

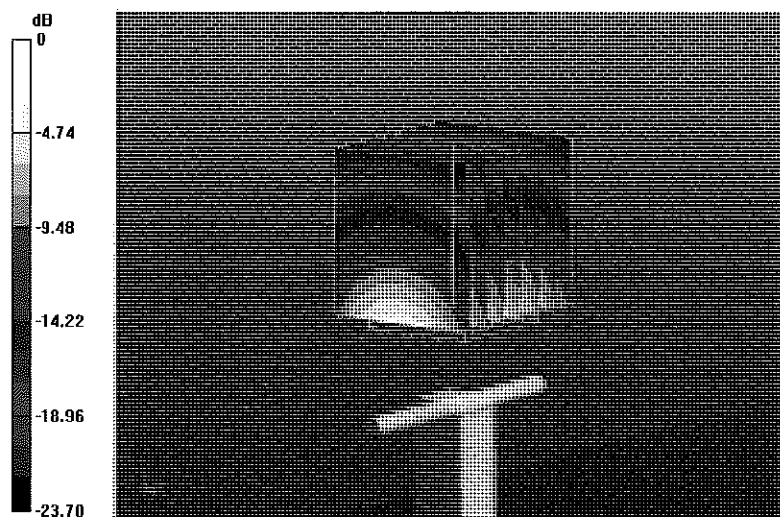

0 dB = 19.4 W/kg = 12.88 dBW/kg

Impedance Measurement Plot for Body TSL

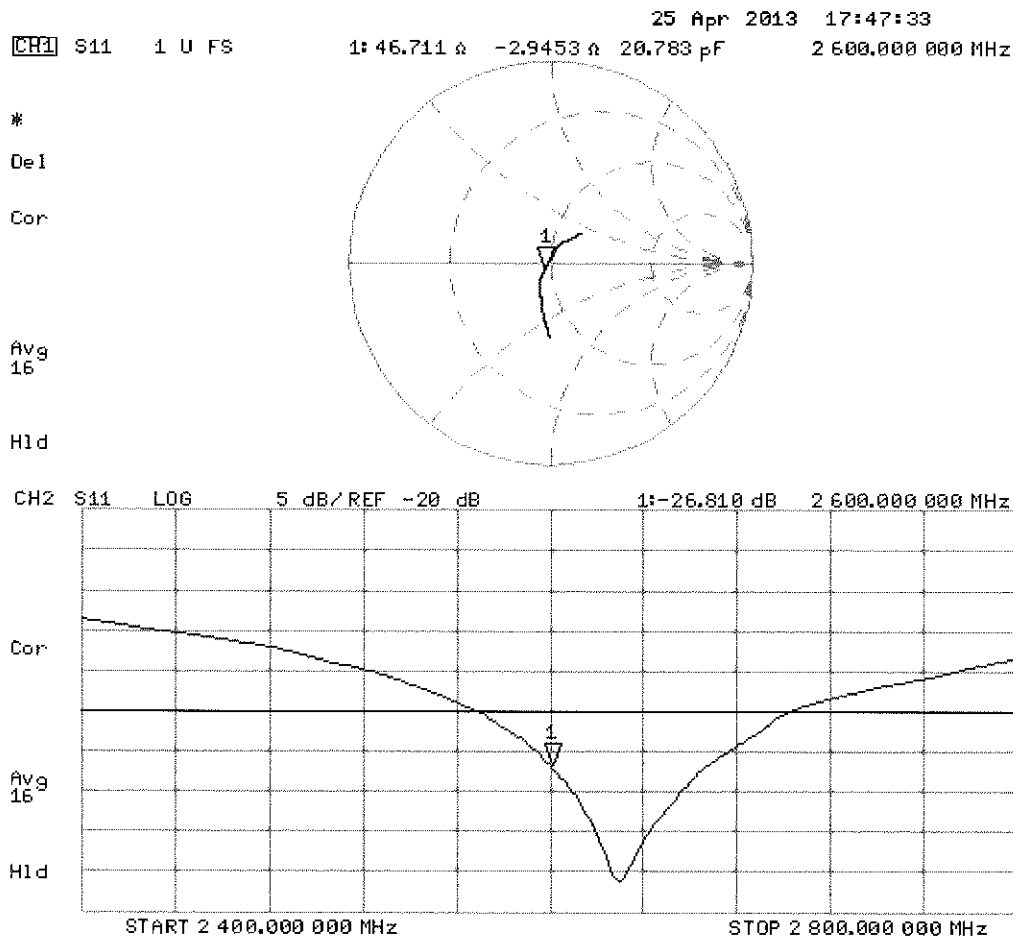



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1120\_Feb13**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1120**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **February 14, 2013**

✓  
Kok  
2/2/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

*Israe El-Naouq*  
*Katja Pokovic*

Issued: February 14, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- c) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.5
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
<b>Frequency</b>	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	36.0	4.66 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	34.7 $\pm$ 6 %	4.47 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5200 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	7.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>76.0 W/kg <math>\pm</math> 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>21.5 W/kg <math>\pm</math> 19.5 % (k=2)</b>

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.57 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5300 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	7.94 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>78.7 W / kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.4 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.74 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5500 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	8.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>80.1 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.6 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.1 ± 6 %	4.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5600 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	8.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>79.9 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>22.5 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.9 ± 6 %	5.05 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5800 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>74.9 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>21.0 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.36 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5200 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	7.73 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>76.6 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>21.5 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.7 ± 6 %	5.48 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5300 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>76.8 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>21.5 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.71 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5500 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	8.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>79.8 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>22.1 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	5.83 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5600 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	8.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>80.7 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>22.3 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	45.9 ± 6 %	6.12 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5800 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	7.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>75.5 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>20.9 W/kg ± 19.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	$53.8 \Omega - 6.3 j\Omega$
Return Loss	- 23.0 dB

### Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	$50.1 \Omega + 0.5 j\Omega$
Return Loss	- 45.3 dB

### Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	$51.0 \Omega - 0.9 j\Omega$
Return Loss	- 37.9 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	$55.3 \Omega - 0.9 j\Omega$
Return Loss	- 25.8 dB

### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	$53.5 \Omega + 3.3 j\Omega$
Return Loss	- 26.7 dB

### Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	$53.7 \Omega - 4.8 j\Omega$
Return Loss	- 24.8 dB

### Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	$50.2 \Omega + 2.4 j\Omega$
Return Loss	- 32.5 dB

### Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	$51.6 \Omega - 1.5 j\Omega$
Return Loss	- 33.3 dB

### Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	$57.4 \Omega + 0.9 j\Omega$
Return Loss	- 23.2 dB



## Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	$53.5 \Omega + 3.2 j\Omega$
Return Loss	- 26.7 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.206 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 08, 2011

## DASY5 Validation Report for Head TSL

Date: 08.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1120**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.47$  S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.57$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.74$  S/m;  $\epsilon_r = 34.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.83$  S/m;  $\epsilon_r = 34.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.05$  S/m;  $\epsilon_r = 33.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.561 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 28.8 W/kg

**SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.18 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.429 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.998 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.540 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 33.3 W/kg

**SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.28 W/kg**

Maximum value of SAR (measured) = 19.5 W/kg


**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.600 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 32.9 W/kg


**SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.13 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

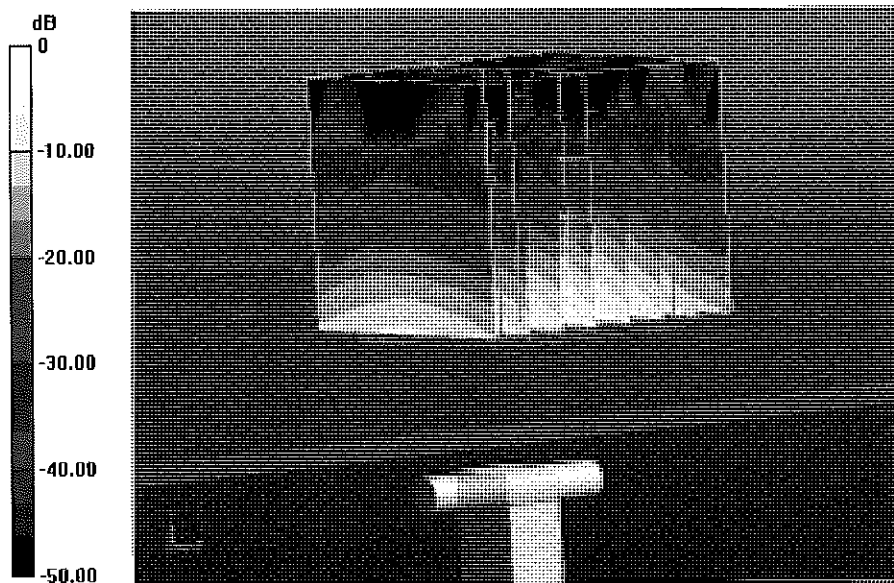

0 dB = 18.8 W/kg = 12.74 dBW/kg

Impedance Measurement Plot for Head TSL

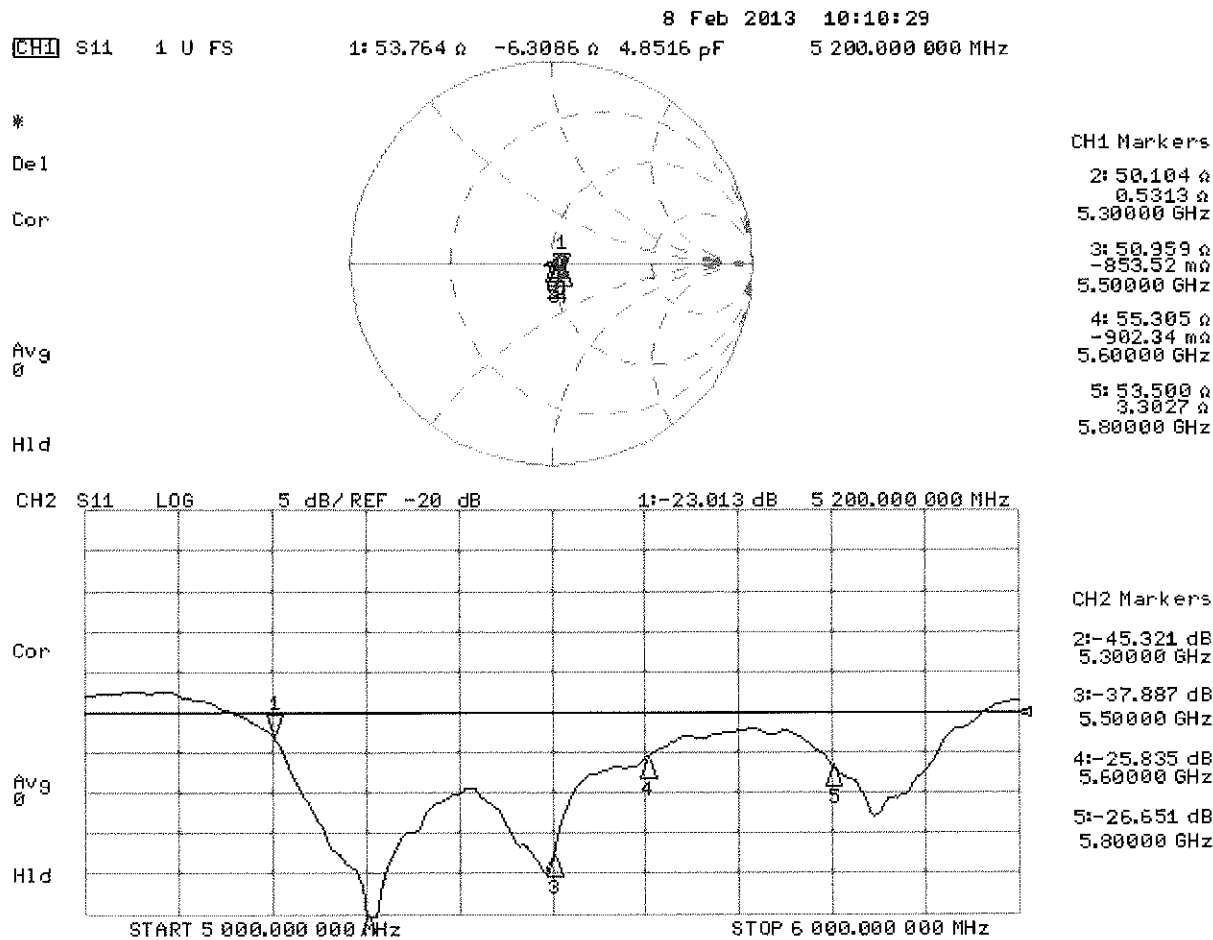

## DASY5 Validation Report for Body TSL

Date: 14.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1120**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.36$  S/m;  $\epsilon_r = 46.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.48$  S/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.71$  S/m;  $\epsilon_r = 46.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.83$  S/m;  $\epsilon_r = 46.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.12$  S/m;  $\epsilon_r = 45.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.053 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 31.1 W/kg

**SAR(1 g) = 7.73 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 18.2 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.021 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 32.1 W/kg

**SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.18 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.894 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 35.3 W/kg

**SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.24 W/kg**

Maximum value of SAR (measured) = 19.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.730 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 36.8 W/kg

**SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 19.9 W/kg


**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.663 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 36.4 W/kg

**SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.12 W/kg**

Maximum value of SAR (measured) = 19.0 W/kg

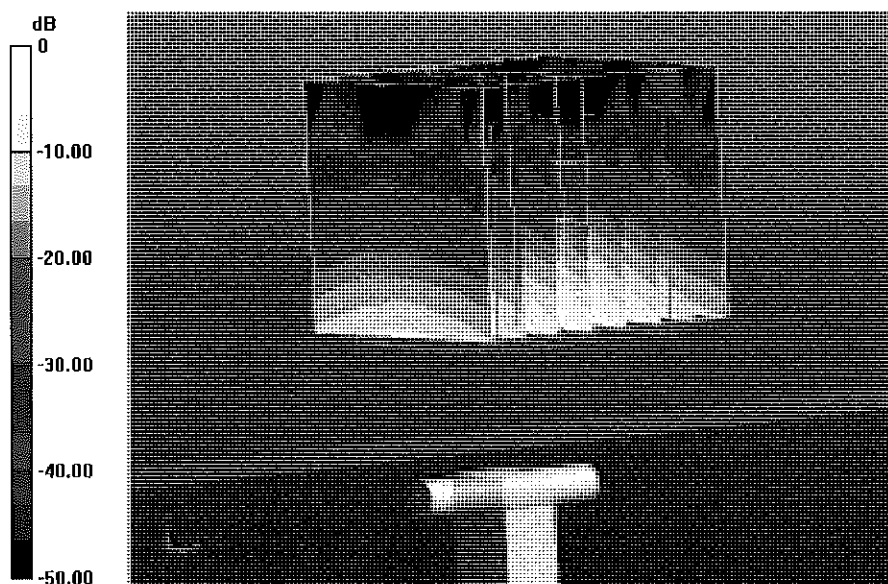


0 dB = 19.0 W/kg = 12.79 dBW/kg

# Impedance Measurement Plot for Body TSL

14 Feb 2013 15:47:05  
 CH1 S11 1 U FS 1: 53.672  $\Omega$  -4.7539  $\Omega$  6.4382 pF 5 200.000 000 MHz


\*  
 Del  
 Cor  
 Avg  
 16  
 H1d

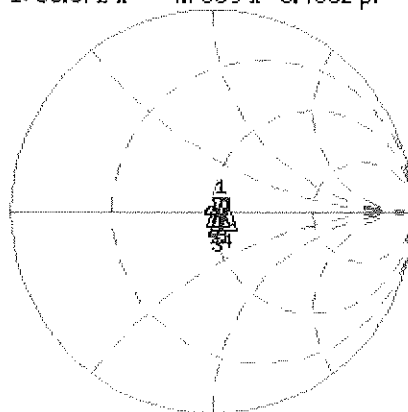

CH1 Markers  
 2: 50.250  $\Omega$   
 2.3555  $\Omega$   
 5.30000 GHz  
 3: 51.629  $\Omega$   
 -1.4824  $\Omega$   
 5.50000 GHz  
 4: 57.389  $\Omega$   
 0.9180  $\Omega$   
 5.60000 GHz  
 5: 53.543  $\Omega$   
 3.2441  $\Omega$   
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.750 dB 5 200.000 000 MHz

Cor  
 Avg  
 16  
 H1d

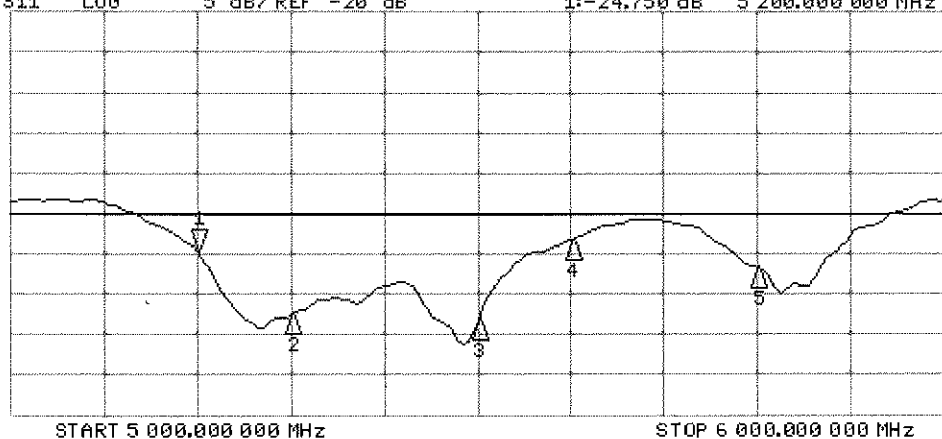

CH2 Markers  
 2: -32.508 dB  
 5.30000 GHz  
 3: -33.267 dB  
 5.50000 GHz  
 4: -23.183 dB  
 5.60000 GHz  
 5: -26.672 dB  
 5.80000 GHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-882\_Feb13**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 882**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **February 11, 2013**

✓  
KOK  
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq**      Name: **Israe El-Naouq**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Technical Manager

Signature

Issued: February 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.5
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>51.7 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	6.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.0 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	52.7	1.95 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	50.9 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>49.9 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	5.91 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>23.3 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.6 $\Omega$ - 0.4 j $\Omega$
Return Loss	- 29.0 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.5 $\Omega$ + 1.2 j $\Omega$
Return Loss	- 37.4 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2011

## DASY5 Validation Report for Head TSL

Date: 11.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 882**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 37.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.806 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.6 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.07 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

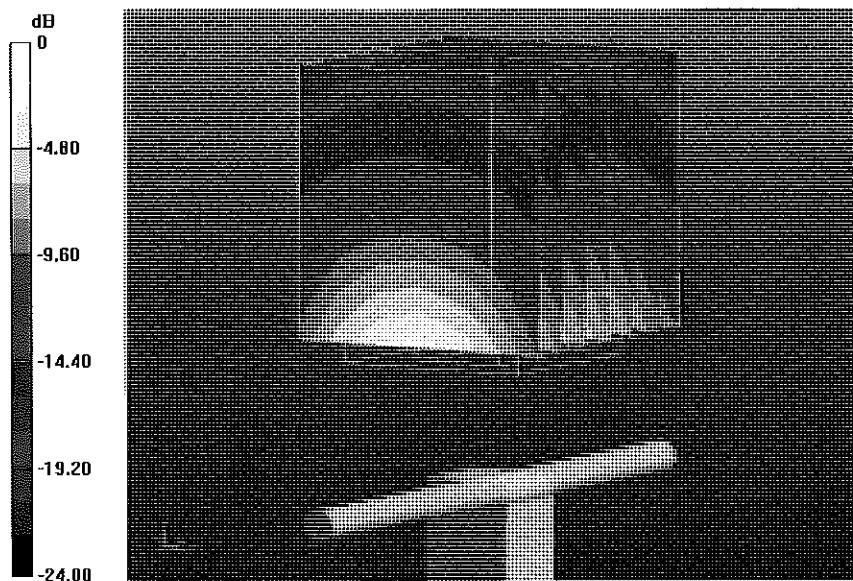


0 dB = 16.7 W/kg = 12.23 dBW/kg

## Impedance Measurement Plot for Head TSL

11 Feb 2013 11:51:51  
[CH1] S11 1 U FS 1: 53.639  $\Omega$  -363.28 m $\Omega$  178.82 pF 2 450.000 000 MHz

\*  
Del  
Cor

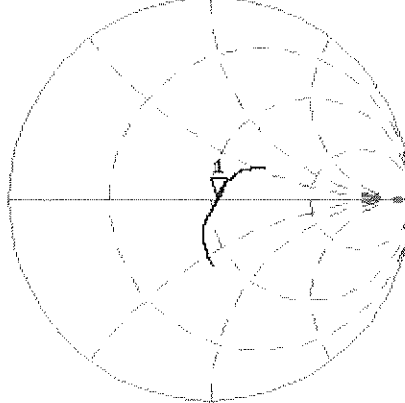


Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -29.047 dB 2 450.000 000 MHz

Cor

Avg  
16

H1d

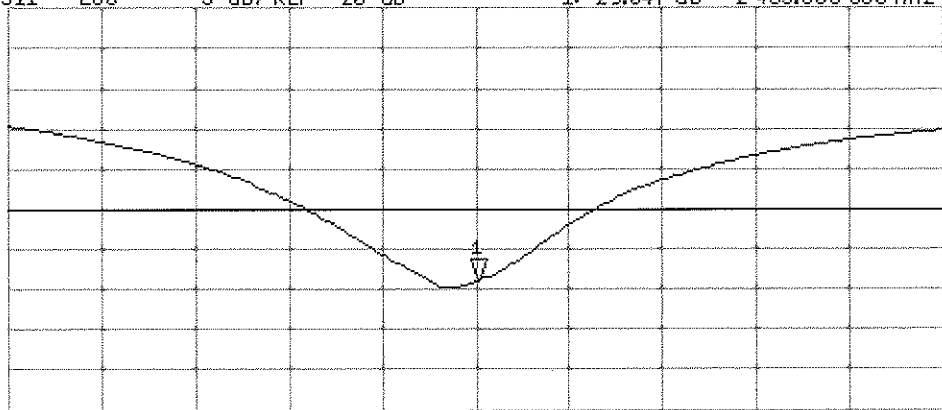

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 11.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 882**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  S/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.474 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.1 W/kg

**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.91 W/kg**


Maximum value of SAR (measured) = 16.9 W/kg

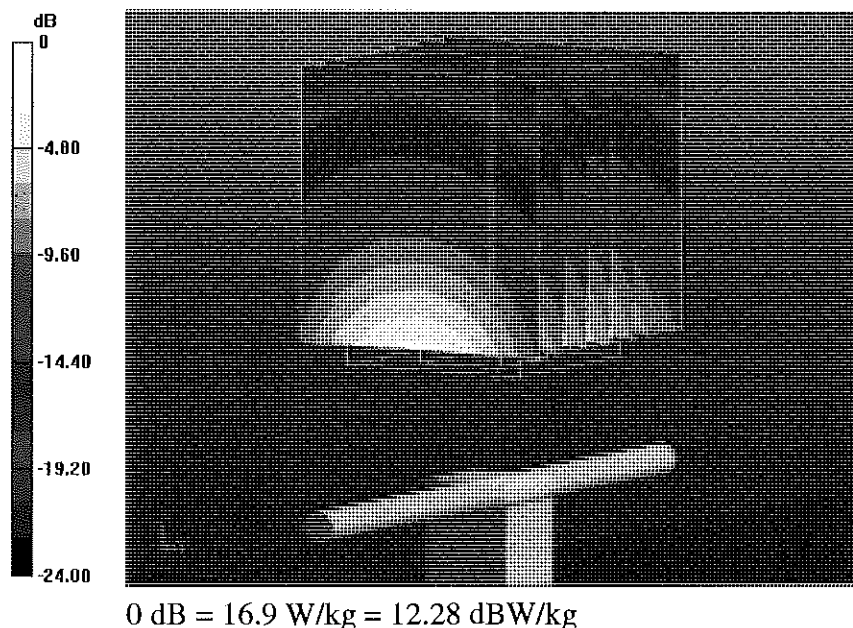

## Impedance Measurement Plot for Body TSL

11 Feb 2013 11:51:25  
CH1 S11 1 U FS 1: 49.500  $\Omega$  1.2461  $\mu$  80.948 pH 2 450.000 000 MHz

\*  
De1  
Cor

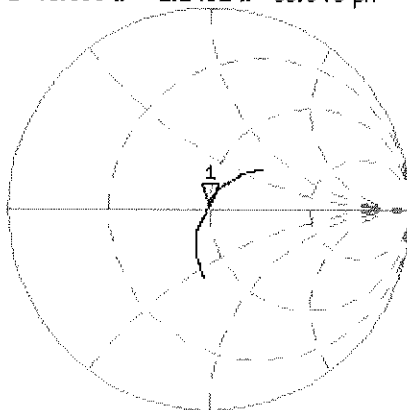

Avg  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -37.374 dB 2 450.000 000 MHz

Cor

Avg  
16

H1d

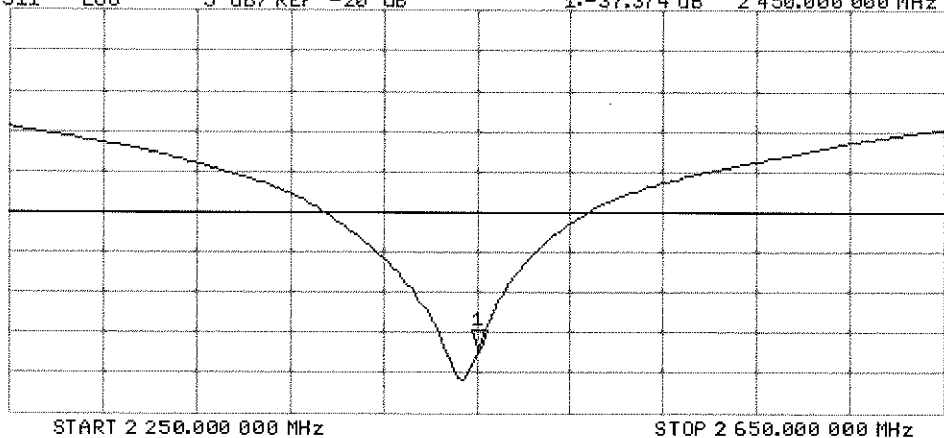



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1057\_Jan13**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1057**

Calibration procedure(s) **QA CAL-22.v2  
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **January 11, 2013**

✓  
KOK  
1/29/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq**      Name: **Israe El-Naouq**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature: *Israe El-Naouq*  
*Katja Pokovic*

Issued: January 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- c) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.5
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
<b>Frequency</b>	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	36.0	4.66 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	34.6 $\pm$ 6 %	4.50 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL at 5200 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	100 mW input power	7.66 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>75.9 W/kg <math>\pm</math> 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>21.4 W/kg <math>\pm</math> 19.5 % (k=2)</b>

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.79 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.1 ± 6 %	4.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	5.09 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.69 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.61 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.55 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.81 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5500 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>80.8 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>22.4 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5600 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	100 mW input power	8.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>80.3 W/kg ± 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>22.3 W/kg ± 19.5 % (k=2)</b>

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

## Appendix

### Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.5 $\Omega$ - 9.8 j $\Omega$
Return Loss	- 20.3 dB

### Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	48.5 $\Omega$ - 4.5 j $\Omega$
Return Loss	- 26.4 dB

### Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	50.6 $\Omega$ - 5.8 j $\Omega$
Return Loss	- 24.8 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	53.9 $\Omega$ - 3.8 j $\Omega$
Return Loss	- 25.6 dB

### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	52.5 $\Omega$ - 4.4 j $\Omega$
Return Loss	- 26.1 dB

### Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.3 $\Omega$ - 7.9 j $\Omega$
Return Loss	- 22.0 dB

### Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	48.7 $\Omega$ - 3.2 j $\Omega$
Return Loss	- 29.2 dB

### Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	51.2 $\Omega$ - 4.8 j $\Omega$
Return Loss	- 26.2 dB

### Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	53.6 $\Omega$ - 2.1 j $\Omega$
Return Loss	- 27.9 dB



## Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	53.3 $\Omega$ - 2.9 j $\Omega$
Return Loss	- 27.4 dB

## General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

## DASY5 Validation Report for Head TSL

Date: 11.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.5$  S/m;  $\epsilon_r = 34.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.6$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.79$  S/m;  $\epsilon_r = 34.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.88$  S/m;  $\epsilon_r = 34.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.09$  S/m;  $\epsilon_r = 33.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.671 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 29.4 W/kg

**SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.473 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.22 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.735 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 33.2 W/kg

**SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.28 W/kg**

Maximum value of SAR (measured) = 20.1 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 63.848 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 33.5 W/kg  
**SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kg**  
Maximum value of SAR (measured) = 20.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 60.467 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 33.3 W/kg  
**SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.17 W/kg**  
Maximum value of SAR (measured) = 19.4 W/kg

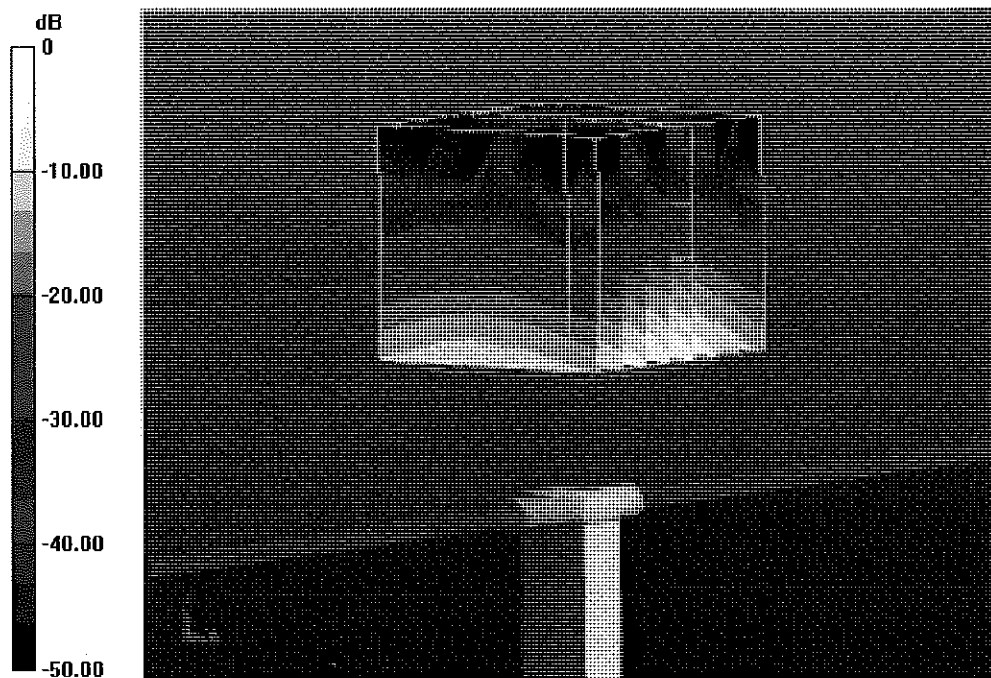

0 dB = 19.4 W/kg = 12.88 dBW/kg

# Impedance Measurement Plot for Head TSL


11 Jan 2013 09:26:56  
 [CH1] S11 1 U FS 1: 50.543  $\Omega$  -9.7754  $\Omega$  3.1310 pF 5 200.000 000 MHz

\*  
 Del

CA

Avg  
 16

H1 d

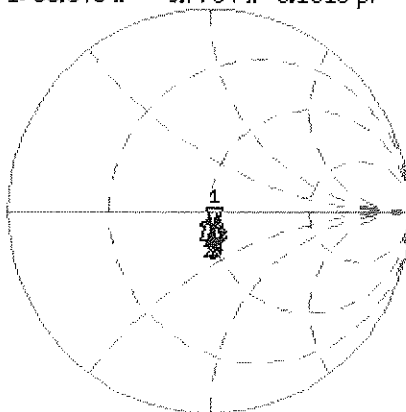

CH1 Markers


2: 48.508  $\Omega$   
 -4.4805  $\Omega$   
 5.30000 GHz  
 3: 50.617  $\Omega$   
 -5.7559  $\Omega$   
 5.50000 GHz  
 4: 53.891  $\Omega$   
 -3.8418  $\Omega$   
 5.60000 GHz  
 5: 52.500  $\Omega$   
 -4.4160  $\Omega$   
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -20.273 dB 5 200.000 000 MHz

CA

Avg  
 16

H1 d

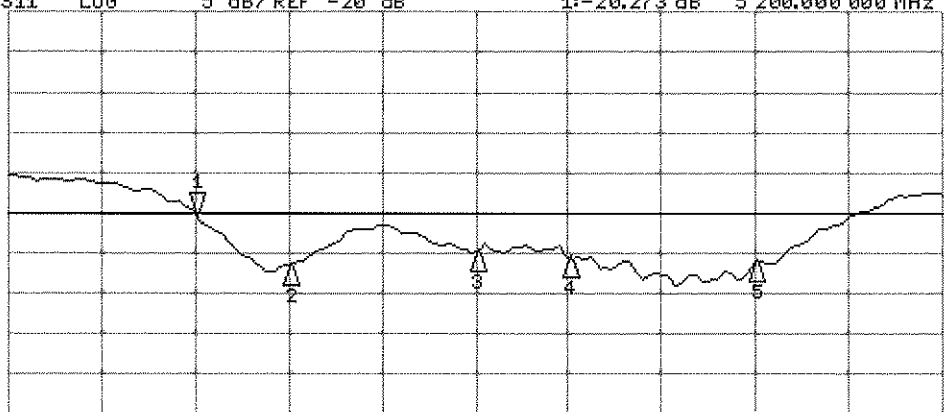

CH2 Markers

2: -26.396 dB  
 5.30000 GHz  
 3: -24.818 dB  
 5.50000 GHz  
 4: -25.573 dB  
 5.60000 GHz  
 5: -26.115 dB  
 5.80000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 10.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.42$  S/m;  $\epsilon_r = 47$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.55$  S/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.81$  S/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.94$  S/m;  $\epsilon_r = 46.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 46$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.074 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.13 W/kg**

Maximum value of SAR (measured) = 18.0 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.924 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 30.9 W/kg

**SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.13 W/kg**

Maximum value of SAR (measured) = 17.9 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.561 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 35.3 W/kg

**SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.26 W/kg**


Maximum value of SAR (measured) = 19.7 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 58.884 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 36.3 W/kg  
**SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.25 W/kg**  
Maximum value of SAR (measured) = 20.0 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 55.753 V/m; Power Drift = -0.00 dB  
Peak SAR (extrapolated) = 35.6 W/kg  
**SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.09 W/kg**  
Maximum value of SAR (measured) = 18.9 W/kg

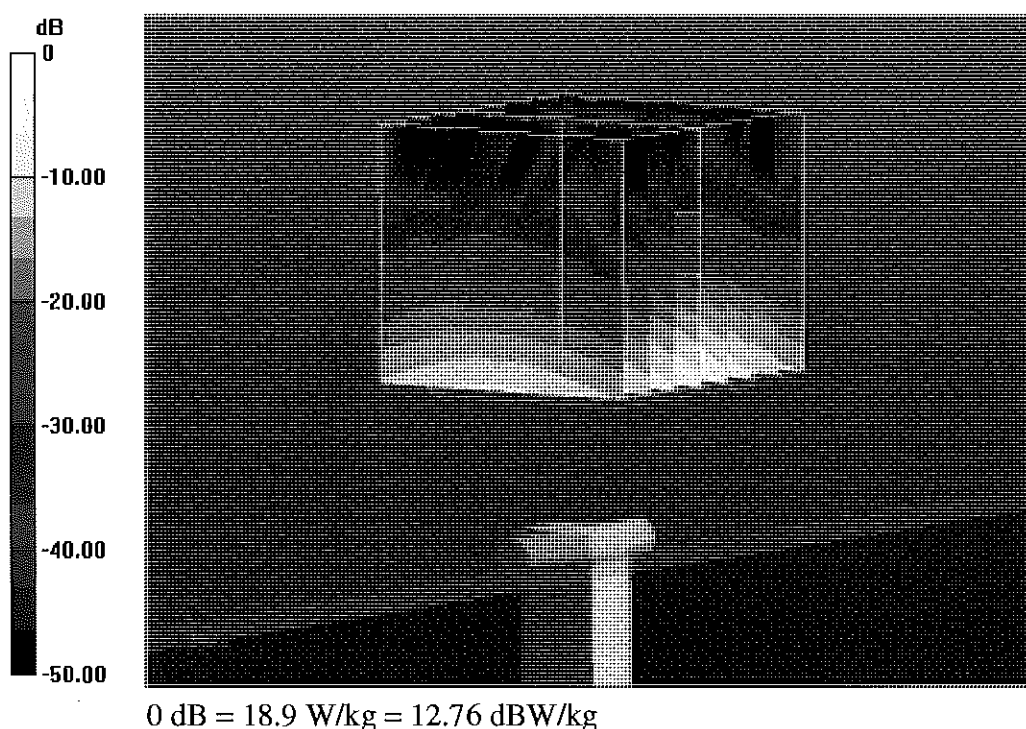

# Impedance Measurement Plot for Body TSL

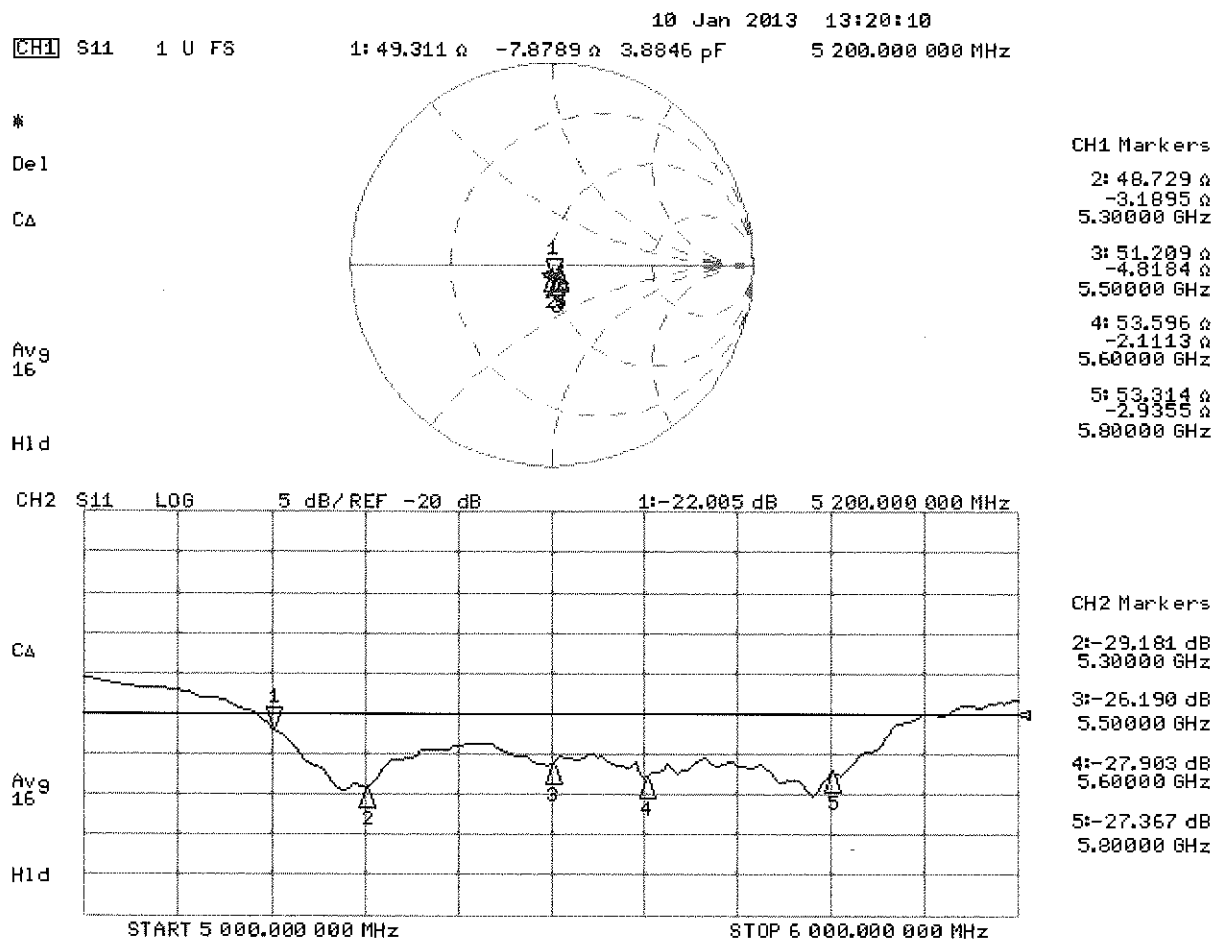



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3022\_Aug13**

## CALIBRATION CERTIFICATE

Object **ES3DV2 - SN:3022**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **August 22, 2013**

*UTC*  
*9/13/13*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name <b>Jeton Kastrati</b>	Function Laboratory Technician	Signature 
Approved by:	<b>Katja Pokovic</b>	Technical Manager	

Issued: August 23, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ES3DV2

## SN:3022

Manufactured: April 15, 2003  
Calibrated: August 22, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.00	1.04	0.99	± 10.1 %
DCP (mV) <sup>B</sup>	100.7	97.4	99.7	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	178.6	±3.0 %
		Y	0.0	0.0	1.0		141.9	
		Z	0.0	0.0	1.0		134.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.21	6.21	6.21	0.19	2.37	± 12.0 %
835	41.5	0.90	6.09	6.09	6.09	0.30	1.70	± 12.0 %
1750	40.1	1.37	5.19	5.19	5.19	0.65	1.23	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.51	1.43	± 12.0 %
2450	39.2	1.80	4.36	4.36	4.36	0.51	1.51	± 12.0 %
2600	39.0	1.96	4.16	4.16	4.16	0.74	1.29	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	5.92	5.92	5.92	0.24	1.99	± 12.0 %
835	55.2	0.97	5.91	5.91	5.91	0.29	1.85	± 12.0 %
1750	53.4	1.49	4.75	4.75	4.75	0.52	1.52	± 12.0 %
1900	53.3	1.52	4.49	4.49	4.49	0.49	1.56	± 12.0 %
2450	52.7	1.95	4.01	4.01	4.01	0.70	1.02	± 12.0 %
2600	52.5	2.16	3.85	3.85	3.85	0.58	0.90	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

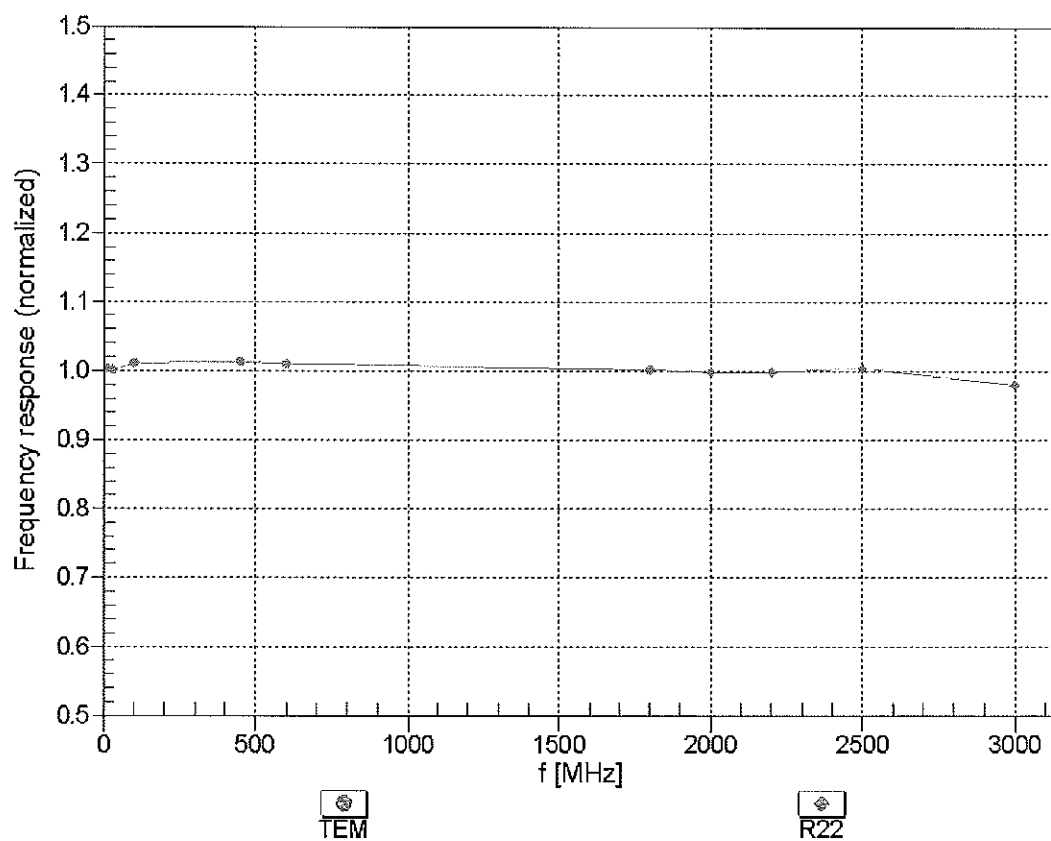



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM

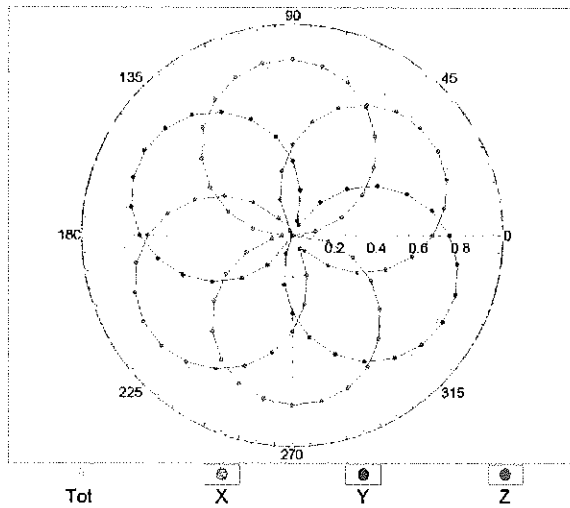


f=1800 MHz,R22

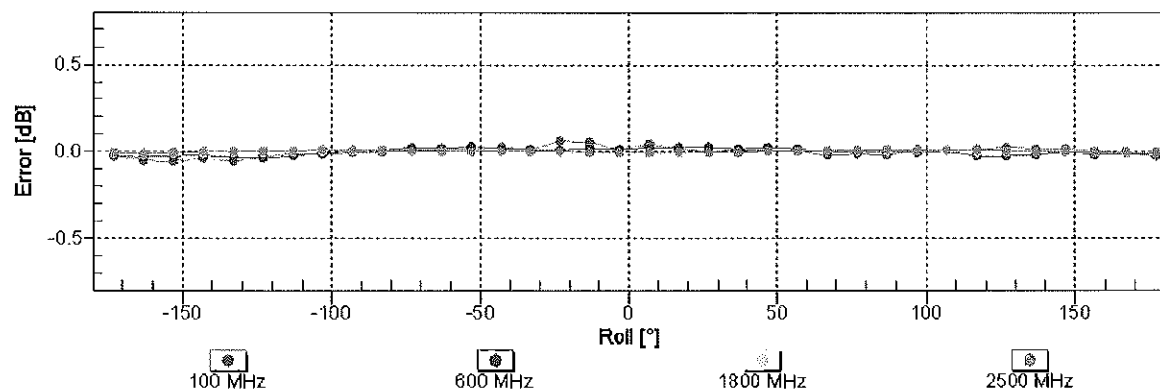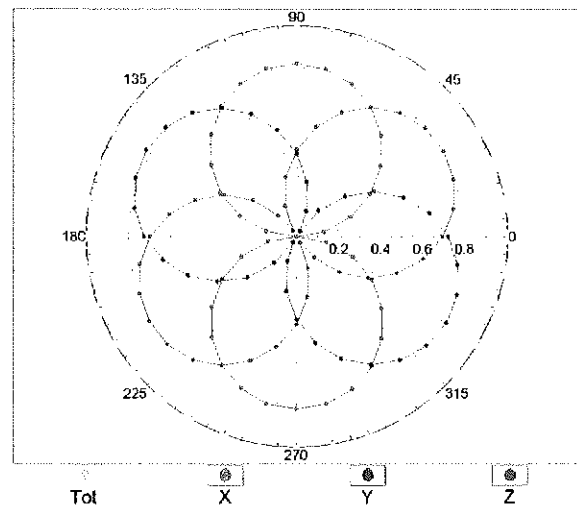

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


# Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f = 900 MHz)

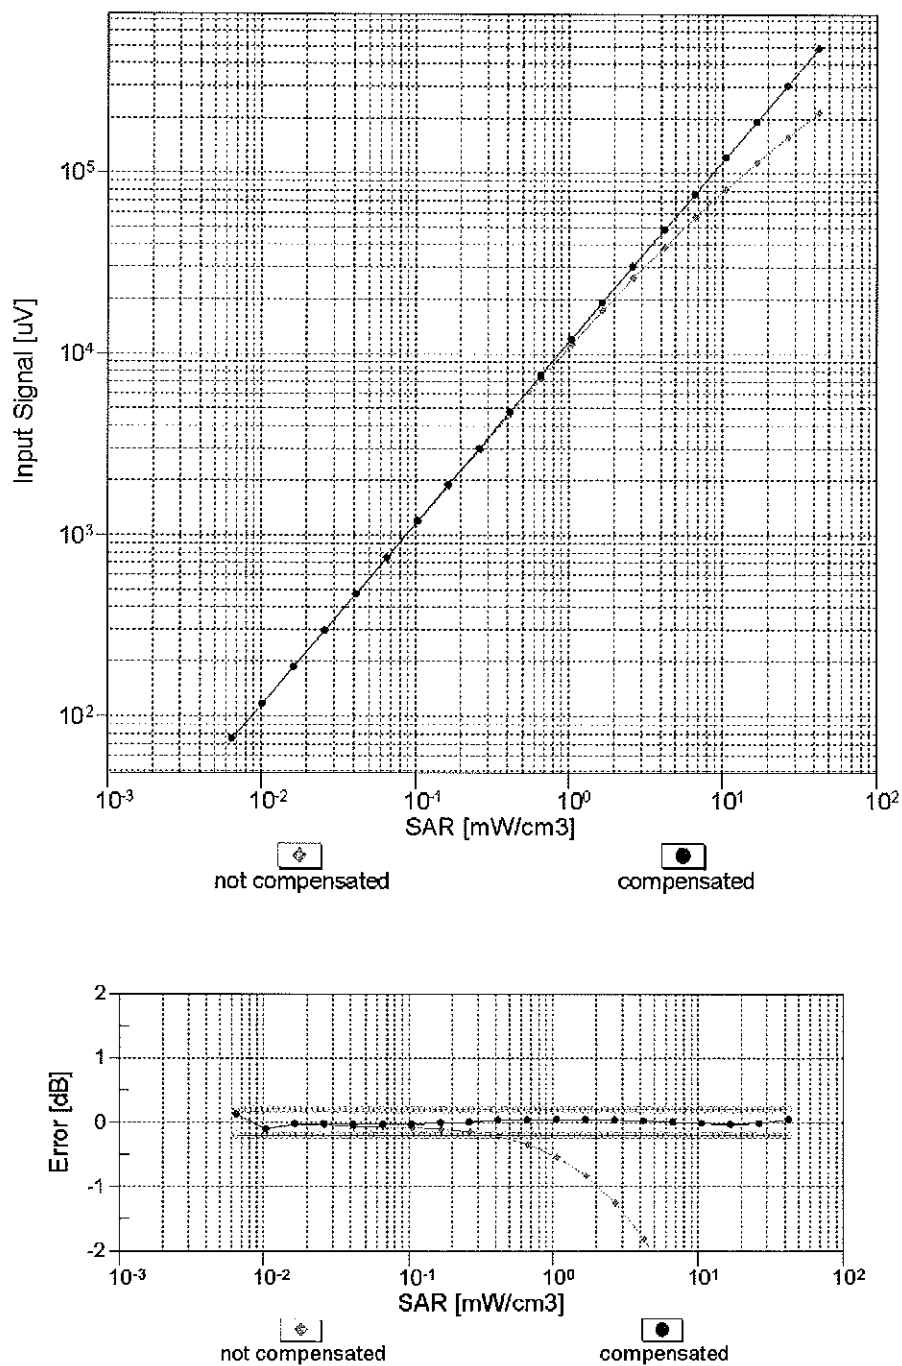

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)





## Conversion Factor Assessment

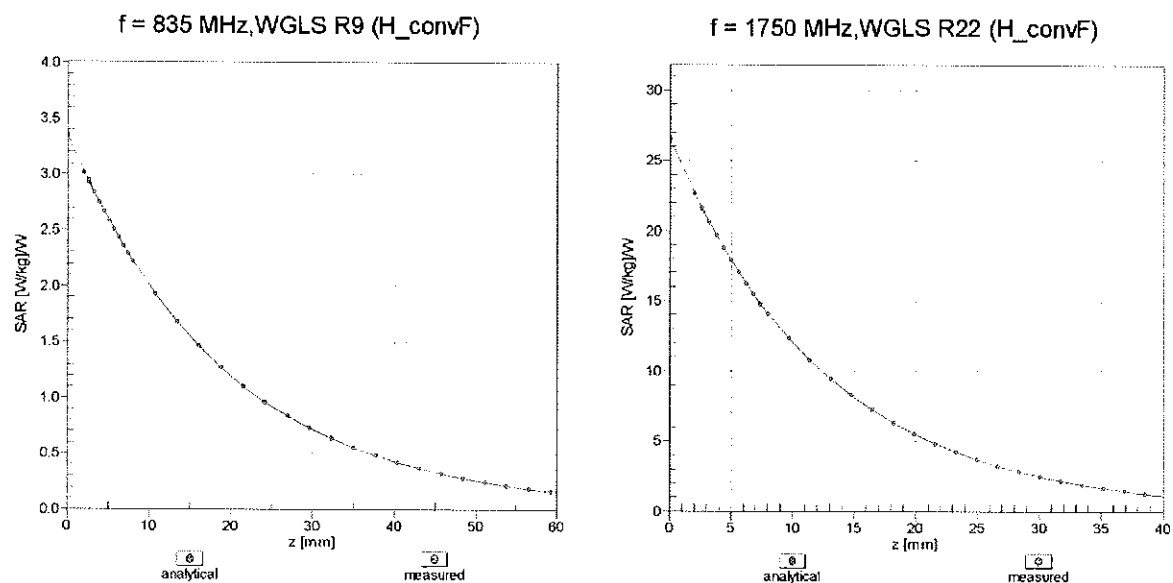

## Deviation from Isotropy in Liquid

Error ( $\phi$ ,  $\theta$ ),  $f = 900 \text{ MHz}$

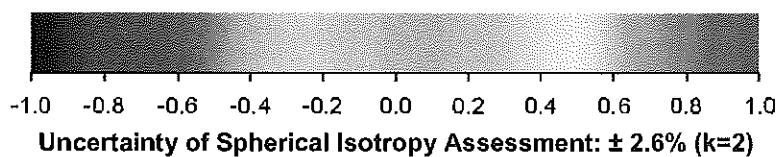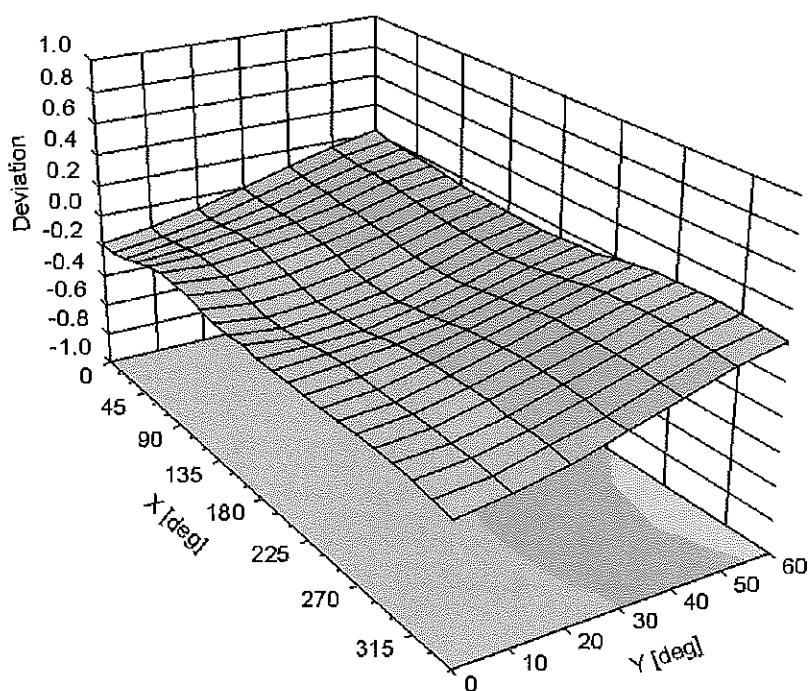

## DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-83.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm