

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(c) §27.53(h)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

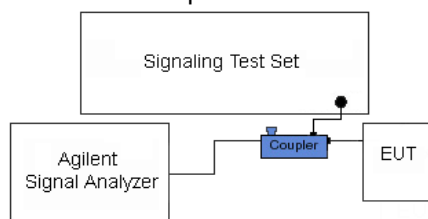




Figure 7-3. Test Instrument & Measurement Setup


FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 49 of 112

Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

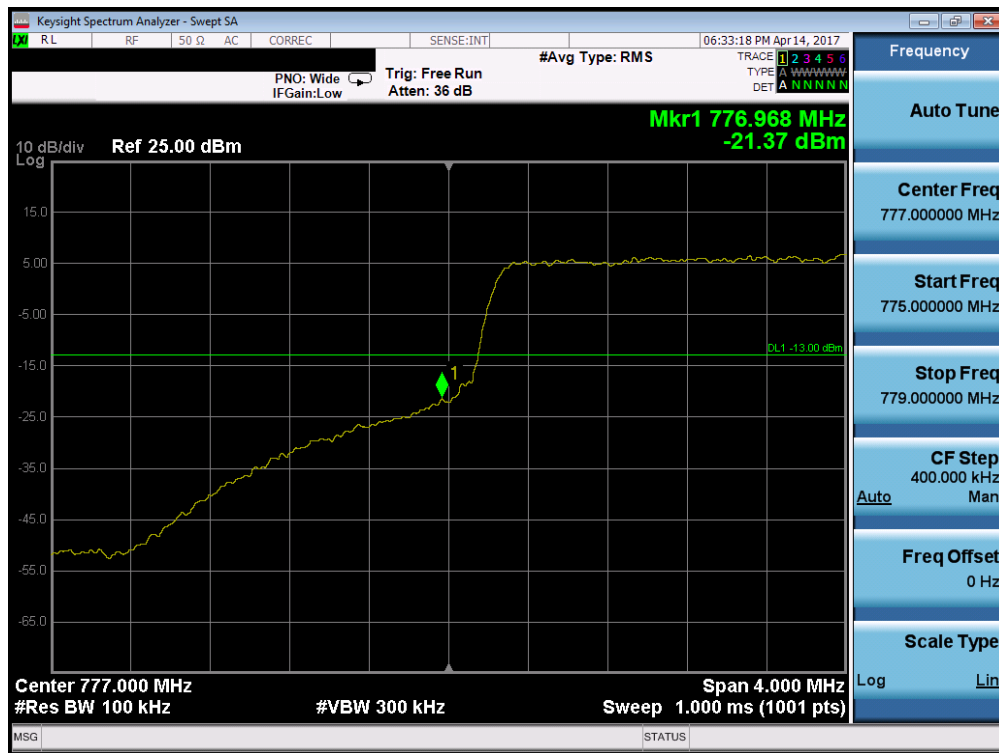

Plot 7-67. Lower Band Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 50 of 112

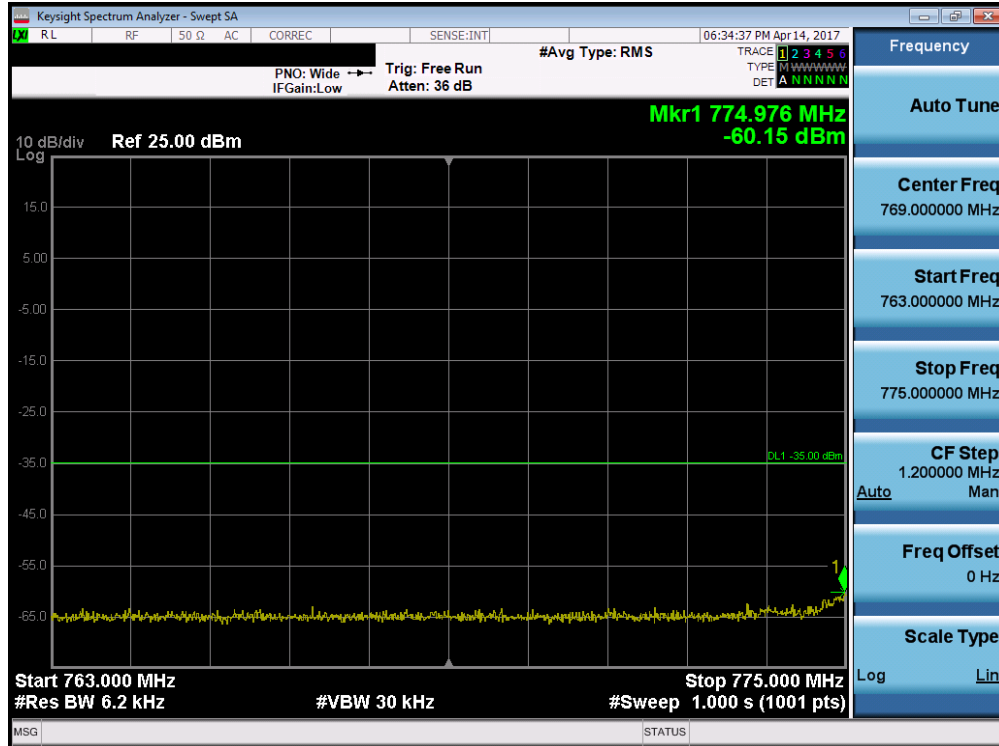


Plot 7-68. Lower Emission Mask Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)




Plot 7-69. Upper Band Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 51 of 112

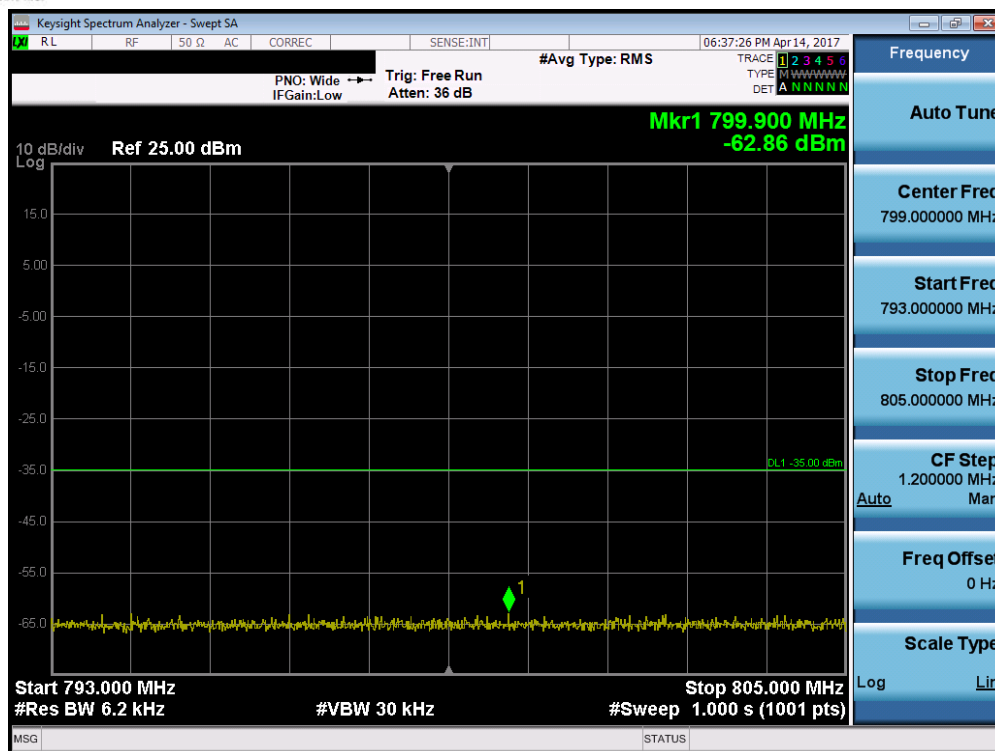




Plot 7-70. Upper Emission Mask Edge Plot (Band 13 - 5.0MHz QPSK - RB Size 25)

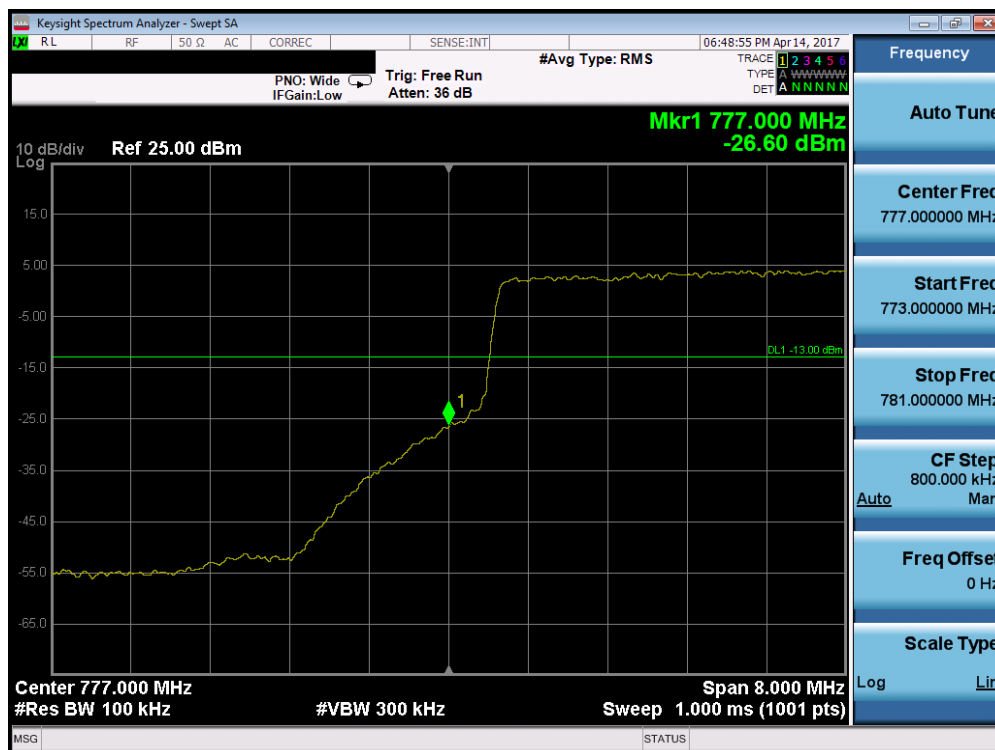

Plot 7-71. Lower Band Edge Plot (Band 13 - 10.0MHz QPSK - RB Size 50)


FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 52 of 112

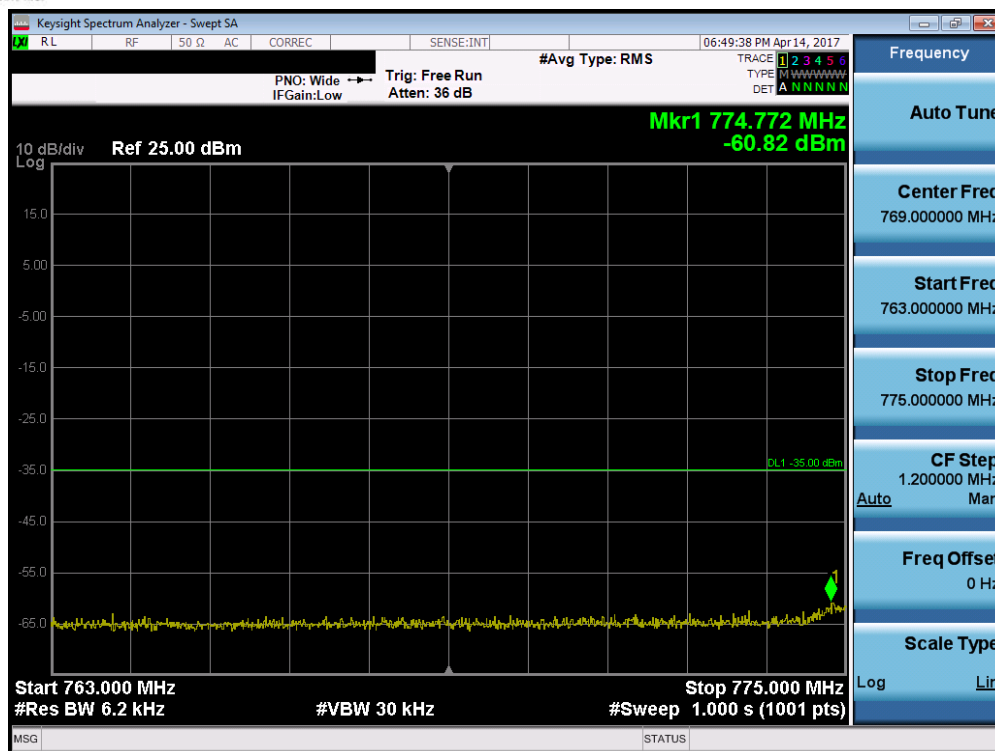

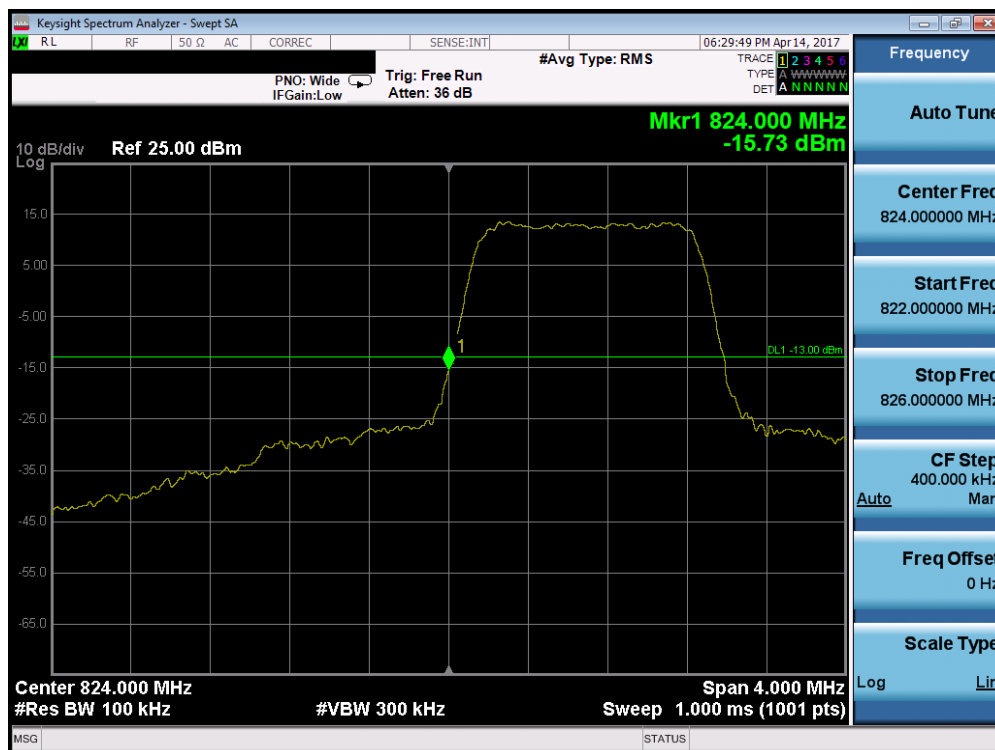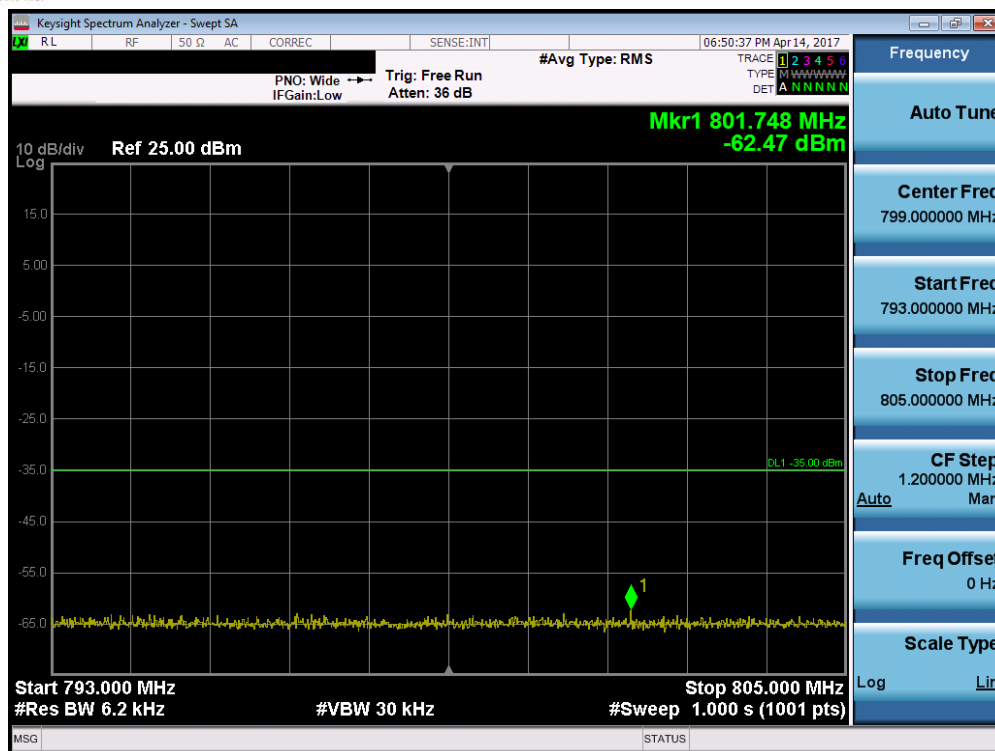



Plot 7-76. Upper Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

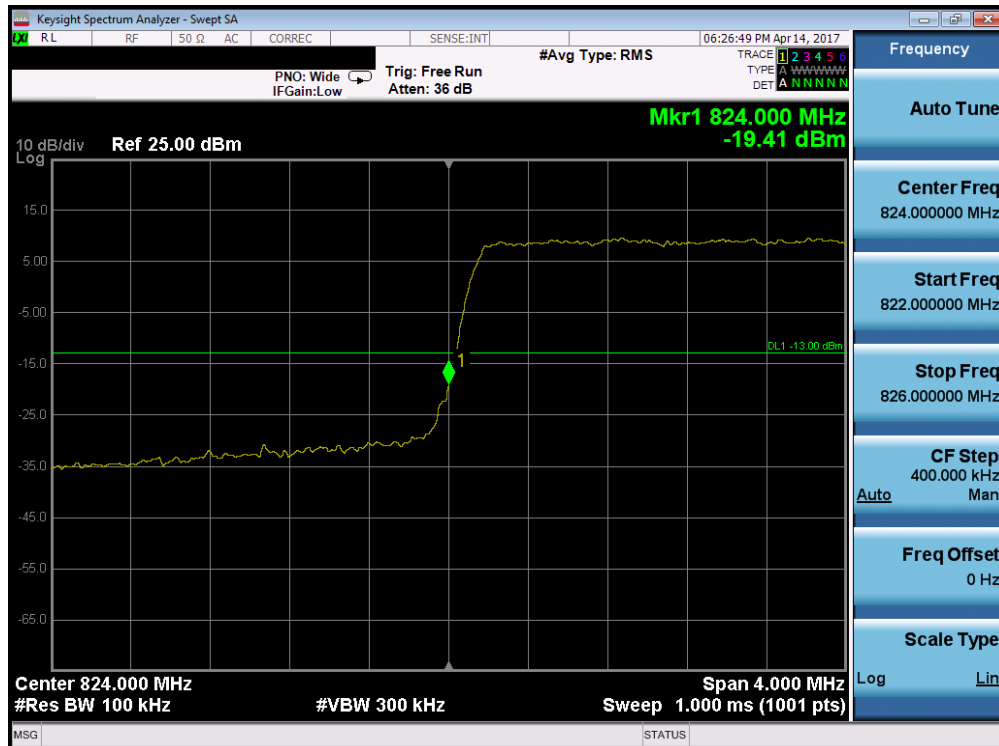


Plot 7-77. Lower Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 55 of 112




Plot 7-78. Upper Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

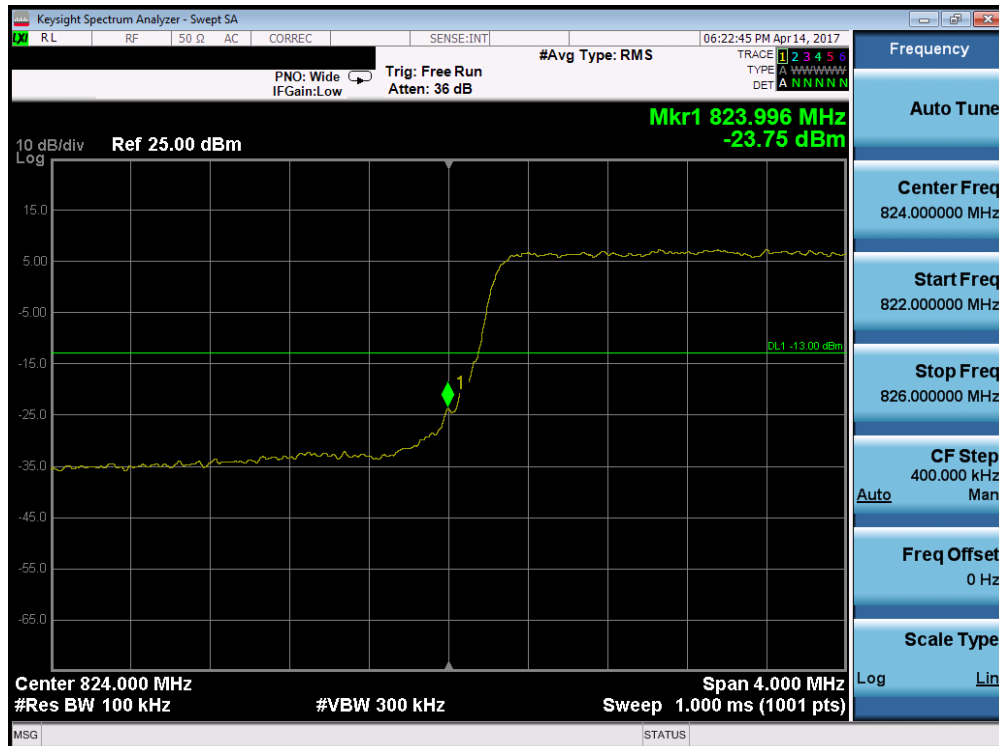


Plot 7-79. Lower Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 56 of 112

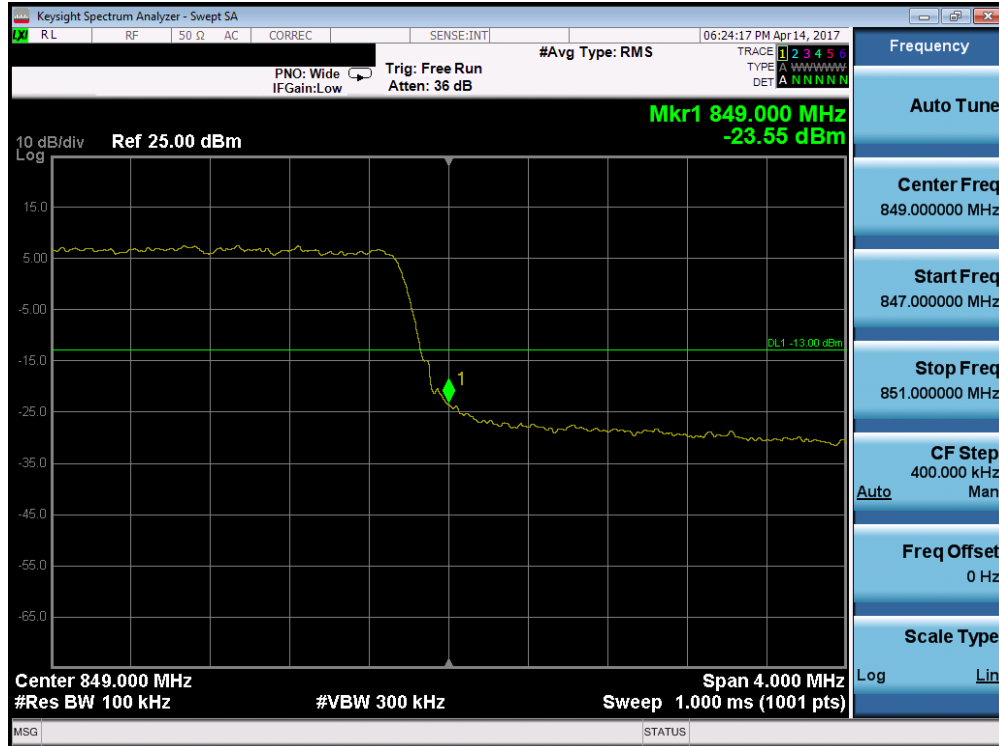


Plot 7-80. Upper Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

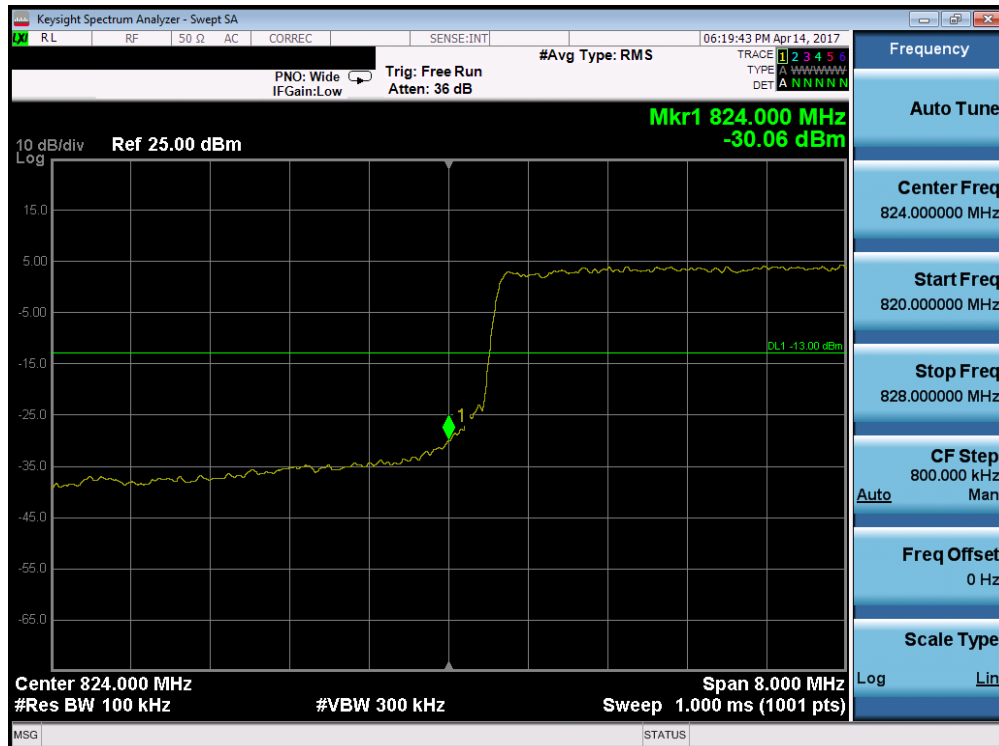


Plot 7-81. Lower Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 57 of 112

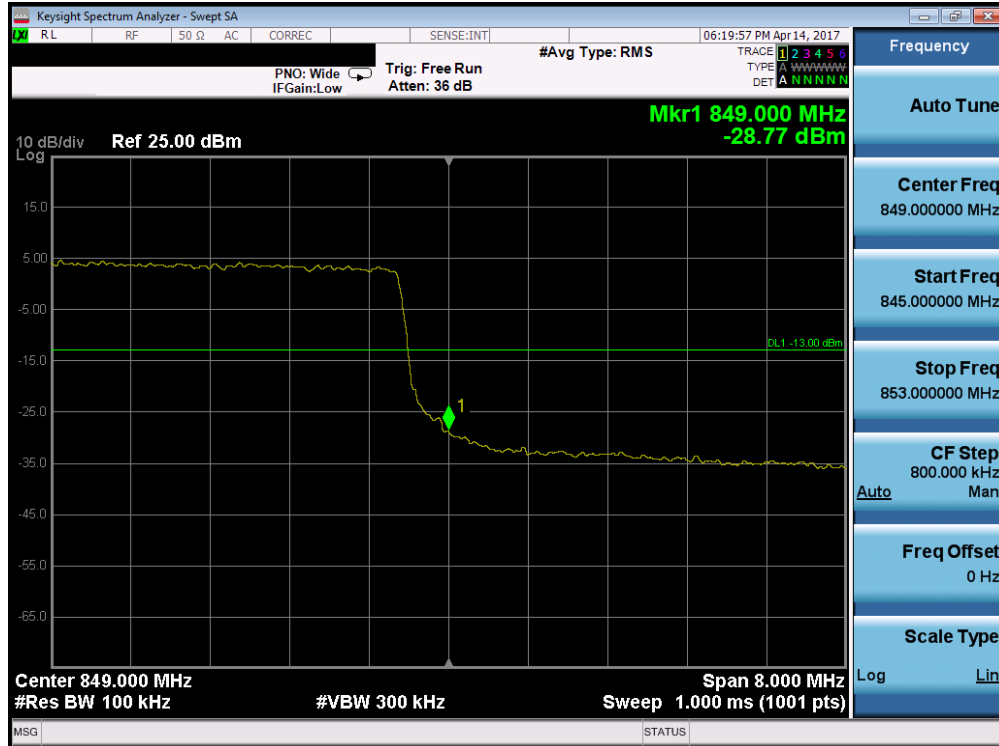


Plot 7-82. Upper Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

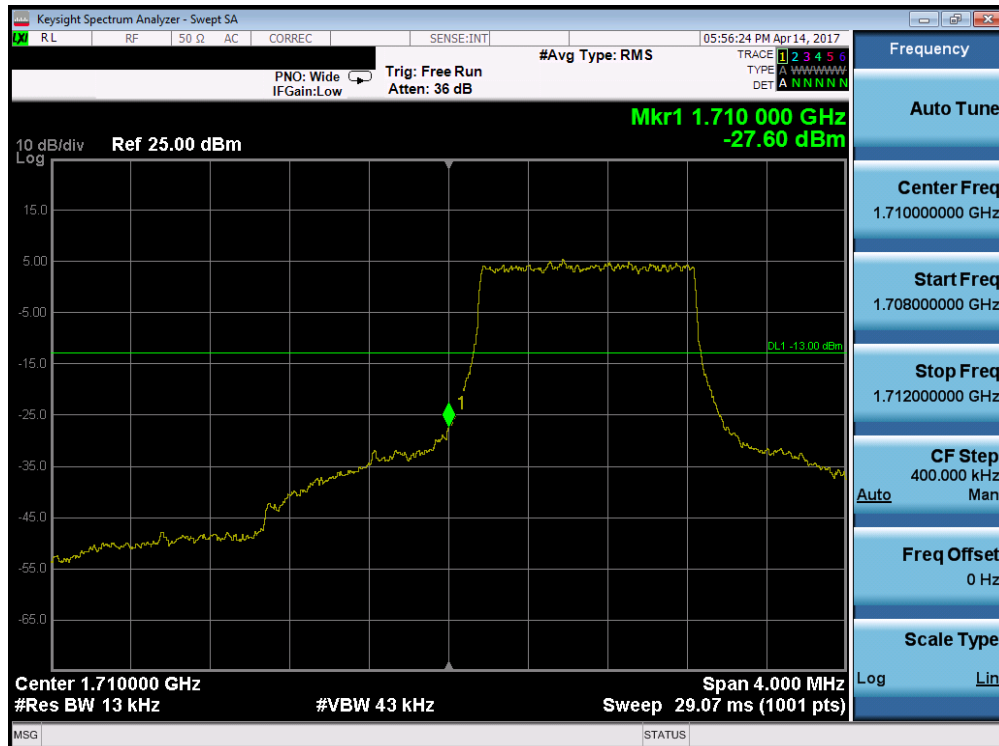

Plot 7-83. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 58 of 112

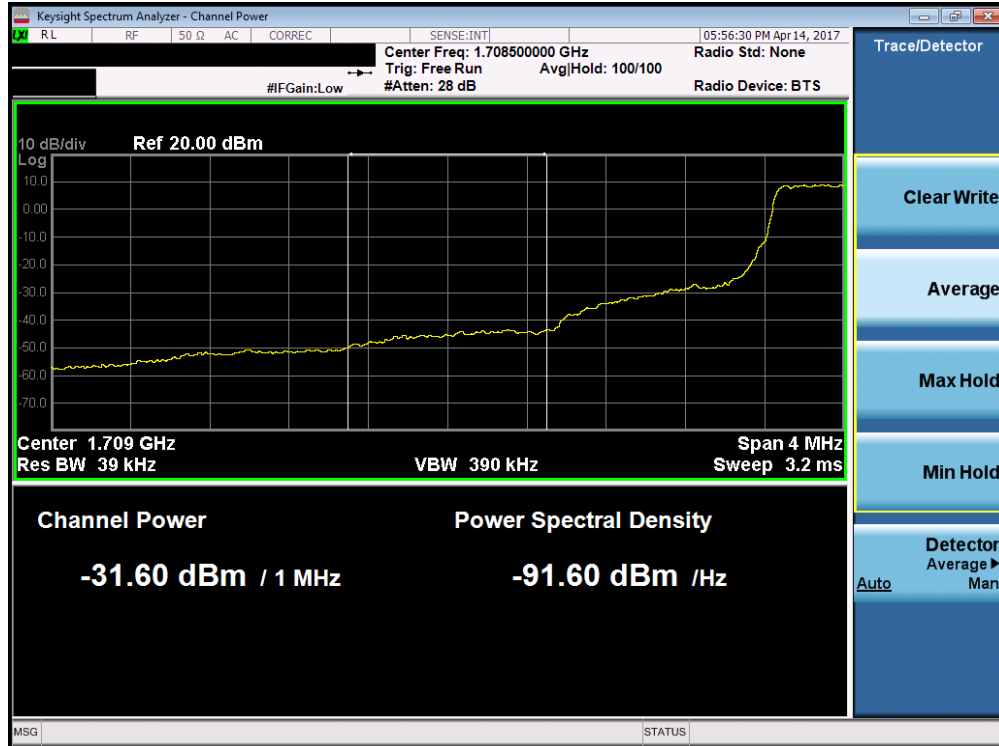


Plot 7-84. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)




Plot 7-85. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 59 of 112

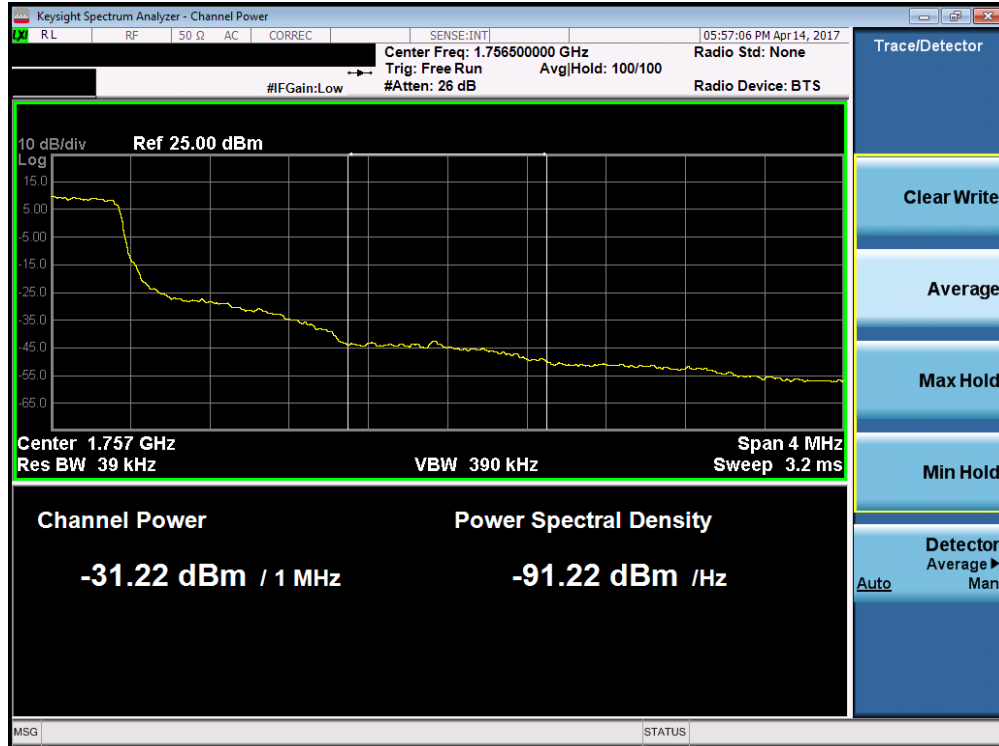


Plot 7-86. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

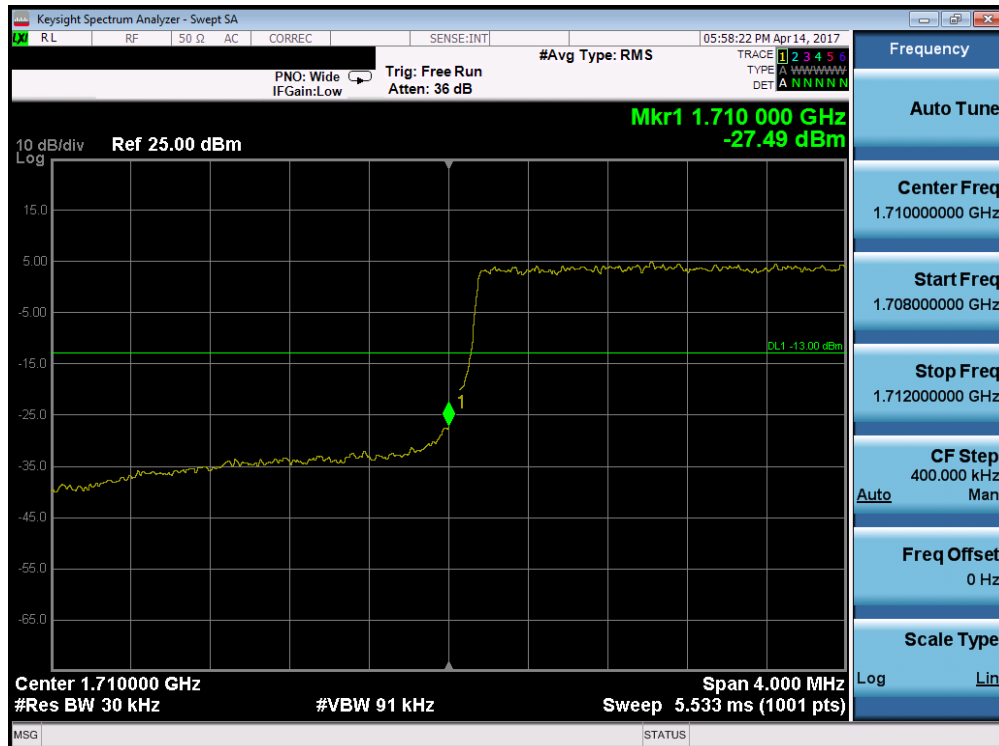


Plot 7-87. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 60 of 112

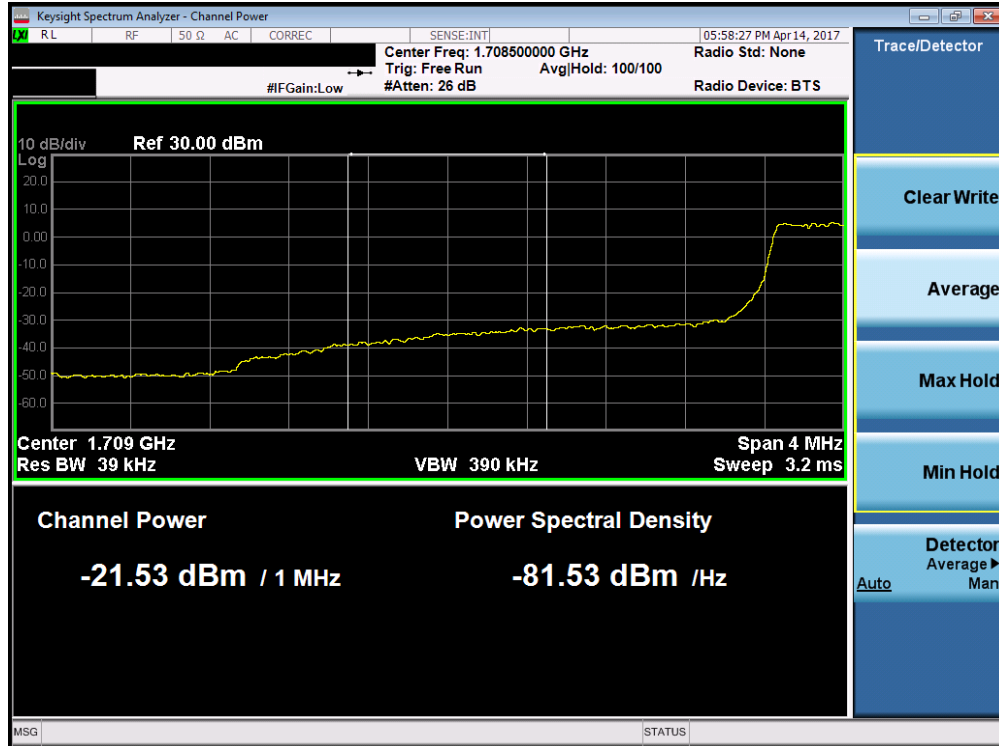


Plot 7-88. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

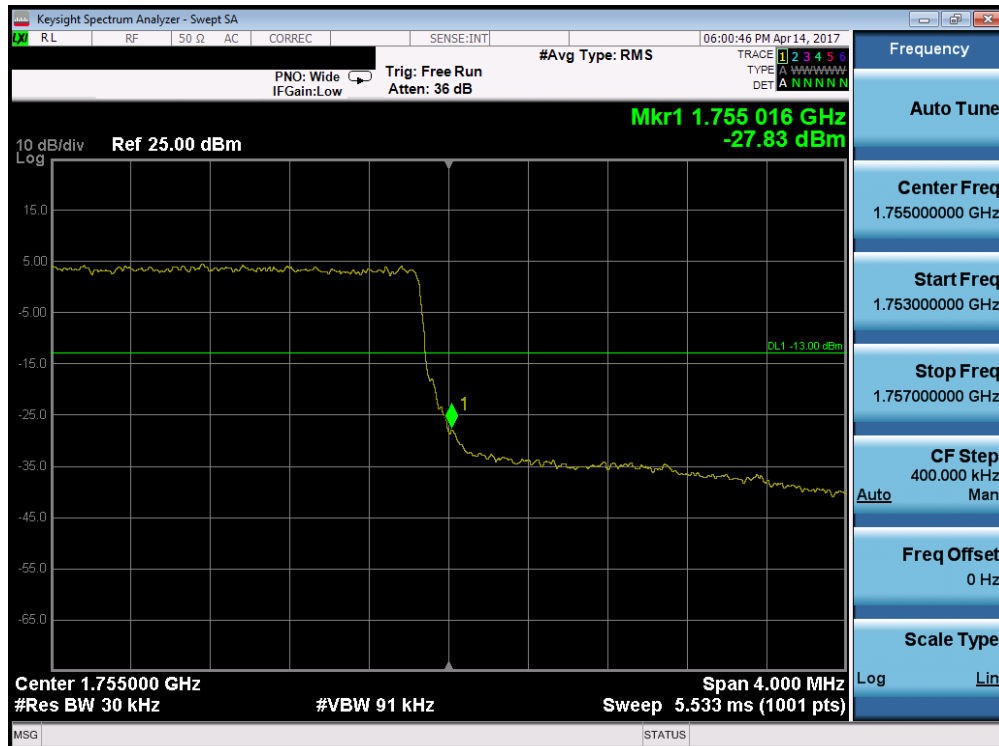


Plot 7-89. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 61 of 112

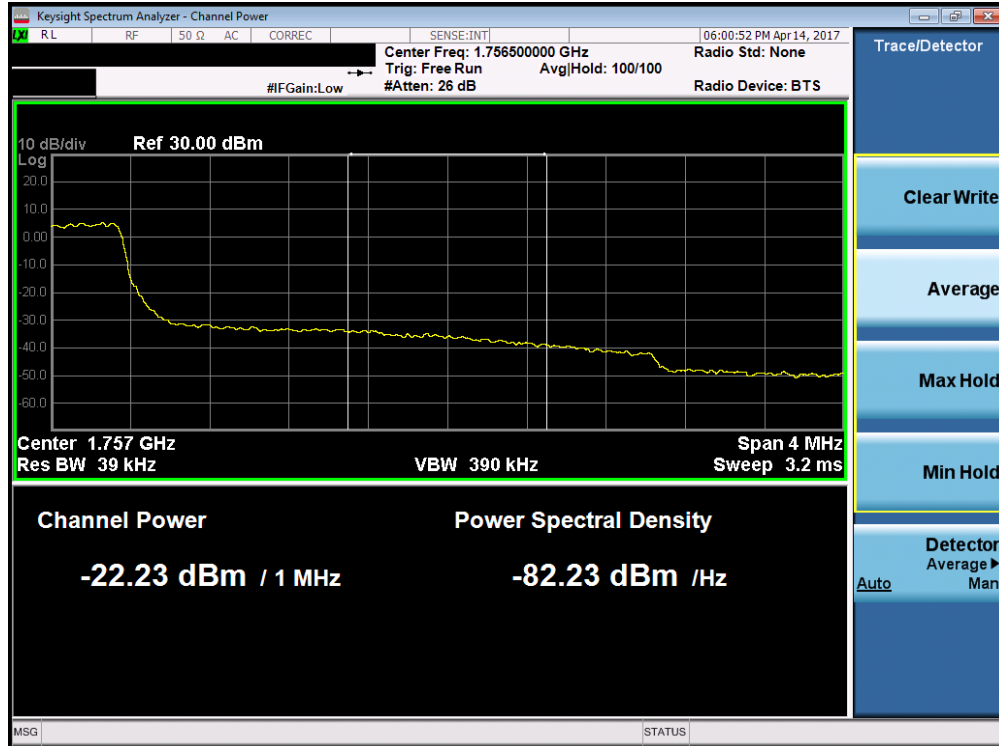


Plot 7-90. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

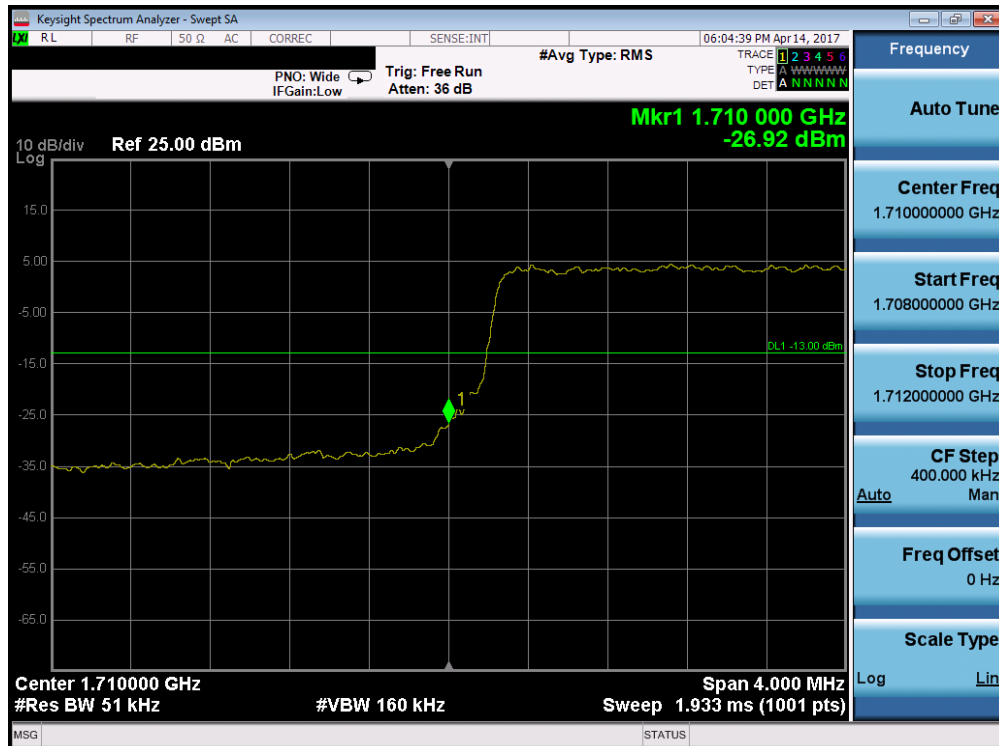


Plot 7-91. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 62 of 112

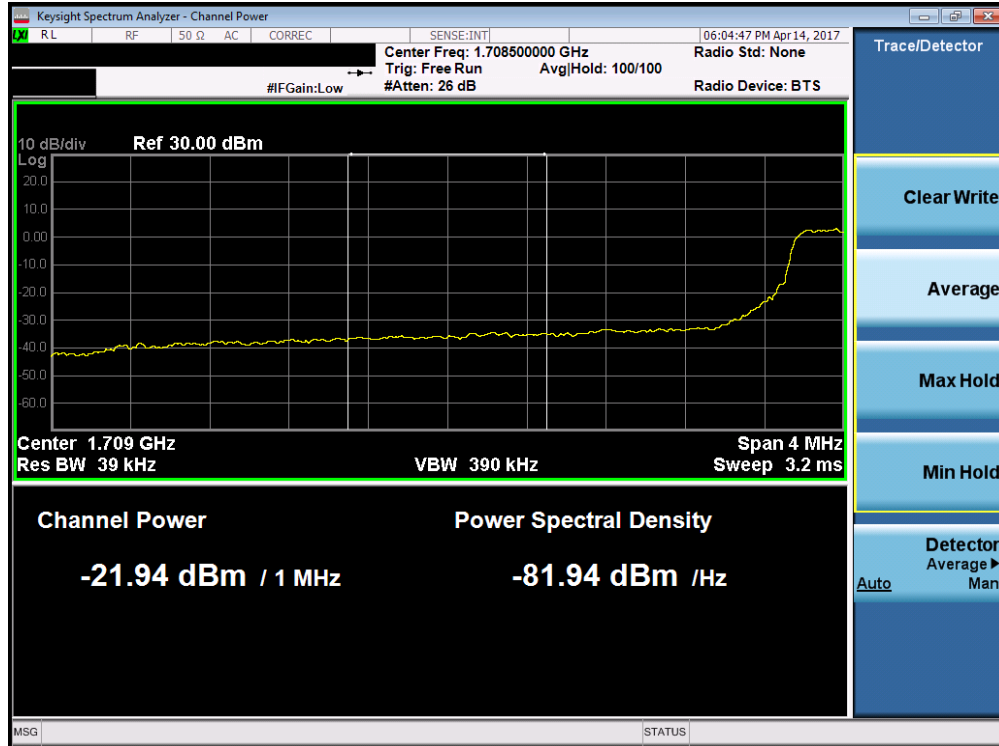


Plot 7-92. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

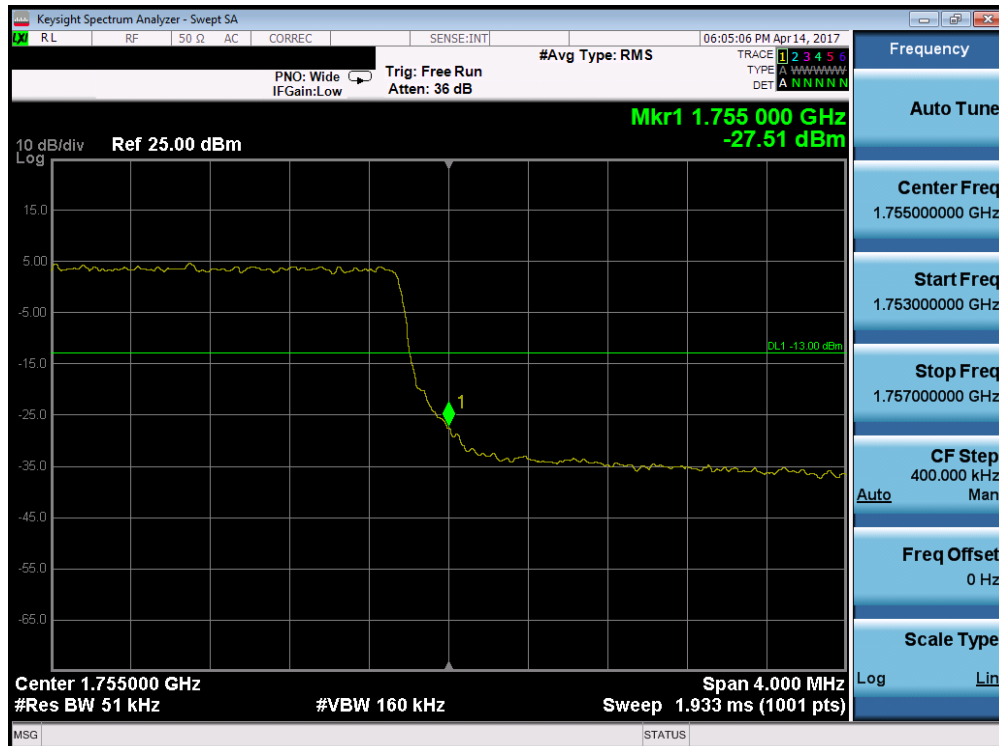


Plot 7-93. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 63 of 112

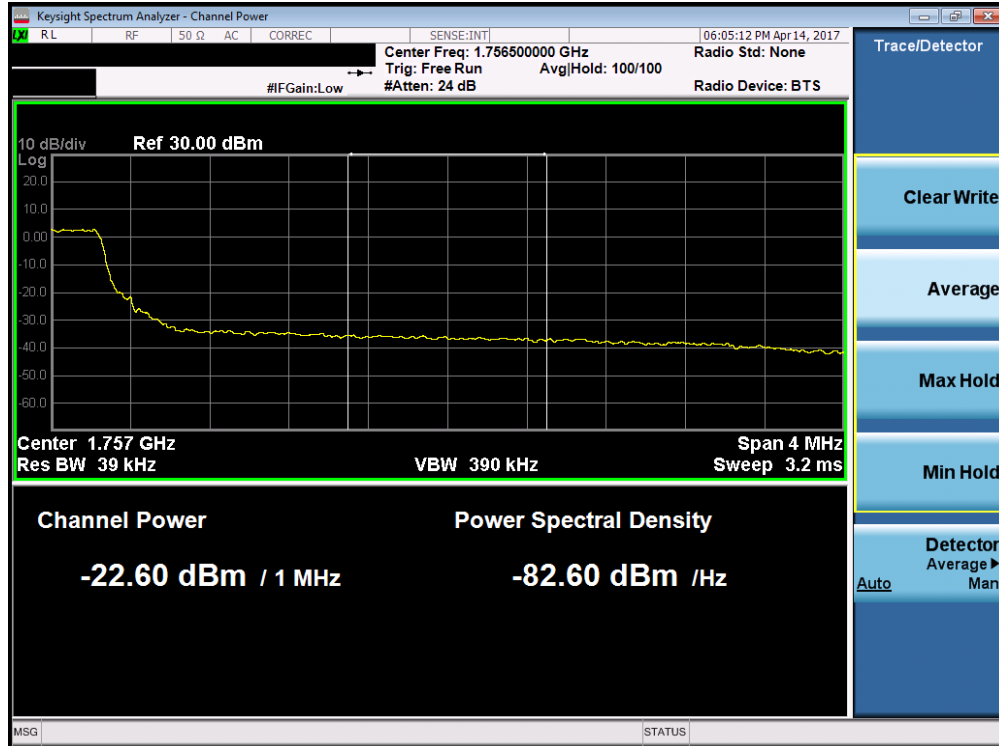


Plot 7-94. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

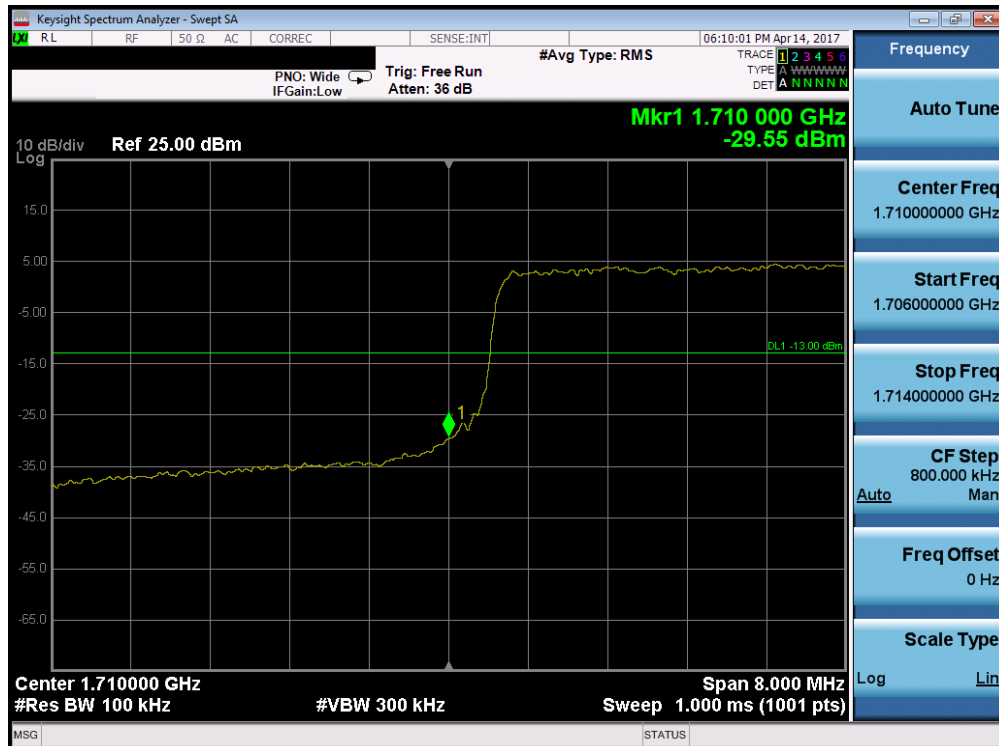

Plot 7-95. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 64 of 112

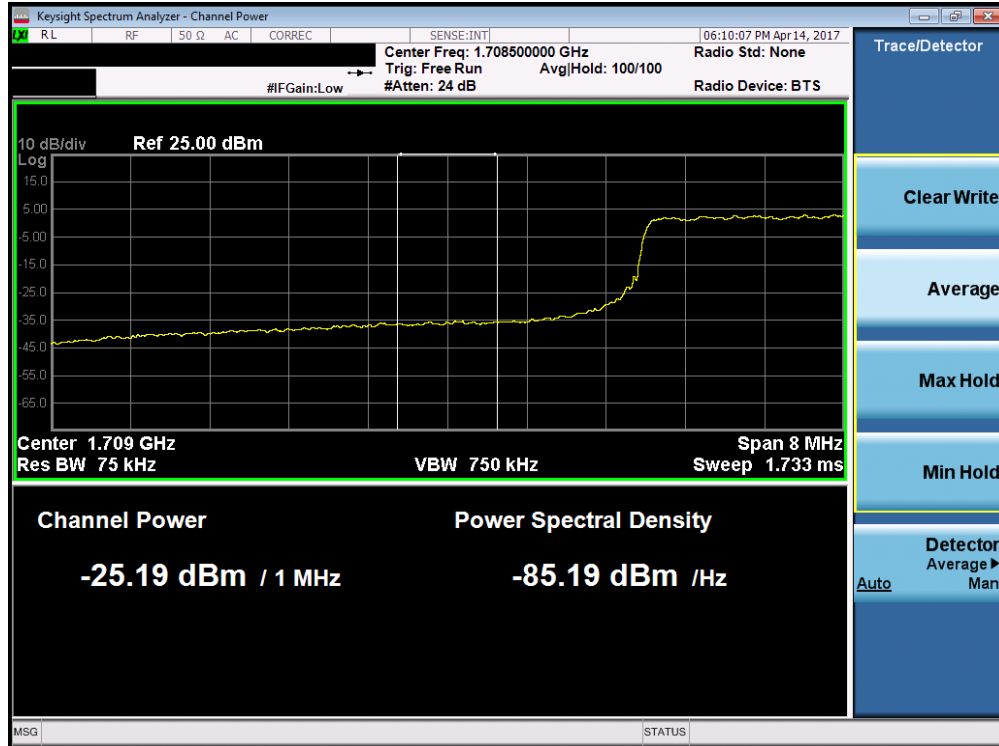


Plot 7-96. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)




Plot 7-97. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 65 of 112

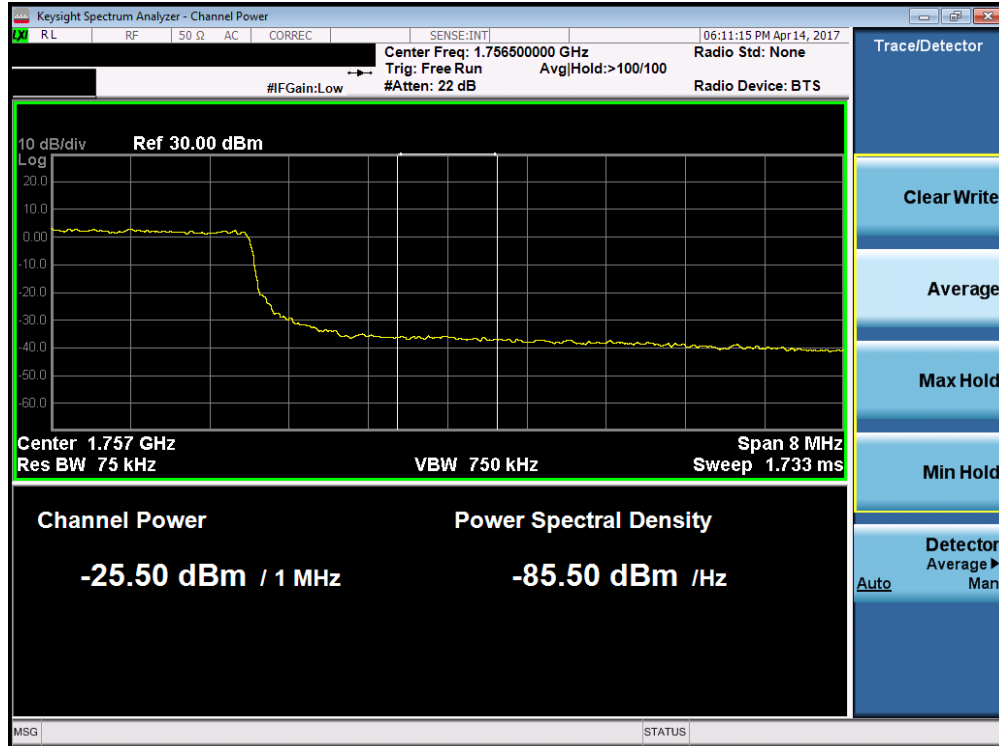


Plot 7-98. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

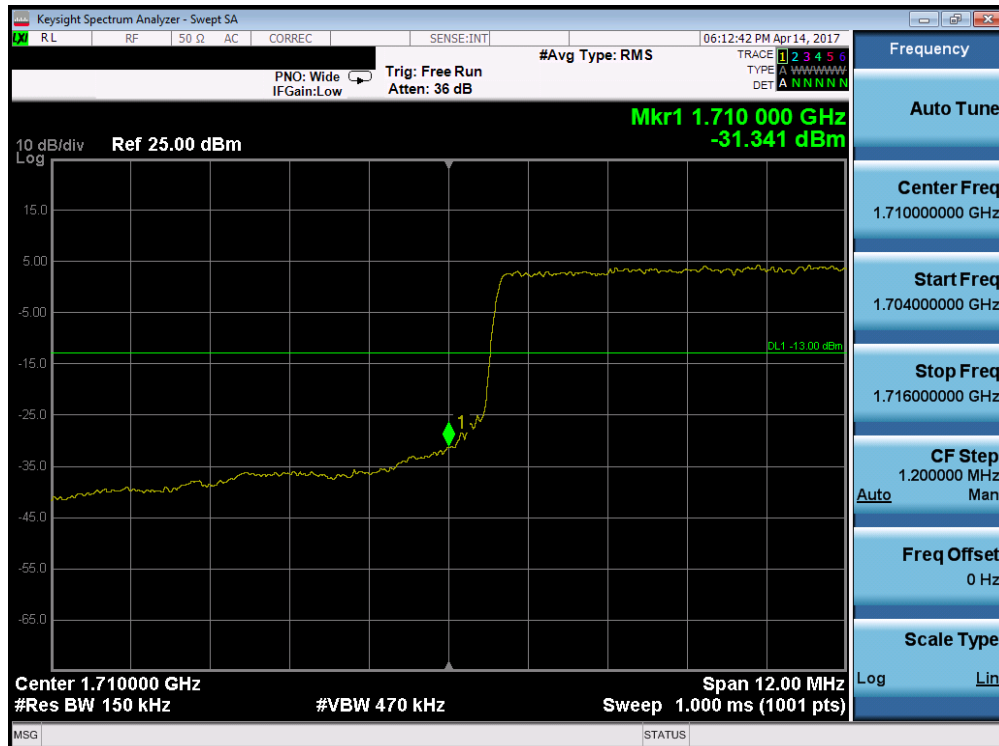

Plot 7-99. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 66 of 112

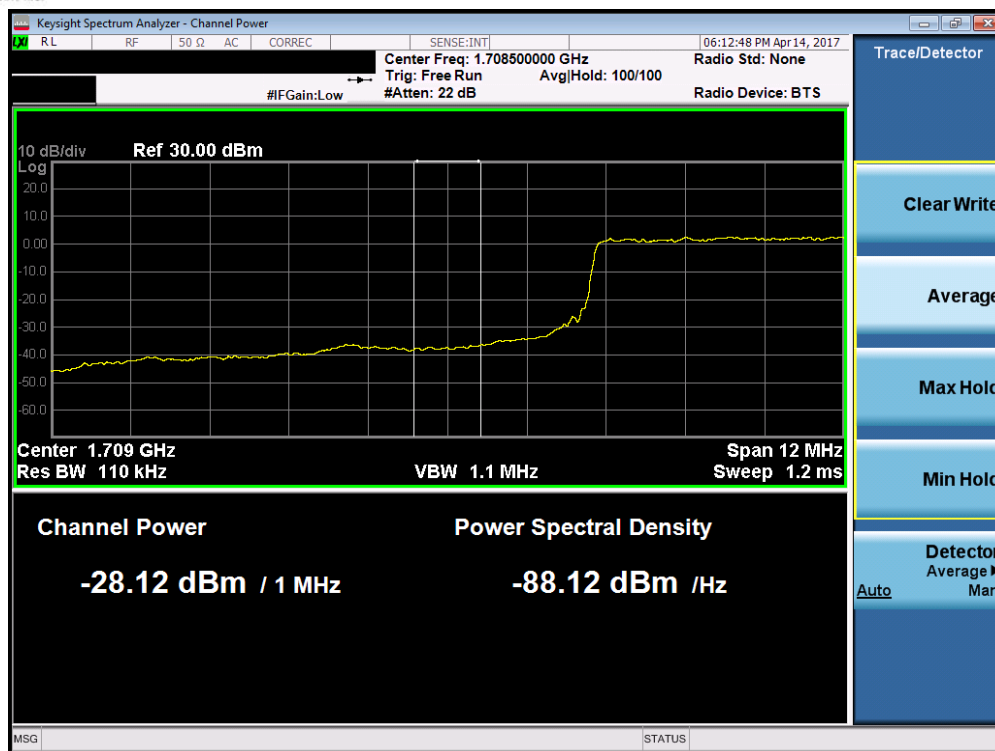


Plot 7-100. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)




Plot 7-101. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 67 of 112

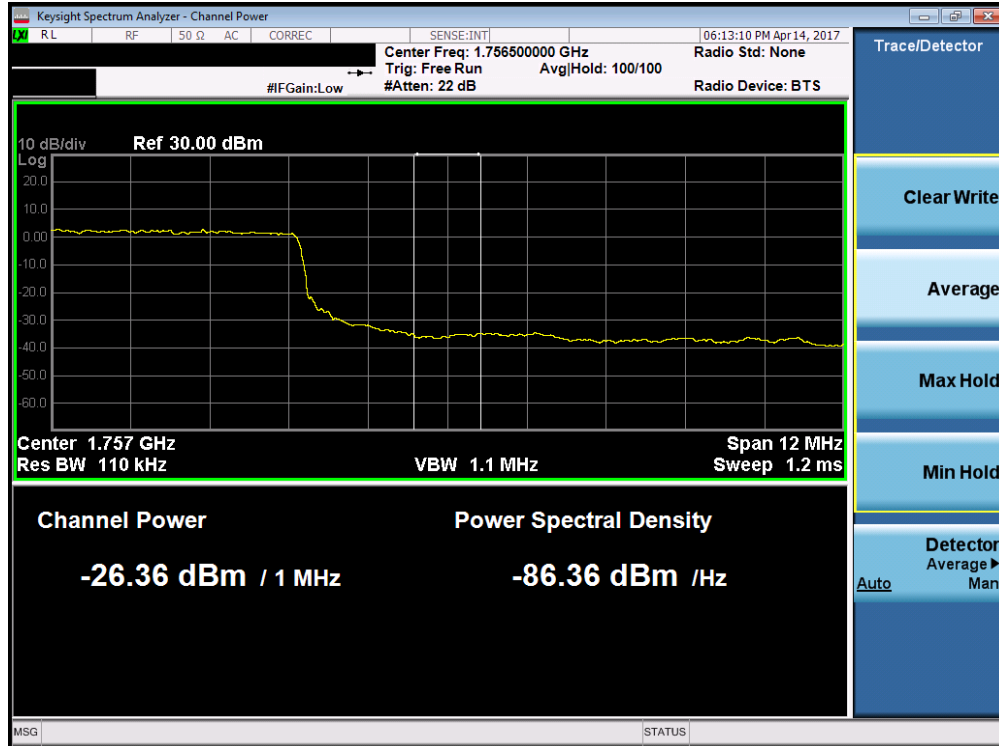


Plot 7-102. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

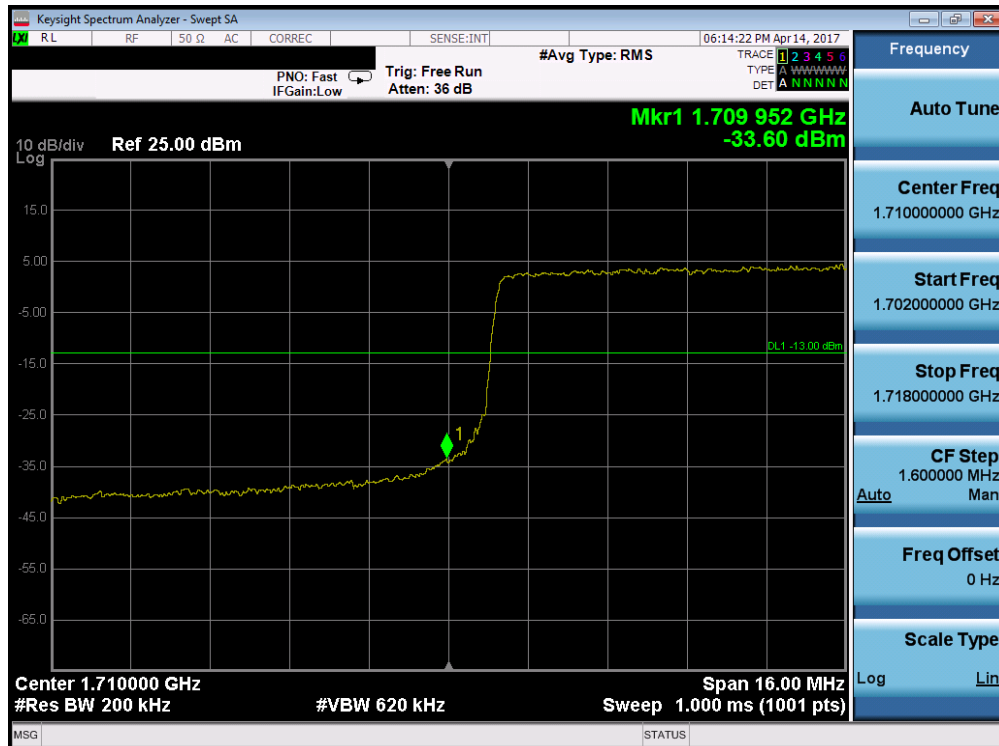


Plot 7-103. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 68 of 112

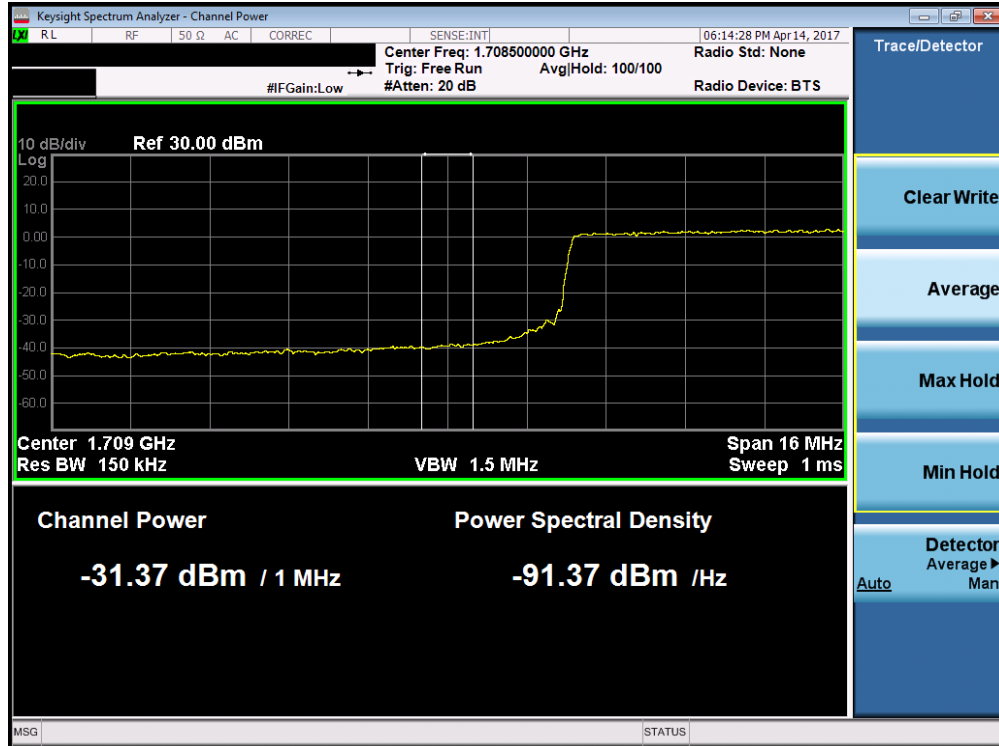


Plot 7-104. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

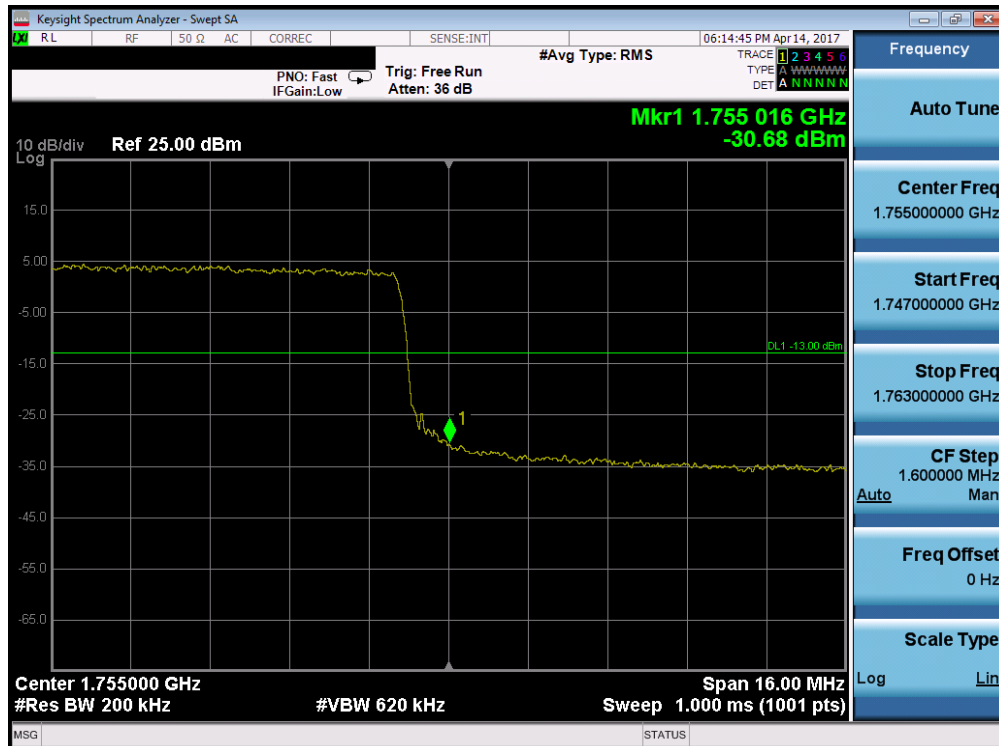


Plot 7-105. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 69 of 112

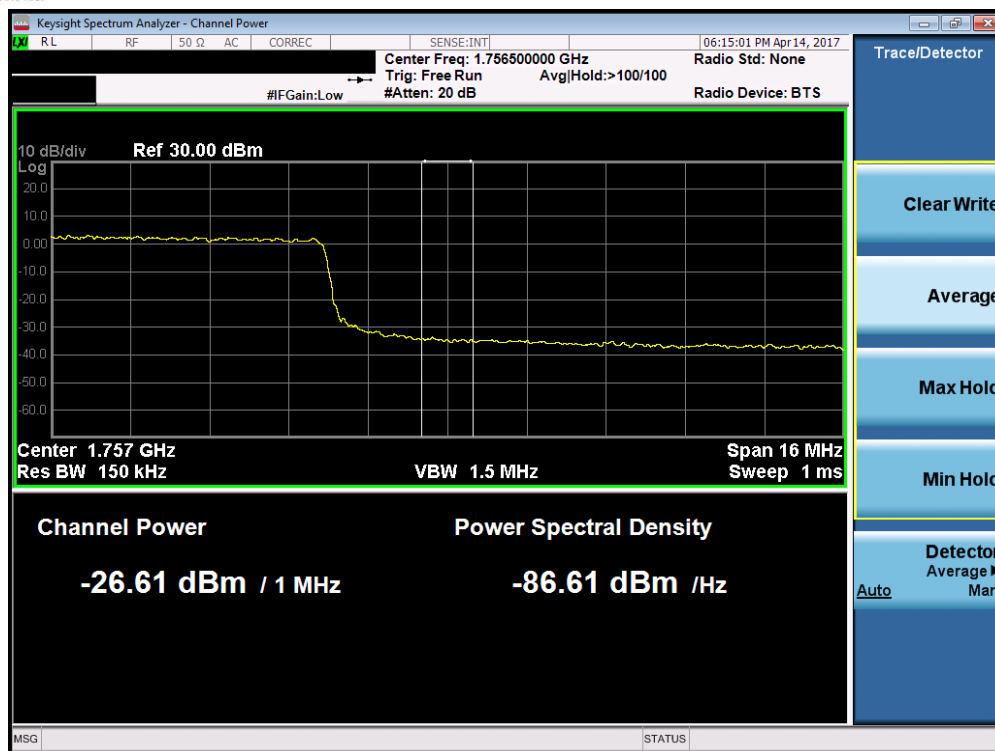


Plot 7-106. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

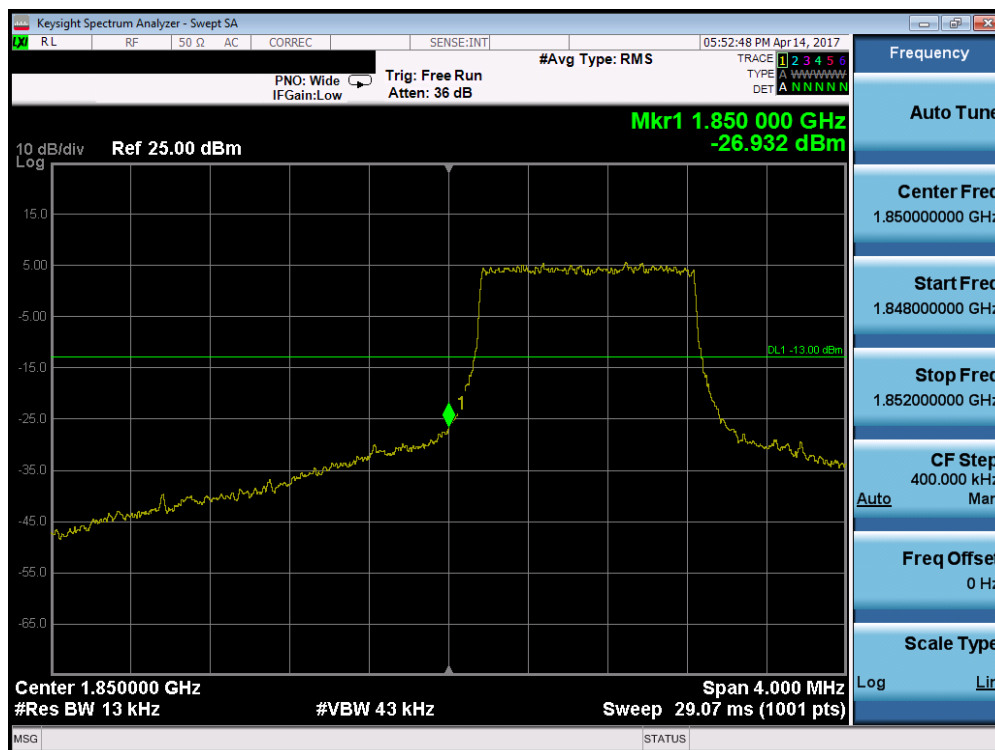

Plot 7-107. Lower Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 70 of 112

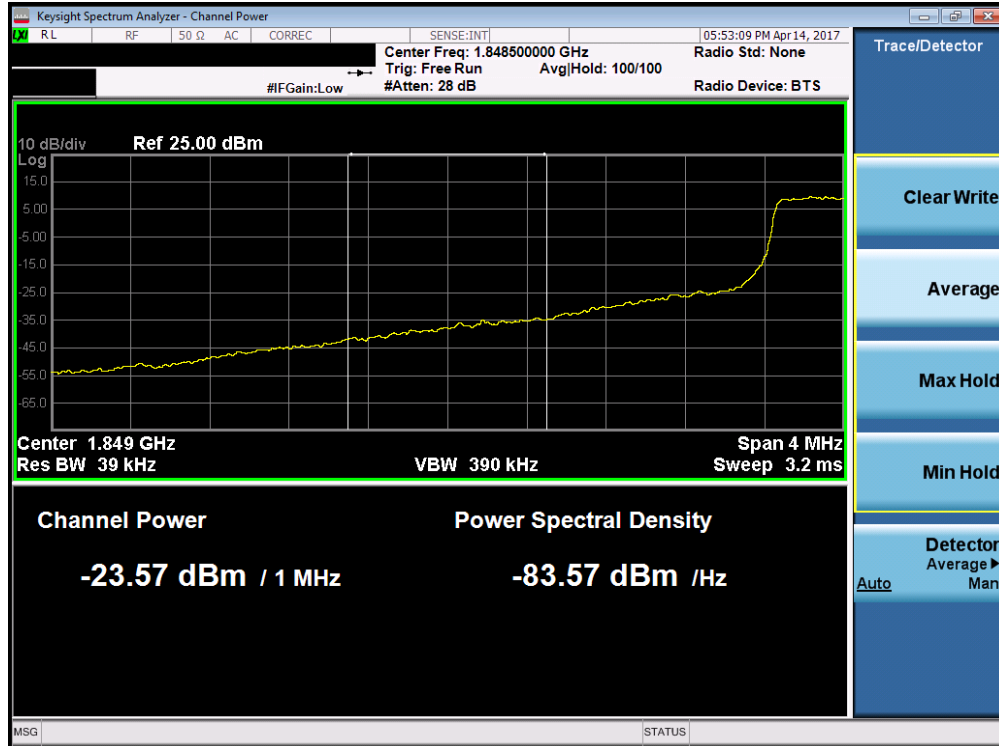


Plot 7-108. Lower Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)




Plot 7-109. Upper Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 71 of 112

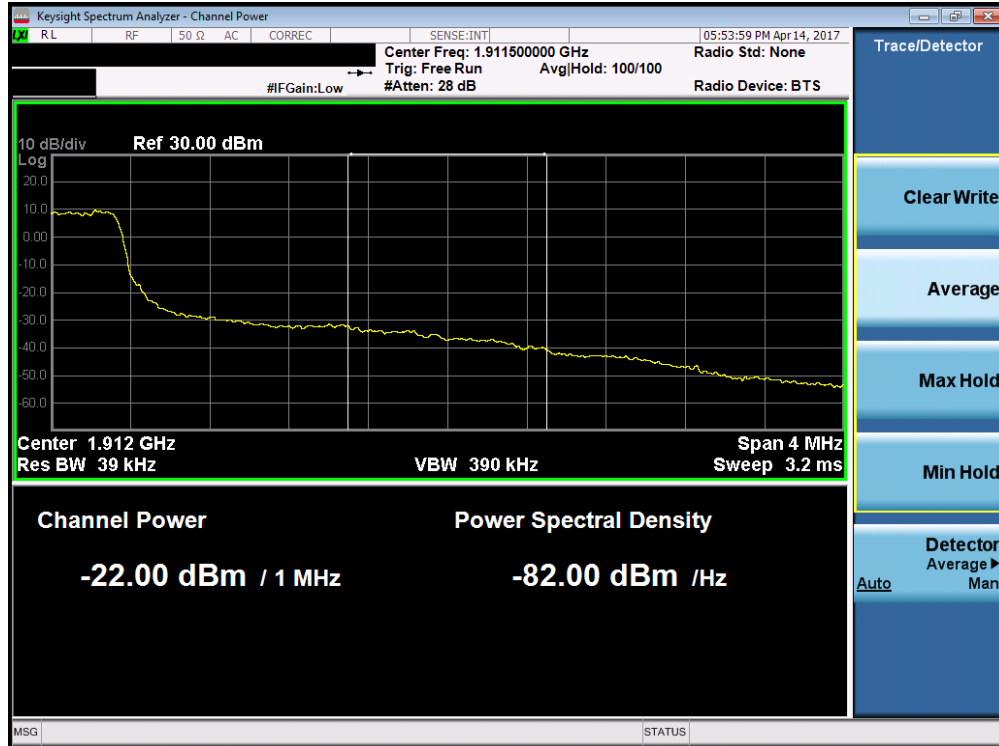


Plot 7-110. Upper Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

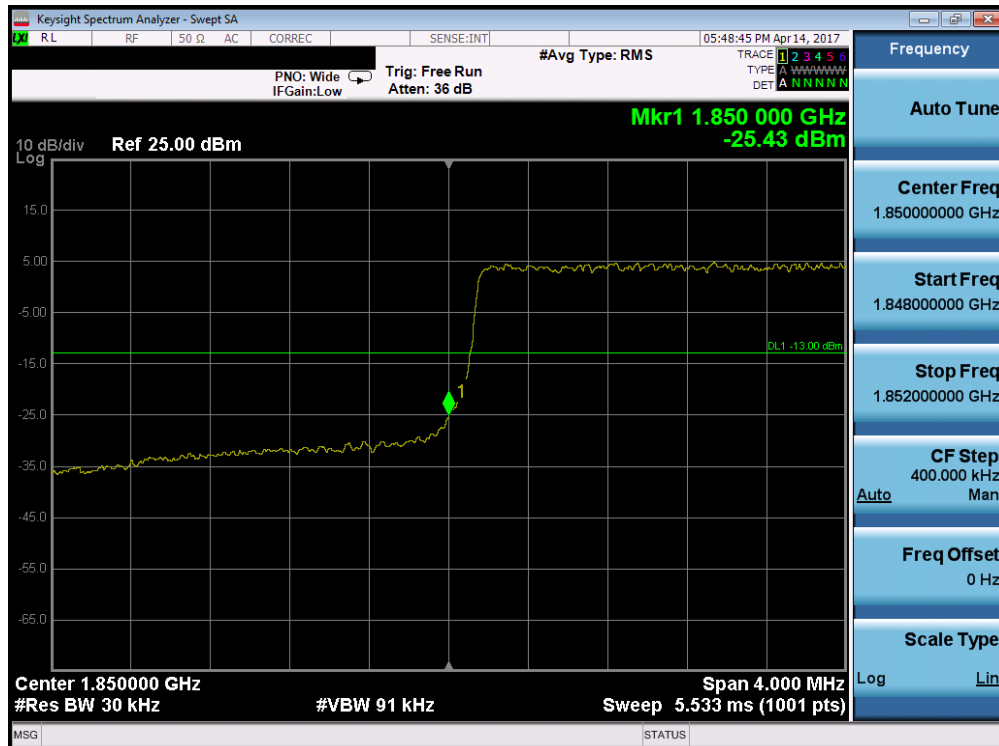


Plot 7-111. Lower Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 72 of 112

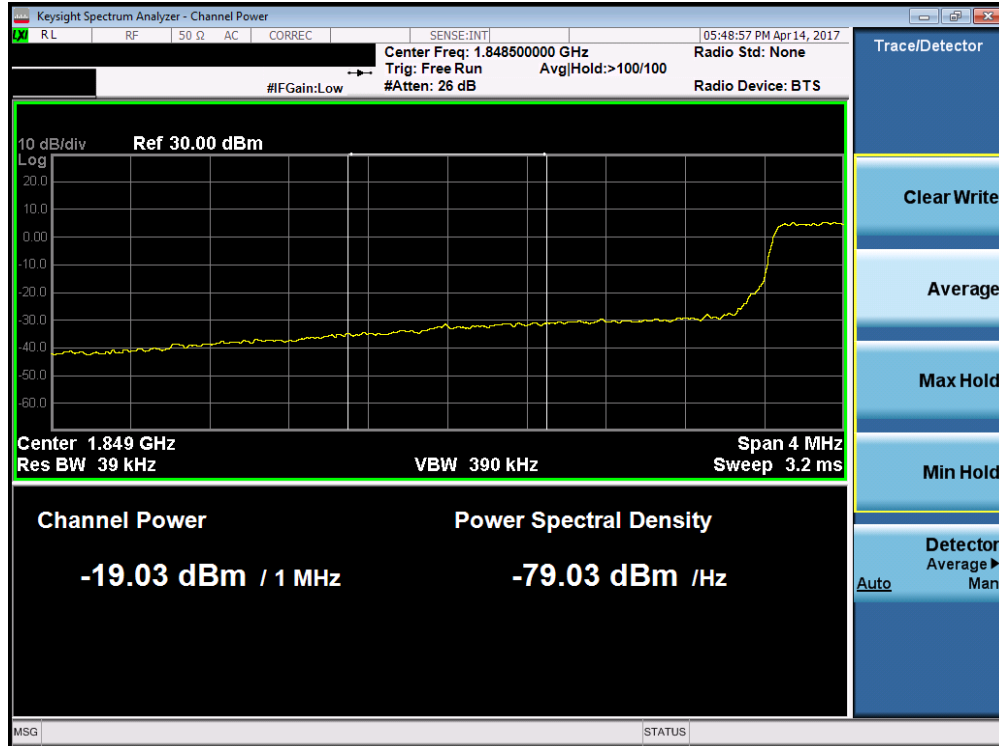


Plot 7-112. Lower Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

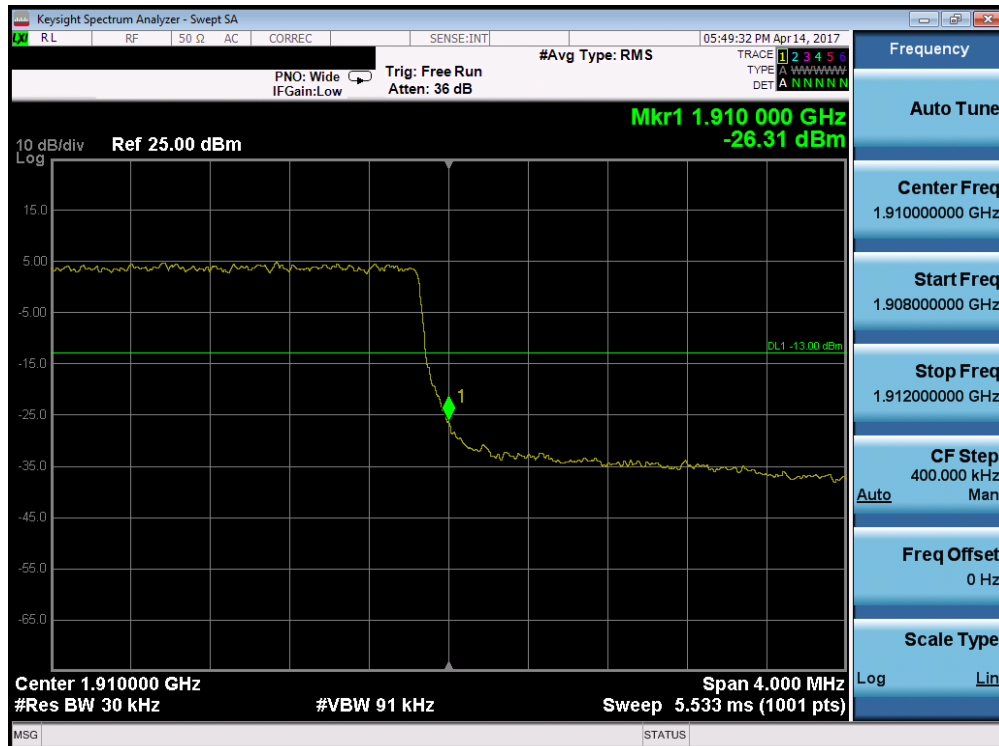


Plot 7-113. Upper Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 73 of 112

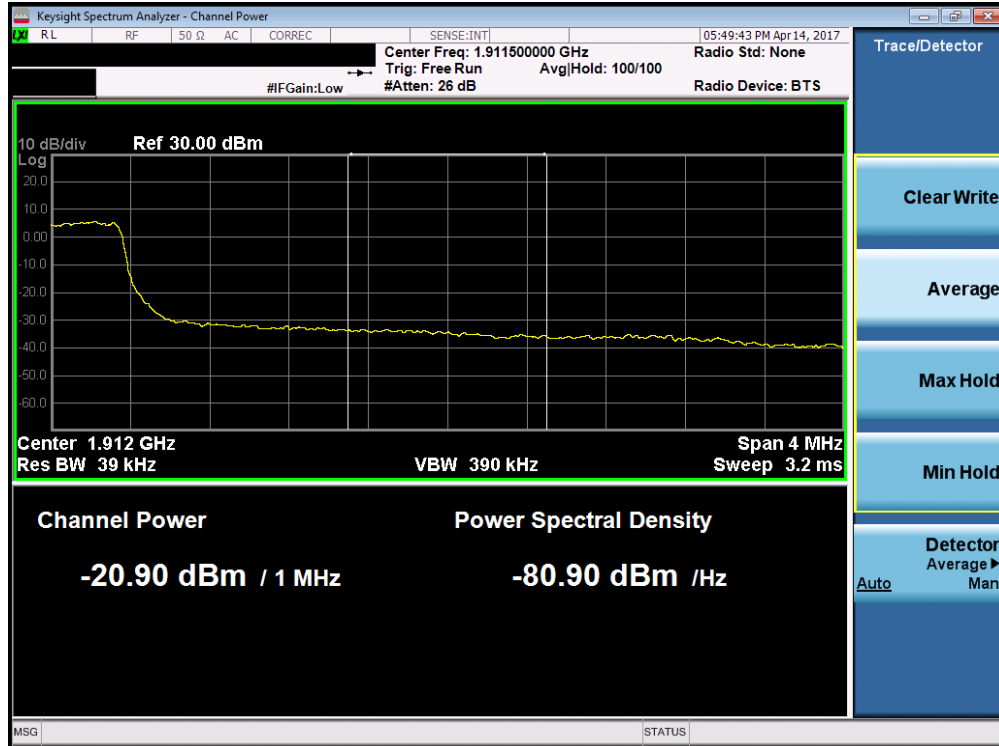


Plot 7-114. Upper Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

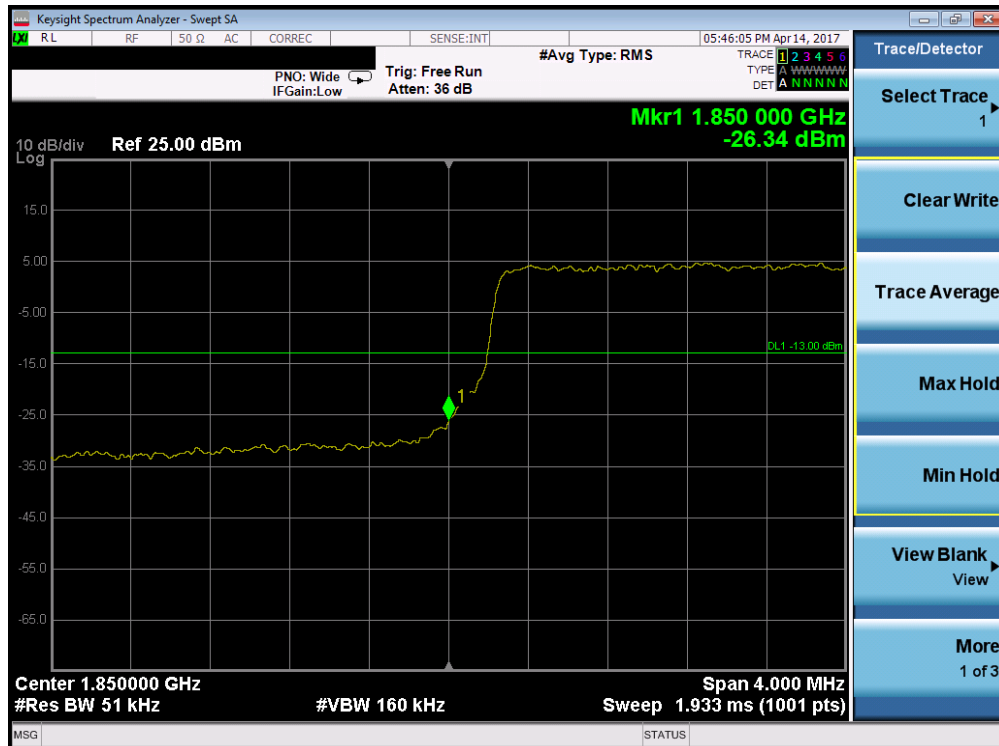


Plot 7-115. Lower Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 74 of 112

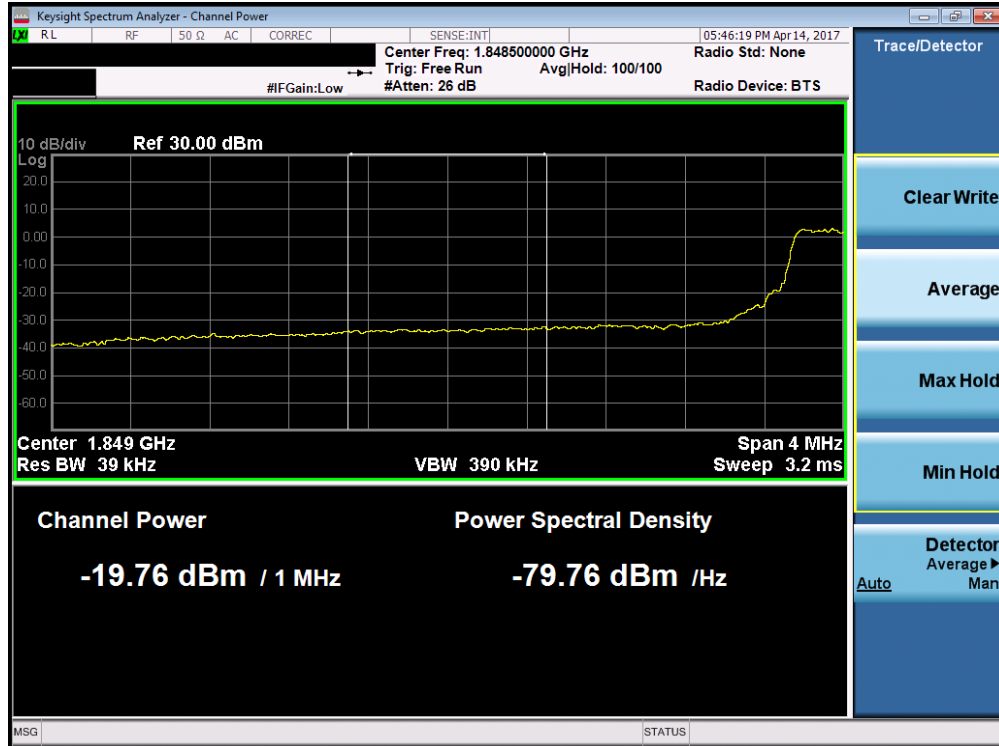


Plot 7-116. Lower Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

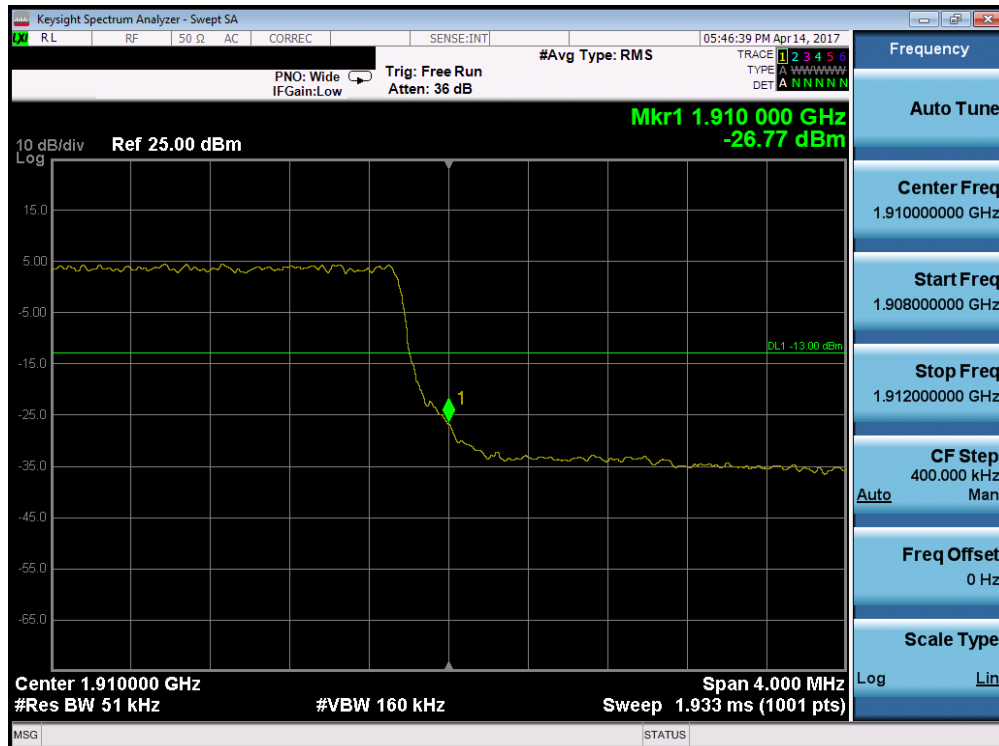


Plot 7-117. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 75 of 112

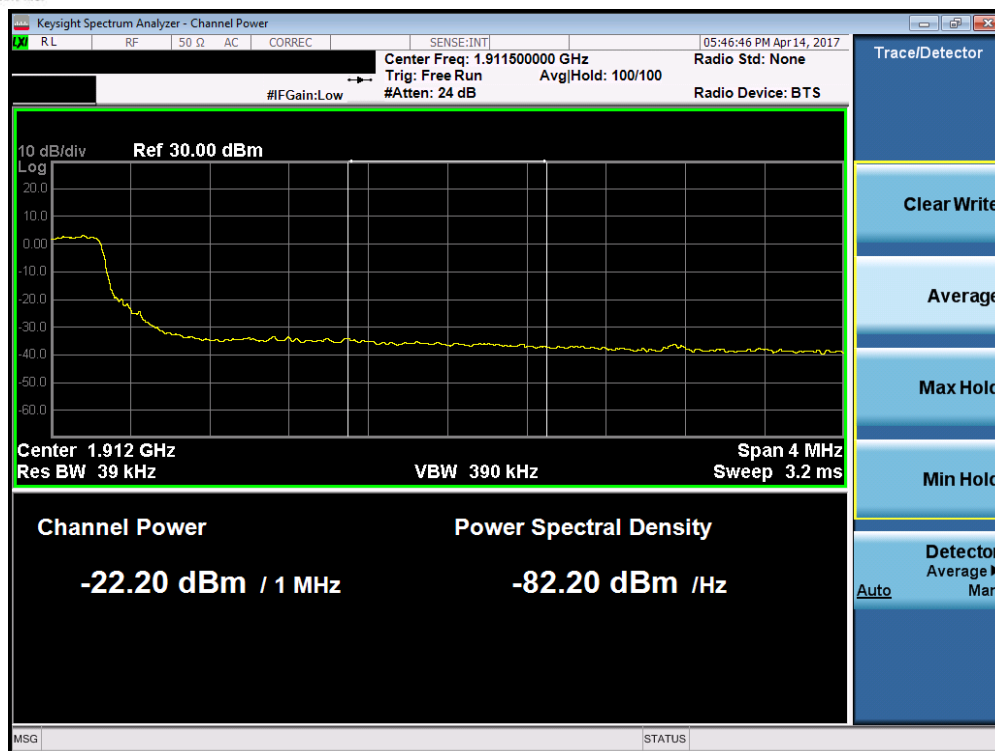


Plot 7-118. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

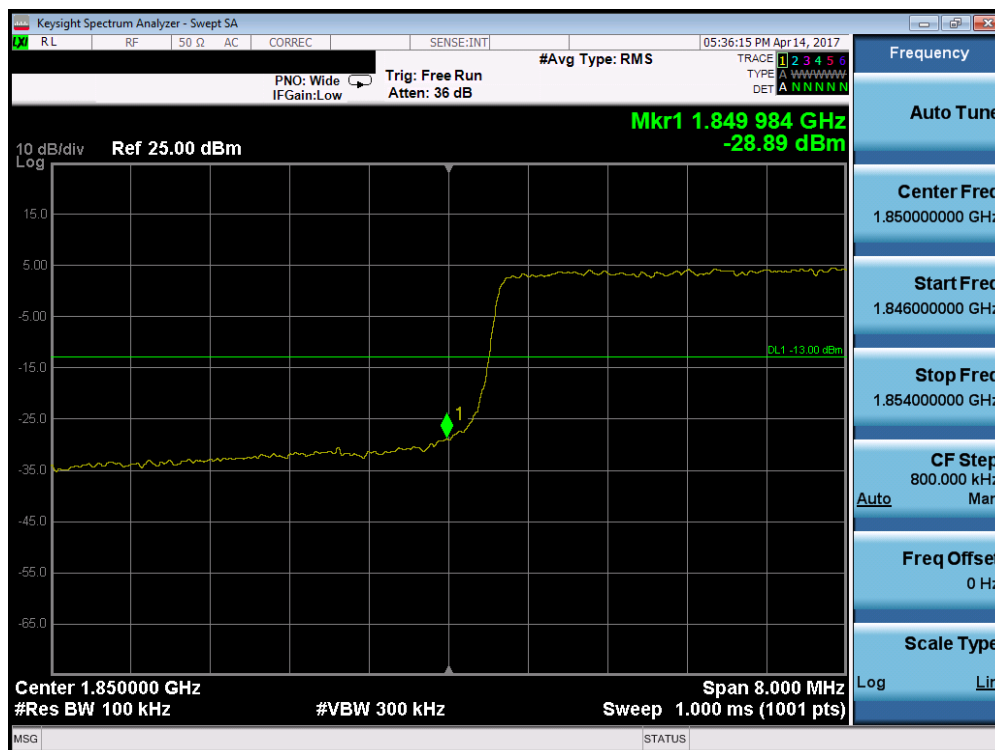

Plot 7-119. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 76 of 112

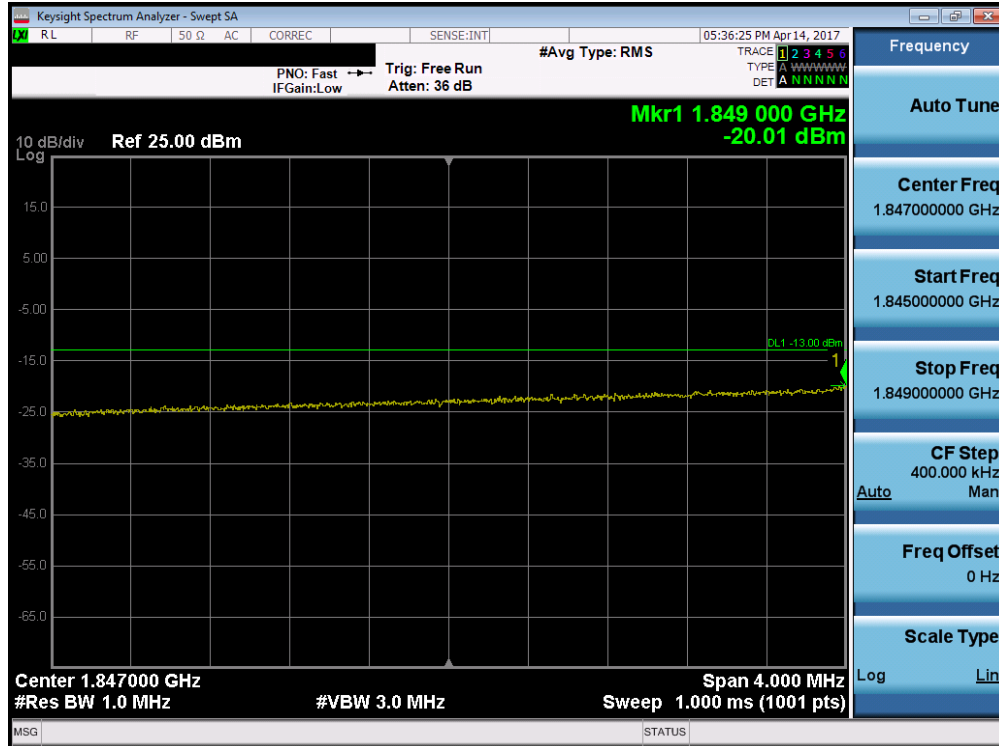


Plot 7-120. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)




Plot 7-121. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 77 of 112

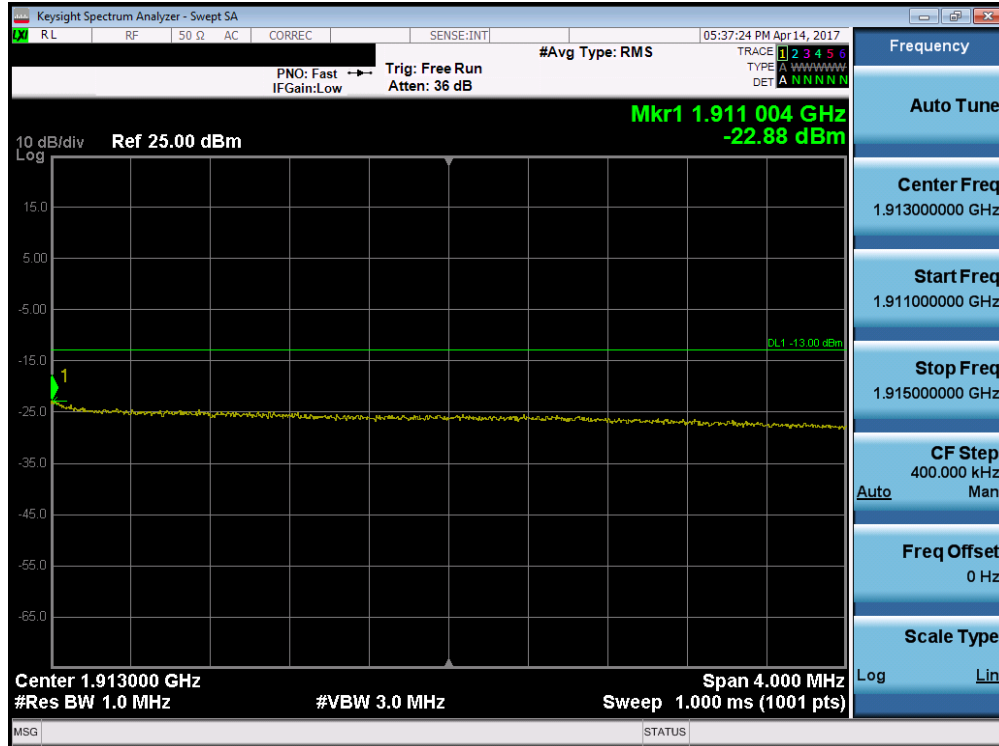


Plot 7-122. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

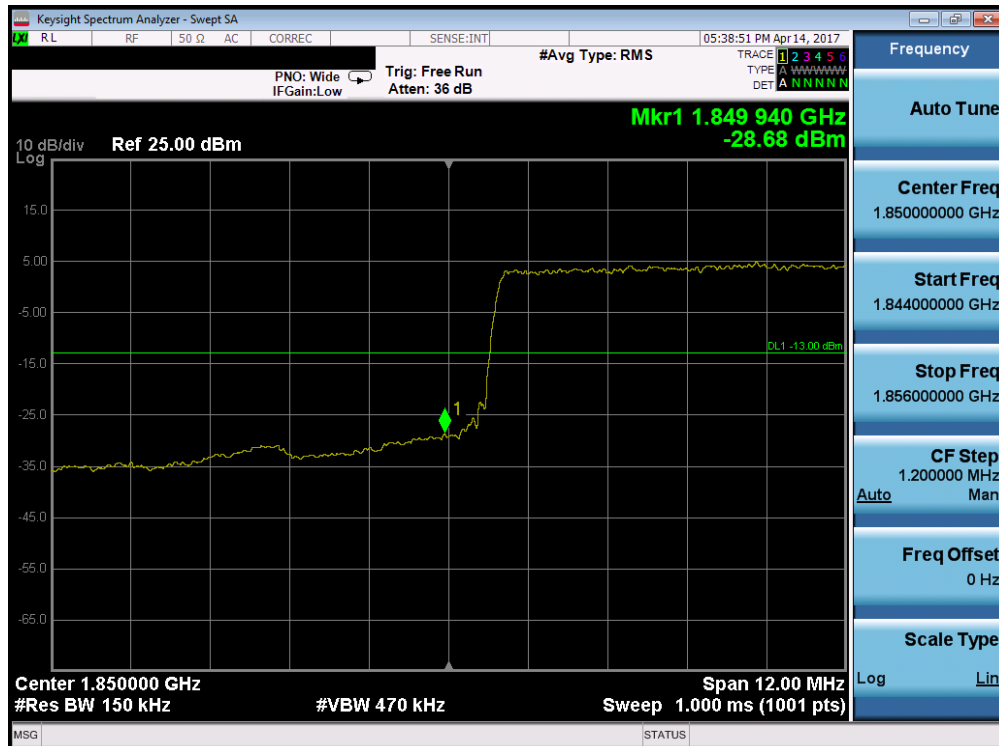


Plot 7-123. Lower Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 78 of 112

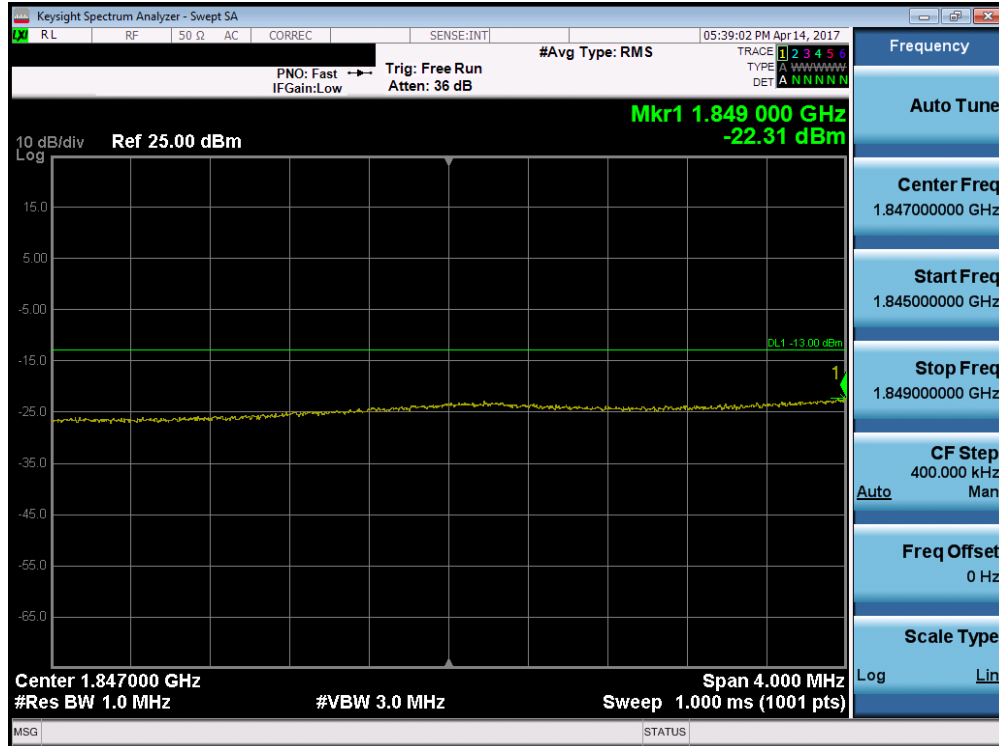


Plot 7-124. Lower Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

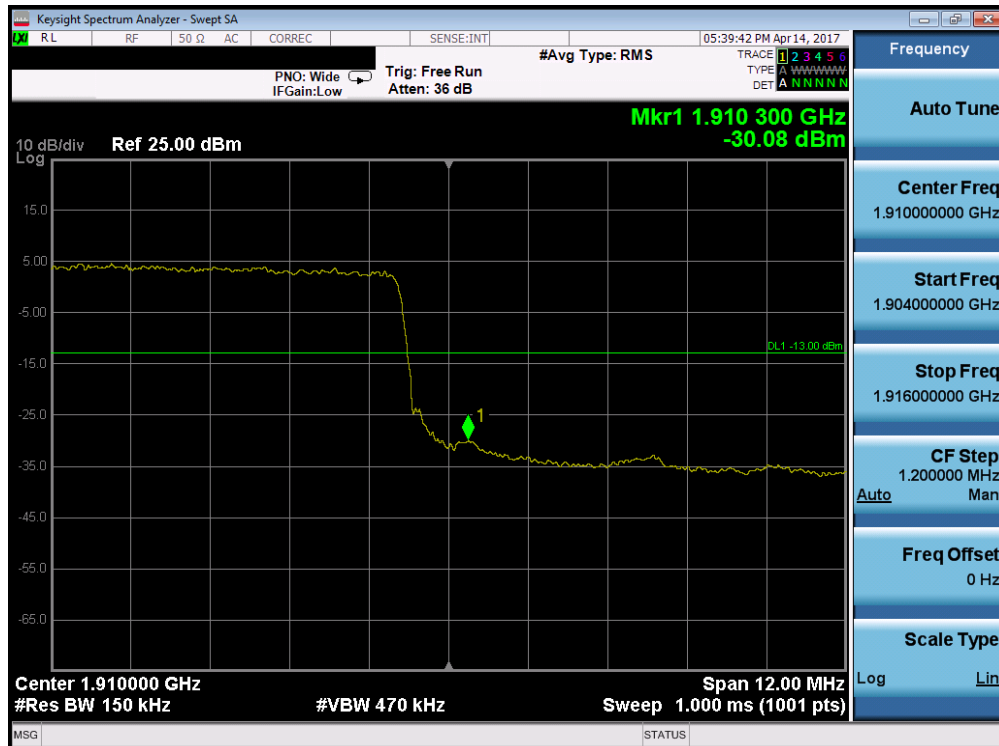


Plot 7-125. Upper Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 79 of 112	

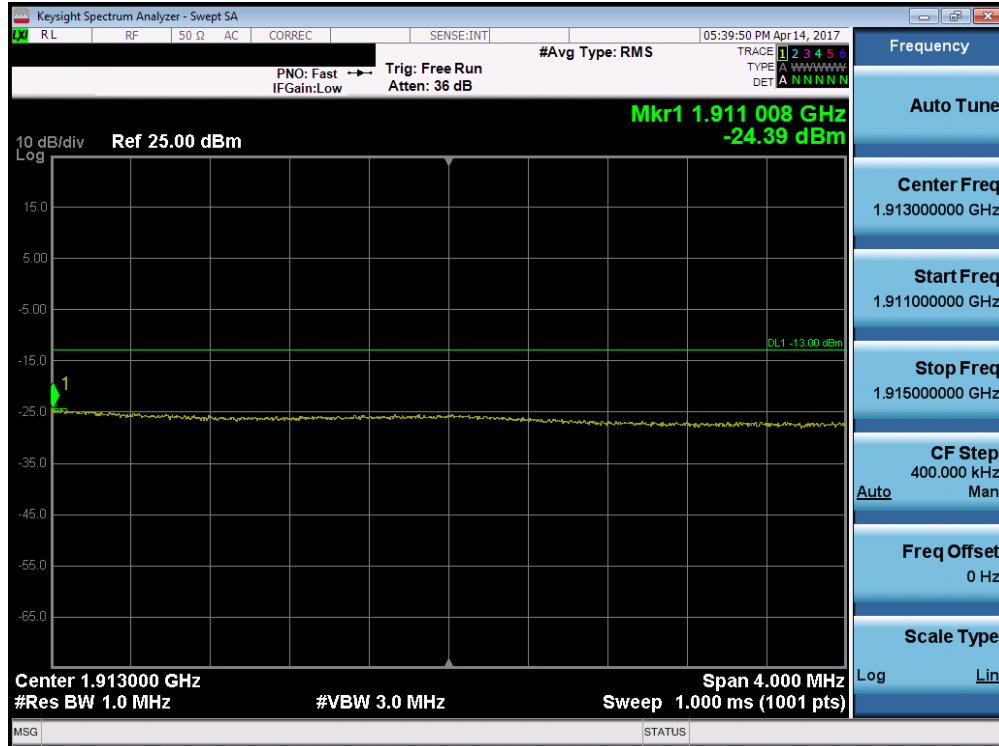

Plot 7-126. Upper Extended Band Edge Plot (Band 2 - 15.0MHz QPSK - RB Size 75)

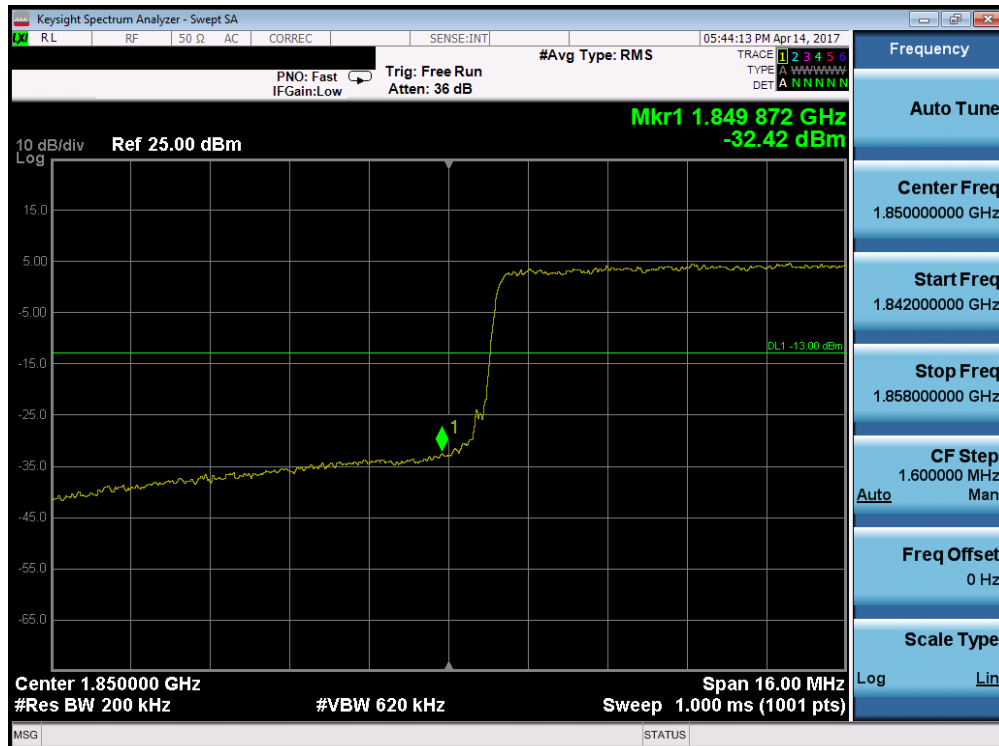

Plot 7-127. Lower Band Edge Plot (Band 2 - 20.0MHz QPSK - RB Size 100)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 80 of 112




Plot 7-128. Lower Extended Band Edge Plot (Band 2 - 20.0MHz QPSK - RB Size 100)



Plot 7-129. Upper Band Edge Plot (Band 2 - 20.0MHz QPSK - RB Size 100)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 81 of 112

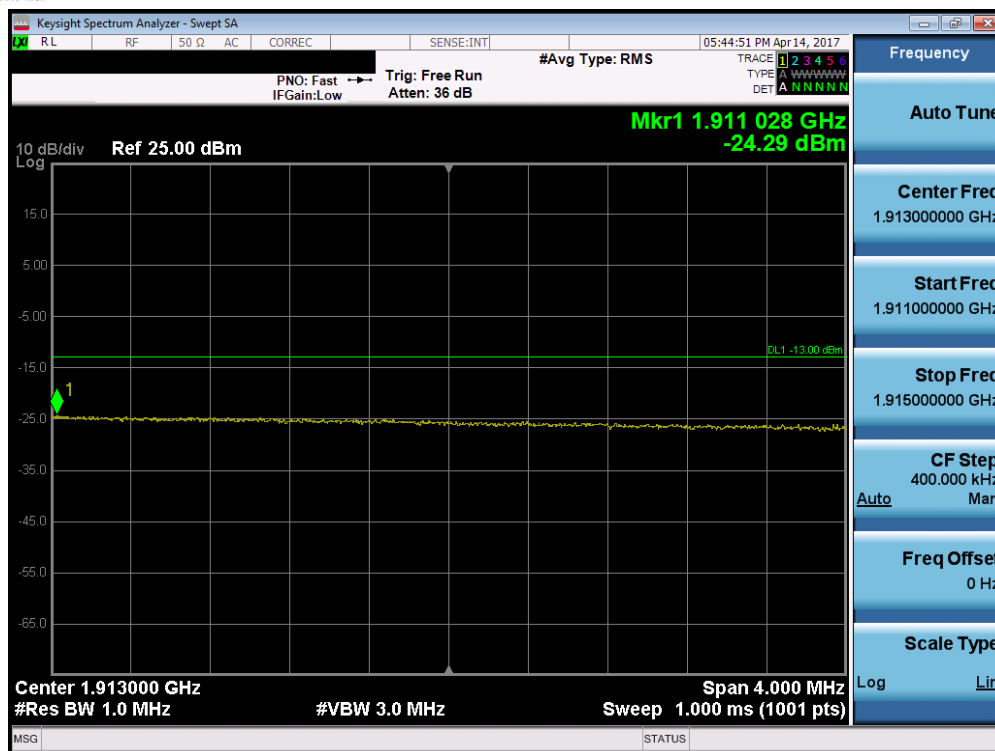

Plot 7-130. Upper Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 82 of 112

7.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



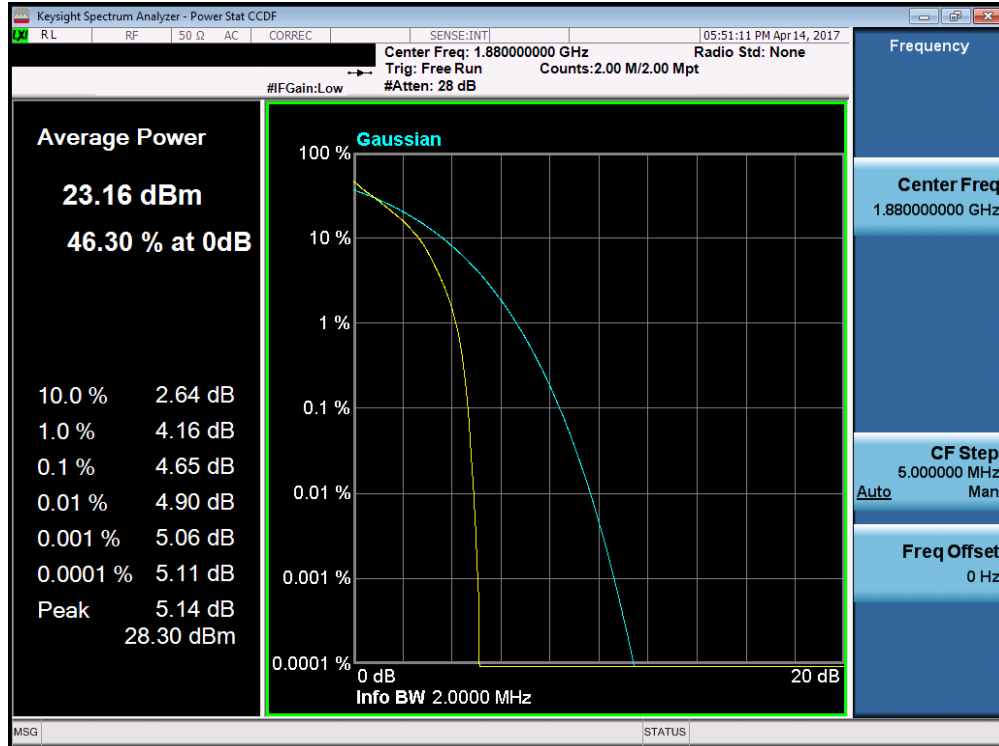


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 83 of 112	

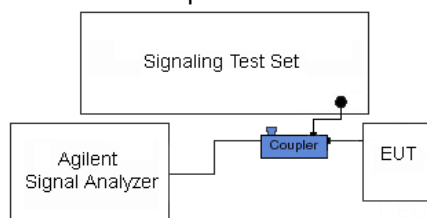


Plot 7-131. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

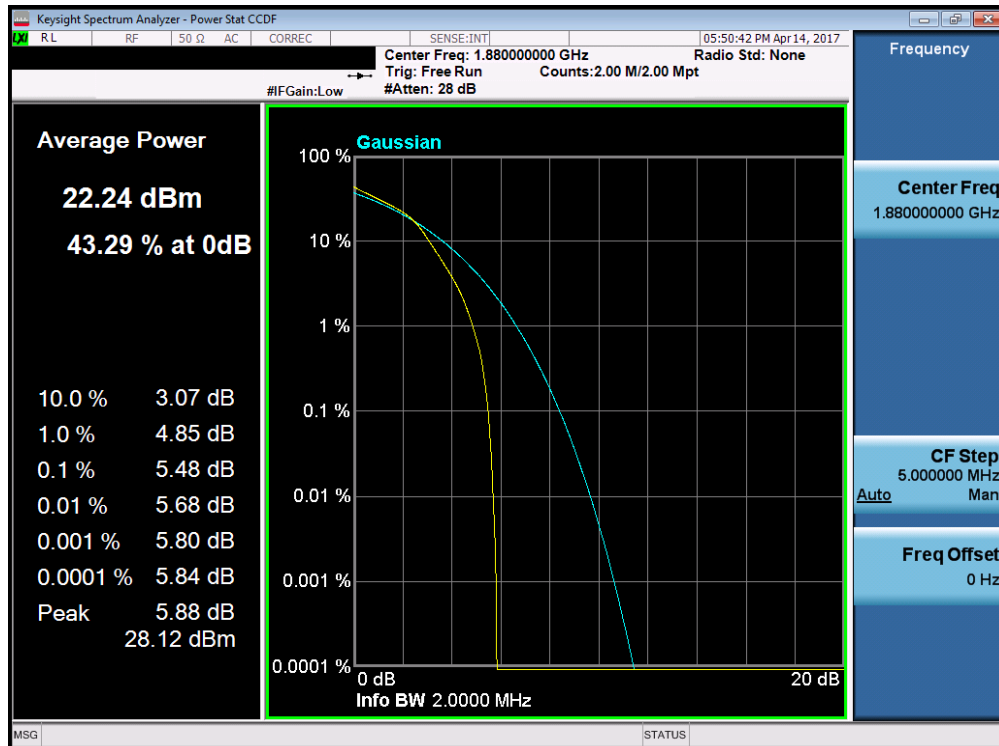


Plot 7-132. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 84 of 112

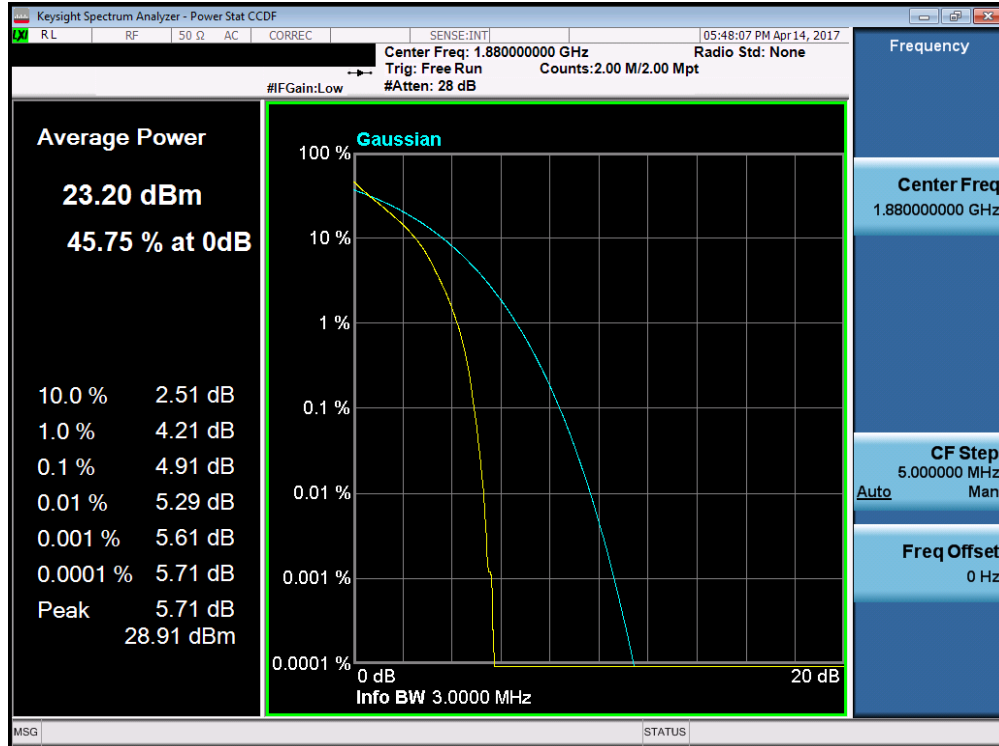


Plot 7-133. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

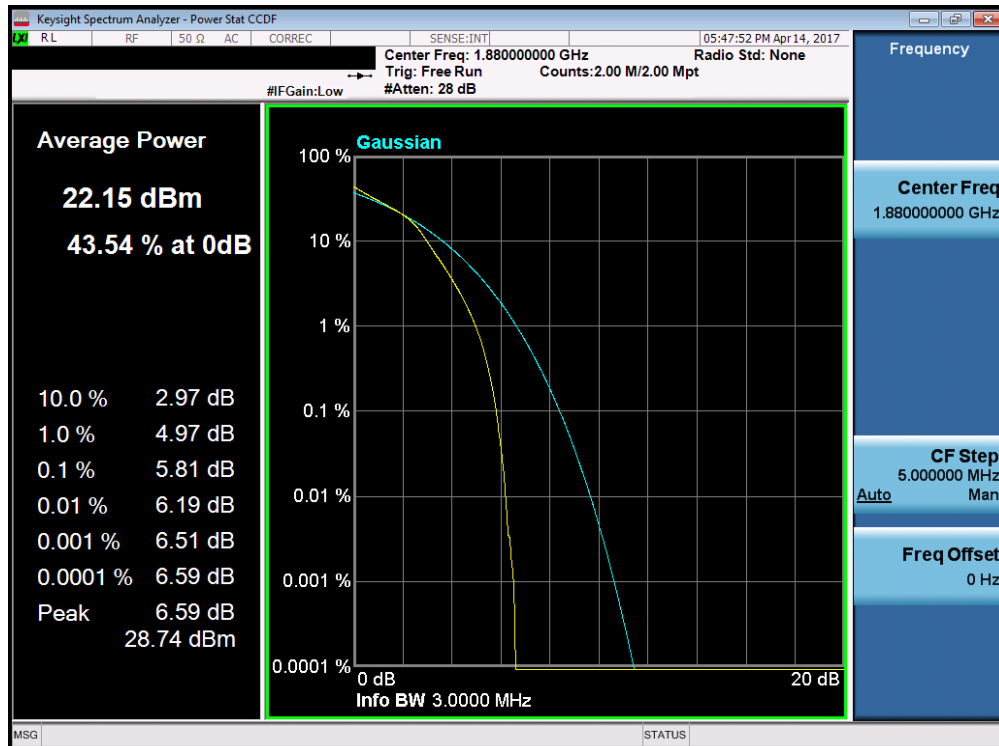


Plot 7-134. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 85 of 112	

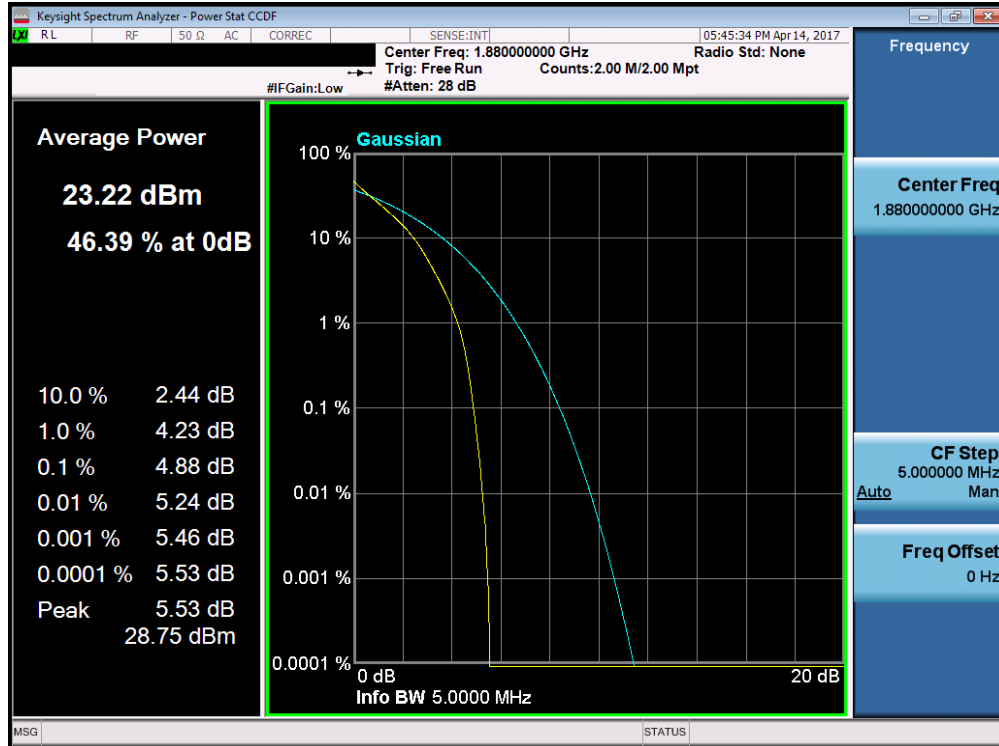


Plot 7-135. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

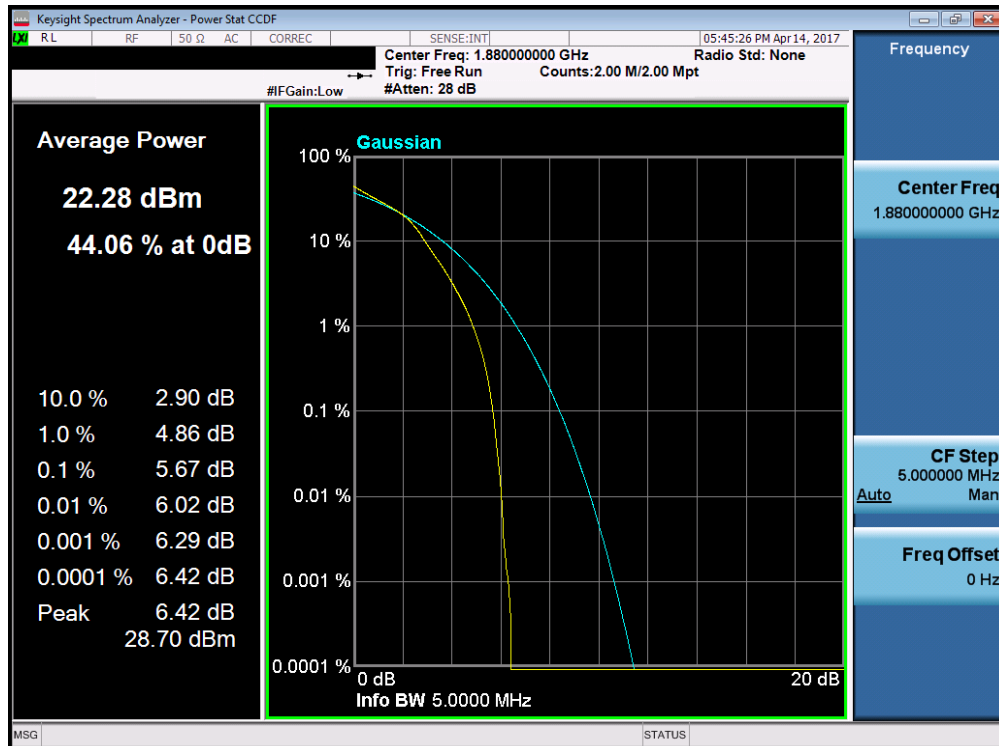


Plot 7-136. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 86 of 112

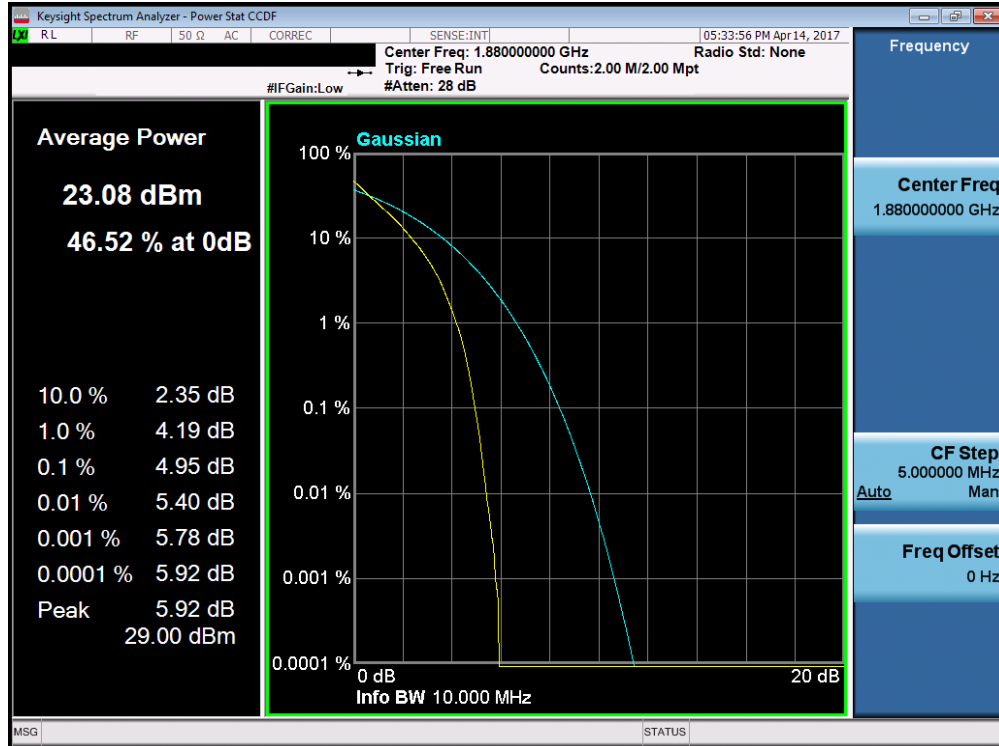


Plot 7-137. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

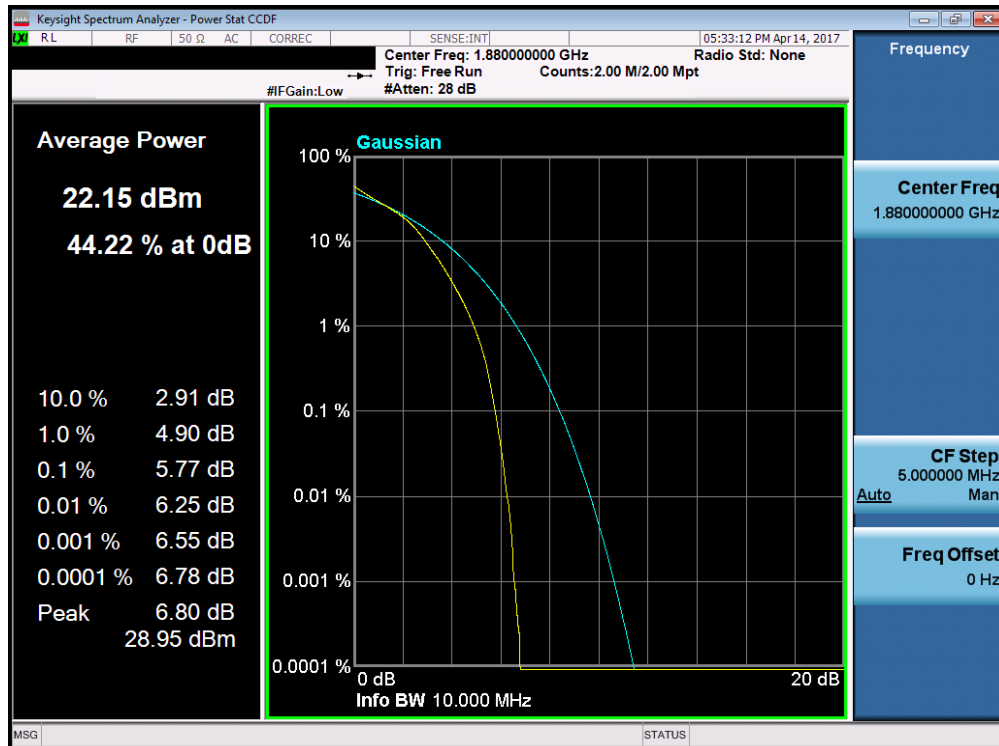


Plot 7-138. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 87 of 112	

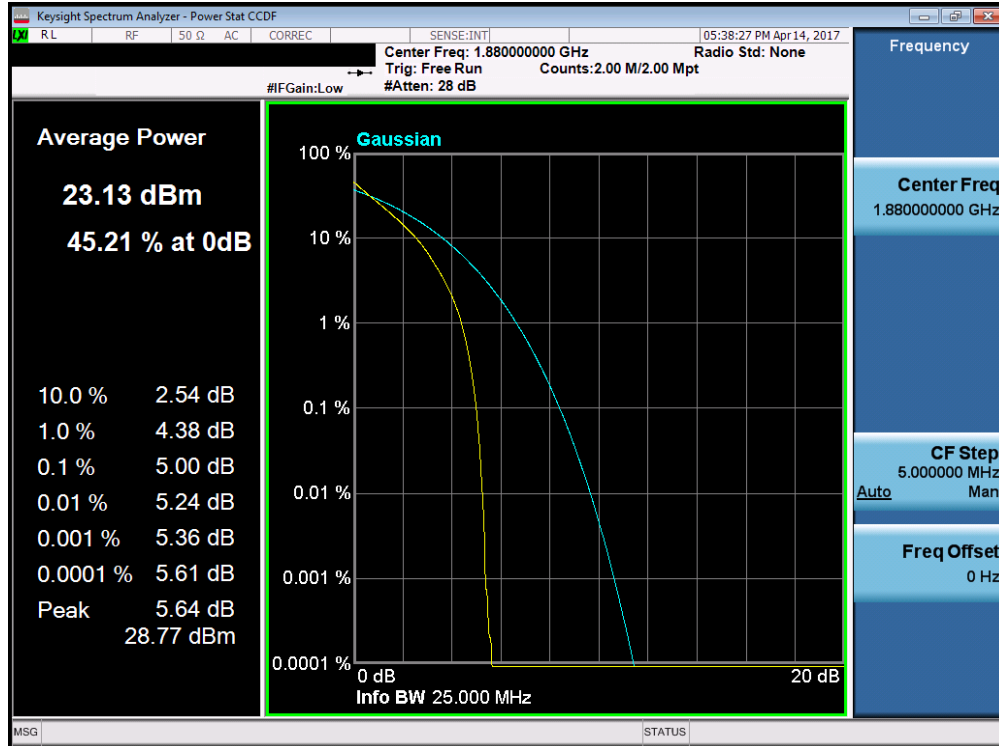


Plot 7-139. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

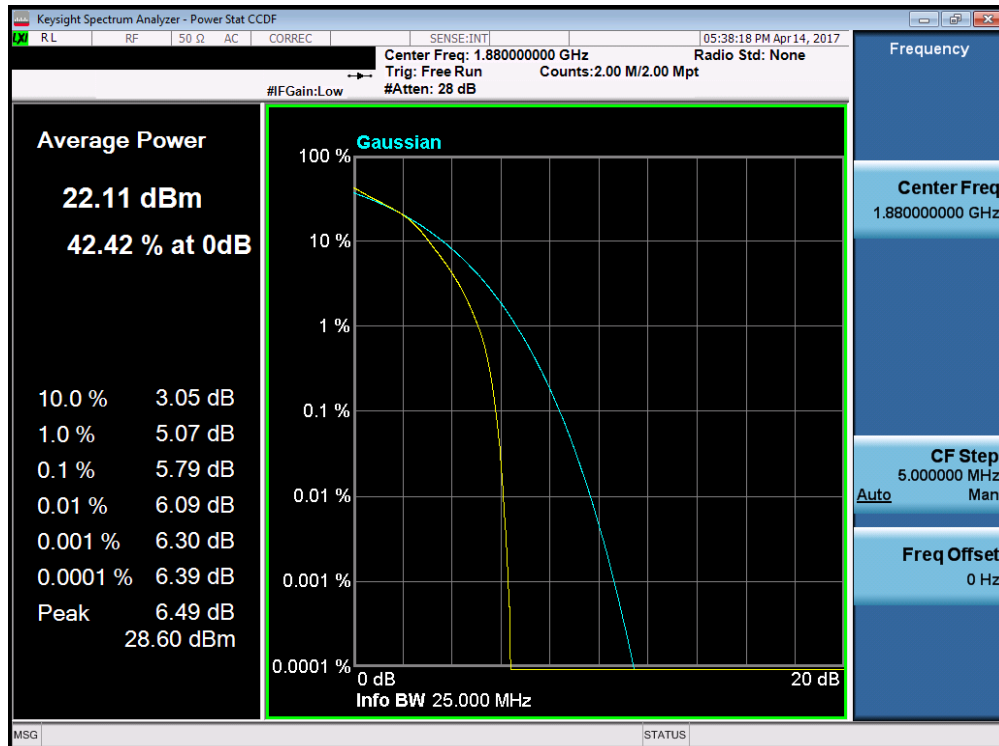


Plot 7-140. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 88 of 112	

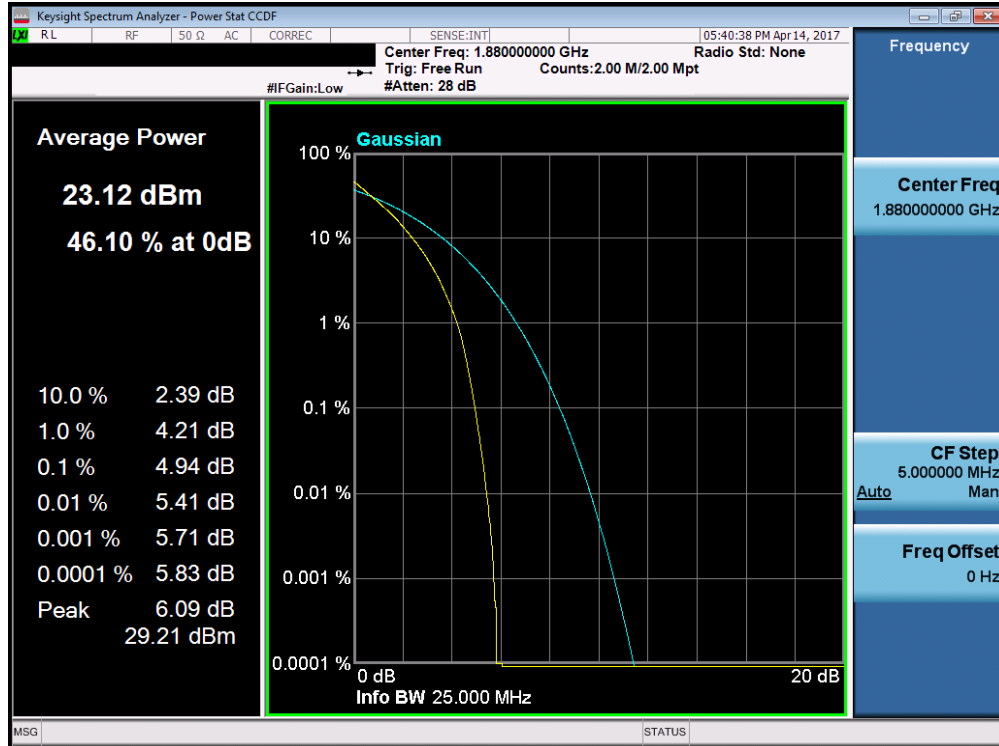

Plot 7-141. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

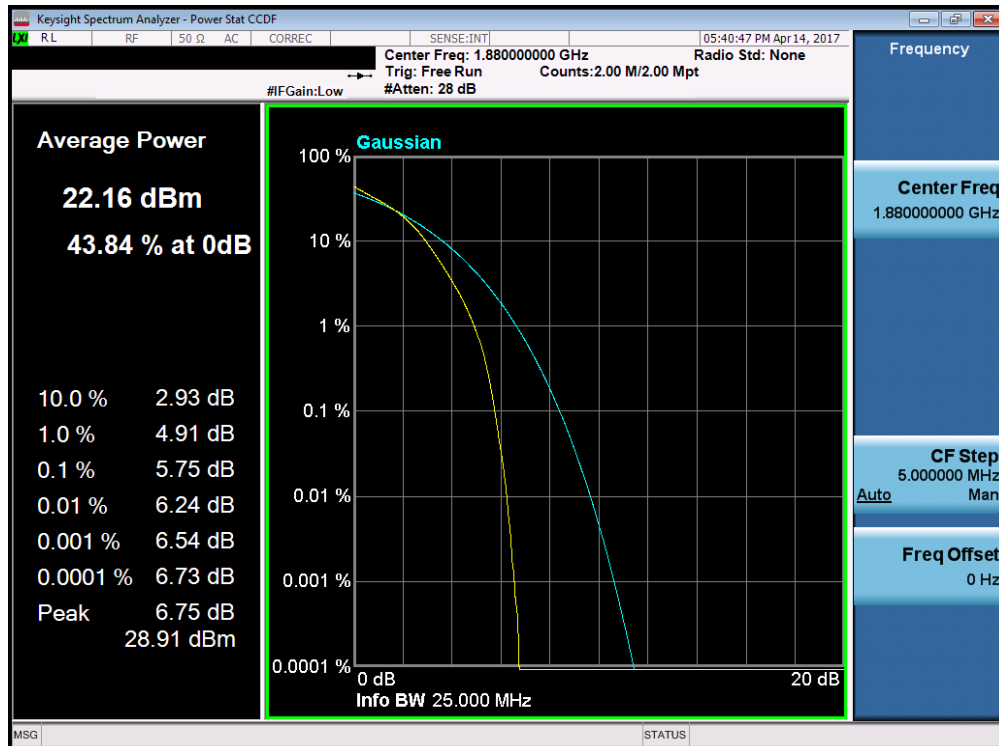

Plot 7-142. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: ZNFM322	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 89 of 112	

7.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(b.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 90 of 112

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

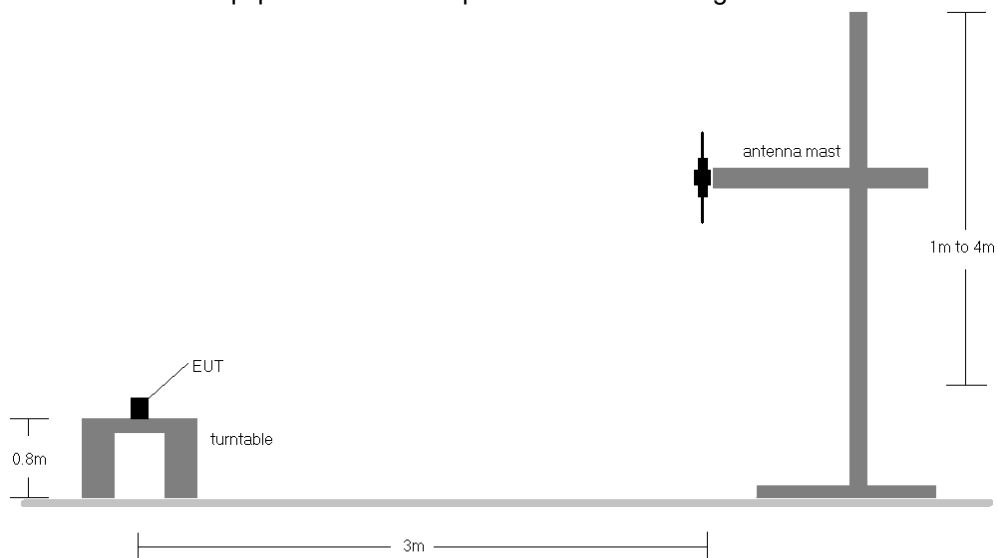


Figure 7-5. Radiated Test Setup <1GHz

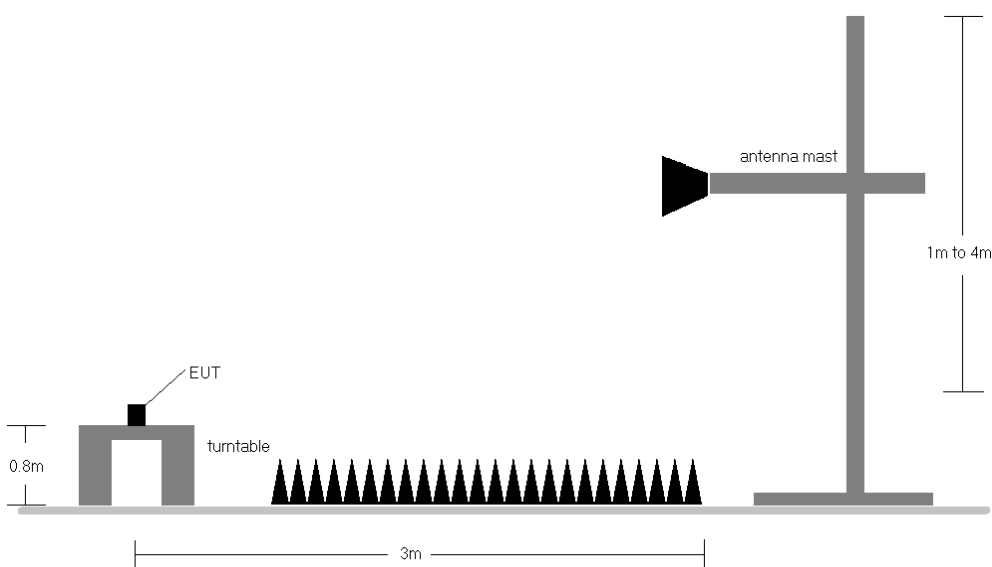


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 91 of 112

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
779.50	5	QPSK	H	150	0	1 / 24	21.63	-0.83	20.80	34.77	-13.97
782.00	5	QPSK	H	150	0	1 / 0	21.73	-0.82	20.91	34.77	-13.86
784.50	5	QPSK	H	150	0	1 / 0	21.76	-0.81	20.95	34.77	-13.82
779.50	5	16-QAM	H	150	0	1 / 24	20.50	-0.83	19.67	34.77	-15.10
782.00	10	QPSK	H	150	0	1 / 0	22.27	-0.82	21.45	34.77	-13.32
782.00	10	16-QAM	H	150	0	1 / 0	20.30	-0.82	19.48	34.77	-15.29
782.00	10	QPSK	V	150	41	1 / 0	21.15	-0.82	20.33	34.77	-14.44

Table 7-2. ERP Data (Band 13)



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	H	150	0	1 / 5	21.25	-0.65	20.60	38.45	-17.85
836.50	1.4	QPSK	H	150	0	1 / 5	21.67	-0.65	21.02	38.45	-17.43
848.30	1.4	QPSK	H	150	0	1 / 0	21.92	-0.65	21.27	38.45	-17.18
848.30	1.4	16-QAM	H	150	0	1 / 0	20.46	-0.65	19.81	38.45	-18.64
825.50	3	QPSK	H	150	0	1 / 14	21.38	-0.65	20.73	38.45	-17.72
836.50	3	QPSK	H	150	0	1 / 14	22.03	-0.65	21.38	38.45	-17.07
847.50	3	QPSK	H	150	0	1 / 0	22.05	-0.65	21.40	38.45	-17.05
847.50	3	16-QAM	H	150	0	1 / 0	21.01	-0.65	20.36	38.45	-18.09
826.50	5	QPSK	H	150	0	1 / 24	21.39	-0.65	20.74	38.45	-17.71
836.50	5	QPSK	H	150	0	1 / 24	22.12	-0.65	21.47	38.45	-16.98
846.50	5	QPSK	H	150	0	1 / 0	22.51	-0.65	21.86	38.45	-16.59
846.50	5	16-QAM	H	150	0	1 / 0	21.02	-0.65	20.37	38.45	-18.08
829.00	10	QPSK	H	150	0	1 / 49	21.94	-0.65	21.29	38.45	-17.16
836.50	10	QPSK	H	150	0	1 / 49	22.43	-0.65	21.78	38.45	-16.67
844.00	10	QPSK	H	150	0	1 / 49	22.25	-0.65	21.60	38.45	-16.85
844.00	10	16-QAM	H	150	0	1 / 49	21.70	-0.65	21.05	38.45	-17.40
846.50	5	QPSK	V	150	284	1 / 0	22.28	-0.65	21.63	38.45	-16.82

Table 7-3. ERP Data (Band 5)

FCC ID: ZNFM322	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 				Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset			Page 92 of 112



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	H	150	84	1 / 5	14.69	5.56	20.25	30.00	-9.75
1732.50	1.4	QPSK	H	150	86	1 / 0	14.50	5.41	19.91	30.00	-10.09
1754.30	1.4	QPSK	H	150	90	1 / 5	14.29	5.26	19.55	30.00	-10.45
1710.70	1.4	16-QAM	H	150	84	1 / 5	13.02	5.56	18.58	30.00	-11.42
1711.50	3	QPSK	H	150	87	1 / 0	14.56	5.55	20.11	30.00	-9.89
1732.50	3	QPSK	H	150	86	1 / 14	14.66	5.41	20.07	30.00	-9.93
1753.50	3	QPSK	H	150	92	1 / 14	14.24	5.26	19.50	30.00	-10.50
1711.50	3	16-QAM	H	150	87	1 / 0	13.08	5.55	18.63	30.00	-11.37
1712.50	5	QPSK	H	150	92	1 / 24	14.52	5.55	20.07	30.00	-9.93
1732.50	5	QPSK	H	150	90	1 / 0	14.49	5.41	19.90	30.00	-10.10
1752.50	5	QPSK	H	150	90	1 / 24	14.12	5.27	19.39	30.00	-10.61
1712.50	5	16-QAM	H	150	92	1 / 24	12.84	5.55	18.39	30.00	-11.61
1715.00	10	QPSK	H	150	90	1 / 49	15.08	5.53	20.61	30.00	-9.39
1732.50	10	QPSK	H	150	90	1 / 0	14.58	5.41	19.99	30.00	-10.01
1750.00	10	QPSK	H	150	90	1 / 0	14.38	5.29	19.67	30.00	-10.33
1715.00	10	16-QAM	H	150	90	1 / 0	13.37	5.53	18.90	30.00	-11.10
1717.50	15	QPSK	H	150	89	1 / 0	14.78	5.51	20.29	30.00	-9.71
1732.50	15	QPSK	H	150	90	1 / 0	14.41	5.41	19.82	30.00	-10.18
1747.50	15	QPSK	H	150	90	1 / 0	13.83	5.31	19.14	30.00	-10.86
1732.50	15	16-QAM	H	150	90	1 / 0	13.10	5.41	18.51	30.00	-11.49
1720.00	20	QPSK	H	150	89	1 / 99	14.71	5.49	20.20	30.00	-9.80
1732.50	20	QPSK	H	150	89	1 / 0	14.61	5.41	20.02	30.00	-9.98
1745.00	20	QPSK	H	150	92	1 / 0	14.63	5.32	19.95	30.00	-10.05
1732.50	20	16-QAM	H	150	89	1 / 0	13.90	5.41	19.31	30.00	-10.69
1715.00	10	QPSK	V	150	257	1 / 0	13.88	5.41	19.29	30.00	-10.71

Table 7-4. EIRP Data (Band 4)

FCC ID: ZNFM322	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 93 of 112

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	H	150	87	1 / 5	17.35	4.82	22.17	33.01	-10.84
1880.00	1.4	QPSK	H	150	90	1 / 5	18.02	4.74	22.76	33.01	-10.25
1909.30	1.4	QPSK	H	150	91	1 / 0	18.70	4.68	23.38	33.01	-9.63
1909.30	1.4	16-QAM	H	150	91	1 / 0	17.21	4.68	21.89	33.01	-11.12
1851.50	3	QPSK	H	150	90	1 / 0	17.52	4.82	22.34	33.01	-10.67
1880.00	3	QPSK	H	150	87	1 / 14	18.23	4.74	22.97	33.01	-10.04
1908.50	3	QPSK	H	150	87	1 / 14	18.67	4.68	23.35	33.01	-9.66
1908.50	3	16-QAM	H	150	87	1 / 14	17.35	4.68	22.03	33.01	-10.98
1852.50	5	QPSK	H	150	90	1 / 24	17.36	4.81	22.17	33.01	-10.84
1880.00	5	QPSK	H	150	93	1 / 24	18.19	4.74	22.93	33.01	-10.08
1907.50	5	QPSK	H	150	93	1 / 24	18.72	4.68	23.40	33.01	-9.61
1907.50	5	16-QAM	H	150	93	1 / 24	17.24	4.68	21.92	33.01	-11.09
1855.00	10	QPSK	H	150	92	1 / 49	17.98	4.81	22.79	33.01	-10.22
1880.00	10	QPSK	H	150	88	1 / 0	18.43	4.74	23.17	33.01	-9.84
1905.00	10	QPSK	H	150	90	1 / 49	18.89	4.68	23.57	33.01	-9.44
1905.00	10	16-QAM	H	150	90	1 / 49	17.08	4.68	21.76	33.01	-11.25
1857.50	15	QPSK	H	150	91	1 / 0	17.92	4.80	22.72	33.01	-10.29
1880.00	15	QPSK	H	150	90	1 / 74	18.44	4.74	23.18	33.01	-9.83
1902.50	15	QPSK	H	150	90	1 / 0	18.75	4.69	23.44	33.01	-9.57
1902.50	15	16-QAM	H	150	90	1 / 0	17.95	4.69	22.64	33.01	-10.37
1860.00	20	QPSK	H	150	84	1 / 99	18.29	4.79	23.08	33.01	-9.93
1880.00	20	QPSK	H	150	90	1 / 99	18.34	4.74	23.08	33.01	-9.93
1900.00	20	QPSK	H	150	88	1 / 99	18.67	4.69	23.36	33.01	-9.65
1900.00	20	16-QAM	H	150	88	1 / 99	17.94	4.69	22.63	33.01	-10.38
1905.00	10	QPSK	V	150	0	1 / 0	14.36	4.87	19.23	33.01	-13.78

Table 7-5. EIRP Data (Band 2)

FCC ID: ZNFM322	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 94 of 112

7.7 Radiated Spurious Emissions Measurements

\$2.1053 \$22.917(a) \$24.238(a) \$27.53(c) \$27.53(f) \$27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 95 of 112

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

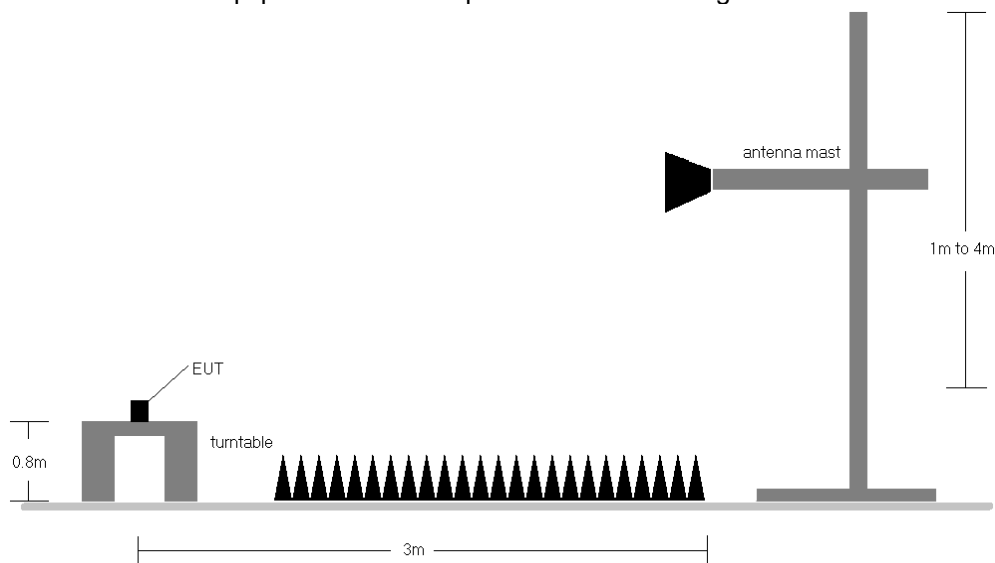


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 96 of 112

OPERATING FREQUENCY: 782.00 MHz
 CHANNEL: 23230
 MEASURED OUTPUT POWER: 21.45 dBm = 0.140 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.45 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
2346.00	H	-	-	-73.88	7.33	-66.55	88.0
3128.00	H	-	-	-70.41	7.20	-63.21	84.7

Table 7-6. Radiated Spurious Data (Band 13 – Mid Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	H	-	-	-76.55	6.57	-69.98	-30.0

Table 7-7. Radiated Spurious Data (Band 13 – 1559-1610MHz Band)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 97 of 112

OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 20425
 MEASURED OUTPUT POWER: 20.74 dBm = 0.119 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.74 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1653.00	H	112	172	-72.90	6.70	-66.20	86.9
2479.50	H	-	-	-73.61	7.54	-66.07	86.8

Table 7-8. Radiated Spurious Data (Band 5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 21.47 dBm = 0.140 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.47 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.00	H	120	187	-73.27	6.70	-66.57	88.0
2509.50	H	195	334	-72.39	7.63	-64.76	86.2
3346.00	H	-	-	-70.48	7.51	-62.97	84.4

Table 7-9. Radiated Spurious Data (Band 5 – Mid Channel)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 98 of 112

OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 20625
 MEASURED OUTPUT POWER: 21.86 dBm = 0.153 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.86 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.00	H	187	308	-74.43	6.70	-67.74	89.6
2539.50	H	-	-	-73.41	7.60	-65.81	87.7

Table 7-10. Radiated Spurious Data (Band 5 – High Channel)

OPERATING FREQUENCY: 1715.00 MHz
 CHANNEL: 20000
 MEASURED OUTPUT POWER: 20.61 dBm = 0.115 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.61 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3430.00	H	-	-	-70.57	9.87	-60.69	81.3
5145.00	H	-	-	-67.84	10.75	-57.08	77.7

Table 7-11. Radiated Spurious Data (Band 4 – Low Channel)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 99 of 112

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 19.99 dBm = 0.100 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.99 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.00	H	-	-	-70.41	9.91	-60.50	80.5
5197.50	H	-	-	-67.91	10.75	-57.17	77.2

Table 7-12. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY: 1750.00 MHz
 CHANNEL: 20350
 MEASURED OUTPUT POWER: 19.67 dBm = 0.093 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.67 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3500.00	H	-	-	-70.27	9.95	-60.32	80.0
5250.00	H	-	-	-67.47	10.71	-56.76	76.4

Table 7-13. Radiated Spurious Data (Band 4 – High Channel)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 100 of 112

OPERATING FREQUENCY: 1855.00 MHz
 CHANNEL: 18650
 MEASURED OUTPUT POWER: 22.79 dBm = 0.190 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.79 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3710.00	H	-	-	-68.75	9.51	-59.24	82.0
5565.00	H	-	-	-67.99	11.06	-56.93	79.7

Table 7-14. Radiated Spurious Data (Band 2 – Low Channel)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 23.17 dBm = 0.208 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.17 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	-	-	-68.11	9.39	-58.73	81.9
5640.00	H	-	-	-67.93	11.22	-56.71	79.9

Table 7-15. Radiated Spurious Data (Band 2 – Mid Channel)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 101 of 112

OPERATING FREQUENCY: 1905.00 MHz
 CHANNEL: 19150
 MEASURED OUTPUT POWER: 23.57 dBm = 0.228 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.57 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3810.00	H	-	-	-67.94	9.31	-58.64	82.2
5715.00	H	-	-	-67.33	11.33	-56.00	79.6

Table 7-16. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 102 of 112

7.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-D-2010

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 103 of 112	

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.3

03/24/2017

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

Band 13 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 782,000,000 Hz

CHANNEL: 23230

REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	782,000,258	258	0.0000330
100 %		- 30	781,999,871	-129	-0.0000165
100 %		- 20	781,999,947	-53	-0.0000068
100 %		- 10	781,999,947	-53	-0.0000068
100 %		0	782,000,071	71	0.0000091
100 %		+ 10	782,000,423	423	0.0000541
100 %		+ 20	781,999,614	-386	-0.0000494
100 %		+ 30	782,000,156	156	0.0000199
100 %		+ 40	781,999,926	-74	-0.0000095
100 %		+ 50	782,000,031	31	0.0000040
BATT. ENDPOINT	3.45	+ 20	781,999,951	-49	-0.0000063

Table 7-17. Frequency Stability Data (Band 13)

FCC ID: ZNFM322	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 104 of 112

Band 13 Frequency Stability Measurements

§2.1055 §27.54

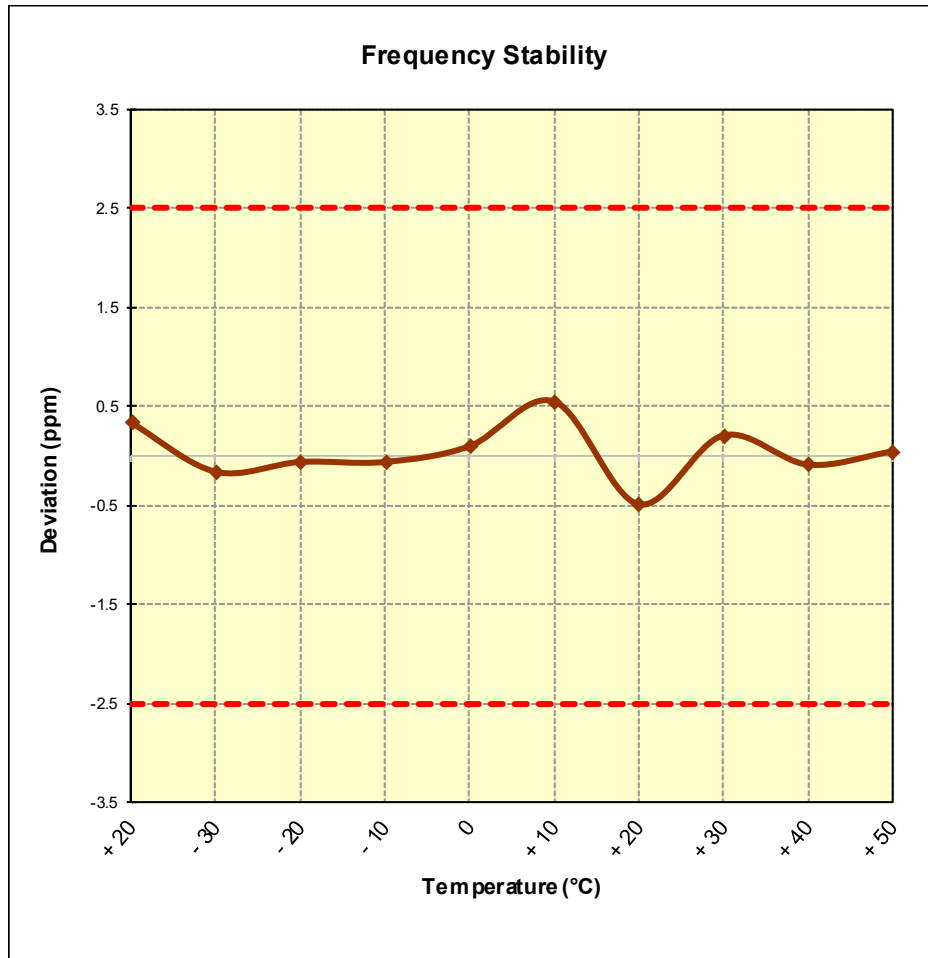




Figure 7-8. Frequency Stability Graph (Band 13)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 105 of 112

Band 5 Frequency Stability Measurements

§2.1055 §22.355

OPERATING FREQUENCY: 836,500,000 Hz

CHANNEL: 20525

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,675	-325	-0.0000389
100 %		- 30	836,499,941	-59	-0.0000071
100 %		- 20	836,500,187	187	0.0000224
100 %		- 10	836,500,109	109	0.0000130
100 %		0	836,499,801	-199	-0.0000238
100 %		+ 10	836,500,140	140	0.0000167
100 %		+ 20	836,500,168	168	0.0000201
100 %		+ 30	836,499,903	-97	-0.0000116
100 %		+ 40	836,500,040	40	0.0000048
100 %		+ 50	836,500,398	398	0.0000476
BATT. ENDPOINT	3.45	+ 20	836,499,993	-7	-0.0000008

Table 7-18. Frequency Stability Data (Band 5)

FCC ID: ZNFM322	 FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 106 of 112

Band 5 Frequency Stability Measurements

§2.1055 §22.355

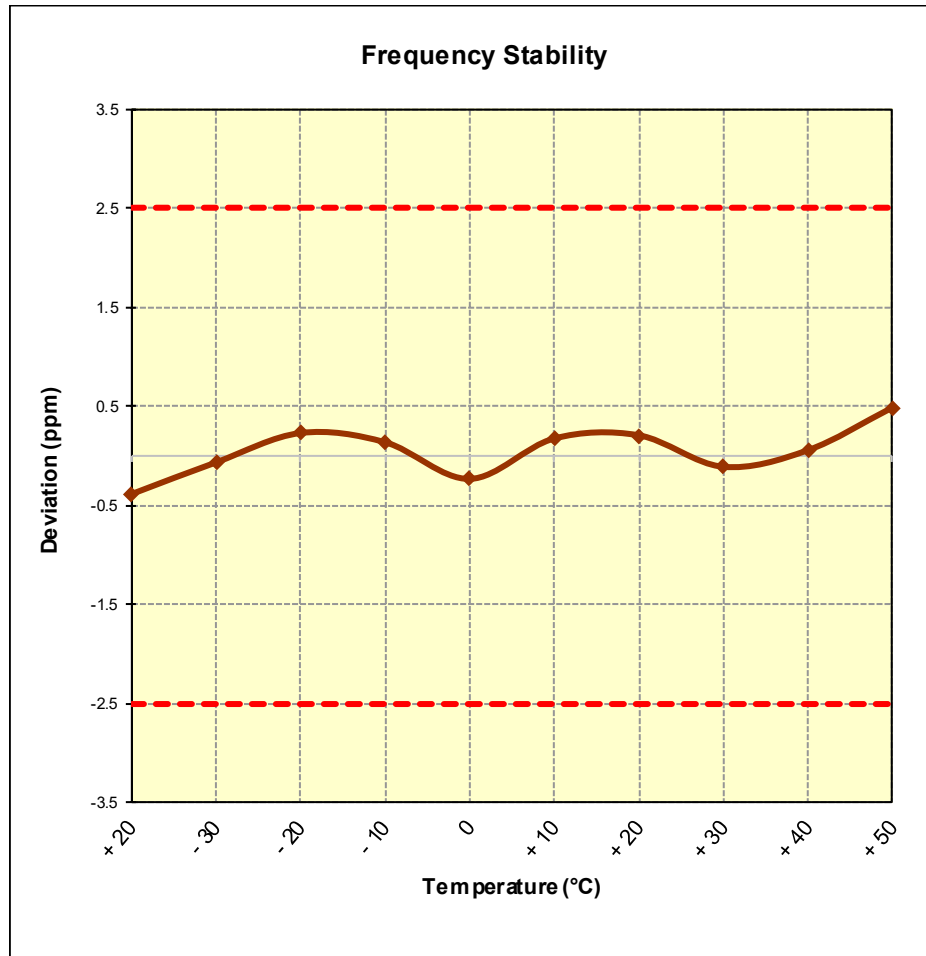




Figure 7-9. Frequency Stability Graph (Band 5)

FCC ID: ZNFM322			FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset			Page 107 of 112

Band 4 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,499,935	-65	-0.0000038
100 %		- 30	1,732,500,269	269	0.0000155
100 %		- 20	1,732,499,944	-56	-0.0000032
100 %		- 10	1,732,500,038	38	0.0000022
100 %		0	1,732,500,080	80	0.0000046
100 %		+ 10	1,732,500,361	361	0.0000208
100 %		+ 20	1,732,499,804	-196	-0.0000113
100 %		+ 30	1,732,500,317	317	0.0000183
100 %		+ 40	1,732,500,031	31	0.0000018
100 %		+ 50	1,732,500,072	72	0.0000042
BATT. ENDPOINT	3.45	+ 20	1,732,499,878	-122	-0.0000070

Table 7-19. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 108 of 112	

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

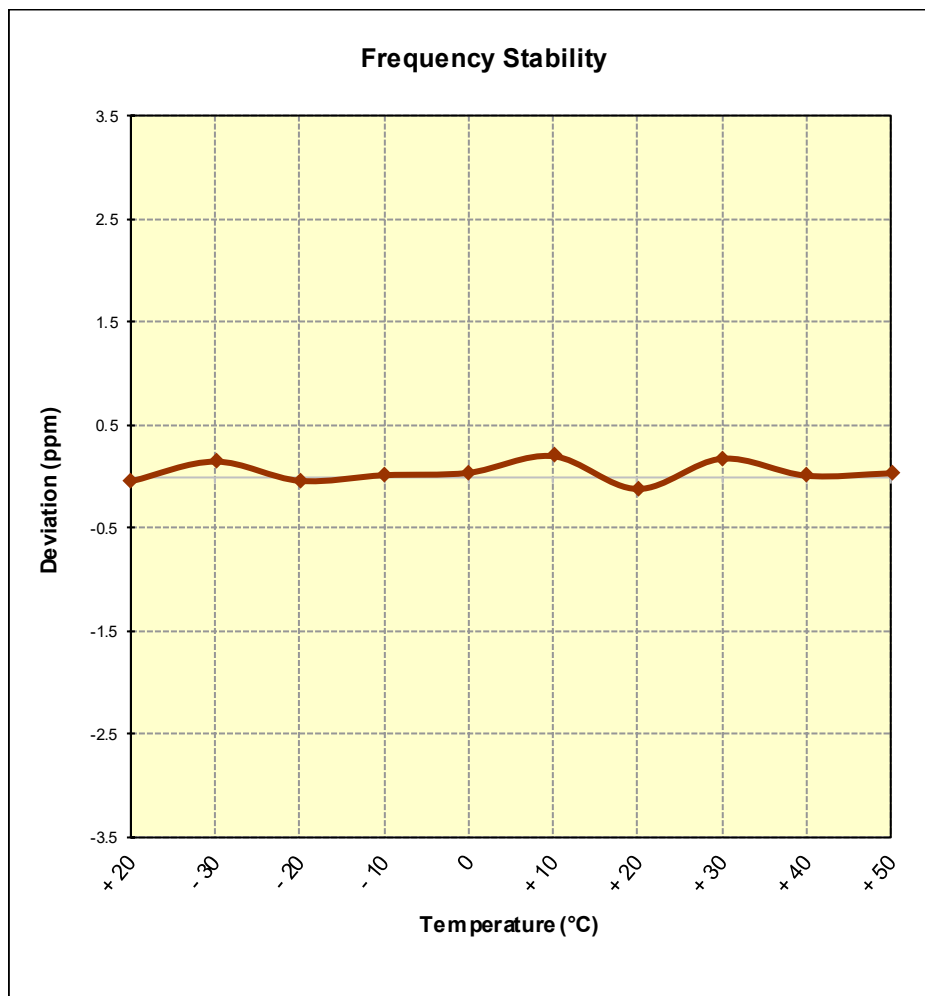


Figure 7-10. Frequency Stability Graph (Band 4)

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 109 of 112

Band 2 Frequency Stability Measurements

\$2.1055 \$24.235



OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,734	-266	-0.0000141
100 %		- 30	1,879,999,955	-45	-0.0000024
100 %		- 20	1,879,999,979	-21	-0.0000011
100 %		- 10	1,879,999,954	-46	-0.0000024
100 %		0	1,880,000,068	68	0.0000036
100 %		+ 10	1,879,999,796	-204	-0.0000109
100 %		+ 20	1,879,999,962	-38	-0.0000020
100 %		+ 30	1,879,999,823	-177	-0.0000094
100 %		+ 40	1,880,000,066	66	0.0000035
100 %		+ 50	1,879,999,877	-123	-0.0000065
BATT. ENDPOINT	3.45	+ 20	1,880,000,038	38	0.0000020

Table 7-20. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset	Page 110 of 112	

Band 2 Frequency Stability Measurements

§2.1055 §24.235

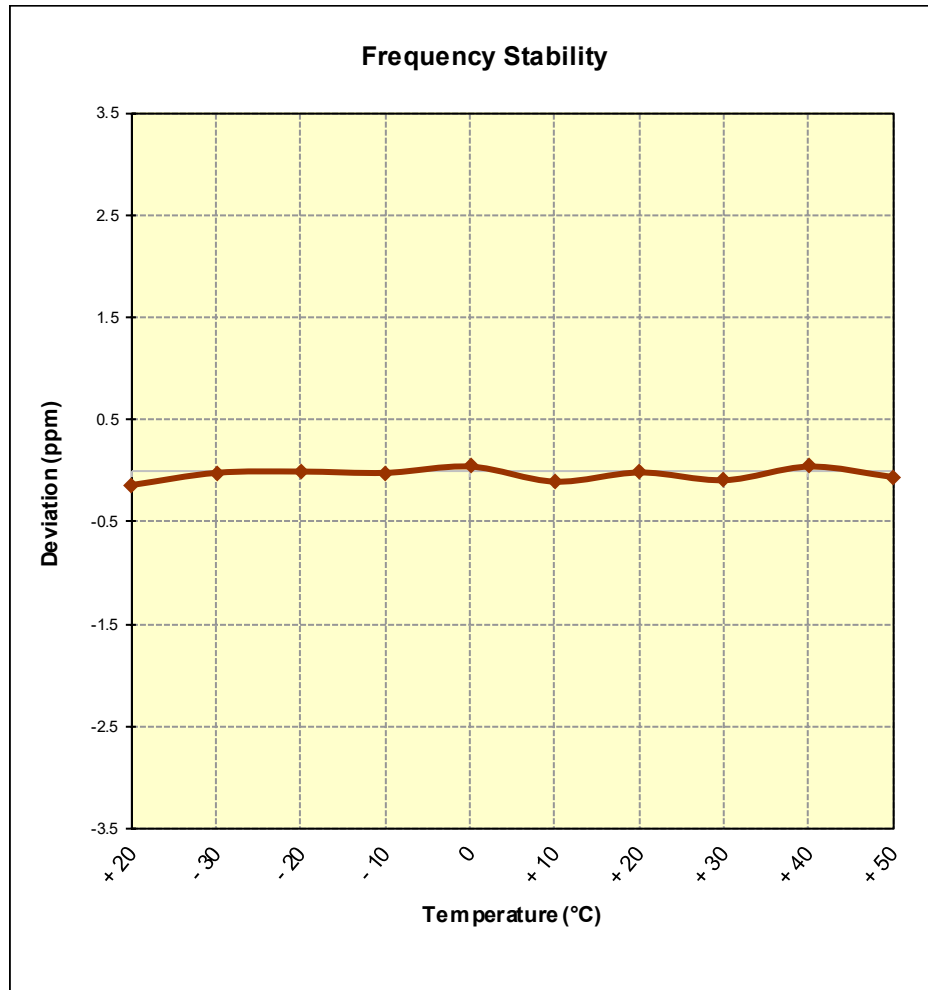


Figure 7-11. Frequency Stability Graph (Band 2)

FCC ID: ZNFM322	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 111 of 112

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFM322** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: ZNFM322		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1704100138-03.ZNF	Test Dates: 4/10-4/26/2017	EUT Type: Portable Handset		Page 112 of 112