



# TEST REPORT



**DT&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1709-0211(1)
2. Customer
  - Name : LG Electronics MobileComm USA, Inc.
  - Address : 1000 Sylvan Ave., Englewood Cliffs, New Jersey, United States, 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / QVR  
FCC ID : ZNFQVR
5. Test Method Used : KDB789033 D02v01r04  
Test Specification : FCC Part 15.407 Subpart E
6. Date of Test : 2017.09.04 ~ 2017.10.02
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Technical Manager
	Name : SunGeun Lee 	Name : Geunki Son 

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2017 . 10 . 02 .

**DT&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description
DRTFCC1709-0211	Sep. 27, 2017	Initial issue
DRTFCC1709-0211(1)	Oct. 02, 2017	Retest of the PSD

## CONTENTS

<b>1. EUT DESCRIPTION.....</b>	<b>4</b>
<b>2. Information about test items .....</b>	<b>5</b>
2.1 Transmitting configuration of EUT .....	5
2.2 Tested Channel Information.....	5
2.3 Testing Environment .....	6
2.4 EMI Suppression Device(s)/Modifications .....	6
2.5 Measurement Uncertainty .....	6
<b>3. SUMMARY OF TESTS.....</b>	<b>7</b>
<b>4. TEST METHODOLOGY.....</b>	<b>8</b>
4.1 EUT configuration.....	8
4.2 EUT exercise.....	8
4.3 General test procedures .....	8
4.4 Description of test modes .....	8
<b>5. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
<b>6. FACILITIES AND ACCREDITATIONS .....</b>	<b>9</b>
6.1 Facilities .....	9
6.2 Equipment .....	9
<b>7. ANTENNA REQUIREMENTS .....</b>	<b>9</b>
<b>8. TEST RESULT .....</b>	<b>10</b>
8.1 Emission Bandwidth (26 dB Bandwidth).....	10
8.2 Minimum Emission Bandwidth (6 dB Bandwidth) .....	44
8.3 Maximum Conducted Output Power.....	57
8.4 Maximum Power Spectral Density.....	66
8.5 Frequency Stability .....	151
8.6 Radiated Spurious Emission Measurements.....	153
8.7 AC Conducted Emissions .....	172
<b>9. LIST OF TEST EQUIPMENT .....</b>	<b>181</b>
<b>APPENDIX I .....</b>	<b>182</b>
<b>APPENDIX II .....</b>	<b>183</b>
<b>APPENDIX III .....</b>	<b>188</b>

## 1. EUT DESCRIPTION

<b>FCC Equipment Class</b>	Unlicensed National Information Infrastructure (UNII)
<b>Product</b>	Mobile Phone
<b>Model Name</b>	QVR
<b>Add Model Name</b>	NA
<b>Power Supply</b>	DC 3.85 V
<b>Modulation type</b>	OFDM
<b>Antenna Specification</b>	<b>Antenna type:</b> Internal Antenna <b>Antenna gain:</b> Refer to the clause 7 in test report.

5GHz Band	Mode	Tx frequency (MHz)	Max power(dBm)
<b>U-NII 1</b>	802.11a	5180 ~ 5240	<b>18.65</b>
	802.11n(HT20)	5180 ~ 5240	17.84
	802.11ac(VHT20)	5180 ~ 5240	17.87
	802.11n(HT40)	5190 ~ 5230	<b>16.79</b>
	802.11ac(VHT40)	5190 ~ 5230	16.78
	802.11ac(VHT80)	5210	<b>14.44</b>
<b>U-NII 2A</b>	802.11a	5260 ~ 5320	<b>18.75</b>
	802.11n(HT20)	5260 ~ 5320	17.81
	802.11ac(VHT20)	5260 ~ 5320	17.85
	802.11n(HT40)	5270 ~ 5310	<b>16.93</b>
	802.11ac(VHT40)	5270 ~ 5310	16.84
	802.11ac(VHT80)	5290	<b>13.51</b>
<b>U-NII 2C</b>	802.11a	5500 ~ 5580	<b>18.86</b>
	802.11n(HT20)	5500 ~ 5580	17.95
	802.11ac(VHT20)	5500 ~ 5580	17.90
	802.11n(HT40)	5510 ~ 5550	16.82
	802.11ac(VHT40)	5510 ~ 5550	<b>16.89</b>
	802.11ac(VHT80)	5530	14.43
	802.11a	5660 ~ 5720	<b>18.77</b>
	802.11n(HT20)	5660 ~ 5720	17.88
	802.11ac(VHT20)	5660 ~ 5720	17.92
	802.11n(HT40)	5670 ~ 5710	16.70
	802.11ac(VHT40)	5670 ~ 5710	<b>16.78</b>
	802.11ac(VHT80)	5690	<b>16.44</b>
<b>U-NII 3</b>	802.11a	5745 ~ 5825	<b>18.81</b>
	802.11n(HT20)	5745 ~ 5825	17.86
	802.11ac(VHT20)	5745 ~ 5825	17.85
	802.11n(HT40)	5755 ~ 5795	16.84
	802.11ac(VHT40)	5755 ~ 5795	<b>16.87</b>
	802.11ac(VHT80)	5775	<b>16.30</b>

## 2. Information about test items

### 2.1 Transmitting configuration of EUT

Mode	SISO		MIMO (CDD)	MIMO (SDM)
	Ant 1	Ant 2	Ant 1 & 2	Ant 1 & 2
	Data rate			
802.11a	6~54Mbps	6~54Mbps	6~54Mbps	-
802.11n(HT20)	MCS 0 ~ 7	MCS 0 ~ 7	MCS 0 ~ 7	MCS 8 ~ 15
802.11ac(VHT20)	MCS 0 ~ 8	MCS 0 ~ 8	MCS 0 ~ 8	MCS 0 ~ 8
802.11n(HT40)	MCS 0 ~ 7	MCS 0 ~ 7	MCS 8 ~ 15	MCS 8 ~ 15
802.11ac(VHT40)	MCS 0 ~ 9	MCS 0 ~ 9	MCS 0 ~ 9	MCS 0 ~ 9
802.11ac(VHT80)	MCS 0 ~ 9	MCS 0 ~ 9	MCS 0 ~ 9	MCS 0 ~ 9

Note1: SDM = Spatial Diversity Multiplexing, CDD = Cycle Delay Diversity

Note2: This device supports WiFi DBS(dual-band simultaneous) transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. (Ant 1: 2.4GHz band transmitting & ANT 2: 5GHz band transmitting)

And the test results for WiFi DBS were included in this test report.

### 2.2 Tested Channel Information

5GHz Band	802.11a/n(HT20)		802.11n/ac(VHT40)		802.11n/ac(VHT80)	
	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
U-NII 1	36	5180	38	5190	42	5210
	40	5200	-	-	-	-
	48	5240	46	5230	-	-
U-NII 2A	52	5260	54	5270	58	5290
	60	5300	-	-	-	-
	64	5320	62	5310	-	-
U-NII 2C	100	5500	102	5510	106	5530
	116	5580	110	5550	-	-
	144	5720	142	5710	138	5690
U-NII 3	149	5745	151	5755	155	5775
	157	5785	-	-	-	-
	165	5825	159	5795	-	-

## 2.3 Testing Environment

Temperature	: 20 °C ~ 25 °C
Relative humidity content	: 40 % ~ 45 % R.H.
Details of power supply	: DC 3.85 V

## 2.4 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing  
 → None

## 2.5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014 and ANSI C 63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Test items	Measurement uncertainty
Transmitter Output Power	$\pm 0.7$ dB (The confidence level is about 95 %, $k = 2$ )
Conducted spurious emission	$\pm 1.0$ dB (The confidence level is about 95 %, $k = 2$ )
AC conducted emission	$\pm 2.4$ dB (The confidence level is about 95 %, $k = 2$ )
Radiated spurious emission (1 GHz Below)	$\pm 5.1$ dB (The confidence level is about 95 %, $k = 2$ )
Radiated spurious emission (1 GHz ~ 18 GHz)	$\pm 5.4$ dB (The confidence level is about 95 %, $k = 2$ )
Radiated spurious emission (18 GHz Above)	$\pm 5.3$ dB (The confidence level is about 95 %, $k = 2$ )

### 3. SUMMARY OF TESTS

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
<b>I. Transmitter Mode (TX)</b>				
15.407(a)	Emission Bandwidth (26 dB Bandwidth)	N/A	Conducted	<b>C</b>
15.407(e)	Minimum Emission Bandwidth (6 dB Bandwidth)	> 500 kHz in 5725 ~ 5850 MHz		<b>C</b>
15.407(a)	Maximum Conducted Output Power	5150 ~ 5250 MHz : < 23.97 dBm 5250 ~ 5350 & 5470 ~ 5725 MHz : < 250 mW or < 11 + 10 log <sub>10</sub> (B) dBm, whichever power is less. (B is the 26dB BW.) 5725 ~ 5850 MHz : < 30 dBm		<b>C</b>
15.407(a)	Peak Power Spectral Density	5150 ~ 5250 MHz : 11 dBm/MHz 5250 ~ 5350 MHz : 11 dBm/MHz 5470 ~ 5725 MHz : 11 dBm/MHz 5725 ~ 5850 MHz : 30 dBm/500kHz		<b>C</b>
15.407(g)	Frequency Stability	N/A		<b>C</b>
15.407(h)	Dynamic Frequency Selection	FCC 15.407(h)		<b>C</b> Note 2
15.407(b)	Undesirable Emissions	5150 ~ 5725 MHz: < -27 dBm/MHz EIRP 5725 ~ 5850 MHz: < -27 dBm/MHz or < 10 dBm/MHz or 15.6 dBm/MHz < 27dBm/MHz EIRP		Radiated
15.205 15.209 15.407(b)	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	<b>C</b> Note 3, 4	
15.207	AC Conducted Emissions	FCC 15.207	AC Line Conducted	<b>C</b>
15.203	Antenna Requirements	FCC 15.203	-	<b>C</b>
<p>Note 1: <b>C</b> = Comply    <b>NC</b> = Not Comply    <b>NT</b> = Not Tested    <b>NA</b> = Not Applicable</p> <p>Note 2: Refer to the DFS test report.</p> <p>Note 3: This device supports wireless charging capability. So per KDB648474 D03 v01r04, the radiated test items were performed both normal and charging conditions. For wireless charging condition, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration. And the worst case data was reported.</p> <p>Note 4: This test items were performed the all transmitting antenna configuration(SISO, MIMO). And we attached the result of MIMO mode since MIMO is the worst case.</p> <p>Note 5: The sample was tested according to the following specification: <b>KDB789033 D02v01r04, KDB662911 D01v02r01, KDB648474 D03v01r04</b></p>				

## 4. TEST METHODOLOGY

Generally the tests were performed according to the **KDB789033 D02v01r04**. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing

### 4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

### 4.3 General test procedures

#### Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB789033 D02v01r04. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

#### Radiated Emissions

Basically the radiated tests were performed with KDB789033 D02v01r04. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on KDB789033 D02v01r04.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axis.

### 4.4 Description of test modes

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode with maximum fixed duty cycle.



## 5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 Facilities

<b>DT&amp;C Co., Ltd.</b>		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The site is constructed in conformance with the requirements.		
<b>- FCC MRA Accredited Test Firm No. : KR0034</b>		
<a href="http://www.dtnet.net">www.dtnet.net</a>		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

### 6.2 Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, loop, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The antenna is attached on the device by means of unique coupling method (Spring Tension).**

**Therefore this E.U.T Complies with the requirement of §15.203**

### Directional antenna gain:

Bands	SISO		MIMO (CDD) <sup>Note 1.</sup>	MIMO (SDM) <sup>Note 2</sup>
	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain[dBi]	Directional Gain[dBi]
U-NII 1	-3.70	-2.10	<b>+0.147</b>	-2.827
U-NII 2A	-3.70	-2.10	<b>+0.147</b>	-2.827
U-NII 2C	-3.70	-2.10	<b>+0.147</b>	-2.827
U-NII 3	-1.90	-1.80	<b>+1.160</b>	-1.850

**Note 1. Directional gain(correlated signal with unequal antenna gain and equal transmit power)**

$$10 \log \left[ \left( 10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20} \right)^2 / N^{ANT} \right] \text{ dBi}$$

**Note 2. Directional gain(completely uncorrelated signal with unequal antenna gain and equal transmit power)**

$$10 \log \left[ \left( 10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10} \right) / N^{ANT} \right] \text{ dBi}$$

## 8. TEST RESULT

### 8.1 Emission Bandwidth (26 dB Bandwidth)

#### ▣ Test Requirements

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The 26 dB bandwidth is used to determine the conducted output power limit.

#### ▣ Test Configuration

Refer to the APPENDIX I.

#### ▣ Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v01r04**.

1. Set resolution bandwidth (RBW) = approximately **1 %** of the EBW.
2. Set the video bandwidth (**VBW**) > **RBW**.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

**■ TEST RESULTS: Comply**

Mode	Band	Channel	Frequency [MHz]	Test Result [MHz]	
				ANT 1	ANT 2
802.11a	U-NII 1	36	5180	21.39	21.03
		40	5200	21.17	21.20
		48	5240	20.87	21.01
	U-NII 2A	52	5260	21.60	21.01
		60	5300	21.30	21.17
		64	5320	21.05	21.04
	U-NII 2C	100	5500	21.03	21.32
		116	5580	21.14	21.11
		144	5720	20.94	21.10
802.11n (HT20)	U-NII 1	36	5180	21.57	21.06
		40	5200	21.33	21.07
		48	5240	21.69	21.16
	U-NII 2A	52	5260	21.58	21.07
		60	5300	21.30	20.94
		64	5320	21.34	21.22
	U-NII 2C	100	5500	21.66	21.13
		116	5580	21.71	20.90
		144	5720	21.36	21.12
802.11n (HT40)	U-NII 1	38	5190	39.72	40.22
		46	5230	39.93	39.85
	U-NII 2A	54	5270	39.96	40.24
		62	5310	39.82	40.27
	U-NII 2C	102	5510	40.04	40.17
		110	5550	40.04	40.17
802.11ac (VHT80)	U-NII 1	42	5210	81.13	80.98
		-	-	-	-
	U-NII 2A	58	5290	81.39	81.27
		-	-	-	-
	U-NII 2C	106	5530	81.07	81.38
		138	5690	81.12	81.20

Result Plots

26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.36




26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.40



26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.48

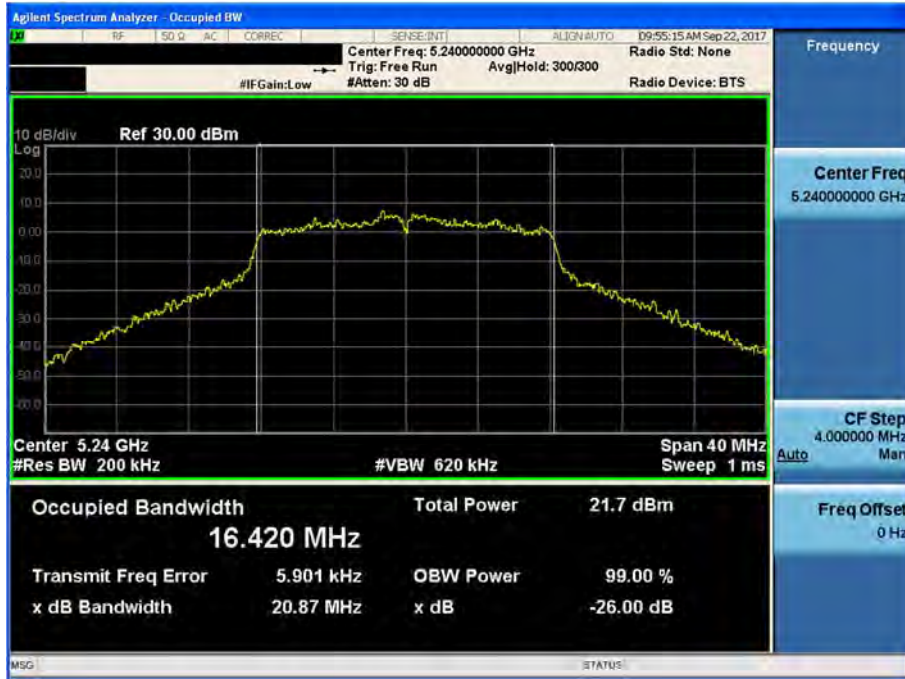


26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.52




26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.60

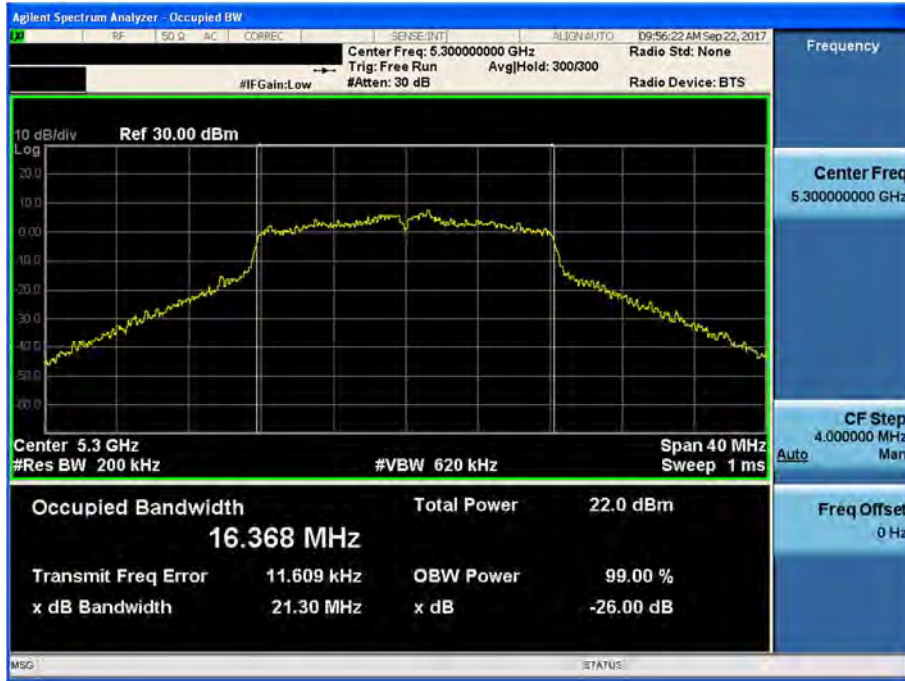


26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.64

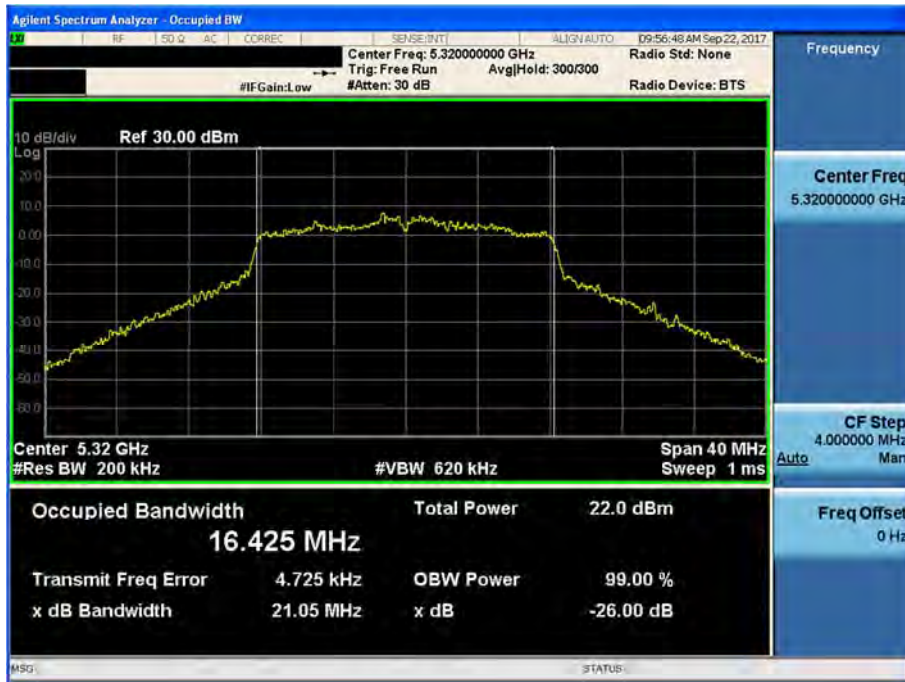

26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.100

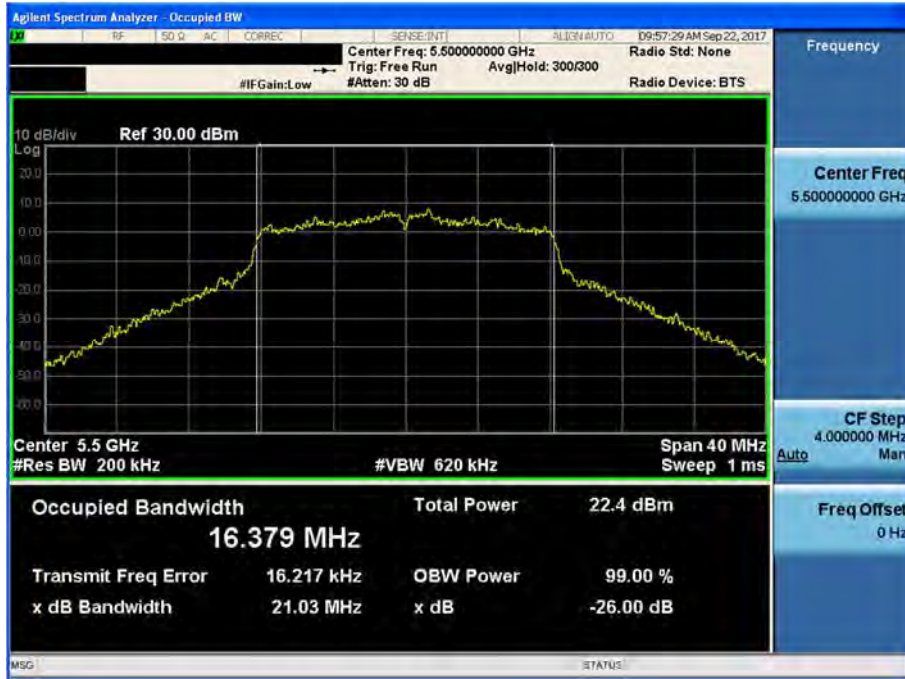


26 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.116



26 dB Bandwidth


Test Mode: 802.11a & ANT 1 & Ch.144

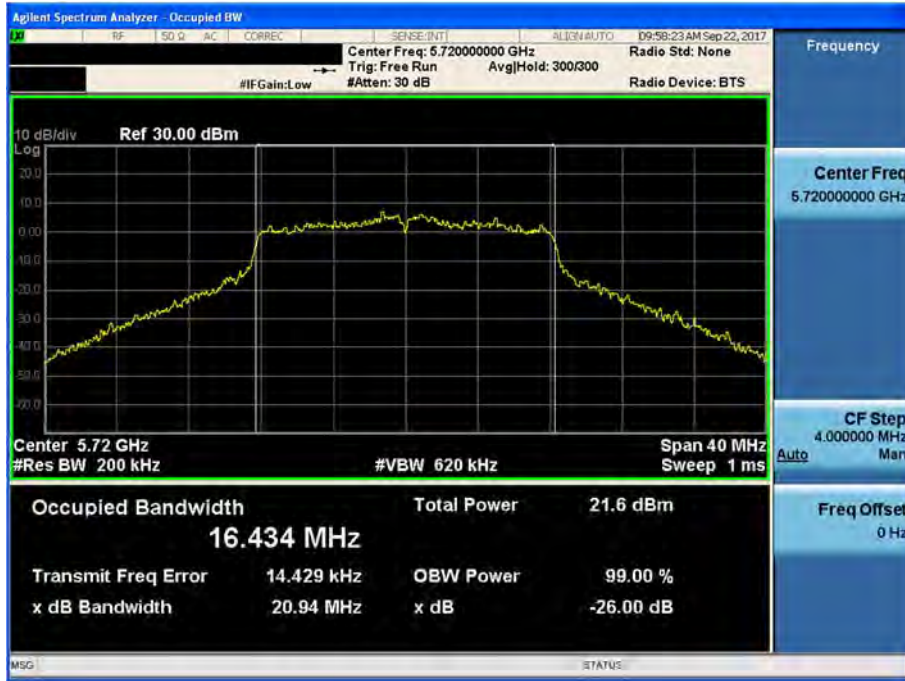



26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.36

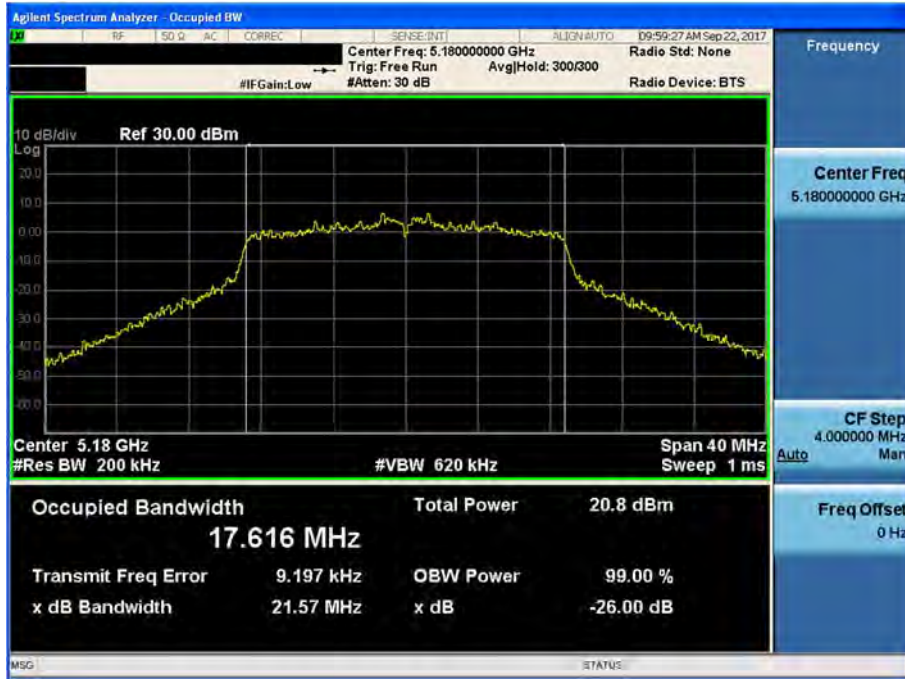


26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.40




26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.48

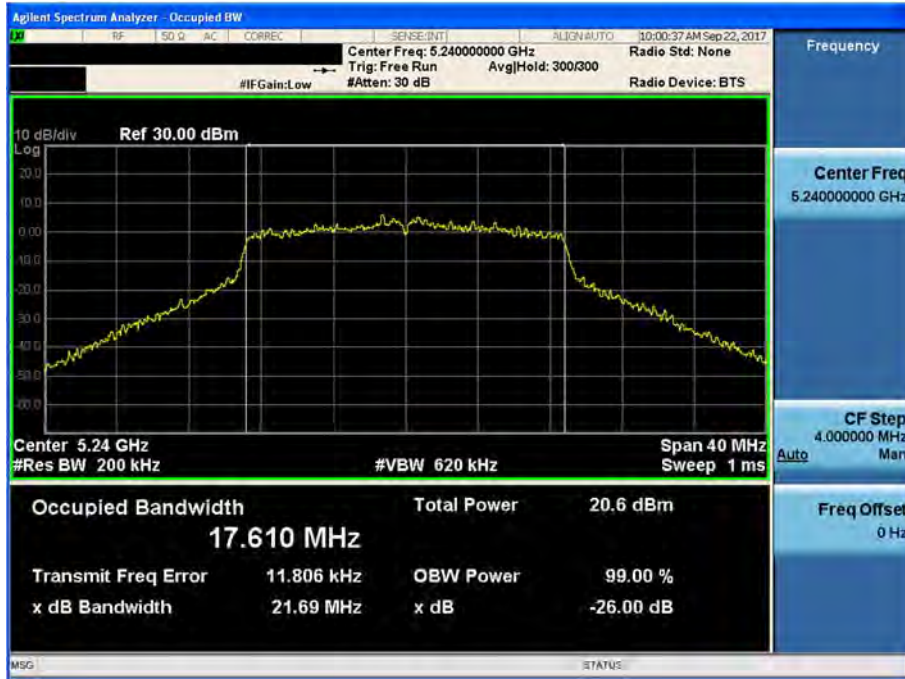


26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.52

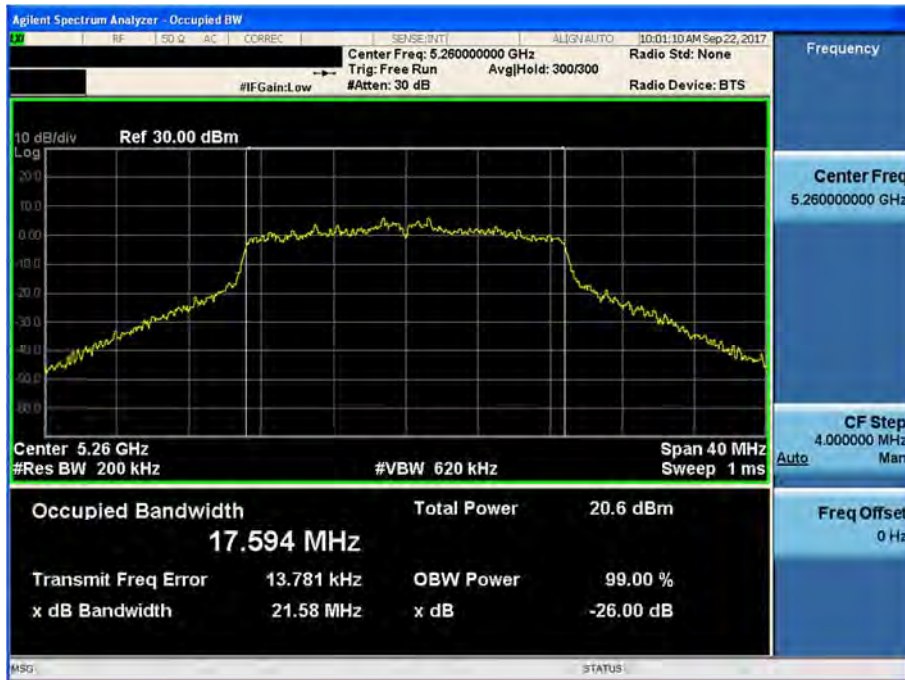

26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.60

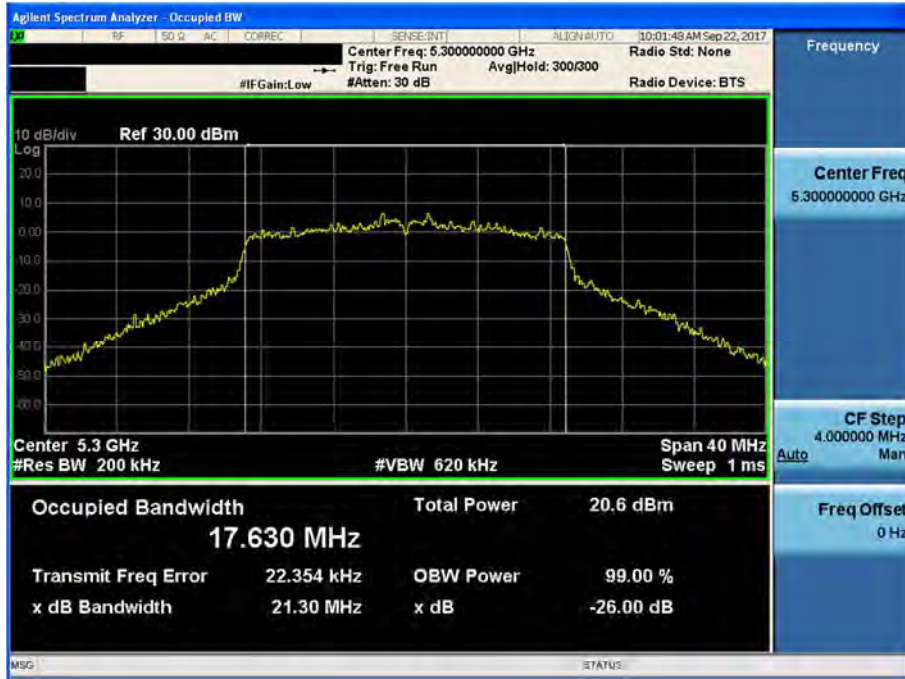

26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.64




26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.100




26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.116

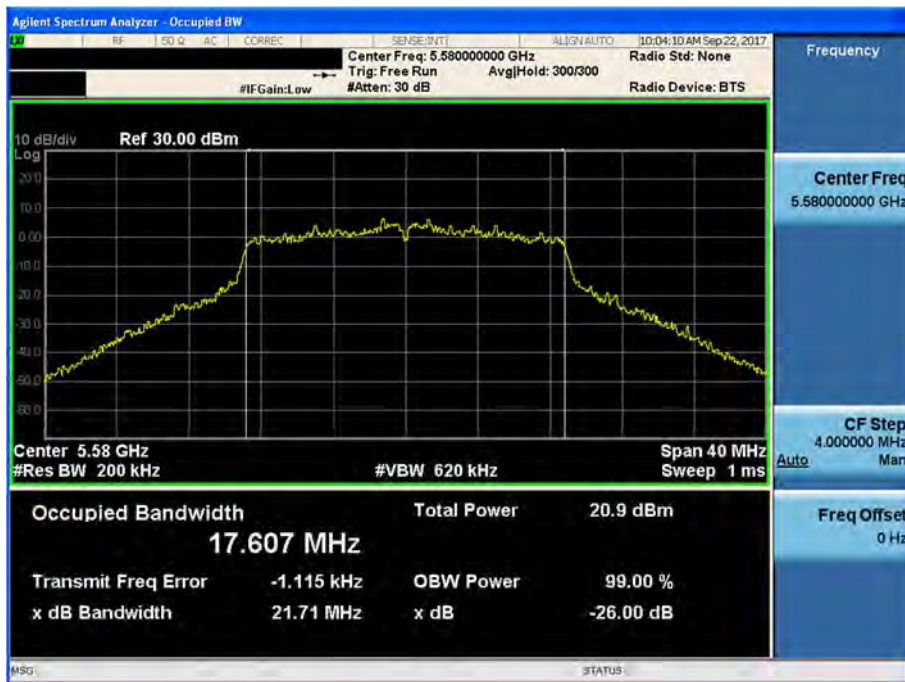


26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.144

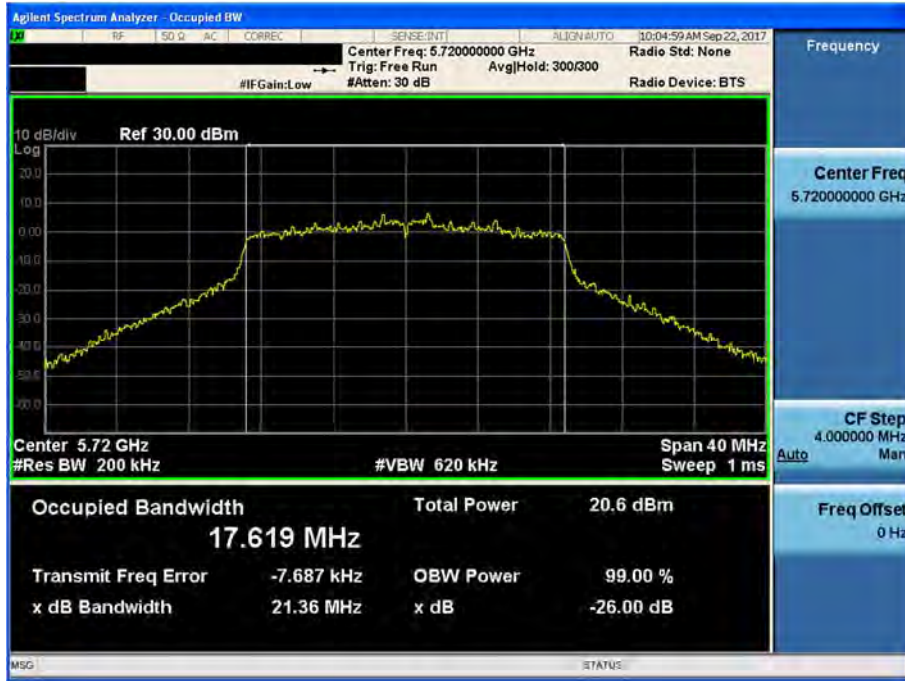


26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.38

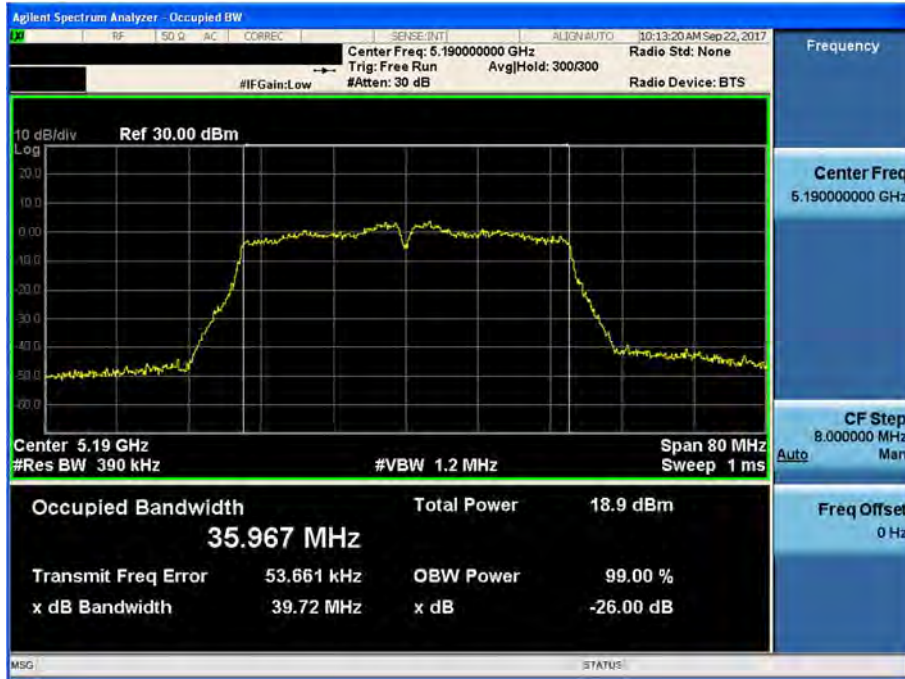

26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.46

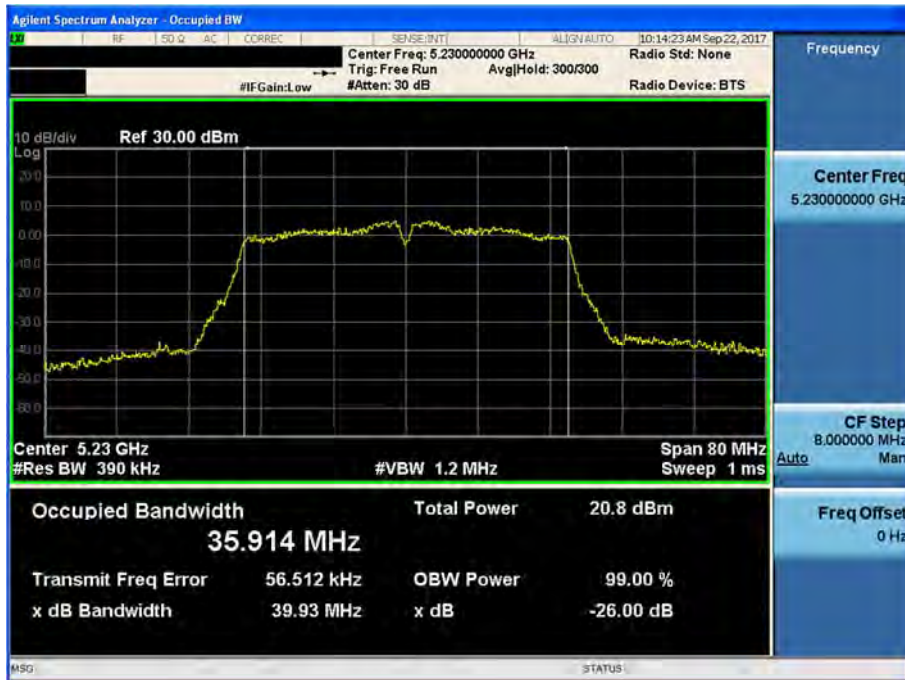

26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.54




26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.62




26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.102

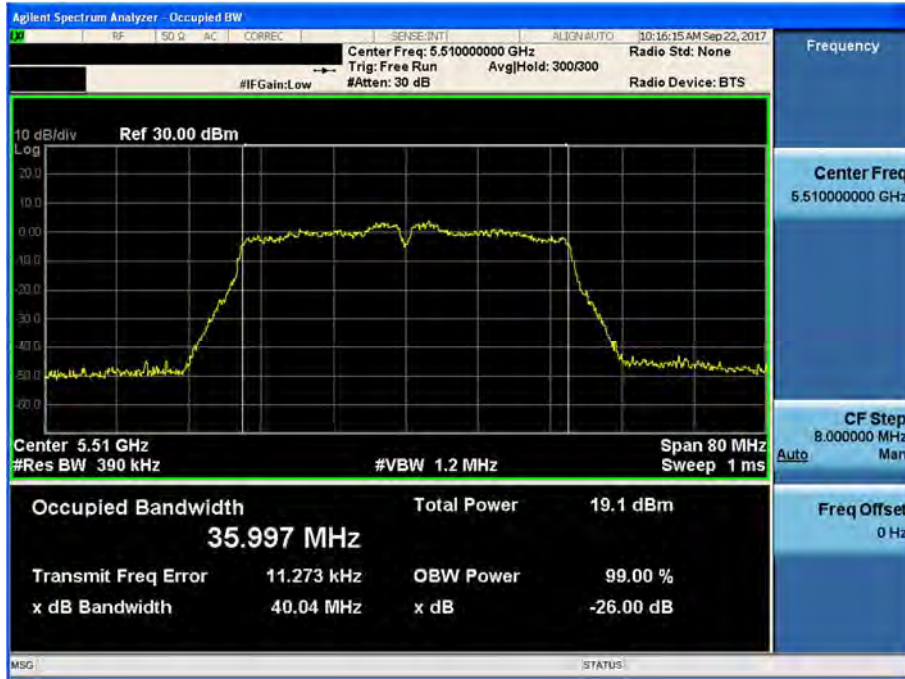

26 dB Bandwidth


Test Mode: 802.11n HT40 & ANT 1 & Ch.110

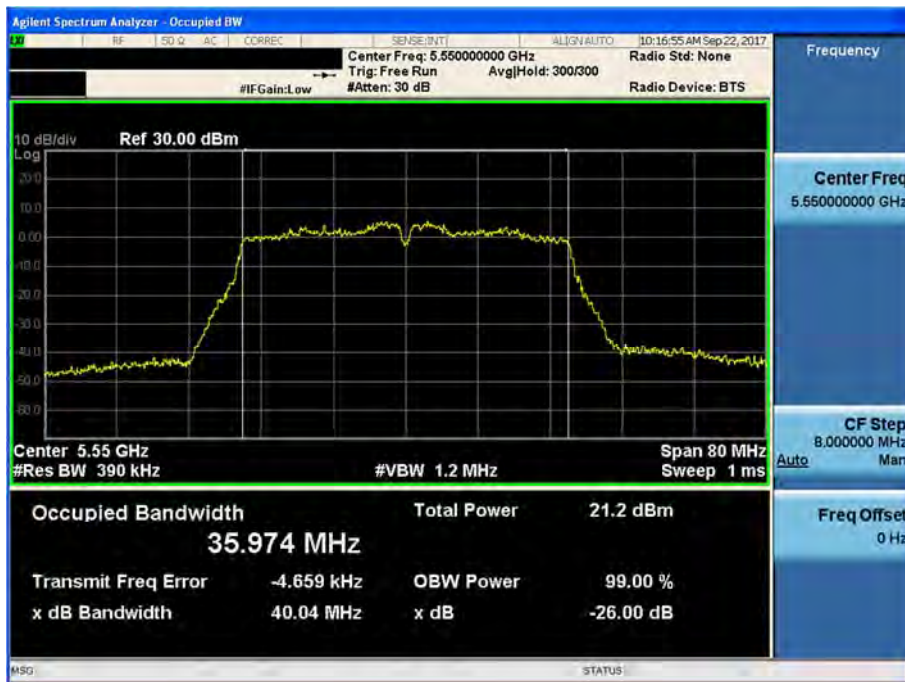




26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.142

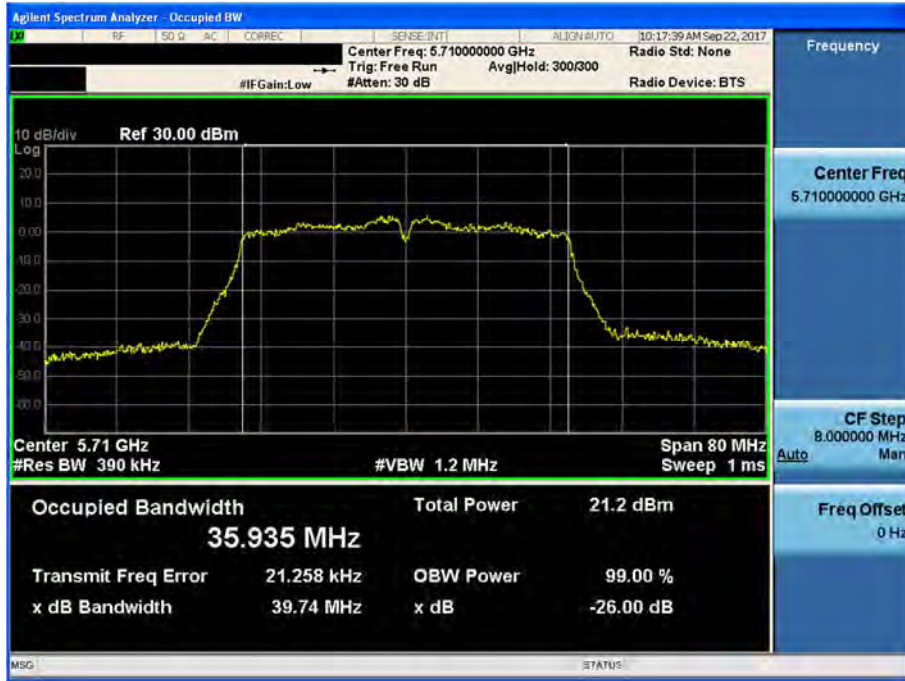


26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.42

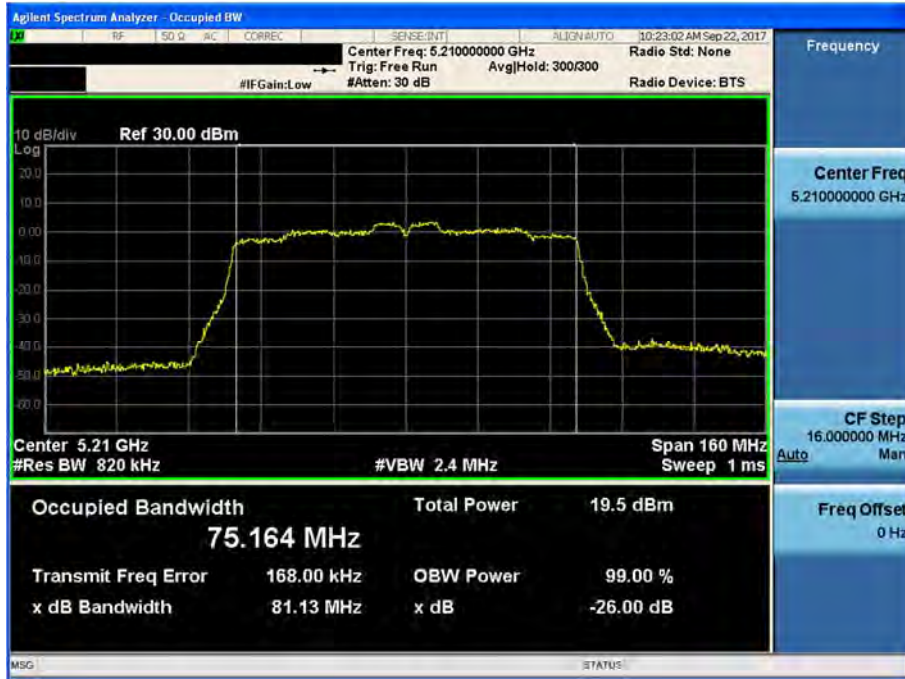


26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.58

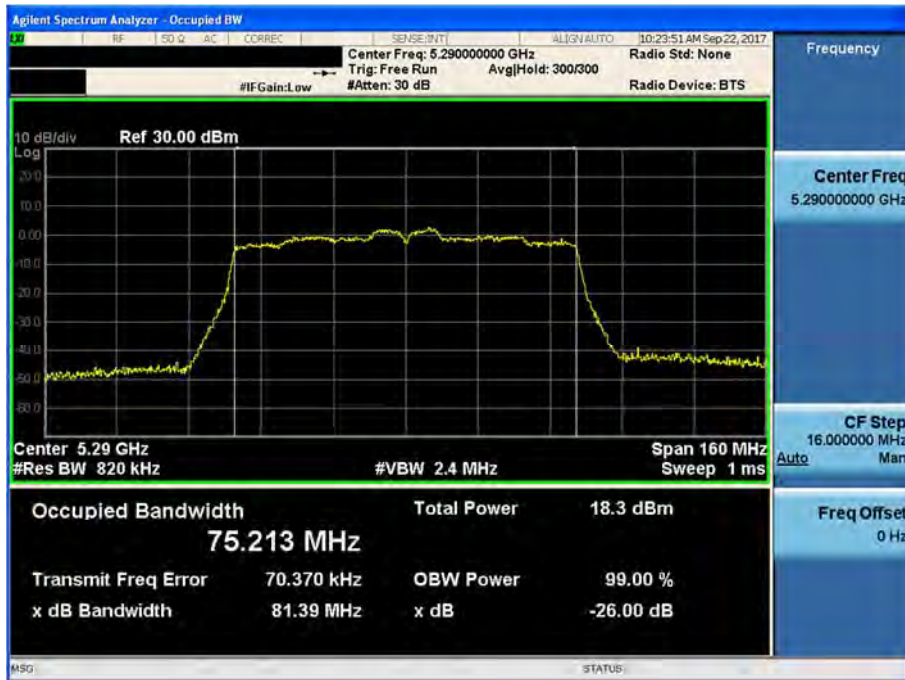

26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.106

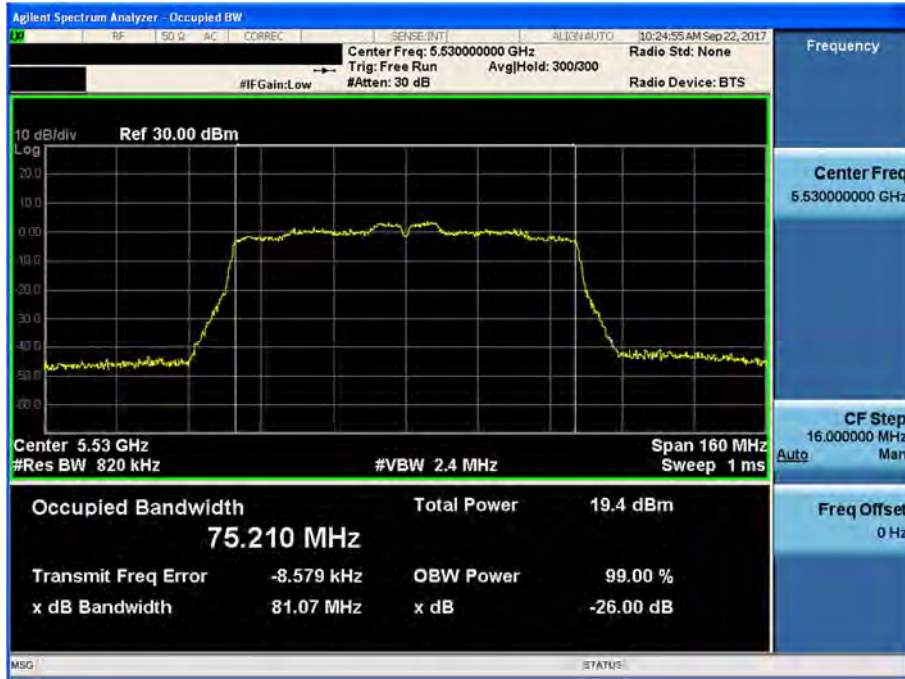


26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.138




26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.36

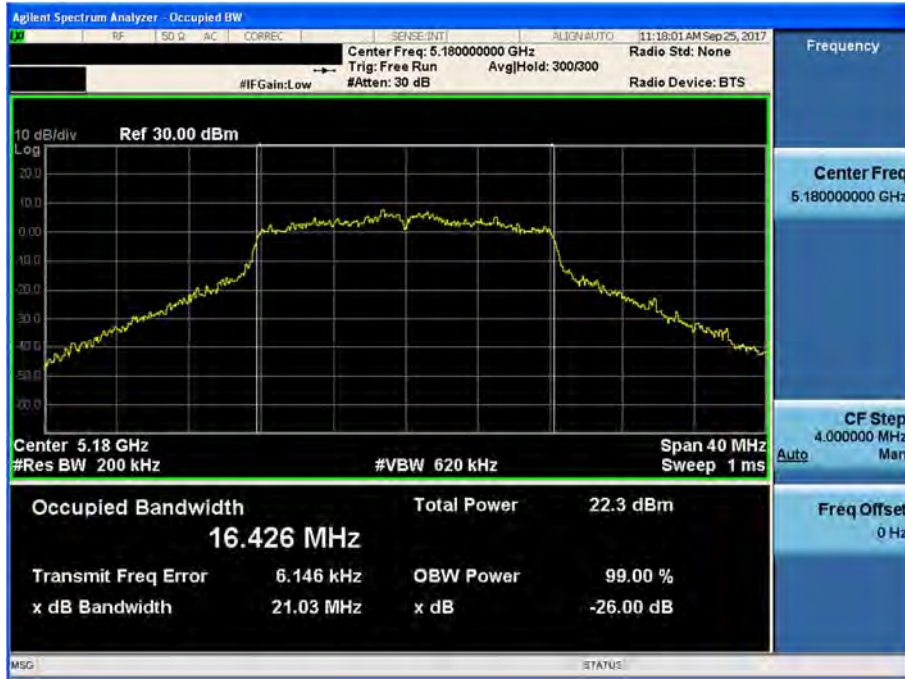


26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.40

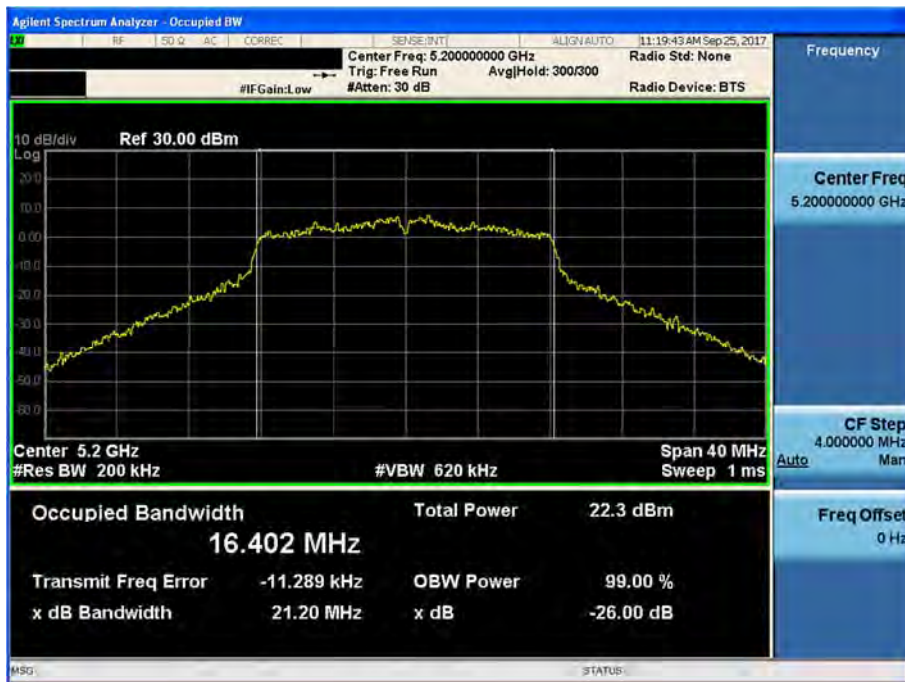

26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.48

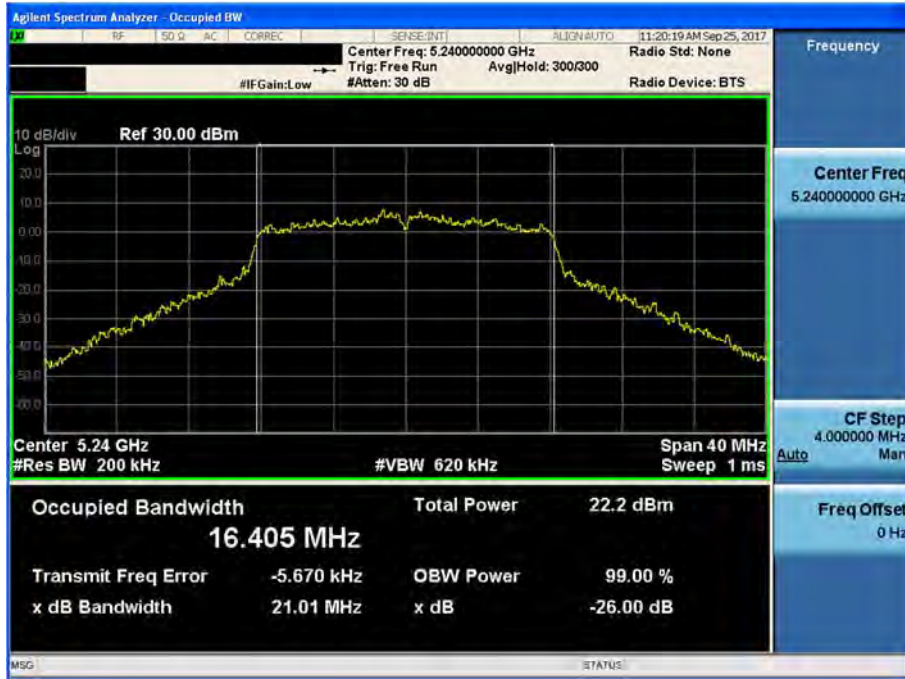

26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.52




26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.60



26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.64

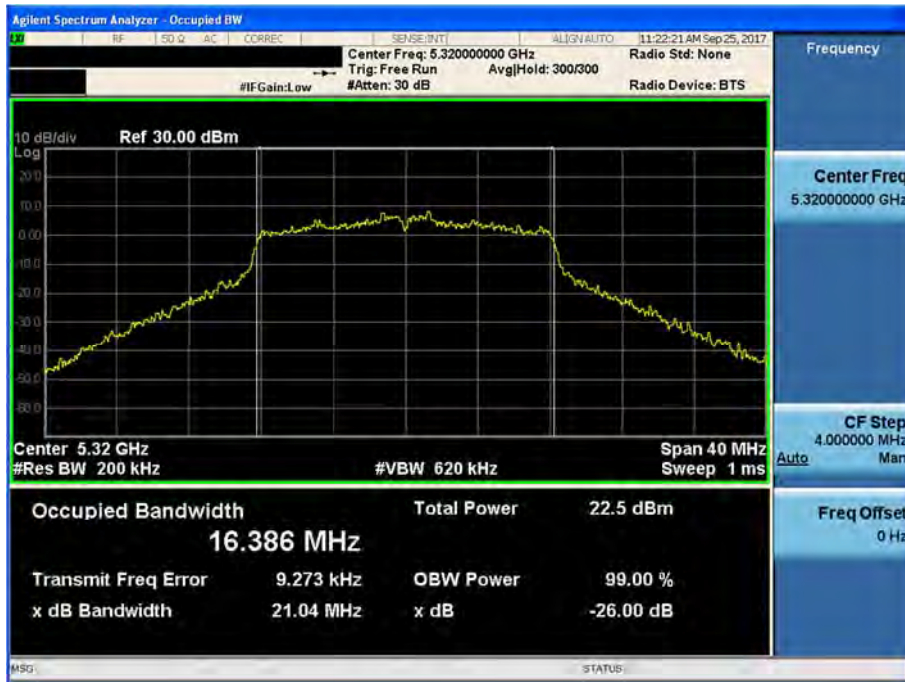

26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.100




26 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.116



26 dB Bandwidth


Test Mode: 802.11a & ANT 2 & Ch.144

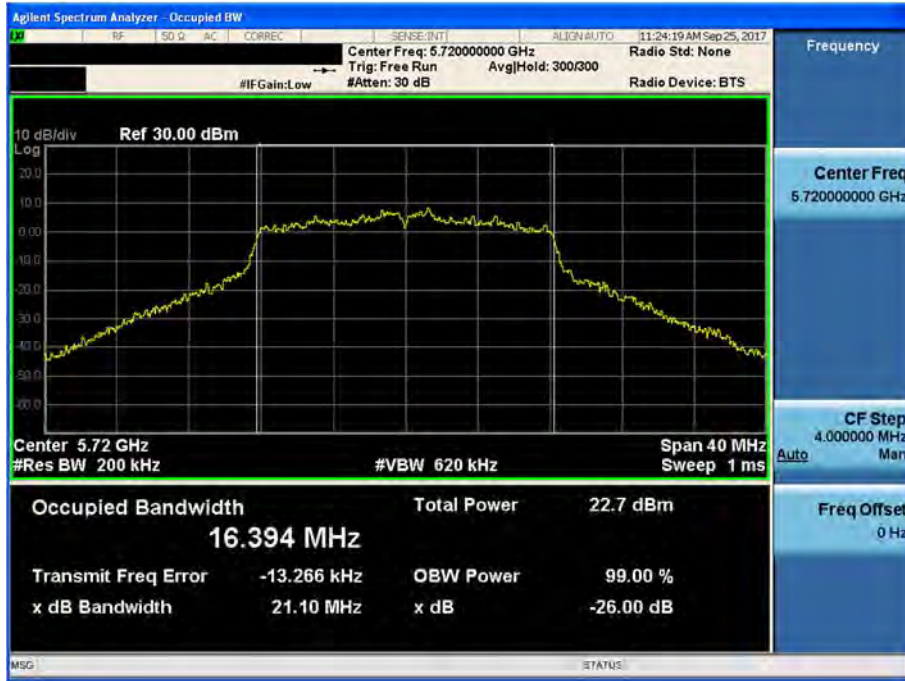




26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.36

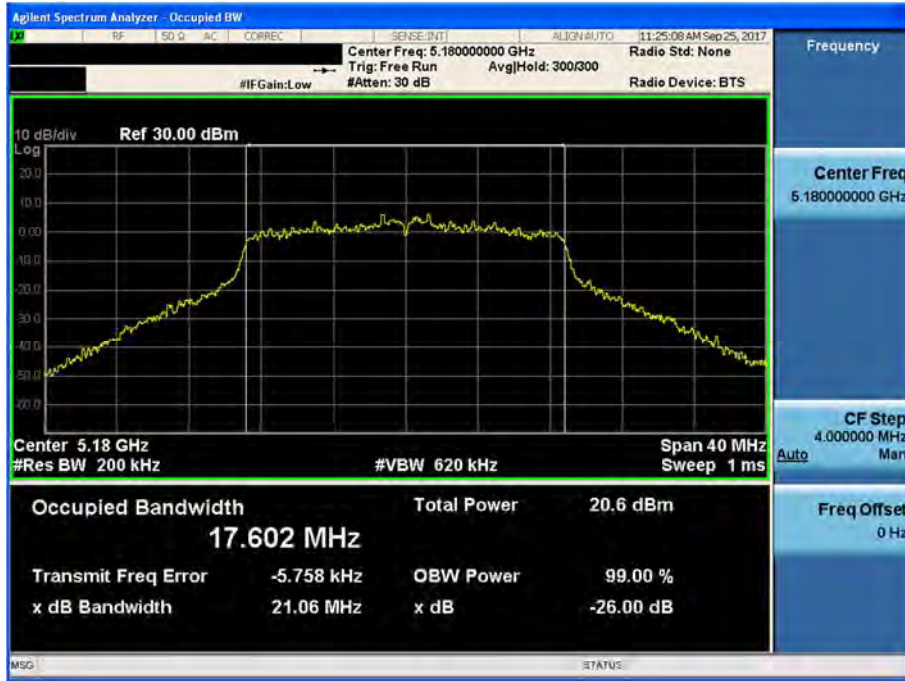


26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.40

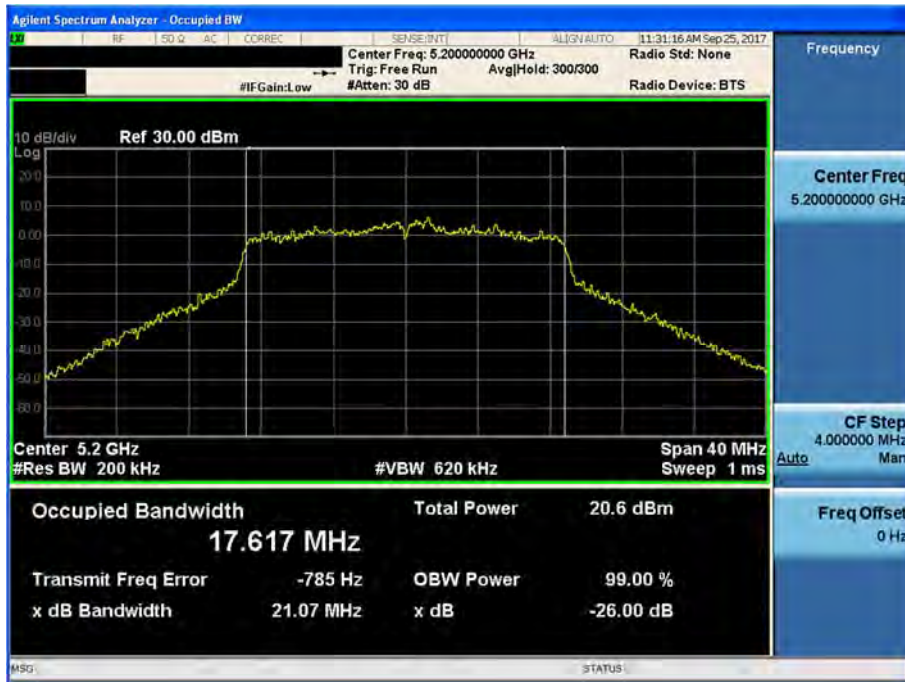


26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.48

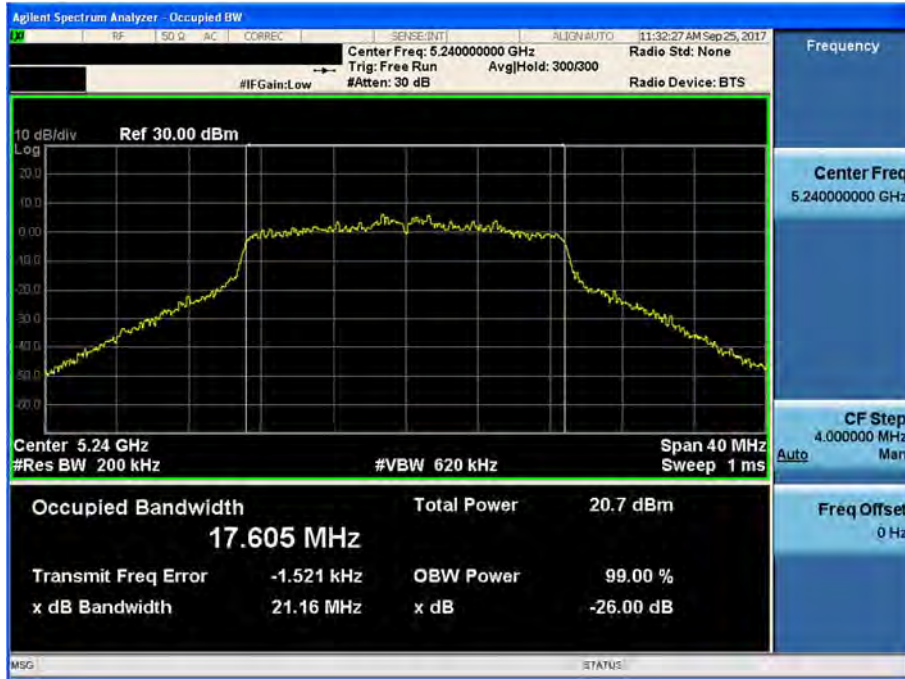

26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.52

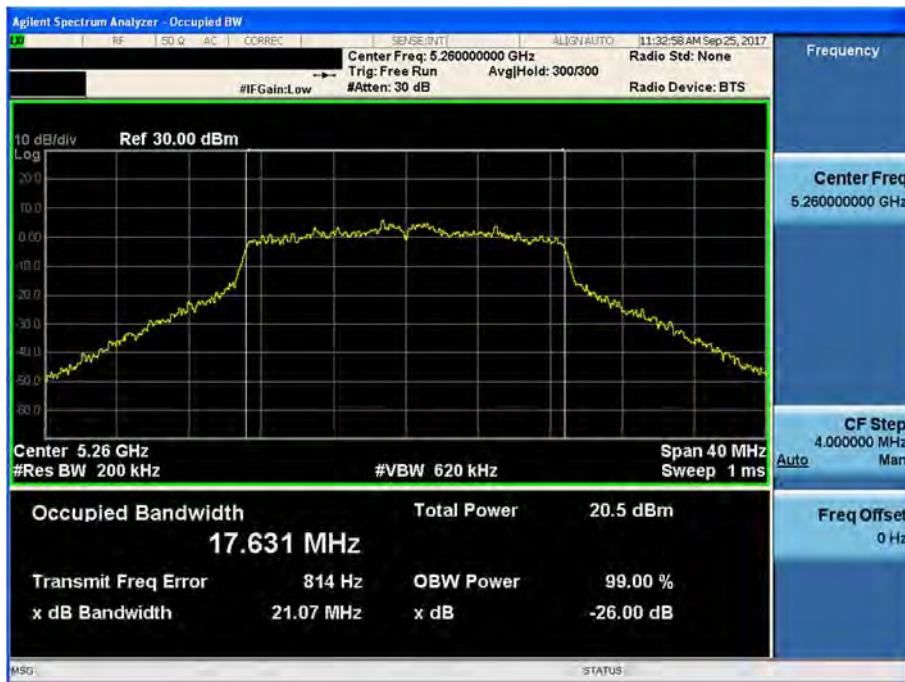

26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.60



26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.64




26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.100




26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.116

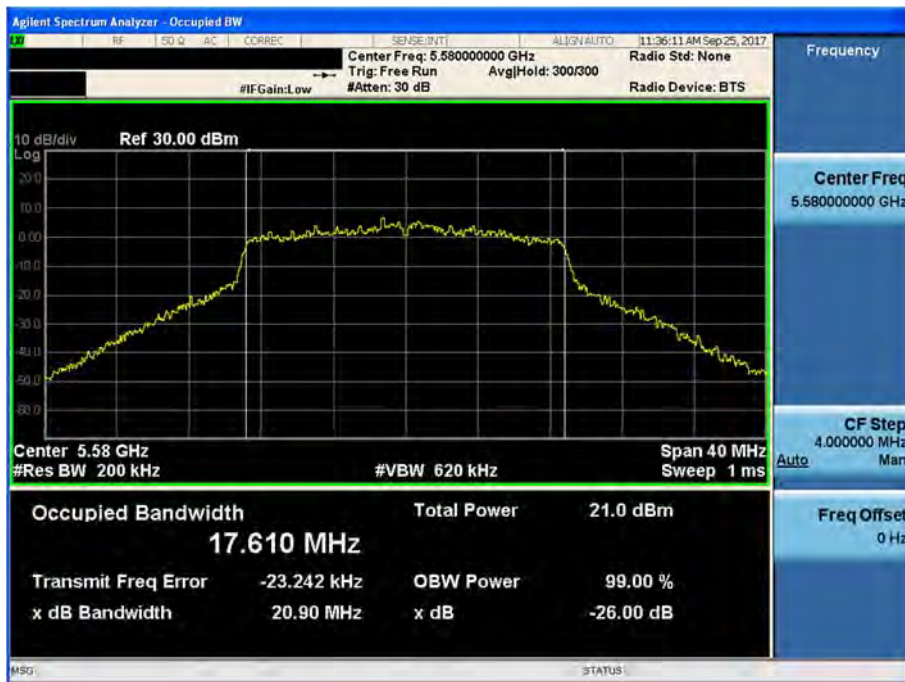


26 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.144

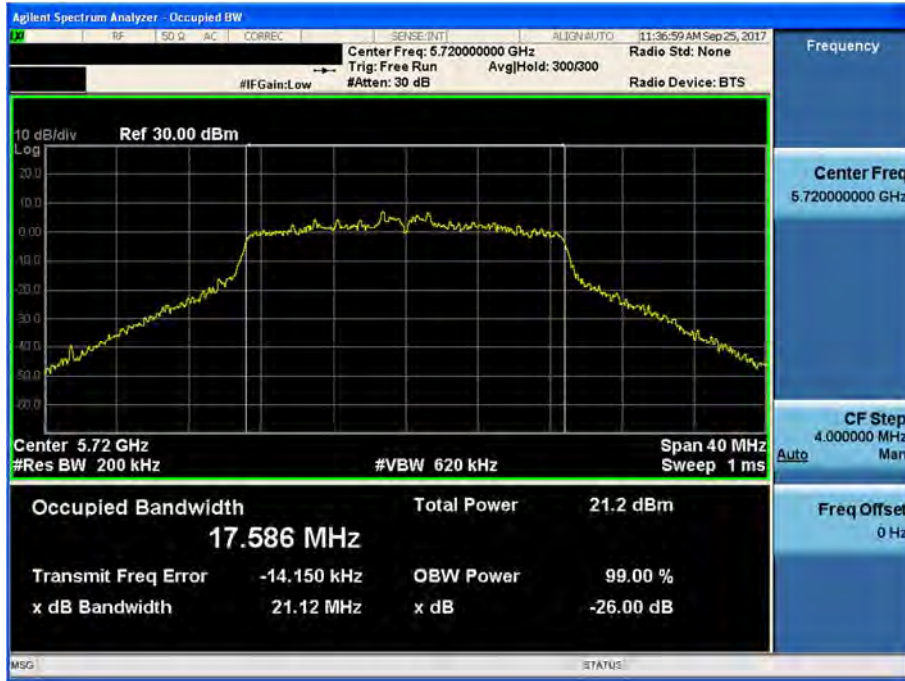


26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.38

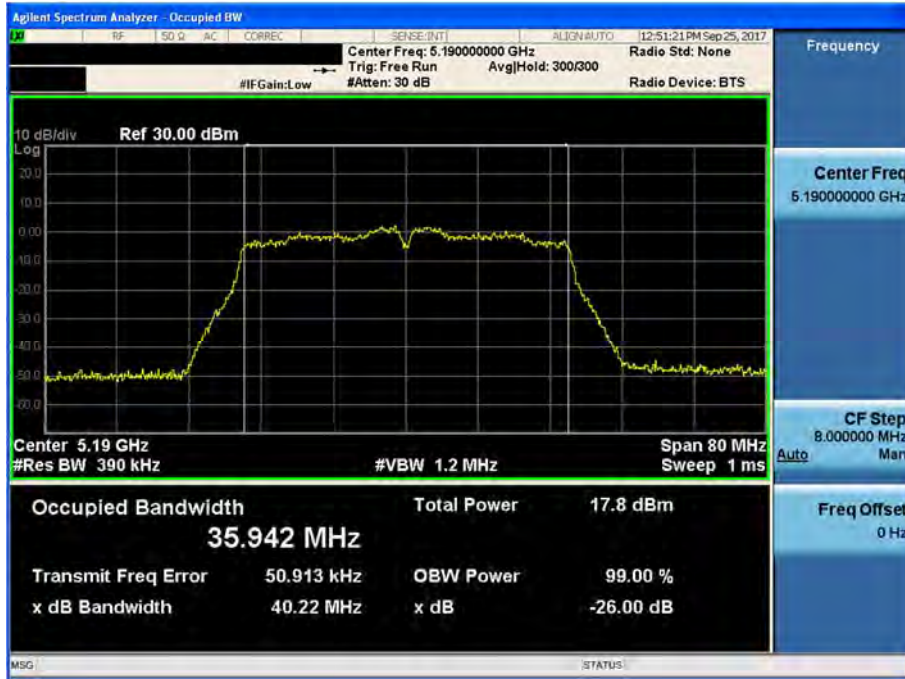

26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.46

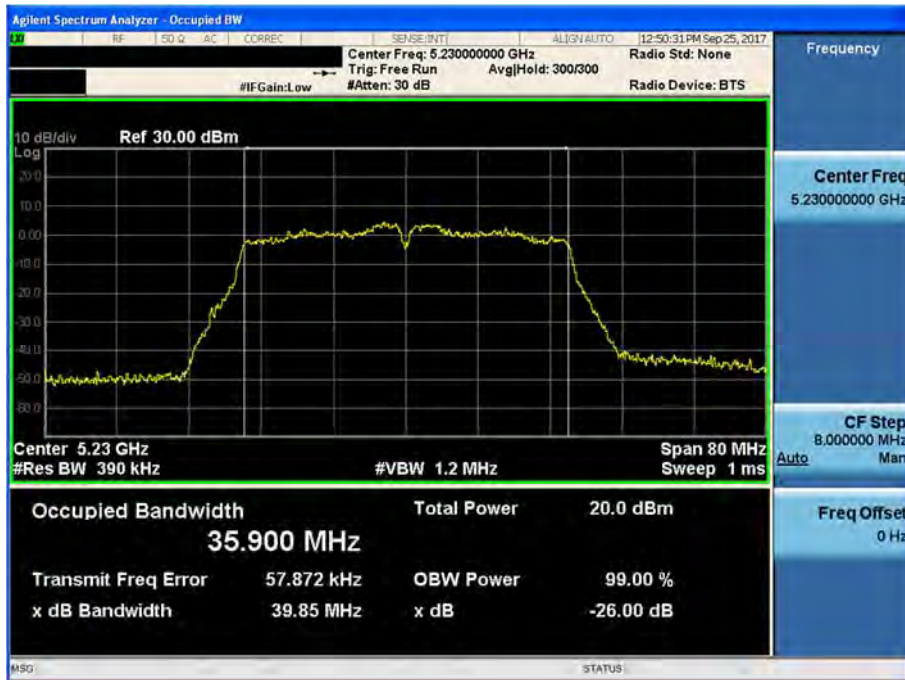


26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.54




26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.62

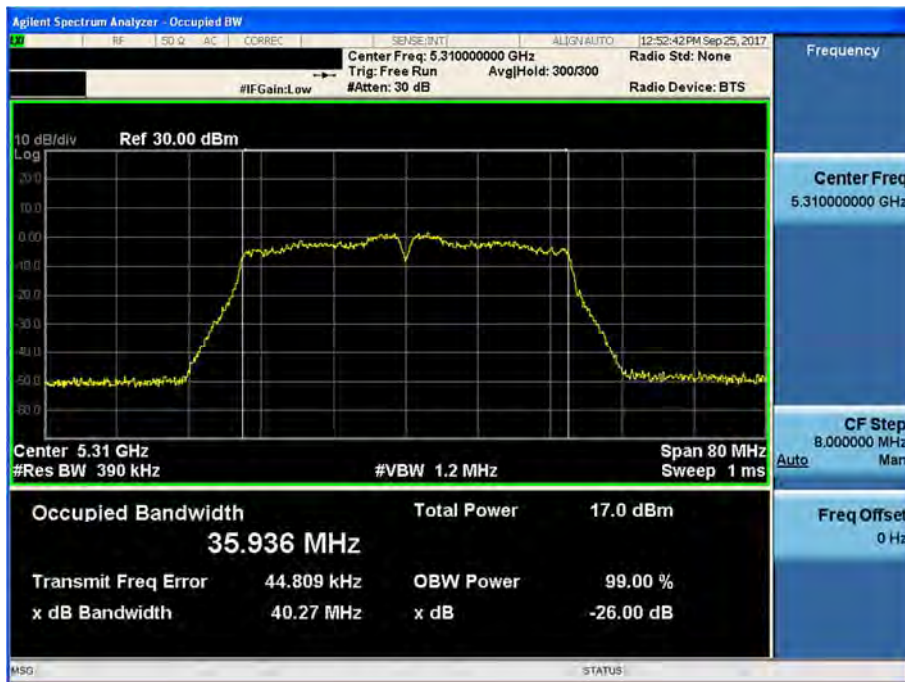


26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.102

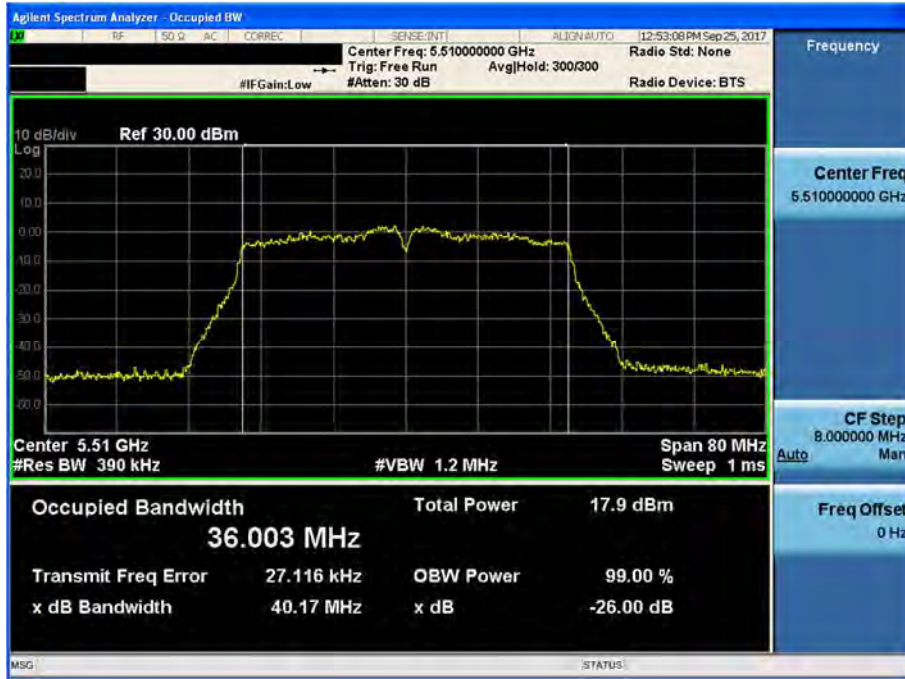

26 dB Bandwidth


Test Mode: 802.11n HT40 & ANT 2 & Ch.110

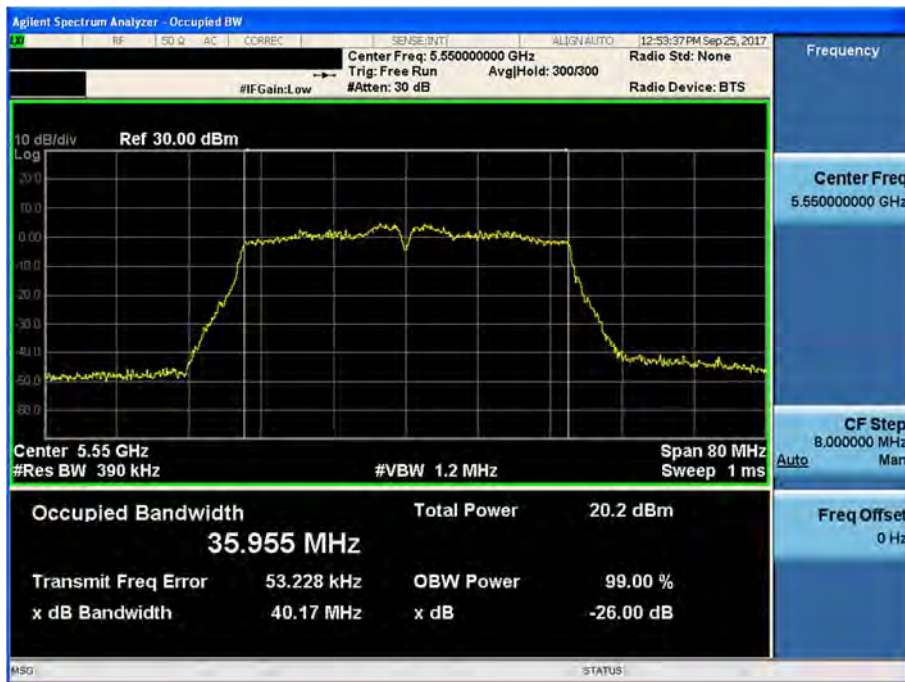




26 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.142

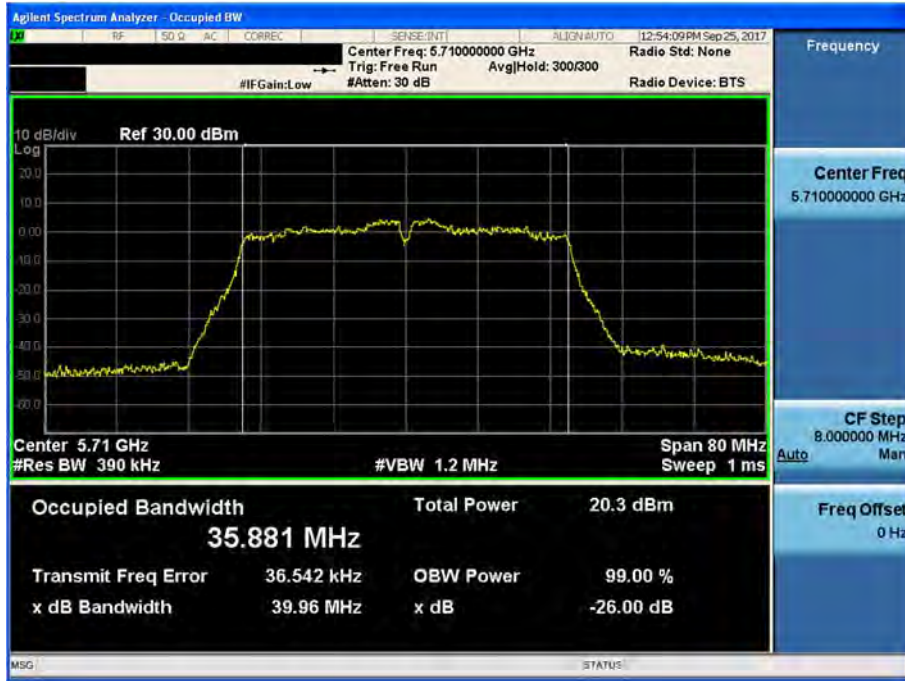


26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.42

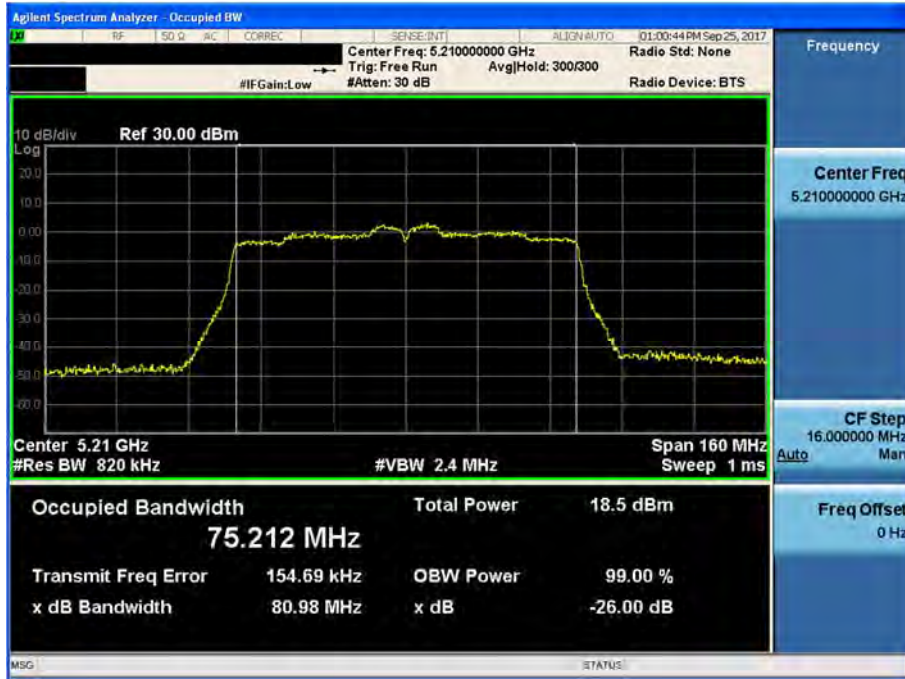


26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.58

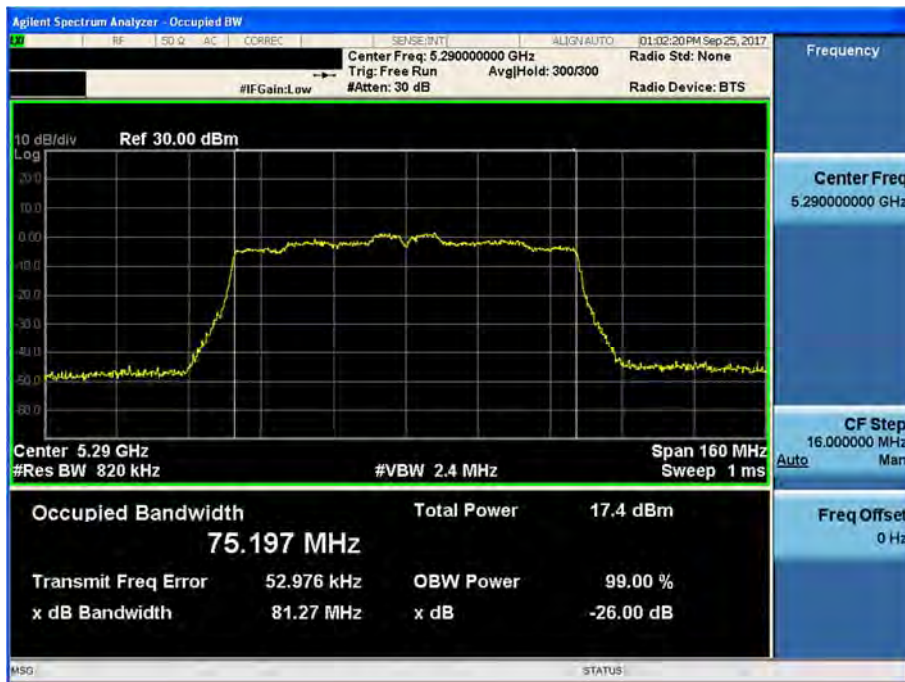


26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.106

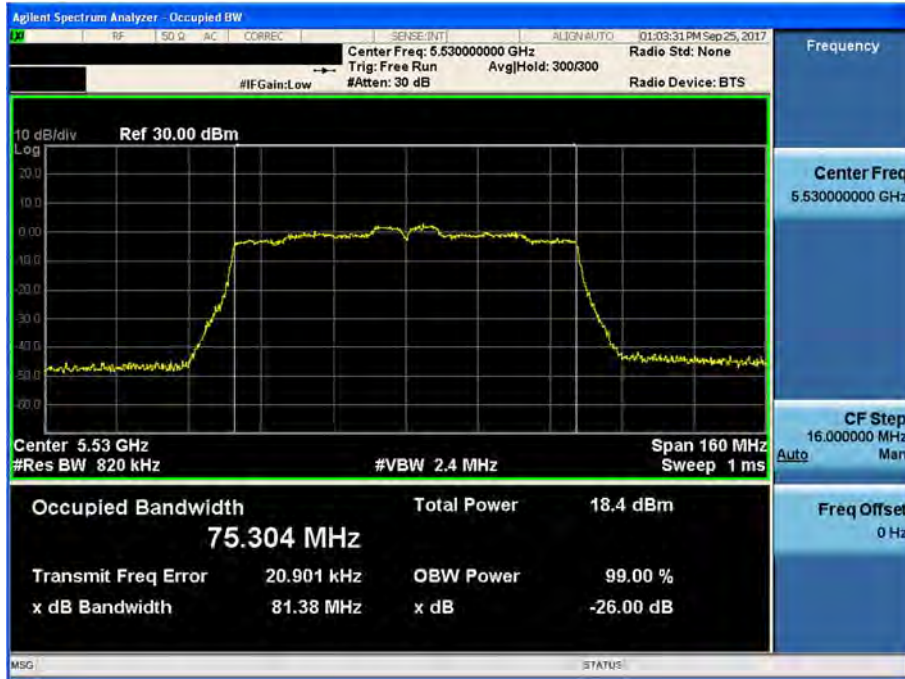

26 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.138

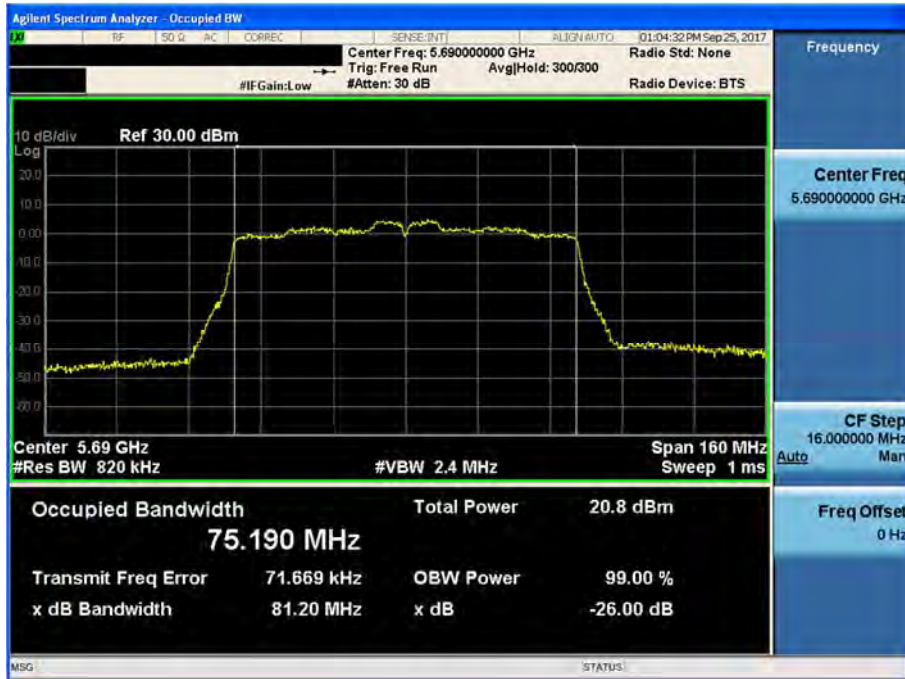

## 8.2 Minimum Emission Bandwidth (6 dB Bandwidth)

### ■ Test Requirements

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### ■ Test Configuration

Refer to the APPENDIX I.

### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v01r04**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth  $\geq 3 \times \text{RBW}$ .
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### ■ TEST RESULTS: **Comply**

Mode	Band	Channel	Frequency [MHz]	Test Result [MHz]	
				ANT 1	ANT 2
802.11a	U-NII 3	149	5745	15.14	15.08
		157	5785	15.05	15.08
		165	5825	15.07	15.08
802.11n (HT20)	U-NII 3	149	5745	15.11	14.99
		157	5785	15.06	15.07
		165	5825	15.10	15.01
802.11n (HT40)	U-NII 3	151	5755	35.10	35.06
		159	5795	35.12	35.05
802.11ac (VHT80)	U-NII 3	155	5775	70.13	70.17

RESULT PLOTS


6 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.149




6 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.157

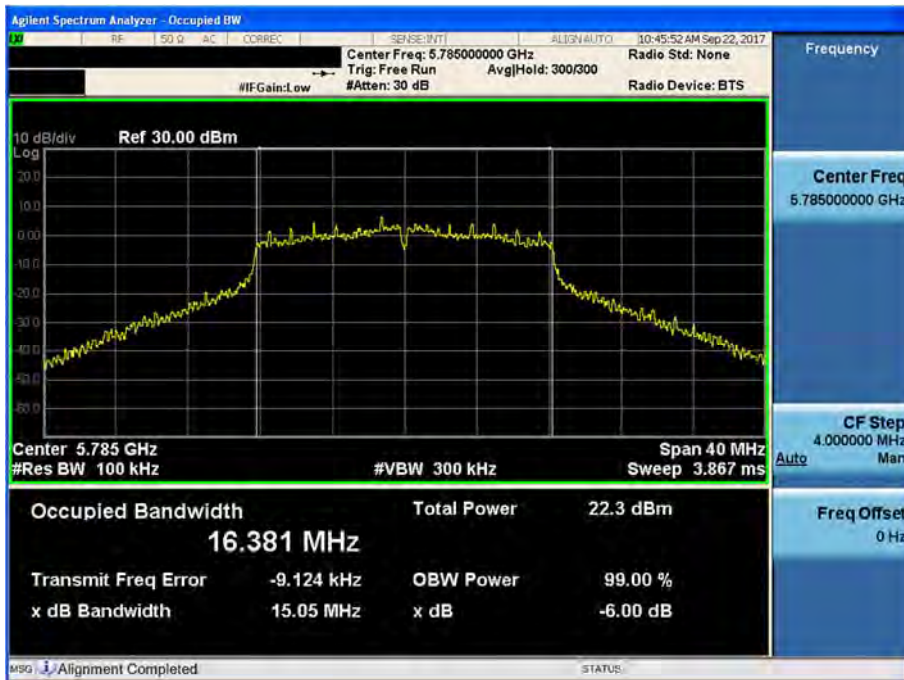


6 dB Bandwidth

Test Mode: 802.11a & ANT 1 & Ch.165

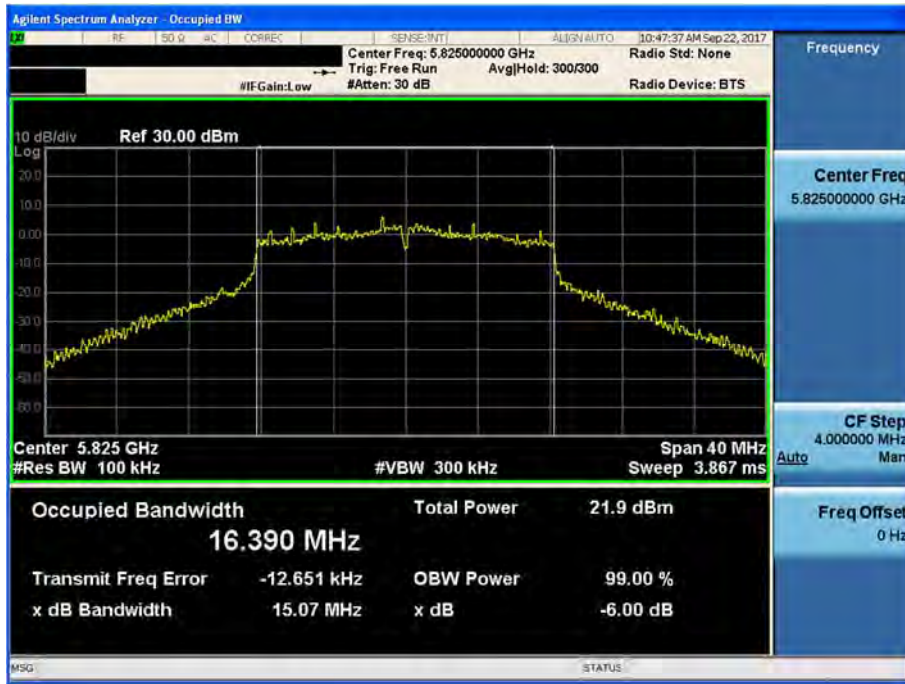


6 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.149

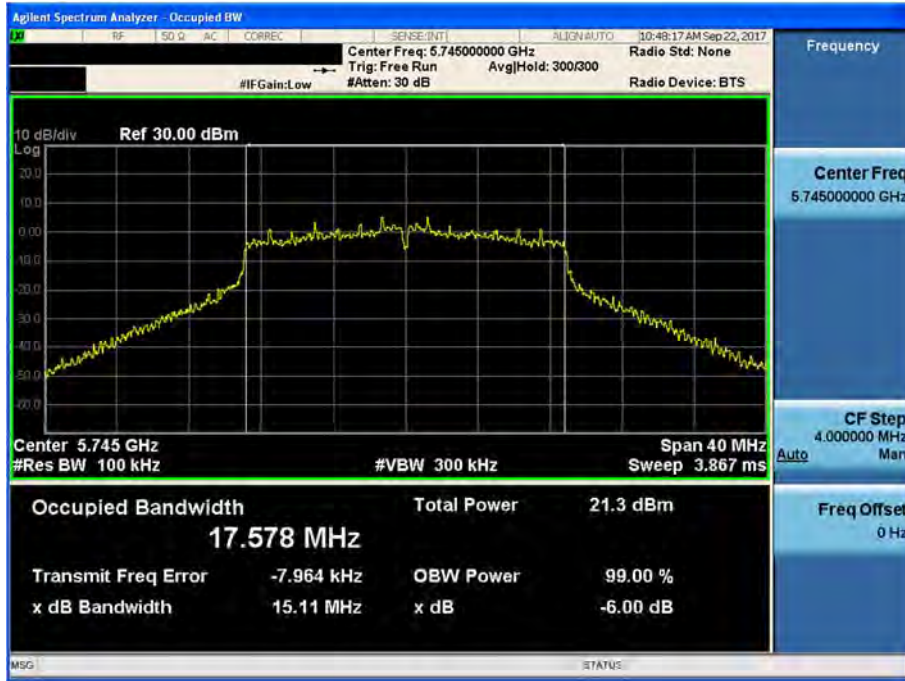


6 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 1 & Ch.157

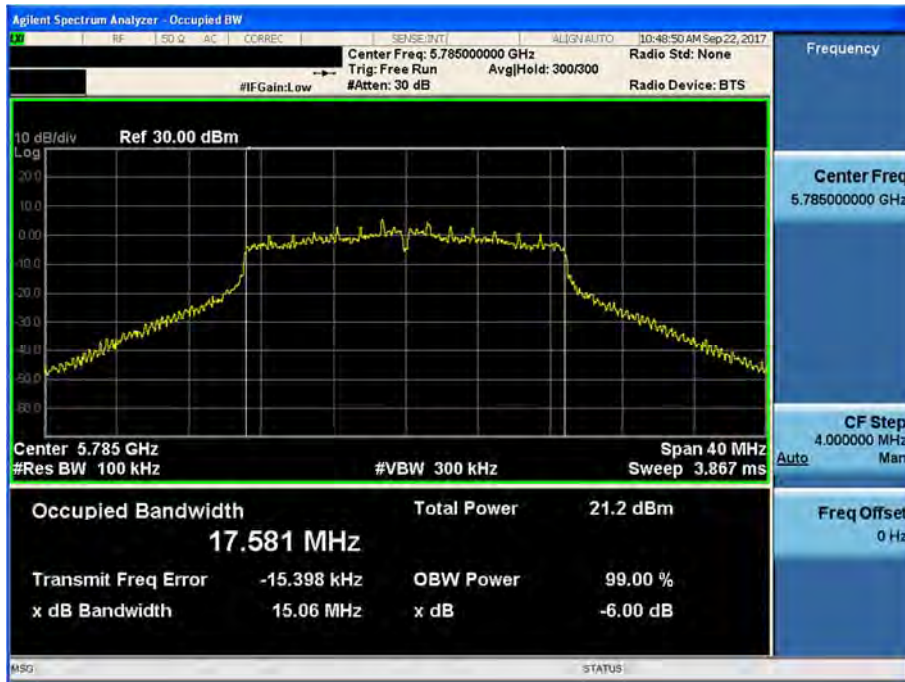

6 dB Bandwidth


Test Mode: 802.11n HT20 & ANT 1 & Ch.165

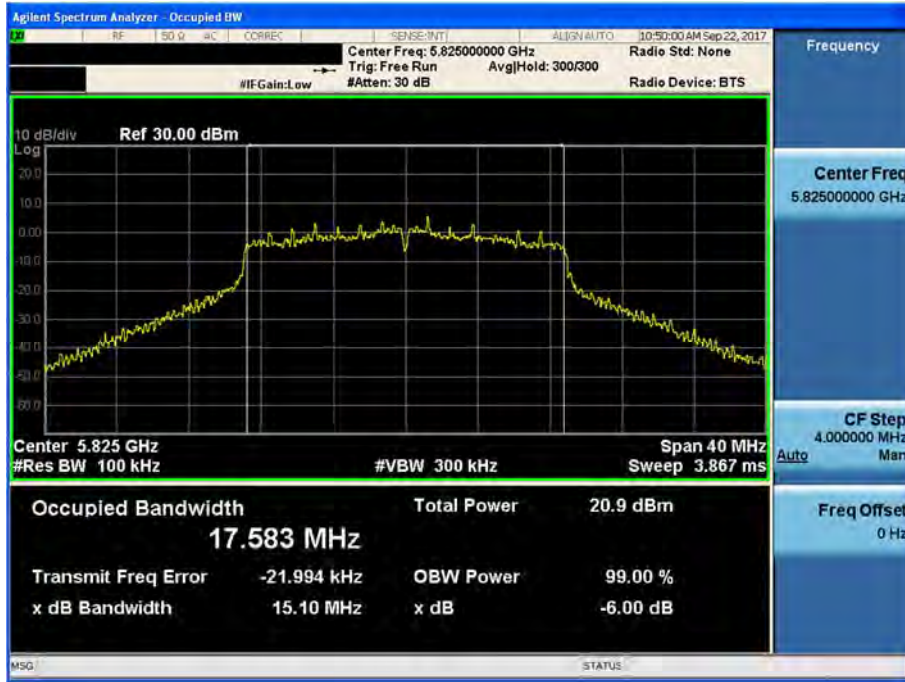




6 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.151

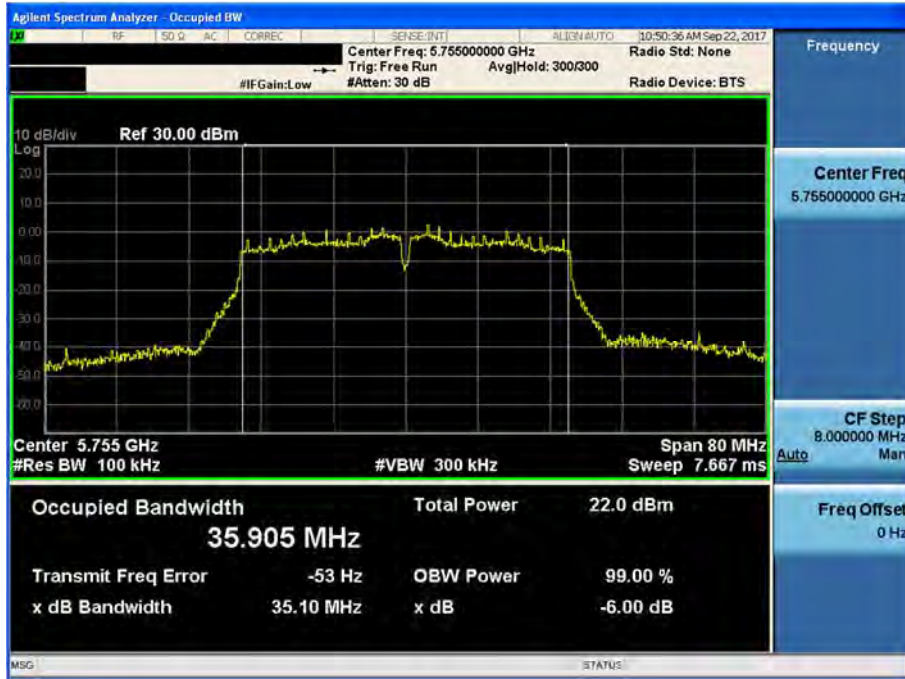


6 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 1 & Ch.159

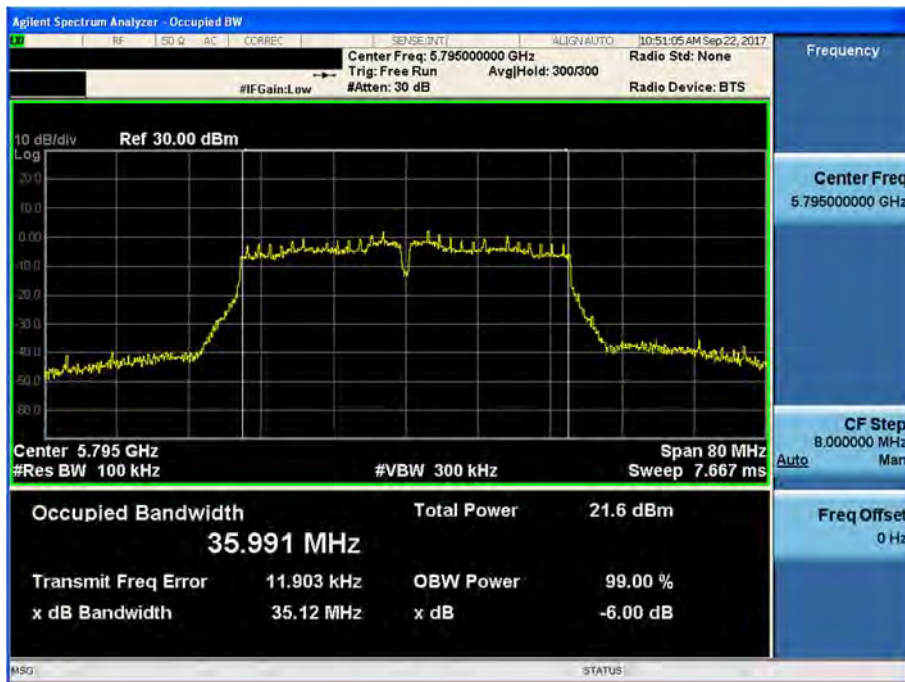


6 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.155

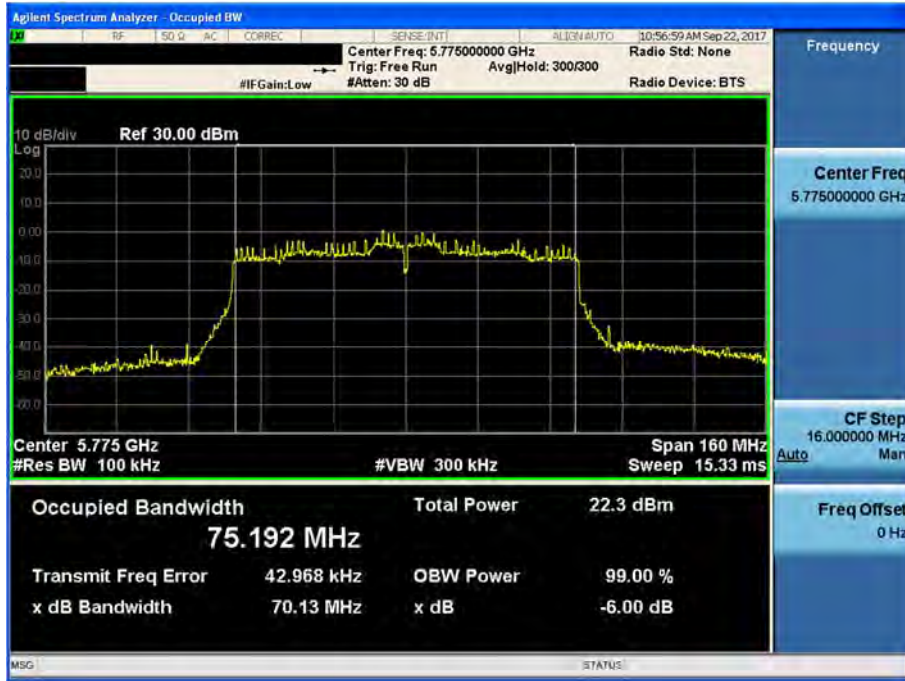


6 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.149

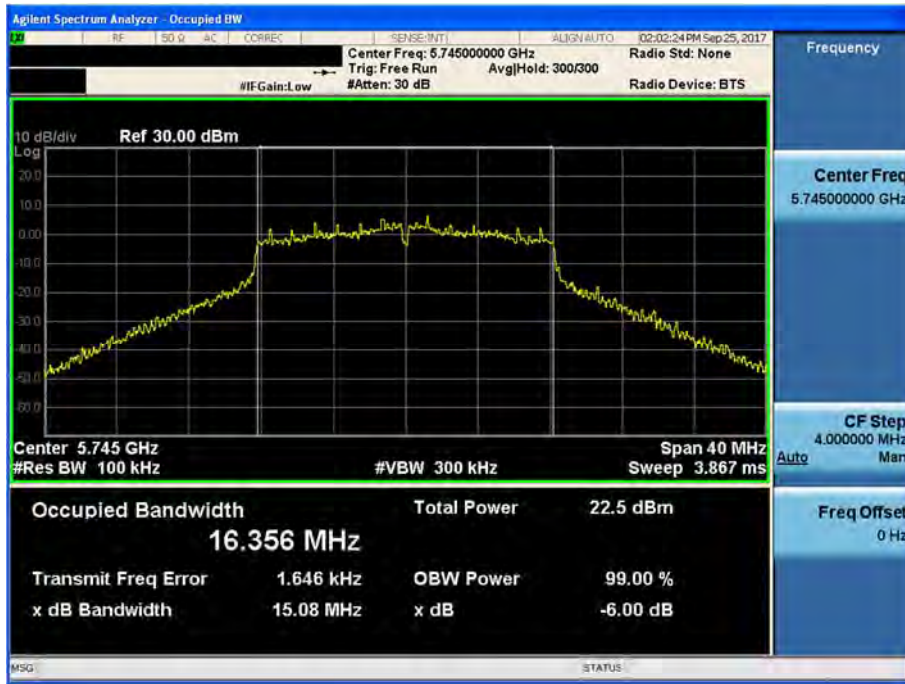


6 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.157

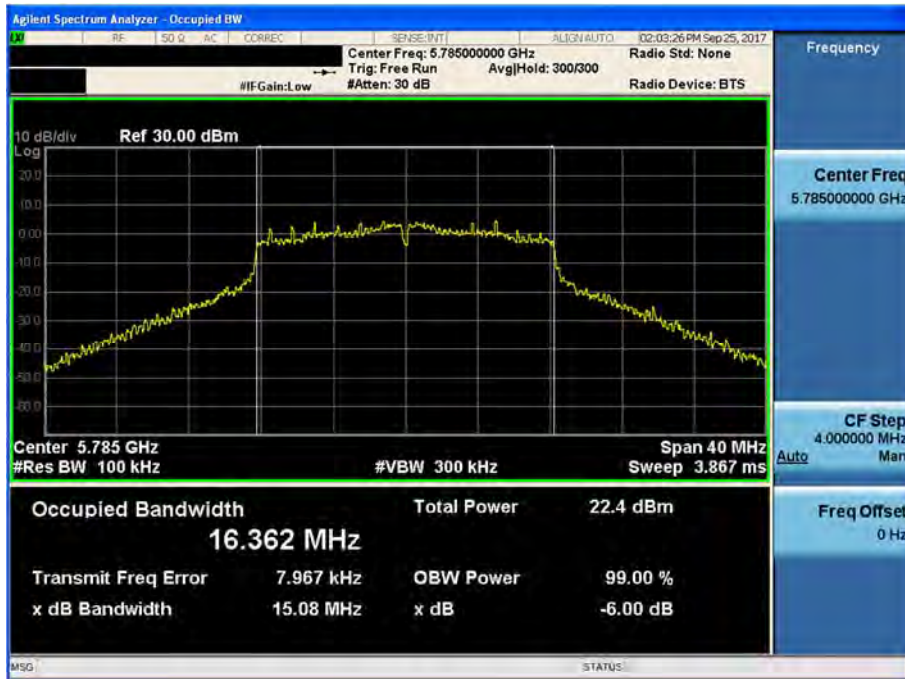


6 dB Bandwidth

Test Mode: 802.11a & ANT 2 & Ch.165

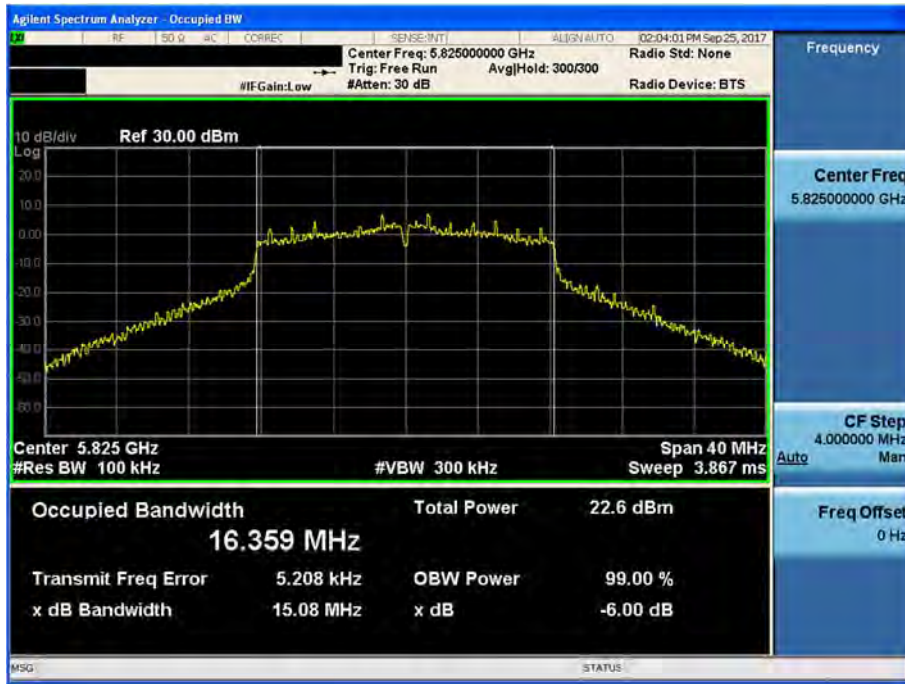


6 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.149

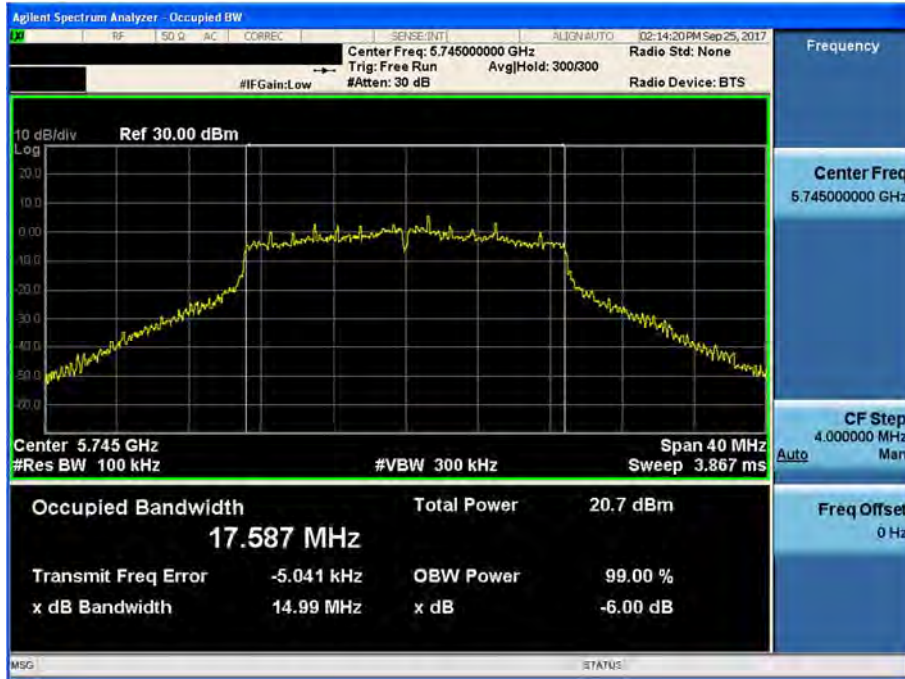


6 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.157

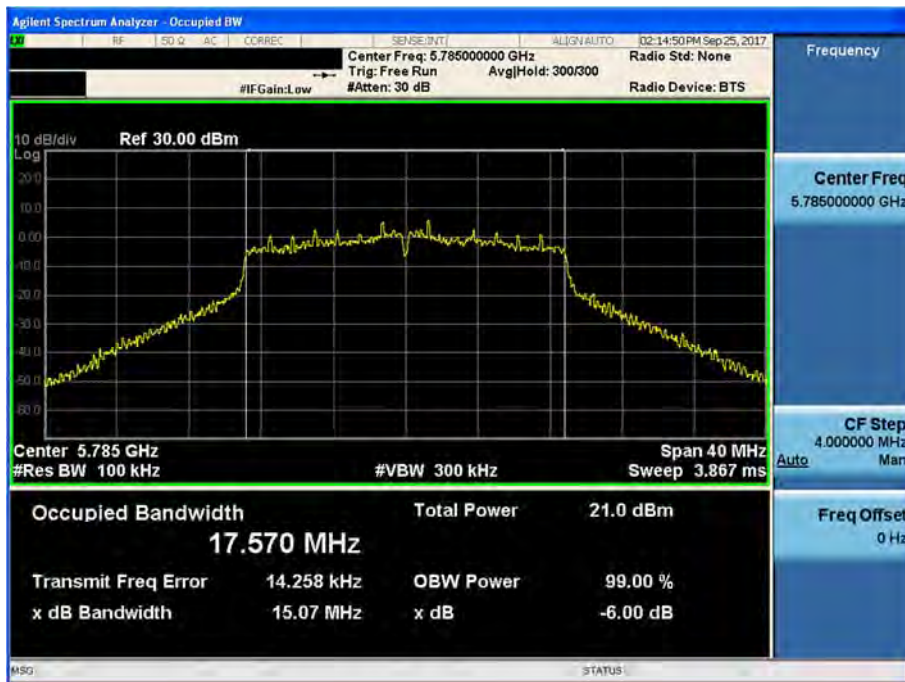


6 dB Bandwidth

Test Mode: 802.11n HT20 & ANT 2 & Ch.165

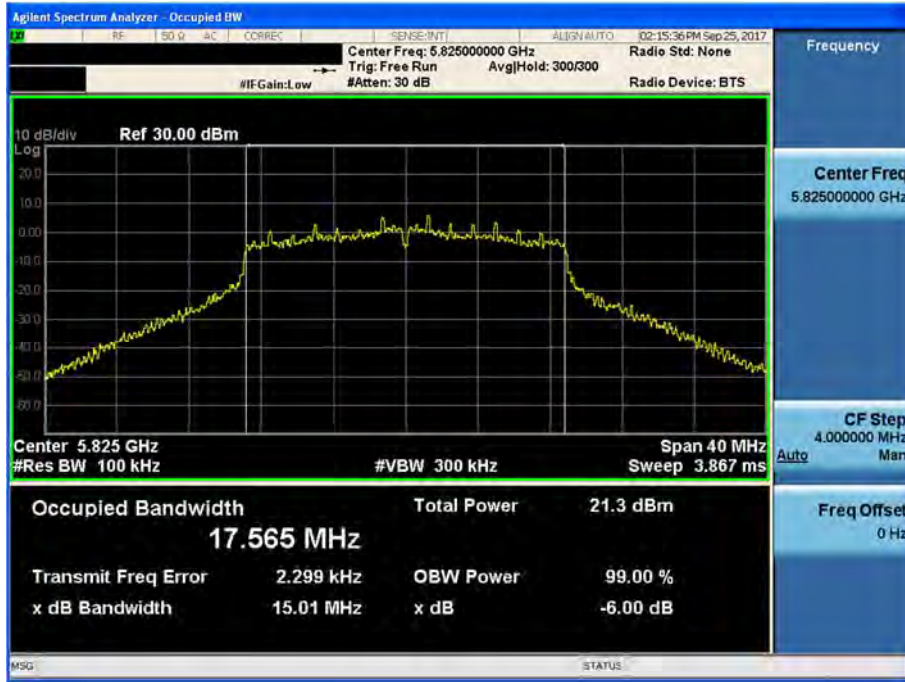


6 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.151

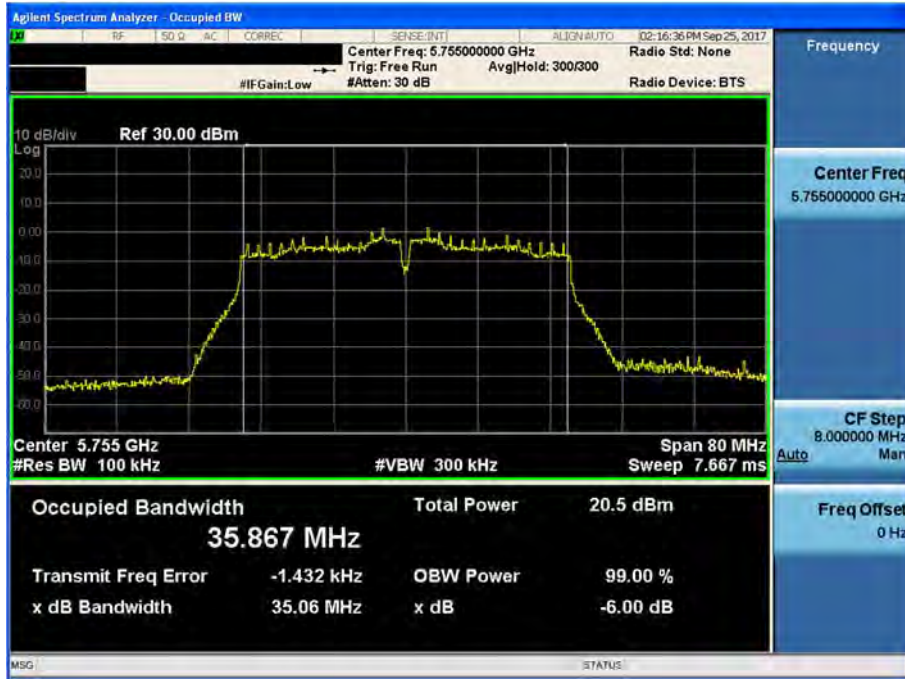


6 dB Bandwidth

Test Mode: 802.11n HT40 & ANT 2 & Ch.159

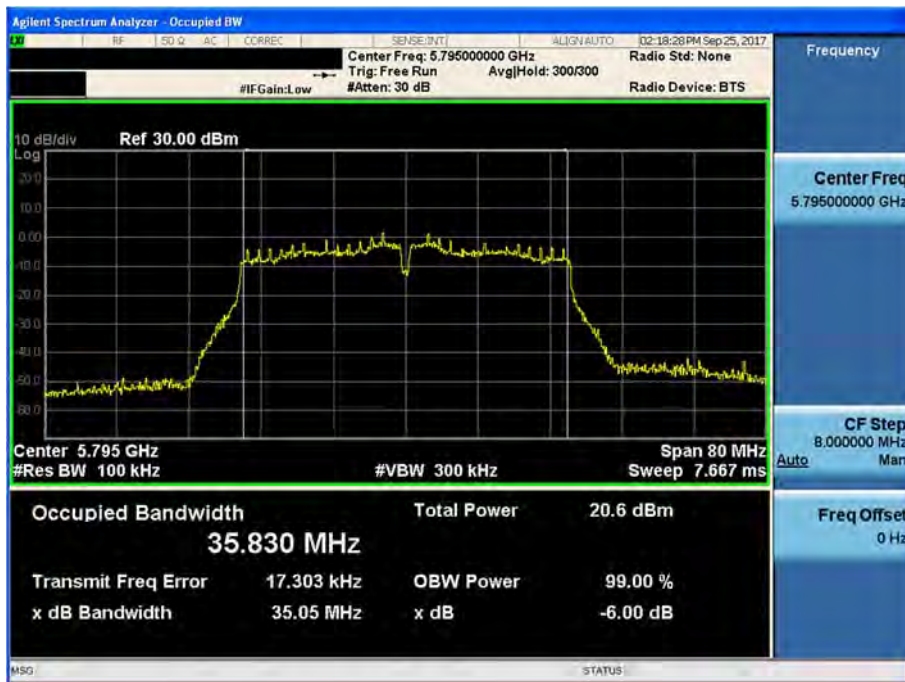

6 dB Bandwidth

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.155

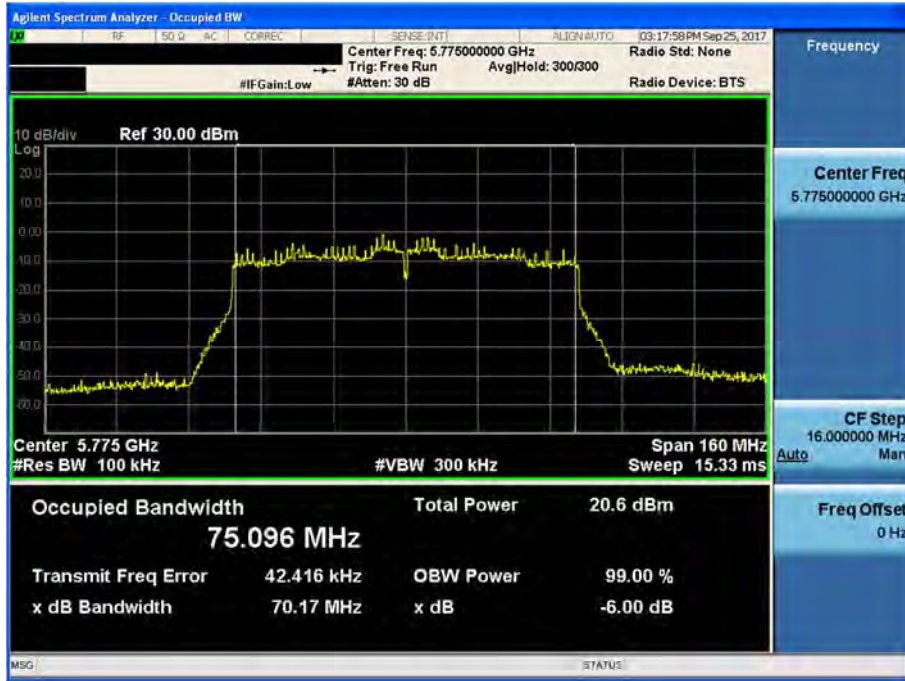



## 8.3 Maximum Conducted Output Power

### ■ Test Requirements

#### Part. 15.407(a)

##### (1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.**

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**- Output power Limit Calculation**

Band	Power Limit [mW]	Calculated Limit [dBm]	Antenna Gain (Worst case) [dBi]	Determined Limit [dBm]
U-NII 1	250	23.97	-2.827	<b>23.97</b>

Band	Power Limit [mW]	Calculated Limit [dBm]	Antenna Gain (Worst case) [dBi]	Determined Limit [dBm]
	Least 26 dBc BW [MHz]			
U-NII 2A	250	23.97	-2.827	<b>23.97</b>
	20.94	24.20		
U-NII 2C	250	23.97	-2.827	<b>23.97</b>
	20.90	24.20		

Band	Power Limit [mW]	Calculated Limit [dBm]	Antenna Gain [dBi]	Determined Limit [dBm]
U-NII 3	1000	30.00	-1.850	<b>30.00</b>

**■ Test Configuration**


Method PM-G

**■ Test Configuration**
**Method PM-G of KDB789033 D02v01r04**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

■ Test Results: **Comply**

- Output Power: Single

Mode	CH	Freq.[MHz]	Test Result [dBm]		
			ANT 1	ANT 2	-
802.11a	36	5180	15.47	15.47	-
	40	5200	15.52	15.41	-
	48	5240	<b>15.65</b>	<b>15.63</b>	-
	52	5260	15.67	15.62	-
	60	5300	<b>15.71</b>	15.77	-
	64	5320	15.68	<b>15.80</b>	-
	100	5500	15.80	15.81	-
	116	5580	15.77	<b>15.93</b>	-
	144	5720	<b>15.88</b>	15.63	-
	149	5745	<b>16.00</b>	15.58	-
	157	5785	15.51	<b>15.99</b>	-
	165	5825	15.09	15.88	-

Mode	CH	Freq.[MHz]	Test Result [dBm]		
			ANT 1	ANT 2	-
802.11n(HT20)	36	5180	14.39	14.32	-
	40	5200	14.43	14.34	-
	48	5240	<b>14.56</b>	<b>14.65</b>	-
	52	5260	14.56	14.52	-
	60	5300	14.57	<b>14.72</b>	-
	64	5320	<b>14.61</b>	14.62	-
	100	5500	14.74	14.74	-
	116	5580	14.59	<b>14.90</b>	-
	144	5720	<b>14.82</b>	14.63	-
	149	5745	<b>14.87</b>	14.62	-
	157	5785	14.38	<b>15.00</b>	-
	165	5825	14.45	14.83	-

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	-
802.11n(HT40)	38	5190	11.54	11.57	-
	46	5230	<b>13.54</b>	<b>13.74</b>	-
	54	5270	<b>13.66</b>	<b>13.79</b>	-
	62	5310	10.70	10.97	-
	102	5510	11.78	11.75	-
	110	5550	13.64	<b>13.81</b>	-
	142	5710	<b>13.81</b>	13.56	-
	151	5755	<b>13.95</b>	13.68	-
	159	5795	13.61	<b>13.82</b>	

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	-
802.11ac(VHT20)	36	5180	14.37	14.36	-
	40	5200	14.45	14.37	-
	48	5240	<b>14.58</b>	<b>14.68</b>	-
	52	5260	14.56	14.54	-
	60	5300	14.52	<b>14.72</b>	-
	64	5320	<b>14.62</b>	14.63	-
	100	5500	14.74	14.75	-
	116	5580	14.66	<b>14.76</b>	-
	144	5720	<b>14.87</b>	14.60	
	149	5745	<b>14.83</b>	14.65	-
	157	5785	14.48	<b>14.98</b>	-
		165	5825	14.50	14.88

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	-
802.11ac(VHT40)	38	5190	11.53	11.51	-
	46	5230	<b>13.52</b>	<b>13.75</b>	-
	54	5270	<b>13.65</b>	<b>13.78</b>	-
	62	5310	10.66	10.94	-
	102	5510	11.76	11.75	-
	110	5550	13.65	<b>13.69</b>	-
	142	5710	<b>13.79</b>	13.59	-
	151	5755	<b>13.83</b>	13.70	-
	159	5795	13.61	<b>13.82</b>	

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	-
802.11ac(VHT80)	42	5210	<b>11.15</b>	<b>11.29</b>	-
	58	5290	<b>10.14</b>	<b>10.53</b>	-
	106	5530	11.11	11.38	-
	138	5690	<b>13.45</b>	<b>13.29</b>	-
	155	5775	<b>13.25</b>	<b>13.33</b>	-

## - Summed Output Power: CDD

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11a	36	5180	15.47	15.47	18.48
	40	5200	15.52	15.41	18.48
	48	5240	15.65	15.63	<b>18.65</b>
	52	5260	15.67	15.62	18.66
	60	5300	15.71	15.77	18.75
	64	5320	15.68	15.80	<b>18.75</b>
	100	5500	15.80	15.81	18.82
	116	5580	15.77	15.93	<b>18.86</b>
	144	5720	15.88	15.63	<b>18.77</b>
	149	5745	16.00	15.58	<b>18.81</b>
	157	5785	15.51	15.99	18.77
165	5825	15.09	15.88	18.51	

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11n(HT20)	36	5180	14.39	14.32	17.37
	40	5200	14.43	14.34	17.40
	48	5240	14.56	14.65	<b>17.62</b>
	52	5260	14.56	14.52	17.55
	60	5300	14.57	14.72	<b>17.66</b>
	64	5320	14.61	14.62	17.63
	100	5500	14.74	14.74	17.75
	116	5580	14.59	14.90	<b>17.76</b>
	144	5720	14.82	14.63	<b>17.74</b>
	149	5745	14.87	14.62	<b>17.76</b>
	157	5785	14.38	15.00	17.71
165	5825	14.45	14.83	17.65	

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11n(HT40)	38	5190	11.54	11.57	14.57
	46	5230	13.54	13.74	<b>16.65</b>
	54	5270	13.66	13.79	<b>16.74</b>
	62	5310	10.70	10.97	13.85
	102	5510	11.78	11.75	14.78
	110	5550	13.64	13.81	<b>16.74</b>
	142	5710	13.81	13.56	<b>16.70</b>
	151	5755	13.95	13.68	<b>16.83</b>
	159	5795	13.61	13.82	16.73

Mode	CH	Freq. [MHz]	Test Result [dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11ac(VHT20)	36	5180	14.37	14.36	17.38
	40	5200	14.45	14.37	17.42
	48	5240	14.58	14.68	<b>17.64</b>
	52	5260	14.56	14.54	17.56
	60	5300	14.52	14.72	17.63
	64	5320	14.62	14.63	<b>17.64</b>
	100	5500	14.74	14.75	<b>17.76</b>
	116	5580	14.66	14.76	17.72
	144	5720	14.87	14.60	<b>17.75</b>
	149	5745	14.83	14.65	<b>17.75</b>
	157	5785	14.48	14.98	17.75
	165	5825	14.50	14.88	17.70

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11ac(VHT40)	38	5190	11.53	11.51	14.53
	46	5230	13.52	13.75	<b>16.65</b>
	54	5270	13.65	13.78	<b>16.73</b>
	62	5310	10.66	10.94	13.81
	102	5510	11.76	11.75	14.77
	110	5550	13.65	13.69	<b>16.68</b>
	142	5710	13.79	13.59	<b>16.70</b>
	151	5755	13.83	13.70	<b>16.78</b>
	159	5795	13.61	13.82	16.73

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11ac(VHT80)	42	5210	11.15	11.29	<b>14.23</b>
	58	5290	10.14	10.53	13.35
	106	5530	11.11	11.38	<b>14.26</b>
	138	5690	13.45	13.29	<b>16.38</b>
	155	5775	13.25	13.33	<b>16.30</b>

**- Summed Output Power: SDM**

Mode	CH	Freq. [MHz]	Test Result [dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (SDM)
802.11n(HT20)	36	5180	14.62	14.54	17.59
	40	5200	14.66	14.51	17.60
	48	5240	14.78	14.87	<b>17.84</b>
	52	5260	14.77	14.76	17.78
	60	5300	14.71	14.88	<b>17.81</b>
	64	5320	14.72	14.80	17.77
	100	5500	14.91	14.96	<b>17.95</b>
	116	5580	14.88	14.96	17.93
	144	5720	14.95	14.79	<b>17.88</b>
	149	5745	14.95	14.75	<b>17.86</b>
	157	5785	14.66	14.94	17.81
	165	5825	14.64	14.96	17.81

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (SDM)
802.11n(HT40)	38	5190	11.58	11.66	14.63
	46	5230	13.64	13.91	<b>16.79</b>
	54	5270	13.89	13.94	<b>16.93</b>
	62	5310	10.63	11.07	13.87
	102	5510	11.94	11.97	14.97
	110	5550	13.80	13.82	<b>16.82</b>
	142	5710	13.81	13.55	<b>16.69</b>
	151	5755	13.94	13.72	<b>16.84</b>
	159	5795	13.58	13.92	16.76



Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (SDM)
802.11ac(VHT20)	36	5180	14.58	14.57	17.59
	40	5200	14.68	14.54	17.62
	48	5240	14.82	14.89	<b>17.87</b>
	52	5260	14.77	14.81	17.80
	60	5300	14.71	14.92	17.83
	64	5320	14.77	14.90	<b>17.85</b>
	100	5500	14.92	14.86	<b>17.90</b>
	116	5580	14.79	14.92	17.87
	144	5720	14.98	14.84	<b>17.92</b>
	149	5745	14.85	14.83	<b>17.85</b>
	157	5785	14.64	14.94	17.80
	165	5825	14.54	14.78	17.67

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (SDM)
802.11ac(VHT40)	38	5190	11.62	11.57	14.61
	46	5230	13.66	13.88	<b>16.78</b>
	54	5270	13.81	13.84	<b>16.84</b>
	62	5310	10.58	11.05	13.83
	102	5510	11.88	11.84	14.87
	110	5550	13.73	14.02	<b>16.89</b>
	142	5710	13.84	13.70	<b>16.78</b>
	151	5755	13.99	13.73	<b>16.87</b>
	159	5795	13.55	13.93	16.75

Mode	CH	Freq.[MHz]	Test Result[dBm]		
			ANT 1	ANT 2	ANT1+ANT2 (SDM)
802.11ac(VHT80)	42	5210	11.38	11.48	<b>14.44</b>
	58	5290	10.39	10.61	<b>13.51</b>
	106	5530	11.30	11.53	<b>14.43</b>
	138	5690	13.47	13.38	<b>16.44</b>
	155	5775	13.15	13.32	<b>16.25</b>

## 8.4 Maximum Power Spectral Density

### ■ Test requirements

#### Part. 15.407(a)

##### (1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. <sup>note1</sup>

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. <sup>note1</sup>

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band. <sup>note1</sup>

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. <sup>note1</sup>

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. <sup>note1,note2</sup>

**Note1:** If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Note2:** Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

#### - Peak Power Spectral Density Limit Calculation

Band	Limit [dBm]	Antenna Gain (Worst case) [dBi]	Determined Limit [dBm]
U-NII 1	11	-2.827	11
U-NII 2A	11	-2.827	11
U-NII 2C	11	-2.827	11
U-NII 3	30	-1.850	30

### ■ Test Configuration

Refer to the APPENDIX I.

**■ Test procedure**

Maximum Power Spectral Density is measured using Measurement Procedure **of KDB789033 D02v01r04**

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA - 1, SA - 2, SA - 3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
  - a) **If Method SA - 2 or SA - 2 Alternative was used, add  $10 \log(1 / x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.**
  - b) If Method SA - 3 Alternative was used and the linear mode was used in step II.E.2.g (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725 - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
  - a) Set  $RBW \geq 1 / T$ , where T is defined in section II.B.1.a). (Refer to Appendix II)
  - b) Set  $VBW \geq 3 RBW$ .
  - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz} / RBW)$  to the measured result, whereas  $RBW (< 500 \text{ kHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
  - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log(1 \text{ MHz} / RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
  - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

**Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW = 100 kHz is available on nearly all spectrum analyzers.**

■ Test results: **Comply**

## - Power spectral density: Single

Mode	Channel	Frequency [MHz]	Reading [dBm]		T.F [dB] Note 1	Test Result [dBm]	
			ANT 1	ANT 2		ANT 1	ANT 2
802.11a	36	5180	6.52	6.32	0.09	6.61	6.41
	40	5200	6.60	6.59		6.69	6.68
	48	5240	6.69	6.70		6.78	6.79
	52	5260	6.30	6.36		6.39	6.45
	60	5300	6.33	6.32		6.42	6.41
	64	5320	6.72	6.44		6.81	6.53
	100	5500	6.84	6.53		6.93	6.62
	116	5580	6.73	6.46		6.82	6.55
	144	5720	6.55	6.57	6.64	6.66	
	149	5745	-1.87	-1.88	7.08	5.21	5.20
	157	5785	-1.97	-1.97		5.11	5.11
	165	5825	-2.34	-2.14		4.74	4.94
802.11n (HT20)	36	5180	4.68	4.49	0.10	4.78	4.59
	40	5200	4.66	4.41		4.76	4.51
	48	5240	5.02	5.03		5.12	5.13
	52	5260	5.08	4.87		5.18	4.97
	60	5300	3.89	4.57		3.99	4.67
	64	5320	4.78	4.77		4.88	4.87
	100	5500	4.81	4.97		4.91	5.07
	116	5580	4.33	5.30		4.43	5.40
	144	5720	4.92	4.93	5.02	5.03	
	149	5745	-3.28	-4.31	7.09	3.81	2.78
	157	5785	-3.32	-3.97		3.77	3.12
	165	5825	-3.87	-3.86		3.22	3.23
802.11n (HT40)	38	5190	-1.18	-1.28	0.13	-1.05	-1.15
	46	5230	1.03	1.08		1.16	1.21
	54	5270	0.55	0.77		0.68	0.90
	62	5310	-2.58	-2.16		-2.45	-2.03
	102	5510	-1.35	-1.02		-1.22	-0.89
	110	5550	0.39	1.46		0.52	1.59
	142	5710	0.99	0.94	1.12	1.07	
	151	5755	-6.06	-8.03	7.13	1.07	-0.90
159	5795	-6.32	-7.55	0.81		-0.42	
802.11ac (VHT80)	42	5210	-4.30	-4.35	0.14	-4.16	-4.21
	58	5290	-5.85	-5.37		-5.71	-5.23
	106	5530	-4.82	-4.27		-4.68	-4.13
	138	5690	-2.29	-2.42		-2.15	-2.28
	155	5775	-9.55	-11.20	7.14	-2.41	-4.06
	-	-	-	-		-	-

Note 1: "Band 1, 2A, 2C [T.F] = D.C.F"

"Band 3 [T.F] = 10\*LOG(500kHz/100kHz) + D.C.F"

For D.C.F., please refer to appendix II.

Note 2: Test Result = Reading value + T.F

## - Summed Power spectral density: CDD

Mode	Channel	Frequency [MHz]	Test Result [dBm]		Test Result [dBm]
			ANT 1	ANT 2	ANT1+ANT2 (CDD)
802.11a	36	5180	6.61	6.41	9.52
	40	5200	6.69	6.68	9.70
	48	5240	6.78	6.79	9.80
	52	5260	6.39	6.45	9.43
	60	5300	6.42	6.41	9.43
	64	5320	6.81	6.53	9.68
	100	5500	6.93	6.62	9.79
	116	5580	6.82	6.55	9.70
	144	5720	6.64	6.66	9.66
	149	5745	5.21	5.20	8.22
	157	5785	5.11	5.11	8.12
165	5825	4.74	4.94	7.85	
802.11n (HT20)	36	5180	4.78	4.59	7.70
	40	5200	4.76	4.51	7.65
	48	5240	5.12	5.13	8.14
	52	5260	5.18	4.97	8.09
	60	5300	3.99	4.67	7.35
	64	5320	4.88	4.87	7.89
	100	5500	4.91	5.07	8.00
	116	5580	4.43	5.40	7.95
	144	5720	5.02	5.03	8.04
	149	5745	3.81	2.78	6.34
	157	5785	3.77	3.12	6.47
165	5825	3.22	3.23	6.24	
802.11n (HT40)	38	5190	-1.05	-1.15	1.91
	46	5230	1.16	1.21	4.20
	54	5270	0.68	0.90	3.80
	62	5310	-2.45	-2.03	0.78
	102	5510	-1.22	-0.89	1.96
	110	5550	0.52	1.59	4.10
	142	5710	1.12	1.07	4.11
	151	5755	1.07	-0.90	3.21
159	5795	0.81	-0.42	3.25	
802.11ac (VHT80)	36	5210	-4.16	-4.21	-1.17
	58	5290	-5.71	-5.23	-2.45
	106	5530	-4.68	-4.13	-1.39
	138	5690	-2.15	-2.28	0.80
	155	5775	-2.41	-4.06	-0.15
	-	-	-	-	-

**- Summed Power spectral density: SDM**

Mode	Channel	Frequency [MHz]	Reading [dBm]		T.F [dB] Note 1	Test Result [dBm]
			ANT 1	ANT 2		ANT1+ANT2 (SDM)
802.11n (HT20)	36	5180	-3.91	-3.91	10.17	9.27
	40	5200	-3.54	-3.68		9.57
	48	5240	-3.62	-3.99		9.38
	52	5260	-3.72	-4.31		9.18
	60	5300	-3.75	-3.91		9.35
	64	5320	-3.74	-3.89		9.37
	100	5500	-3.46	-3.64		9.63
	116	5580	-3.90	-3.63		9.42
	144	5720	-4.55	-2.88		9.55
	149	5745	-3.74	-4.32	7.16	6.15
	157	5785	-3.77	-3.85		6.36
165	5825	-3.97	-3.47	6.46		
802.11n (HT40)	38	5190	-8.33	-9.94	10.24	4.19
	46	5230	-6.55	-7.62		6.2
	54	5270	-6.34	-7.39		6.42
	62	5310	-9.30	-10.81		3.26
	102	5510	-8.40	-9.54		4.32
	110	5550	-6.49	-7.76		6.17
	142	5710	-6.81	-6.99		6.35
	151	5755	-5.97	-7.76	7.23	3.47
159	5795	-6.33	-7.18	3.51		
802.11ac (VHT80)	42	5210	-11.89	-12.84	10.25	0.92
	58	5290	-12.50	-14.25		-0.03
	106	5530	-11.85	-12.76		0.98
	138	5690	-9.52	-10.25		3.39
	155	5775	-9.29	-10.89		7.24
	-	-	-	-	-	

Note 1: "Band 1, 2A, 2C [T.F] = D.C.F"

"Band 3 [T.F] = 10\*LOG(500kHz/100kHz) + D.C.F"

For D.C.F., please refer to appendix II.

Note 2: Test Result = Reading value + T.F

RESULT PLOTS

- Power spectral density: Single-Antenna 1


Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.36



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.40

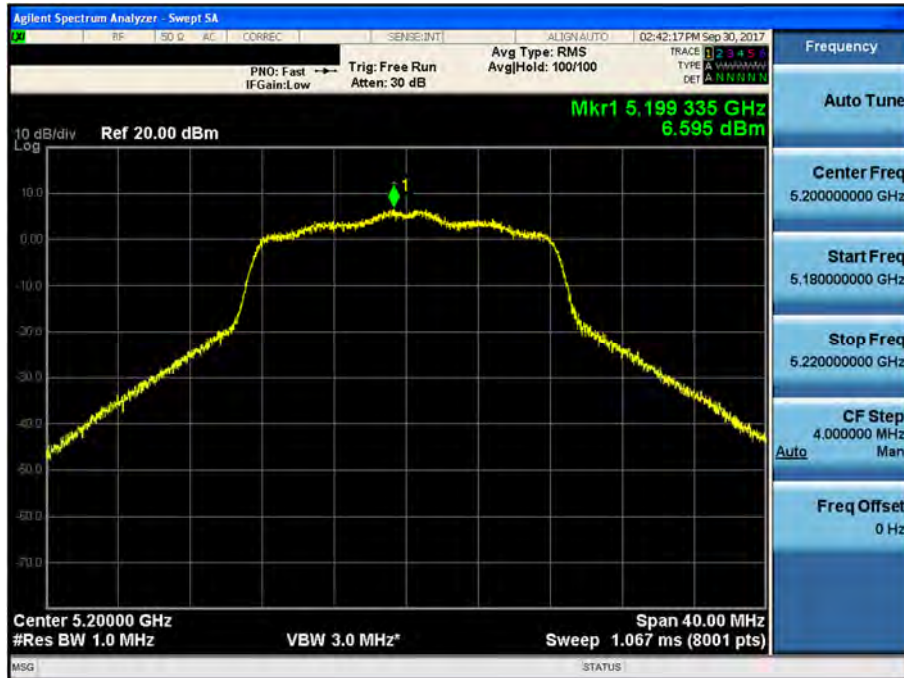

Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.48







Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.64



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.100



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.116




Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.144




Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.149

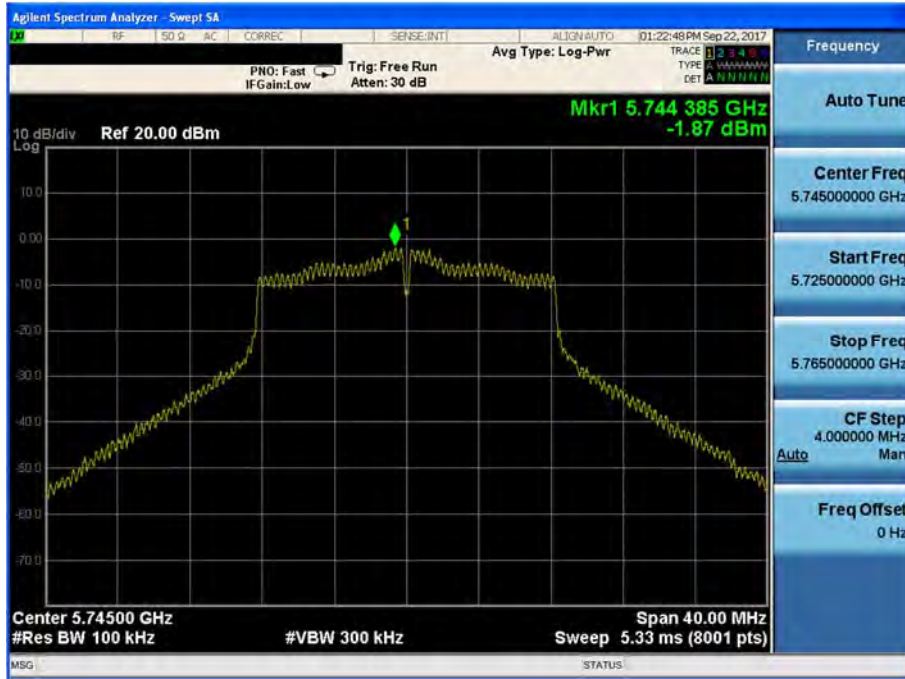


Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.157

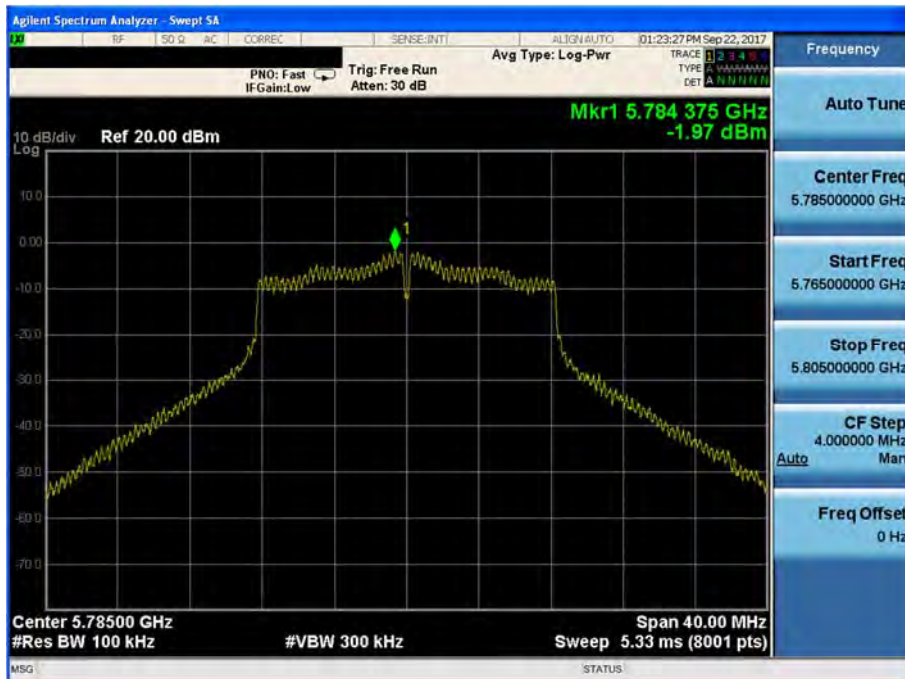

Maximum Power Spectral Density

Test Mode: 802.11a & ANT 1 & Ch.165

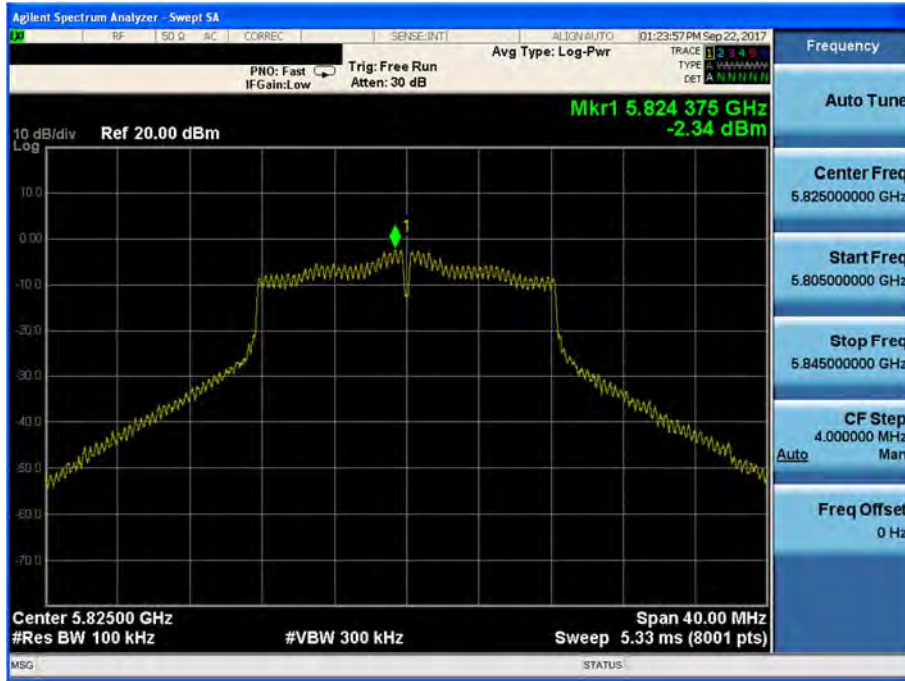

Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.36




Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.40



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.48

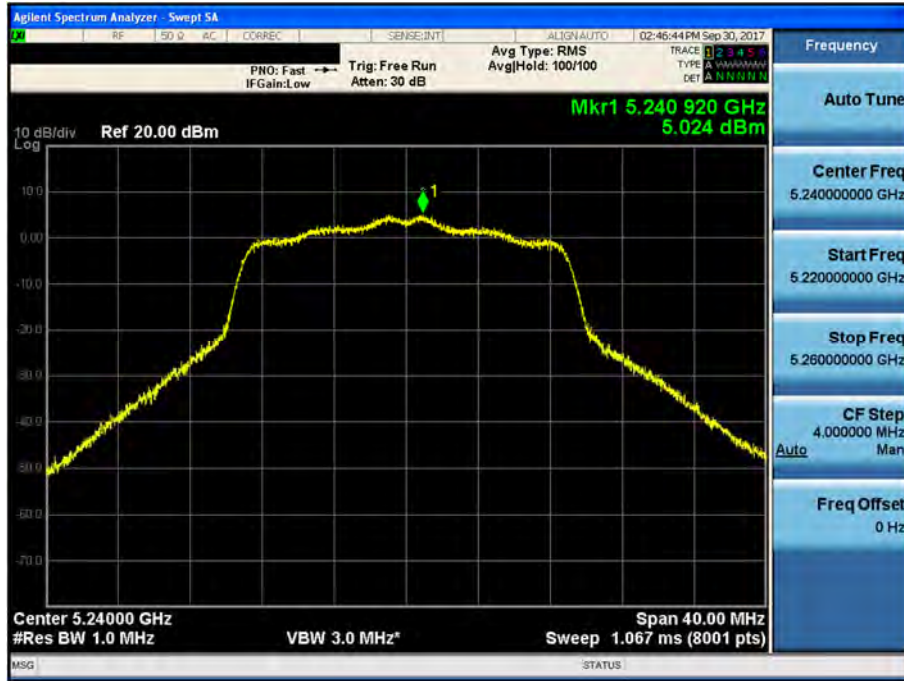



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.52



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.60



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.64



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.100



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.116




Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.144




Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.149

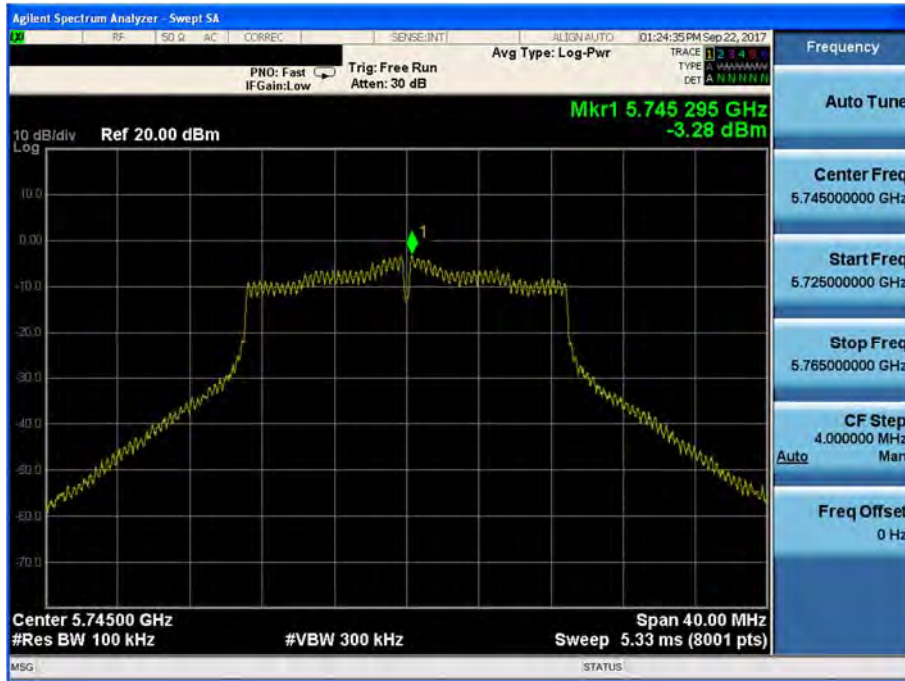


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.157

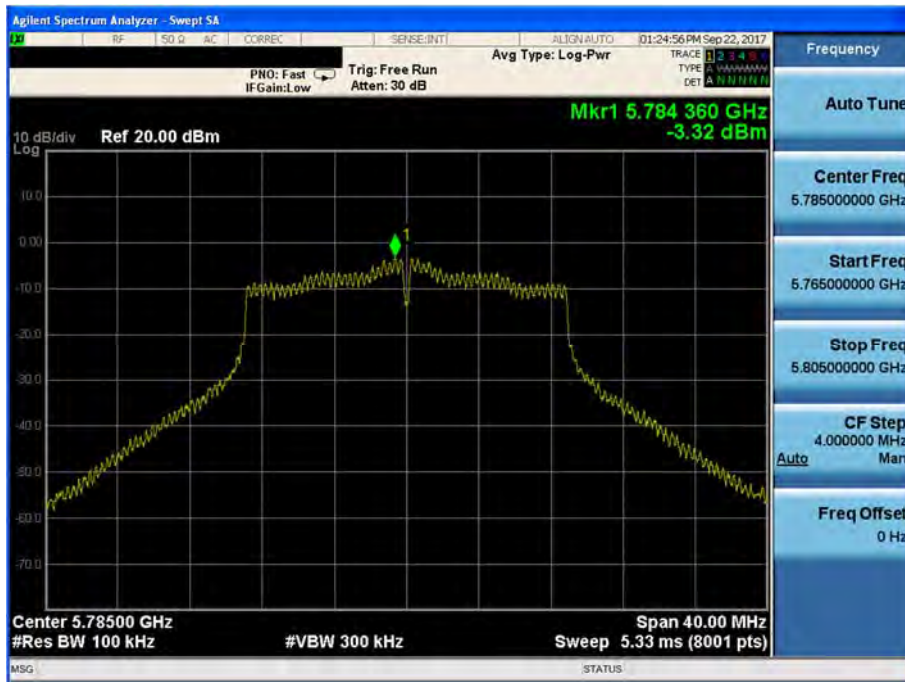

Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 1 & Ch.165

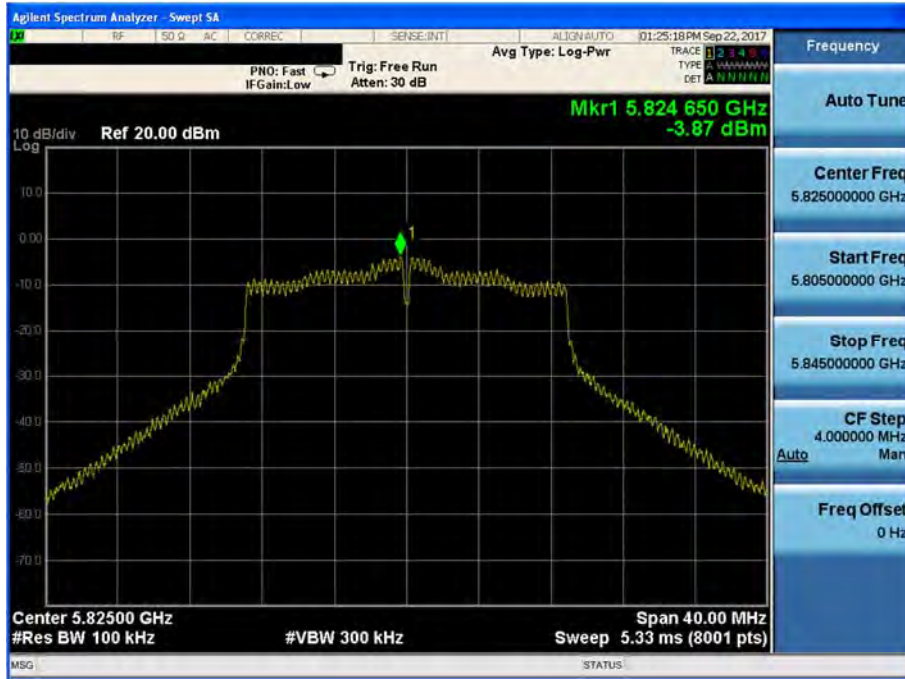

Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.38




Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.46




Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.54

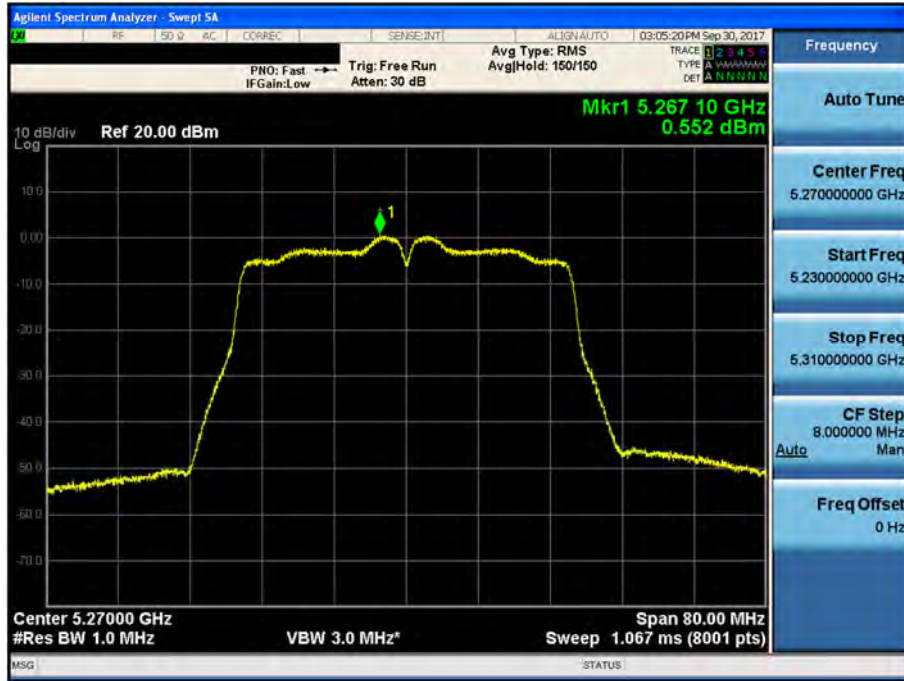

Maximum Power Spectral Density


Test Mode: 802.11n HT40 & ANT 1 & Ch.62

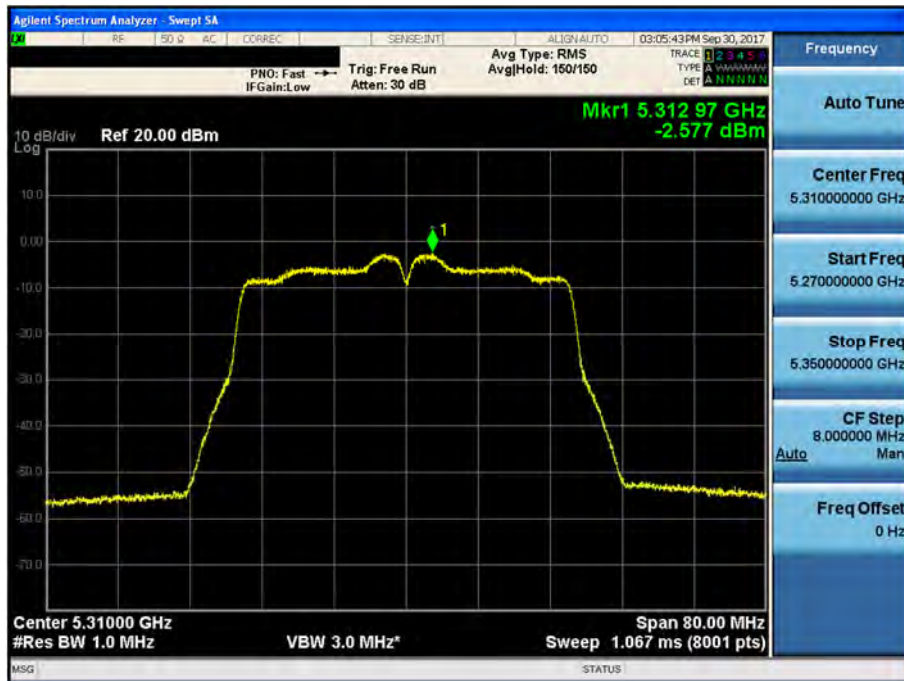




Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.102

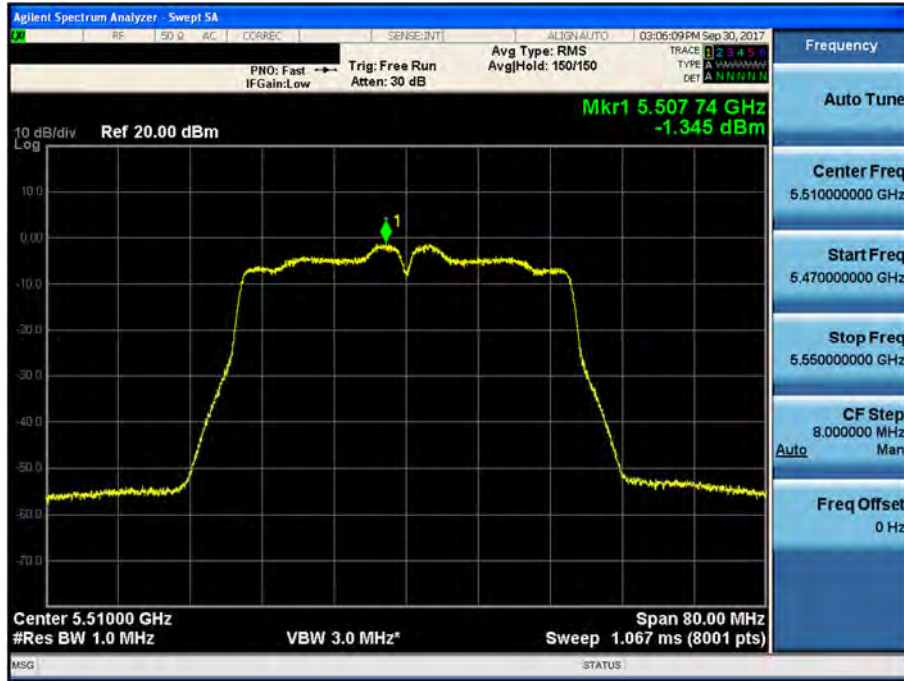


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.110

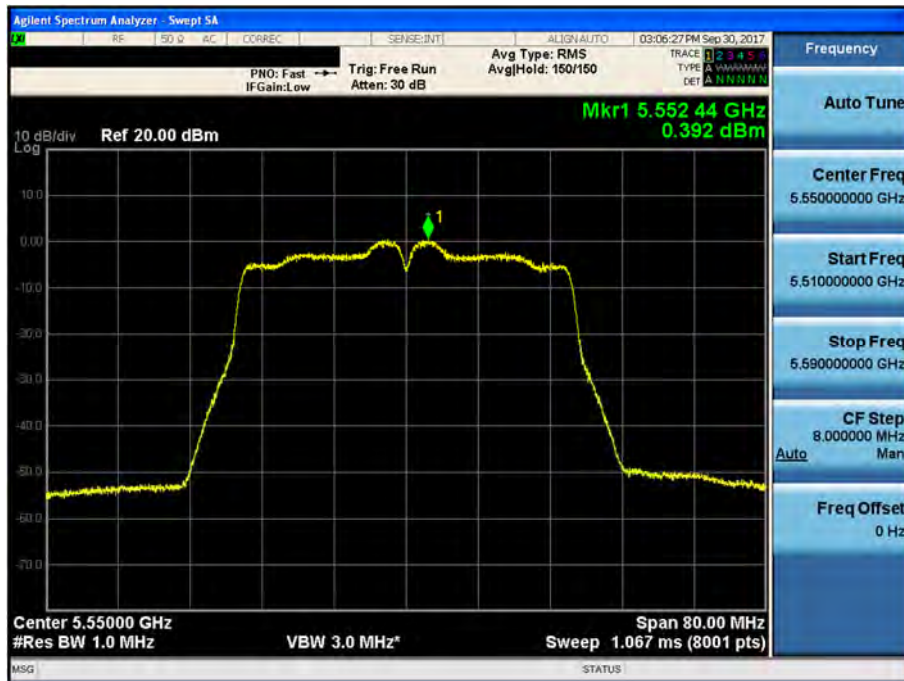


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.142

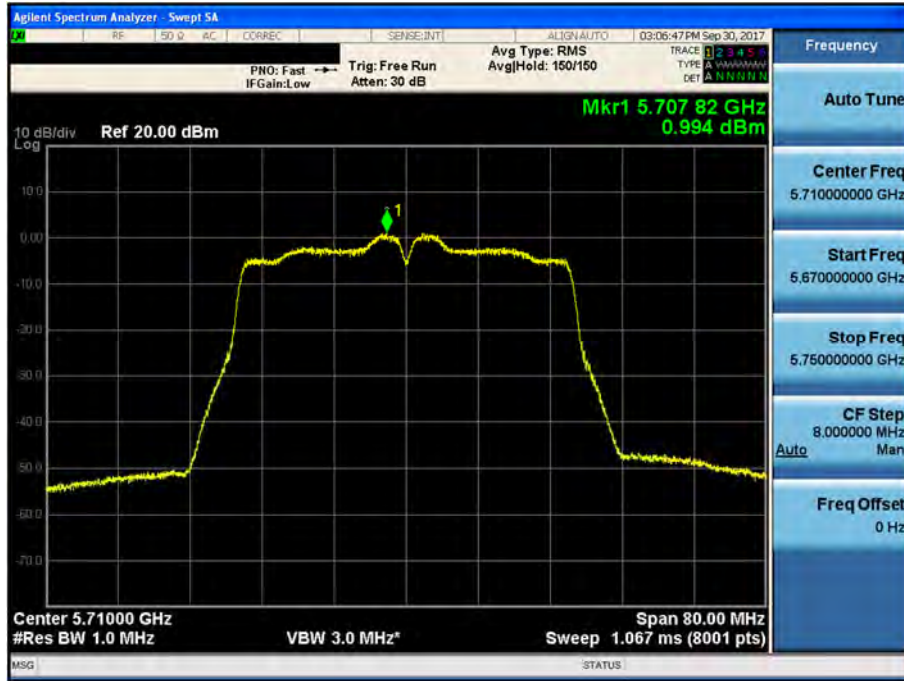

Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.151

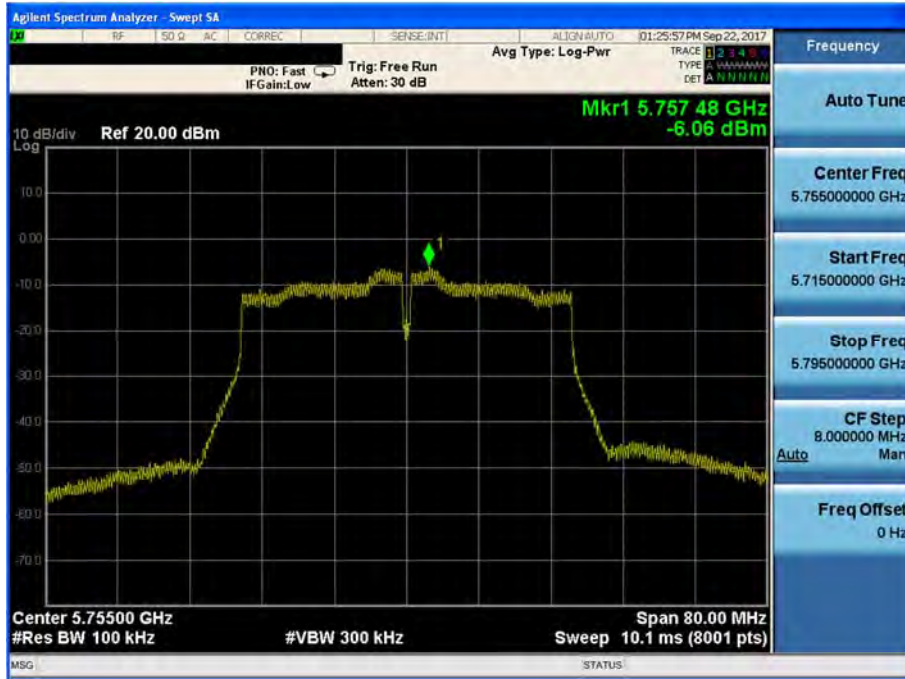

Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 1 & Ch.159




Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.42



Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.58

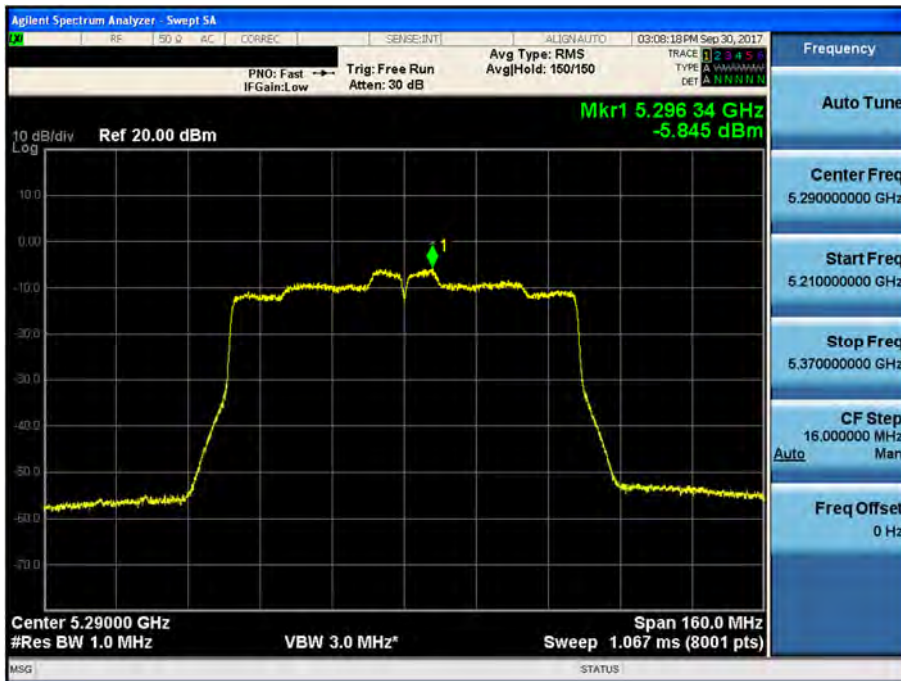

Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.106




Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 1 & Ch.138



Maximum Power Spectral Density


Test Mode: 802.11ac VHT80 & ANT 1 & Ch.155

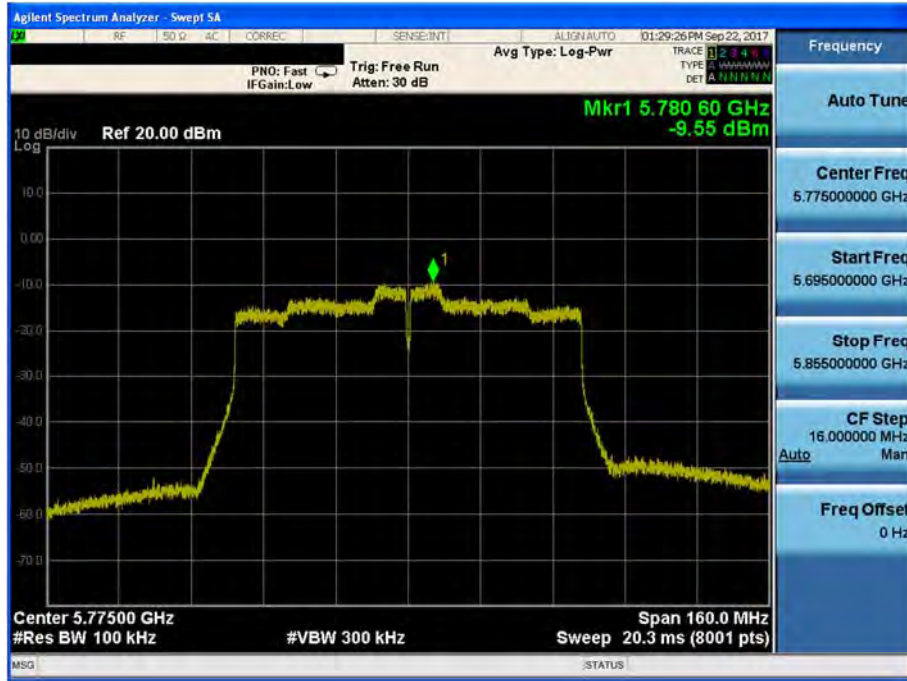

- Power spectral density: Single-Antenna 2

Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.36

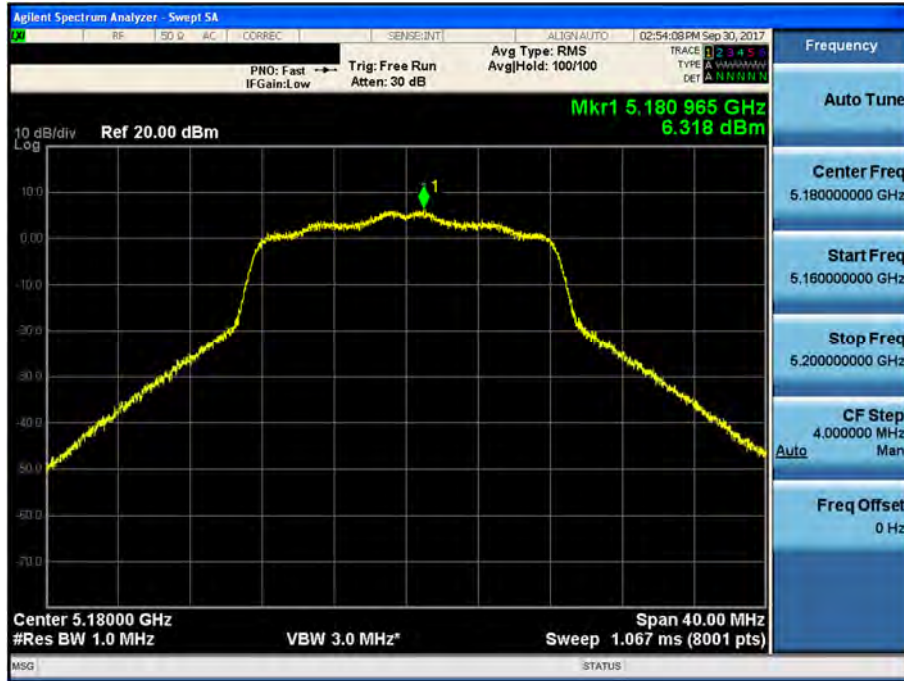

Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.40



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.48





Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.52



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.60



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.64



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.100



Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.116




Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.144




Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.149

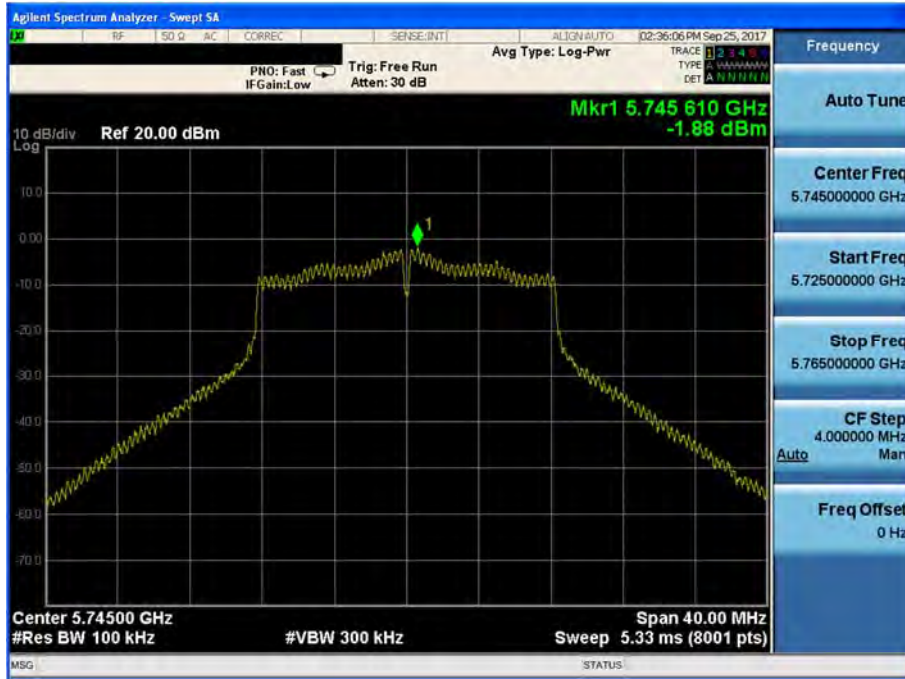


Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.157

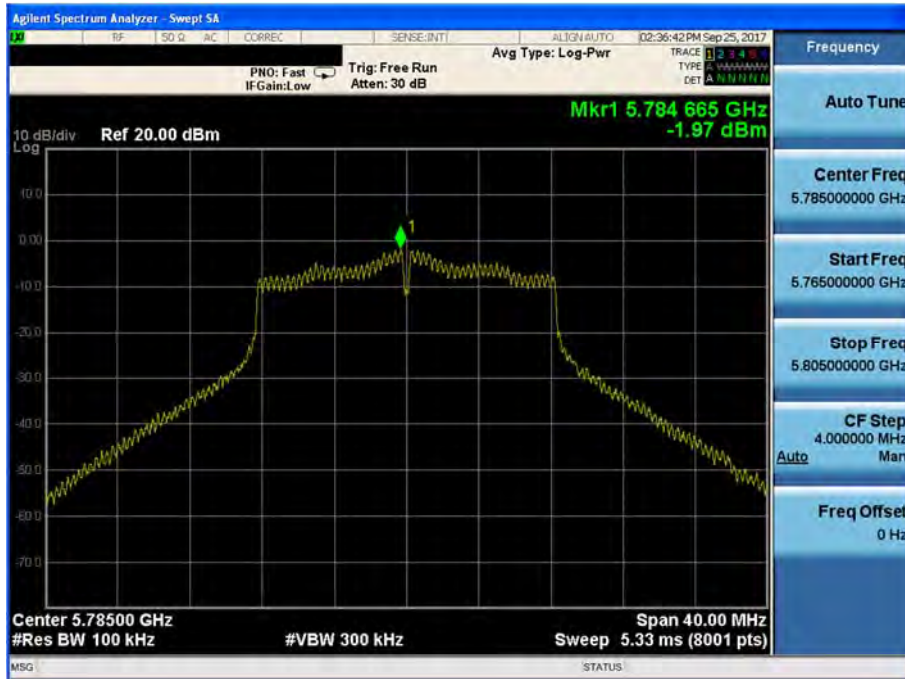

Maximum Power Spectral Density

Test Mode: 802.11a & ANT 2 & Ch.165

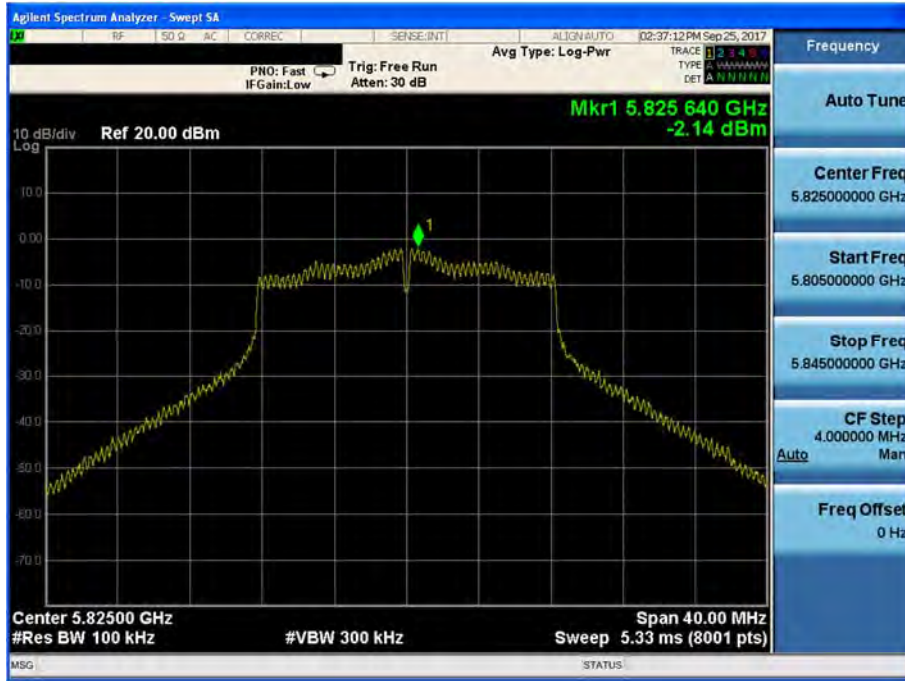

Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.36



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.40



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.48





Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.52



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.60



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.64



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.100



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.116



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.144




Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.149




Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.157

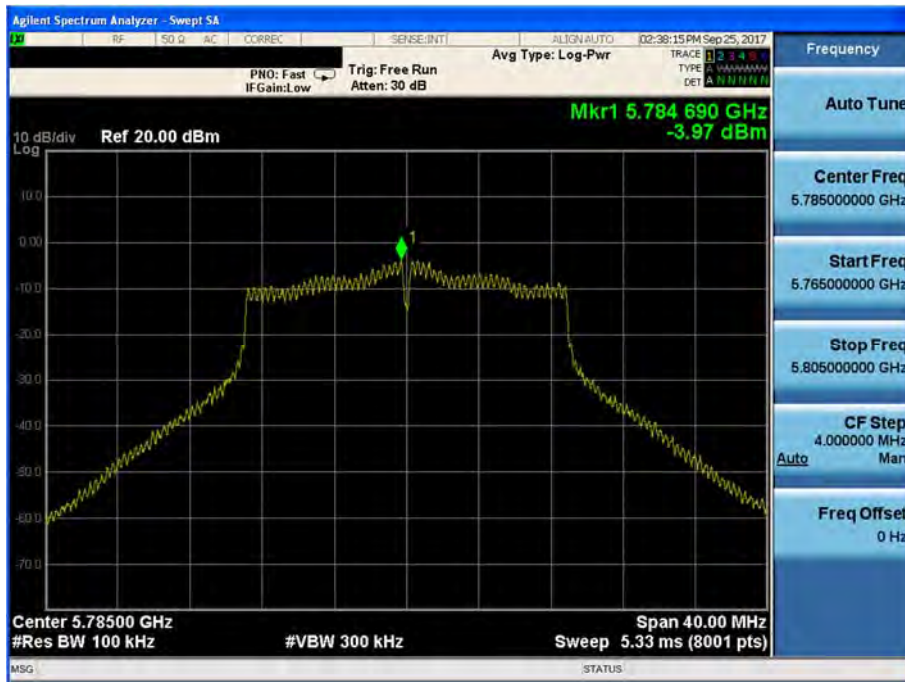


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.165

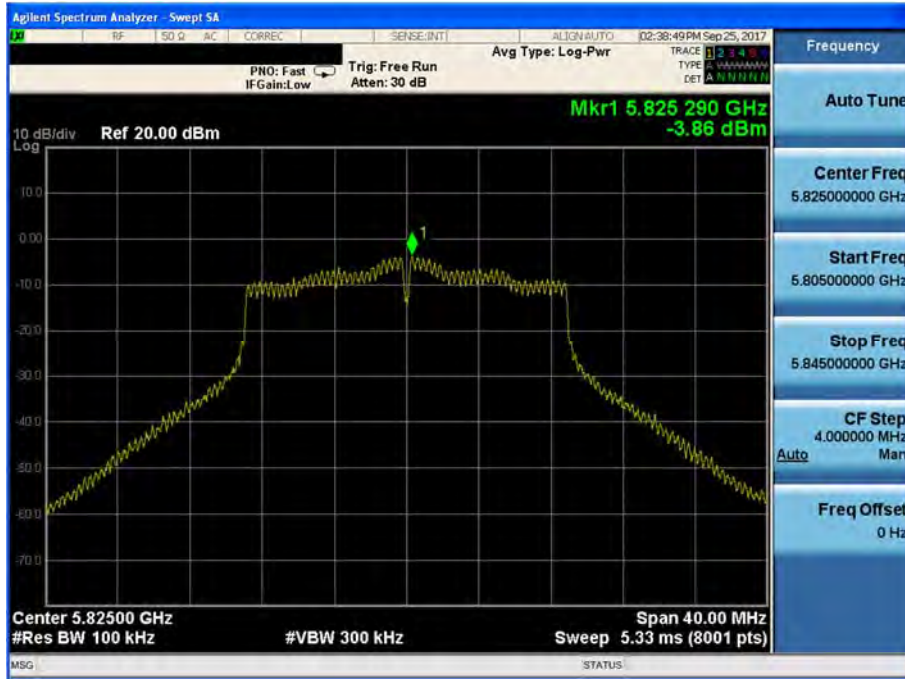


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.38

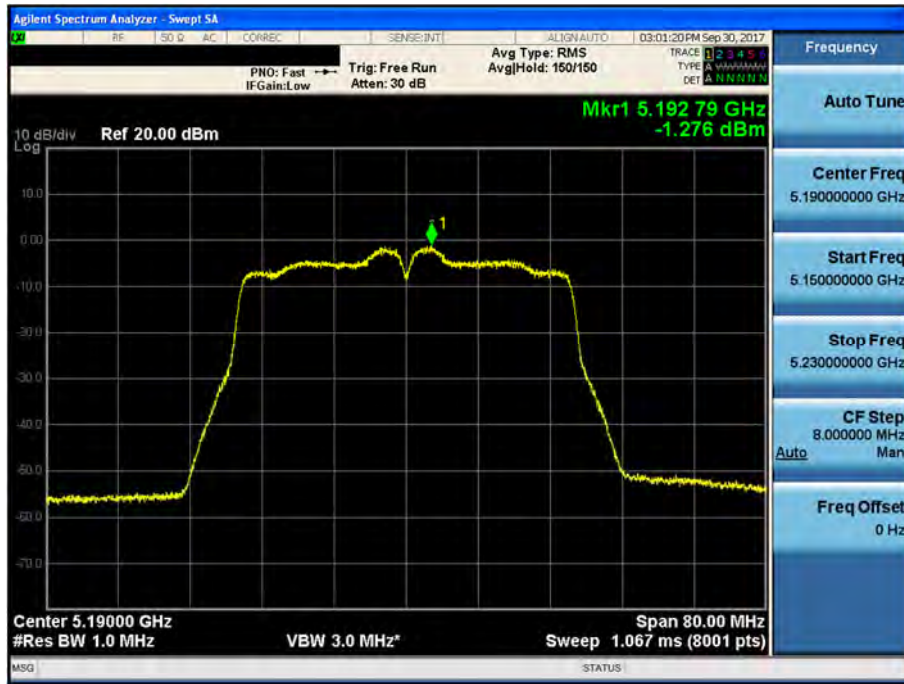

Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.46

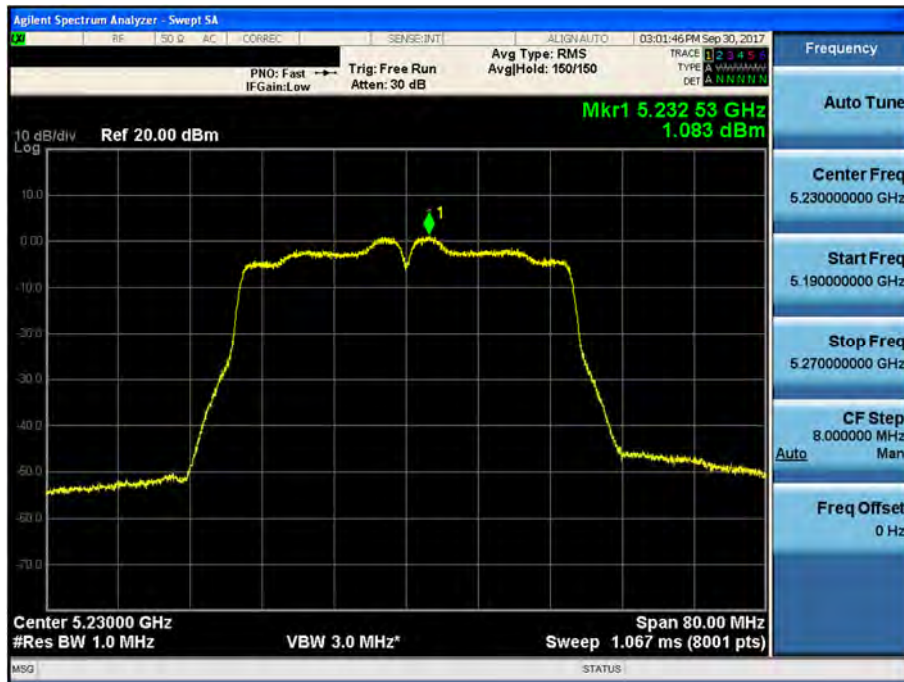


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.54



Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.62

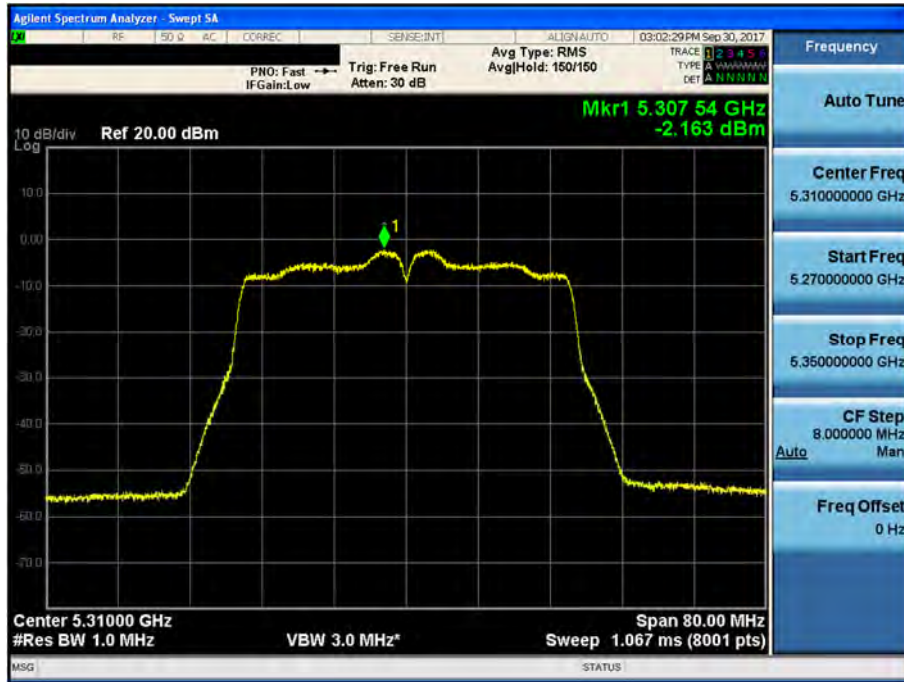




Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.102



Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.110

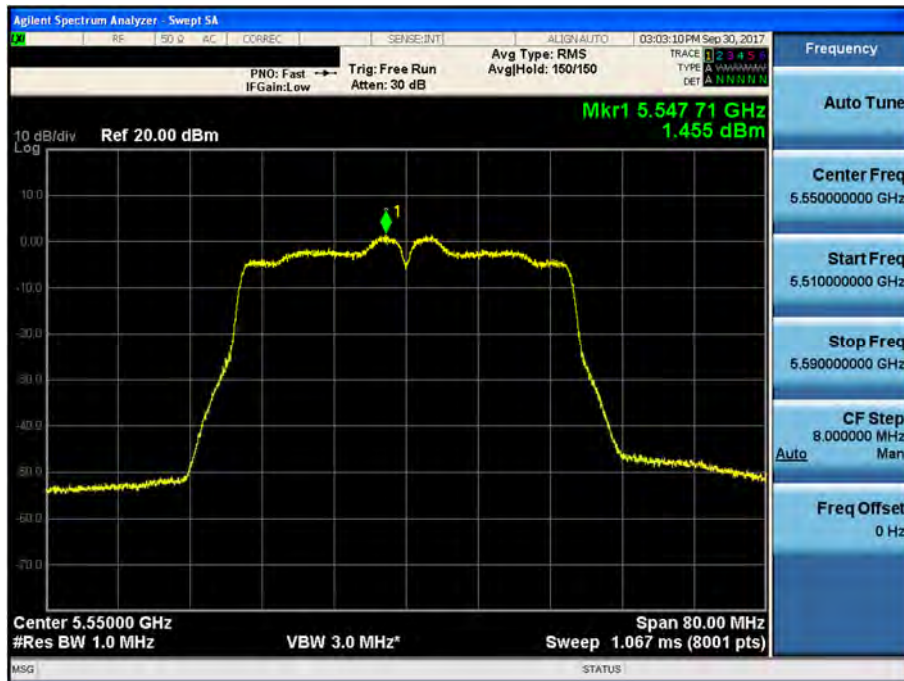

Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.142

