

RADIO PERFORMANCE TEST REPORT


Test Report No. : OT-222-RWD-053
Reception No. : 2202000517
Applicant : LG Electronics USA, Inc.
Address : 111 Sylvan Ave, North Building, Englewood Cliffs, New Jersey, United States
Manufacturer : LG Electronics Inc.
Address : 222 LG-ro Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, Korea
Type of Equipment : Bluetooth Earbud (Cradle)
FCC ID. : ZNFTONEFP7P
Model Name : TONE-FP7P
Multiple Model Name : Refer to the Clause 3.2
Serial number : N/A
Total page of Report : 82 pages (including this page)
Date of Incoming : May 17, 2021
Date of issue : February 24, 2022

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
/ Sieon Lee / Assistant Manager
ONETECH Corp.

Reviewed by
/ Tae-Ho, Kim / General Manager
ONETECH Corp.

Approved by
/ Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY.....	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	9
4. EUT MODIFICATIONS.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION.....	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 MODE OF OPERATION DURING THE TEST	10
5.4 CONFIGURATION OF TEST SYSTEM.....	13
5.5 ANTENNA REQUIREMENT	13
6. PRELIMINARY TEST	13
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	13
6.2 GENERAL RADIATED EMISSIONS TESTS	13
7. MINIMUM 20 DB BANDWIDTH.....	14
7.1 OPERATING ENVIRONMENT	14
7.2 TEST SET-UP	14
7.3 TEST DATE	14
7.4 TEST DATA.....	15
7.4.1 Test data for 1 Mbps	15
7.4.2 Test data for 2 Mbps	17
7.4.3 Test data for 3 Mbps	19
8. HOPPING FREQUENCY SEPARATION.....	21
8.1 OPERATING ENVIRONMENT	21
8.2 TEST SET-UP	21

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

8.3 TEST DATE	21
8.4 TEST DATA	22
<i>8.4.1 Test data for 1 Mbps</i>	22
<i>8.4.2 Test data for 2 Mbps</i>	23
<i>8.4.3 Test data for 3 Mbps</i>	24
9. NUMBER OF HOPPING CHANNELS	25
9.1 OPERATING ENVIRONMENT	25
9.2 TEST SET-UP	25
9.3 TEST DATE	25
9.4 TEST DATA	26
<i>9.4.1 Test data for 1 Mbps</i>	26
<i>9.4.2 Test data for 2 Mbps</i>	29
<i>9.4.3 Test data for 3 Mbps</i>	32
10. TIME OF OCCUPANCY	35
10.1 OPERATING ENVIRONMENT	35
10.2 TEST SET-UP	35
10.3 TEST DATE	35
10.4 TEST DATA	36
<i>10.4.1 Test data for 1 Mbps</i>	36
<i>10.4.2 Test data for 2 Mbps</i>	38
<i>10.4.3 Test data for 3 Mbps</i>	40
11. MAXIMUM PEAK OUTPUT POWER	42
11.1 OPERATING ENVIRONMENT	42
11.2 TEST SET-UP	42
11.3 TEST DATE	42
11.4 TEST DATA	43
<i>11.4.1 Test data for 1 Mbps</i>	43
<i>11.4.2 Test data for 2 Mbps</i>	45
<i>11.4.3 Test data for 3 Mbps</i>	47
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	49
12.1 OPERATING ENVIRONMENT	49
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	49
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	49
12.4 TEST DATE	49
12.5 TEST DATA FOR CONDUCTED EMISSION	50

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

12.5.1 Test data for 1 Mbps	50
12.5.2 Test data for 2 Mbps	57
12.5.3 Test data for 3 Mbps	64
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	70
12.6.1 Radiated Emission which fall in the Restricted Band.....	70
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	73
13. RADIATED EMISSION TEST	76
13.1 OPERATING ENVIRONMENT	76
13.2 TEST SET-UP	76
13.3 TEST DATE	76
13.4 TEST DATA.....	77
13.4.1 Test data for 30 MHz ~ 1000 MHz.....	77
13.4.2 Test data for Below 30 MHz.....	78
13.4.3 Test data for above 1 GHz	78
14. CONDUCTED EMISSION TEST.....	79
14.1 OPERATING ENVIRONMENT	79
14.2 TEST SET-UP	79
14.3 TEST DATE	79
14.4 TEST DATA FOR BLUETOOTH	80
15. LIST OF TEST EQUIPMENT	82

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-222-RWD-053	February 24, 2022	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA, Inc.
 Address : 111 Sylvan Ave, North Building, Englewood Cliffs, New Jersey, United States
 Contact Person : Sung Soo Kim / Director, Regulatory and Environmental Affairs
 Telephone No. : 201-266-2215
 FCC ID : ZNFTONEFP7P
 Model Name : TONE-FP7P
 Brand Name : LG
 Serial Number : N/A
 Date : February 24, 2022

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Bluetooth Earbud (Cradle)
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Minimum 20 dB Bandwidth	Met the Limit / PASS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

Note. : This test is not performed because the EUT is operated by DC battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Inc., Model TONE-FP7P (referred to as the EUT in this report) is a Bluetooth Earbud (Cradle). The product specification described herein was obtained from product data sheet or user's manual.

Device Type		Bluetooth Earbud (Cradle)
Operating Frequency		2 402 MHz ~ 2 480 MHz
RF Output Power	1 Mbps	9.98 dBm
	2 Mbps	9.85 dBm
	3 Mbps	10.24 dBm
Number of Channel		79 Channels
Modulation Type		GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
Antenna Type		Wire Antenna
Antenna Gain		-3.0 dBi
List of each Osc. or crystal Freq.(Freq. \geq 1 MHz)		40 MHz
Rated Supply Voltage		DC 3.7 V

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
TONE-FP7P	Basic Model (Global)	<input checked="" type="checkbox"/>
TONE-TFP7P	This model is identical to the basic model except for the Marketing area (Korea)	<input type="checkbox"/>
TONE-TFP7WP	This model is identical to the basic model except for the Marketing area (Korea) and Color (White).	<input type="checkbox"/>
TONE-FP7PWP	This model is identical to the basic model except for the Color (White).	<input type="checkbox"/>
TONE-FP7CP	This model is identical to the basic model except for the Marketing purpose (Customer only).	<input type="checkbox"/>
TONE-FP7WCP	This model is identical to the basic model except for the Marketing purpose (Customer only) and Color (White).	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore, this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Electronics Inc.	N/A	N/A
Battery	LG Electronics Inc.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
TONE-FP7P	LG Electronics Inc.	Bluetooth Earbud (Cradle) (EUT)	-
Ideapad 330-15IKB	Lenovo	Notebook PC	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Frequency / Channel Operations

Channel	Frequency
0	2 402
39	2 441
78	2 480


-. Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.895	0.84	77.51	1.11
Bluetooth [2 Mbps]	2.88	0.855	77.11	1.13
Bluetooth [3 Mbps]	2.895	0.84	77.51	1.11

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

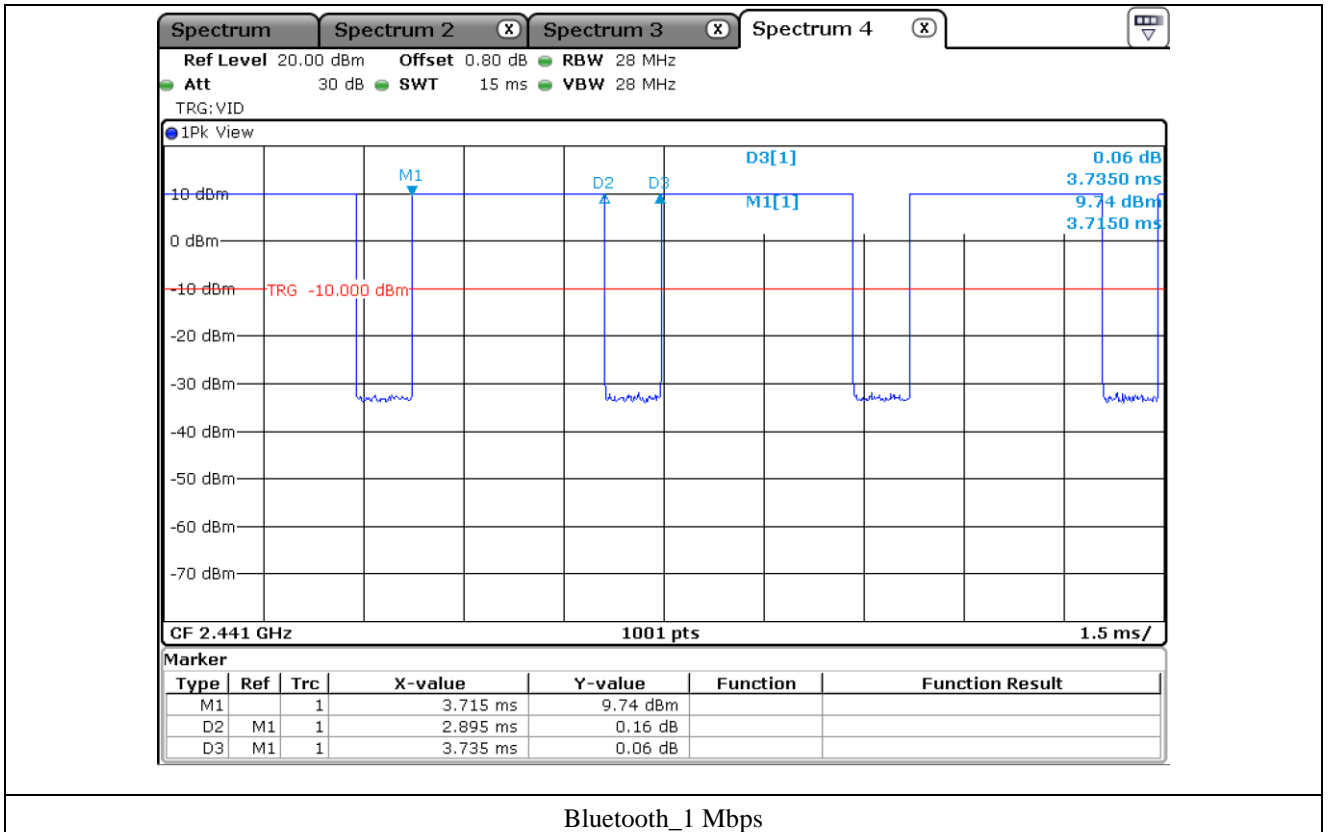

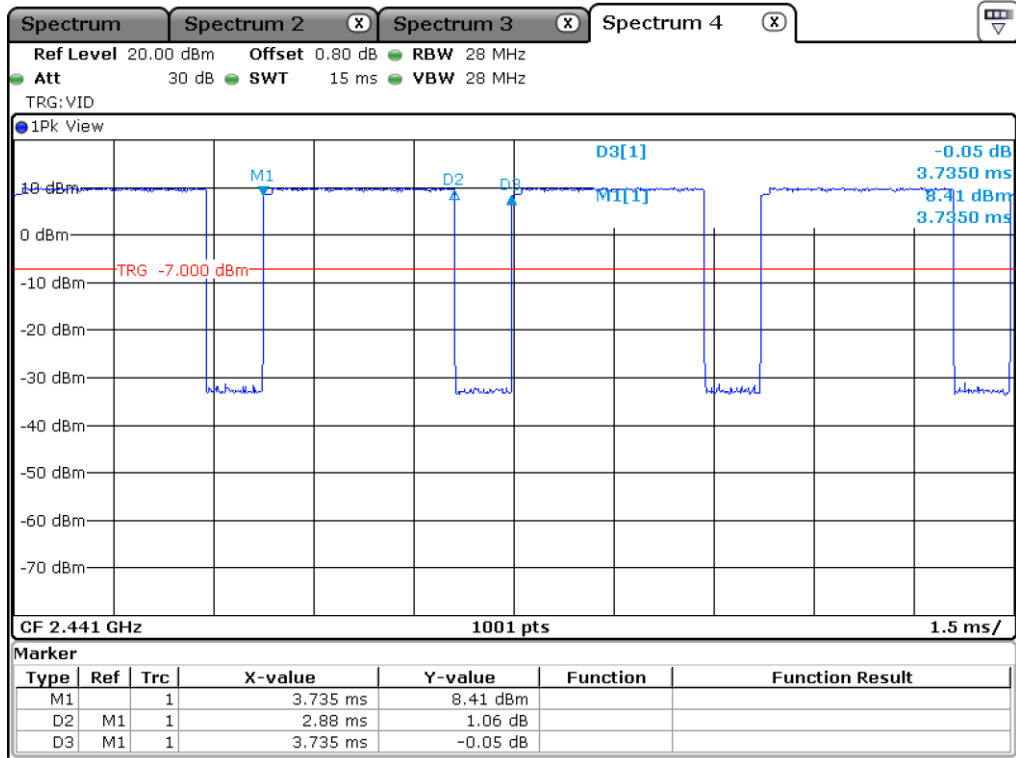

Bluetooth_2 Mbps

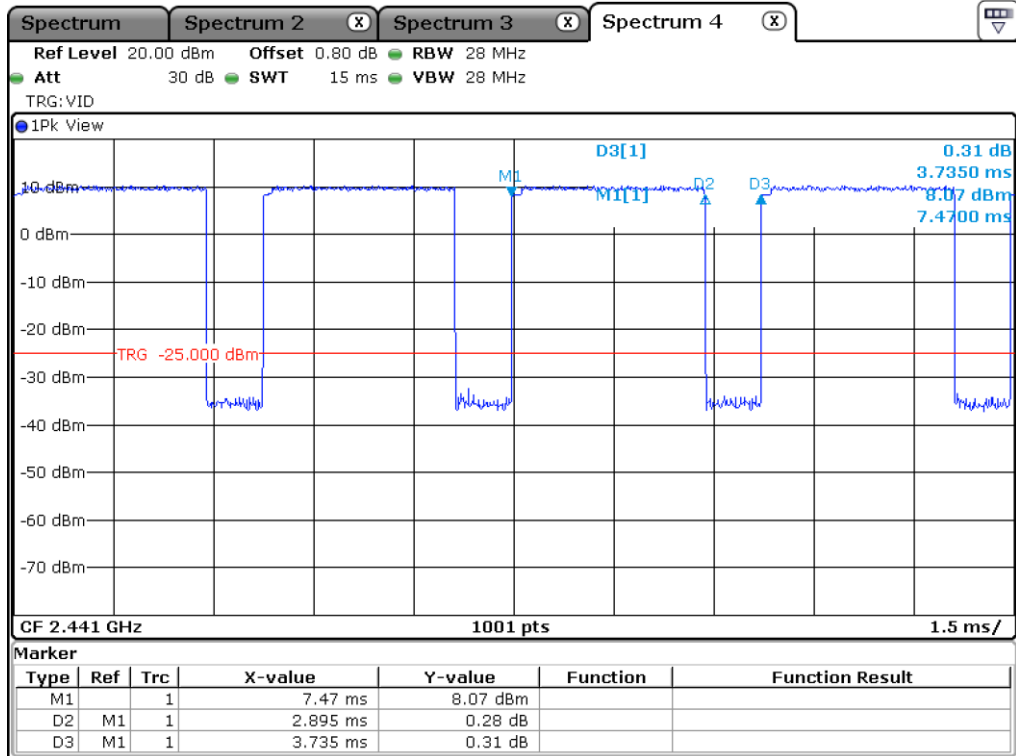

Bluetooth_3 Mbps

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Wire Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 22 °C
 Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz and 20 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.




7.3 Test Date

May 24, 2021 ~ June 04, 2021


7.4 Test data

7.4.1 Test data for 1 Mbps


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	929.10
Middle	2 441.00	926.10
High	2 480.00	929.10

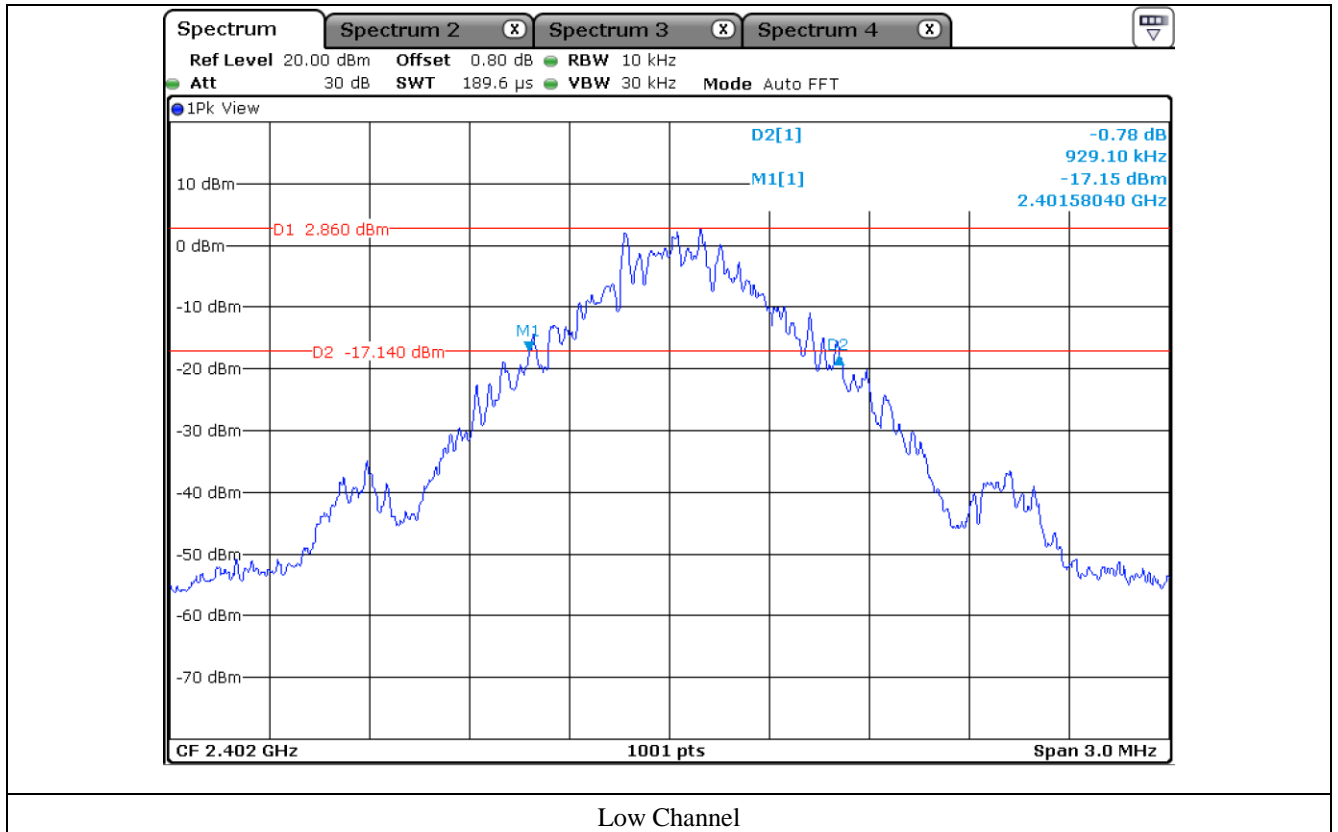

Low Channel

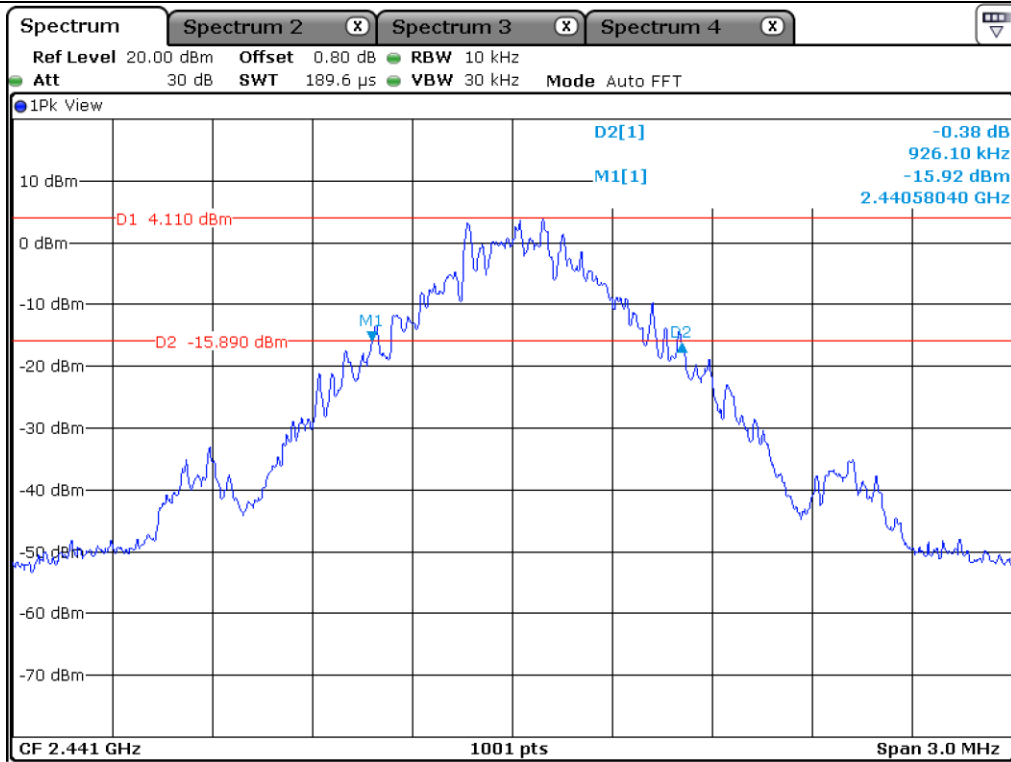

Middle Channel

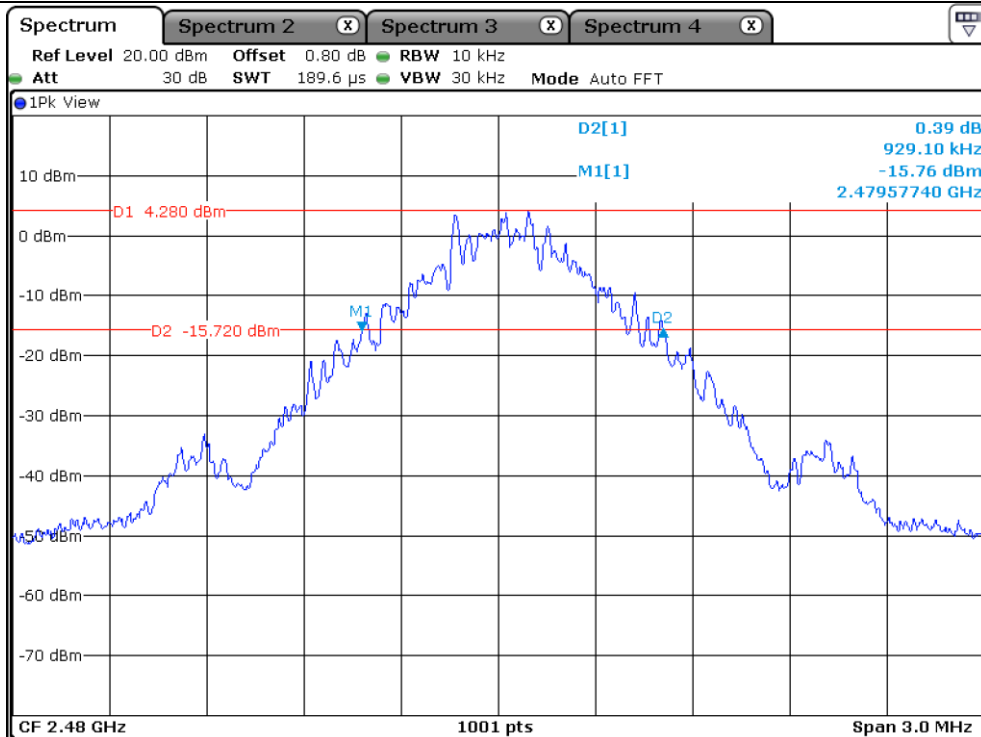

High Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

7.4.2 Test data for 2 Mbps


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 310.70
Middle	2 441.00	1 314.70
High	2 480.00	1 318.70

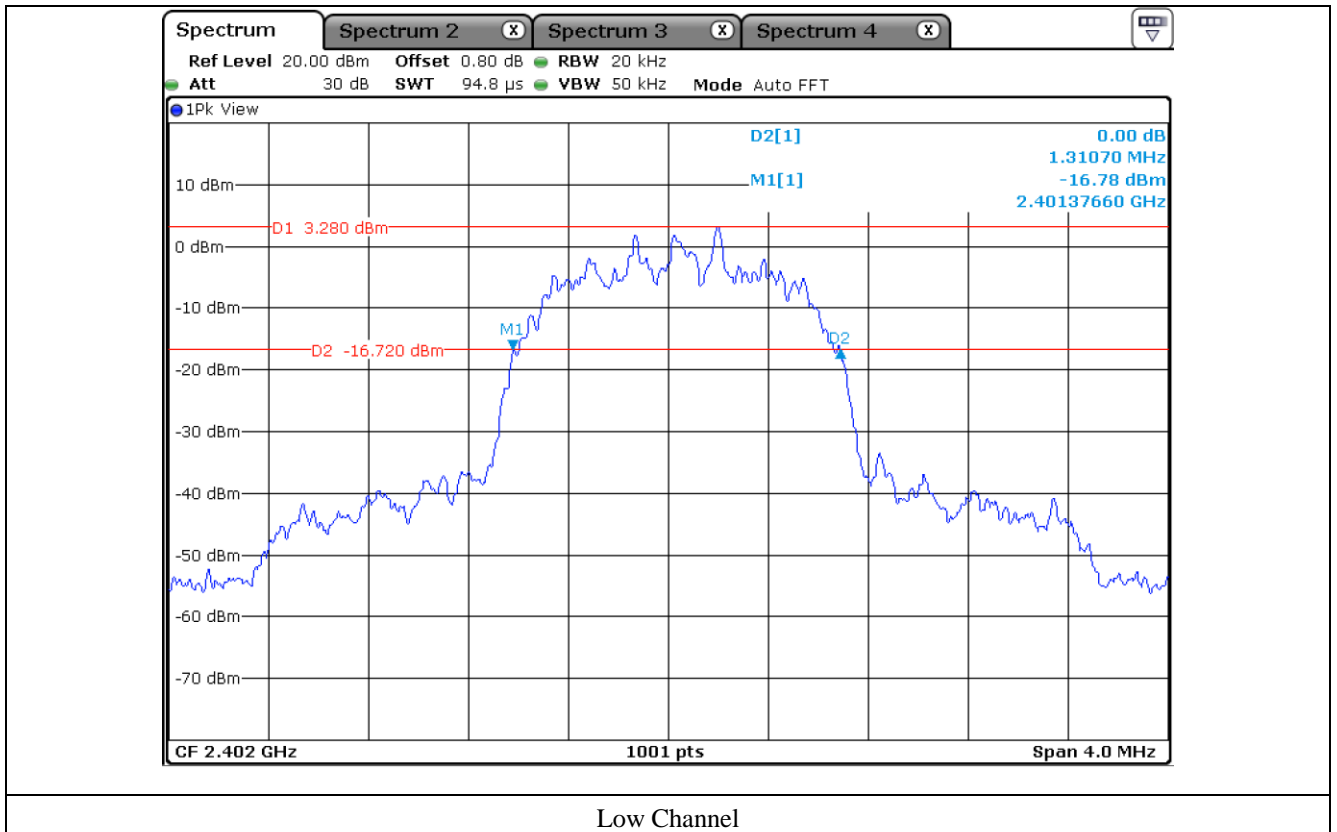

Low Channel

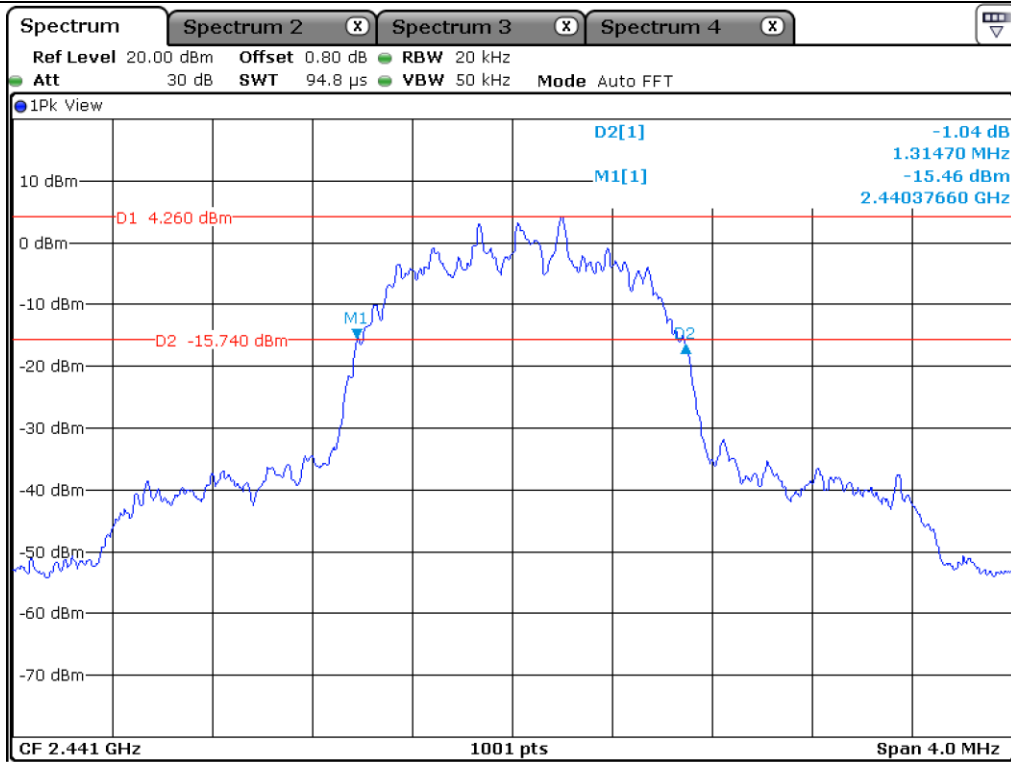

Middle Channel

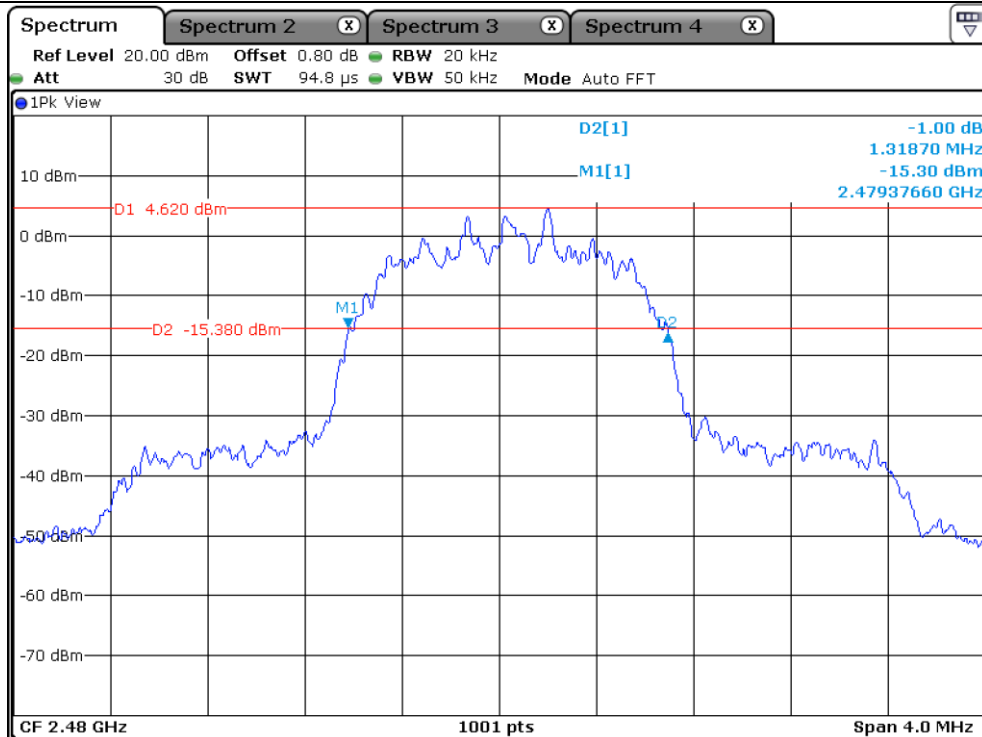

High Channel


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


7.4.3 Test data for 3 Mbps

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 266.70
Middle	2 441.00	1 266.70
High	2 480.00	1 266.70

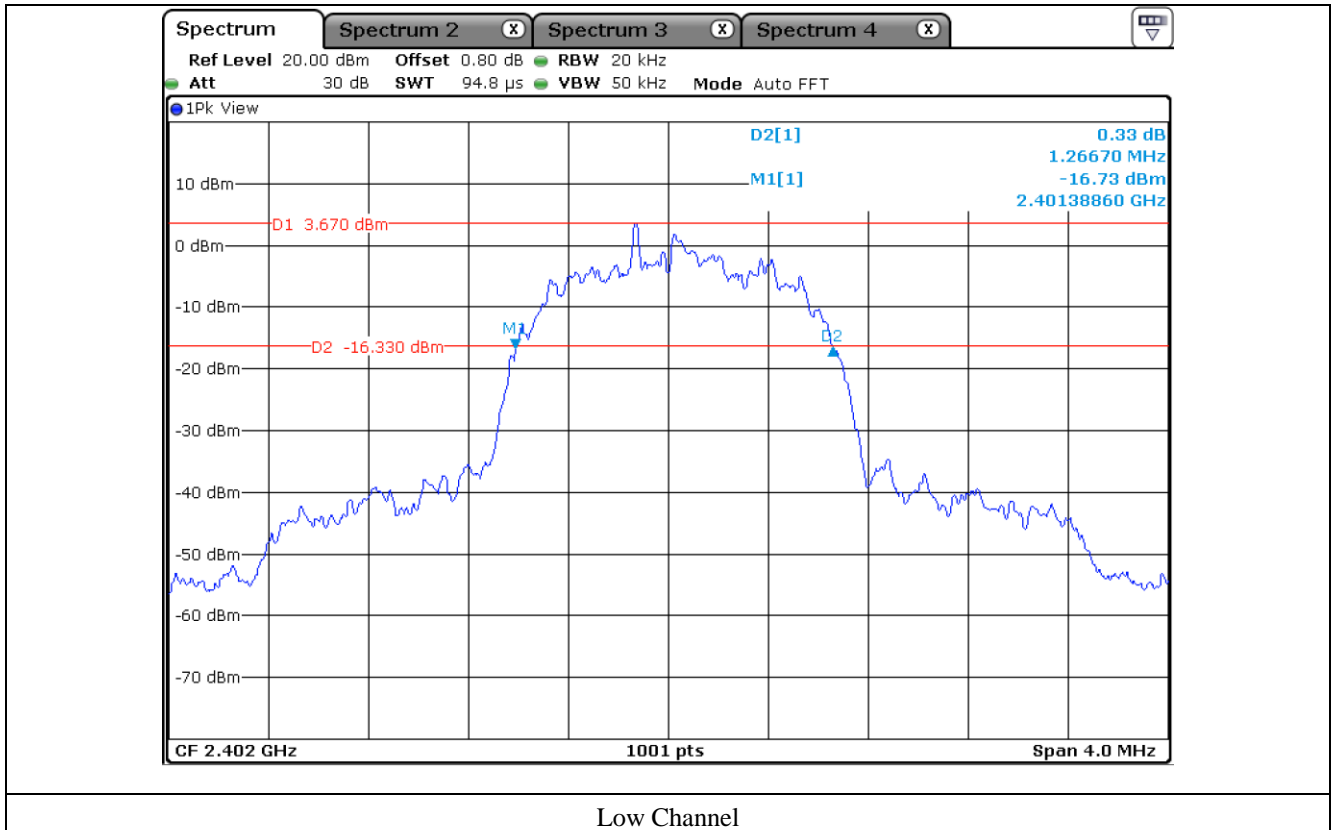

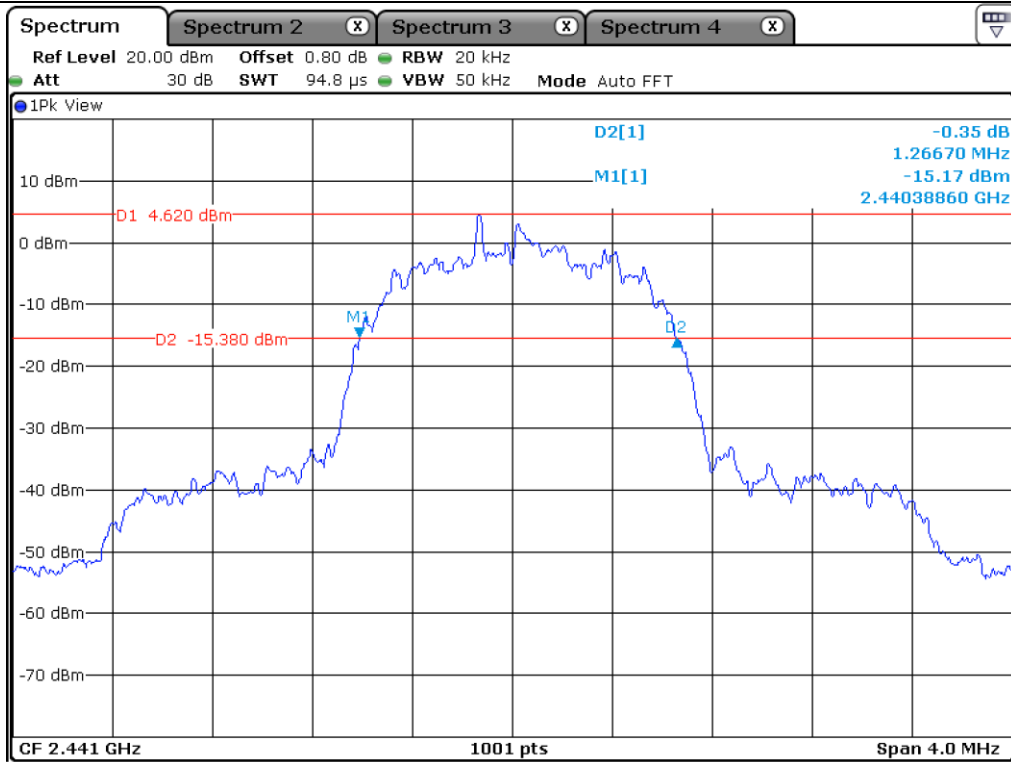

Middle Channel

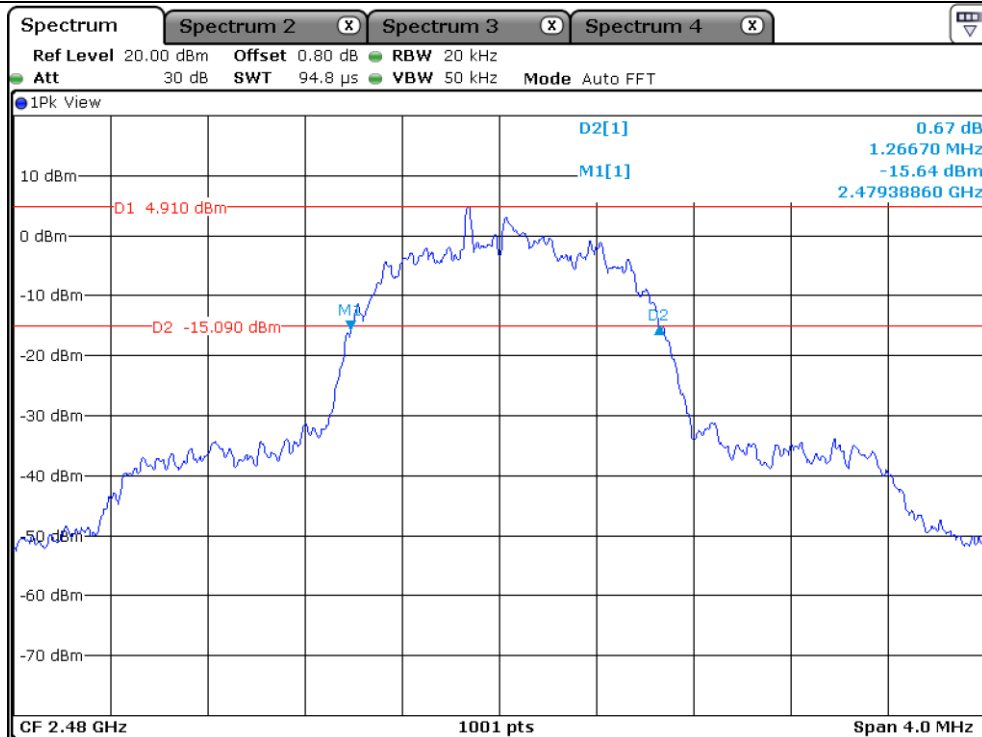

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 22 °C
 Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

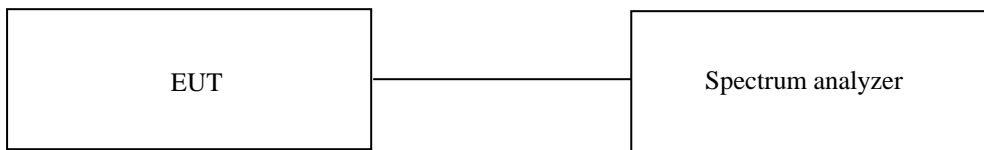

8.3 Test Date


May 24, 2021 ~ June 04, 2021

8.4 Test data

8.4.1 Test data for 1 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 004.00	617.40	Separated by a minimum of 617.40 kHz

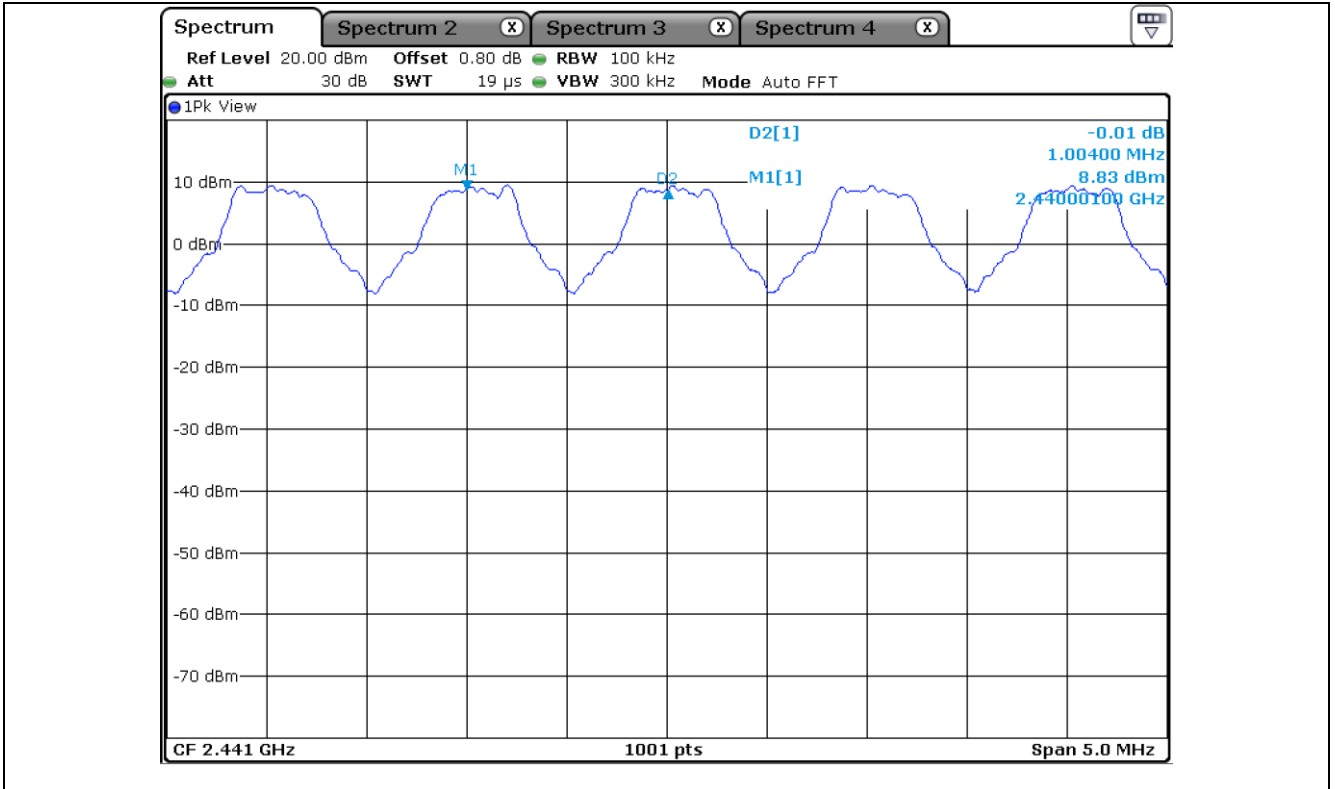

8.4.2 Test data for 2 Mbps

-. Test Result : Pass


Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 004.00	876.47	Separated by a minimum of 876.47 kHz

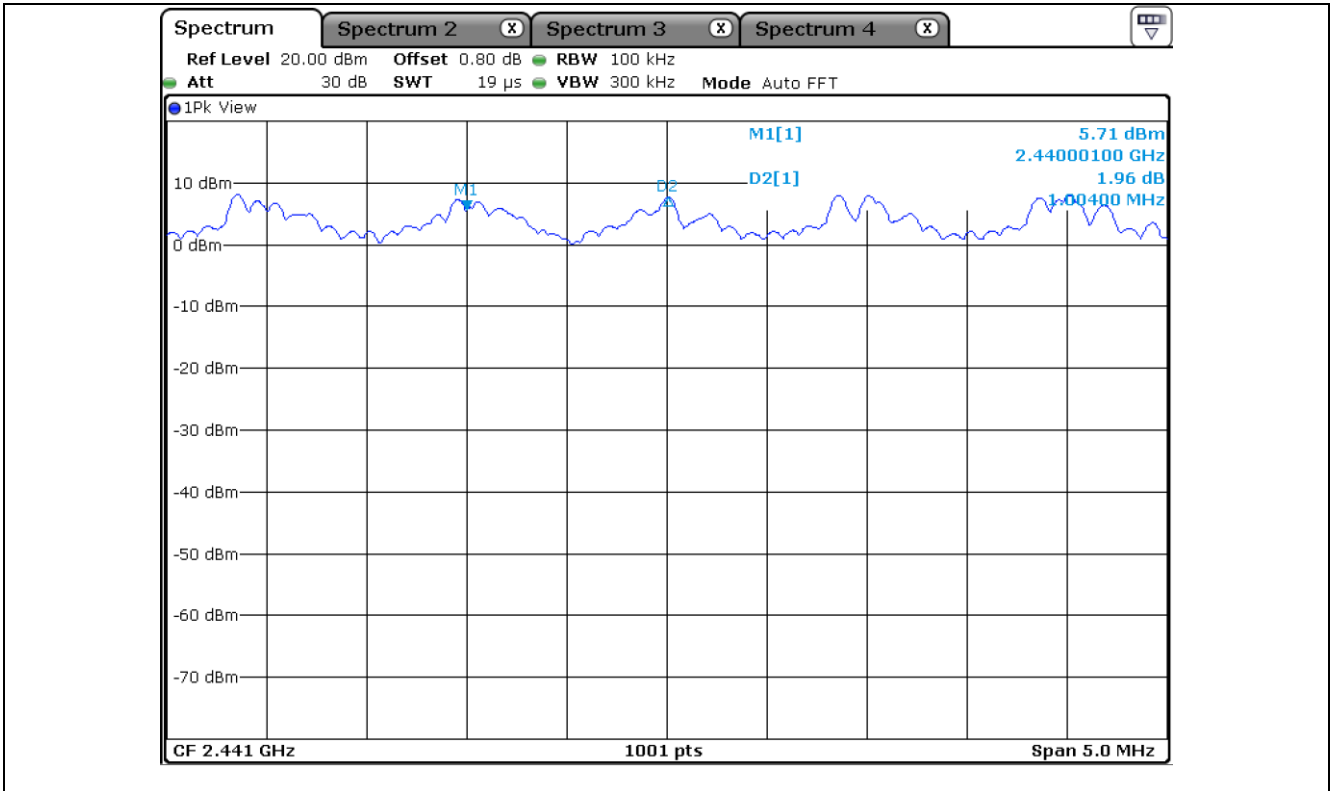

8.4.3 Test data for 3 Mbps

-. Test Result : Pass

Measured Value (kHz)	Two-third of 20 dB Bandwidth (kHz)	Limit
1 004.00	844.47	Separated by a minimum of 844.47 kHz

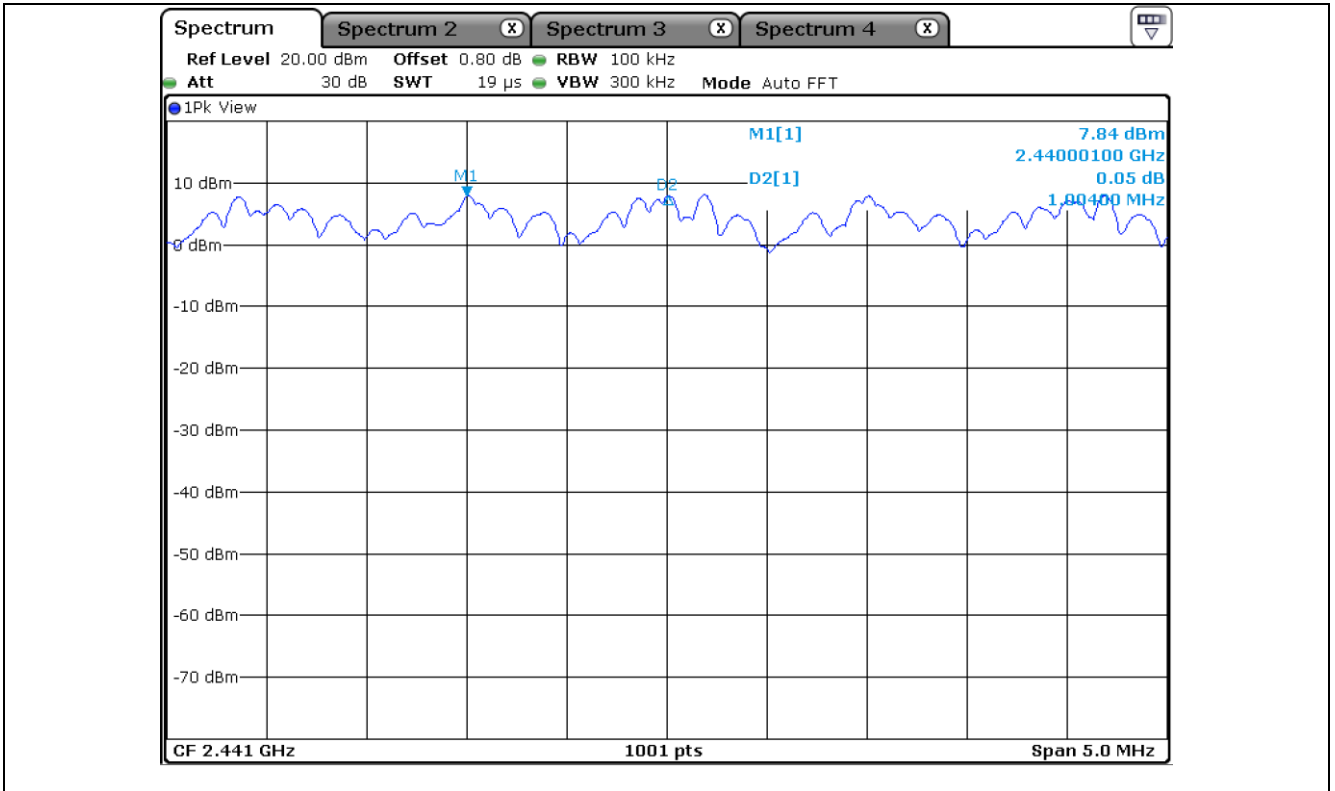


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 22 °C
 Relative humidity : 46 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

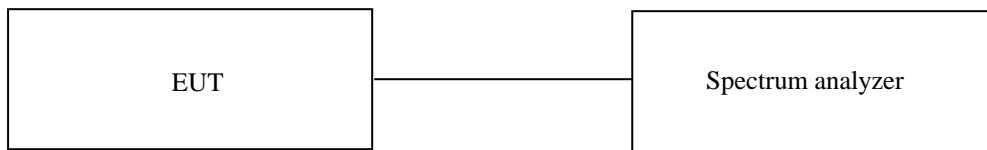

9.3 Test Date


May 24, 2021 ~ June 04, 2021


9.4 Test data

9.4.1 Test data for 1 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

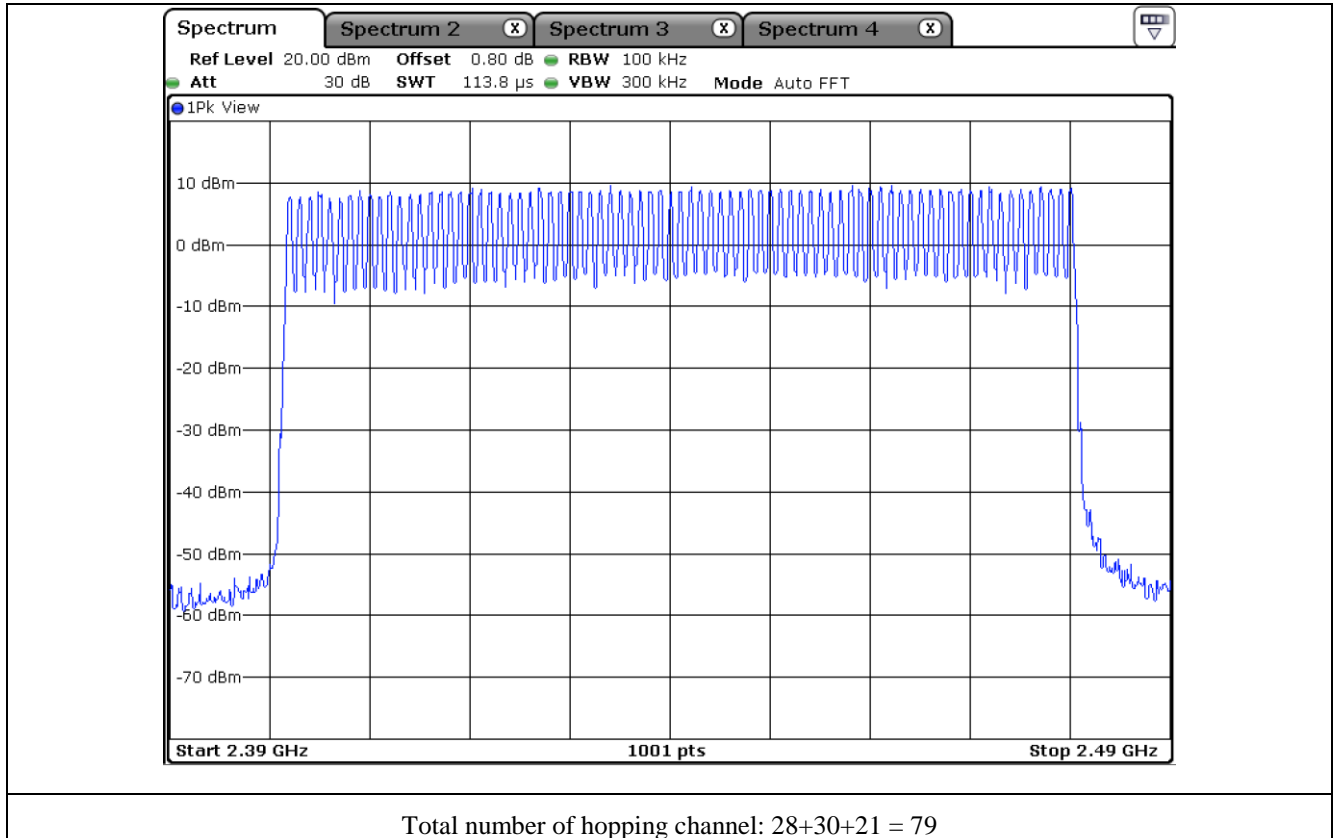


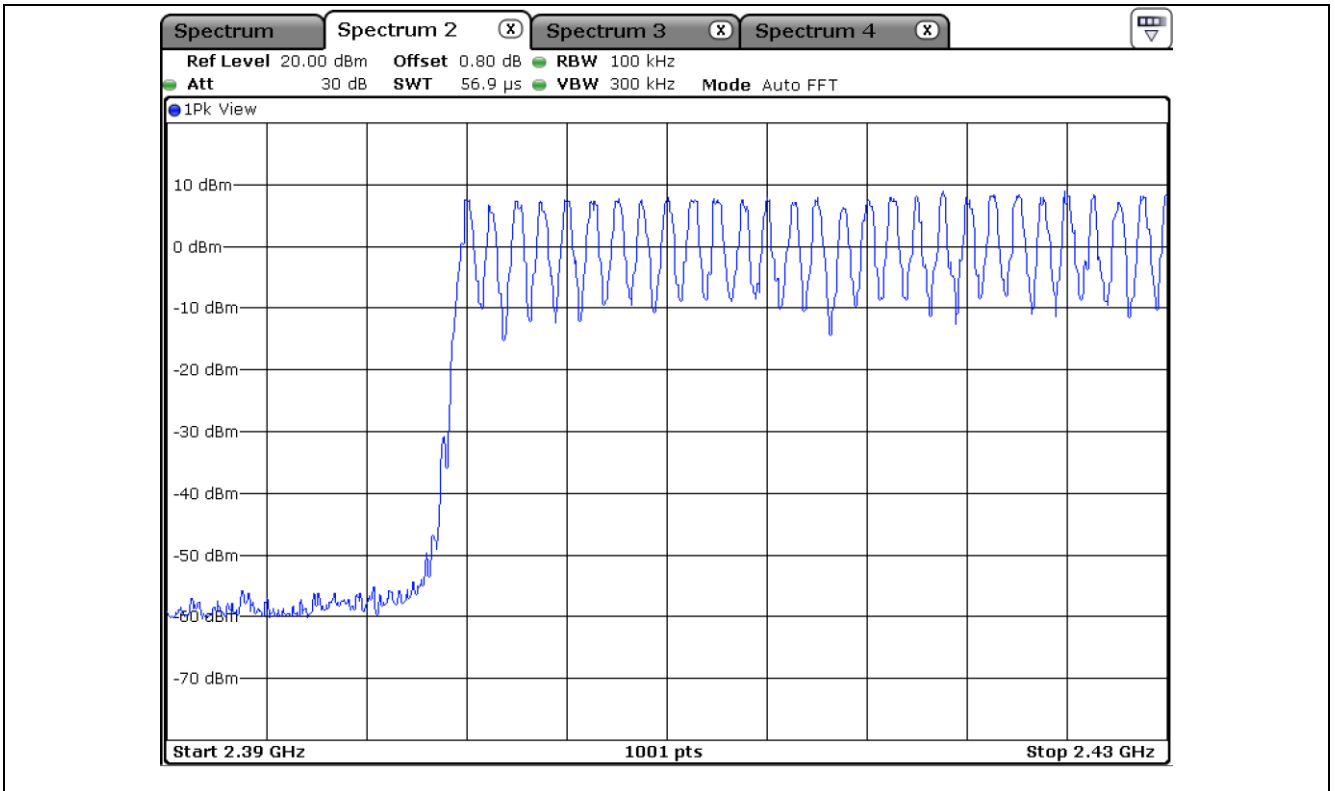

Number of hopping channel: 28

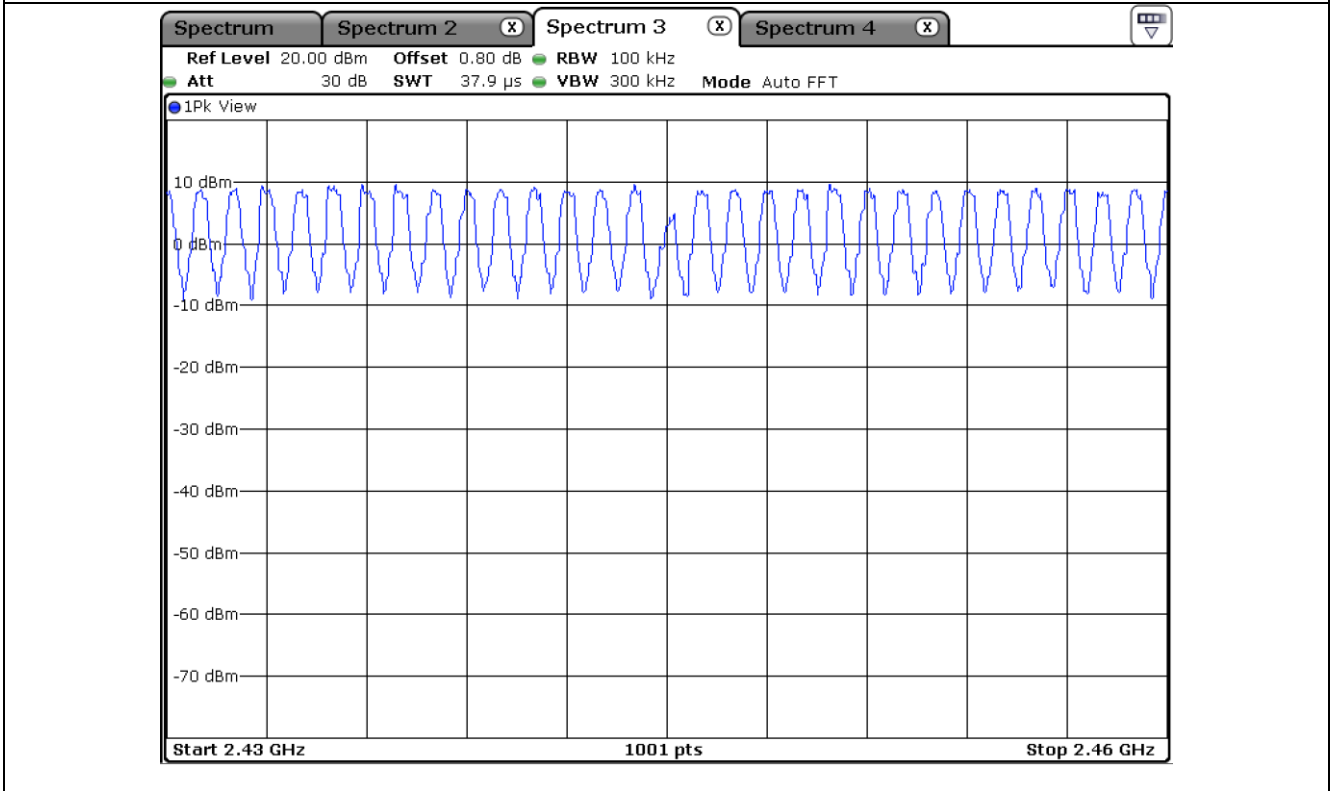


Number of hopping channel: 30

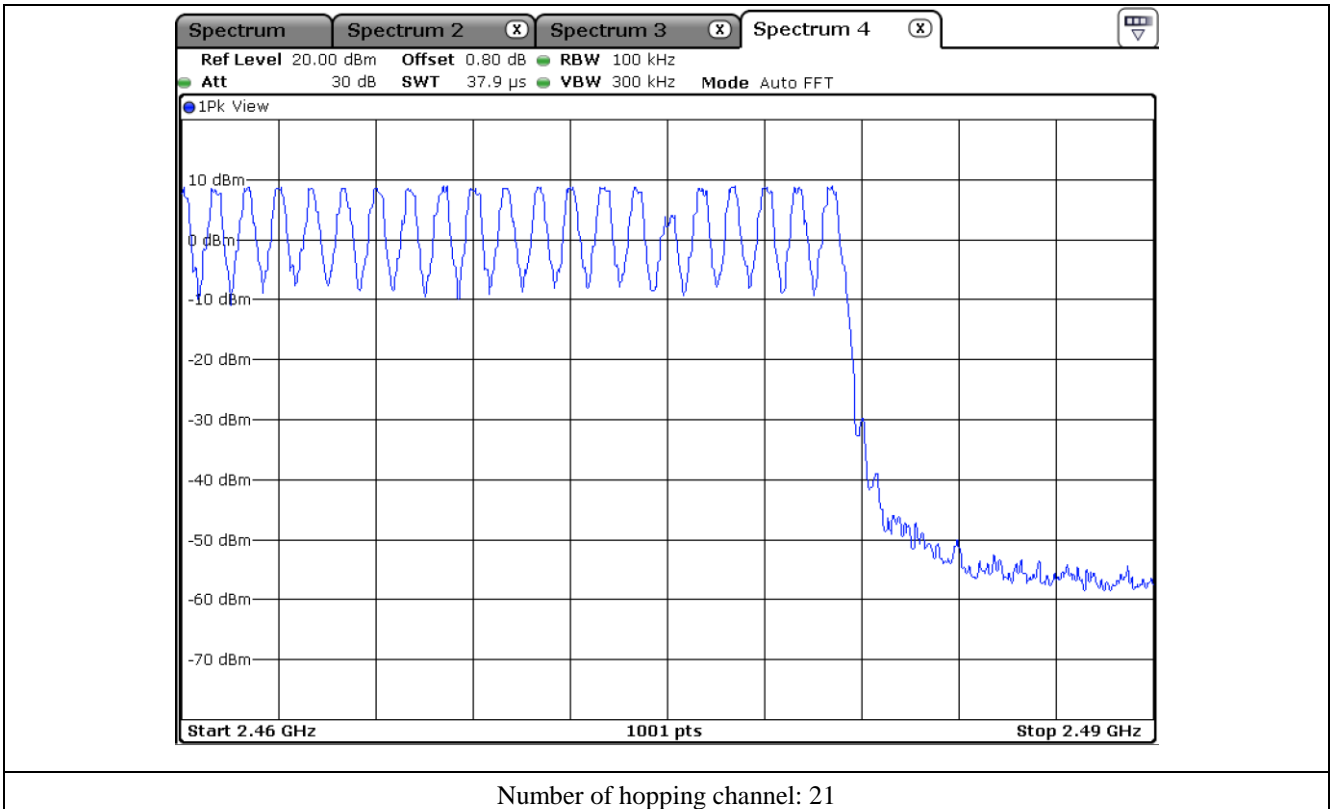


9.4.2 Test data for 2 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

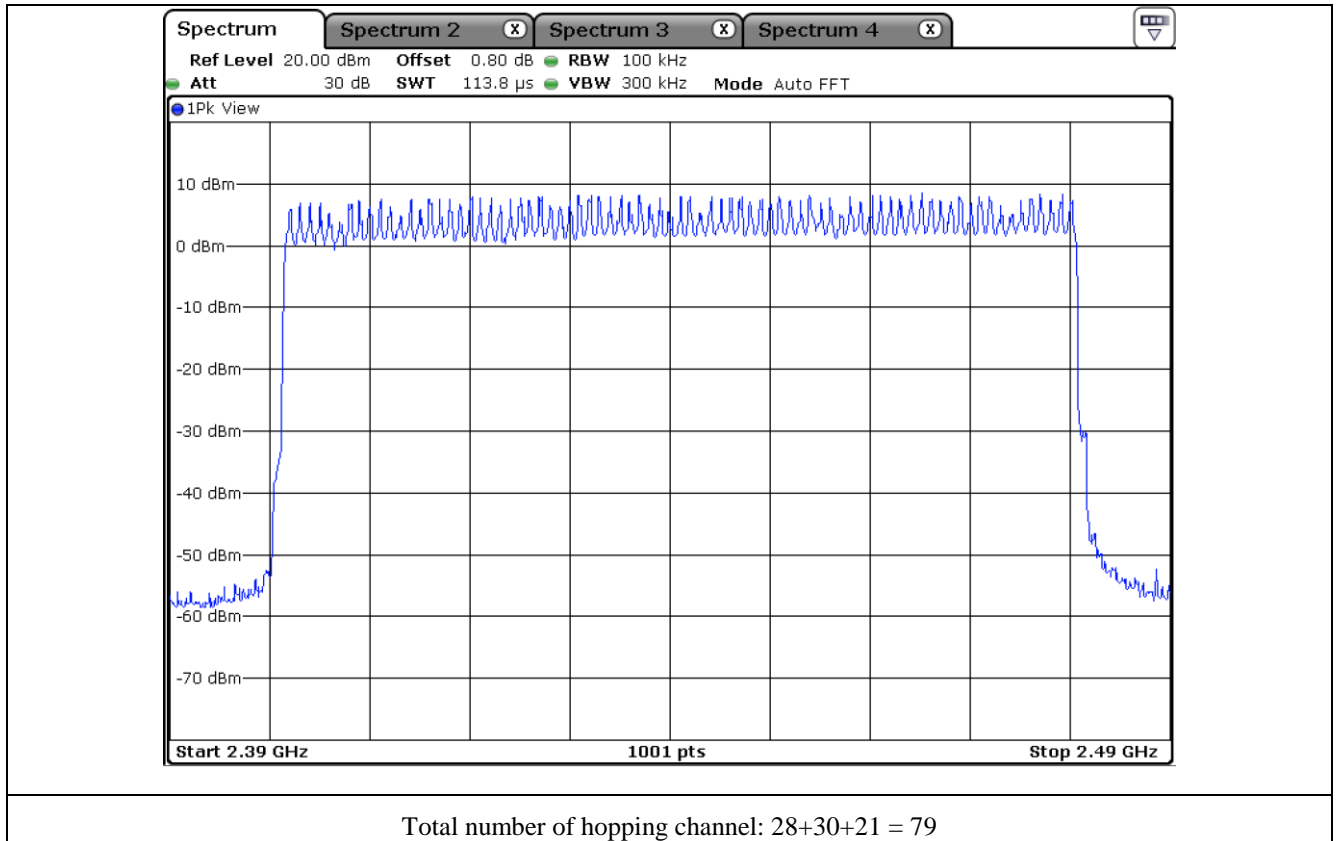

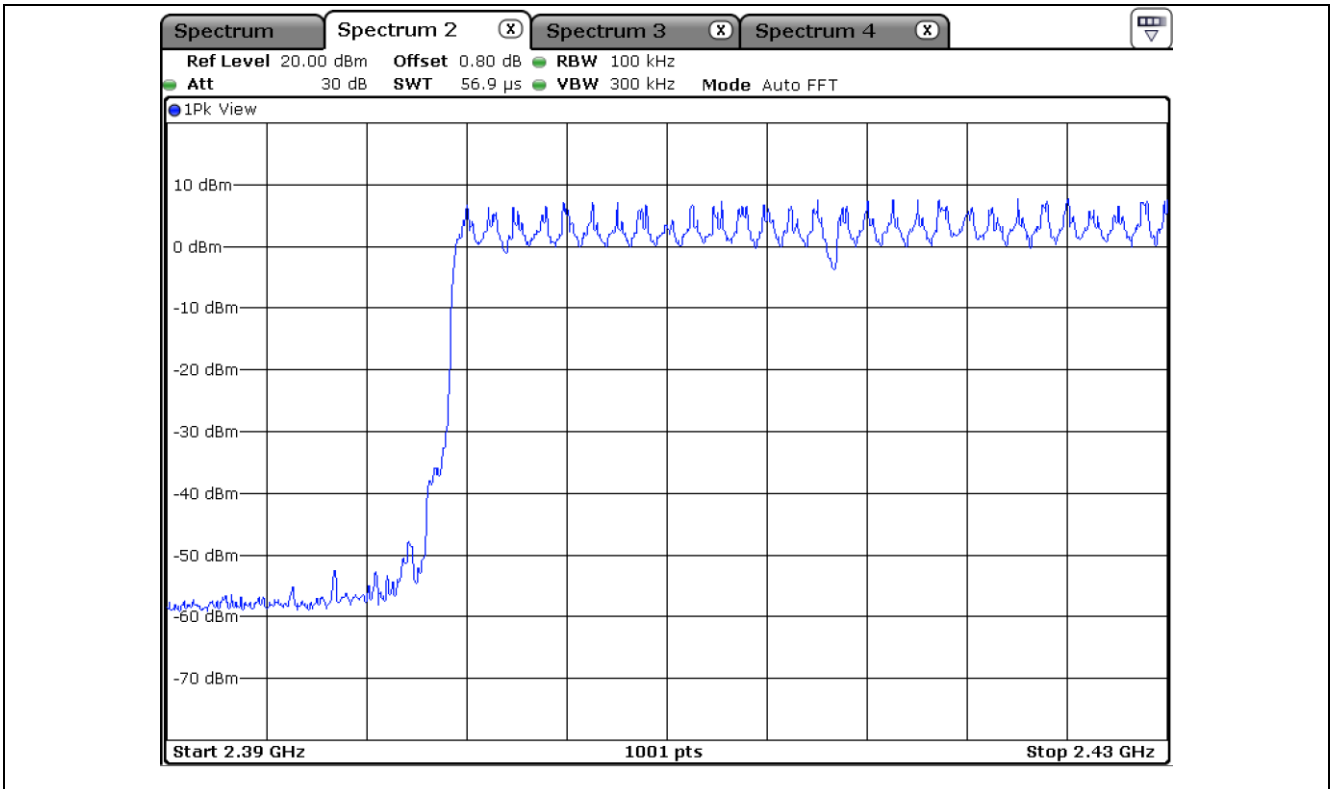

Number of hopping channel: 28

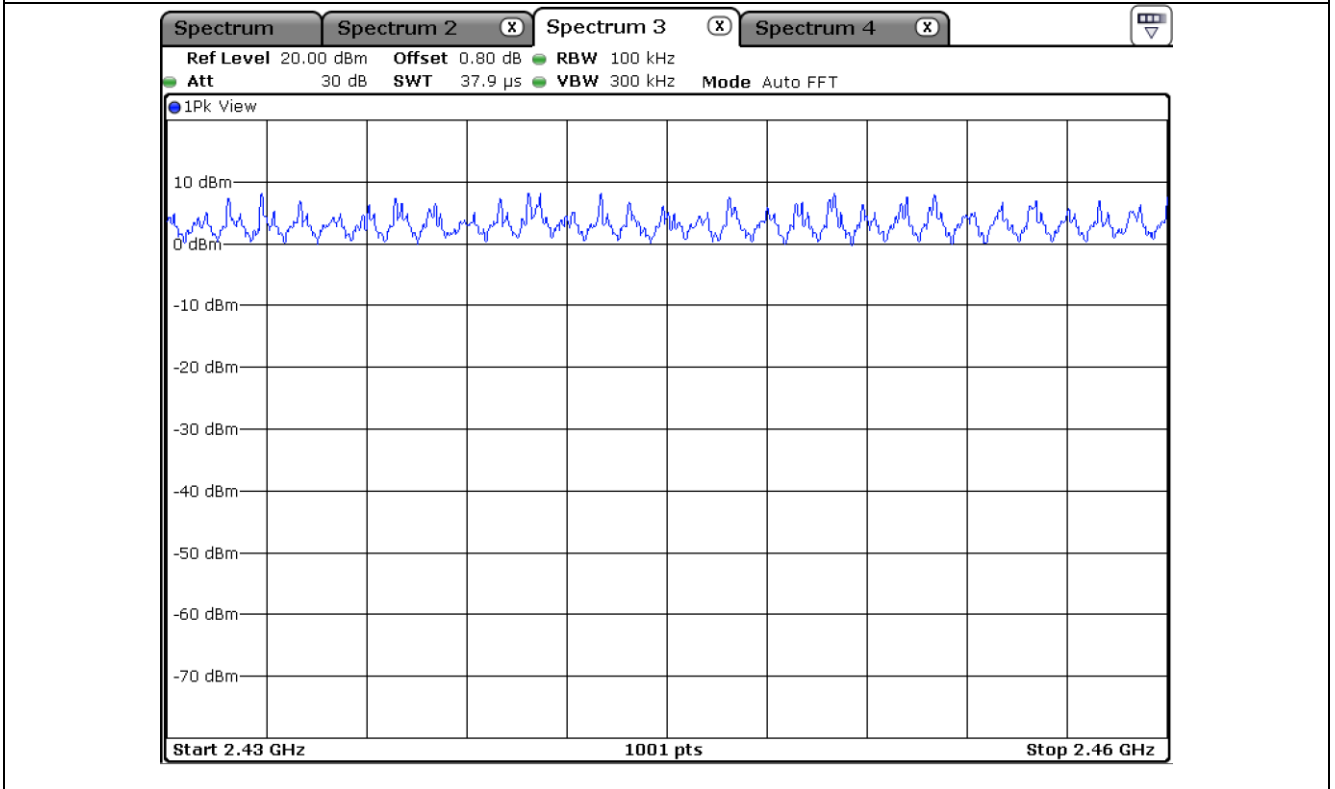


Number of hopping channel: 30

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

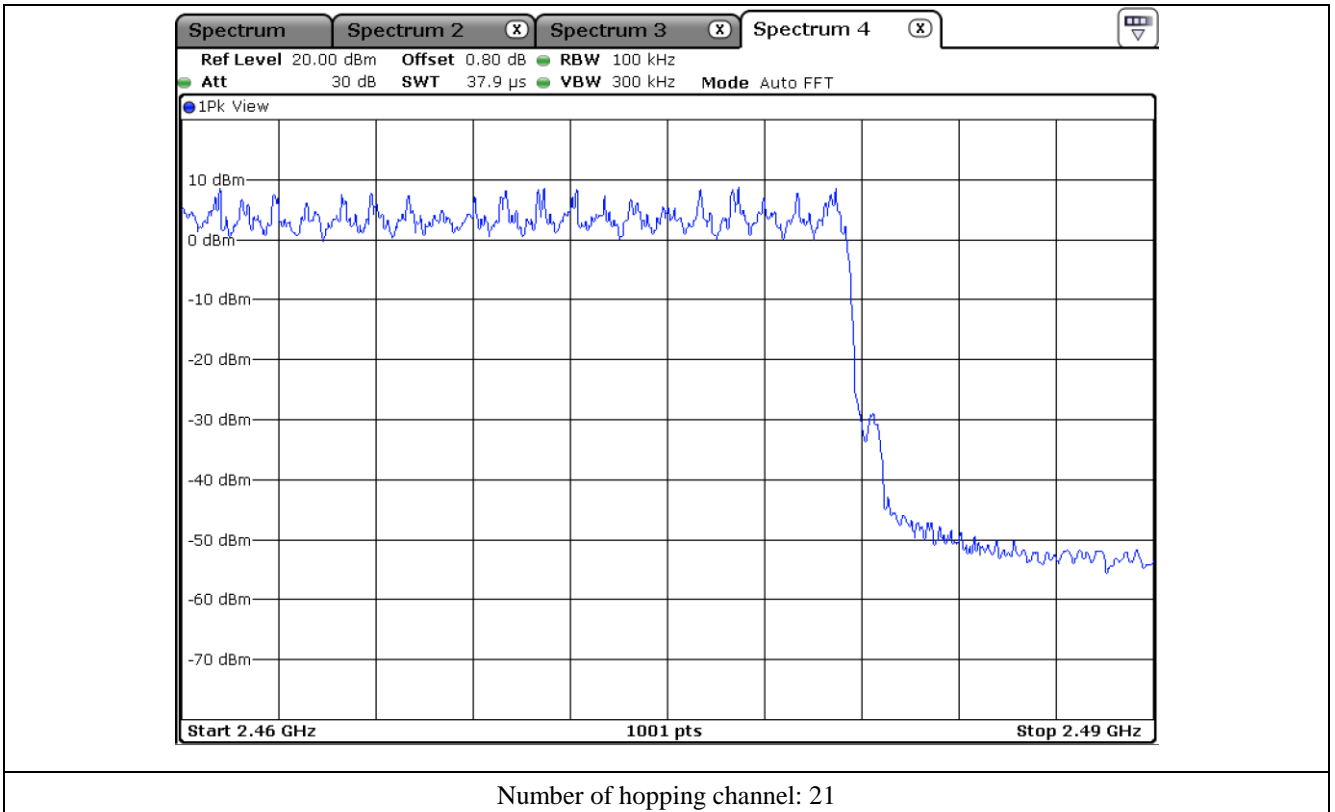


9.4.3 Test data for 3 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

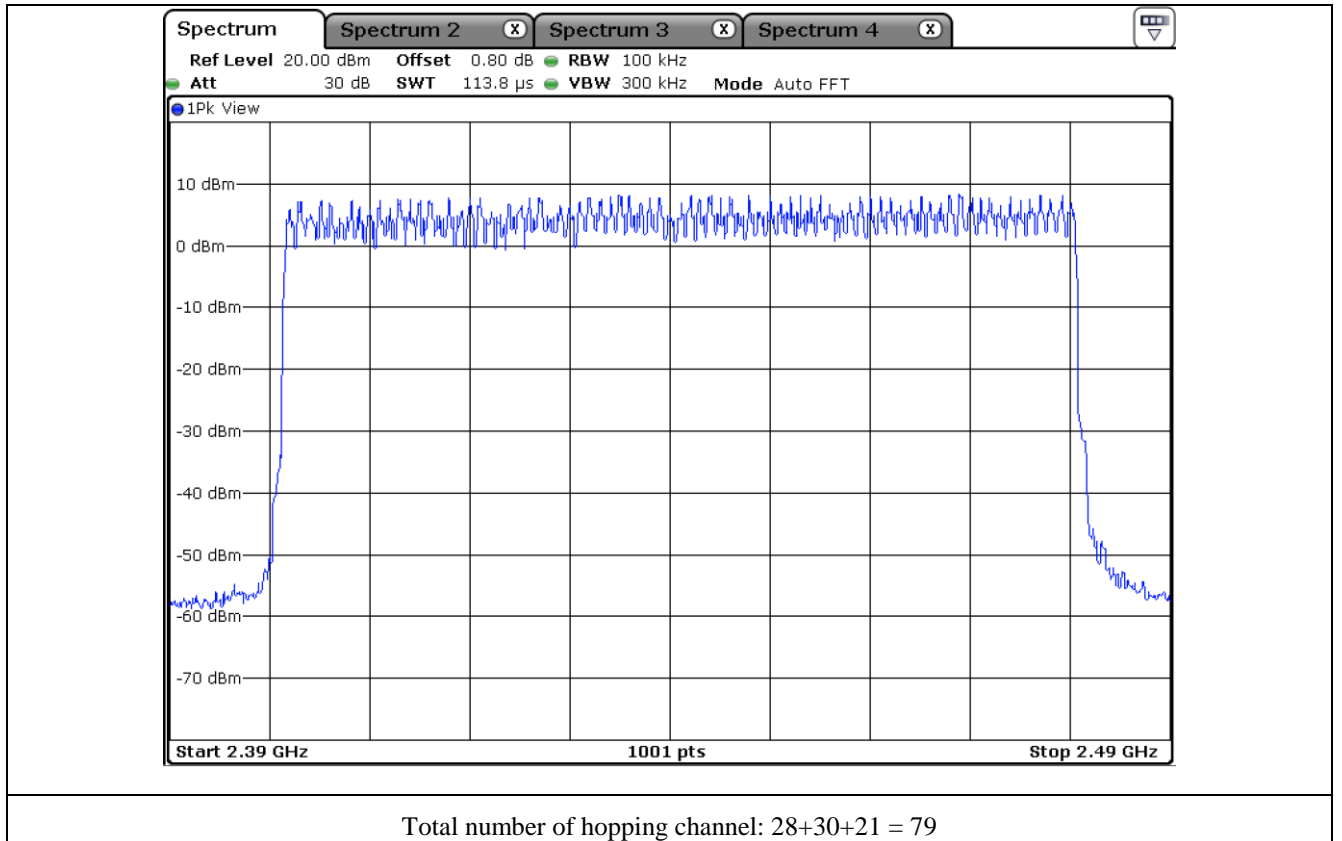


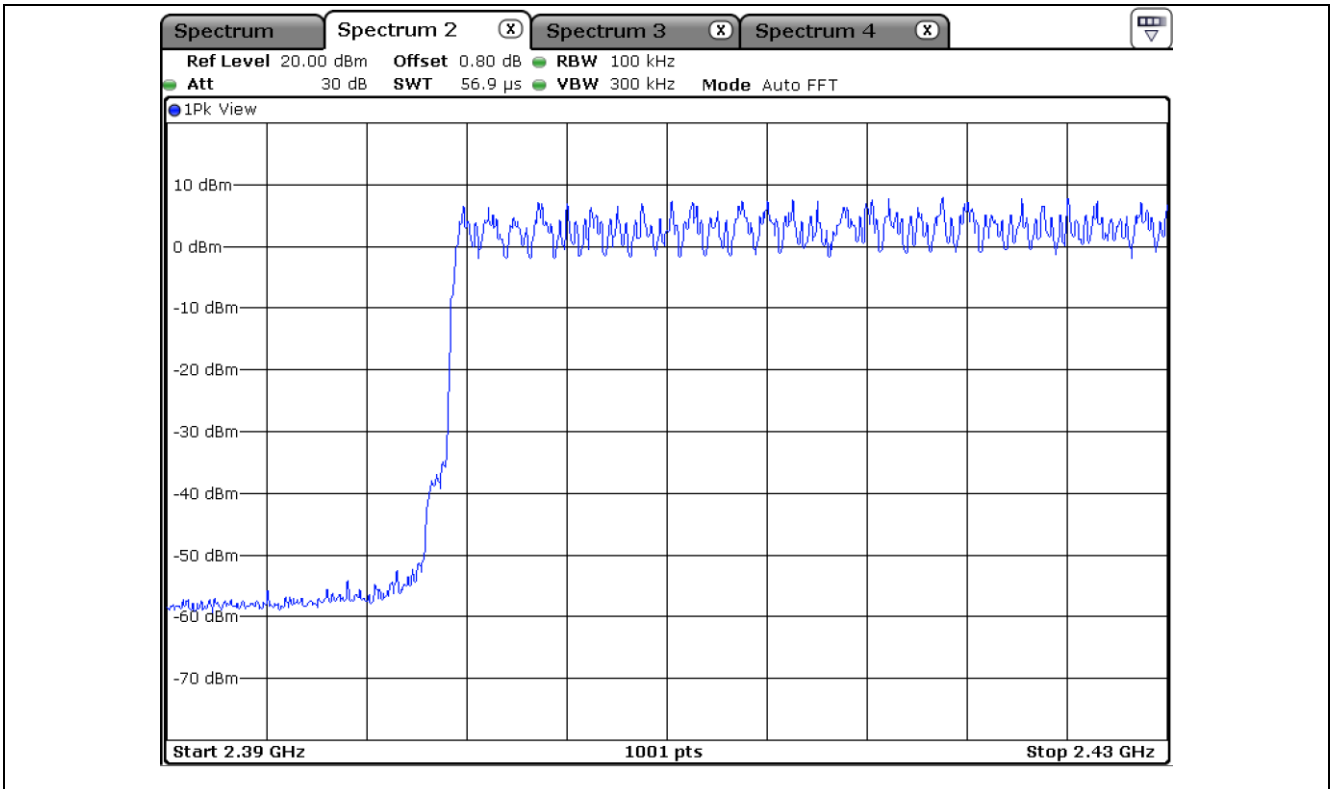

Number of hopping channel: 28

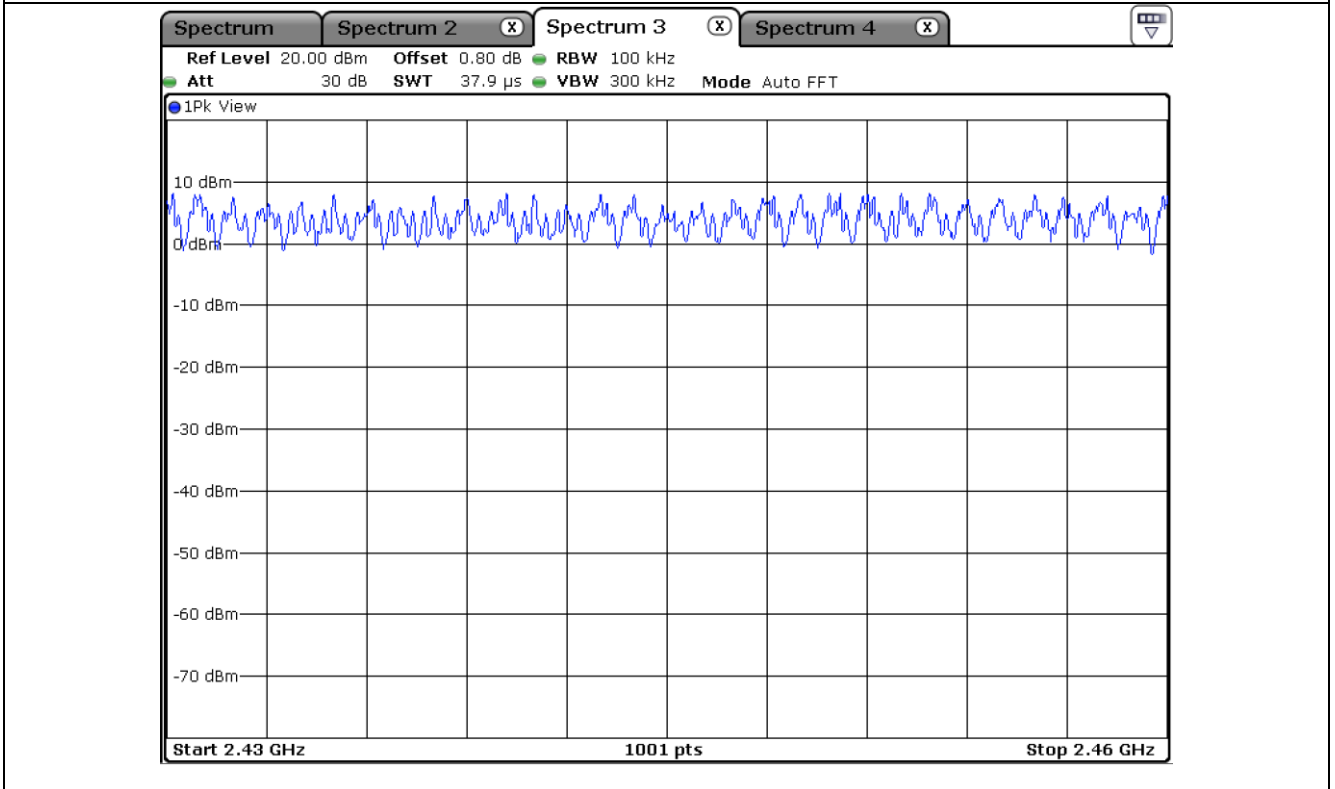

Number of hopping channel: 30

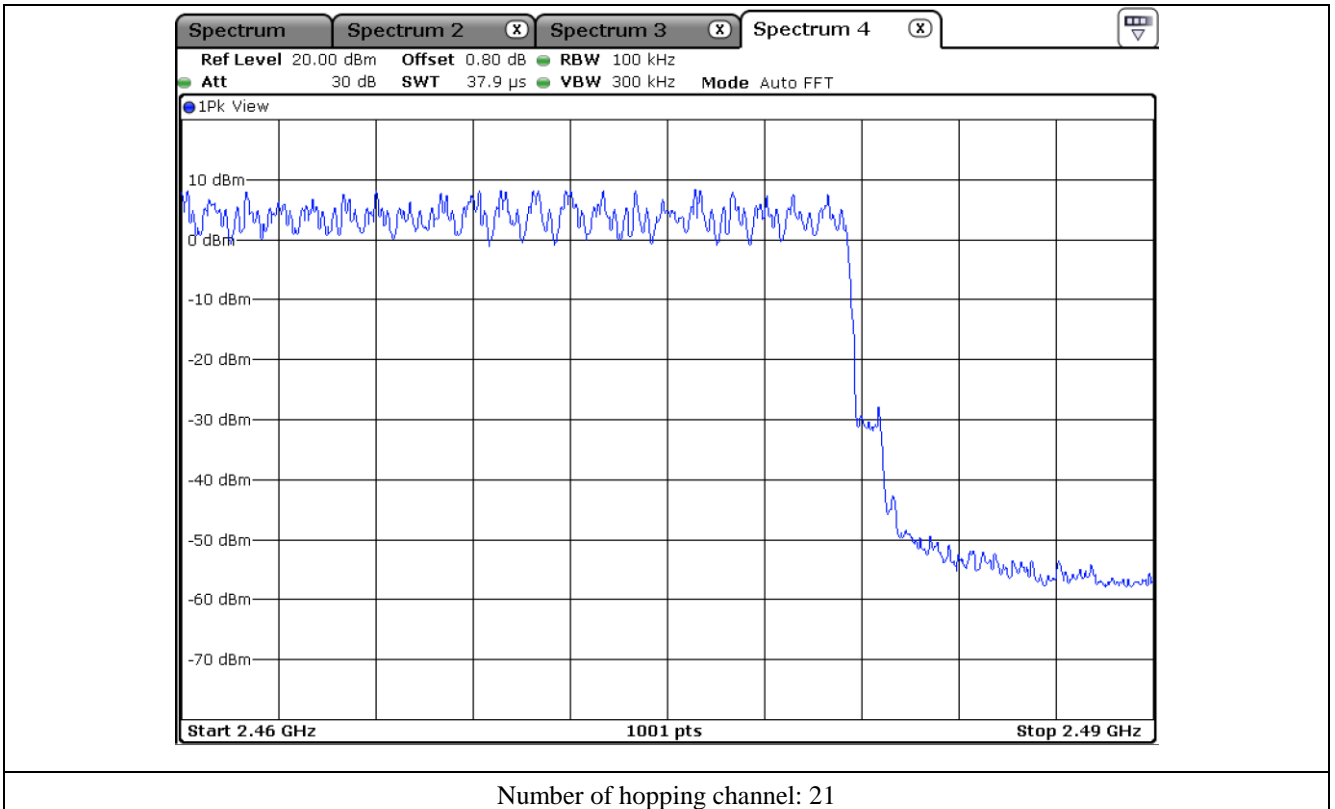

Number of hopping channel: 21


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 22 °C
 Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

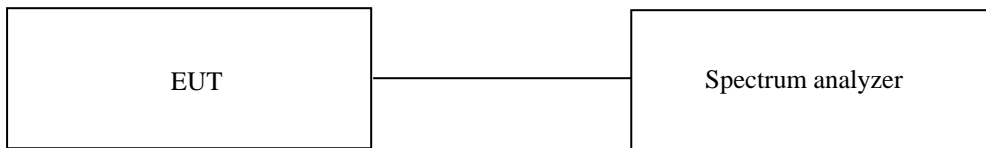

10.3 Test Date

May 24, 2021 ~ June 04, 2021

10.4 Test data

10.4.1 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So, The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.375	10.13	31.60	120.04	400.00	PASS
DH3	1.635	5.06	31.60	261.43	400.00	
DH5	2.895	3.38	31.60	309.21	400.00	

Total dwell time is calculated as following.


$$\text{Total Dwell Time} = \text{Pulse time} * \text{Hops per second with channels} * \text{period time}$$

Remark: See next page for an overview sweep performed with peak detector.

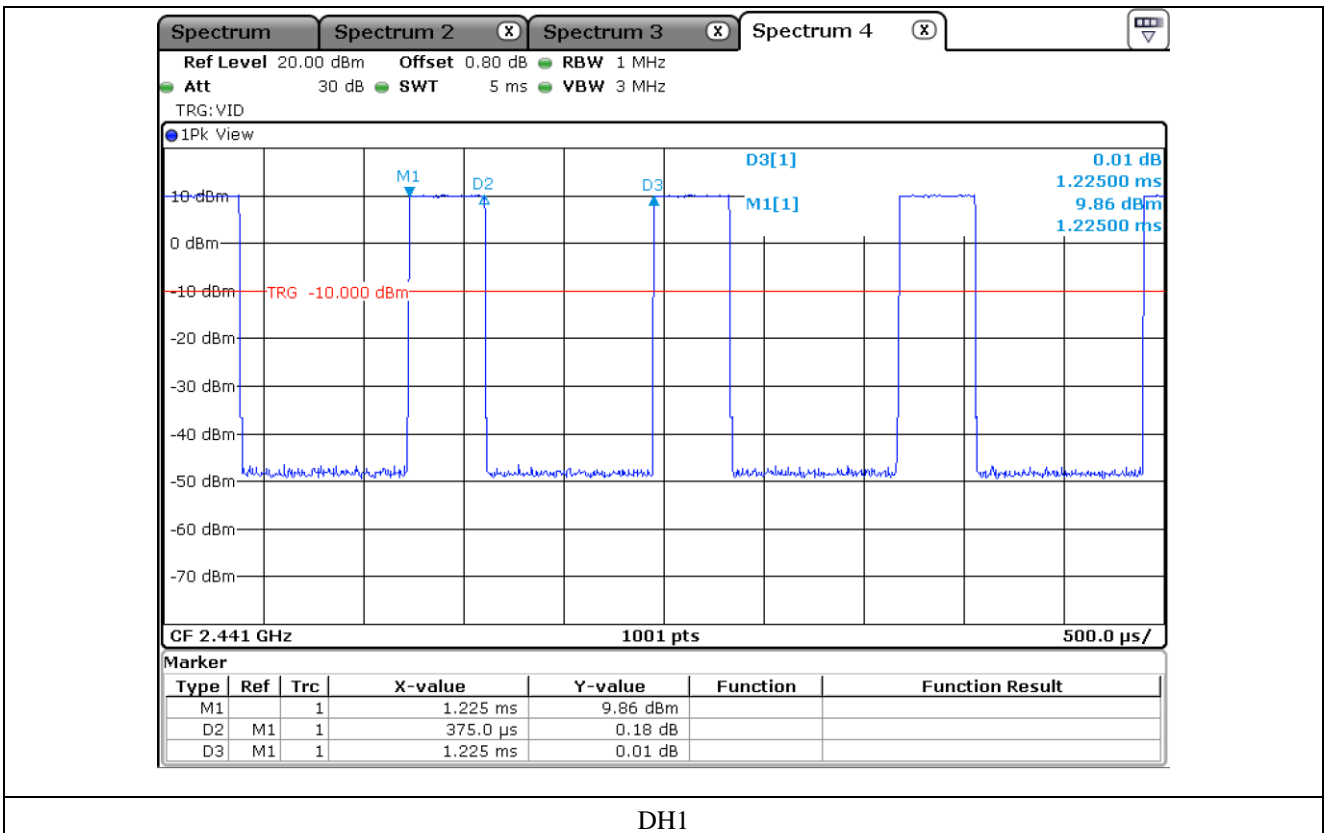

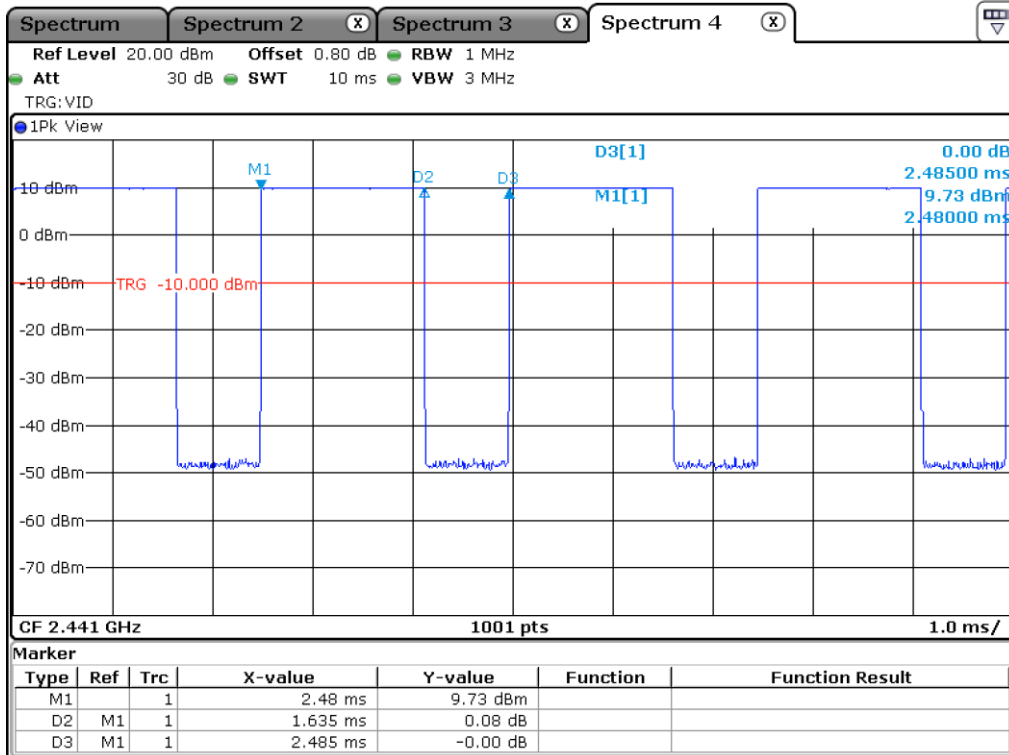

DH3

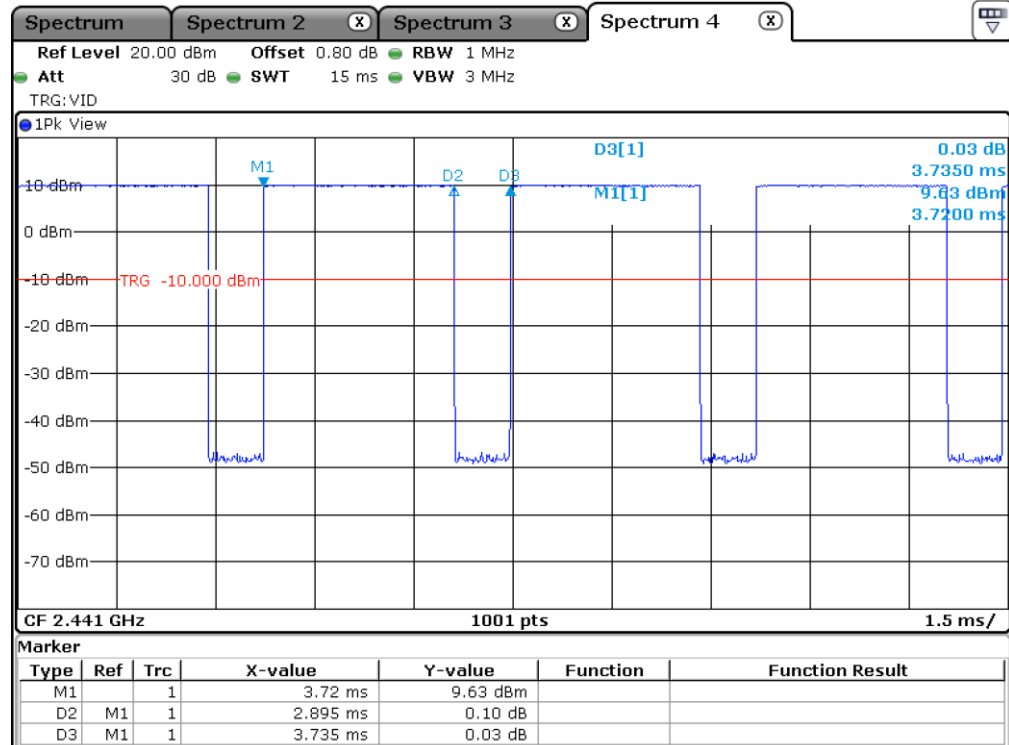

DH5

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

10.4.2 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So, The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.60	124.84	400.00	PASS
DH3	1.640	5.06	31.60	262.23	400.00	
DH5	2.880	3.38	31.60	307.61	400.00	


Total dwell time is calculated as following.

$$\text{Total Dwell Time} = \text{Pulse time} * \text{Hops per second with channels} * \text{period time}$$


Remark: See next page for an overview sweep performed with peak detector.

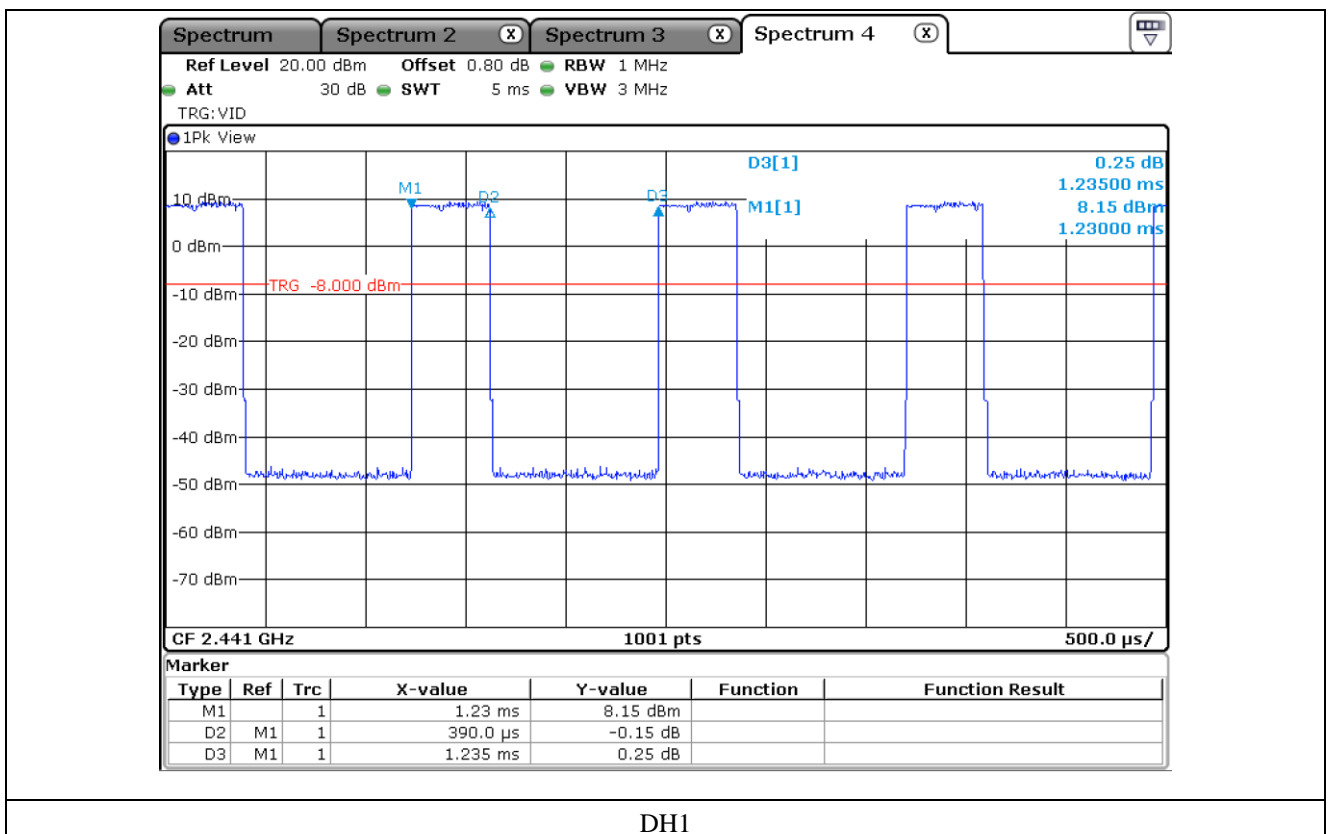

DH1

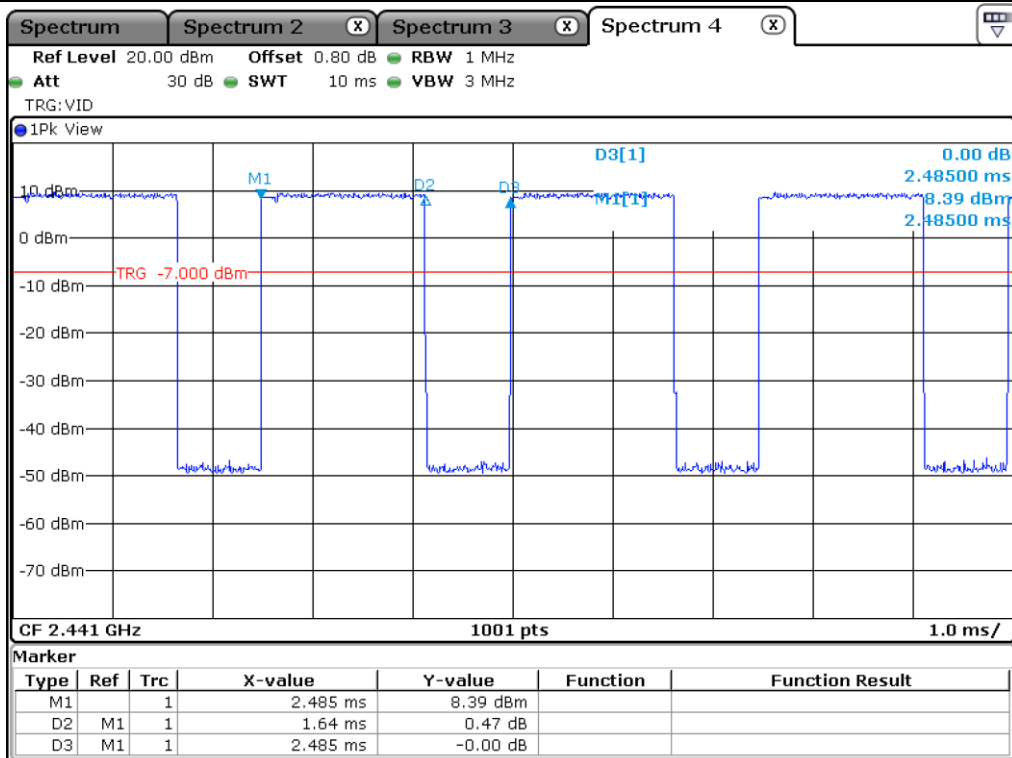

DH3

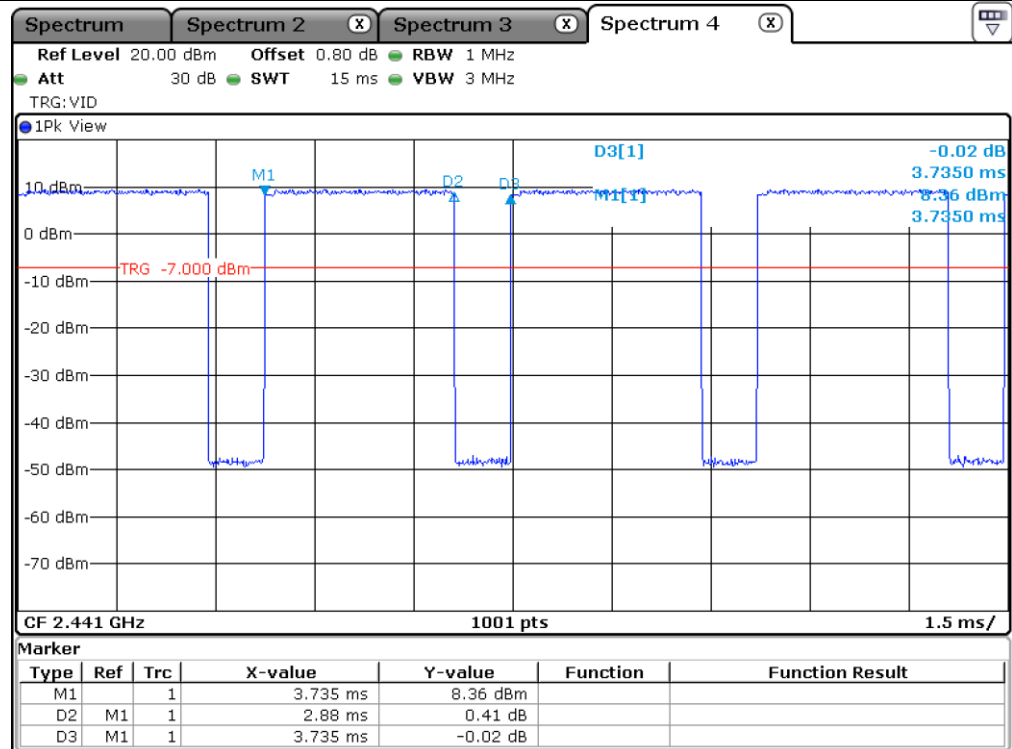

DH5

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

10.4.3 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So, The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.385	10.13	31.60	123.24	400.00	PASS
DH3	1.640	5.06	31.60	262.23	400.00	
DH5	2.895	3.38	31.60	309.21	400.00	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.

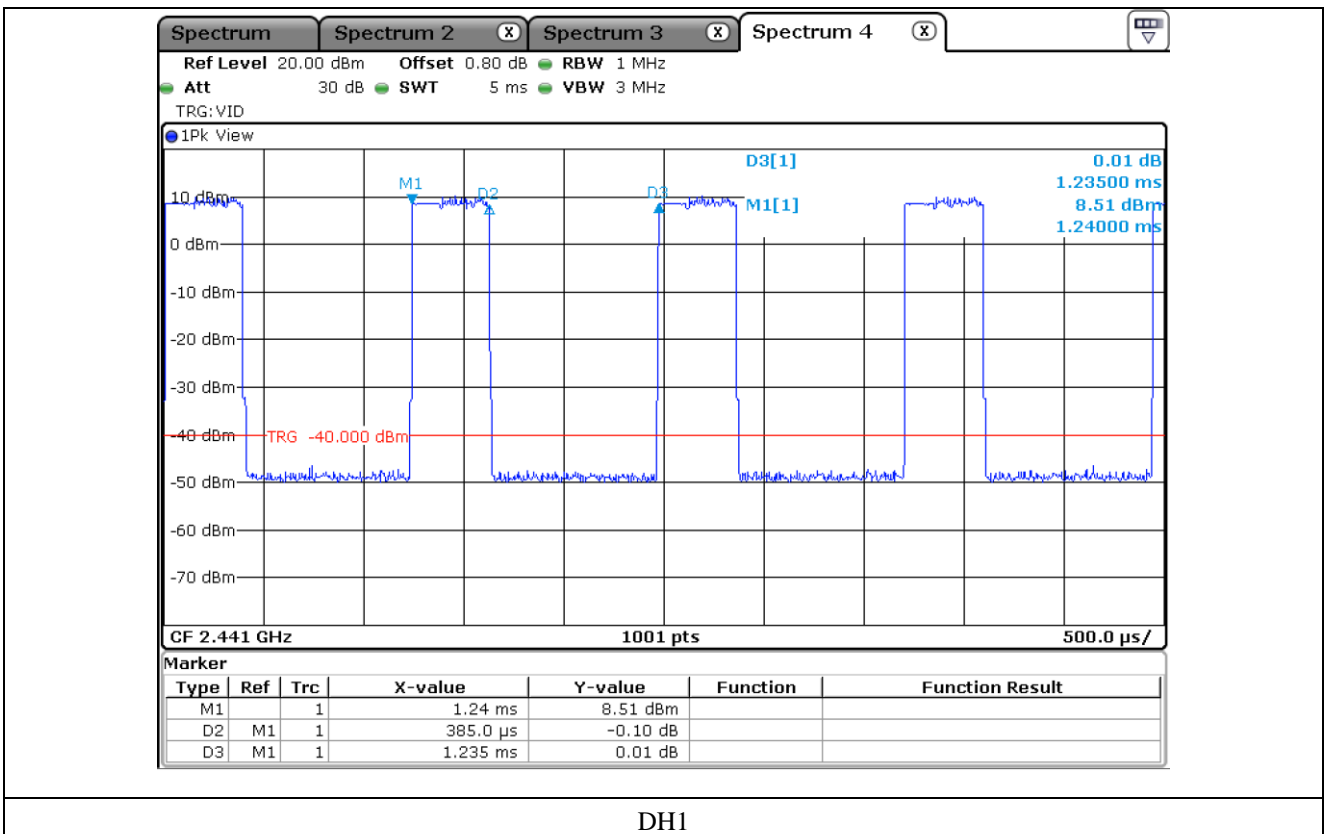

DH1

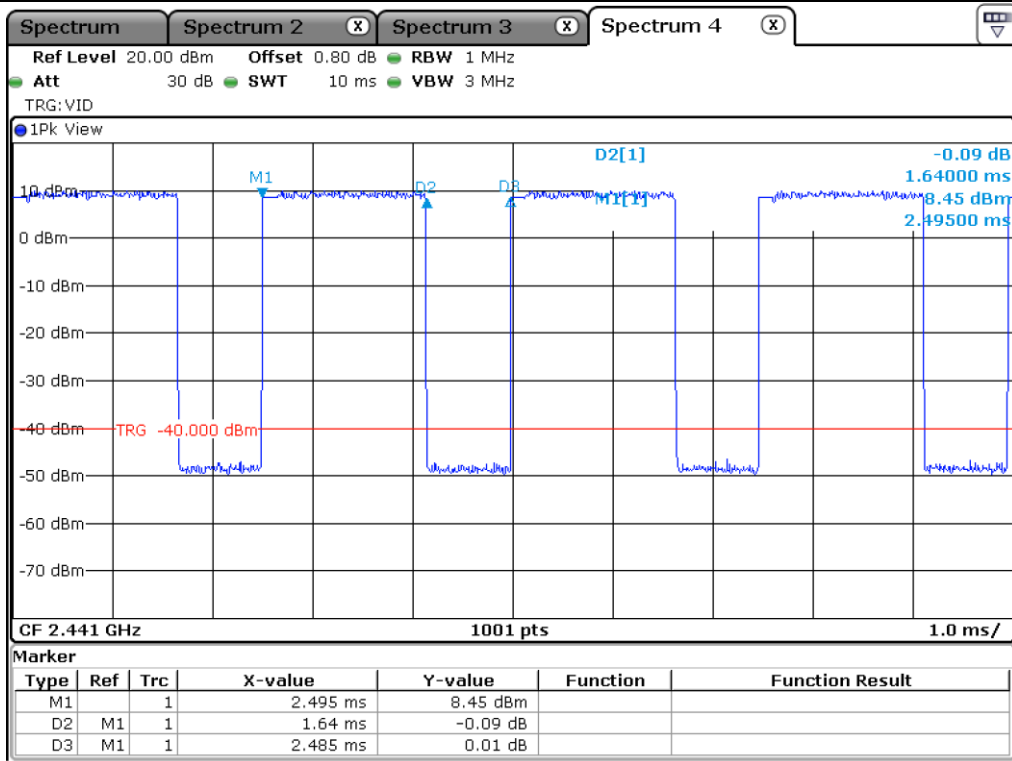

DH3

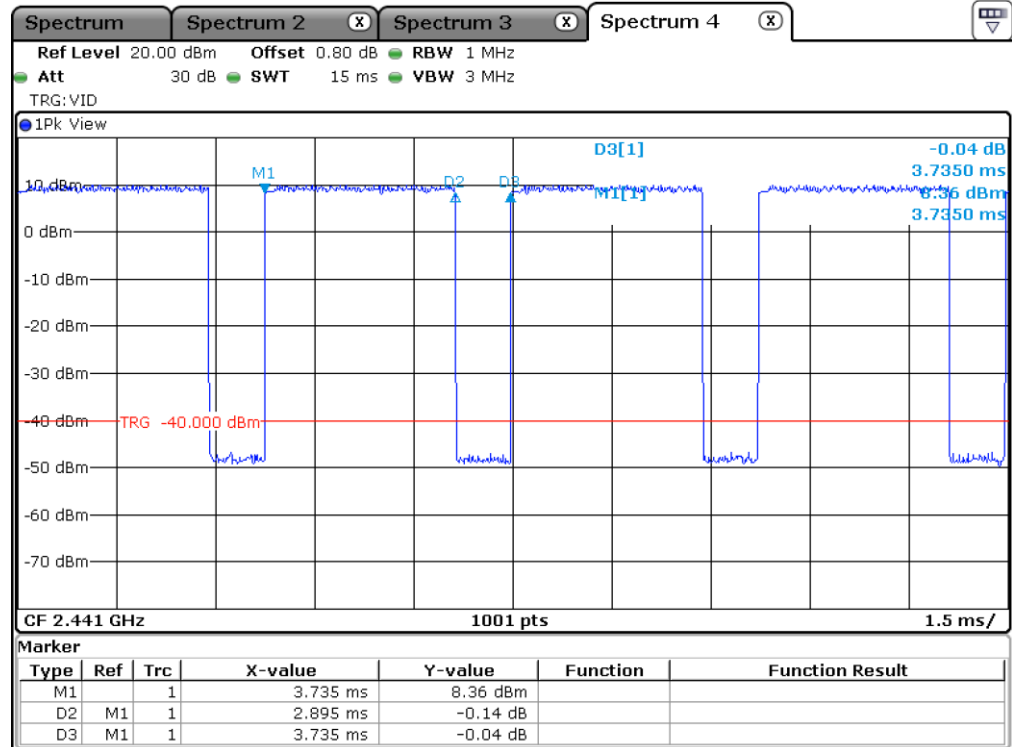

DH5

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 22 °C
 Relative humidity : 46 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

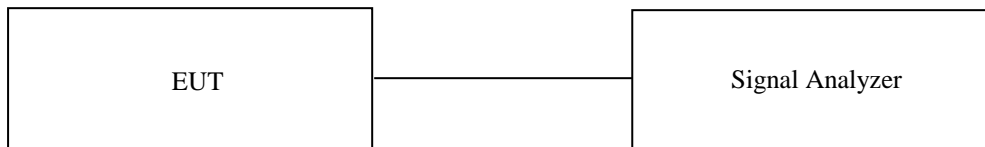

11.3 Test Date

May 24, 2021 ~ June 04, 2021


11.4 Test data


11.4.1 Test data for 1 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	8.85	21.00	12.15
MIDDLE	2 441.00	9.89	21.00	11.11
HIGH	2 480.00	9.98	21.00	11.02

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

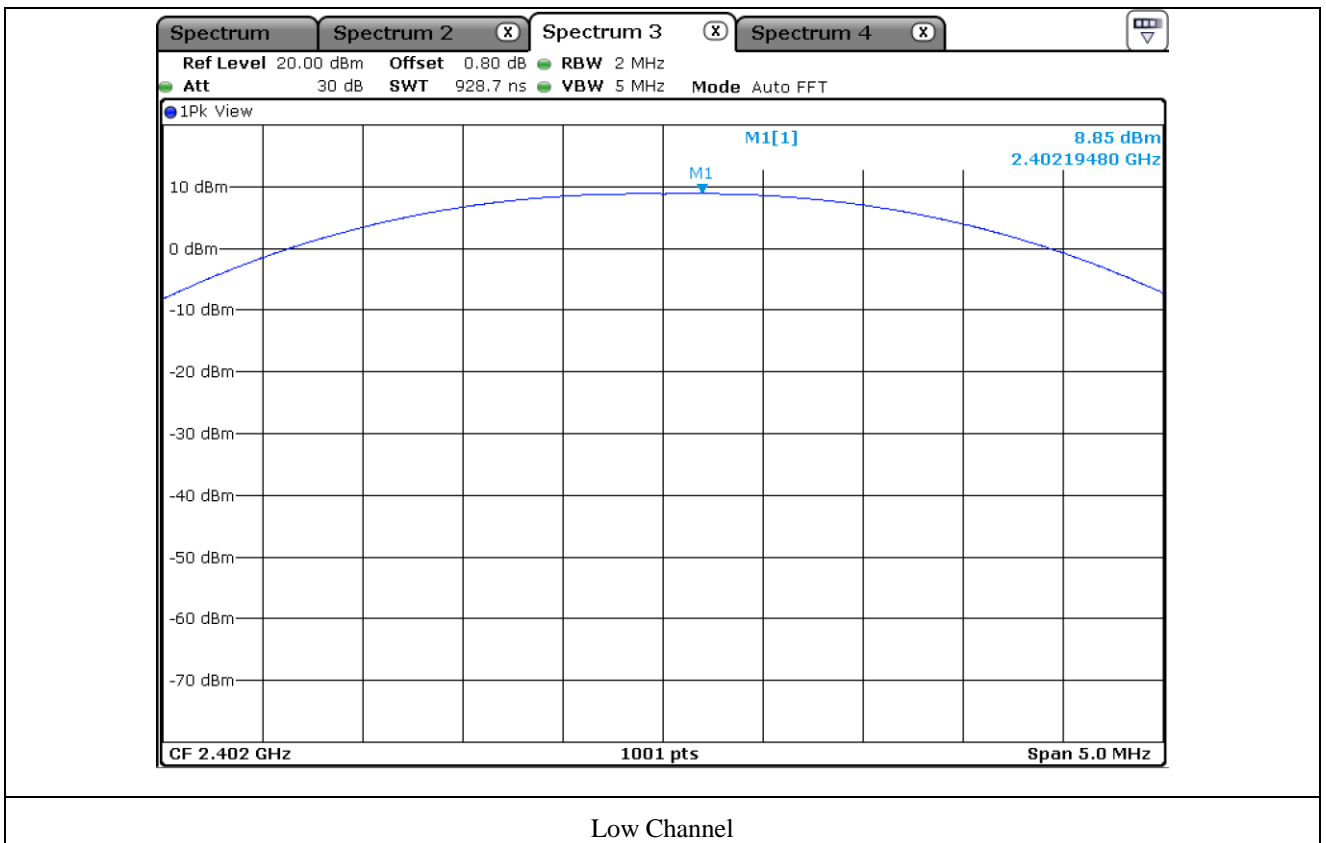

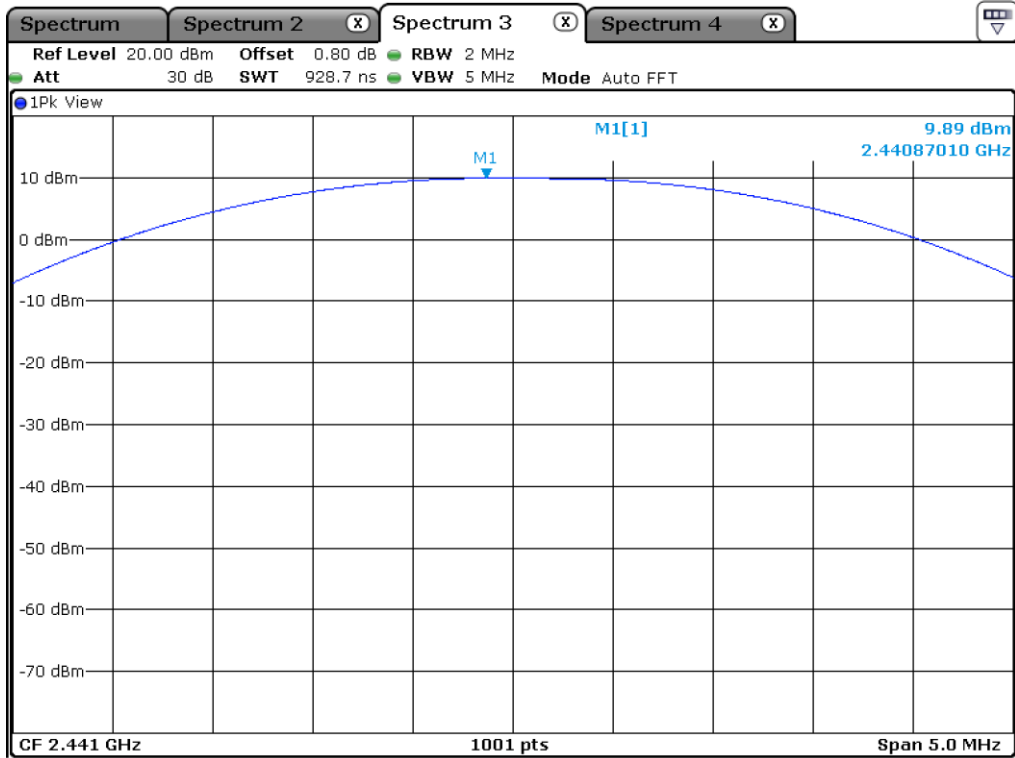

Middle Channel

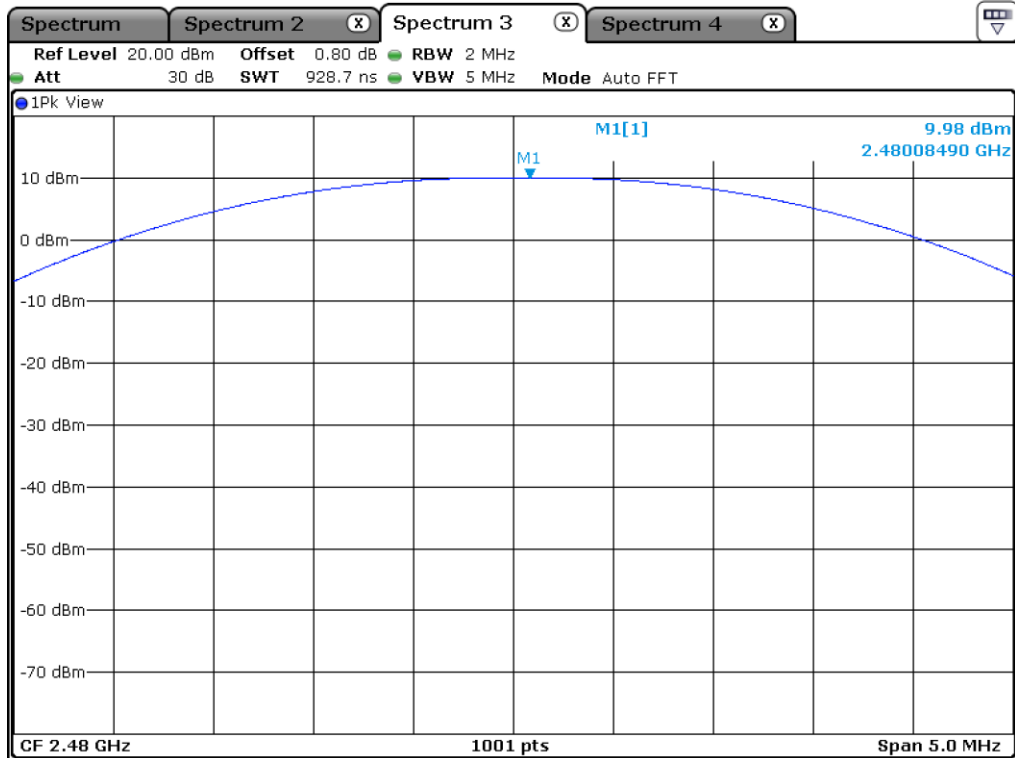

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)


11.4.2 Test data for 2 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	8.70	21.00	12.30
MIDDLE	2 441.00	9.72	21.00	11.28
HIGH	2 480.00	9.85	21.00	11.15

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

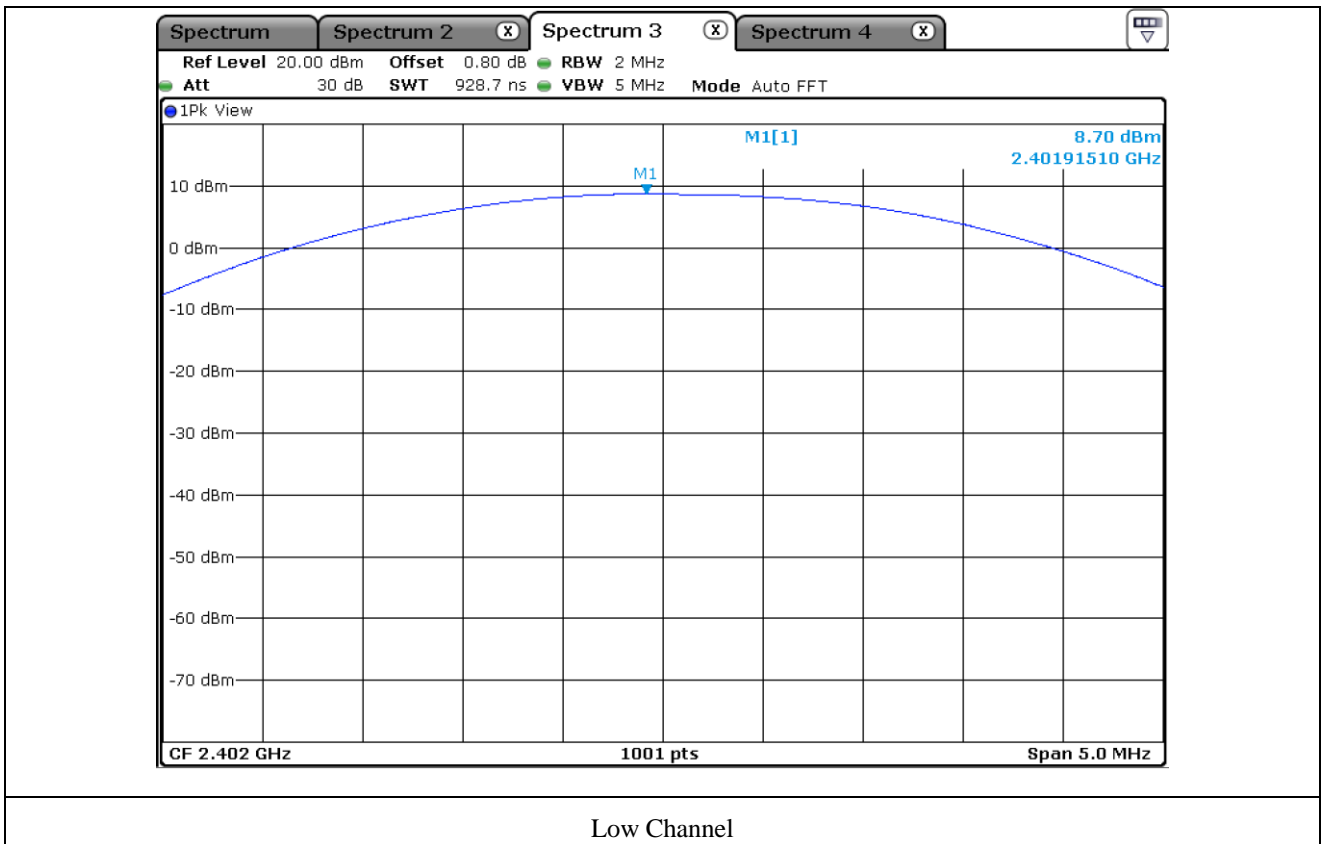

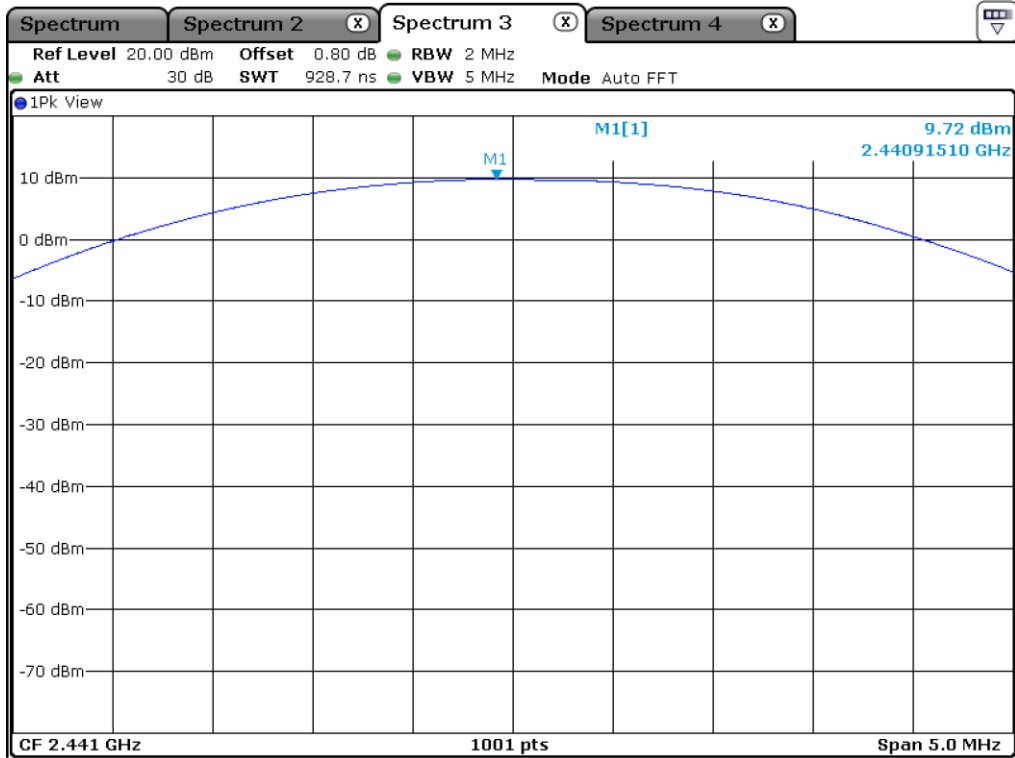

Middle Channel

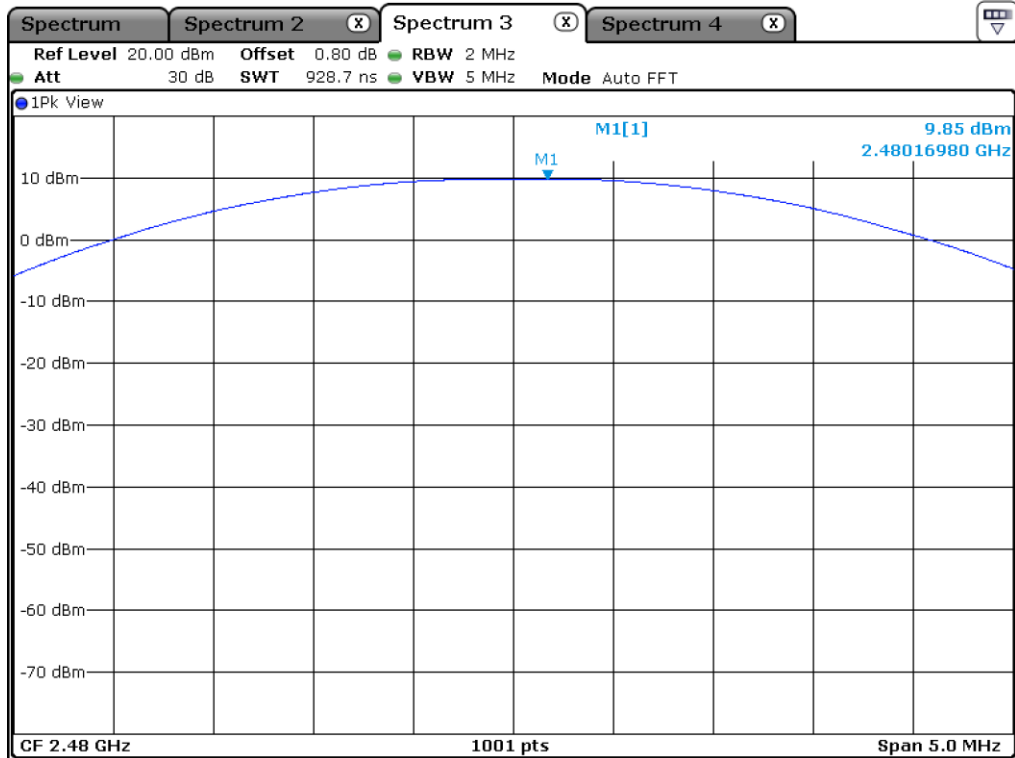

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)


11.4.3 Test data for 3 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	9.00	21.00	12.00
MIDDLE	2 441.00	10.11	21.00	10.89
HIGH	2 480.00	10.24	21.00	10.76

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

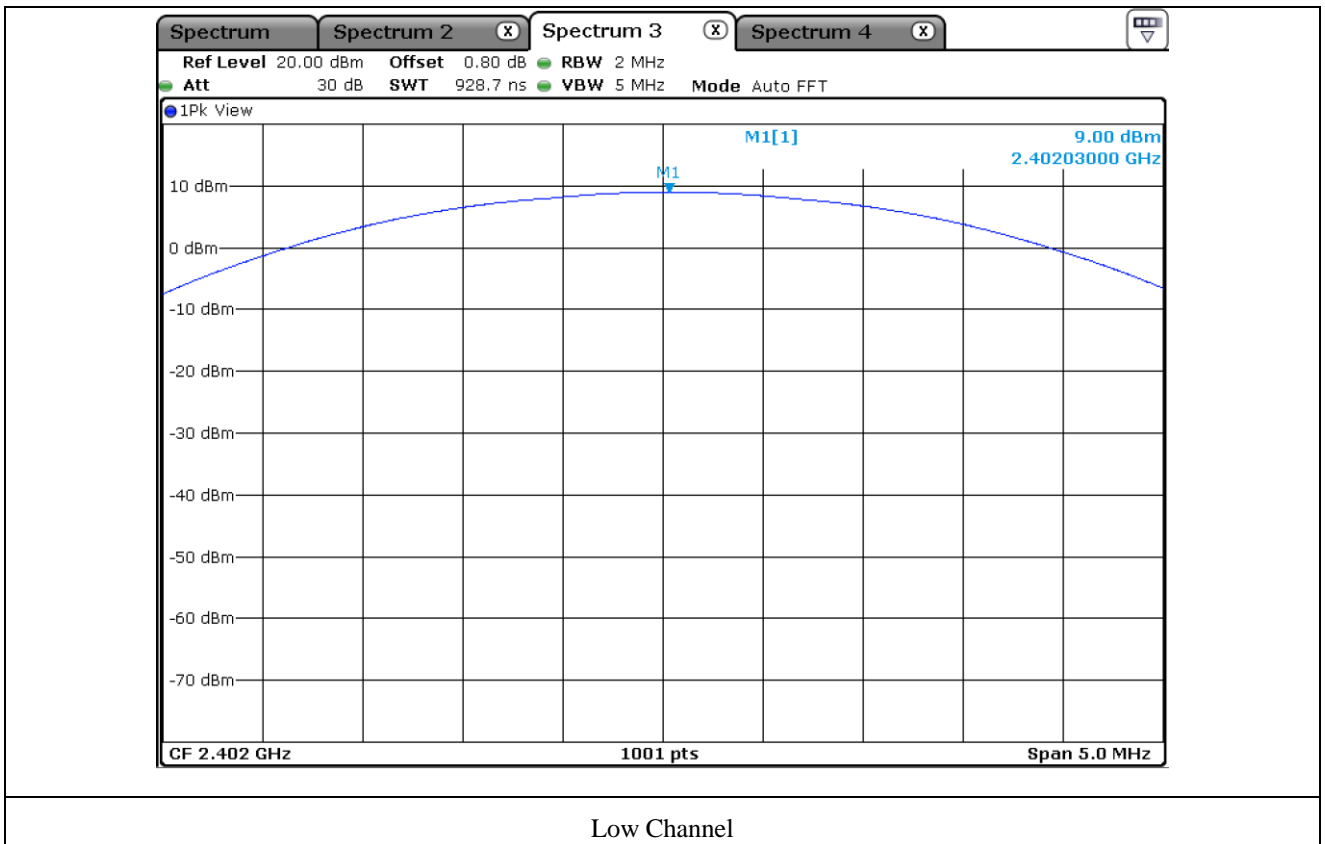

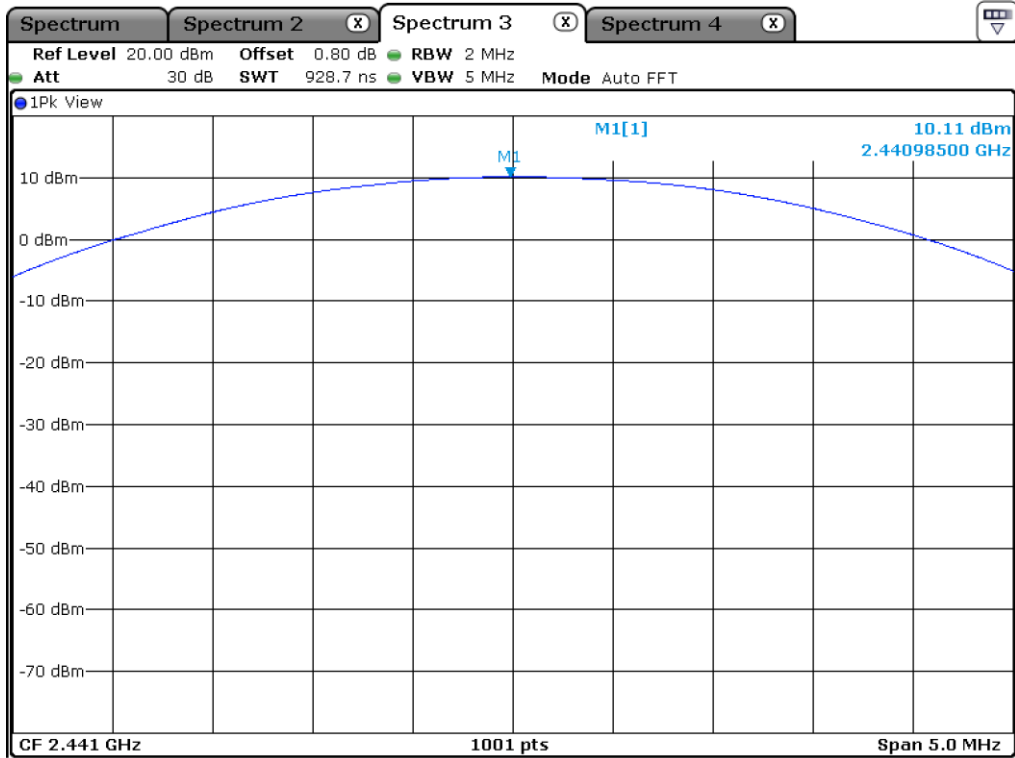

Middle Channel

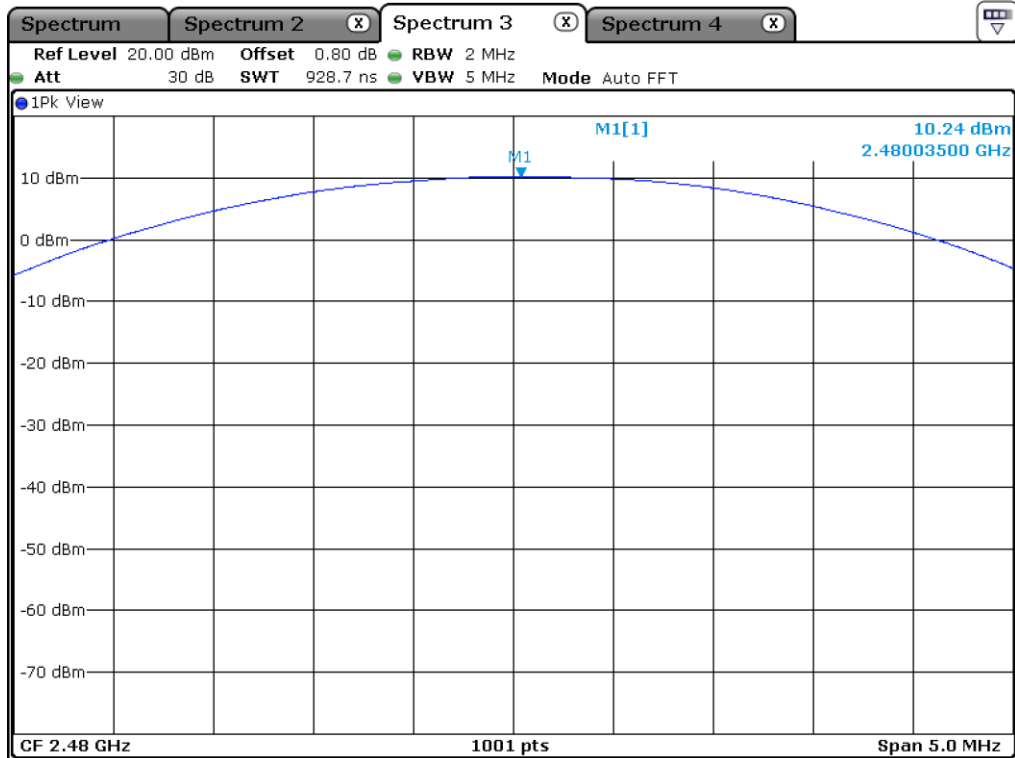

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 22 °C
 Relative humidity : 46 % R.H.

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

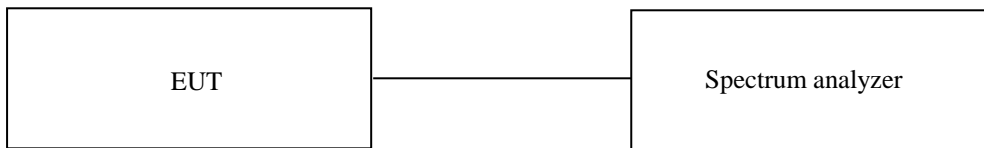

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

12.4 Test Date


May 24, 2021 ~ June 04, 2021

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

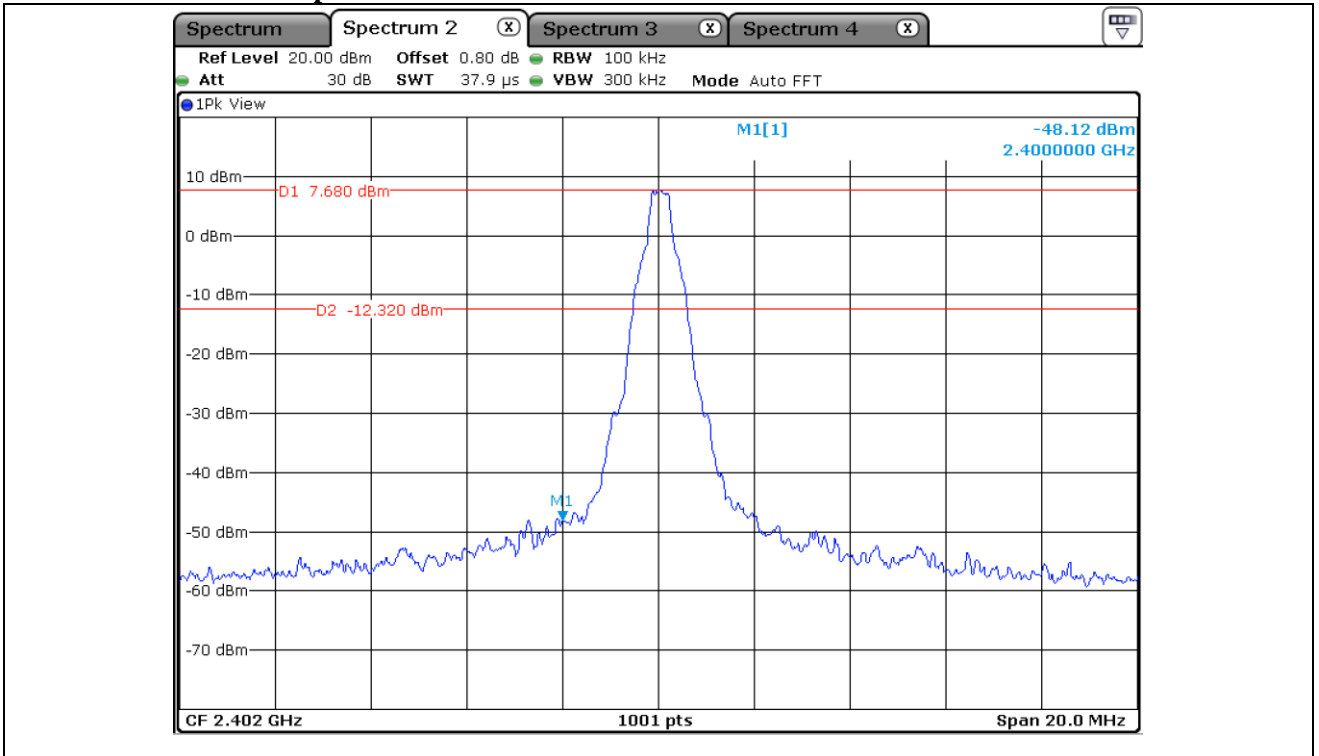


Low Channel

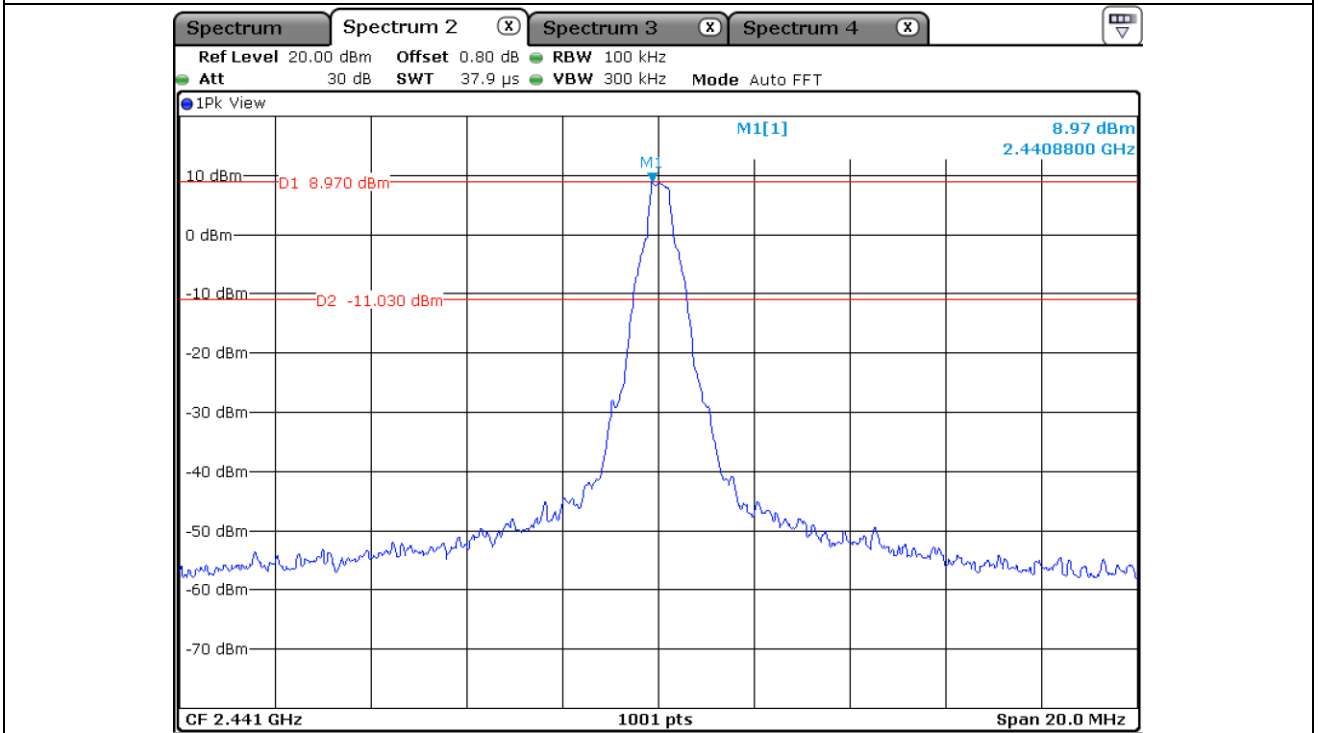

Middle Channel

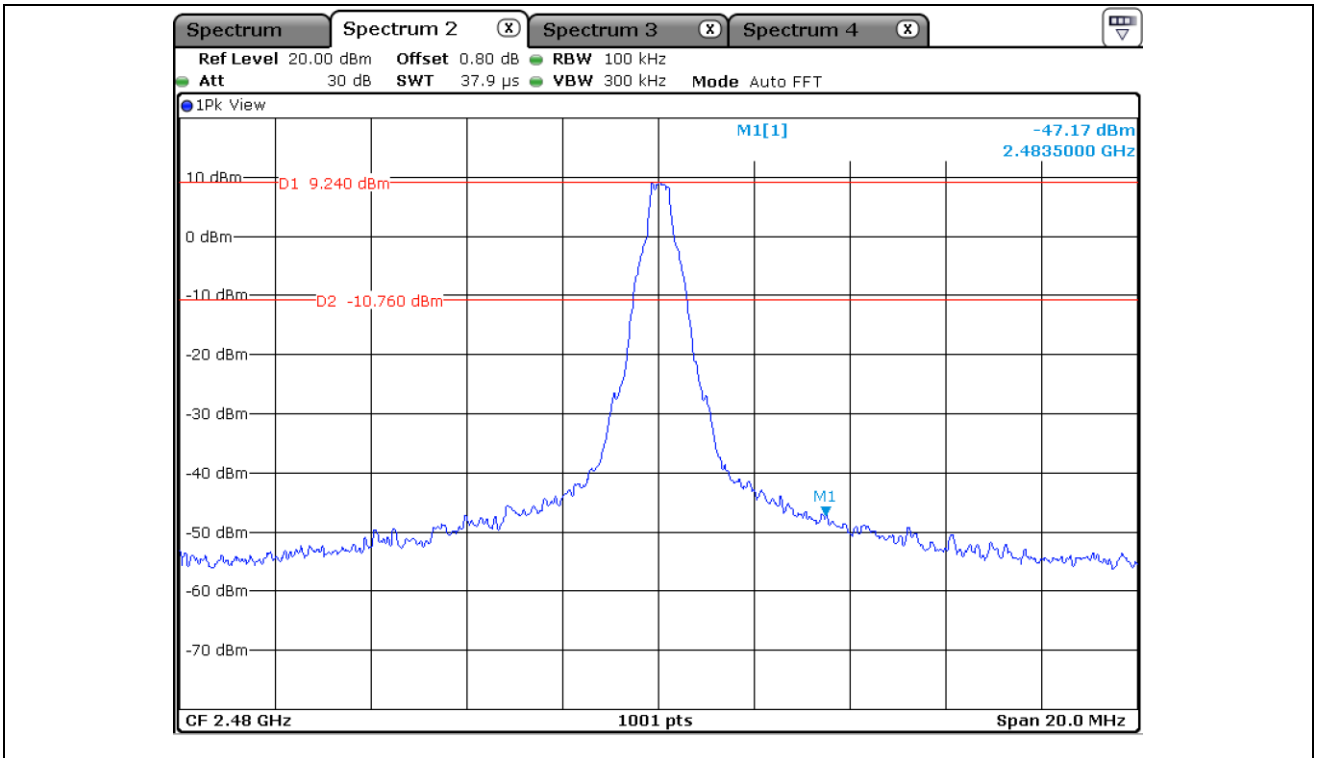

High Channel

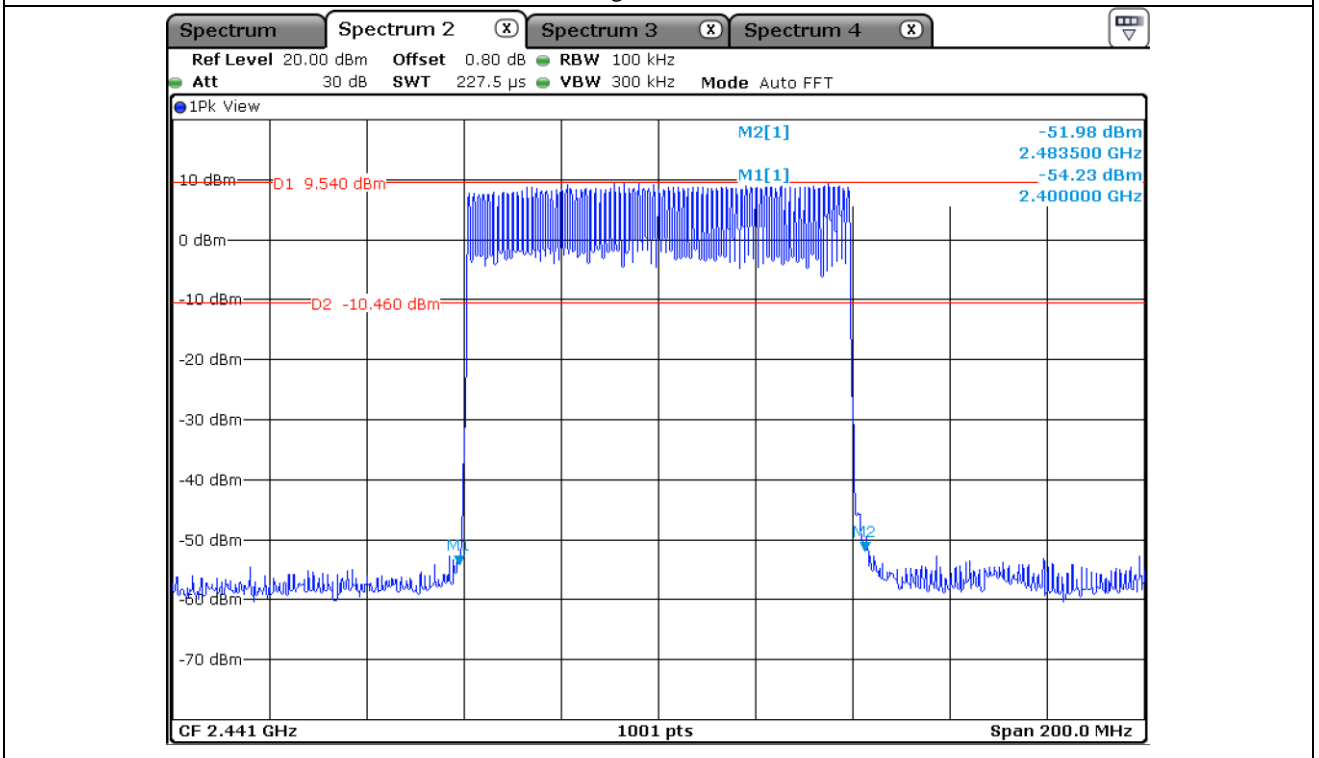


Hopping Mode


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

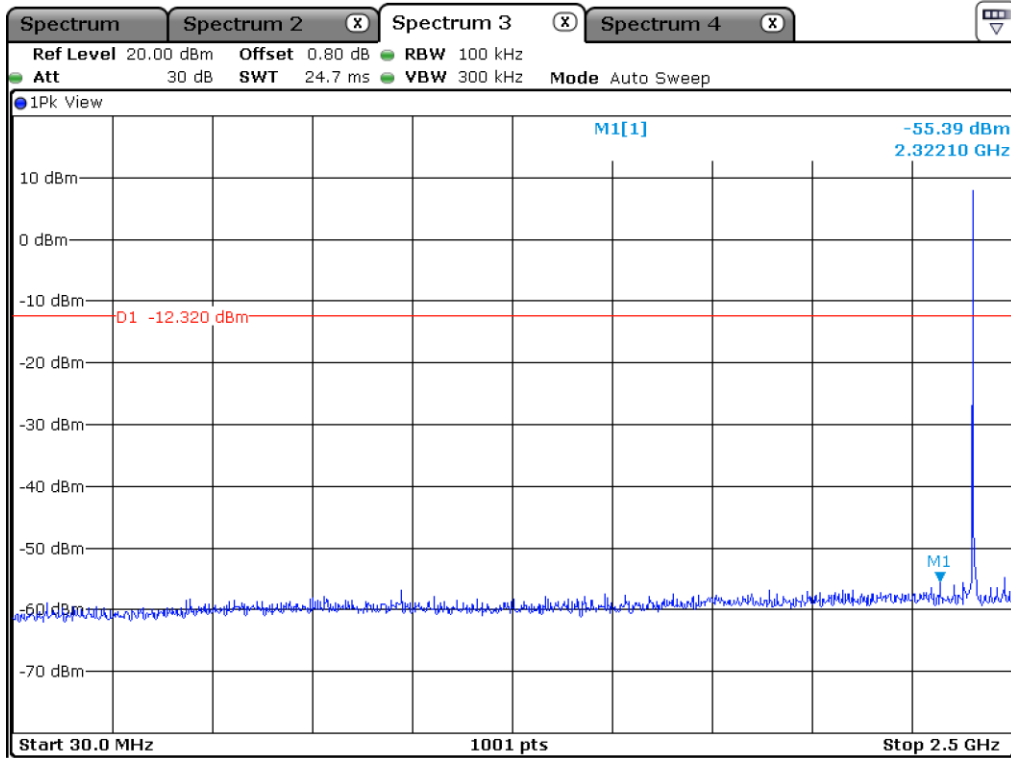

Low Channel

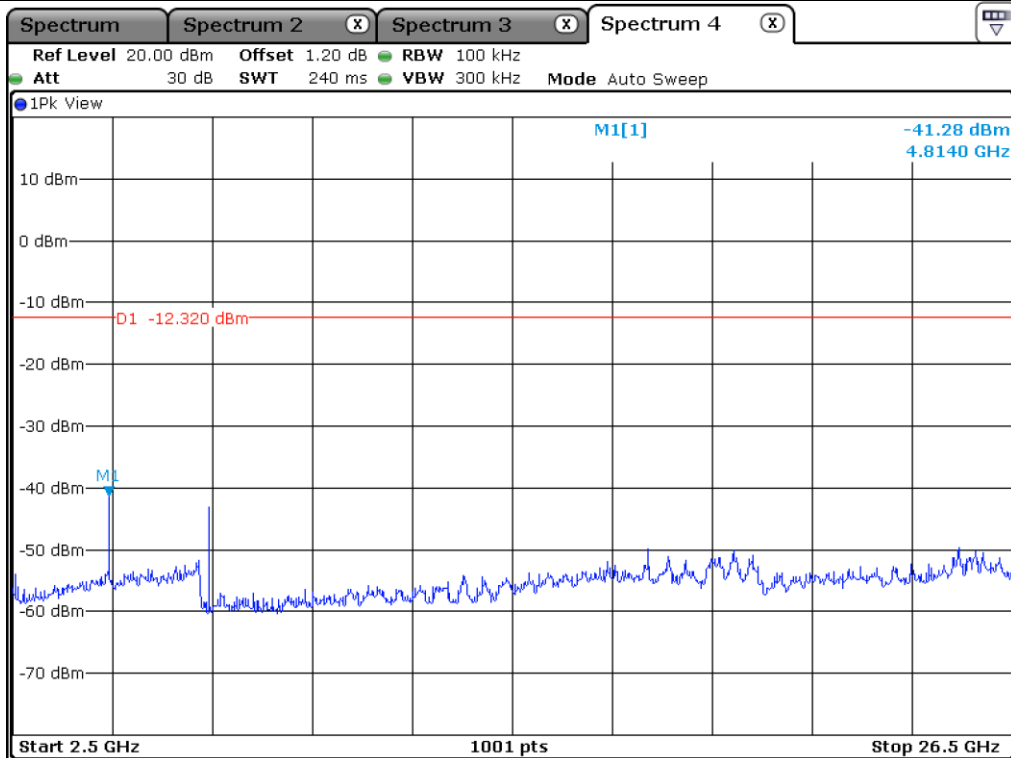


Low Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

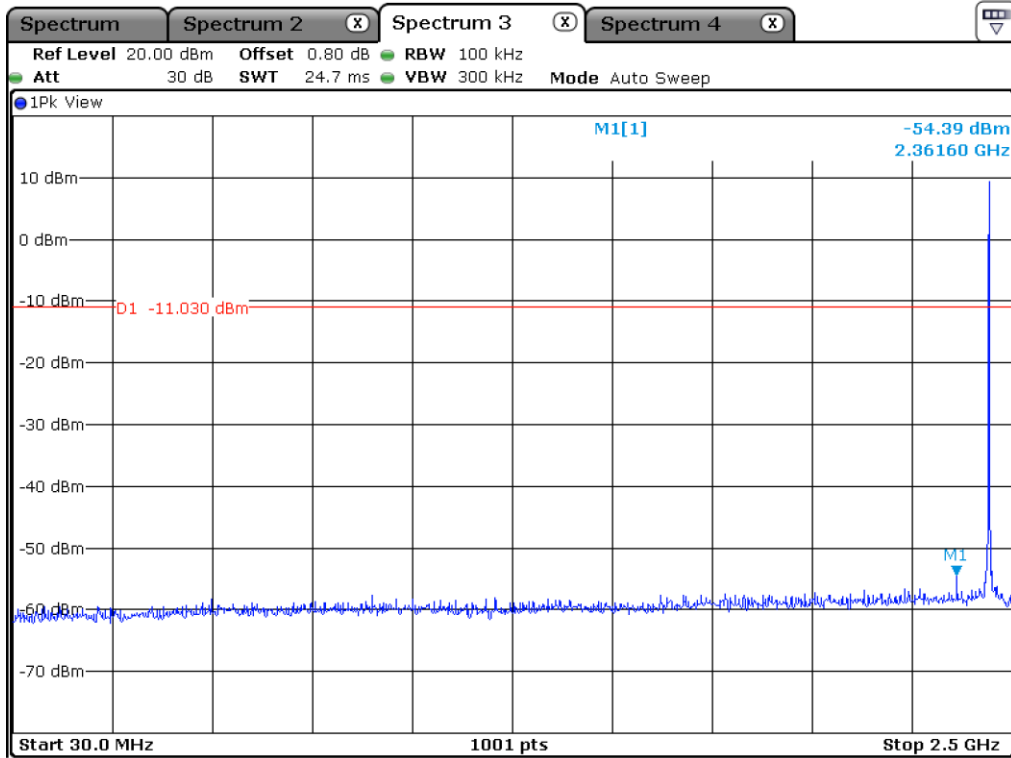

Middle Channel

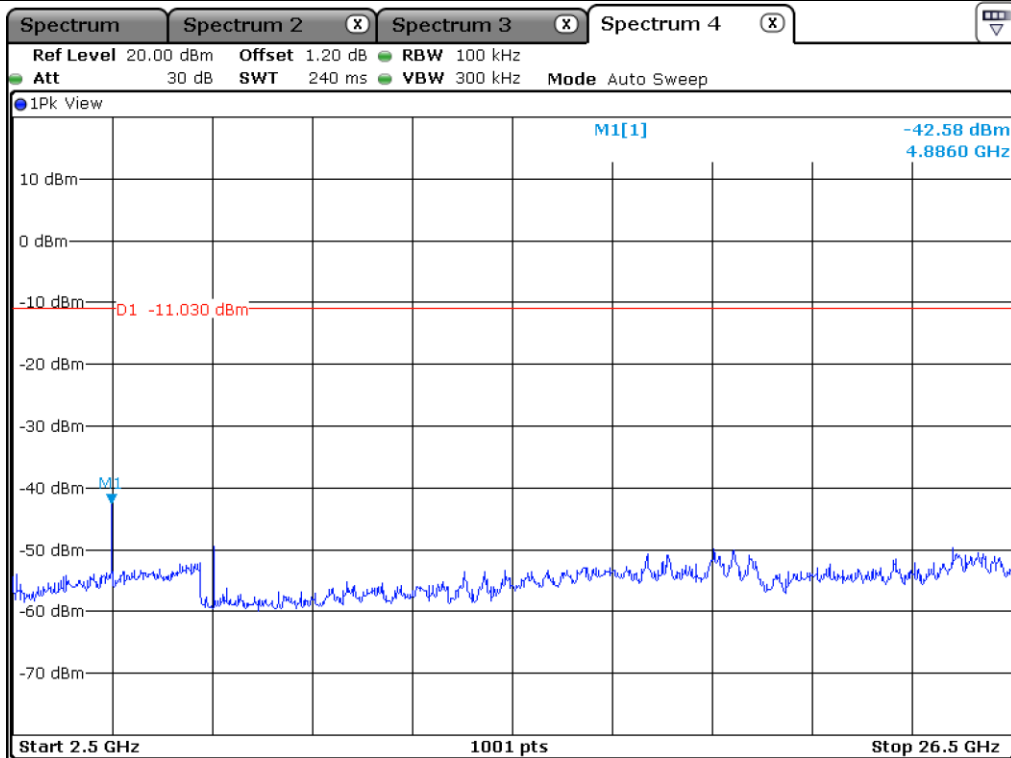


Middle Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

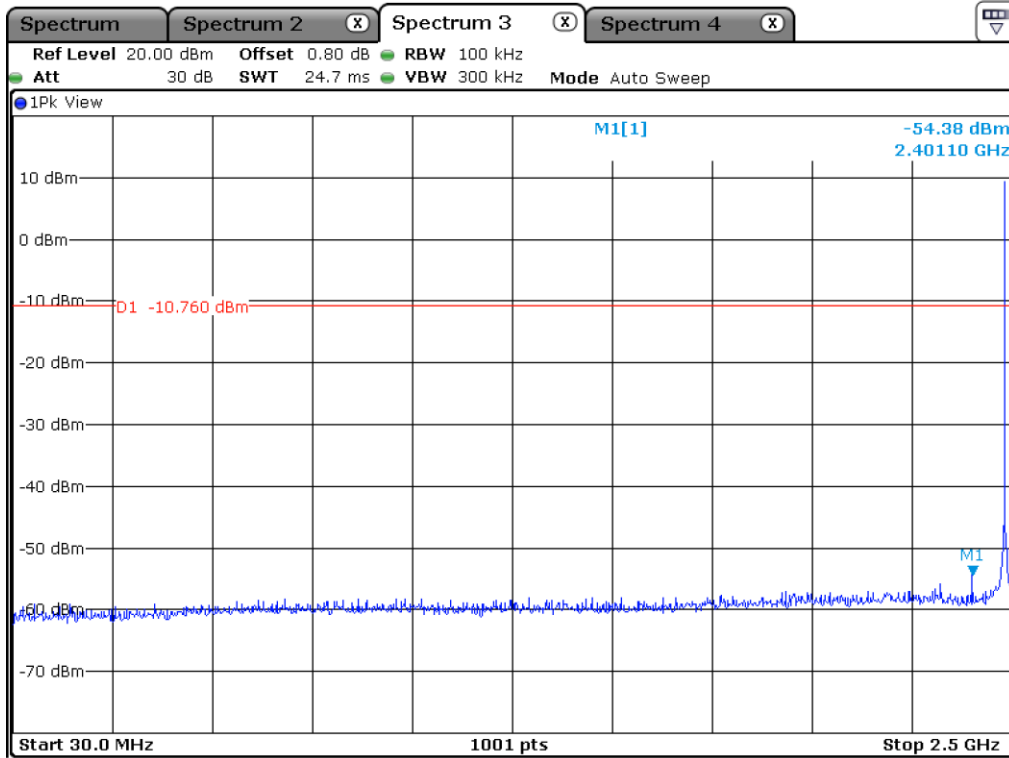

High Channel

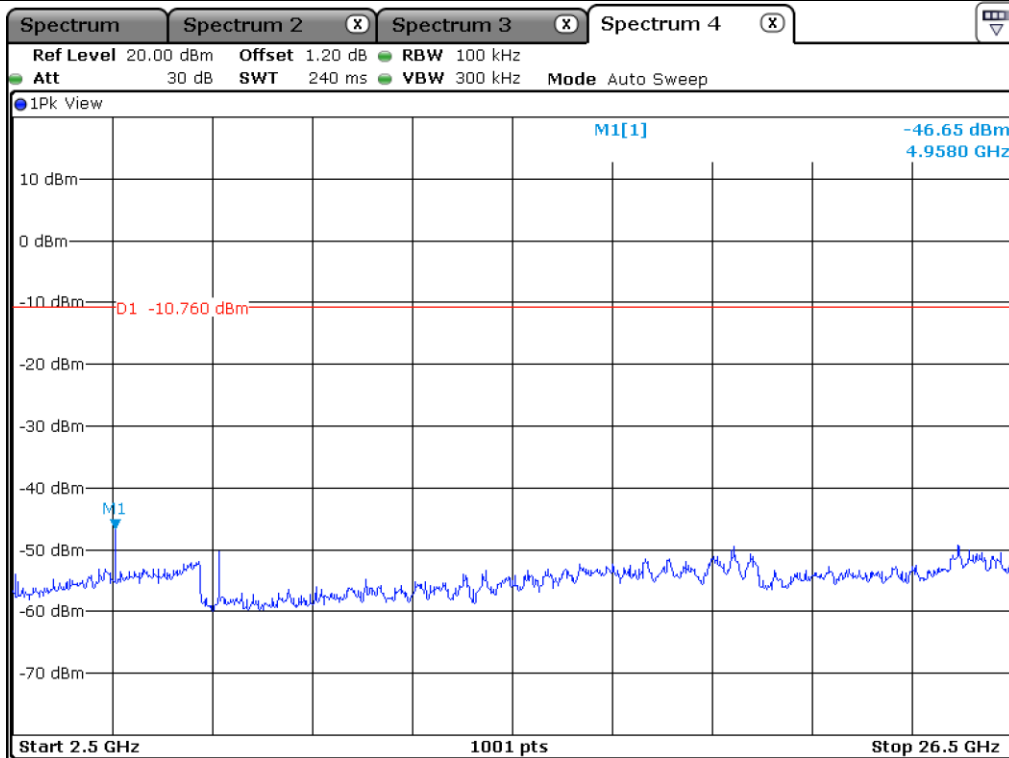


High Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

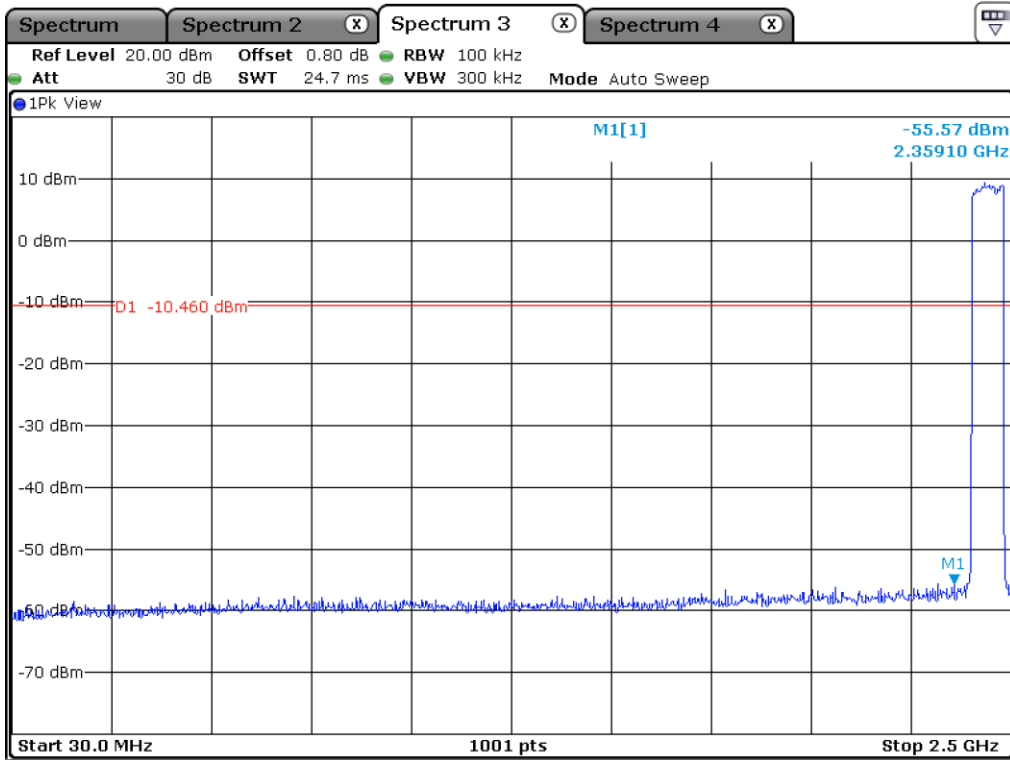

Hopping Mode

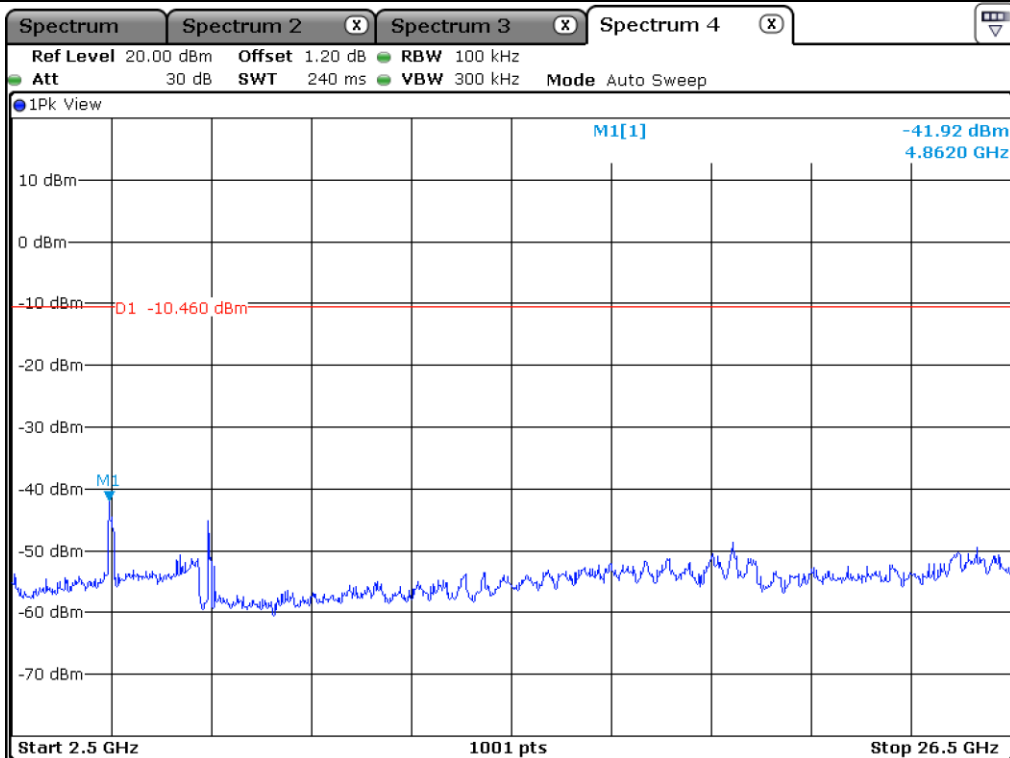

Hopping Mode

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

12.5.2 Test data for 2 Mbps

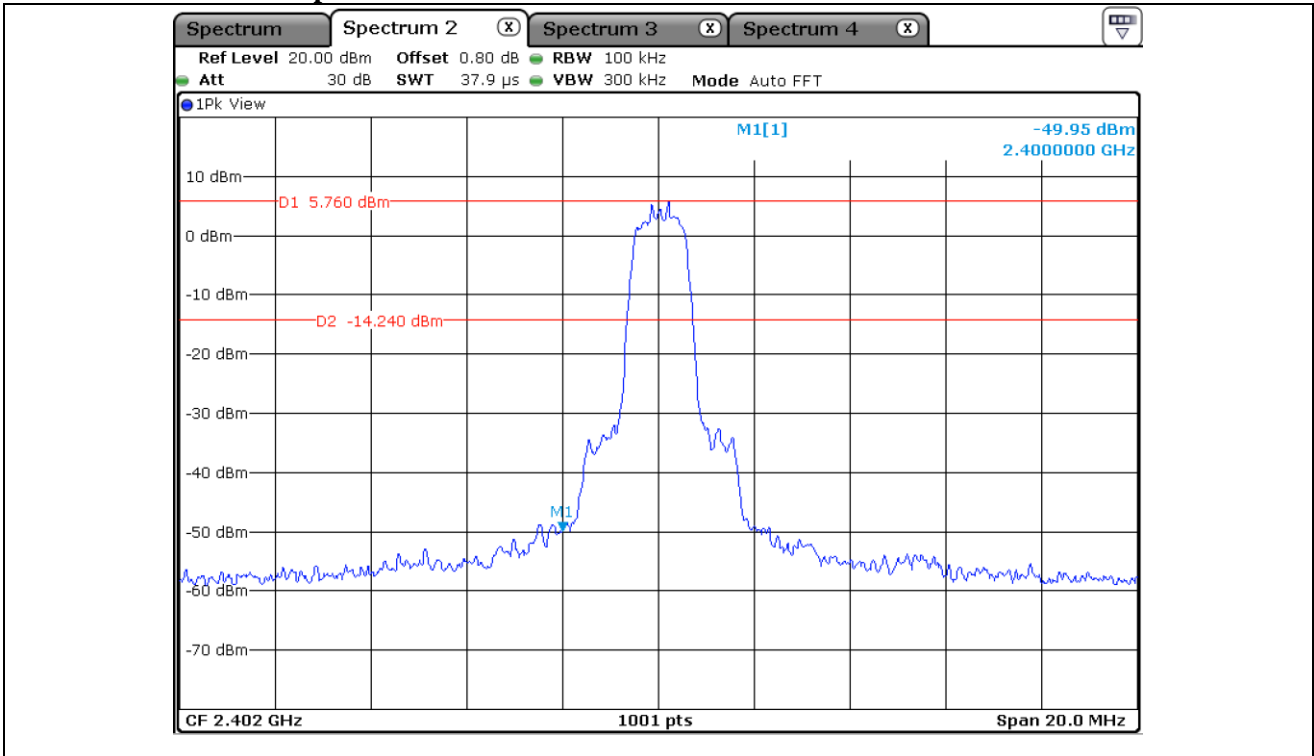

Low Channel


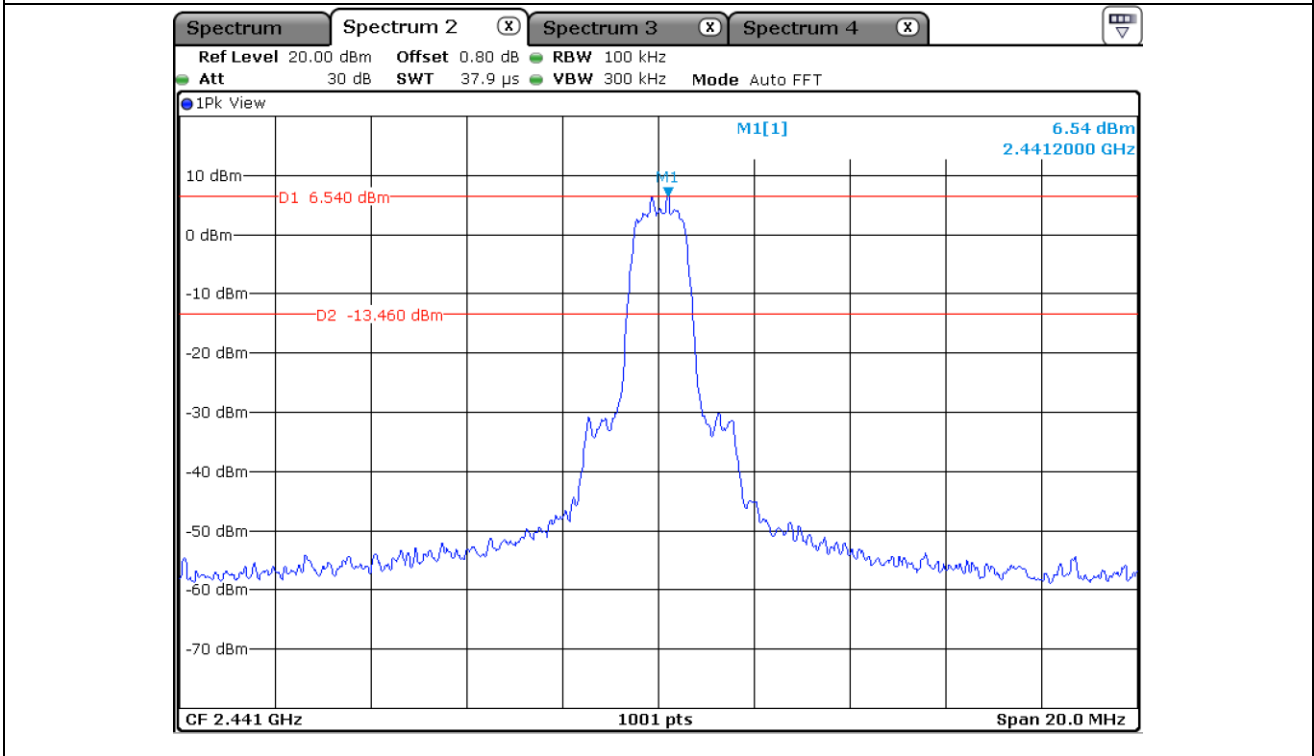



Middle Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

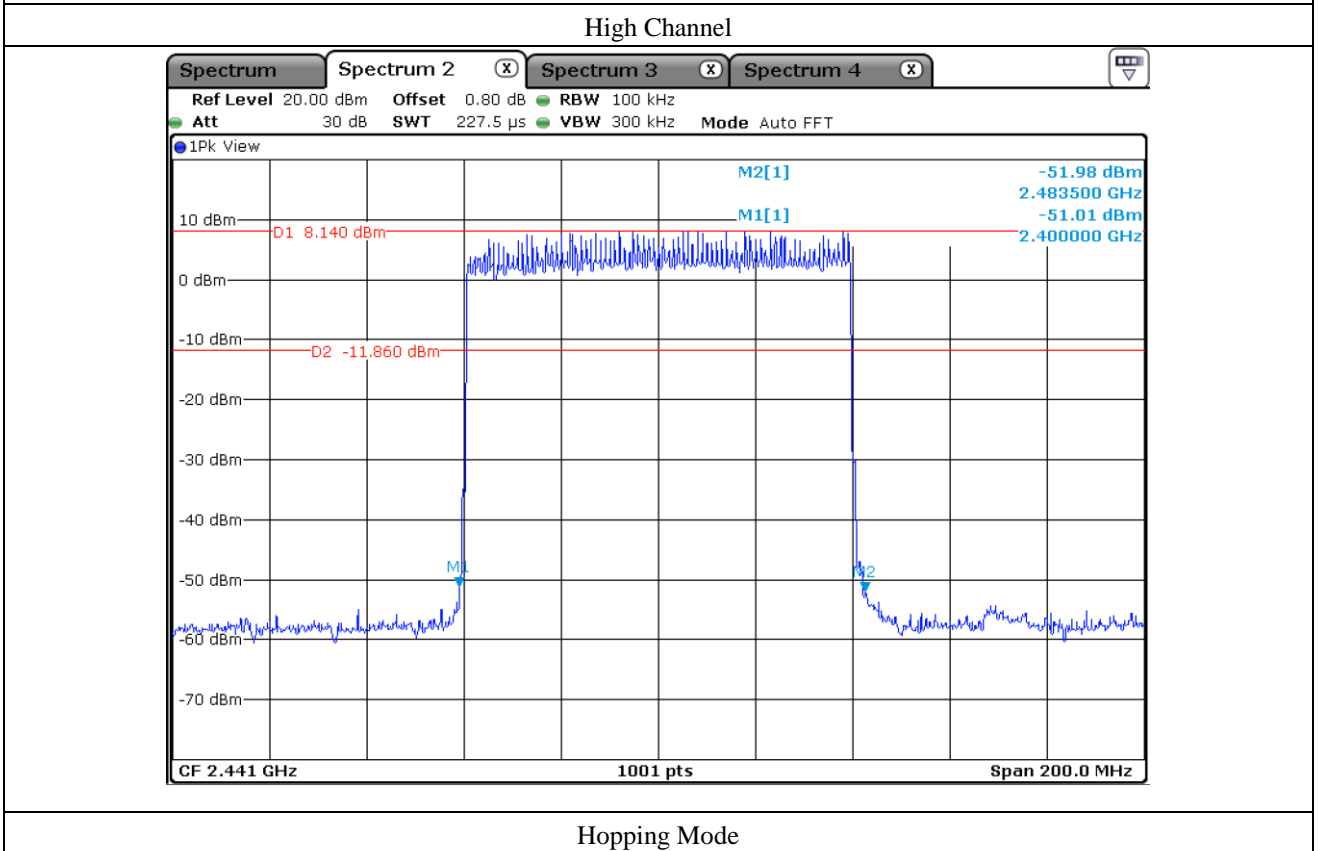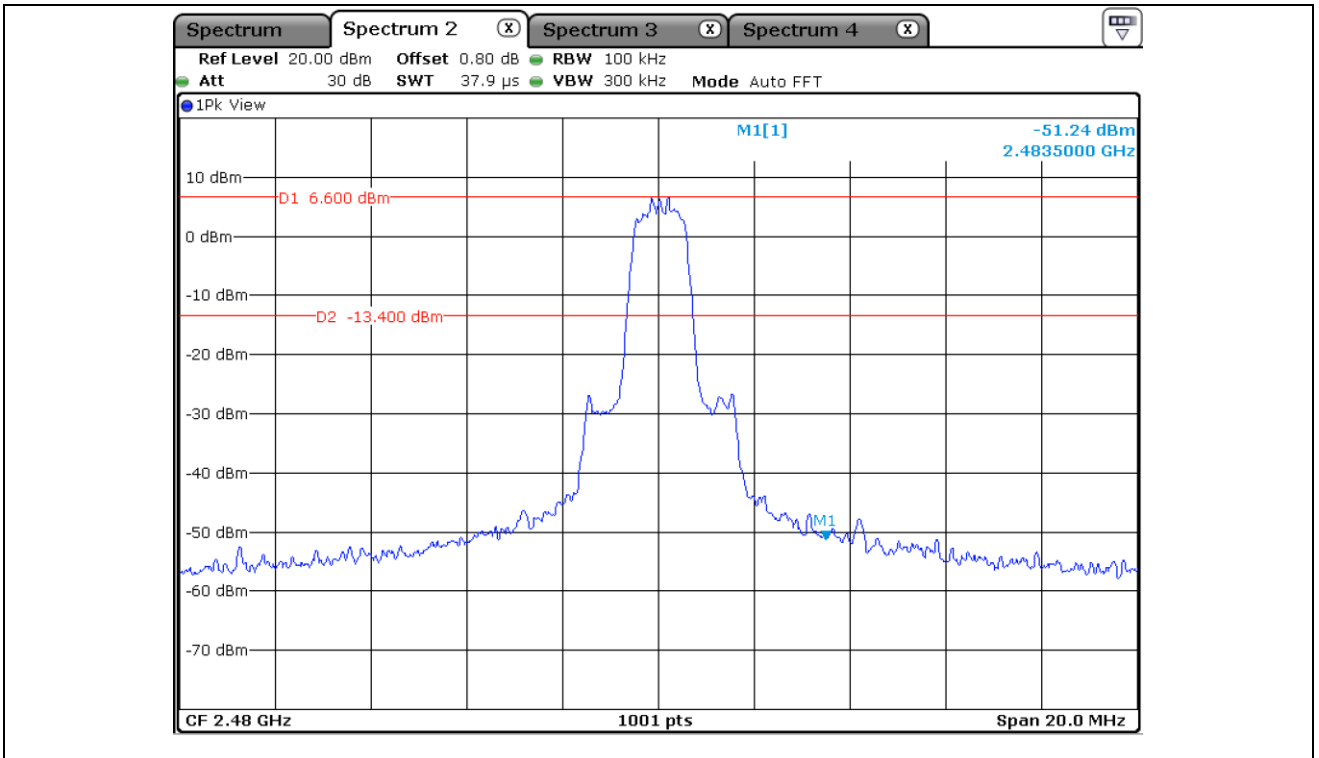

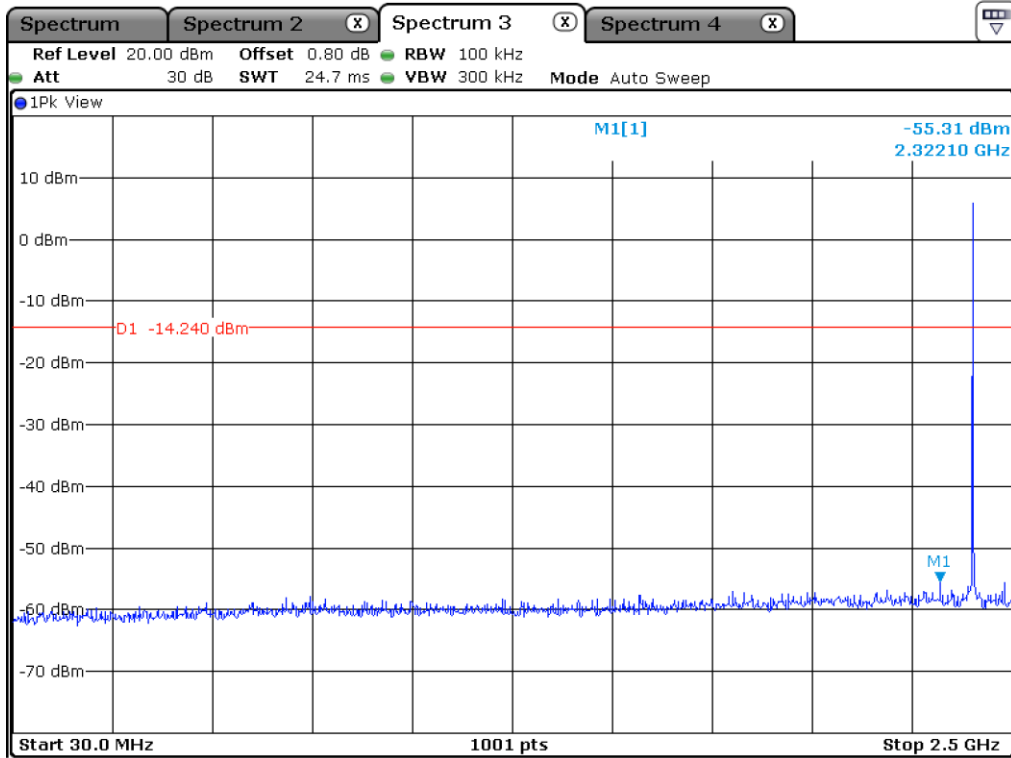

Low Channel

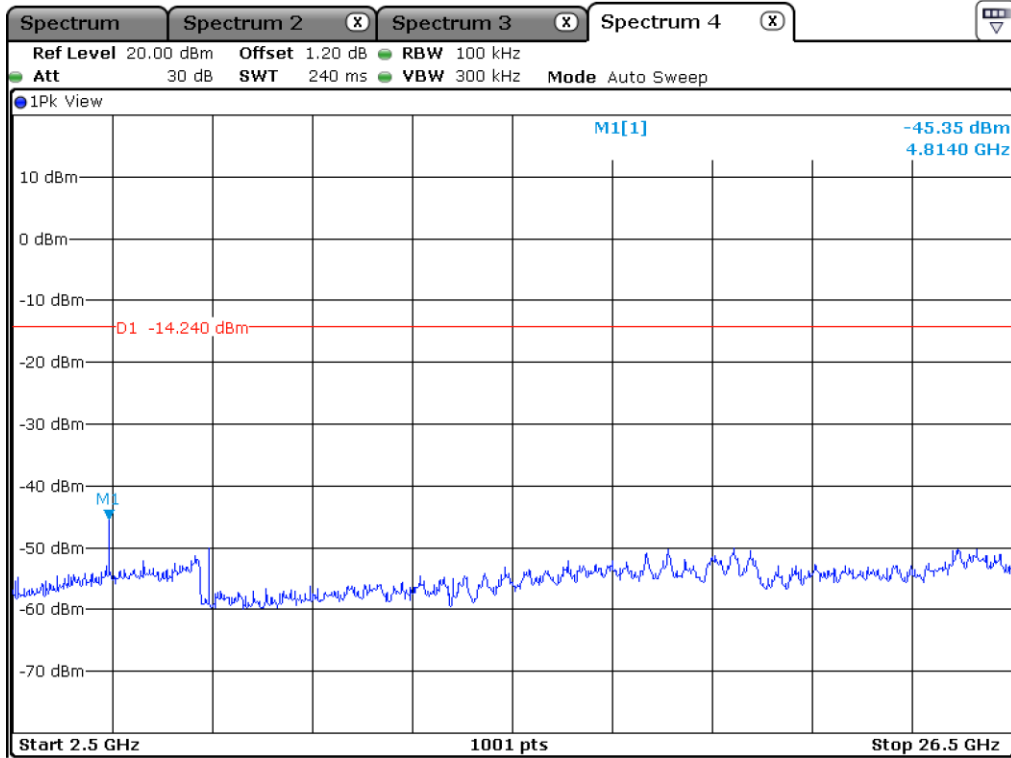


Low Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

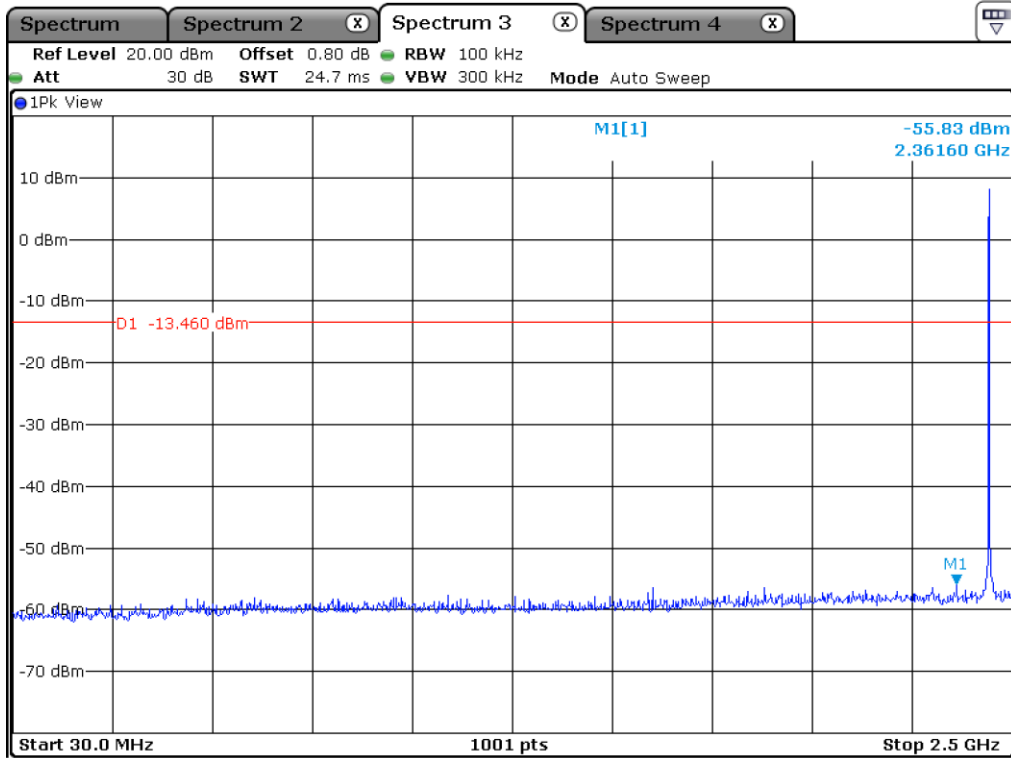

Middle Channel

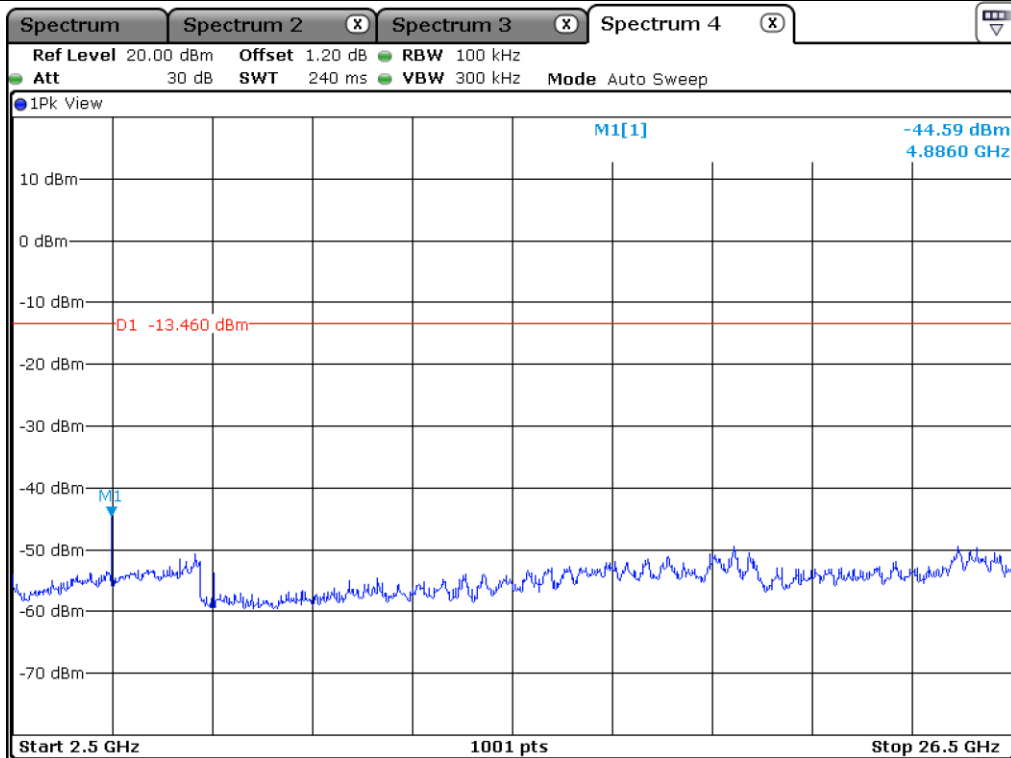


Middle Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

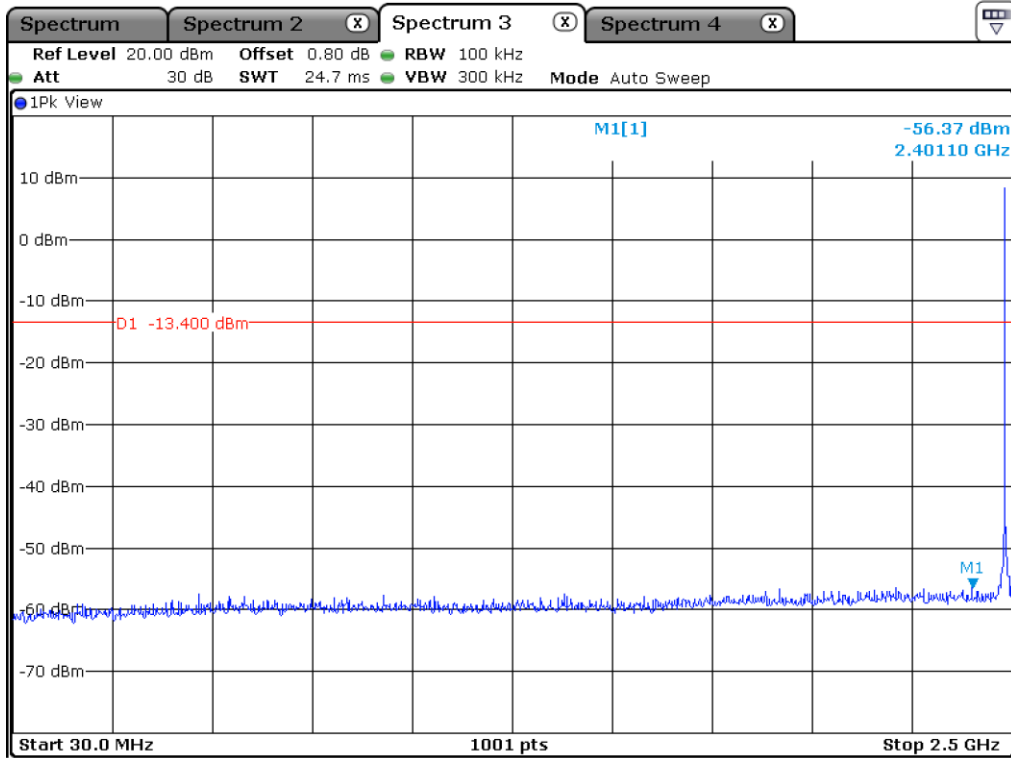

High Channel

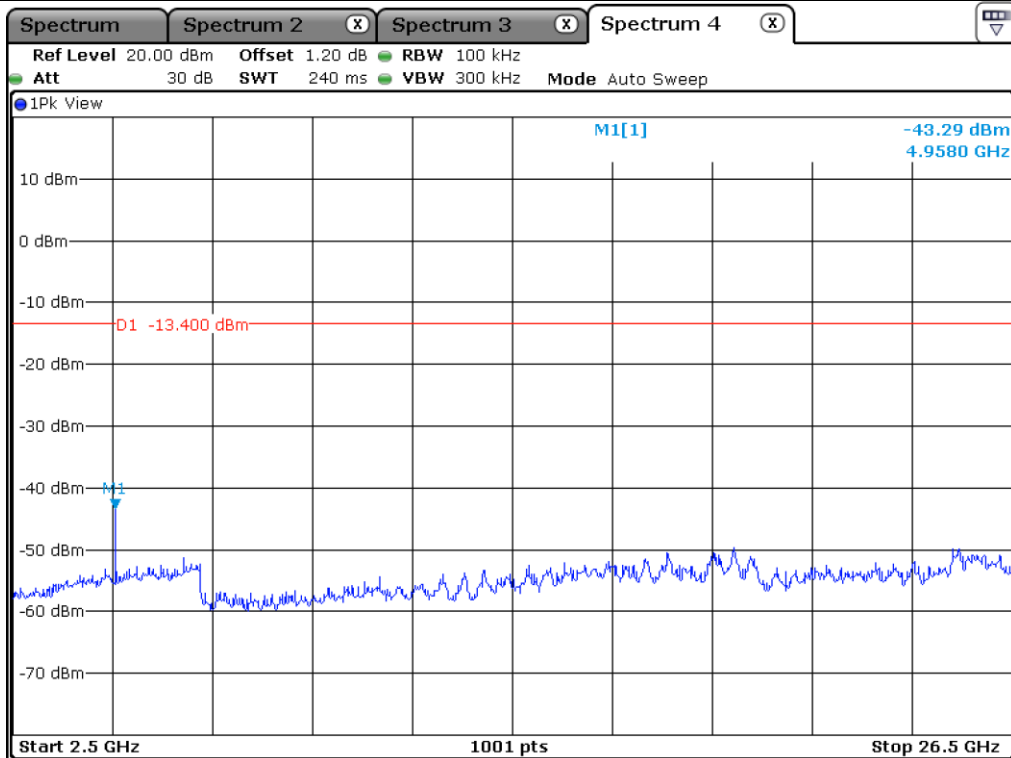


High Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

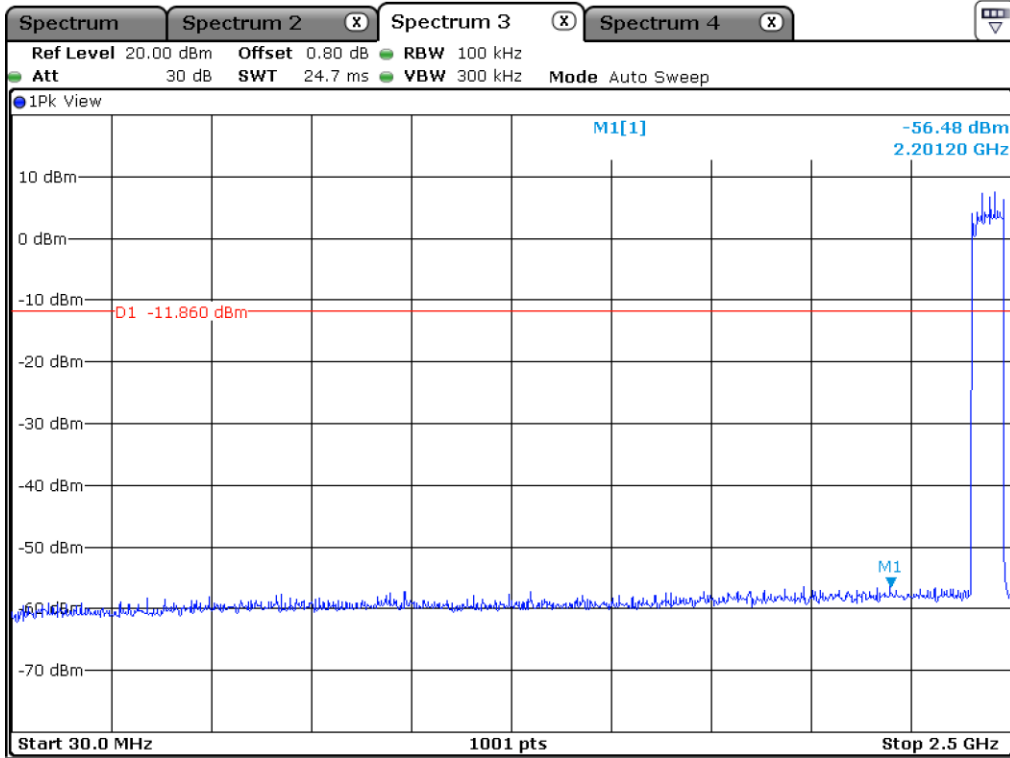

Hopping Mode

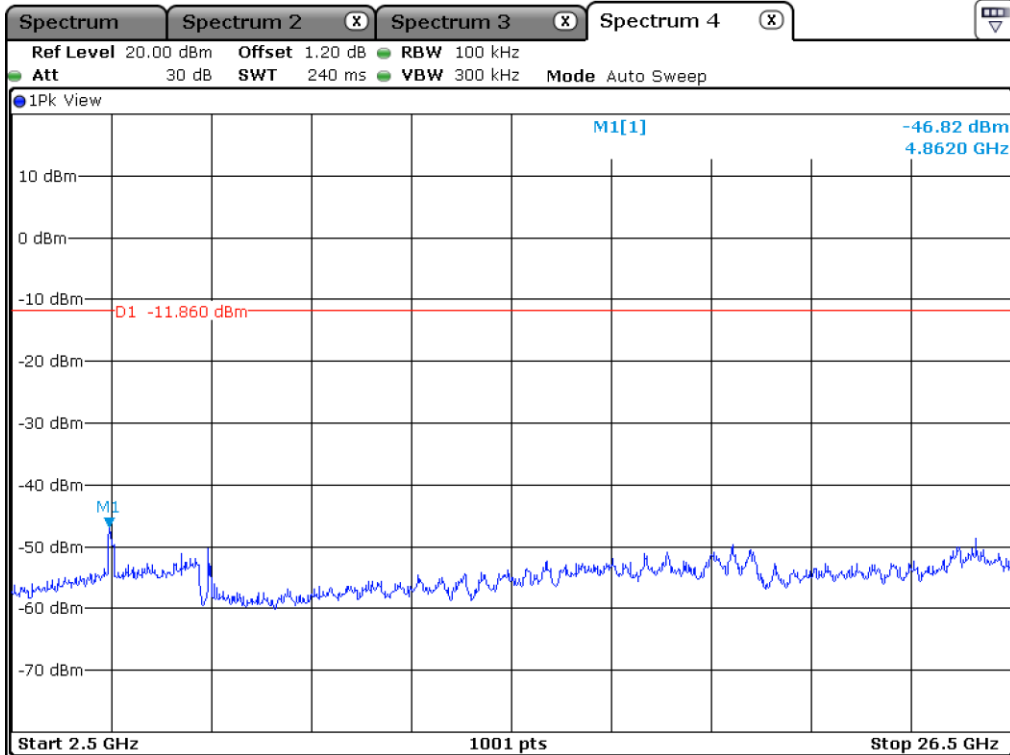


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

Hopping Mode

12.5.3 Test data for 3 Mbps

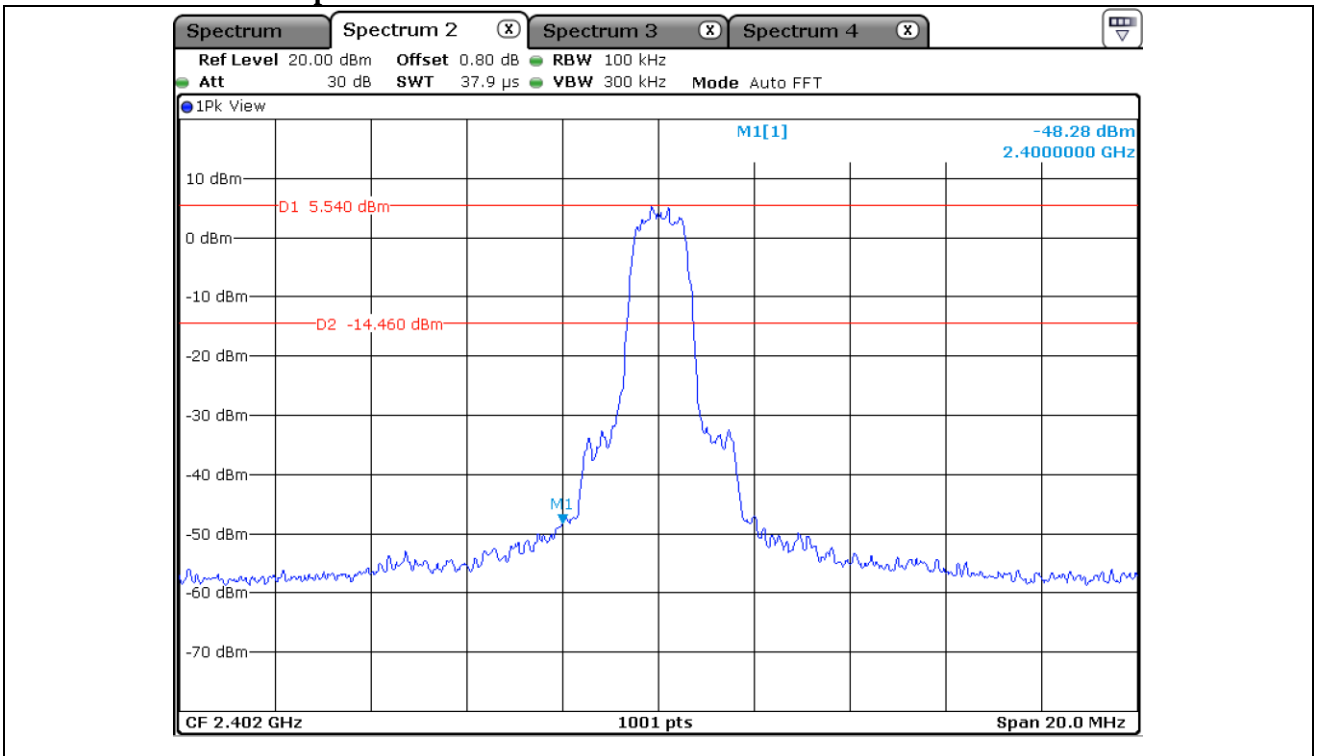

Low Channel


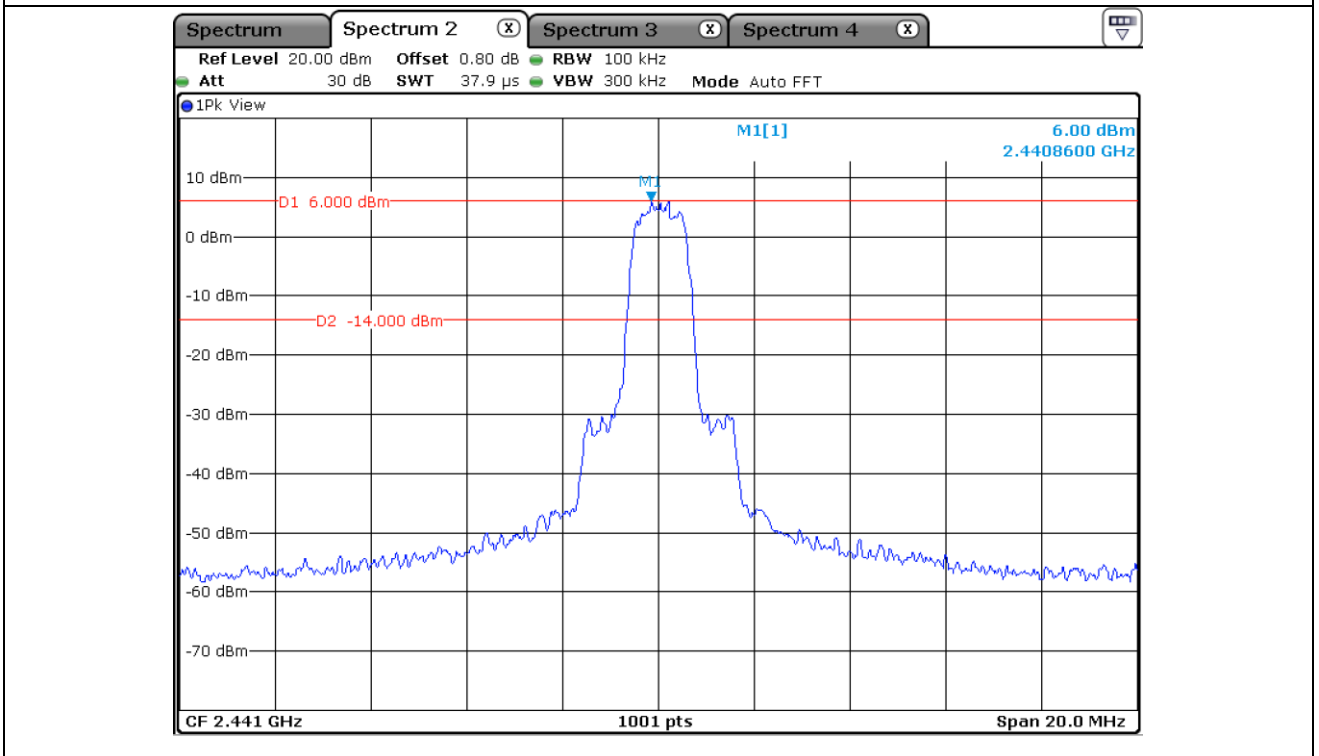



Middle Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

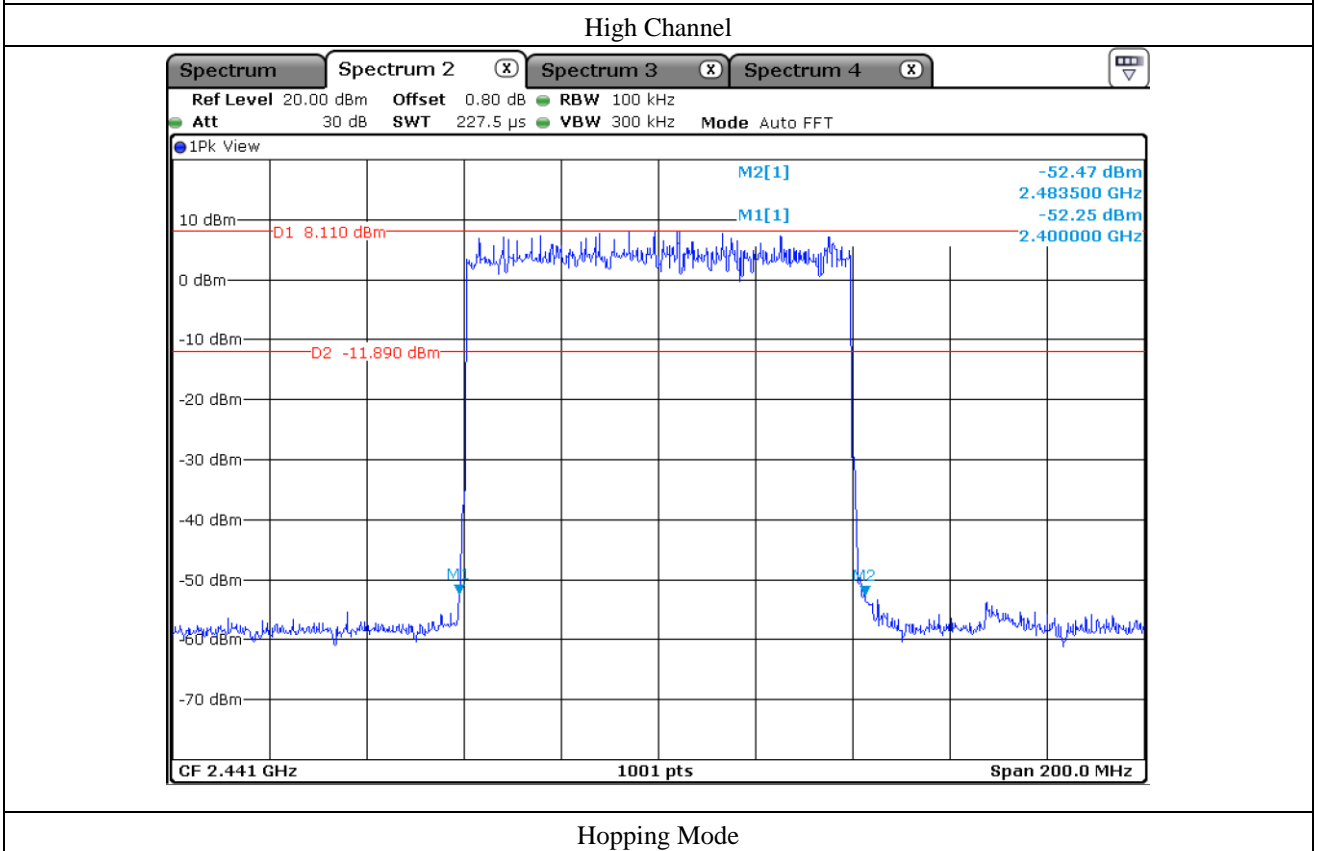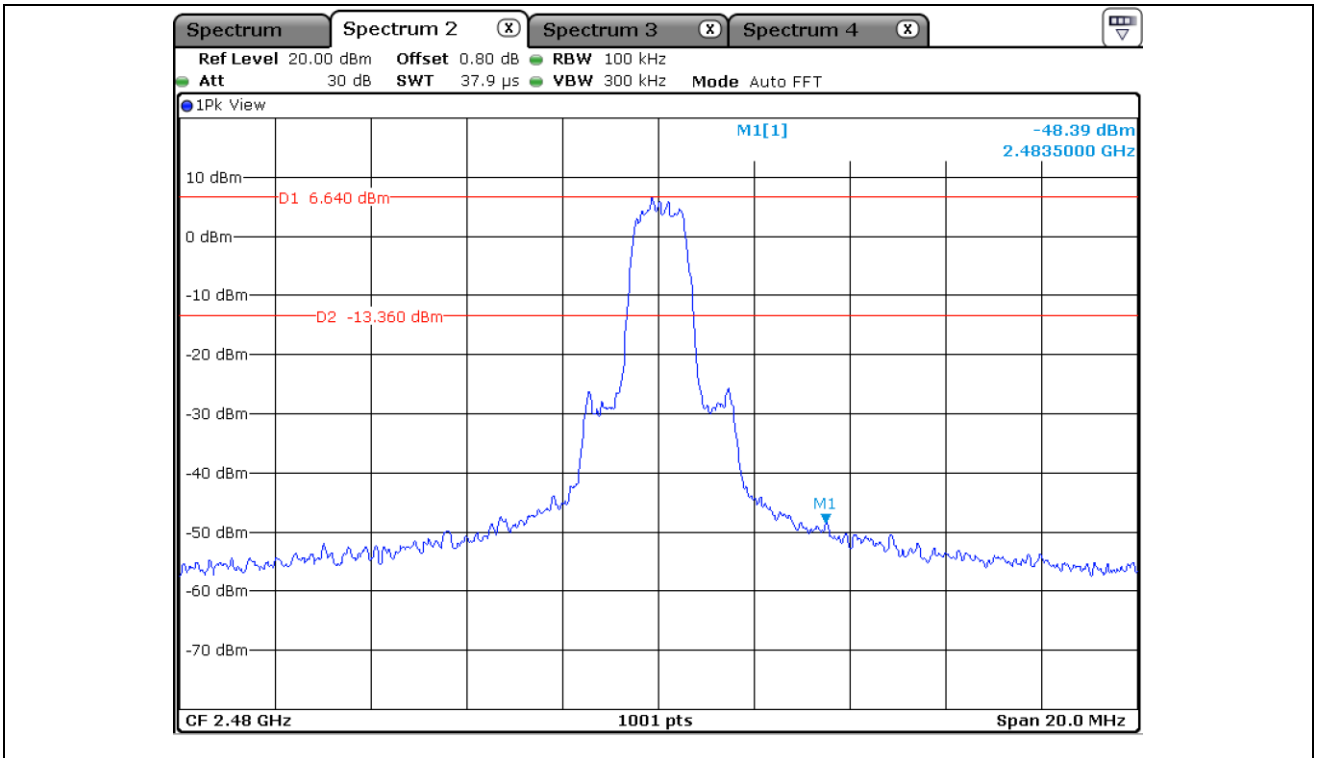

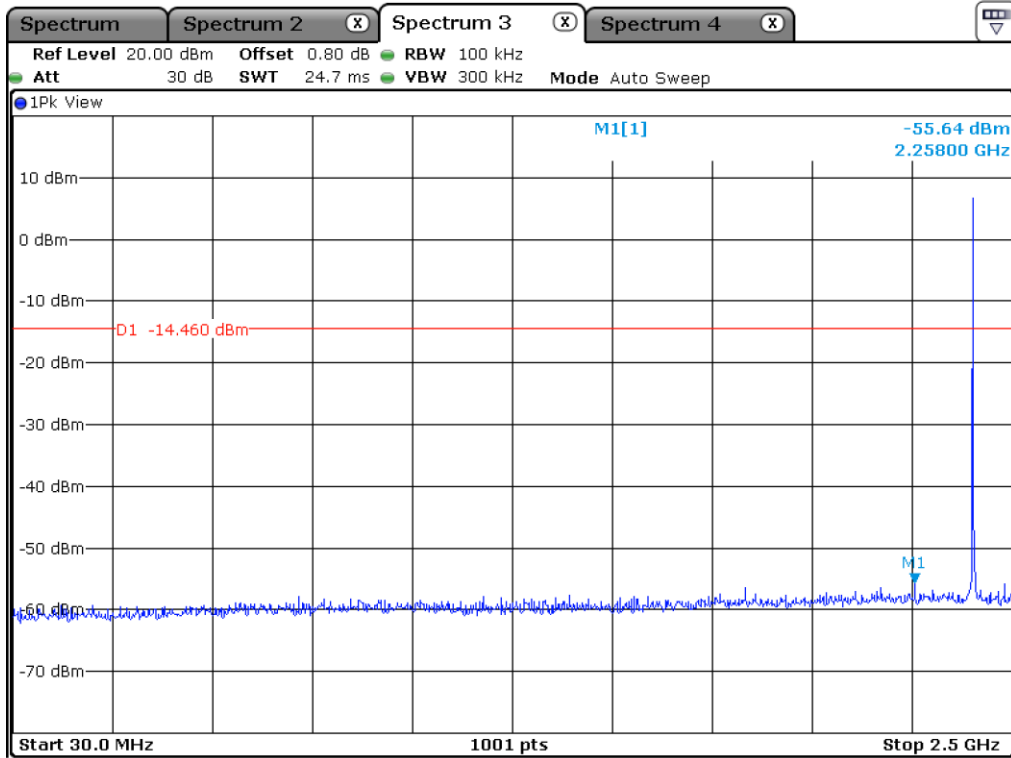

Low Channel

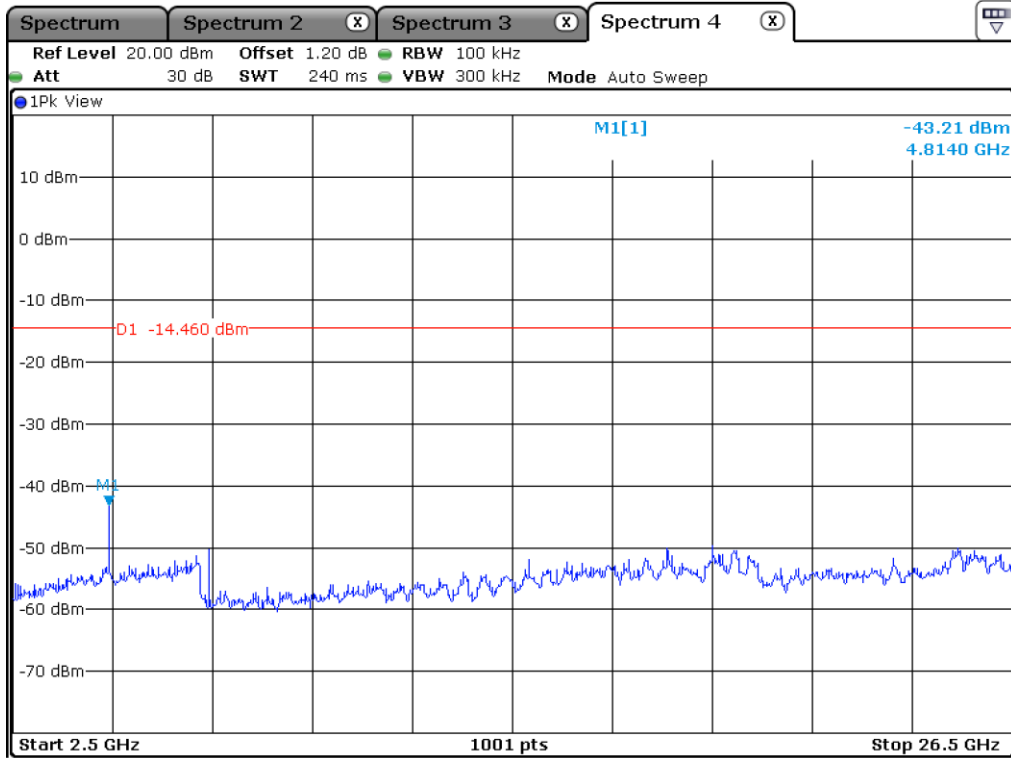


Low Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

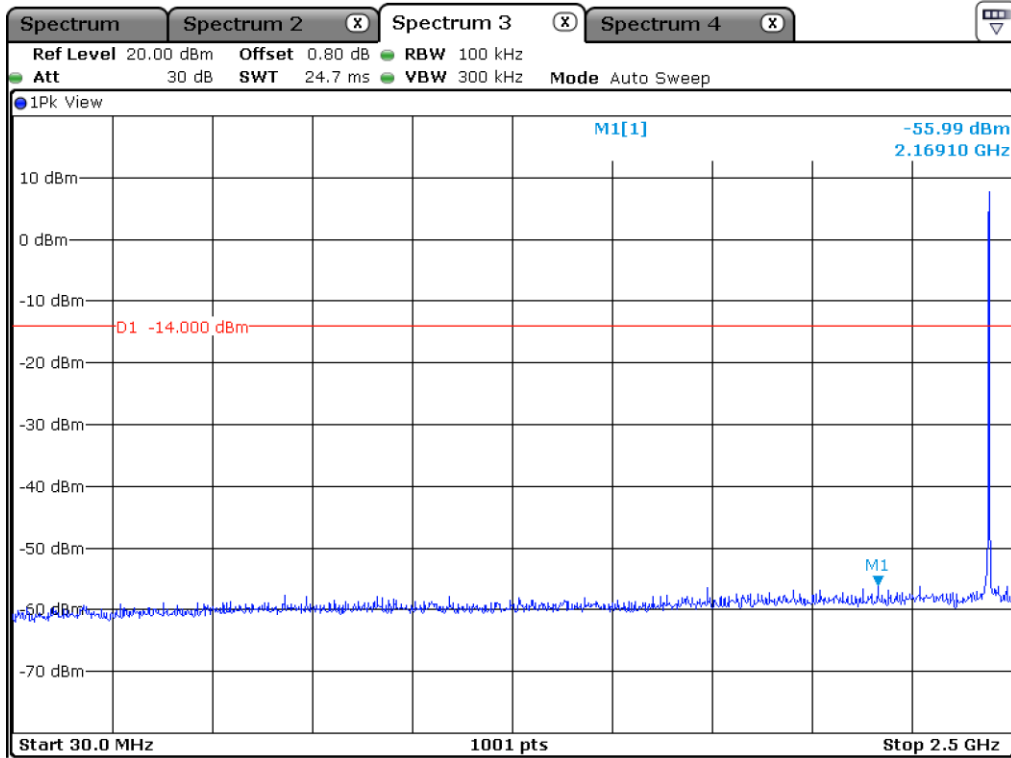

Middle Channel

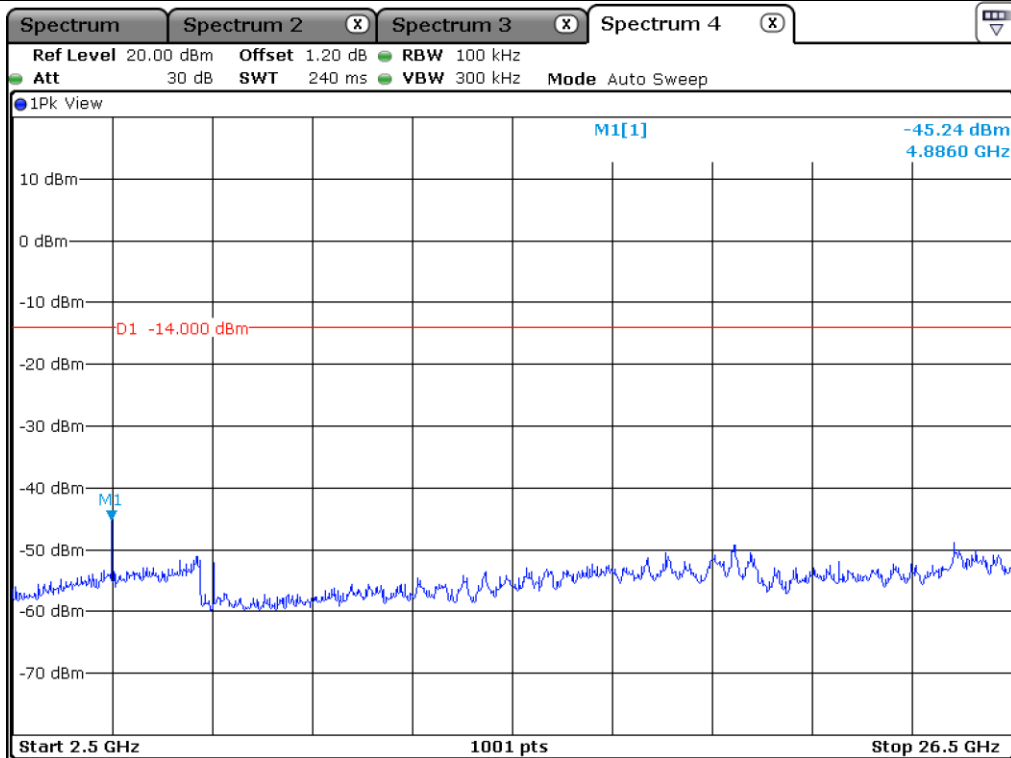


Middle Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

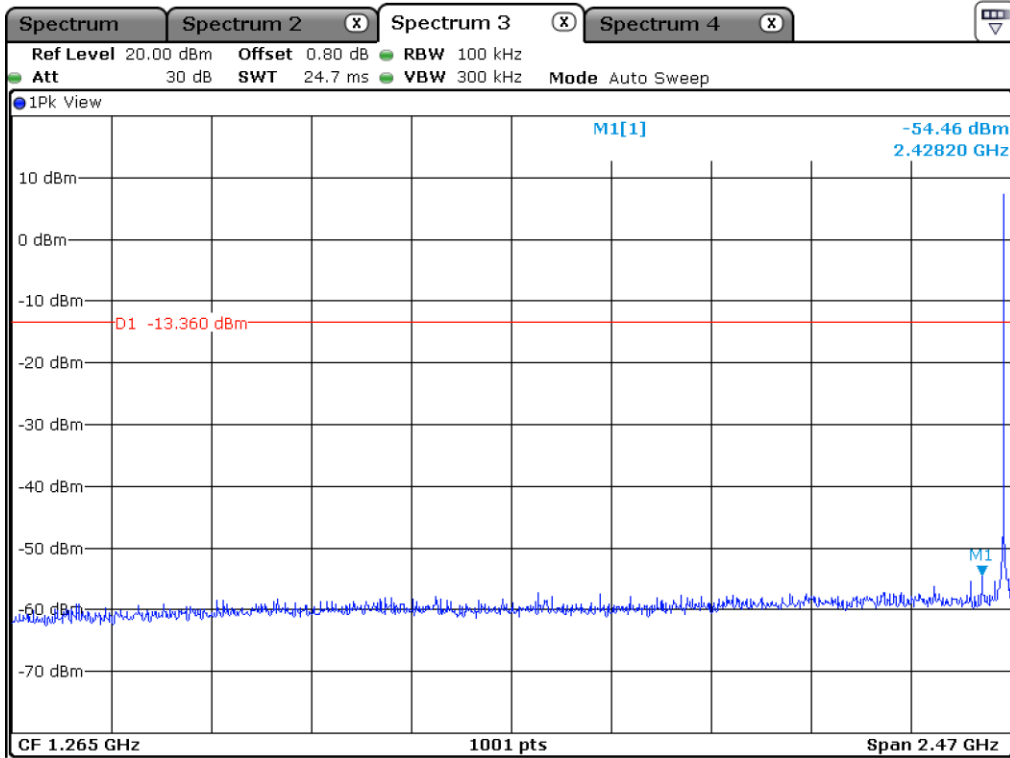

High Channel

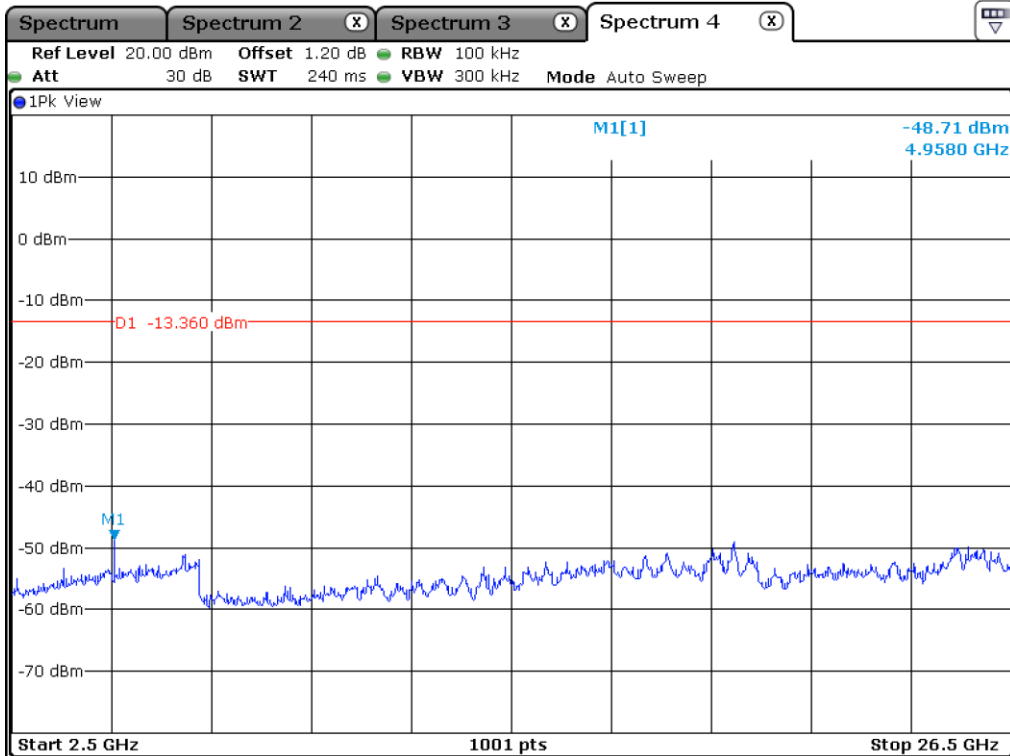


High Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

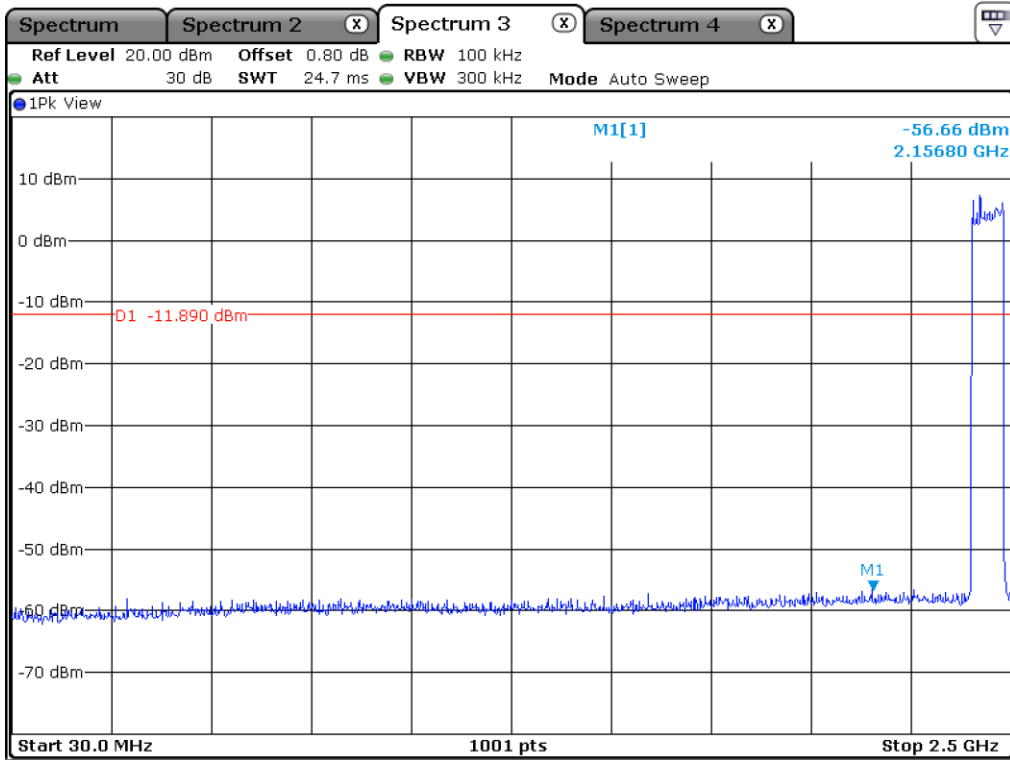

Hopping Mode

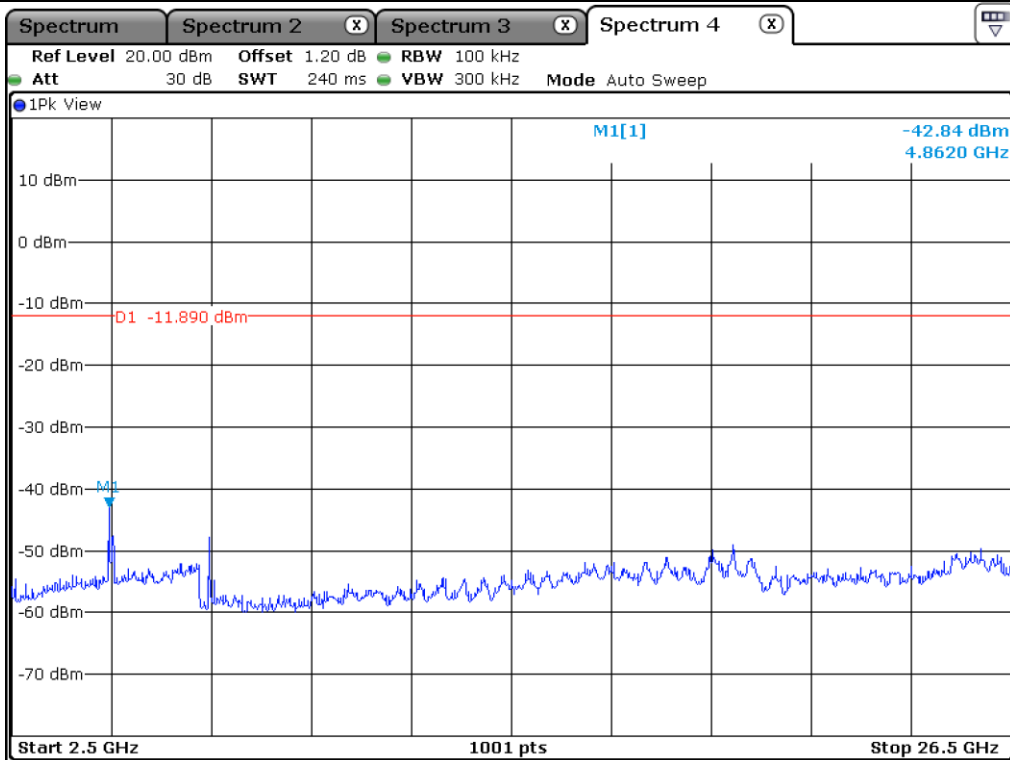

Hopping Mode

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.51 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 327.72	54.42	Peak	H	28.30	8.20	46.15	-	44.77	74.00	29.23
2 321.82	43.82	Average	H	28.30	8.20	46.15	1.11	35.28	54.00	18.72
2 341.15	53.80	Peak	V	28.30	8.20	46.15	-	44.15	74.00	29.85
2 322.00	43.63	Average	V	28.30	8.20	46.15	1.11	35.09	54.00	18.91
Test Data for High Channel										
2 484.04	55.34	Peak	H	28.70	8.33	46.06	-	46.31	74.00	27.69
2 483.50	45.19	Average	H	28.70	8.33	46.06	1.11	37.27	54.00	16.73
2 484.55	55.18	Peak	V	28.70	8.33	46.06	-	46.15	74.00	27.85
2 483.50	45.21	Average	V	28.70	8.33	46.06	1.11	37.29	54.00	16.71

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.1.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.11 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 385.74	53.34	Peak	H	28.30	8.20	46.15	-	43.69	74.00	30.31
2 336.47	43.84	Average	H	28.30	8.20	46.15	1.13	35.32	54.00	18.68
2 339.53	53.85	Peak	V	28.30	8.20	46.15	-	44.20	74.00	29.80
2 338.00	44.16	Average	V	28.30	8.20	46.15	1.13	35.64	54.00	18.36
Test Data for High Channel										
2 485.12	54.23	Peak	H	28.70	8.33	46.06	-	45.20	74.00	28.80
2 483.50	44.56	Average	H	28.70	8.33	46.06	1.13	36.66	54.00	17.34
2 486.03	54.07	Peak	V	28.70	8.33	46.06	-	45.04	74.00	28.96
2 483.50	44.44	Average	V	28.70	8.33	46.06	1.13	36.54	54.00	17.46

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.1.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 77.51 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 355.71	53.32	Peak	H	28.30	8.20	46.15	-	43.67	74.00	30.33
2 390.00	43.49	Average	H	28.30	8.20	46.15	1.11	34.95	54.00	19.05
2 325.86	53.70	Peak	V	28.30	8.20	46.15	-	44.05	74.00	29.95
2 336.29	43.85	Average	V	28.30	8.20	46.15	1.11	35.31	54.00	18.69
Test Data for High Channel										
2 483.78	53.39	Peak	H	28.70	8.33	46.06	-	44.36	74.00	29.64
2 483.50	44.38	Average	H	28.70	8.33	46.06	1.11	36.46	54.00	17.54
2 483.76	53.52	Peak	V	28.70	8.33	46.06	-	44.49	74.00	29.51
2 483.50	44.39	Average	V	28.70	8.33	46.06	1.11	36.47	54.00	17.53

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.51 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	52.37	Peak	H	33.40	11.21	45.73	-	51.25	74.00	22.75
4 804.00	43.43	Average	H	33.40	11.21	45.73	1.11	43.42	54.00	10.58
4 804.00	53.83	Peak	V	33.40	11.21	45.73	-	52.71	74.00	21.29
4 804.00	45.52	Average	V	33.40	11.21	45.73	1.11	45.51	54.00	8.49
Test Data for Middle Channel										
4 882.00	51.63	Peak	H	33.50	11.23	45.80	-	50.56	74.00	23.44
4 882.00	41.87	Average	H	33.50	11.23	45.80	1.11	41.91	54.00	12.09
4 882.00	52.95	Peak	V	33.50	11.23	45.80	-	51.88	74.00	22.12
4 882.00	43.90	Average	V	33.50	11.23	45.80	1.11	43.94	54.00	10.06
Test Data for High Channel										
4 960.00	50.49	Peak	H	33.40	11.31	45.89	-	49.31	74.00	24.69
4 960.00	40.62	Average	H	33.40	11.31	45.89	1.11	40.55	54.00	13.45
4 960.00	51.54	Peak	V	33.40	11.31	45.89	-	50.36	74.00	23.64
4 960.00	42.28	Average	V	33.40	11.31	45.89	1.11	42.21	54.00	11.79

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.2.2 Test data for 2 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.11 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	52.04	Peak	H	33.40	11.21	45.73	-	50.92	74.00	23.08
4 804.00	41.90	Average	H	33.40	11.21	45.73	1.13	41.91	54.00	12.09
4 804.00	53.11	Peak	V	33.40	11.21	45.73	-	51.99	74.00	22.01
4 804.00	43.02	Average	V	33.40	11.21	45.73	1.13	43.03	54.00	10.97
Test Data for Middle Channel										
4 882.00	51.26	Peak	H	33.50	11.23	45.80	-	50.19	74.00	23.81
4 882.00	41.37	Average	H	33.50	11.23	45.80	1.13	41.43	54.00	12.57
4 882.00	52.26	Peak	V	33.50	11.23	45.80	-	51.19	74.00	22.81
4 882.00	42.31	Average	V	33.50	11.23	45.80	1.13	42.37	54.00	11.63
Test Data for High Channel										
4 960.00	50.82	Peak	H	33.40	11.31	45.89	-	49.64	74.00	24.36
4 960.00	40.39	Average	H	33.40	11.31	45.89	1.13	40.34	54.00	13.66
4 960.00	51.34	Peak	V	33.40	11.31	45.89	-	50.16	74.00	23.84
4 960.00	41.25	Average	V	33.40	11.31	45.89	1.13	41.20	54.00	12.80

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

12.6.2.3 Test data for 3 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 77.51 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	52.08	Peak	H	33.40	11.21	45.73	-	50.96	74.00	23.04
4 804.00	42.04	Average	H	33.40	11.21	45.73	1.11	42.03	54.00	11.97
4 804.00	53.08	Peak	V	33.40	11.21	45.73	-	51.96	74.00	22.04
4 804.00	43.13	Average	V	33.40	11.21	45.73	1.11	43.12	54.00	10.88
Test Data for Middle Channel										
4 882.00	51.37	Peak	H	33.50	11.23	45.80	-	50.30	74.00	23.70
4 882.00	41.49	Average	H	33.50	11.23	45.80	1.11	41.53	54.00	12.47
4 882.00	52.40	Peak	V	33.50	11.23	45.80	-	51.33	74.00	22.67
4 882.00	42.42	Average	V	33.50	11.23	45.80	1.11	42.46	54.00	11.54
Test Data for High Channel										
4 960.00	50.91	Peak	H	33.40	11.31	45.89	-	49.73	74.00	24.27
4 960.00	40.56	Average	H	33.40	11.31	45.89	1.11	40.49	54.00	13.51
4 960.00	51.62	Peak	V	33.40	11.31	45.89	-	50.44	74.00	23.56
4 960.00	41.27	Average	V	33.40	11.31	45.89	1.11	41.20	54.00	12.80

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Duty Factor}$$

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


13.3 Test Date

May 24, 2021 ~ June 04, 2021

13.4 Test data

13.4.1 Test data for 30 MHz ~ 1000 MHz

- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

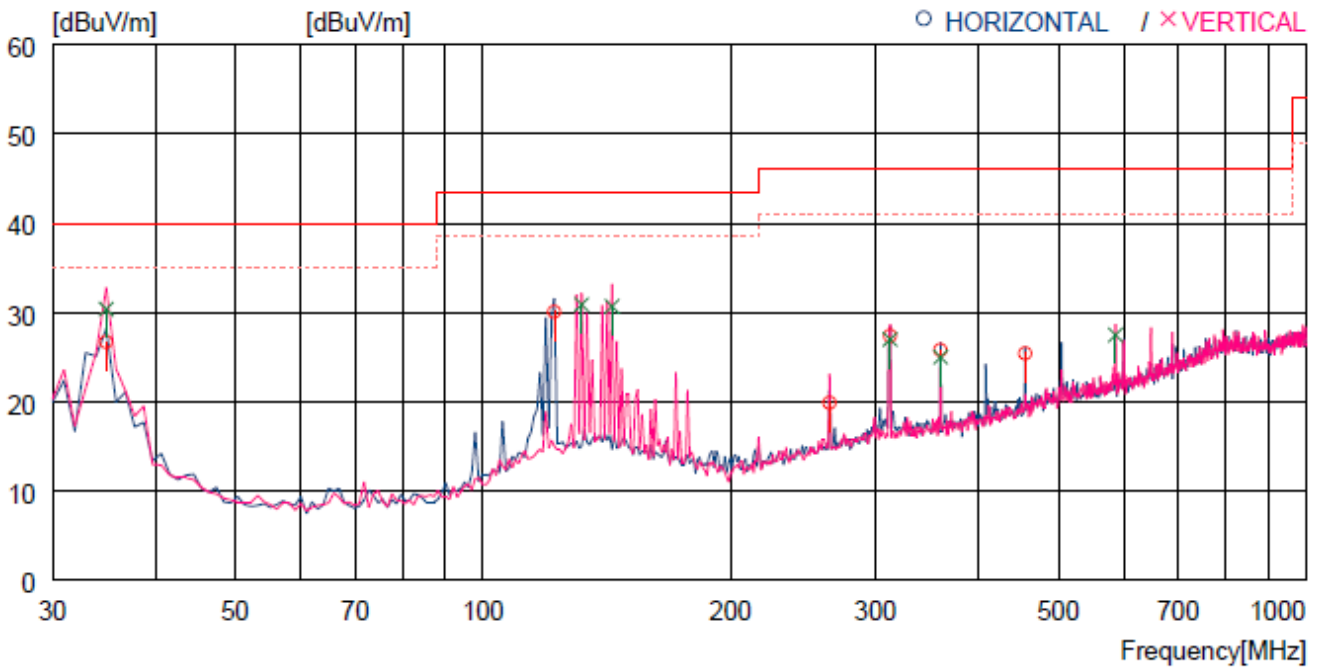

No.	FREQ [MHz]	READING [dBuV]	ANT [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
--- Horizontal ---										
1	34.850	38.9	19.2	0.6	32.0	26.7	40.0	13.3	100	359
2	122.150	42.1	18.7	1.3	32.0	30.1	43.5	13.4	400	0
3	263.770	31.8	18.2	1.9	32.0	19.9	46.0	26.1	200	264
4	312.270	37.9	19.4	2.1	32.0	27.4	46.0	18.6	100	359
5	359.800	35.6	20.1	2.2	32.1	25.8	46.0	20.2	100	359
6	455.831	33.0	22.0	2.6	32.2	25.4	46.0	20.6	100	359
--- Vertical ---										
7	34.850	42.6	19.2	0.6	32.0	30.4	40.0	9.6	100	215
8	131.850	42.5	19.1	1.3	32.0	30.9	43.5	12.6	400	359
9	143.490	42.1	19.2	1.4	32.0	30.7	43.5	12.8	300	0
10	312.270	37.5	19.4	2.1	32.0	27.0	46.0	19.0	200	49
11	359.800	34.8	20.1	2.2	32.1	25.0	46.0	21.0	200	359
12	586.778	32.9	24.1	2.9	32.4	27.5	46.0	18.5	200	359

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

13.4.2 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

13.4.3 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.								

14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

14.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

14.3 Test Date

May 24, 2021 ~ June 04, 2021

14.4 Test data for Bluetooth

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : LIVE LINE

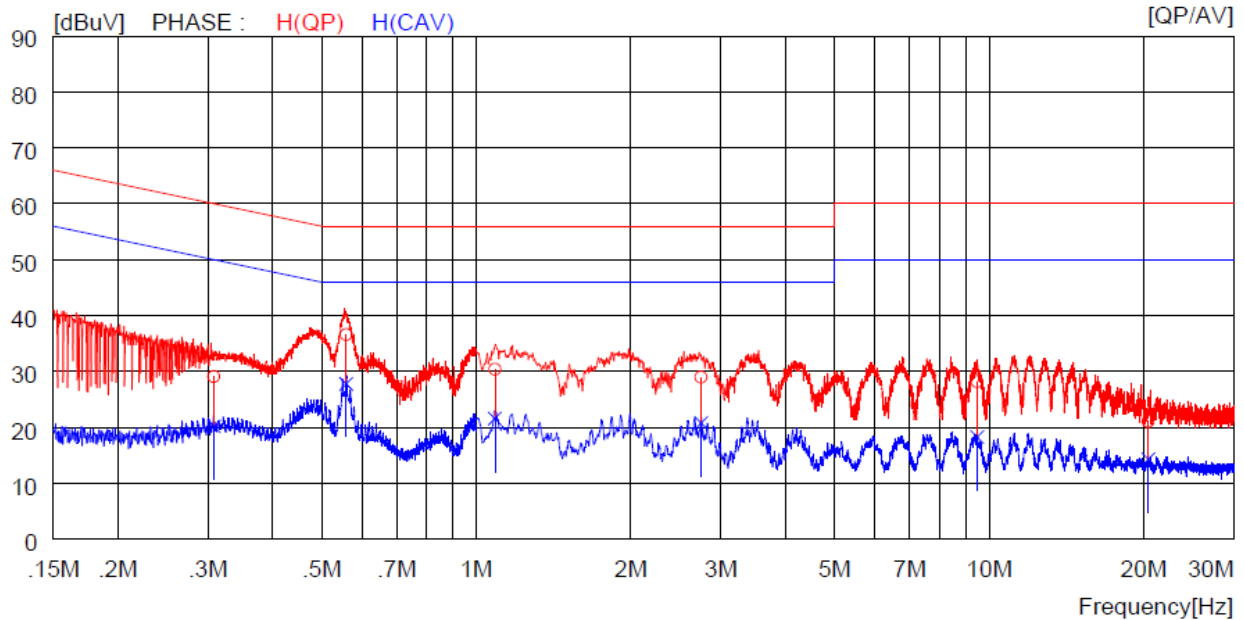


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.30800	19.1	----	10.0	29.1	----	60.0	----	30.9	----	H (QP)
2	0.55800	26.6	----	10.0	36.6	----	56.0	----	19.4	----	H (QP)
3	1.08800	20.3	----	10.1	30.4	----	56.0	----	25.6	----	H (QP)
4	2.74400	18.9	----	10.1	29.0	----	56.0	----	27.0	----	H (QP)
5	9.47500	18.0	----	10.2	28.2	----	60.0	----	31.8	----	H (QP)
6	20.44000	10.7	----	10.4	21.1	----	60.0	----	38.9	----	H (QP)
7	0.30800	----	10.2	10.0	----	20.2	----	50.0	----	29.8	H (CAV)
8	0.55800	----	17.8	10.0	----	27.8	----	46.0	----	18.2	H (CAV)
9	1.08800	----	11.5	10.1	----	21.6	----	46.0	----	24.4	H (CAV)
10	2.74400	----	10.7	10.1	----	20.8	----	46.0	----	25.2	H (CAV)
11	9.47500	----	8.1	10.2	----	18.3	----	50.0	----	31.7	H (CAV)
12	20.44000	----	3.9	10.4	----	14.3	----	50.0	----	35.7	H (CAV)

-. Tested Line : NEUTRAL LINE

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

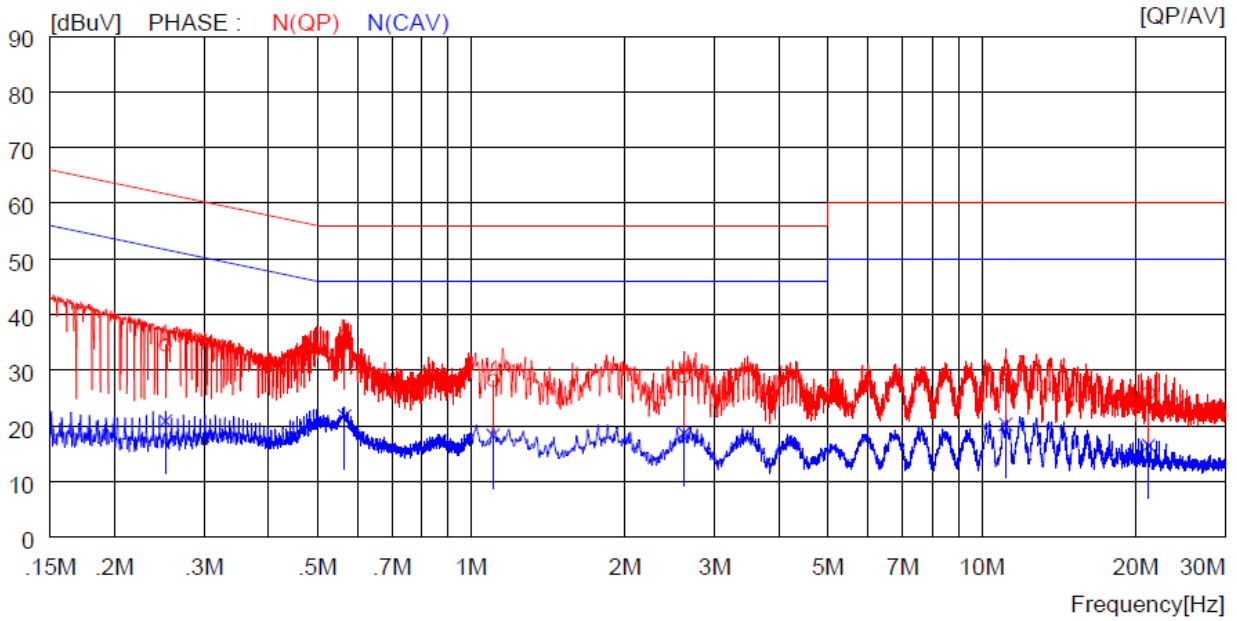

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.25200	24.5	----	10.0	34.5	----	61.7	----	27.2	----	N (QP)
2	0.56500	26.2	----	10.0	36.2	----	56.0	----	19.8	----	N (QP)
3	1.10400	18.1	----	10.1	28.2	----	56.0	----	27.8	----	N (QP)
4	2.61200	18.8	----	10.1	28.9	----	56.0	----	27.1	----	N (QP)
5	11.14000	19.2	----	10.2	29.4	----	60.0	----	30.6	----	N (QP)
6	21.21000	15.5	----	10.4	25.9	----	60.0	----	34.1	----	N (QP)
7	0.25200	----	10.9	10.0	----	20.9	----	51.7	----	30.8	N (CAV)
8	0.56500	----	11.8	10.0	----	21.8	----	46.0	----	24.2	N (CAV)
9	1.10400	----	8.2	10.1	----	18.3	----	46.0	----	27.7	N (CAV)
10	2.61200	----	8.6	10.1	----	18.7	----	46.0	----	27.3	N (CAV)
11	11.14000	----	10.1	10.2	----	20.3	----	50.0	----	29.7	N (CAV)
12	21.21000	----	6.1	10.4	----	16.5	----	50.0	----	33.5	N (CAV)

15. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101457	Apr. 16, 2021 (1Y)
ESR7	Rohde & Schwarz	EMI Test Receiver	102190	Oct. 14, 2020 (1Y)
310N	Sonoma Instrument	AMPLIFIER	392756	Oct. 16, 2020 (1Y)
PAM-840A	Com-Power	Pre-Amplifer	461339	Oct. 16, 2020 (1Y)
PAM-118A	Com-Power	Pre-Amplifer	18040081	Oct. 12, 2020 (1Y)
DT2000-2t	Innco Systems GmbH	Turn Table	N/A	N/A
CO3000	Innco Systems GmbH	Controller	1026/40960617/P	N/A
MA-4640-XPET	Innco Systems GmbH	Antenna Master	MA4640/652/43100318/P	N/A
HLP-2008	TDK RF Solutions	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021(1Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020(2Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter (1-3 GHz)	N/A	Feb. 08, 2021 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC POWER SUPPLY	5071069	Jan. 06, 2021 (1Y)
NSLK8128	Schwarzbeck	V-LISN(4*16/25A)	8126404	Mar. 16, 2021(1Y)
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	100655	Mar. 15, 2021 (1Y)
ESCI	Rohde & Schwarz	Test Receiver	101012	Oct 20, 2021 (1Y)