



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com>



MEASUREMENT REPORT

FCC Part 22, 24, & 27 / IC RSS-132/RSS-133/RSS-139

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.
10101 Old Grove Road,
San Diego, CA 92131
USA

Date of Testing:

4/17/2012 - 4/26/2012

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1204090432.ZNF

FCC ID:

ZNFUN272

APPLICANT:

**LG ELECTRONICS MOBILECOMM U.S.A.,
INC.**

Application Type:

Certification

Model(s):

UN272, LG-UN272, LGUN272

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

§2; §22(H), §24(E), §27(C)

Test Procedure(s):

ANSI/TIA-603-C-2004

Test Device Serial No.:


identical prototype [S/N: RF #1, RF #2]

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Maximum Power (Watts)	Maximum Power (dBm)
CDMA850	824.70 - 848.31	1M27F9W	0.270	24.32
CDMA1700	1711.25 - 1753.75	1M27F9W	0.533	27.27
CDMA1900	1851.25 - 1908.75	1M27F9W	0.250	23.98

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortañez
President








FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 1 of 49

TABLE OF CONTENTS

FCC PART 22, 24 & 27 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES.....	5
2.3 TEST CONFIGURATION.....	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.5 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS	6
3.1 EVALUATION PROCEDURE	6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....	6
3.4 AWS - BASE FREQUENCY BLOCKS	7
3.5 AWS - MOBILE FREQUENCY BLOCKS	7
3.6 PCS - BASE FREQUENCY BLOCKS.....	7
3.7 PCS - MOBILE FREQUENCY BLOCKS.....	8
3.8 OCCUPIED BANDWIDTH EMISSION LIMITS	8
3.9 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	8
3.10 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	9
3.11 PEAK-AVERAGE RATIO.....	10
3.12 FREQUENCY STABILITY / TEMPERATURE VARIATION	10
4.0 TEST EQUIPMENT CALIBRATION DATA	11
5.0 SAMPLE CALCULATIONS	12
6.0 TEST RESULTS.....	13
6.1 SUMMARY.....	13
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA	14
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	14
6.4 CELLULAR CDMA RADIATED MEASUREMENTS.....	15
6.5 AWS CDMA RADIATED MEASUREMENTS	18
6.6 PCS CDMA RADIATED MEASUREMENTS.....	21
6.7 CELLULAR CDMA FREQUENCY STABILITY MEASUREMENTS	24
6.8 AWS CDMA FREQUENCY STABILITY MEASUREMENTS.....	26
6.9 PCS CDMA FREQUENCY STABILITY MEASUREMENTS.....	28
6.10 RECEIVER SPURIOUS EMISSIONS	30
7.0 PLOT(S) OF EMISSIONS	31
8.0 CONCLUSION.....	49

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 2 of 49



MEASUREMENT REPORT

FCC Part 22, 24, & 27




§2.1033 General Information



APPLICANT: LG Electronics MobileComm U.S.A., Inc.
APPLICANT ADDRESS: 10101 Old Grove Road,
 San Diego, CA 92131
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E), §27(C)(L)
IC SPECIFICATION(S): RSS-132 Issue 2; RSS-133 Issue 5; RSS-139 Issue 2
BASE MODEL: UN272, LG-UN272, LGUN272
FCC ID: ZNFUN272
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: Cell, PCS, AWS
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: RF #1, RF #2 ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: 4/17/2012 - 4/26/2012
TEST REPORT S/N: 0Y1204090432.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 3 of 49

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 10, 2012.

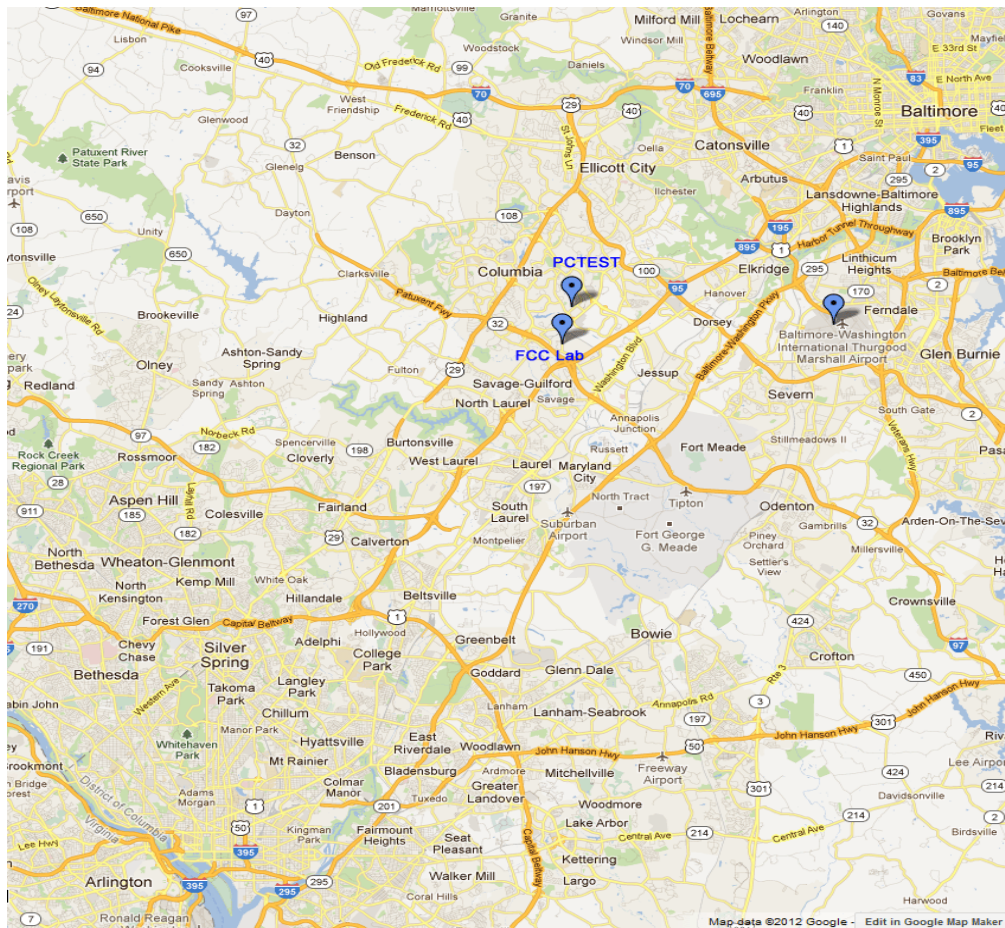


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 4 of 49

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFUN272**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900/1700 CDMA (BC0, BC1, BC15), Bluetooth (1x,EDR)

2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFUN272 was tested per the guidance of ANSI/TIA-603-C-2004. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 5 of 49


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-C-2004) was used in the measurement of the measurement of the **LG Portable Handset FCC ID: ZNFUN272**.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

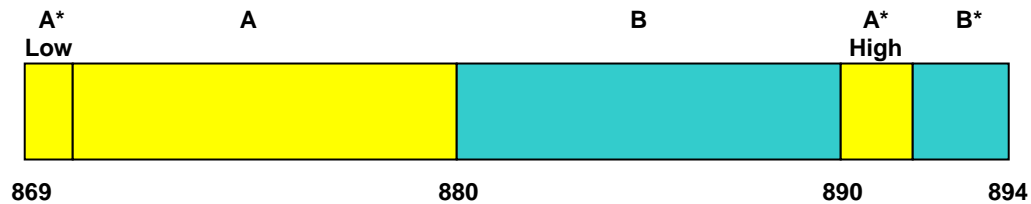


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

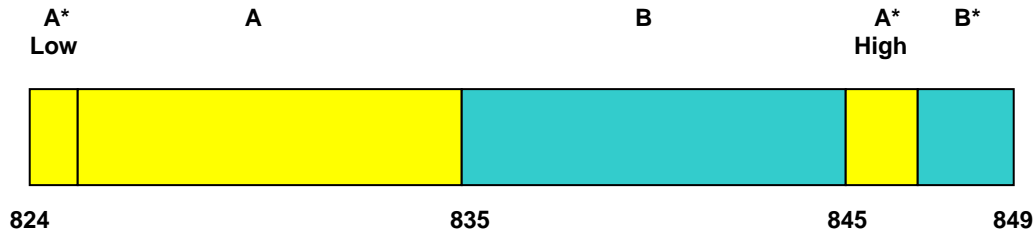

BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)


BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 6 of 49

3.4 AWS - Base Frequency Blocks

§27.5(h)

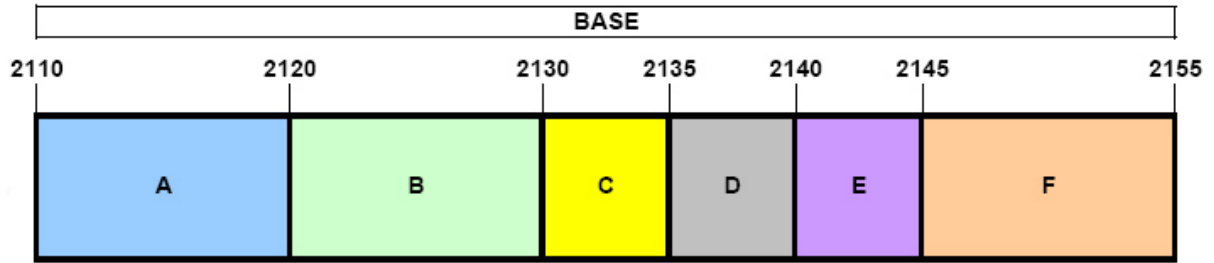

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)

BLOCK 2: 2120 – 2130 MHz (B)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (E)

3.5 AWS - Mobile Frequency Blocks

§27.5(h)

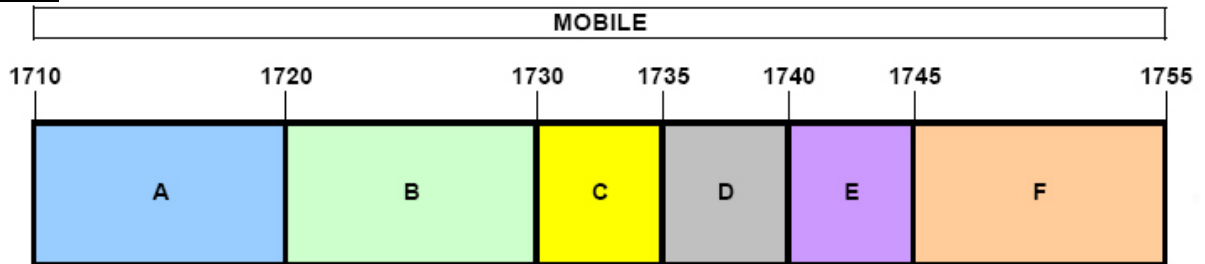

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)


BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

3.6 PCS - Base Frequency Blocks

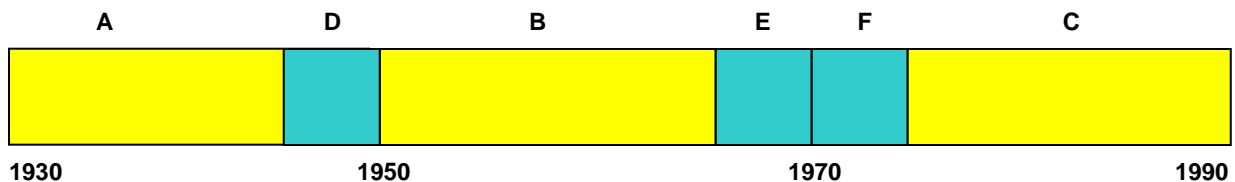

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 7 of 49

3.7 PCS - Mobile Frequency Blocks

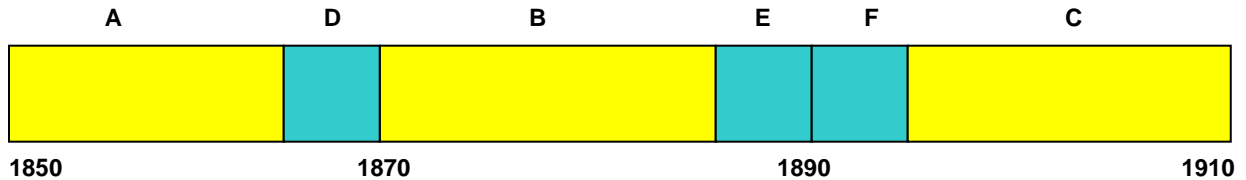

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.8 Occupied Bandwidth Emission Limits



§2.1049, 22.917(a)(b), 24.238(a)(b), §27.53(h)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

3.9 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a), §27.53(h)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 8 of 49

3.10 Radiated Power and Radiated Spurious Emissions

§2.1053, 22.917(a), 22., 24.232(c), 24.238(a), §27.53(h)

Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized. The level of the maximized emission is recorded with the spectrum analyzer using a peak detector with RBW = 1MHz, VBW = 3MHz for emissions greater than 1GHz. For emissions below 1GHz, the spectrum analyzer is set to RBW = 100kHz and VBW = 300kHz.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 22.917(a) and 24.238(a).

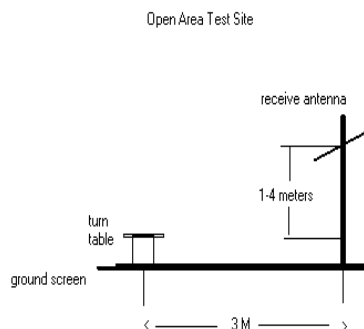


Figure 3-1. Diagram of 3-meter outdoor test range

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 9 of 49

3.11 Peak-Average Ratio

§24.232(d), §27.50(d)(5)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

3.12 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235, §27.54



Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.



FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 10 of 49

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/7/2011	Annual	6/7/2012	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/15/2012	Annual	2/15/2013	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2011	Annual	10/10/2012	3613A00315
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	E5515C	Wireless Communications Test Set	2/12/2012	Annual	2/12/2013	GB45360985
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	8/5/2012	MY51210133
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	MA2411B	Pulse Sensor	10/13/2011	Annual	10/13/2012	1027293
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Mini-Circuits	VHF-1300+	High Pass Filter	2/7/2012	Annual	2/7/2013	30716
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Pasternack	PE2208-6	Bidirectional Coupler	6/3/2011	Annual	6/3/2012	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	4/19/2011	Annual	4/19/2012	107826
Rohde & Schwarz	CMU200	Base Station Simulator	6/1/2011	Annual	6/1/2012	833855/0010
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/17/2011	Biennial	6/17/2013	A042511

Table 4-1. Test Equipment

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 11 of 49

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation



9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 12 of 49

6.0 TEST RESULTS

6.1 Summary



Company Name: LG Electronics MobileComm U.S.A., Inc.
 FCC ID: ZNFUN272
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): Cell, PCS, AWS

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
2.1049, 22.917(a), 24.238(a), 27.53(g)(1)	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a), 27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Band Edge / Conducted Spurious Emissions	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d), 27.50(d)(5)	RSS-133 (6.4) RSS-139 (6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1) RSS-139 (4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c), 27.50(d)(4)	RSS-133 (6.4) [SRSP-510 (5.1.2)] RSS-139 (6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP (PCS) < 1 Watt max. EIRP (AWS)		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a), 27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Undesirable Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Sections 6.4, 6.5, 6.6
2.1055, 22.355, 24.235, 27.54	RSS-132 (4.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Sections 6.7, 6.8, 6.9
RECEIVER MODE (RX) / DIGITAL EMISSIONS						
N/A	RSS-132 (4.6) RSS-133 (6.6) RSS-139 (6.6)	Receiver Spurious Emissions Limits	< RSS-Gen limits [Section 6; Table 1]	RADIATED	PASS	Section 6.10

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset	Page 13 of 49	

6.2 Effective Radiated Power Output Data

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	Standard	24.32	0.00	H	24.32	0.270	38.45	-14.13
836.52	CDMA850	Standard	23.69	0.00	H	23.69	0.234	38.45	-14.76
848.31	CDMA850	Standard	22.79	0.00	H	22.79	0.190	38.45	-15.66

Table 6-2. Effective Radiated Power Output Data (Cellular Band)

6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c), §27.50(d)(2); RSS-133 (6.4) [SRSP-510 (5.1.2)], RSS-139 (6.4)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1711.25	CDMA1700	Standard	19.18	8.09	H	27.27	0.533	30.00	-2.73
1732.50	CDMA1700	Standard	14.36	7.97	H	22.33	0.171	30.00	-7.67
1753.75	CDMA1700	Standard	17.75	7.86	H	25.61	0.364	30.00	-4.39

Table 6-3. Equivalent Isotropic Radiated Power Output Data (AWS Band)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	Standard	15.51	7.75	H	23.26	0.212	33.01	-9.75
1880.00	CDMA1900	Standard	16.15	7.83	H	23.98	0.250	33.01	-9.03
1908.75	CDMA1900	Standard	14.58	7.93	H	22.50	0.178	33.01	-10.51

Table 6-4. Equivalent Isotropic Radiated Power Output Data (PCS Band)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

6.4 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 24.32 dBm = 0.270 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.32 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-37.16	6.16	-31.00	H	55.3
2474.10	-94.92	6.34	-88.58	H	112.9
3298.80	-92.52	6.71	-85.81	H	110.1
4123.50	-90.74	7.39	-83.35	H	107.7
4948.20	-90.56	8.91	-81.65	H	106.0

Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 15 of 49

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 23.69 dBm = 0.234 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.69 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-50.20	6.09	-44.11	H	67.8
2509.56	-94.85	6.38	-88.47	H	112.2
3346.08	-92.72	6.90	-85.82	H	109.5
4182.60	-91.33	7.79	-83.53	H	107.2
5019.12	-90.17	8.83	-81.34	H	105.0

Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 16 of 49

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 22.79 dBm = 0.190 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.79 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-36.32	6.01	-30.31	H	53.1
2544.93	-53.68	6.47	-47.20	H	70.0
3393.24	-92.92	7.10	-85.83	H	108.6
4241.55	-91.70	8.09	-83.61	H	106.4
5089.86	-89.88	8.86	-81.02	H	103.8

Table 6-7. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 17 of 49

6.5 AWS CDMA Radiated Measurements

§2.1053, 27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1711.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 27.27 dBm = 0.533 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.27 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3422.50	-49.07	9.34	-39.72	H	67.0
5133.75	-91.12	10.96	-80.16	H	107.4
6845.00	-85.82	10.52	-75.31	H	102.6
8556.25	-83.06	11.07	-71.99	H	99.3
10267.50	-82.08	12.47	-69.61	H	96.9

Table 6-8. Radiated Spurious Data (AWS CDMA Mode – Ch. 25)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 18 of 49

AWS CDMA Radiated Measurements (Cont'd)

§2.1053, 27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 450
 MEASURED OUTPUT POWER: 22.33 dBm = 0.171 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.33 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-49.15	9.47	-39.68	H	62.0
5197.50	-90.69	10.87	-79.82	H	102.2
6930.00	-85.92	10.68	-75.24	H	97.6
8662.50	-83.06	11.25	-71.81	H	94.1
10395.00	-81.81	12.52	-69.29	H	91.6

Table 6-9. Radiated Spurious Data (AWS CDMA Mode – Ch. 450)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 19 of 49

AWS CDMA Radiated Measurements (Cont'd)

§2.1053, 27.53(g)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1753.75 MHz
 CHANNEL: 875
 MEASURED OUTPUT POWER: 25.61 dBm = 0.364 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.61 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3507.50	-48.46	9.58	-38.88	H	64.5
5261.25	-89.85	10.56	-79.29	H	104.9
7015.00	-86.05	10.86	-75.19	H	100.8
8768.75	-83.24	11.50	-71.74	H	97.4
10522.50	-81.51	12.55	-68.96	H	94.6

Table 6-10. Radiated Spurious Data (AWS CDMA Mode – Ch. 875)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 20 of 49

6.6 PCS CDMA Radiated Measurements

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 23.26 dBm = 0.212 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.26 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-52.14	9.62	-42.52	H	65.8
5553.75	-89.25	10.61	-78.63	H	101.9
7405.00	-85.26	10.84	-74.42	H	97.7
9256.25	-83.92	12.20	-71.72	H	95.0
11107.50	-80.49	12.86	-67.63	H	90.9

Table 6-11. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 21 of 49

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 23.98 dBm = 0.250 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.98 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-47.49	9.30	-38.20	H	62.2
5640.00	-46.96	10.89	-36.07	H	60.0
7520.00	-85.04	10.85	-74.19	H	98.2
9400.00	-83.69	12.17	-71.51	H	95.5
11280.00	-80.60	13.05	-67.55	H	91.5

Table 6-12. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 22 of 49

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 22.50 dBm = 0.178 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.50 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-46.54	9.05	-37.49	H	60.0
5726.25	-41.52	11.07	-30.45	H	53.0
7635.00	-85.30	11.11	-74.19	H	96.7
9543.75	-83.83	12.36	-71.47	H	94.0
11452.50	-80.34	13.23	-67.11	H	89.6

Table 6-13. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

1. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 23 of 49

6.7 Cellular CDMA Frequency Stability Measurements

§2.1055, 22.355

OPERATING FREQUENCY: 836,520,000 Hz

CHANNEL: 384

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,519,983	-17	-0.000002
100 %		- 30	836,519,986	-14	-0.000002
100 %		- 20	836,519,983	-17	-0.000002
100 %		- 10	836,519,983	-17	-0.000002
100 %		0	836,519,989	-11	-0.000001
100 %		+ 10	836,519,994	-6	-0.000001
100 %		+ 20	836,519,991	-9	-0.000001
100 %		+ 30	836,519,989	-11	-0.000001
100 %		+ 40	836,519,988	-12	-0.000001
100 %		+ 50	836,520,000	0	0.000000
115 %		+ 20	836,519,982	-18	-0.000002
BATT. ENDPOINT	3.40	+ 20	836,519,988	-12	-0.000001

Table 6-14. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

Cellular CDMA Frequency Stability Measurements (Cont'd)
§2.1055, 22.355

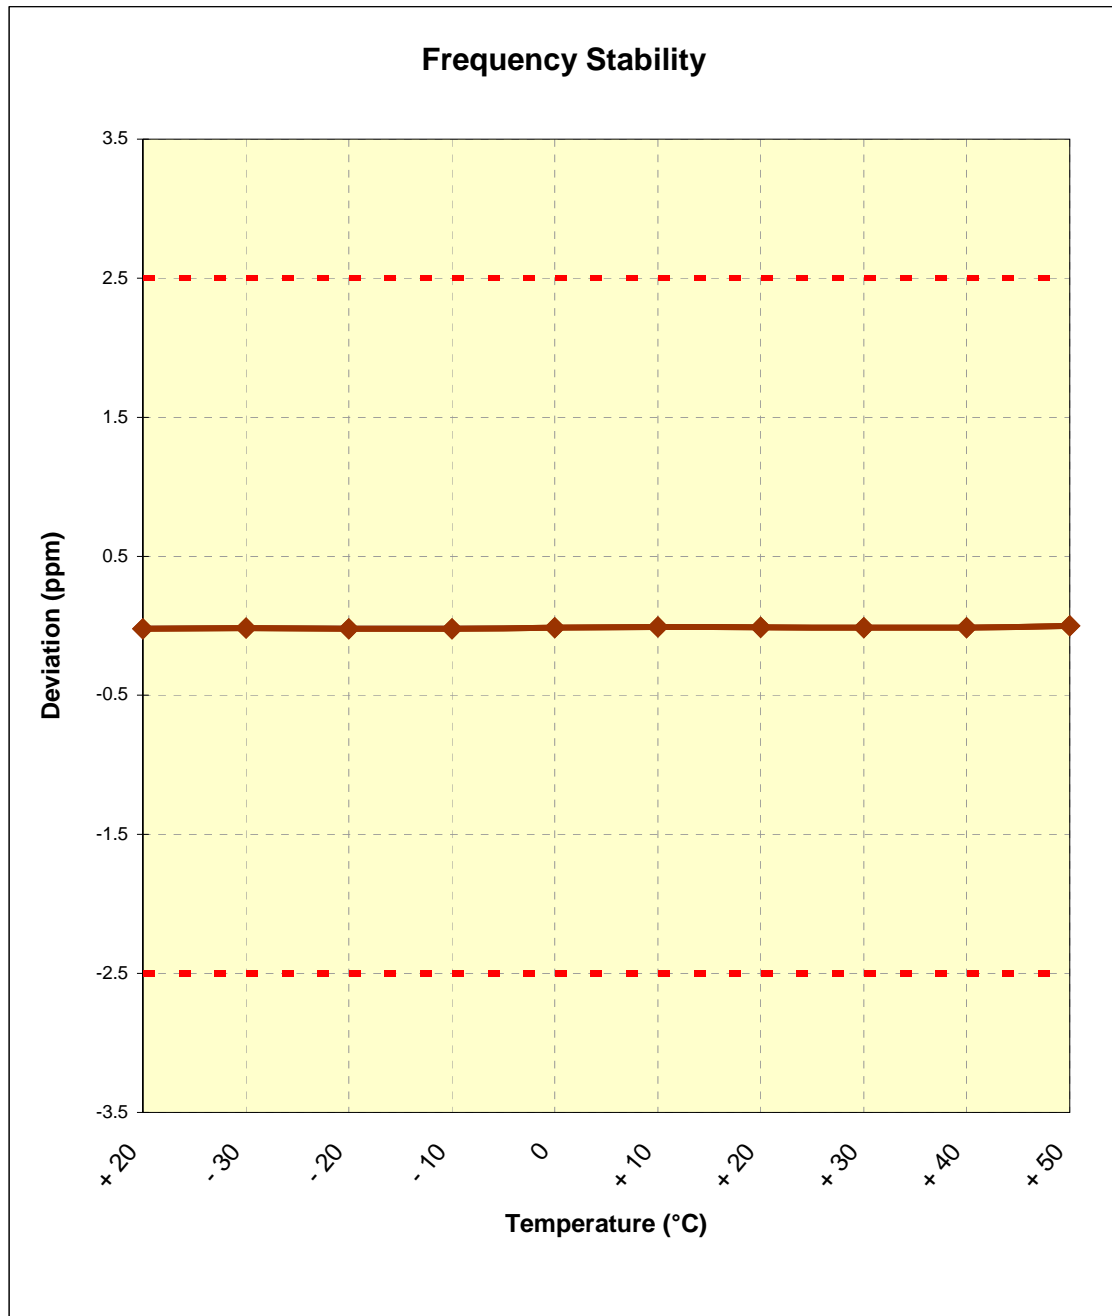




Figure 6-1. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 25 of 49

6.8 AWS CDMA Frequency Stability Measurements

§2.1055, 27.54

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 450

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,732,499,996	-4	0.000000
100 %		- 30	1,732,499,987	-13	-0.000001
100 %		- 20	1,732,499,985	-15	-0.000001
100 %		- 10	1,732,499,988	-12	-0.000001
100 %		0	1,732,499,986	-14	-0.000001
100 %		+ 10	1,732,499,992	-8	0.000000
100 %		+ 20	1,732,499,996	-4	0.000000
100 %		+ 30	1,732,499,992	-8	0.000000
100 %		+ 40	1,732,499,995	-5	0.000000
100 %		+ 50	1,732,499,988	-12	-0.000001
115 %	4.26	+ 20	1,732,500,000	0	0.000000
BATT. ENDPOINT	3.40	+ 20	1,732,499,987	-13	-0.000001

Table 6-15. Frequency Stability Data (AWS CDMA Mode – Ch. 450)

AWS CDMA Frequency Stability Measurements (Cont'd)

§2.1055, 27.54

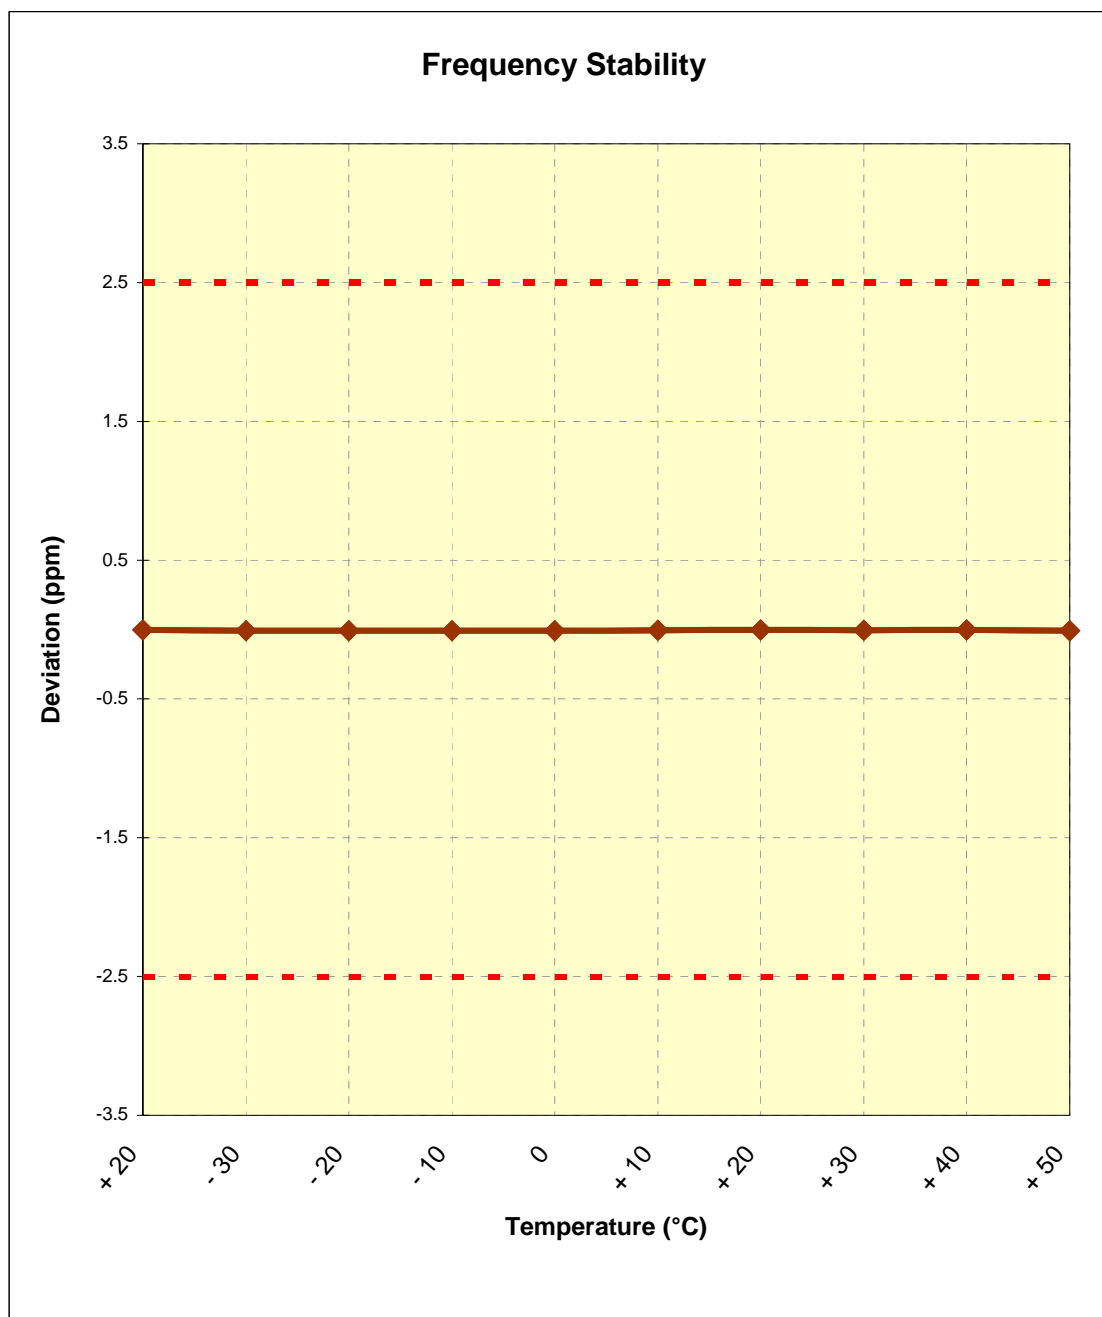


Figure 6-2. Frequency Stability Graph (AWS CDMA Mode – Ch. 450)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 27 of 49

6.9 PCS CDMA Frequency Stability Measurements

§2.1055, 24.235

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,879,999,996	-4	0.000000
100 %		- 30	1,879,999,996	-4	0.000000
100 %		- 20	1,879,999,991	-9	0.000000
100 %		- 10	1,879,999,997	-3	0.000000
100 %		0	1,879,999,985	-15	-0.000001
100 %		+ 10	1,879,999,999	-1	0.000000
100 %		+ 20	1,879,999,991	-9	-0.000001
100 %		+ 30	1,879,999,988	-12	-0.000001
100 %		+ 40	1,879,999,983	-17	-0.000001
100 %		+ 50	1,879,999,990	-10	-0.000001
115 %	4.26	+ 20	1,879,999,995	-5	0.000000
BATT. ENDPOINT	3.40	+ 20	1,879,999,993	-7	0.000000

Table 6-16. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

PCS CDMA Frequency Stability Measurements (Cont'd)

§2.1055, 24.235

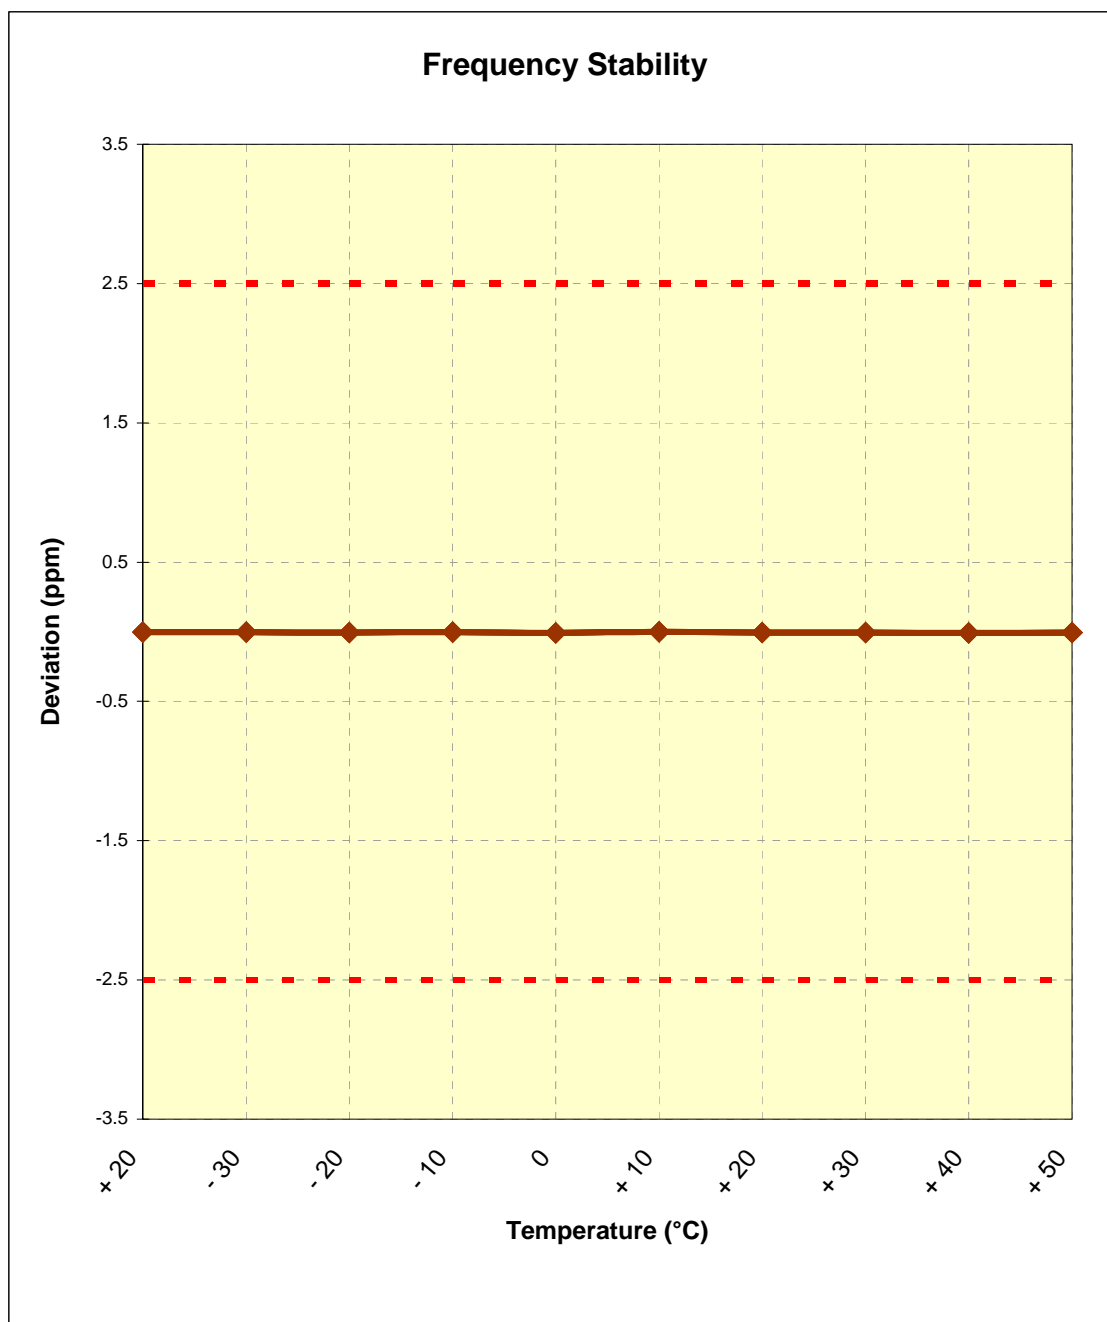


Figure 6-3. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 29 of 49

6.10 Receiver Spurious Emissions



RSS-132 (4.6), RSS-133 (6.6), RSS-139 (6.6)

Frequency [MHz]	Level [dBm]	AFCL [dB/m]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
31.94	-88.24	11.37	V	1.5	100	30.13	40.00	-9.87
41.64	-91.40	13.00	V	1.2	110	28.60	40.00	-11.40
84.32	-93.60	9.20	V	1.4	210	22.60	40.00	-17.40
134.76	-91.91	14.25	V	1.1	300	29.33	43.52	-14.19
168.71	-94.50	18.30	H	1.9	150	30.79	43.52	-12.73
323.91	-97.23	16.17	V	1.5	270	25.94	46.02	-20.08


Table 6-17. Radiated Measurements at 3-meters

NOTES:


1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated emissions were measured from 30MHz – 6000MHz to ensure that the provisions of 15.33(b)(1) are satisfied with respect to the upper frequency scanning range.
3. The radiated limits for unintentional radiators at a distance of 3 meters are used in the table above, as specified in 15.109(a).
4. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
5. AFCL (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
6. Level (dB μ V/m) = Analyzer Reading (dBm) + AFCL (dB/m) + 107
7. Margin (dB) = Field strength (dB μ V/m) – Limit (dB μ V/m)
8. Measurements are made using a CISPR quasi-peak detector with a 100kHz resolution bandwidth. Above 1GHz, peak measurements are made using a peak detector with a resolution bandwidth of 1MHz and a video bandwidth of 3MHz and average measurements are made with a peak detector using a resolution bandwidth of 1MHz and a video bandwidth of 10Hz.
9. Calibrated linearly polarized broadband and horn antennas were used for measurements below and above 1GHz, respectively. For measurements made below 1GHz, the results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy.
10. Calibrated low-loss microwaves cables and broadband amplifiers are used.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 30 of 49

7.0 PLOT(S) OF EMISSIONS

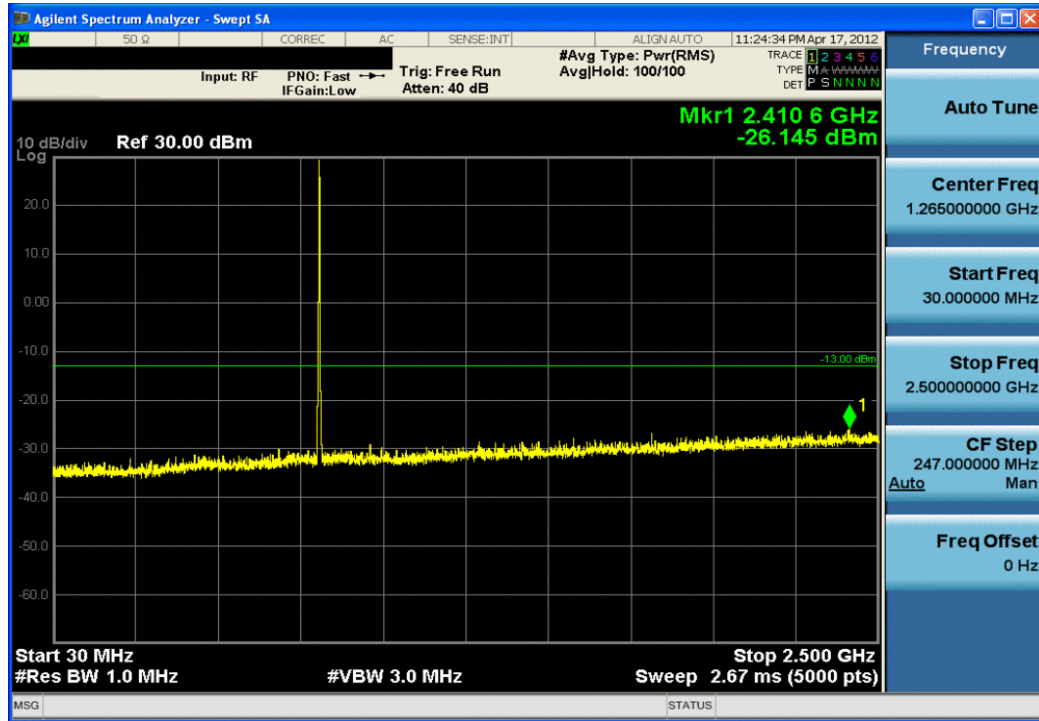


Plot 7-1. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

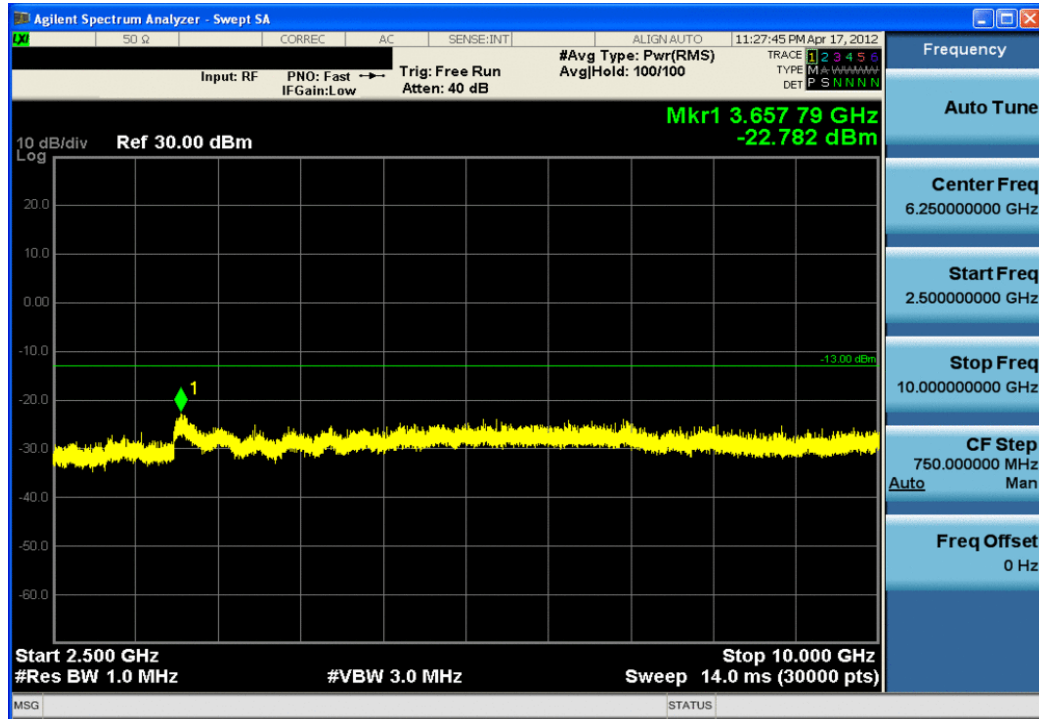

Plot 7-2. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 31 of 49

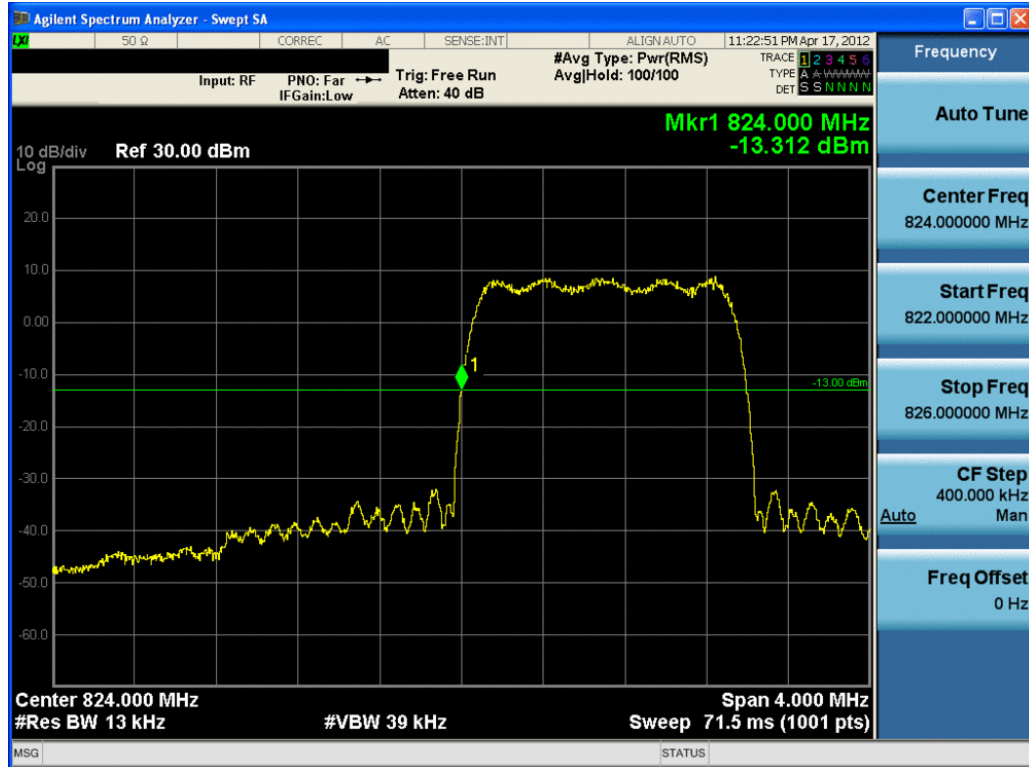


Plot 7-3. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)




Plot 7-4. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 32 of 49

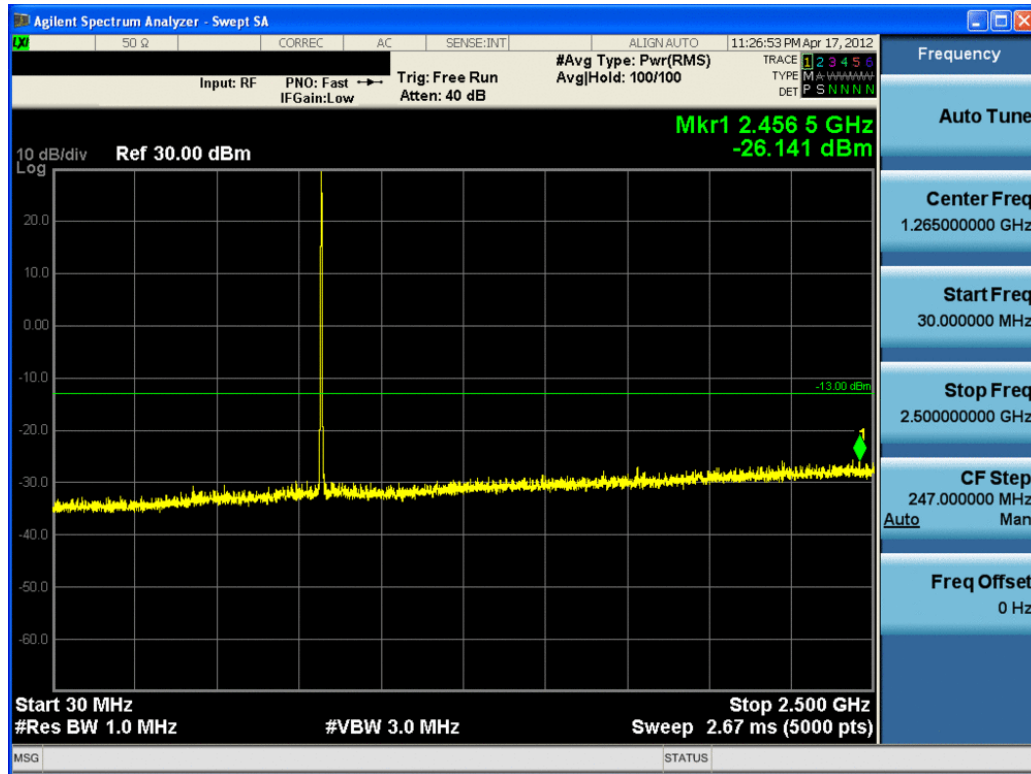


Plot 7-5. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

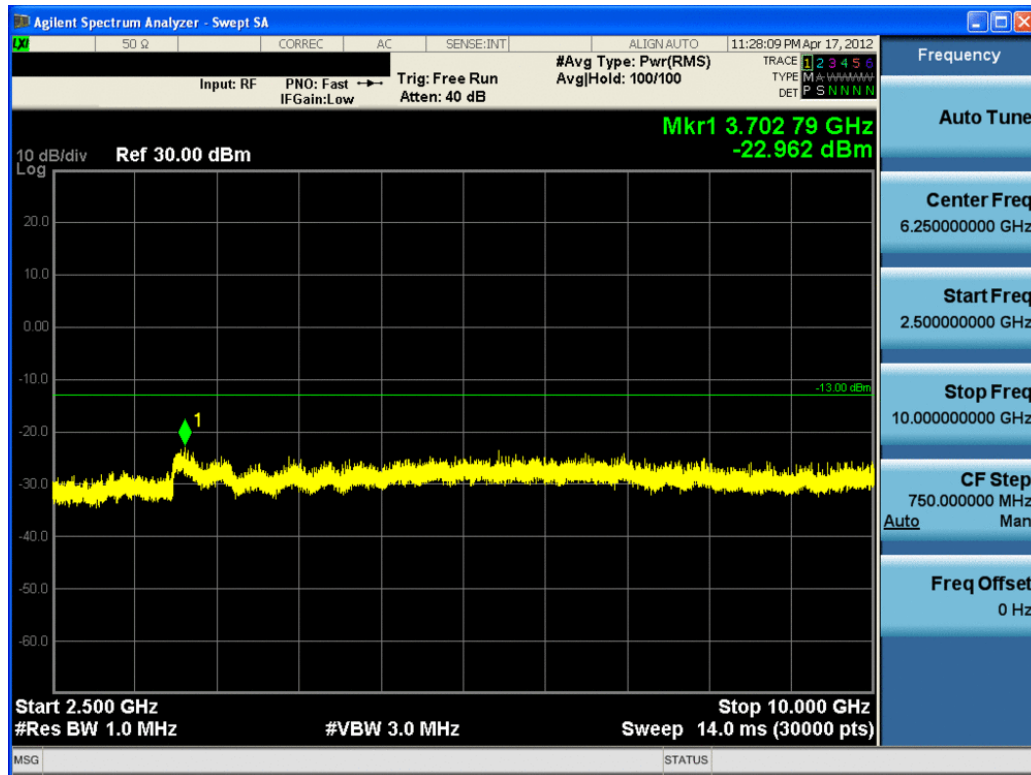


Plot 7-6. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 33 of 49

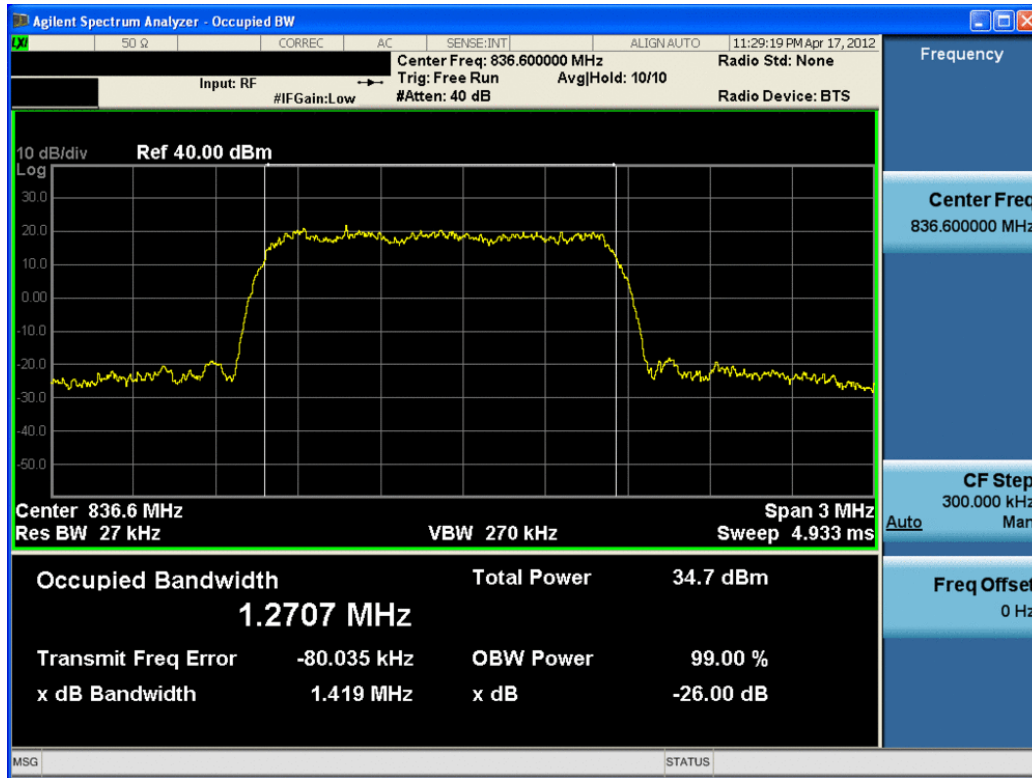


Plot 7-7. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

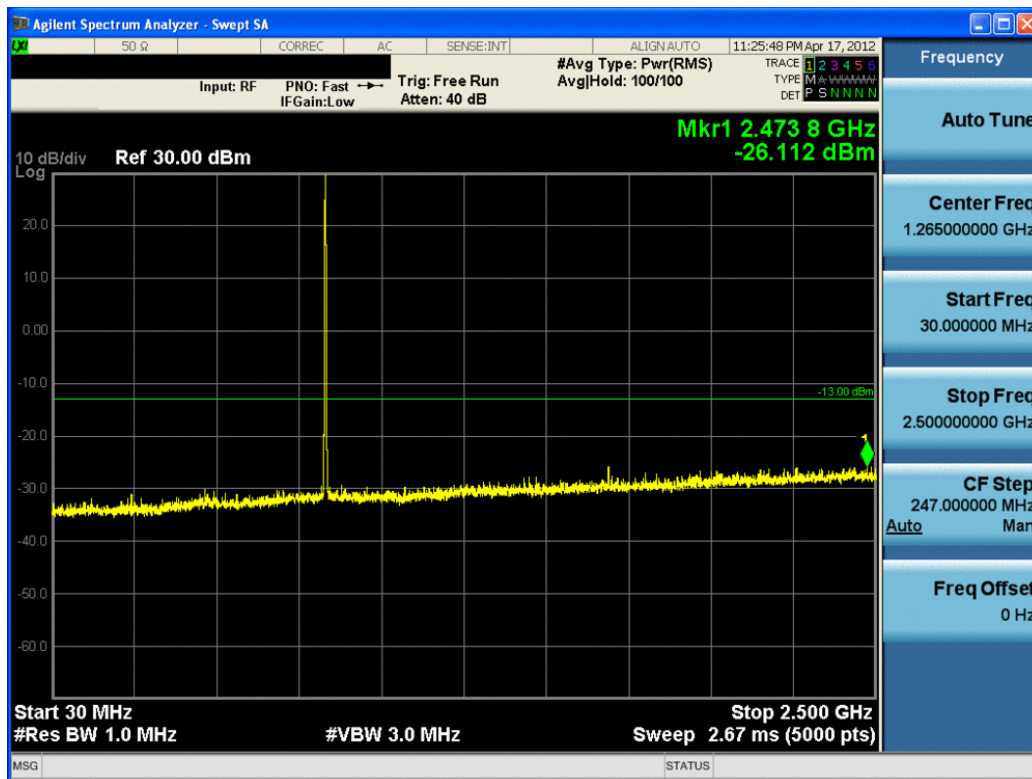


Plot 7-8. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 34 of 49

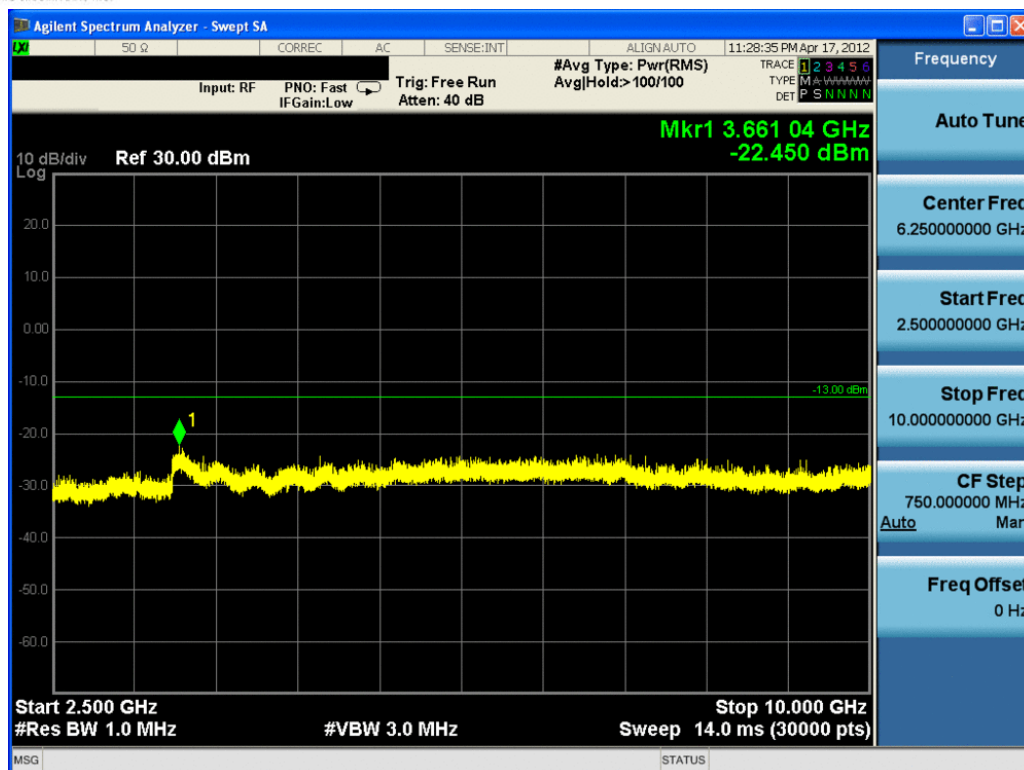

Plot 7-9. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

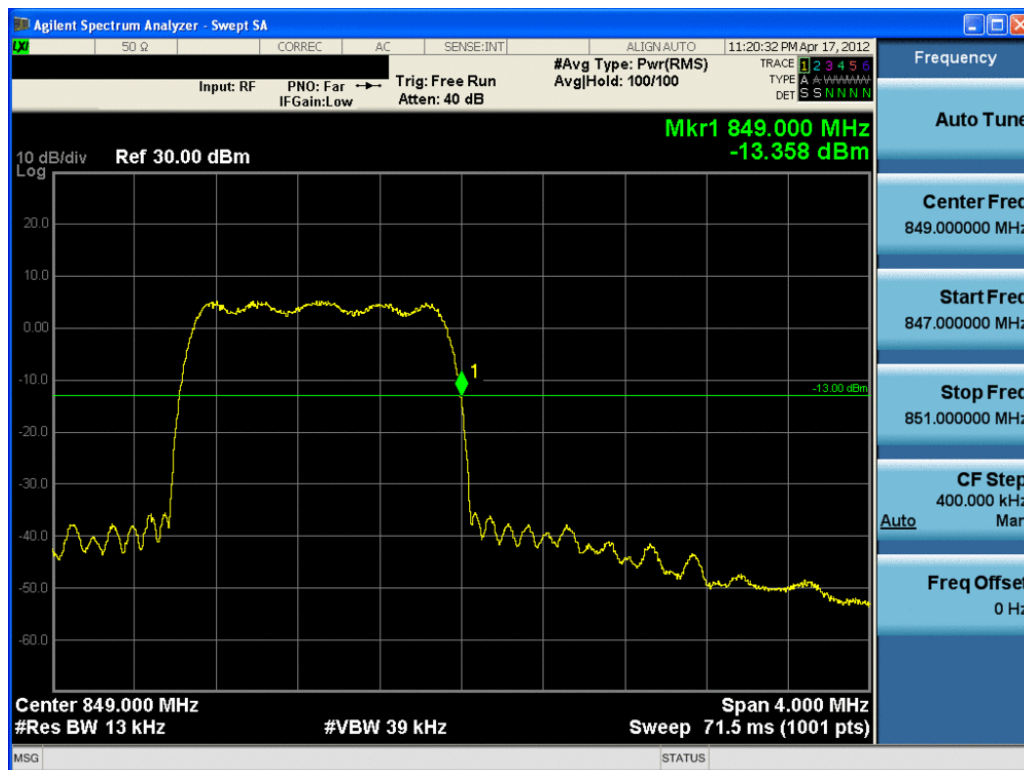


Plot 7-10. Band Edge Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 35 of 49




Plot 7-11. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

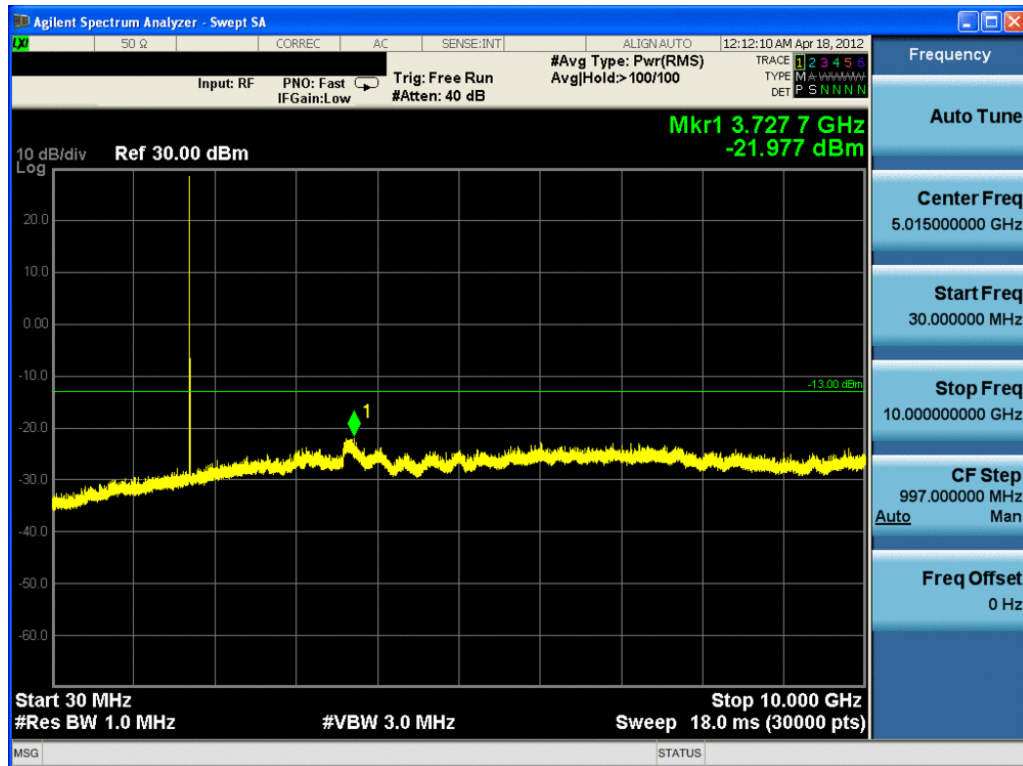


Plot 7-12. Conducted Spurious Plot (AWS CDMA Mode – Ch. 25)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 36 of 49

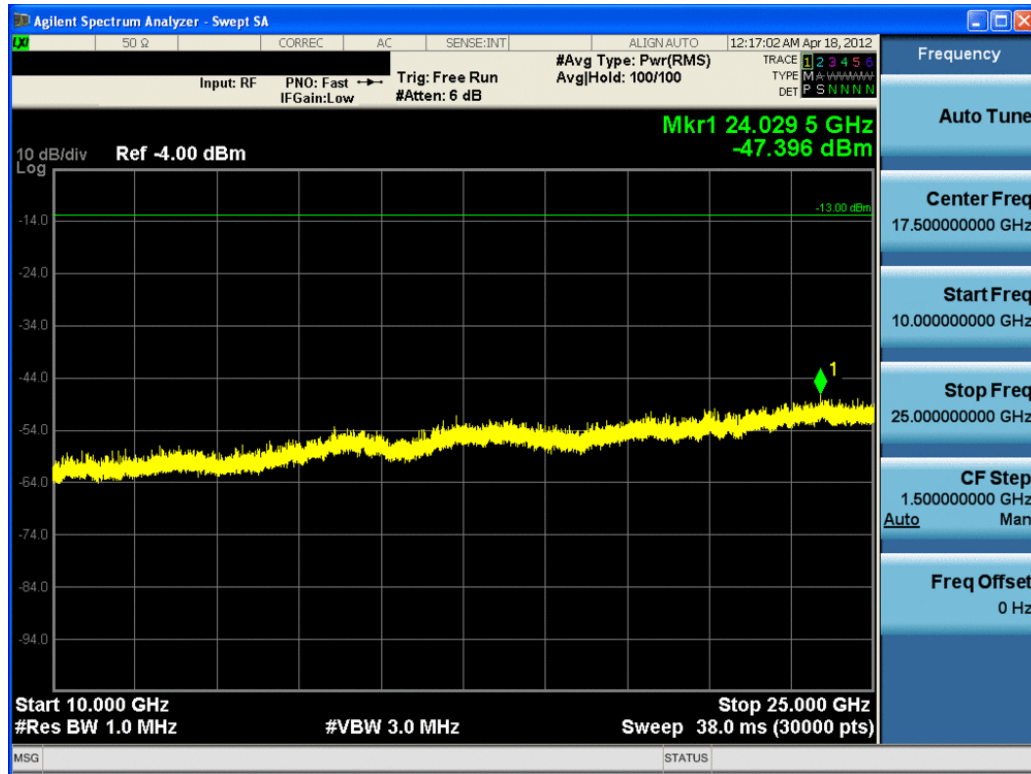


Plot 7-13. Conducted Spurious Plot (AWS CDMA Mode – Ch. 25)

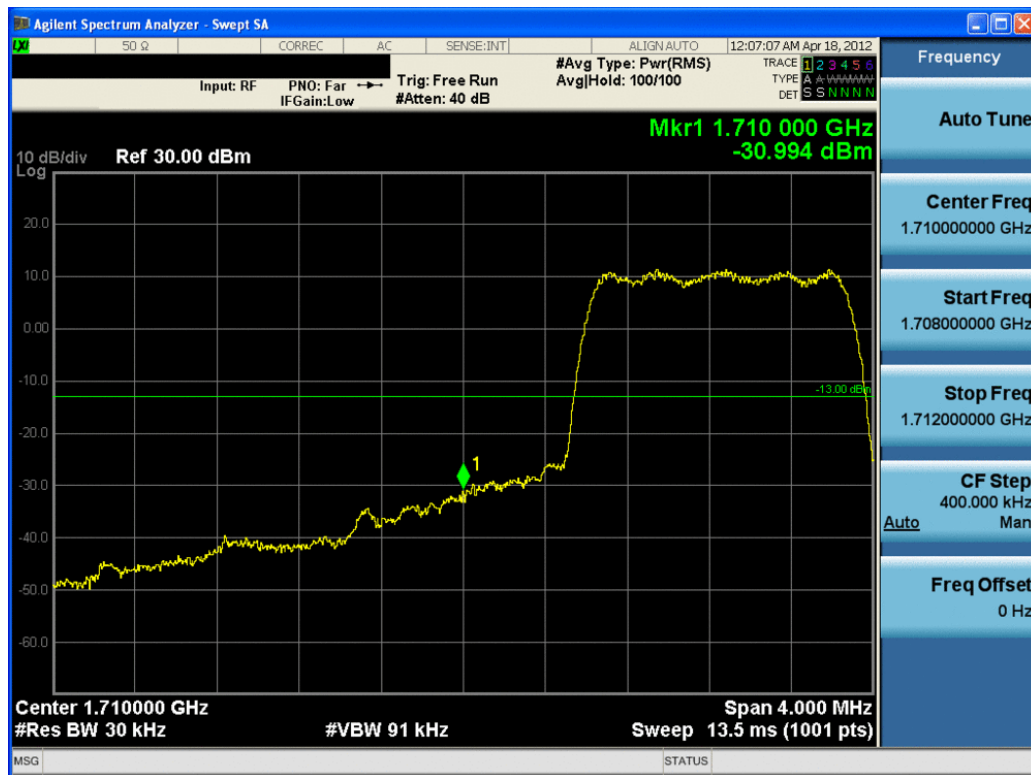


Plot 7-14. Band Edge Plot (AWS CDMA Mode – Ch. 25)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 37 of 49

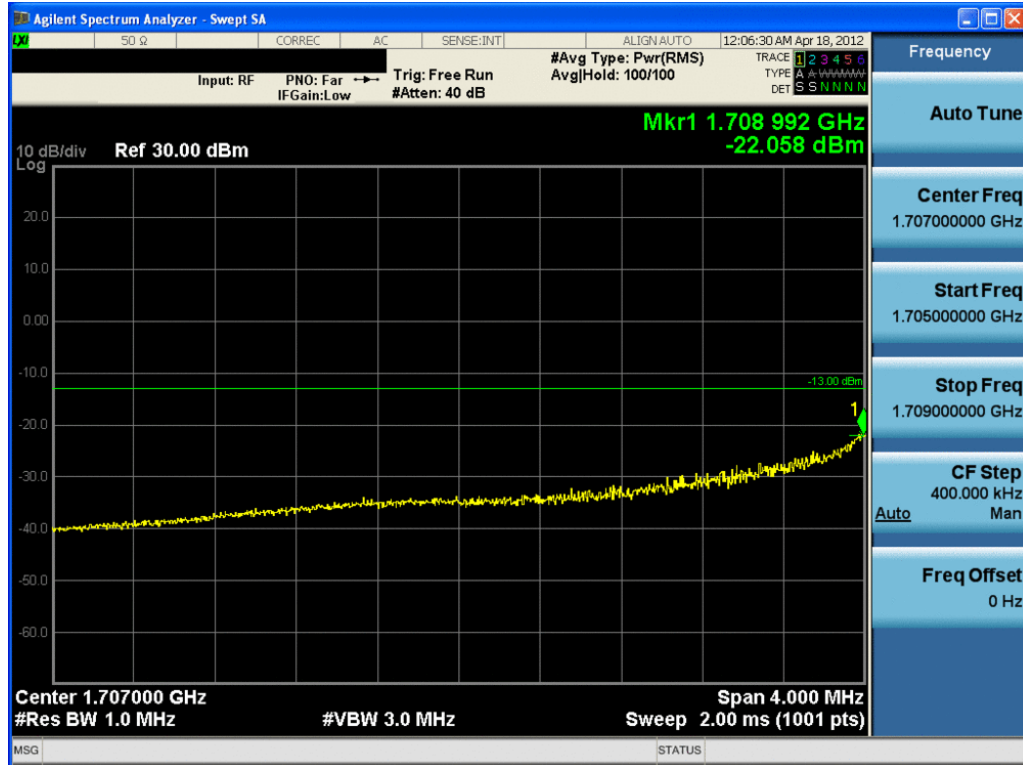

Plot 7-15. 4MHz Span Plot (AWS CDMA Mode – Ch. 25)

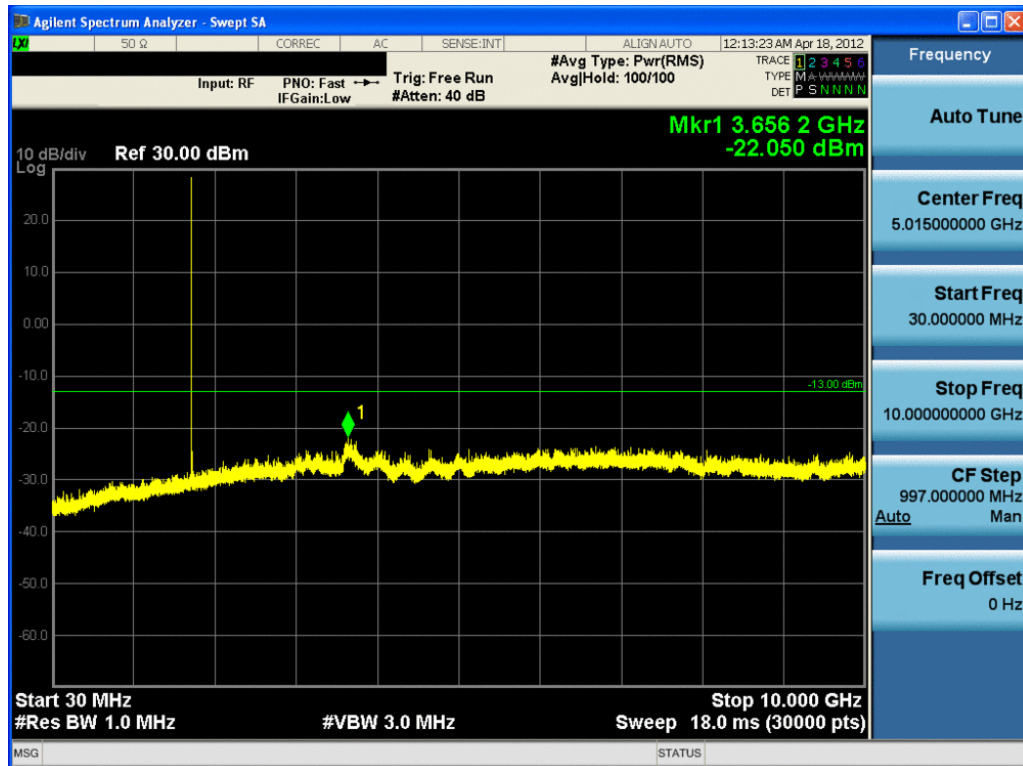


Plot 7-16. Conducted Spurious Plot (AWS CDMA Mode – Ch. 450)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 38 of 49




Plot 7-17. Conducted Spurious Plot (AWS CDMA Mode – Ch. 450)

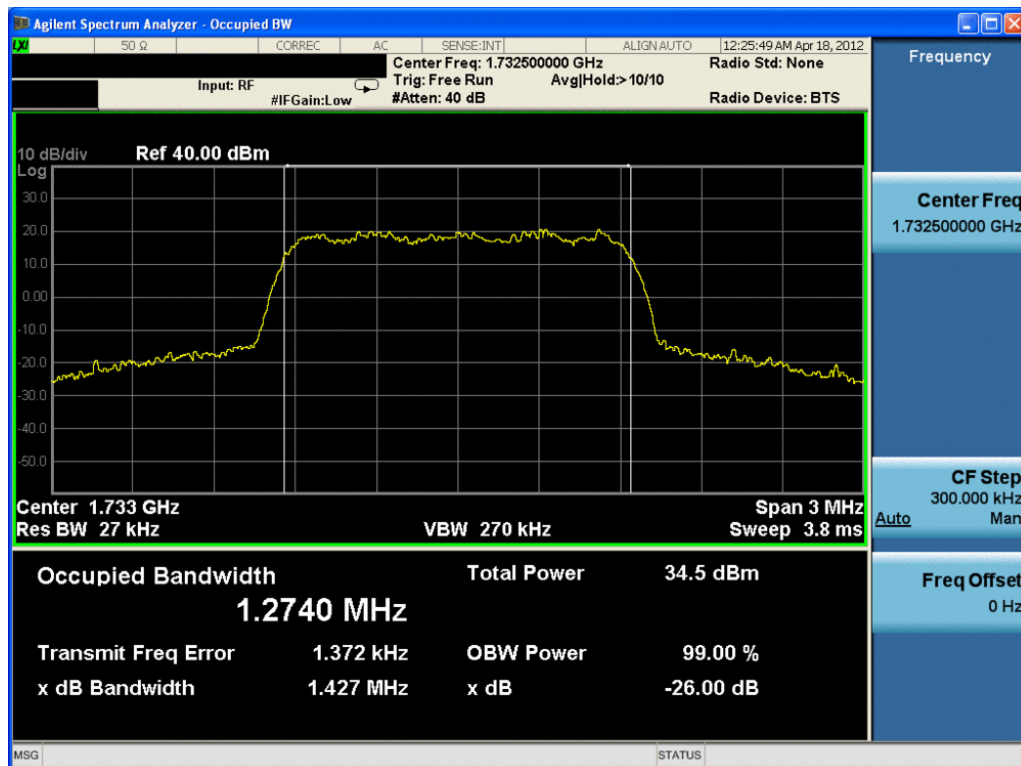


Plot 7-18. Occupied Bandwidth Plot (AWS CDMA Mode – Ch. 450)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 39 of 49

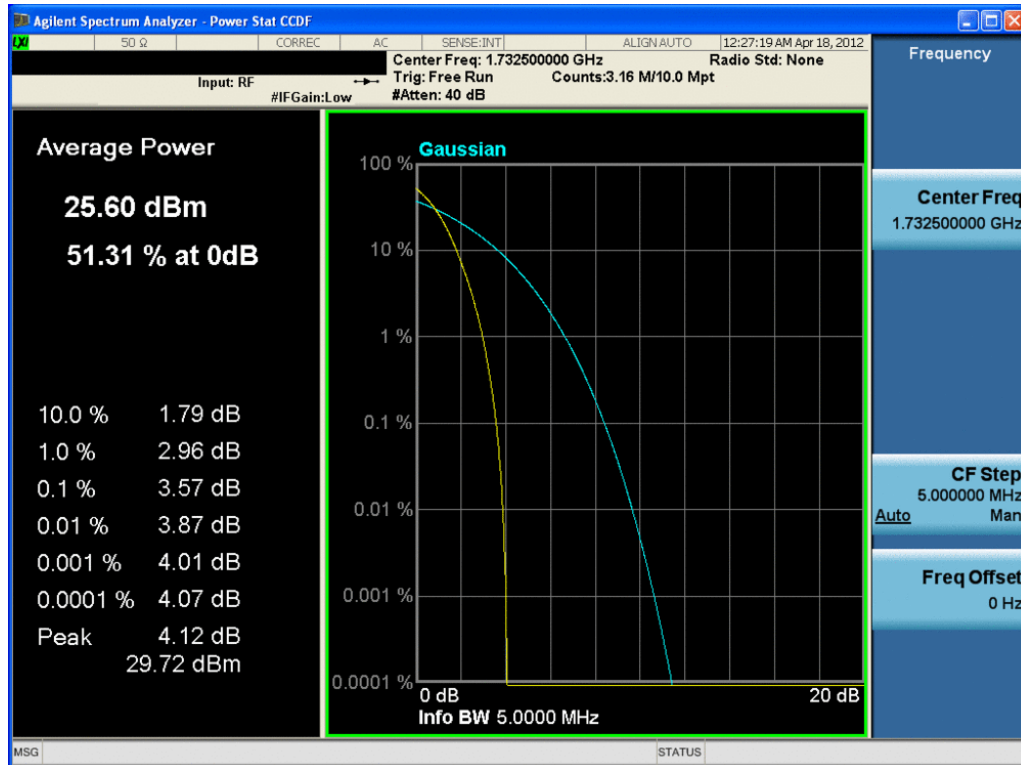


Plot 7-19. Peak-Average Ratio Plot (AWS CDMA Mode – Ch. 450)

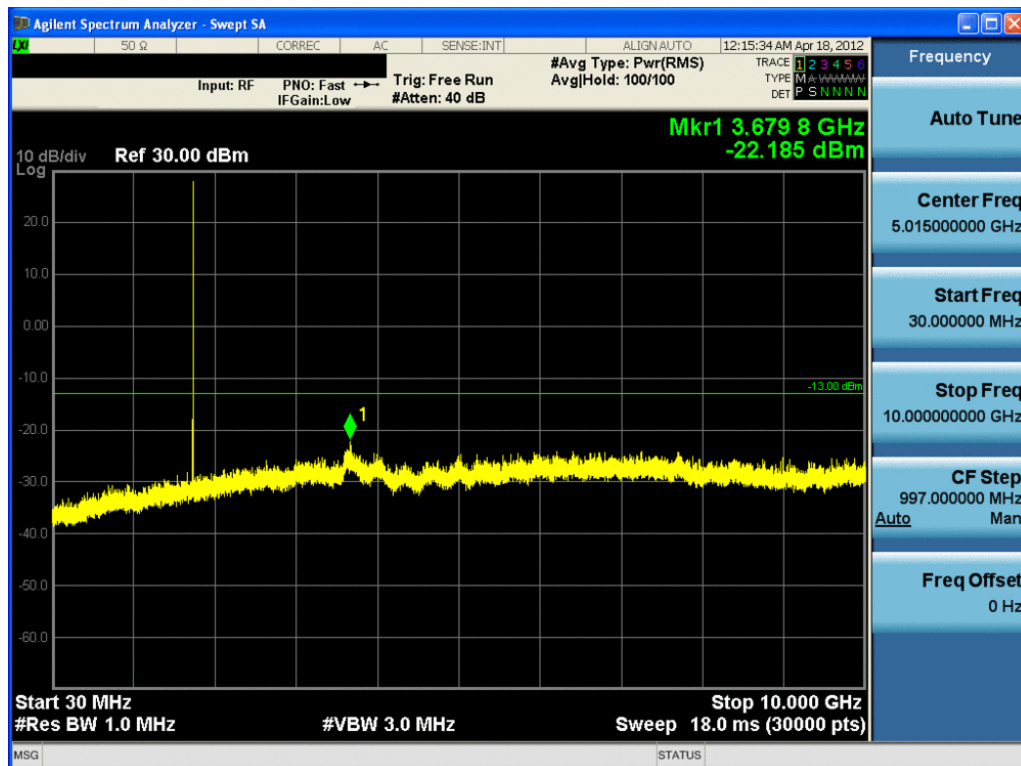

Plot 7-20. Conducted Spurious Plot (AWS CDMA Mode – Ch. 875)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 40 of 49

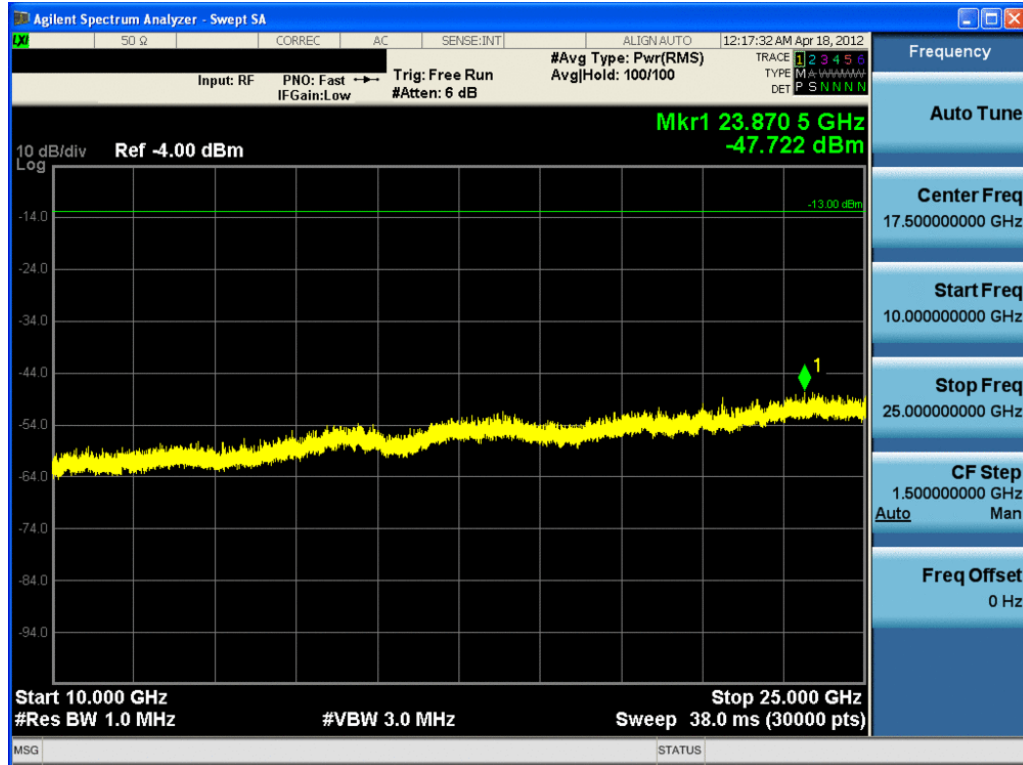


Plot 7-21. Conducted Spurious Plot (AWS CDMA Mode – Ch. 875)




Plot 7-22. Band Edge Plot (AWS CDMA Mode – Ch. 875)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 41 of 49

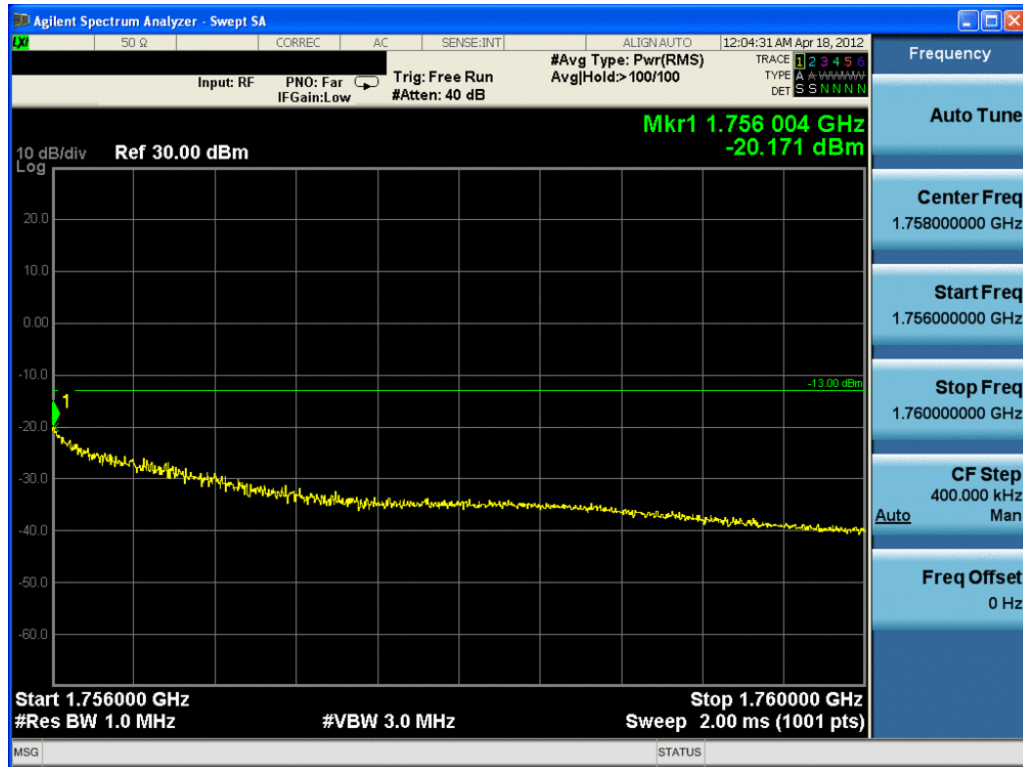


Plot 7-23. 4MHz Span Plot (AWS CDMA Mode – Ch. 875)

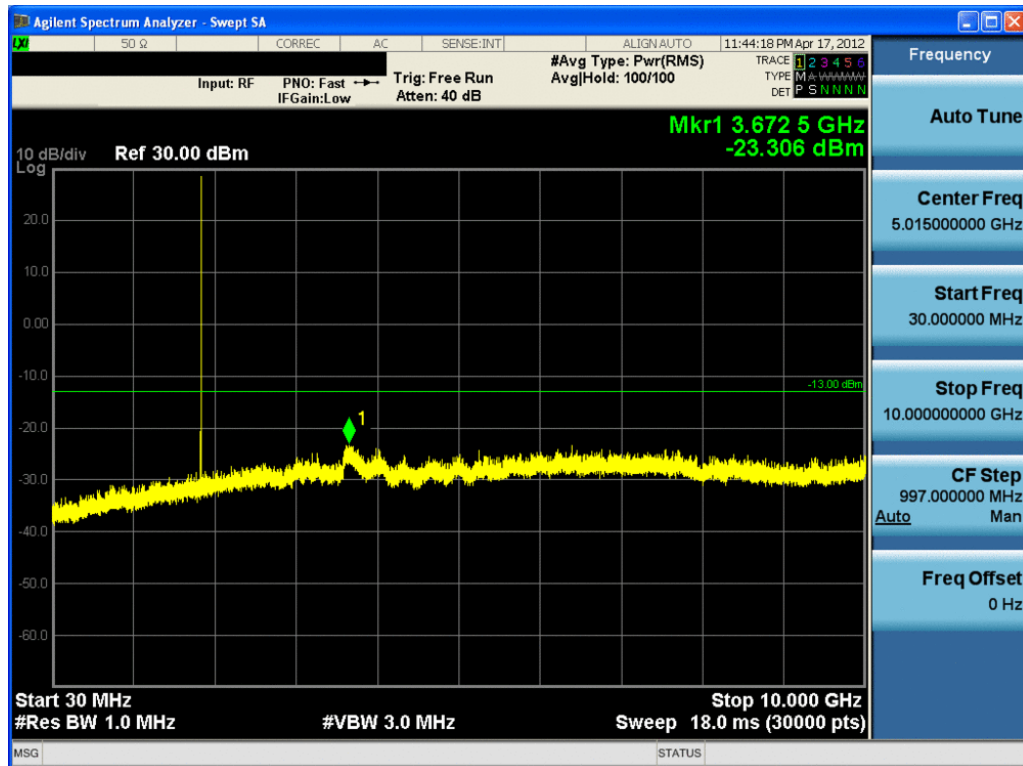


Plot 7-24. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 42 of 49

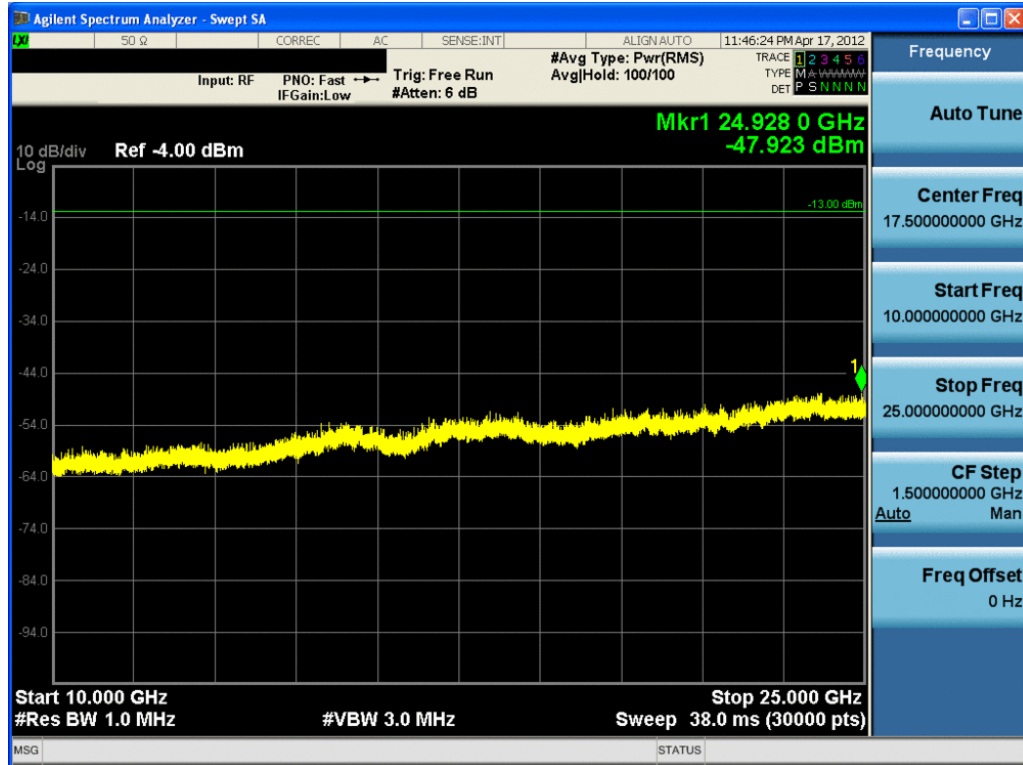


Plot 7-25. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

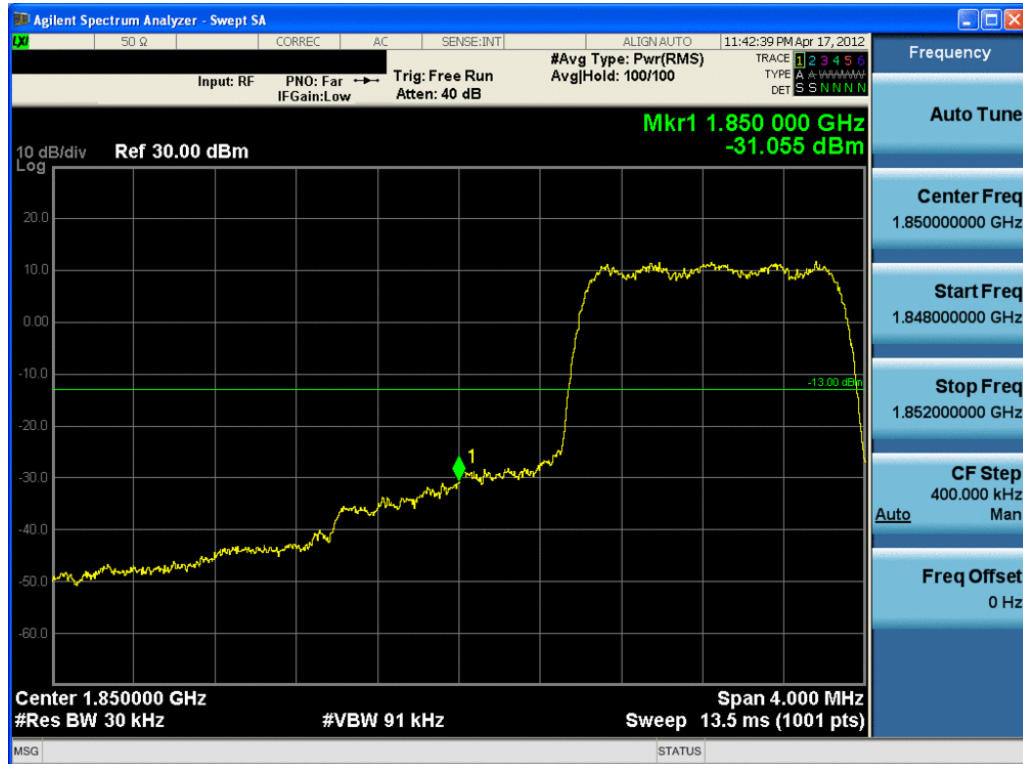


Plot 7-26. Band Edge Plot (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 43 of 49

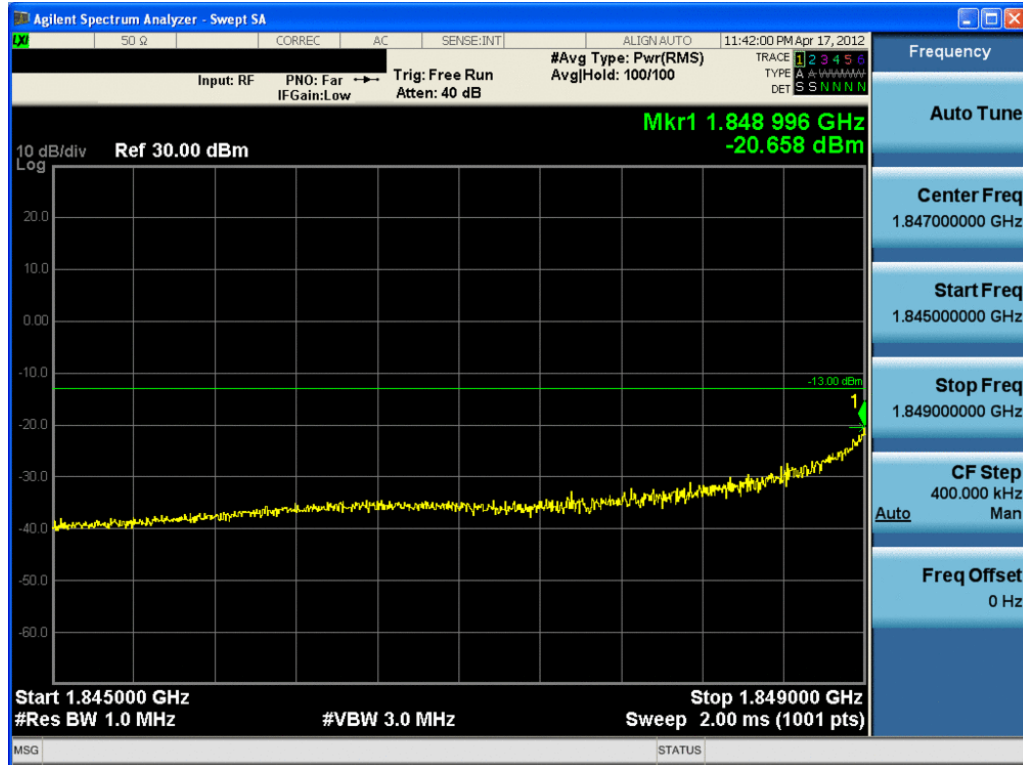

Plot 7-27. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

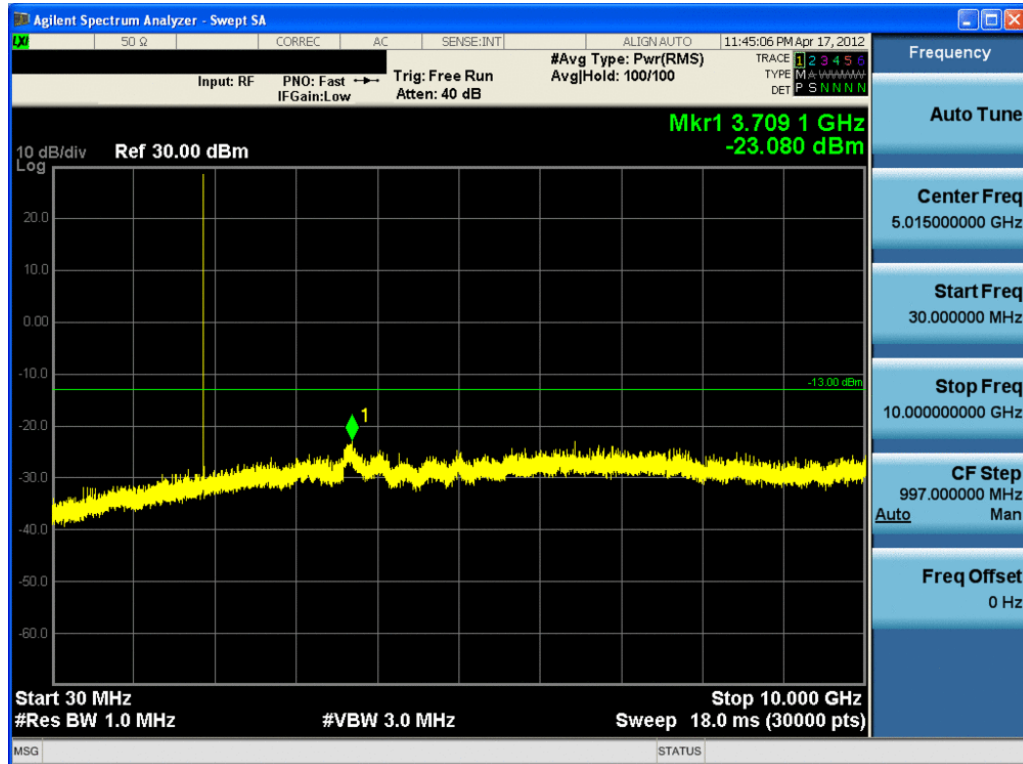


Plot 7-28. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 44 of 49




Plot 7-29. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

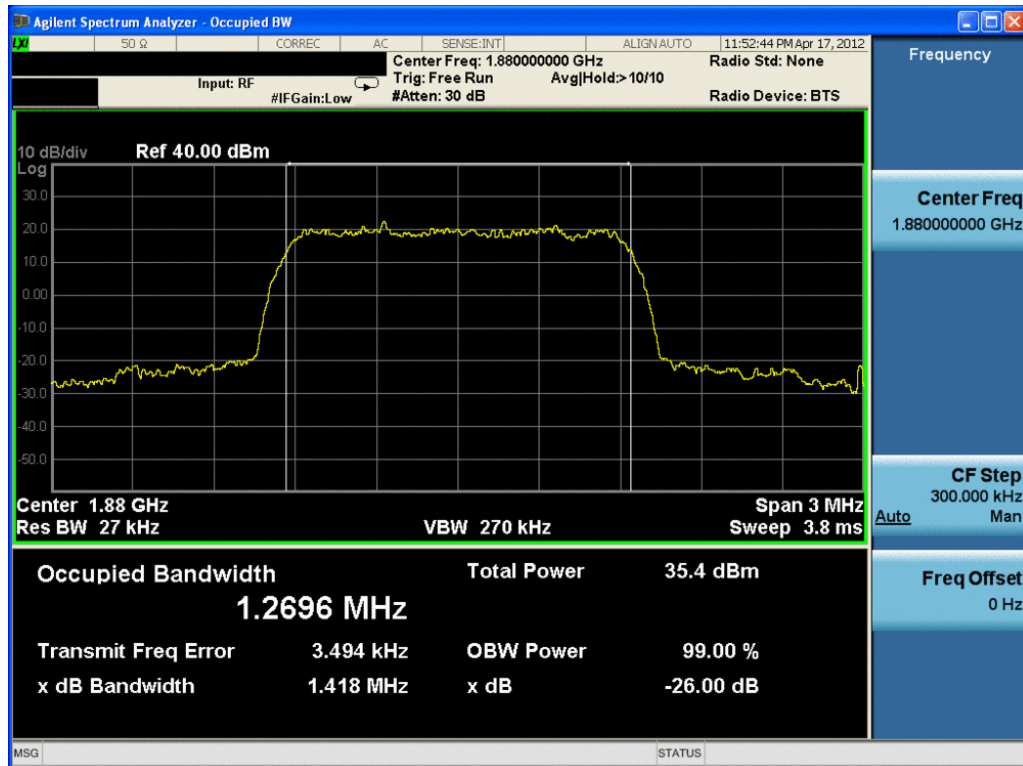


Plot 7-30. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 45 of 49

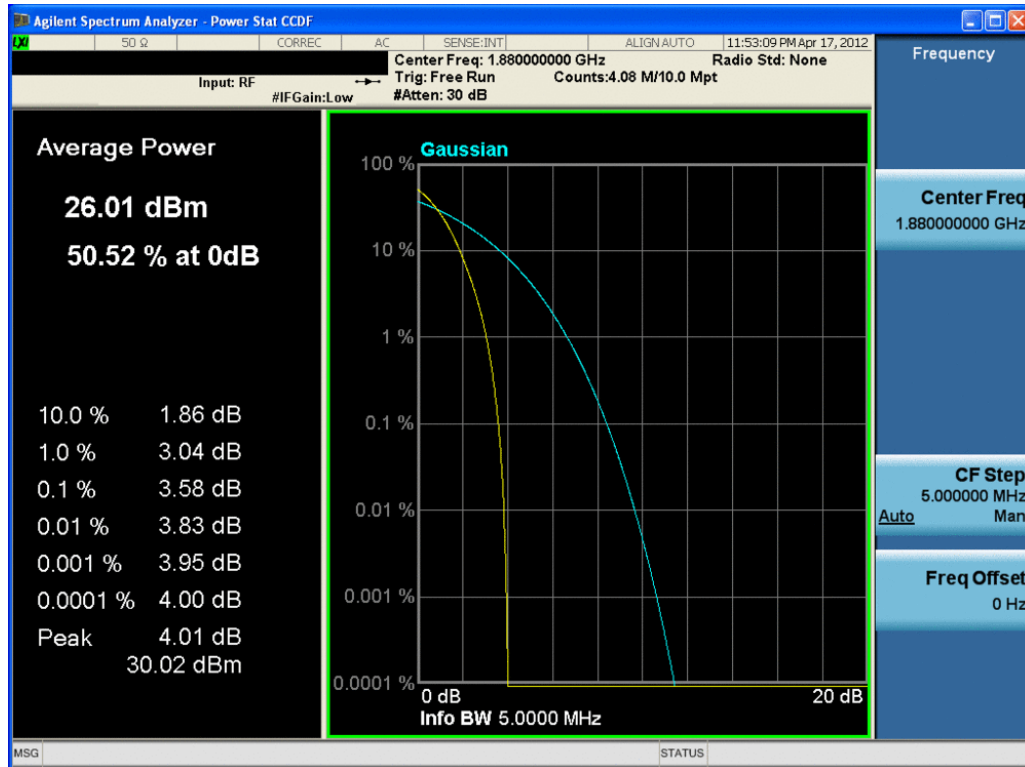

Plot 7-31. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

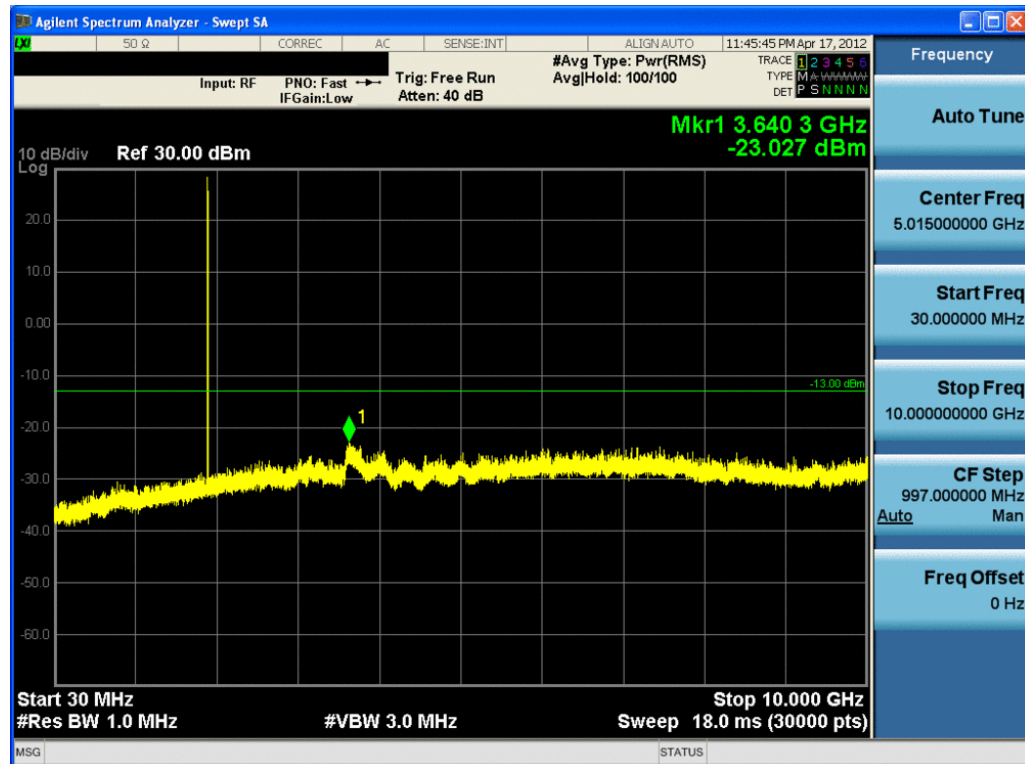

Plot 7-32. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 46 of 49




Plot 7-33. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)



Plot 7-34. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 47 of 49

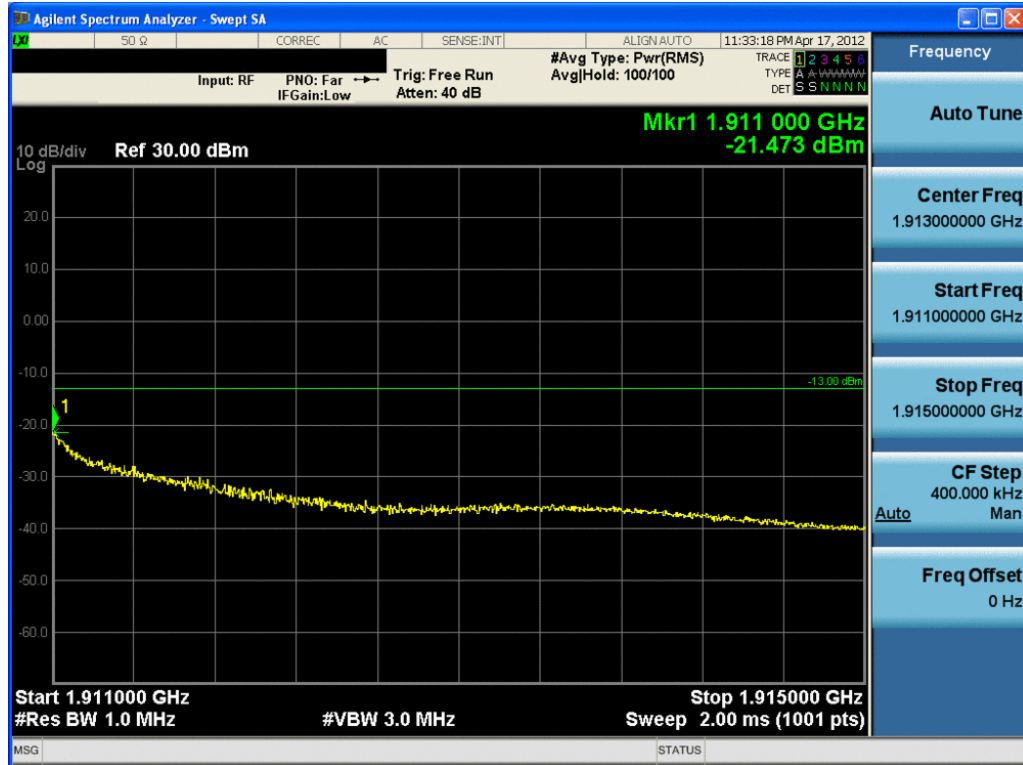



Plot 7-35. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFUN272	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 48 of 49

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFUN272** complies with all the requirements of Parts 2, 22, 24, and 27 of the FCC rules and RSS-139 of the Industry Canada rules.

FCC ID: ZNFUN272		FCC Pt. 22/24/27 Cell, PCS, AWS MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1204090432.ZNF	Test Dates: 4/17/2012 - 4/26/2012	EUT Type: Portable Handset		Page 49 of 49