



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology

Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION

Registration number: 282399

Report No.: GZEM110500176201

Page: 1 of 21

FCC ID: ZP3WIPRORM

TEST REPORT

Application No.:	GZEM1105001762RF
Applicant:	NOMENTA INDUSTRIES (HK) LTD.
FCC ID:	ZP3WIPRORM
Product Name:	Battery pack system
Product Description:	Wireless Transmission for Data (Remote Controller)
Model No.:	WiPRO
Trade Mark:	Conform'able
Standards:	FCC PART 15 Subpart C: 2010 section 15.249
Date of Receipt:	2011-05-30
Date of Test:	2011-06-01 to 2011-06-13
Date of Issue:	2011-06-29
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.

Strong Yao
Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2011-06-29		Original

Authorized for issue by:			
Tested By	 (Storm Shu) / Project Engineer	2011-06-01 to 2011-06-13	Date
Prepared By	 (Storm Shu) / Project Engineer	2011-06-14	Date
Checked By	 Strong Yao/ Reviewer	2011-06-29	Date

3 Test Summary

Test	Test Requirement	Test method	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	N/A

Remark:

N/A: not applicable. Refer to the relevant section for the details.

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

4 Contents

1 COVER PAGE	1
2 VERSION.....	2
3 TEST SUMMARY	3
4 CONTENTS.....	4
5 GENERAL INFORMATION	5
5.1 Client Information	5
5.2 General Description of E.U.T.	5
5.3 Details of E.U.T.	5
5.4 Description of Support Units	5
5.5 Other Information Requested by the Customer	5
5.6 Deviation from Standards	5
5.7 Test Location	6
5.8 Test Facility	6
6 EQUIPMENT USED DURING TEST.....	7
7 TEST RESULTS	8
7.1 E.U.T. Operation.....	8
7.2 Antenna Requirement	9
7.2.1 Standard requirement.....	9
7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions.....	10
7.4 Occupied Bandwidth & Band Edge.....	16
7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz	21

5 General Information

5.1 Client Information

Applicant: NOMENTA INDUSTRIES (HK) LTD.
Address of Applicant: Bldg.2, Rm, 207, Tian'an Hi-Tech Industrial Plaza, 730 Yingbin Lu, Panyu District, 511400 Guangzhou, P.R.C.

5.2 General Description of E.U.T.

Product Name: Battery pack system
Model No.: WiPRO

5.3 Details of E.U.T.

Operating Frequency	2.433GHz
Type of Modulation:	2-FSK
Number of Channels	1
Antenna Type	Integral antenna
Antenna gain:	0 dBi
Function:	The EUT was a set of equipment: 2.433GHz is used for common channel for data transfer, between battery pack and remote control.
Power Supply:	DC 3.0V = 3.0V size "CR2032" battery x1 for Tx DC 7.4V = 7.4V size "Lithium battery" battery x1 for Rx
Adapter detail:	Rx: Model: MTP151BX-084080 Input: AC100~240V 50/60Hz 0.5A Output: DC8.4V 0.8A Power cable: 1.5m x 2wires unscreened DC mains cable

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Other Information Requested by the Customer

None.

5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scienteck Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **FCC – Registration No.: 282399**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

6 Equipment Used during Test

RE in Chamber					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date
					(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2011-09-06
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-01-17
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2012-06-01
N/A	EMI Test Software	Audix	E3	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	2011-12-08
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2011-10-28
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2011-12-20
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2011-12-20
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2011-09-11
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-01-17
EMC0049	Amplifier	Agilent	8447D	2944A10862	2012-04-21
EMC0075	310N Amplifier	Sonama	310N	272683	2011-10-25
EMC0523	Active Loop Antenna	EMCO	6502	42963	2011-11-17
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2012-05-10

Conducted Emission					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date
					(YYYY-MM-DD)
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2011-09-25
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2011-11-23
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2011-11-24
EMC0107	Coaxial Cable	SGS	2m	N/A	2011-07-18
EMC0106	Voltage Probe	SGS	N/A	N/A	N/A
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2012-01-17
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2012-01-17
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2012-01-17

General used equipment					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date
					(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2011-12-16
EMC0007	DMM	Fluke	73	70671122	2011-12-16

7 Test Results

7.1 E.U.T. Operation

Power supply: DC 3.0V
Temperature: 20.0 -25.0 °C
Humidity: 38-50 % RH
Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

EUT channel and frequency list:

Channel	1	Frequency (MHz)	2433

7.2 Antenna Requirement

7.2.1 Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an integrated antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

Test result: The unit does meet the FCC requirements.

7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency is 2433MHz.

The limit for Average field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the fundamental frequency = 114.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB μ V/m for the harmonics = 54.0 dB μ V/m.

The limit for peak field strength dB μ V/m for the harmonics = 74.0 dB μ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB μ V/m in 15.209. Here the limit for the other emission is 54.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 30 MHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth
120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 26 GHz)

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:


For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Test Configuration:


1) 9 kHz to 30 MHz emissions:

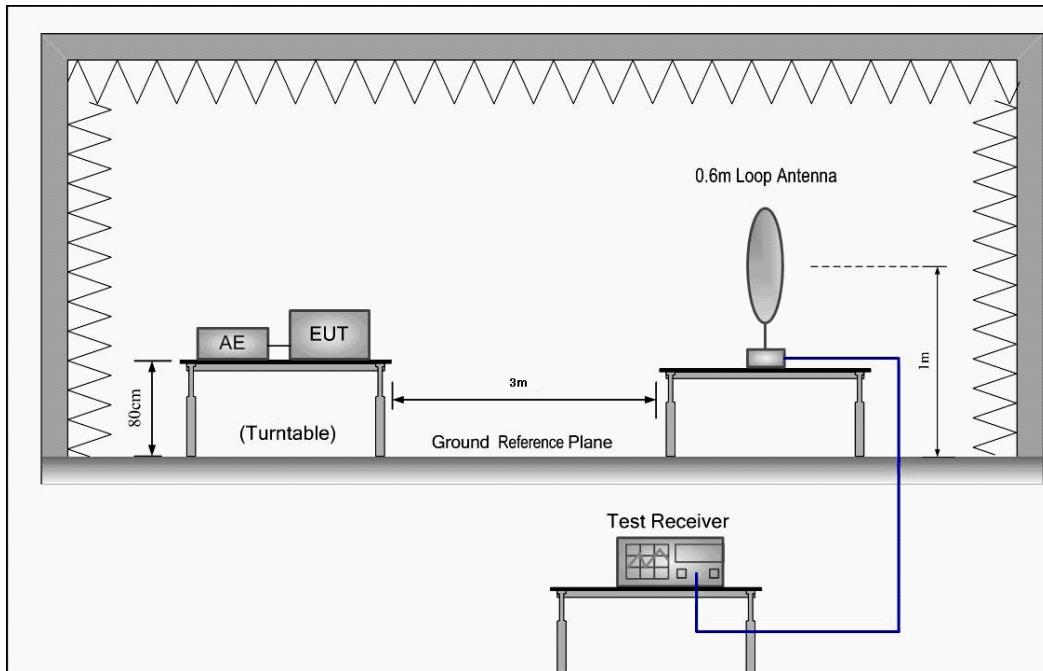

2) 30 MHz to 1 GHz emissions:

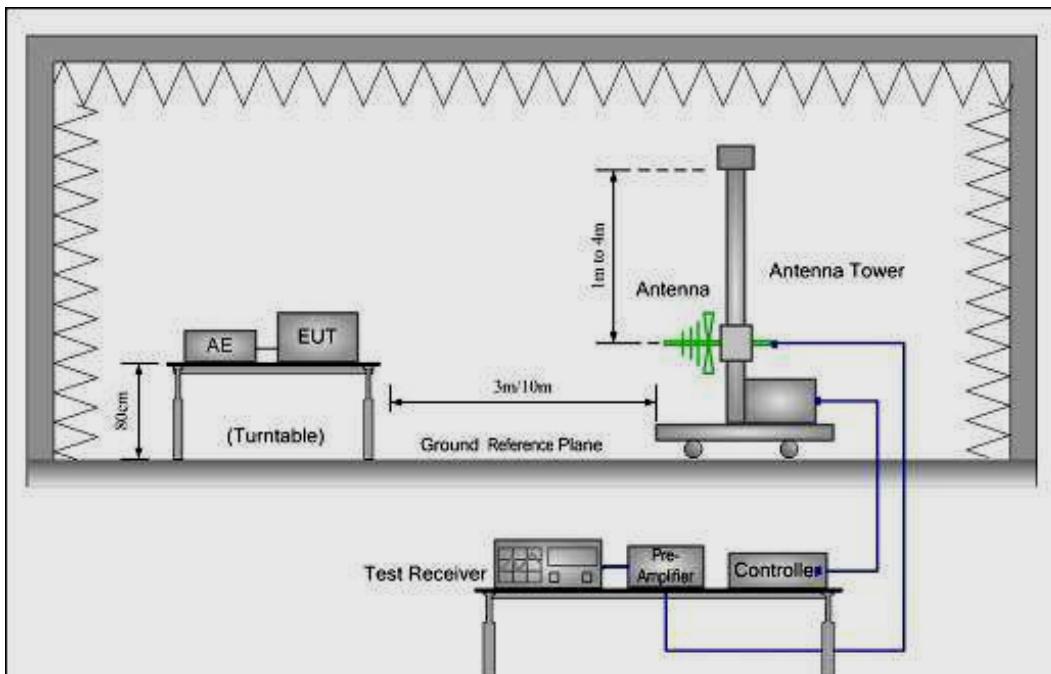

3) 1 GHz to 25 GHz emissions:

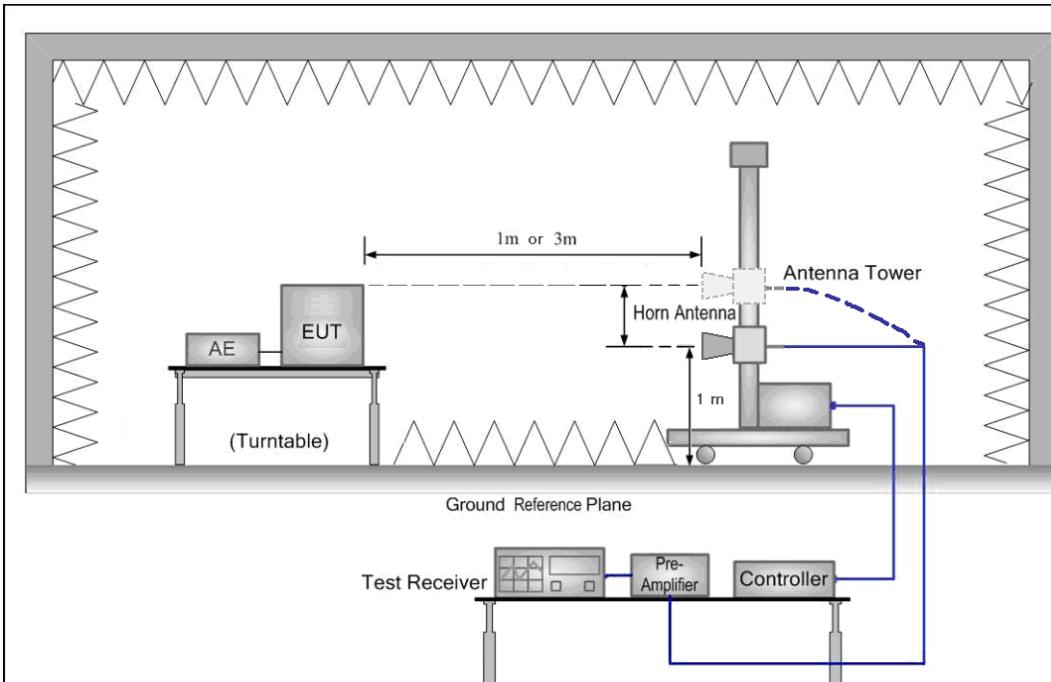


The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

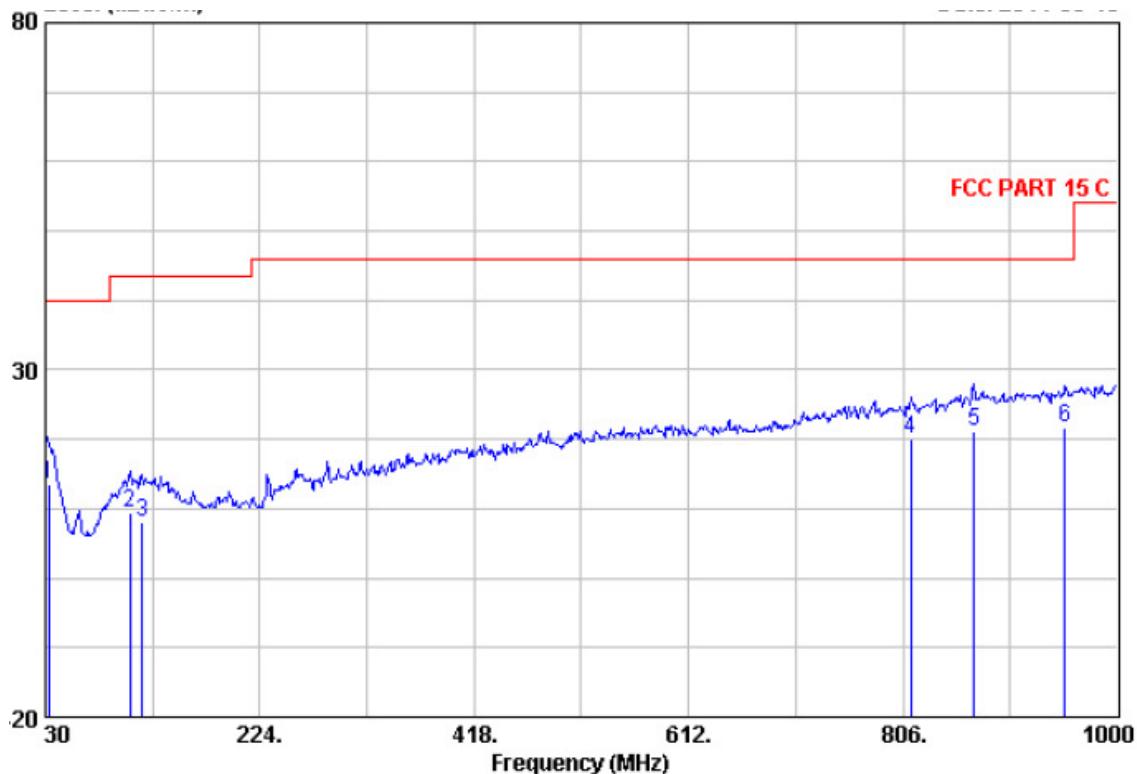
Level (dB μ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dB μ V	dB/m	dB	dB	dB μ V/m	dB μ V/m	dB
32.910	21.88	19.00	0.50	27.90	13.48	40.00	-26.52 QP
106.630	24.34	11.70	0.90	27.64	9.30	43.50	-34.20 QP
117.300	22.96	11.73	0.90	27.58	8.01	43.50	-35.49 QP
812.790	24.81	20.26	2.50	27.51	20.06	46.00	-25.94 QP
870.020	24.77	20.70	2.60	27.00	21.07	46.00	-24.93 QP
952.470	24.62	21.14	2.70	26.85	21.62	46.00	-24.38 QP

Horizontal:

Peak scan

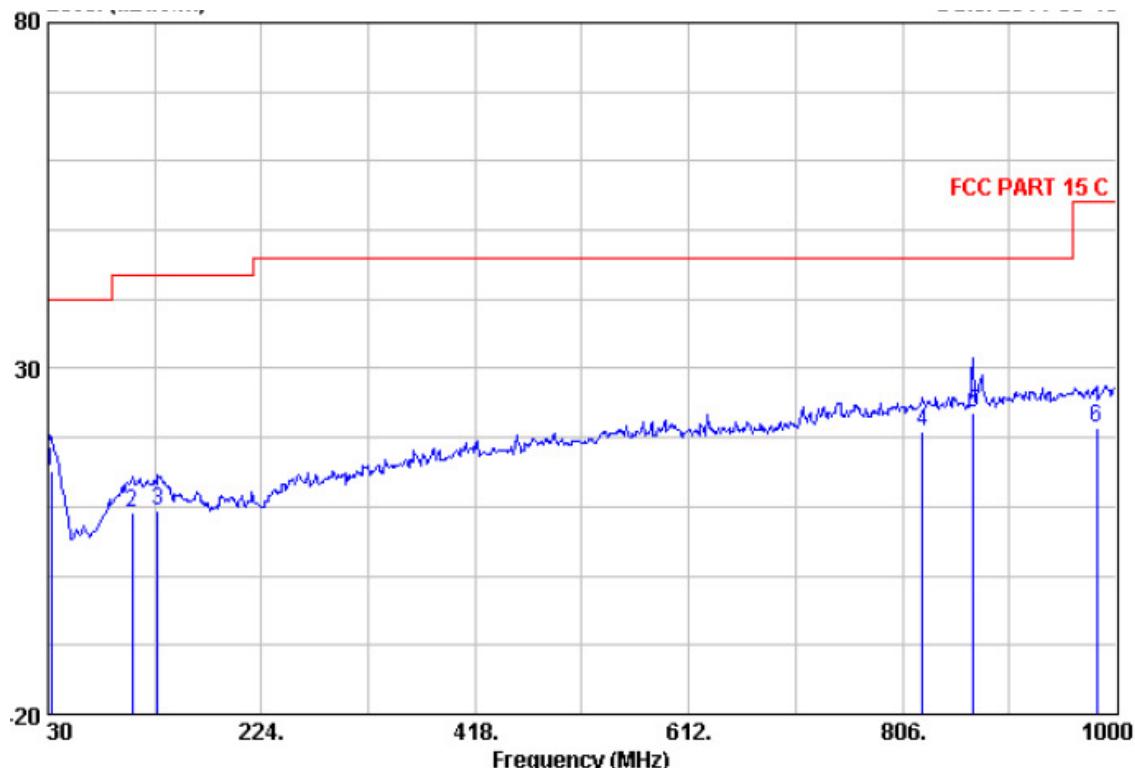Level (dB μ V/m)

Quasi-peak measurement

Freq	Read		Antenna		Cable		Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor	dB	dB	dBuV/m	dBuV/m			
MHz	dBuV	dB/m									
32.910	23.54	19.00		0.50	27.90	15.14	40.00	-24.86	QP		
106.630	24.26	11.70		0.90	27.64	9.22	43.50	-34.28	QP		
129.910	23.98	12.00		1.00	27.51	9.47	43.50	-34.03	QP		
824.430	25.11	20.54		2.50	27.39	20.76	46.00	-25.24	QP		
870.020	27.18	20.70		2.60	27.00	23.48	46.00	-22.52	QP		
982.540	24.20	21.36		2.80	26.90	21.46	54.00	-32.54	QP		

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
1423.000	25.51	3.62	35.96	53.93	47.10	74.00	V
2433.000	27.17	4.04	35.74	69.86	65.33	114.00	V
4339.000	32.86	7.10	34.09	48.90	54.77	74.00	V
1720.000	27.10	4.02	35.76	54.10	49.46	74.00	H
2433.000	27.17	4.04	35.74	74.16	69.63	114.00	H
4015.000	32.99	7.00	34.65	45.17	50.51	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
1423.000	25.51	3.62	35.96	30.00	23.17	54.00	V
2433.000	27.17	4.04	35.74	68.34	63.81	94.00	V
4339.000	32.86	7.10	34.09	29.64	35.51	54.00	V
1720.000	27.10	4.02	35.76	31.29	26.65	54.00	H
2433.000	27.17	4.04	35.74	69.96	65.43	94.00	H
4015.000	32.99	7.00	34.65	19.52	24.86	54.00	H

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.

- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

7.4 Occupied Bandwidth & Band Edge

Test Requirement: FCC Part 15 C section 15.249


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10: Clause 6.9

Operation within the band 2.400 to 2.4835 GHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.

1. Test in the frequency 2.433 GHz

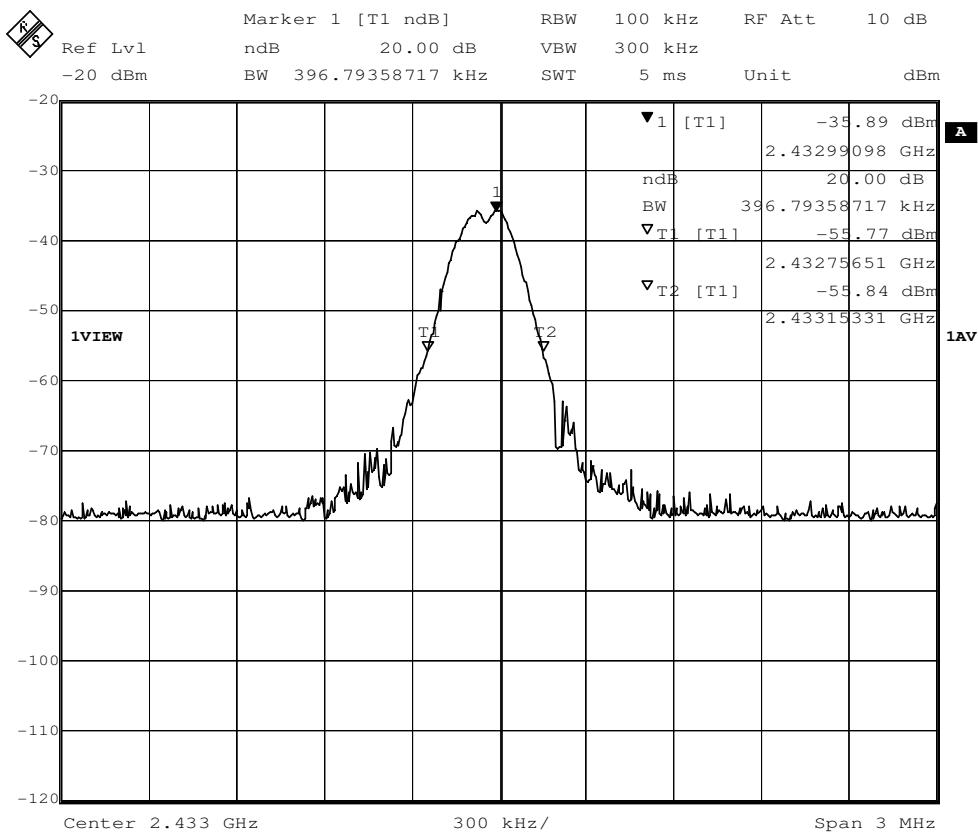


Date: 15.JUN.2011 11:22:20


The Band Edge Emission as below:

Lowest Band Edge 2.4 GHz

Detector mode: Peak

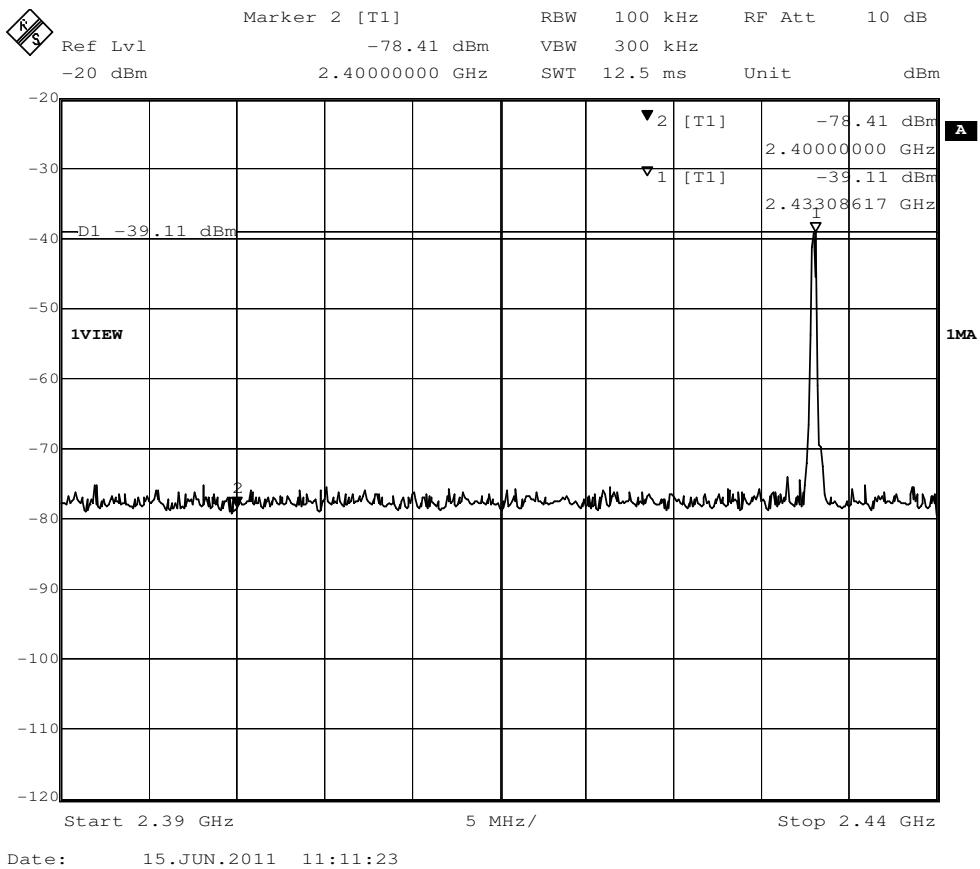

Detector mode: Average

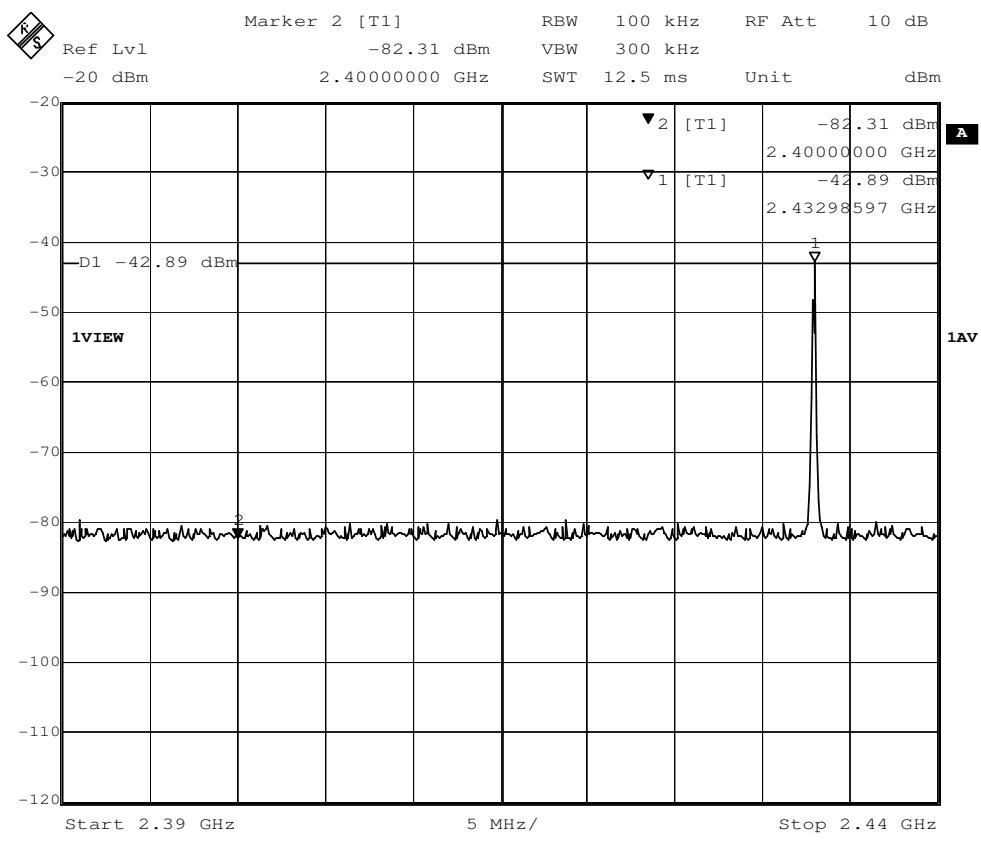


For 2.40 GHz band edge checked with 2.433 GHz frequency operated, the delta shown at the plots are -39.30 dB for peak detector mode and -39.42 dB for Average detector mode.

With the peak value 69.63 dB μ V/m and average value at 65.43 dB μ V/m for the fundamental, the spurious emission level at 2.400 GHz were 30.33 dB μ V/m for peak and 26.01 dB μ V/m for average which is below the limit 74.0 dB μ V/m for peak and 54.0 dB μ V/m for average.


Highest Band Edge 2.4835GHz

Detector mode: Peak

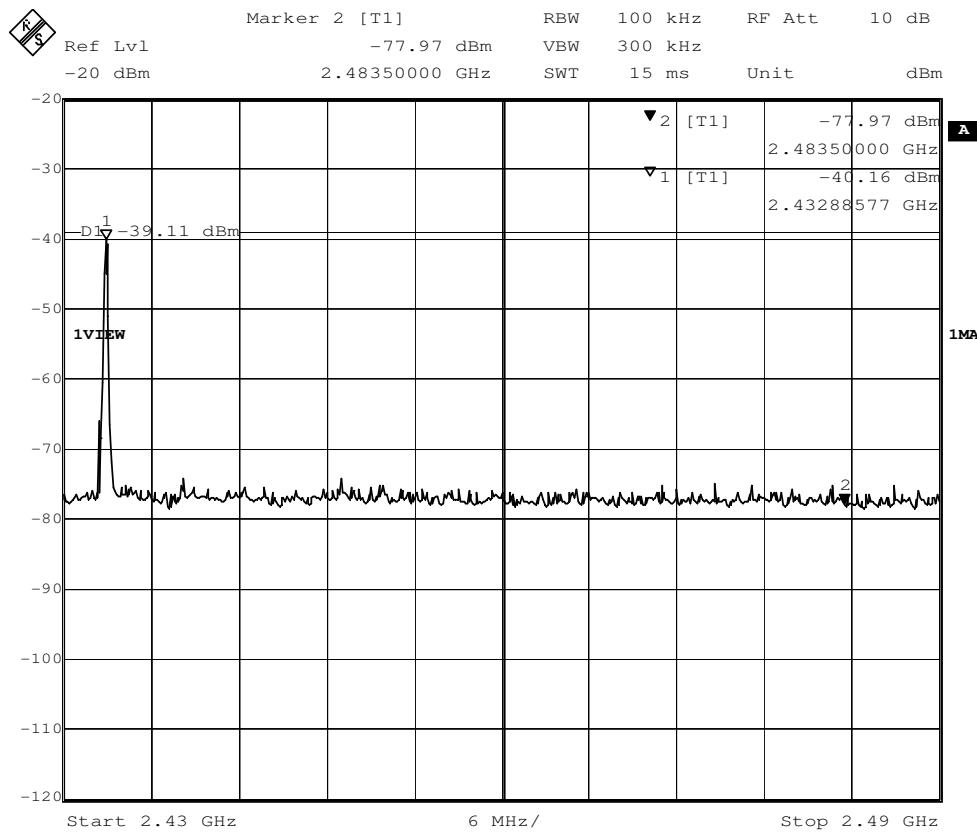

Date: 15.JUN.2011 11:13:01

Detector mode: Average

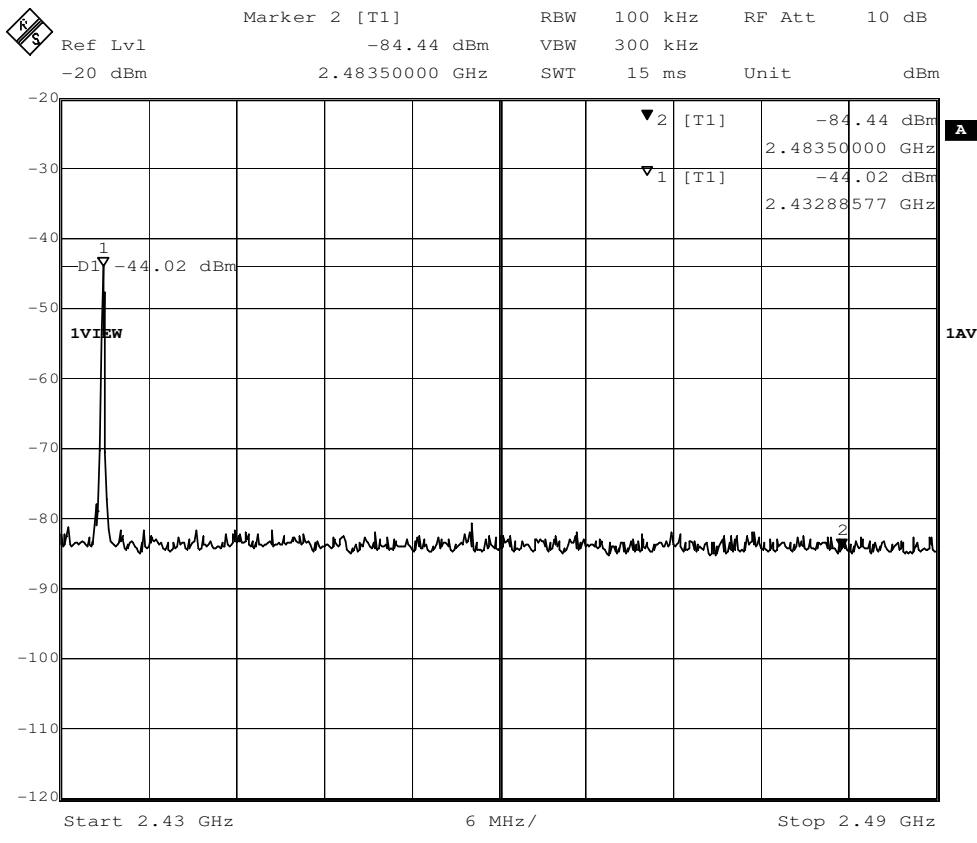

Date: 15.JUN.2011 11:15:30

For 2.4835 GHz bandage checked with 2.433 GHz frequency operated, the delta shown at the plots are -37.81 dB for peak detector mode and -40.42 dB for Average detector mode.

With the peak value 69.63 dB μ V/m and average value at 65.43 dB μ V/m for the fundamental, the spurious emission level at 2.4835 GHz were 31.82 dB μ V/m for peak and 25.01 dB μ V/m for average which is below the limit 74.0 dB μ V/m for peak and 54.0 dB μ V/m for average.

The test result for the Emissions radiated outside of the specified frequency bands; please refer to the section 7.2.1 of this report.

The results: The unit does meet the FCC requirements.

7.5 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Not applicable, since the test applies to equipment with AC or DC mains supply only.

End of the report