



FCC RF Test Report

APPLICANT : Nest Labs Inc
EQUIPMENT : Nest Temperature Sensor
BRAND NAME : Nest Labs
MODEL NAME : A0106
FCC ID : ZQAT50
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 22, 2017 and testing was completed on Jan. 08, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.
No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	24
3.6 Antenna Requirements	28
4 LIST OF MEASURING EQUIPMENT.....	29
5 UNCERTAINTY OF EVALUATION.....	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass
3.1	-	99% Bandwidth	-	Pass
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
-	15.207	AC Conducted Emission	15.207(a)	Not Required
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass

Note: Not required means after assessing, test items are not necessary to carry out.



1 General Description

1.1 Applicant

Nest Labs Inc

3400 Hillview Ave. Pola Alto, CA, 94304, USA

1.2 Product Feature of Equipment Under Test

Bluetooth

Product Specification subjective to this standard	
Sample 1	Nordic IC version is B00. PCB version is ZDT
Sample 2	Nordic IC version is EA0. PCB version is Tripod
Antenna Type	Bluetooth: IFA Antenna

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sportun Site No. TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	12	2426
	39	2480	-	-

2.2 Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz		19.10 dBm
Ch12	2426MHz		18.72 dBm
Ch39	2480MHz		18.64 dBm


The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Sample 1, Y plane for Sample 2) were recorded in this report.



The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH12_2426 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps for Sample 1 Mode 2: Bluetooth Tx CH12_2426 MHz_1Mbps for Sample 1 Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps for Sample 1 Mode 4: Bluetooth Tx CH39_2480 MHz_1Mbps for Sample 2
Note: According to the difference between sample 1 and sample 2, we found the worst case from sample 1's RSE test result and verified sample 2 above 1GHz at high channel.	

2.3 Connection Diagram of Test System

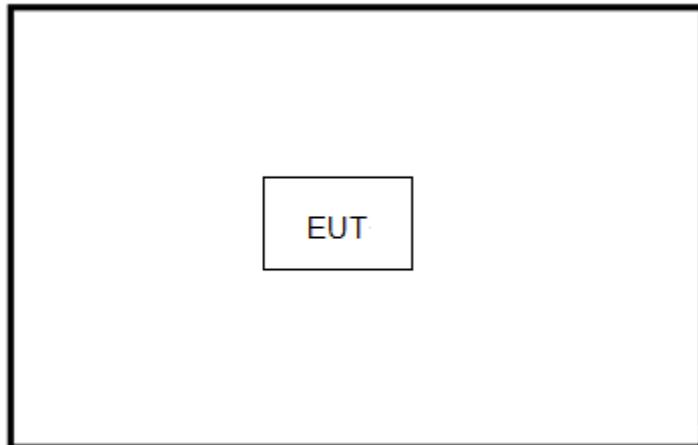



2.4 EUT Operation Test Setup

The RF test items, utility "Putty" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

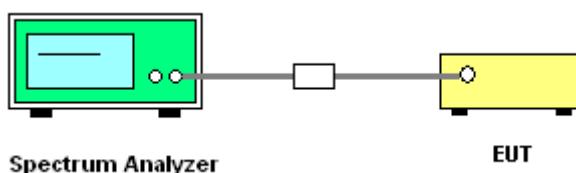

3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

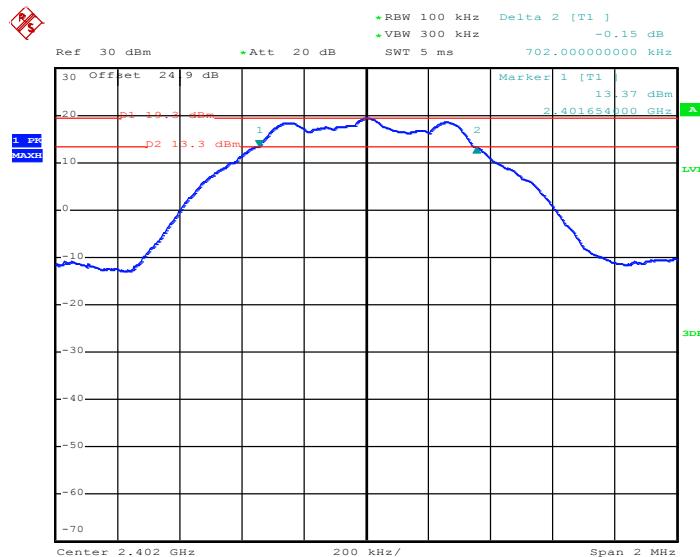


Date: 29.DEC.2017 16:53:01

6 dB Bandwidth Plot on Channel 12

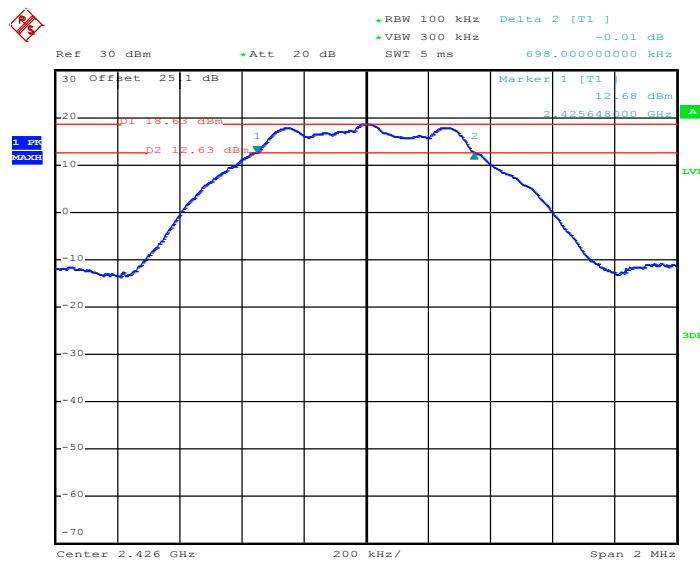

Date: 8.JAN.2018 10:22:47

6 dB Bandwidth Plot on Channel 39

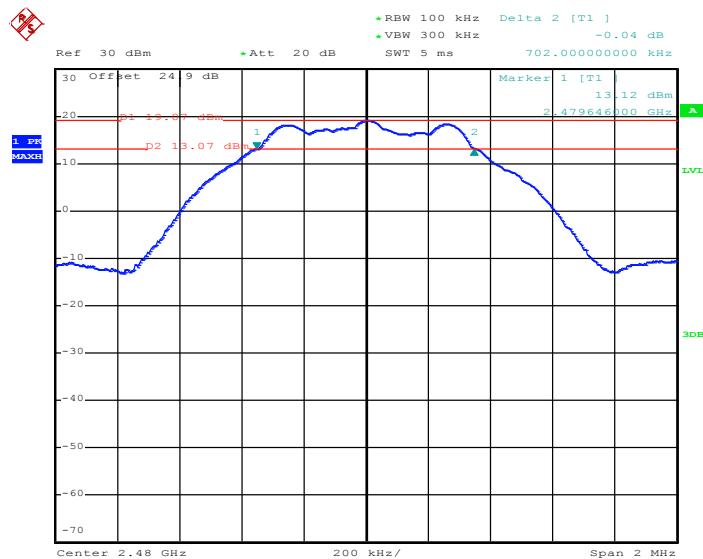


Date: 29.DEC.2017 17:18:25

3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

99% Bandwidth Plot on Channel 00

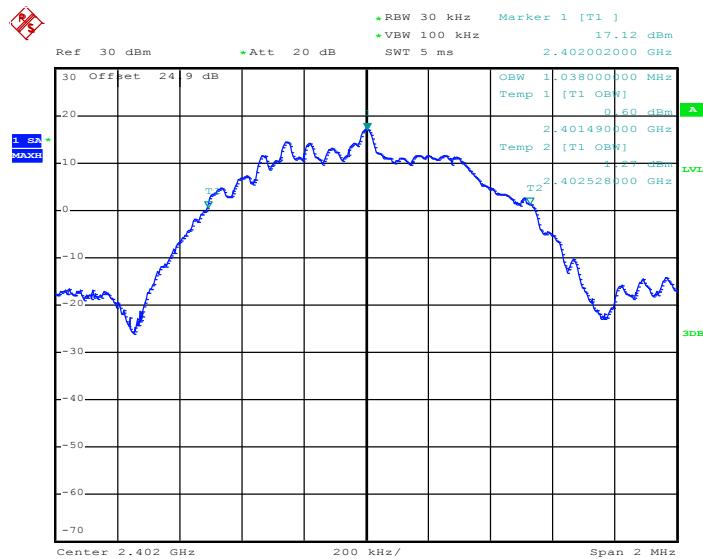


Date: 29.DEC.2017 17:08:10

99% Occupied Bandwidth Plot on Channel 12

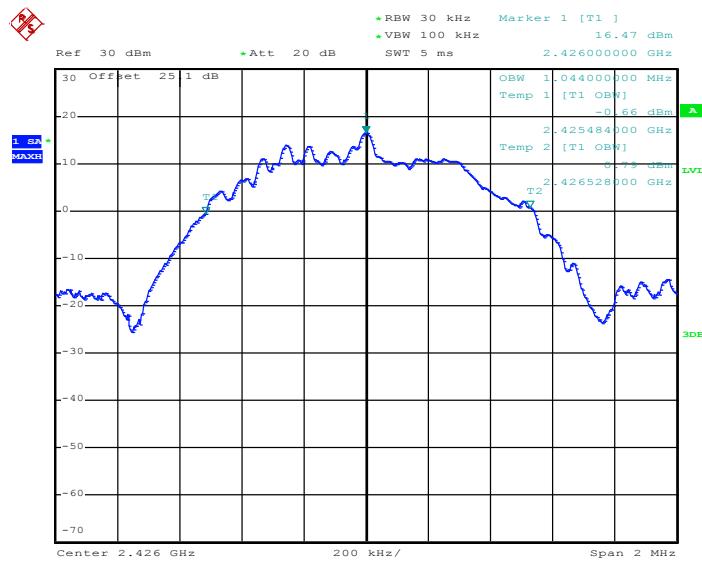

Date: 8.JAN.2018 10:48:14

99% Occupied Bandwidth Plot on Channel 39

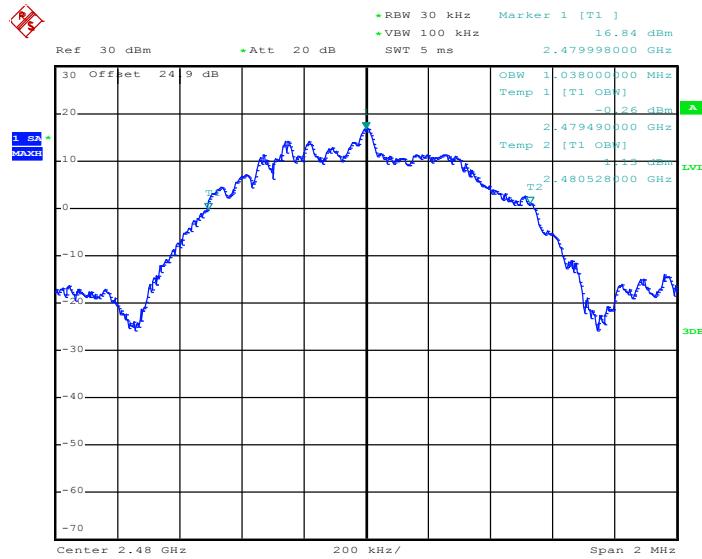

Date: 29.DEC.2017 17:21:28

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

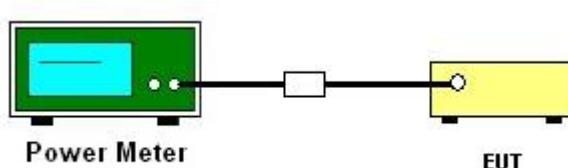

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

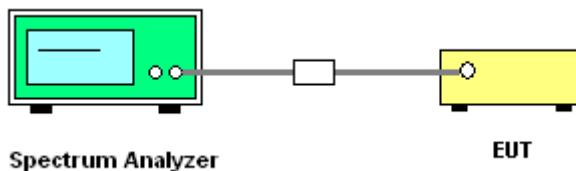


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

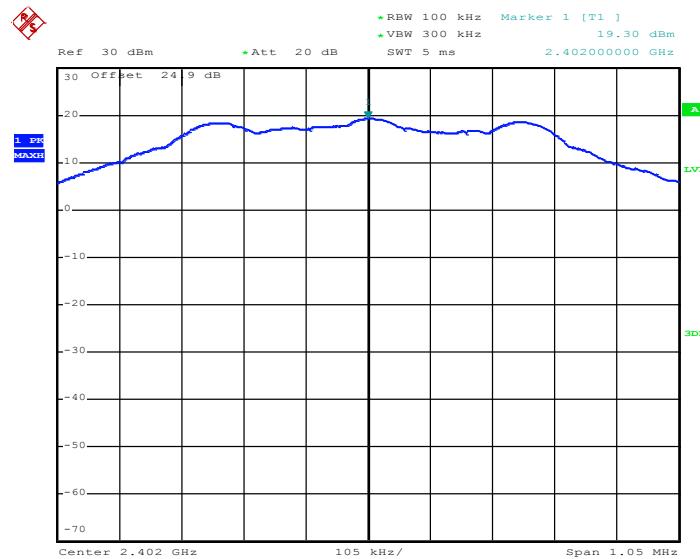


Date: 29.DEC.2017 16:58:56

PSD 100kHz Plot on Channel 12

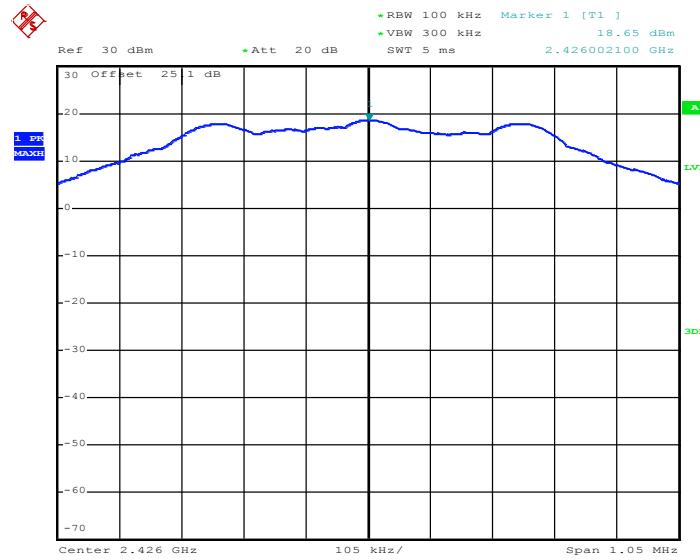

Date: 8.JAN.2018 10:43:09


PSD 100kHz Plot on Channel 39

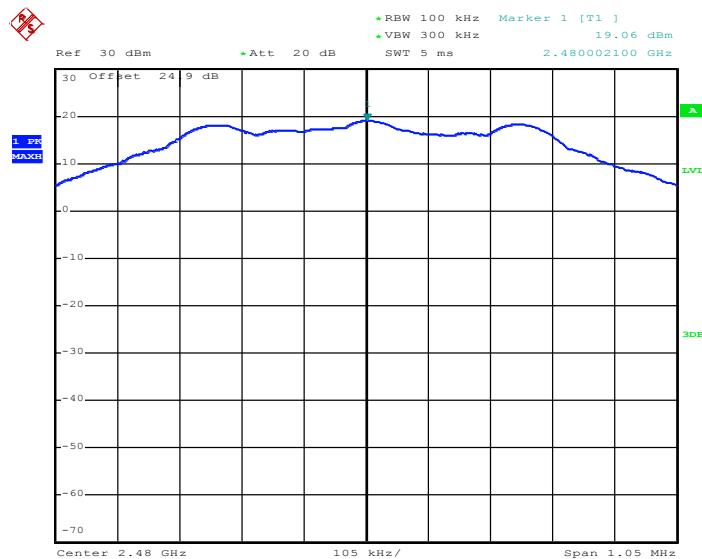

Date: 29.DEC.2017 17:19:44

3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

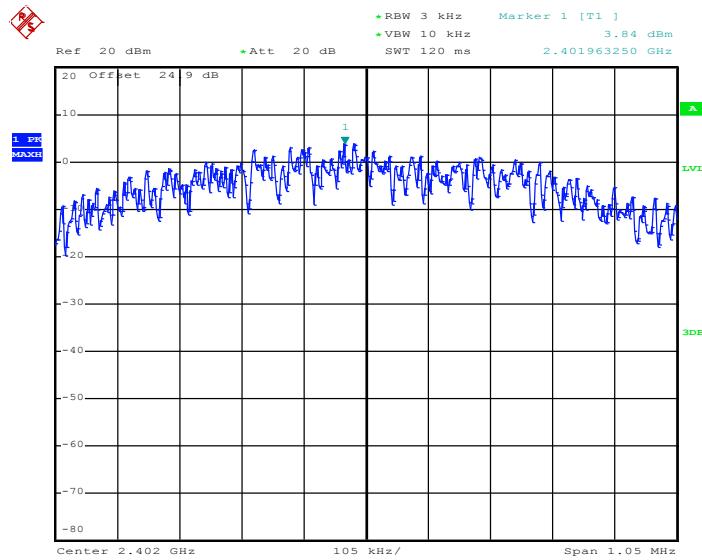

Date: 29.DEC.2017 16:58:07




PSD 3kHz Plot on Channel 12

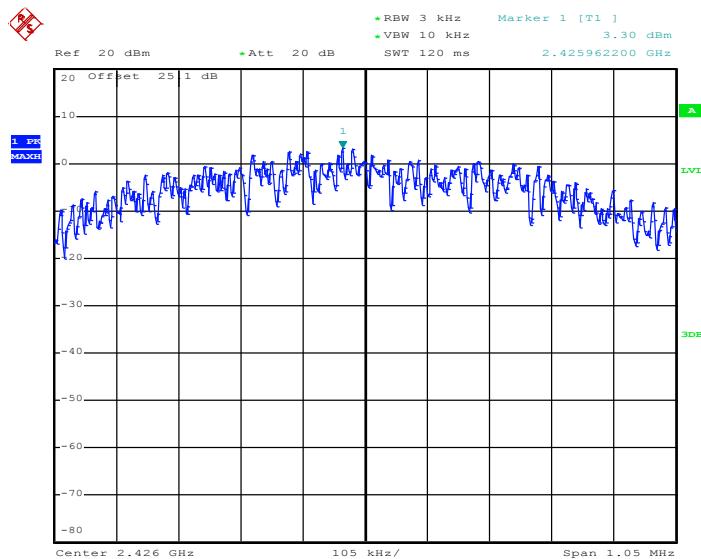

Date: 8.JAN.2018 10:27:32

PSD 3kHz Plot on Channel 39

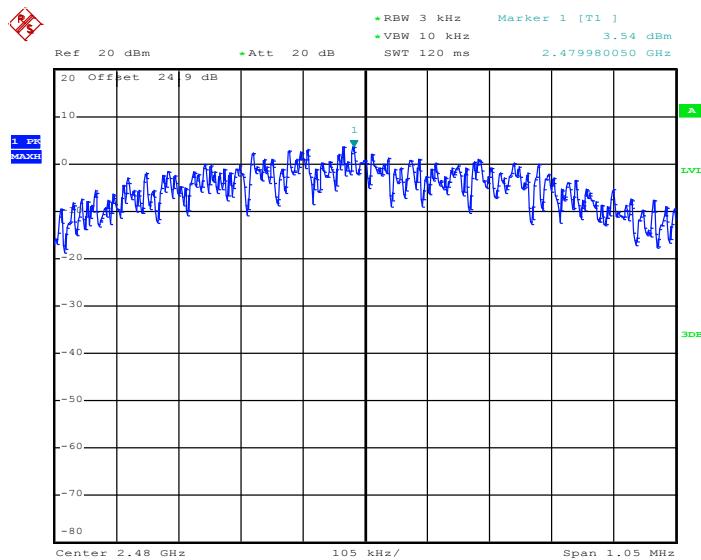

Date: 29.DEC.2017 17:18:58

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

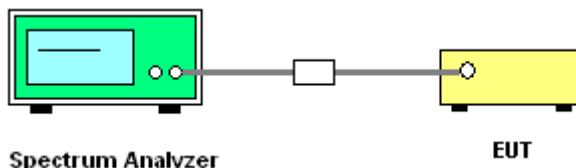


3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

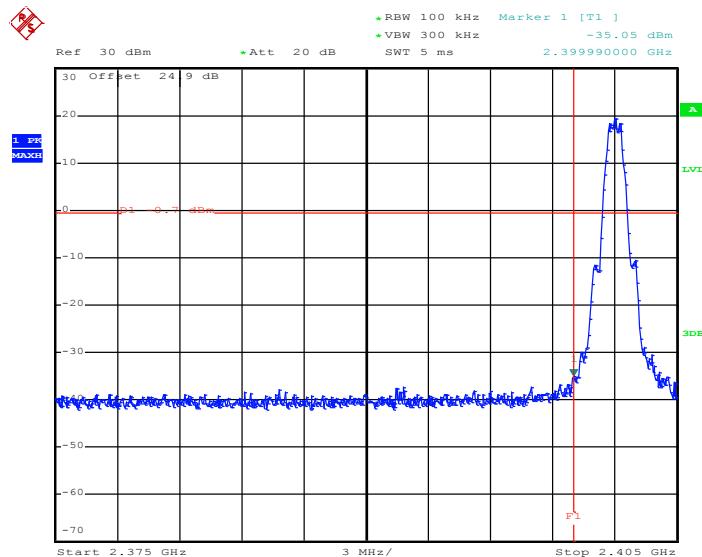

Date: 29.DEC.2017 17:26:07


High Band Edge Plot on Channel 39

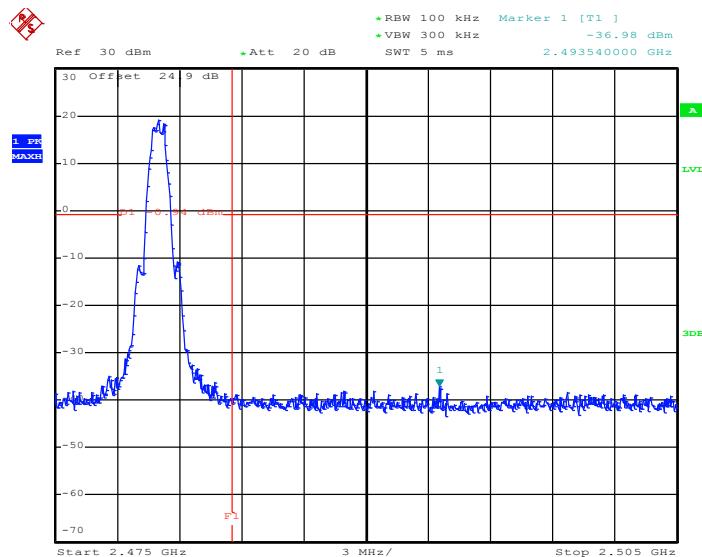

Date: 29.DEC.2017 17:20:05


3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

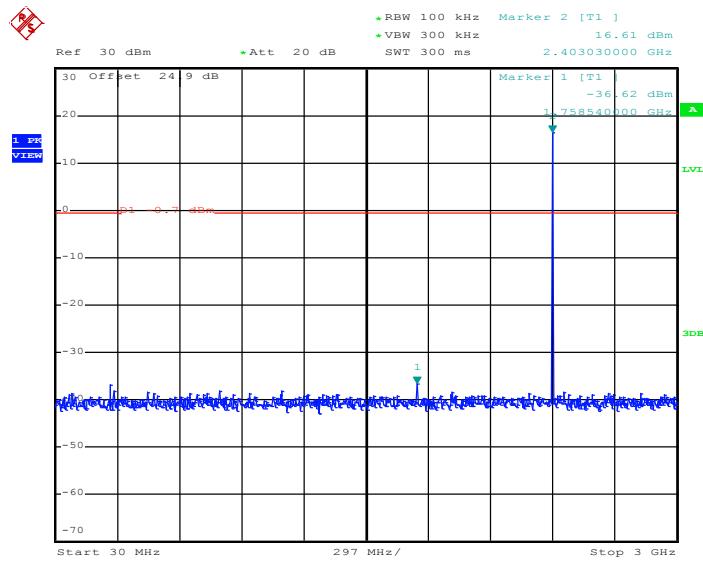

Date: 29.DEC.2017 17:07:33


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

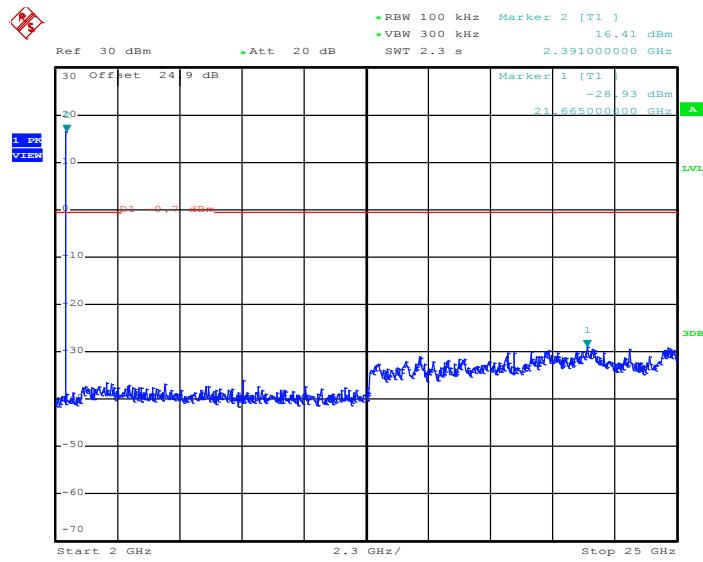

Date: 29.DEC.2017 17:07:42

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 12

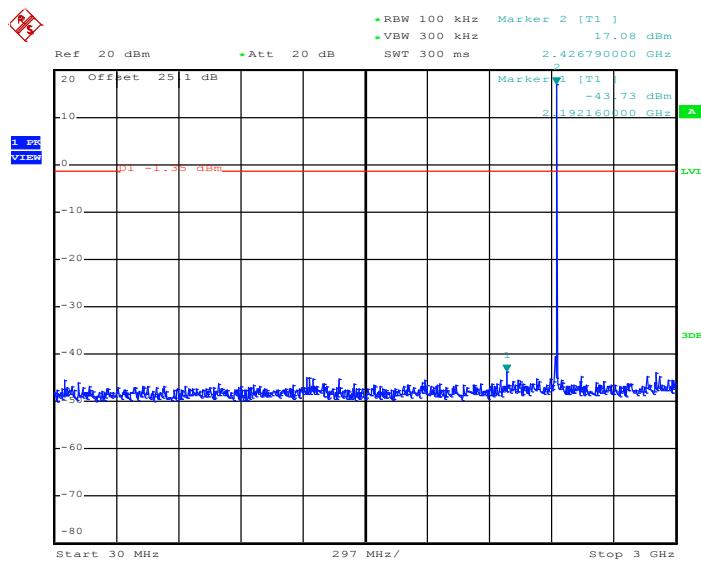

Date: 8.JAN.2018 11:43:12

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 12

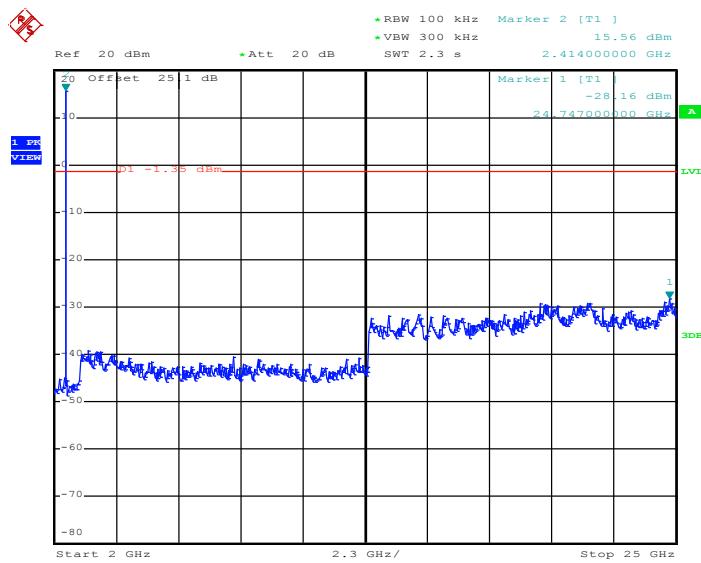

Date: 8.JAN.2018 11:43:20

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 39

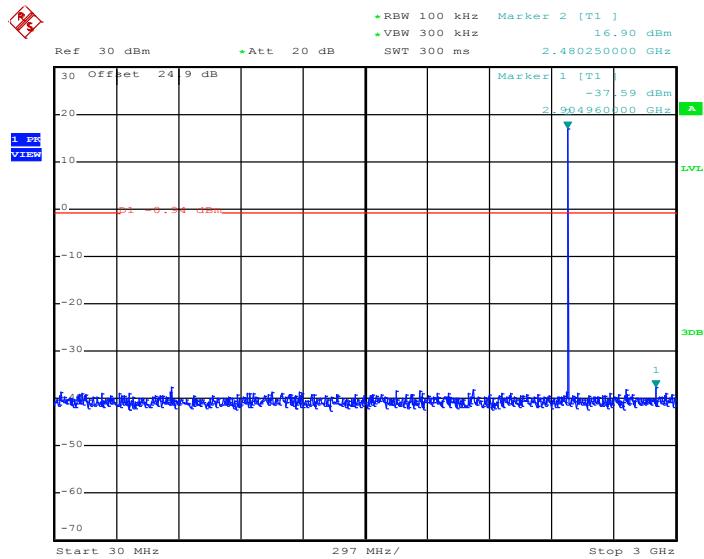

Date: 29.DEC.2017 17:20:20

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

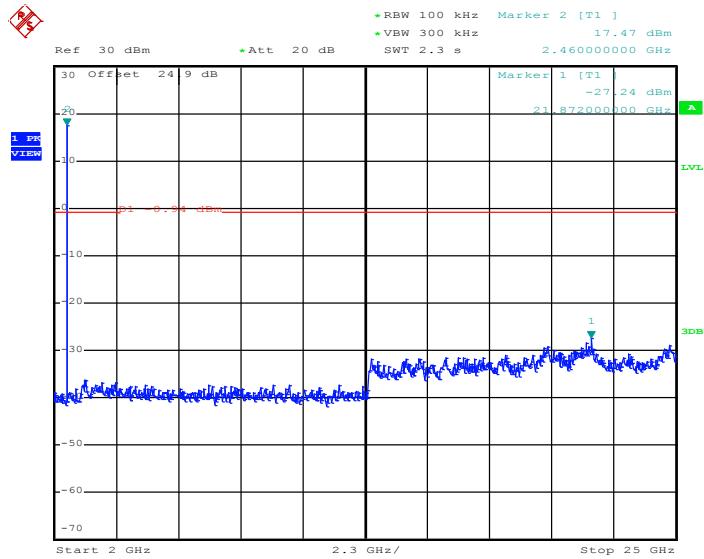

Date: 29.DEC.2017 17:20:29



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

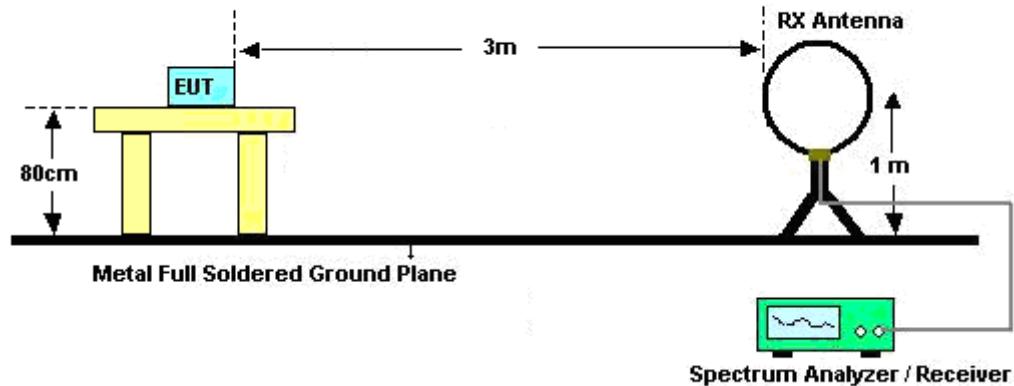

For radiated emissions from 30MHz to 1GHz

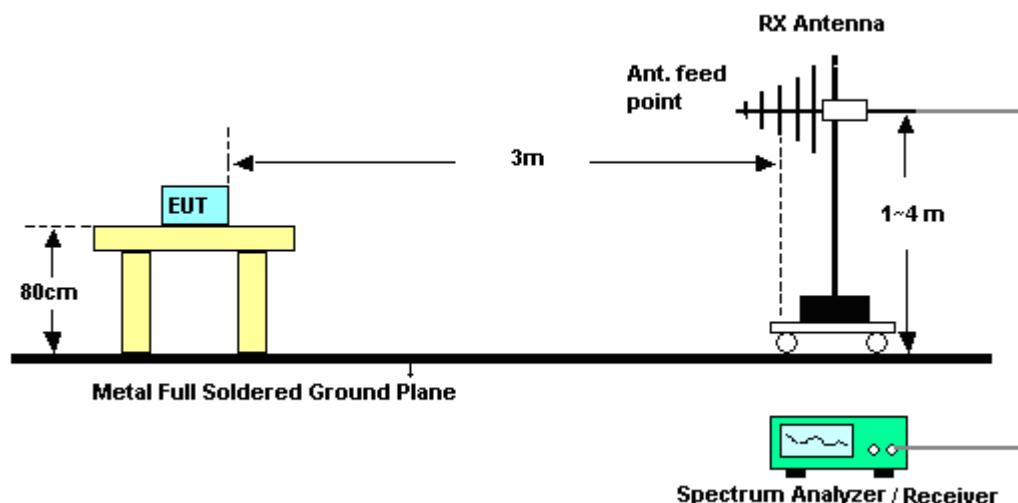

For radiated emissions above 1GHz

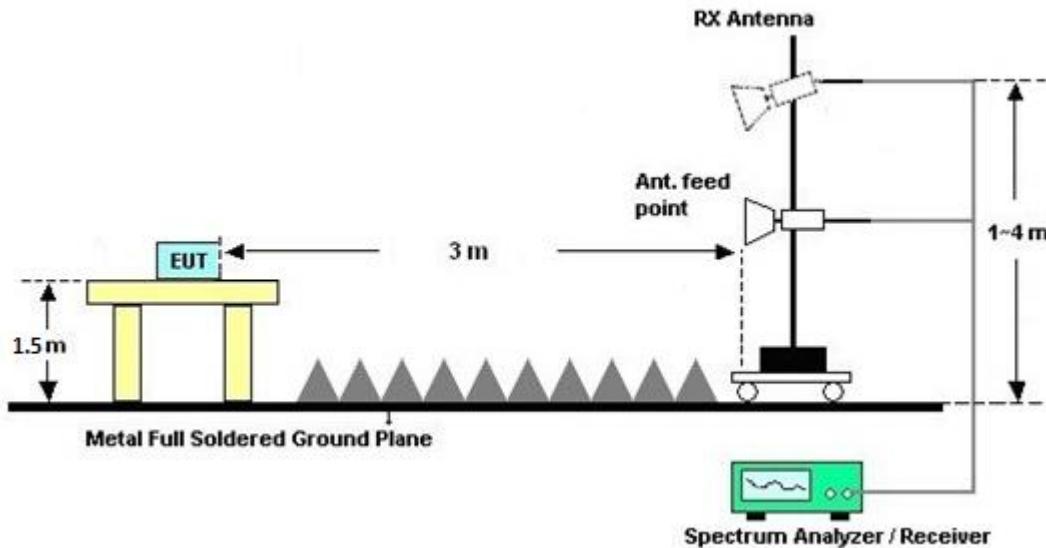

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 20, 2017	Dec. 26, 2017~ Jan. 08, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 20, 2017	Dec. 26, 2017~ Jan. 08, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2017	Dec. 26, 2017~ Jan. 08, 2018	Nov. 20, 2018	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 16, 2017	Dec. 26, 2017~ Jan. 08, 2018	Oct. 15, 2018	Conducted (TH05-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Dec. 27, 2017~ Jan. 05, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Dec. 27, 2017~ Jan. 05, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0602	30MHz~1GHz	Oct. 14, 2017	Dec. 27, 2017~ Jan. 05, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	Dec. 27, 2017~ Jan. 05, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Dec. 27, 2017~ Jan. 05, 2018	Nov. 22, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 10, 2016	Dec. 27, 2017~ Jan. 05, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2017	Dec. 27, 2017~ Jan. 05, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Dec. 27, 2017~ Jan. 05, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Dec. 27, 2017~ Jan. 05, 2018	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Dec. 27, 2017~ Jan. 05, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	Dec. 07, 2017	Dec. 27, 2017~ Jan. 05, 2018	Dec. 06, 2018	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Reece Lin			Temperature:	21~25		°C
Test Date:	2017/12/26~2018/01/08			Relative Humidity:	51~54		%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.038	0.702	0.50	Pass
BLE	1Mbps	1	12	2426	1.044	0.698	0.50	Pass
BLE	1Mbps	1	39	2480	1.038	0.702	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	19.10	30.00	2.46	21.56	36.00	Pass
BLE	1Mbps	1	12	2426	18.72	30.00	2.46	21.18	36.00	Pass
BLE	1Mbps	1	39	2480	18.64	30.00	2.46	21.10	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u> <u>(Reporting Only)</u>						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.05	18.99
BLE	1Mbps	1	12	2426	2.05	18.65
BLE	1Mbps	1	39	2480	2.05	18.51

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	19.30	3.84	2.46	8.00	Pass
BLE	1Mbps	1	12	2426	18.65	3.30	2.46	8.00	Pass
BLE	1Mbps	1	39	2480	19.06	3.54	2.46	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Hao Hsu, Jacky Hung, and Ken Wu	Temperature :		23~27°C	
		Relative Humidity :		53~58%	

<For Sample 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2388.54	54.8	-19.2	74	44.98	27.13	6.36	33.6	120	297	P	H
		2390	44.89	-9.11	54	35.06	27.13	6.36	33.59	120	297	A	H
	*	2402	115.96	-	-	106.13	27.13	6.36	33.59	120	297	P	H
	*	2402	115.43	-	-	105.6	27.13	6.36	33.59	120	297	A	H
		2355.255	52.78	-21.22	74	43.12	27.04	6.29	33.6	397	207	P	V
		2389.695	43.39	-10.61	54	33.57	27.13	6.36	33.6	397	207	A	V
	*	2402	112.08	-	-	102.25	27.13	6.36	33.59	397	207	P	V
	*	2402	111.48	-	-	101.65	27.13	6.36	33.59	397	207	A	V
BLE CH 12 2426MHz		2374.05	54.54	-19.46	74	44.83	27.09	6.29	33.6	149	296	P	H
		2378.1	43.83	-10.17	54	34.12	27.09	6.29	33.6	149	296	A	H
	*	2426	115.72	-	-	105.79	27.22	6.37	33.59	149	296	P	H
	*	2426	115.14	-	-	105.21	27.22	6.37	33.59	149	296	A	H
		2490.72	52.75	-21.25	74	42.61	27.4	6.39	33.58	149	296	P	H
		2489.44	43.72	-10.28	54	33.58	27.4	6.39	33.58	149	296	A	H
		2386.05	52.05	-21.95	74	42.23	27.13	6.36	33.6	392	210	P	V
		2373.75	43.14	-10.86	54	33.43	27.09	6.29	33.6	392	210	A	V
	*	2426	112.59	-	-	102.66	27.22	6.37	33.59	392	210	P	V
	*	2426	112.02	-	-	102.09	27.22	6.37	33.59	392	210	A	V
		2486.88	52.04	-21.96	74	41.94	27.36	6.39	33.58	392	210	P	V
		2496	43.17	-10.83	54	33.02	27.4	6.39	33.57	392	210	A	V



BLE CH 39 2480MHz	*	2480	115.95	-	-	105.86	27.36	6.38	33.58	113	293	P	H
	*	2480	115.38	-	-	105.29	27.36	6.38	33.58	113	293	A	H
		2483.52	64.16	-9.84	74	54.07	27.36	6.38	33.58	113	293	P	H
		2483.52	52.63	-1.37	54	42.54	27.36	6.38	33.58	113	293	A	H
	*	2480	109.77	-	-	99.68	27.36	6.38	33.58	329	241	P	V
	*	2480	109.04	-	-	98.95	27.36	6.38	33.58	329	241	A	V
		2483.52	59.53	-14.47	74	49.44	27.36	6.38	33.58	329	241	P	V
		2483.56	48.5	-5.5	54	38.41	27.36	6.38	33.58	329	241	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	52.3	-21.7	74	69.55	31.26	9.6	58.54	100	66	P	H
		4804	49	-5	54	66.25	31.26	9.6	58.54	100	66	A	H
		4804	51.01	-22.99	74	68.26	31.26	9.6	58.54	112	294	P	V
		4804	47.36	-6.64	54	64.61	31.26	9.6	58.54	112	294	A	V
BLE CH 12 2426MHz		4852	52.29	-21.71	74	69.46	31.35	9.58	58.53	100	66	P	H
		4852	49.45	-4.55	54	66.62	31.35	9.58	58.53	100	66	A	H
		7278	45.45	-28.55	74	56.41	36.21	11.32	58.98	100	0	P	H
		4852	51.16	-22.84	74	68.33	31.35	9.58	58.53	100	322	P	V
		4852	48.44	-5.56	54	65.61	31.35	9.58	58.53	100	322	A	V
		7278	47.43	-26.57	74	58.39	36.21	11.32	58.98	100	0	P	V
BLE CH 39 2480MHz		4960	50.93	-23.07	74	67.93	31.54	9.53	58.51	100	81	P	H
		4960	47.09	-6.91	54	64.09	31.54	9.53	58.51	100	81	A	H
		7440	44.95	-29.05	74	55.48	36.59	11.34	58.84	100	0	P	H
		4960	48.55	-25.45	74	65.55	31.54	9.53	58.51	100	0	P	V
		7440	46.12	-27.88	74	56.65	36.59	11.34	58.84	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.			
														(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		40.8	21.42	-18.58	40	34.4	18.68	0.82	32.49	-	-	-	-	P	H										
		47.55	20.4	-19.6	40	36.56	15.31	1.02	32.49	-	-	-	-	P	H										
		122.88	23.1	-20.4	43.5	36.75	17.26	1.51	32.46	-	-	-	-	P	H										
		795.6	30.18	-15.82	46	30.62	28.1	3.49	32.19	-	-	-	-	P	H										
		861.4	31.63	-14.37	46	30.63	29.04	3.67	31.86	-	-	-	-	P	H										
		953.8	32.88	-13.12	46	29.21	30.76	3.9	31.16	100	0	0	0	P	H										
		40.8	36.26	-3.74	40	49.24	18.68	0.82	32.49	100	0	0	0	P	V										
		47.28	32.47	-7.53	40	48.63	15.31	1.02	32.49	-	-	-	-	P	V										
		122.88	22.42	-21.08	43.5	36.07	17.26	1.51	32.46	-	-	-	-	P	V										
		754.3	30.26	-15.74	46	31.14	27.86	3.44	32.31	-	-	-	-	P	V										
		859.3	31.56	-14.44	46	30.59	29.02	3.67	31.87	-	-	-	-	P	V										
		955.2	33.25	-12.75	46	29.46	30.87	3.9	31.15	-	-	-	-	P	V										
Remark	1. No other spurious found. 2. All results are PASS against limit line.																								



<For Sample 2>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz	*	2480	112.9	-	-	102.81	27.36	6.38	33.58	370	0	P	H
	*	2480	112.17	-	-	102.08	27.36	6.38	33.58	370	0	A	H
		2483.56	60.4	-13.6	74	50.31	27.36	6.38	33.58	370	0	P	H
		2483.56	49.61	-4.39	54	39.52	27.36	6.38	33.58	370	0	A	H
	*	2480	114.66	-	-	104.57	27.36	6.38	33.58	131	293	P	V
	*	2480	113.91	-	-	103.82	27.36	6.38	33.58	131	293	A	V
		2483.56	61.84	-12.16	74	51.75	27.36	6.38	33.58	131	293	P	V
		2483.52	50.8	-3.2	54	40.71	27.36	6.38	33.58	131	293	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	51.46	-22.54	74	68.46	31.54	9.53	58.51	100	156	P	H
		4960	47.87	-6.13	54	64.87	31.54	9.53	58.51	100	156	A	H
		7440	45.58	-28.42	74	56.11	36.59	11.34	58.84	100	0	P	H
		4960	49.94	-24.06	74	66.94	31.54	9.53	58.51	100	0	P	V
		7440	45.09	-28.91	74	55.62	36.59	11.34	58.84	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB μ V/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB μ V) – 35.86 (dB)

= 55.45 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 55.45(dB μ V/m) – 74(dB μ V/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB μ V) – 35.86 (dB)

= 43.54 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 43.54(dB μ V/m) – 54(dB μ V/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Hao Hsu, Jacky Hung, and Ken Wu	Temperature :	23~27°C
		Relative Humidity :	53~58%

Note symbol





-L	Low channel location
-R	High channel location





<For Sample 1>

2.4GHz 2400~2483.5MHz


BLE (Band Edge @ 3m)

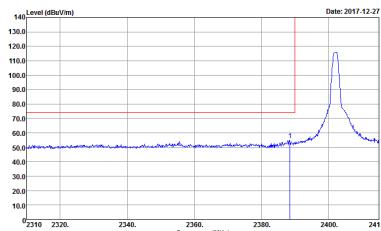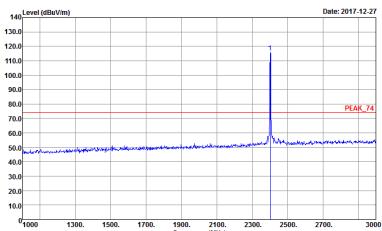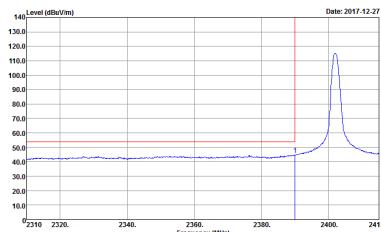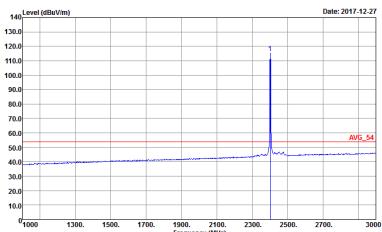
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK BE 74 3m HORN 91200-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 91200-HF HORIZONTAL
Avg.	 Site : 03CH11-HY Condition : AVG BE 54 3m HORN 91200-HF HORIZONTAL	 Site : 03CH11-HY Condition : AVG 54 3m HORN 91200-HF HORIZONTAL

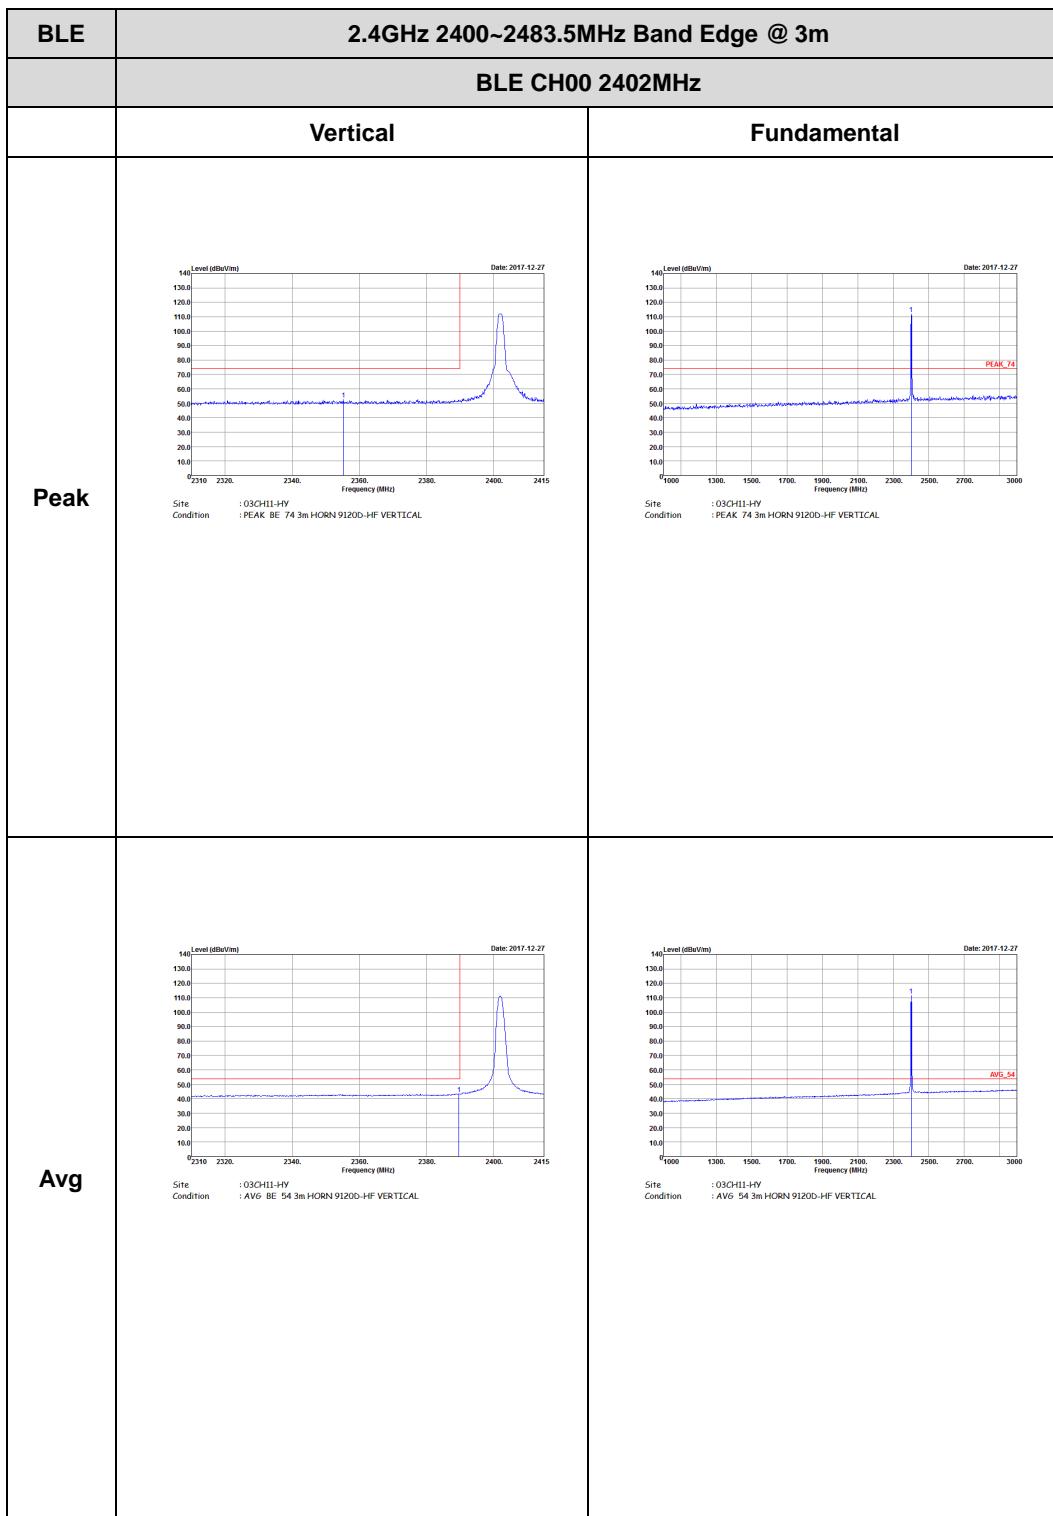


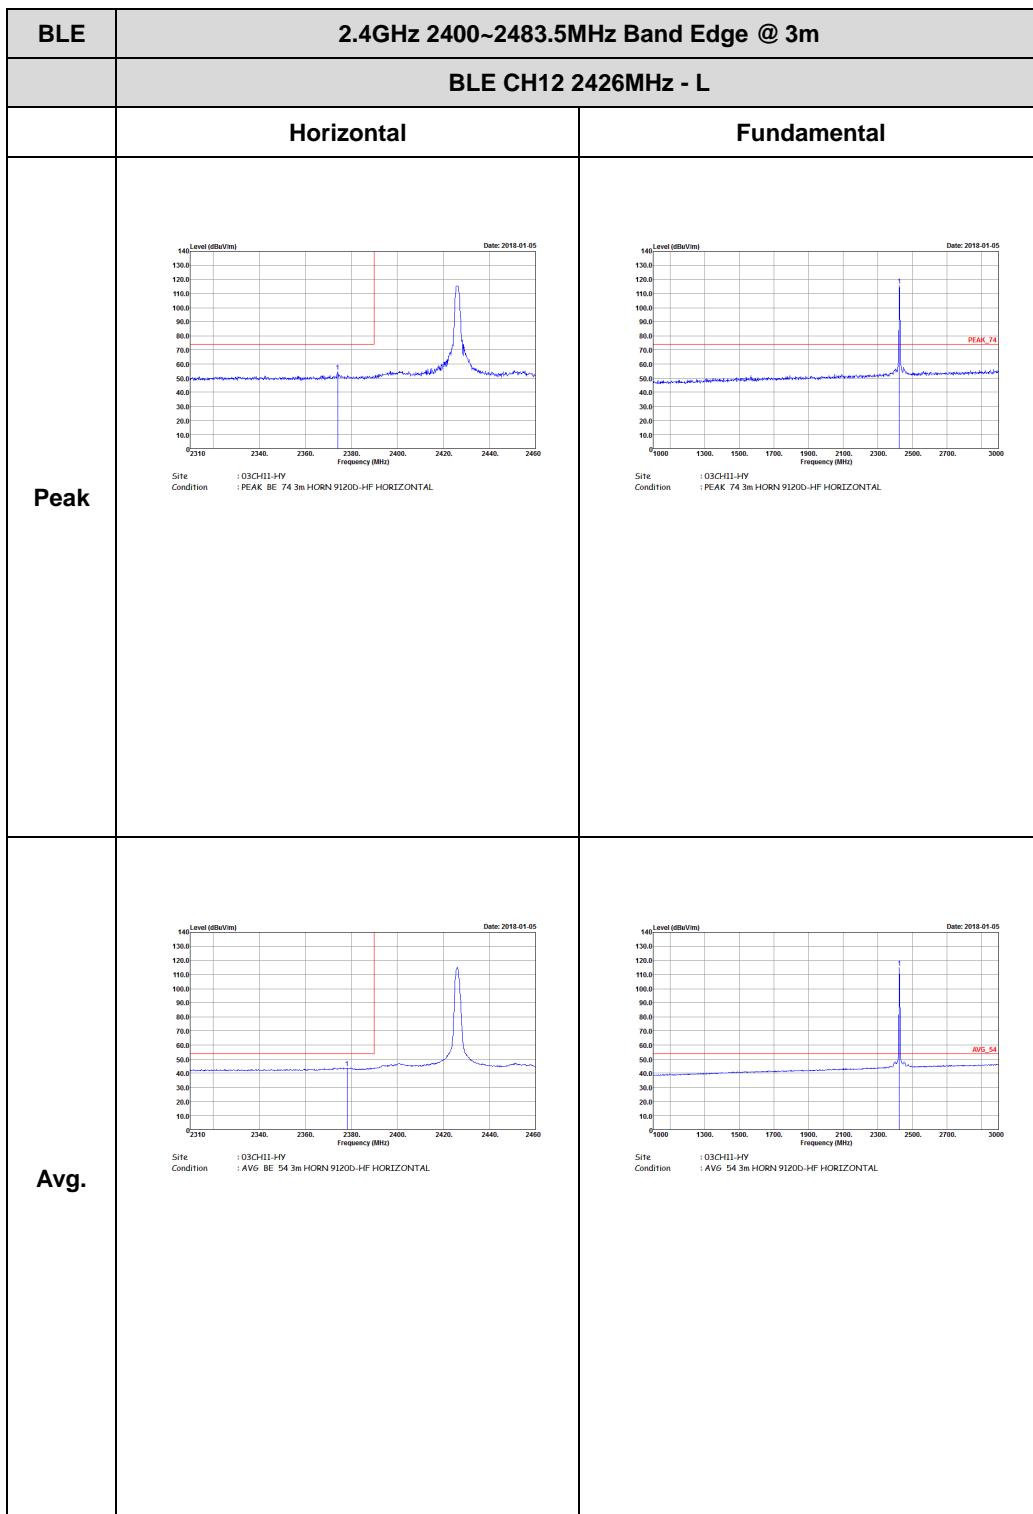


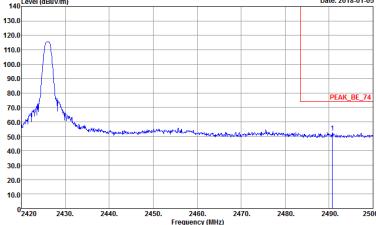



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH12 2426MHz - R	
	Horizontal	Fundamental
Peak	 <p>Level (dBmV/m)</p> <p>Date: 2018-01-05</p> <p>PEAK_BE_74</p> <p>2420 2430 2440 2450 2460 2470 2480 2490 2500 Frequency (MHz)</p> <p>Site :03CH11-HY Condition :PEAK BE_74 3m HORN 9120D-HF HORIZONTAL</p>	Left blank
Avg.	 <p>Level (dBmV/m)</p> <p>Date: 2018-01-05</p> <p>AVG_BE_54</p> <p>2420 2430 2440 2450 2460 2470 2480 2490 2500 Frequency (MHz)</p> <p>Site :03CH11-HY Condition :AVG BE_54 3m HORN 9120D-HF HORIZONTAL</p>	Left blank

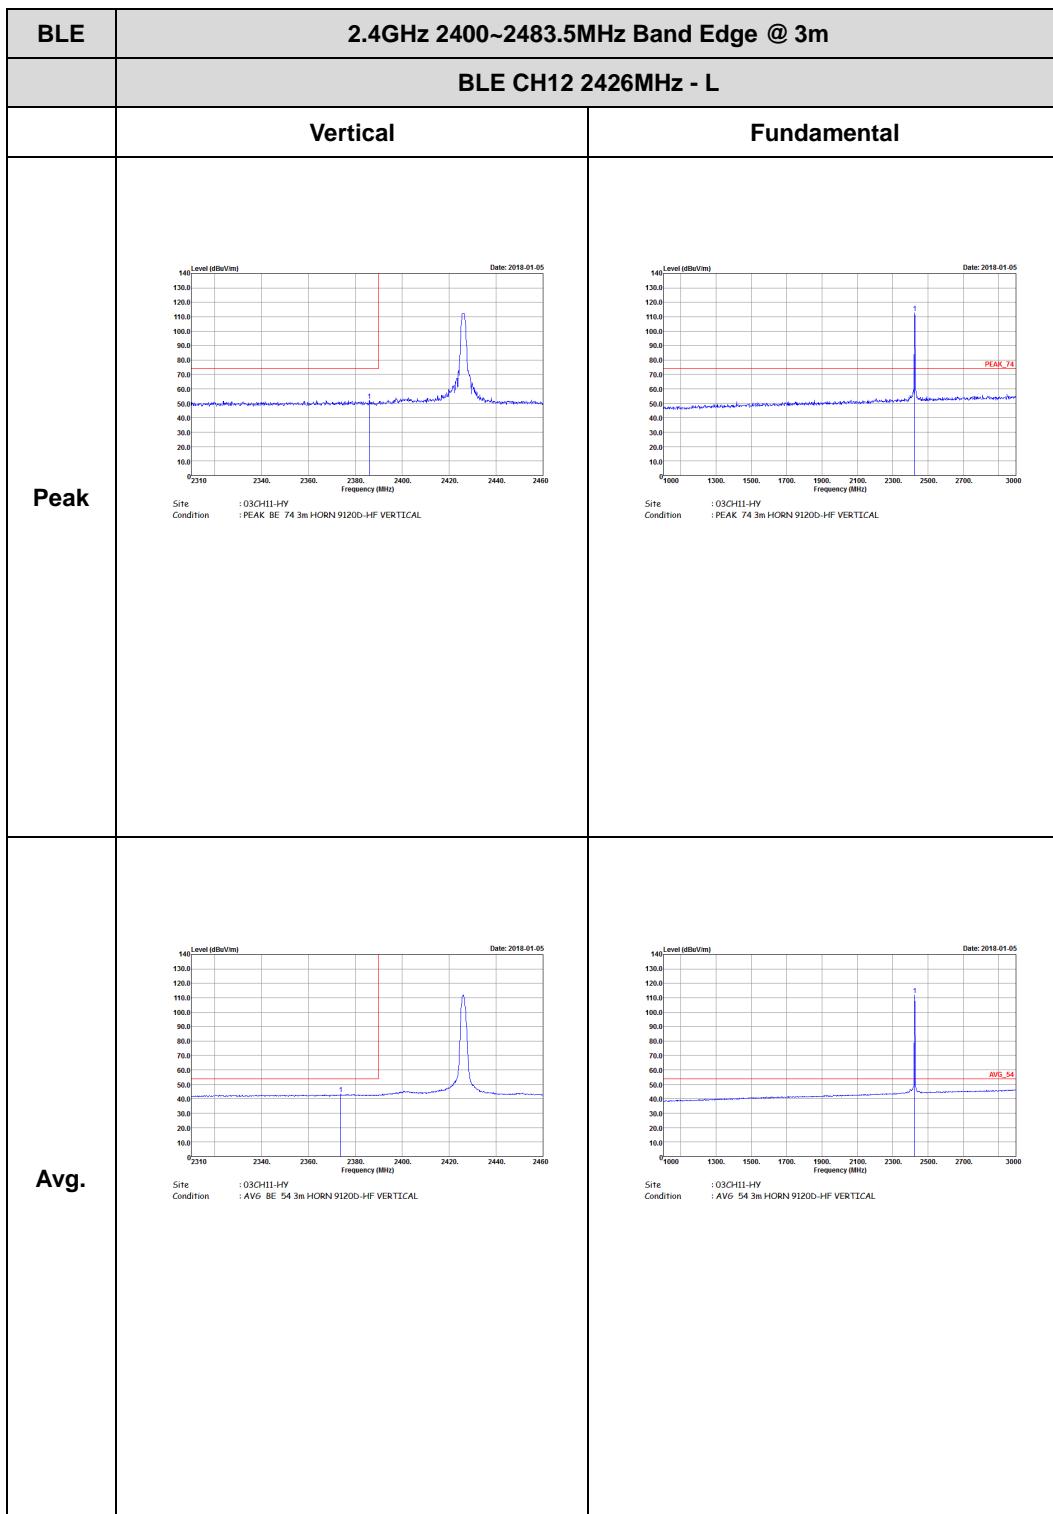

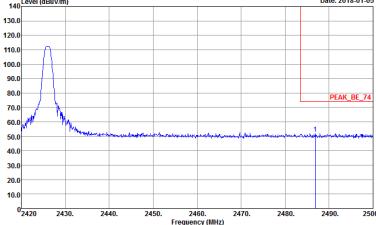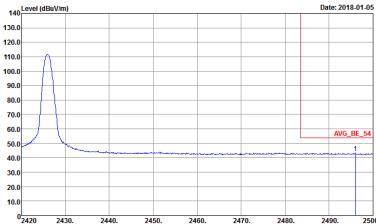

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH12 2426MHz - R	
	Vertical	Fundamental
Peak	 <p>Level (dBmV/m)</p> <p>Date: 2018-01-05</p> <p>2420 2430 2440 2450 2460 2470 2480 2490 2500 Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site :03CH11-HY Condition :PEAK BE_74 3m HORN 9120D-HF VERTICAL</p>	Left blank
Avg.	 <p>Level (dBmV/m)</p> <p>Date: 2018-01-05</p> <p>2420 2430 2440 2450 2460 2470 2480 2490 2500 Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site :03CH11-HY Condition :AVG BE_54 3m HORN 9120D-HF VERTICAL</p>	Left blank


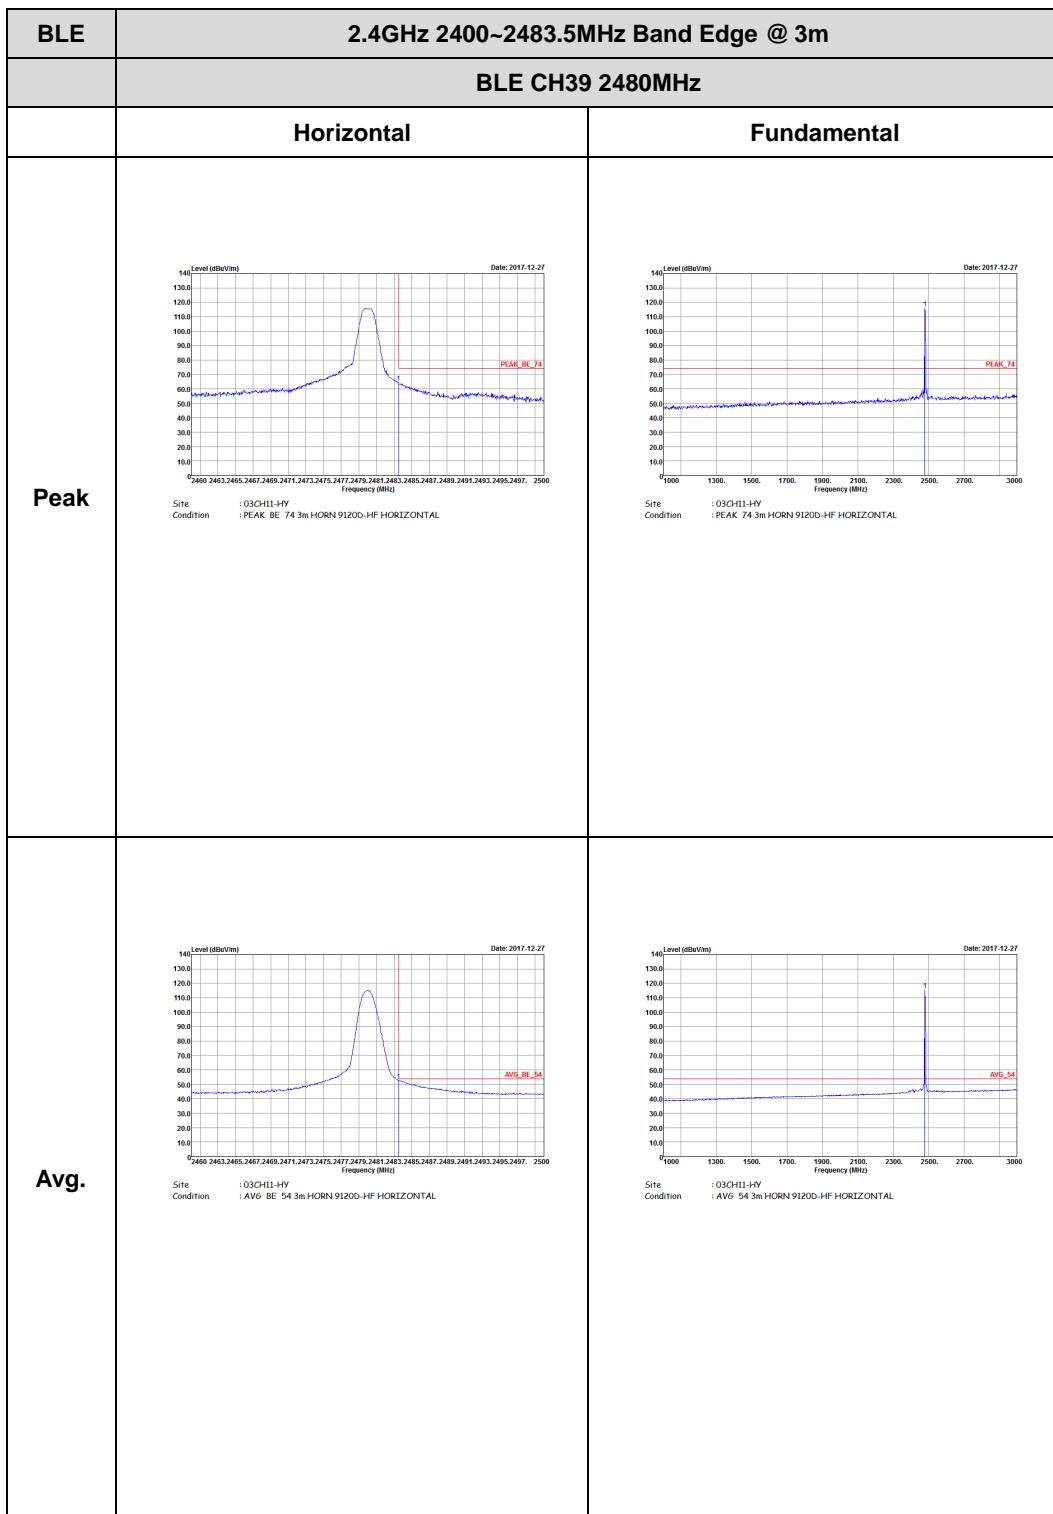


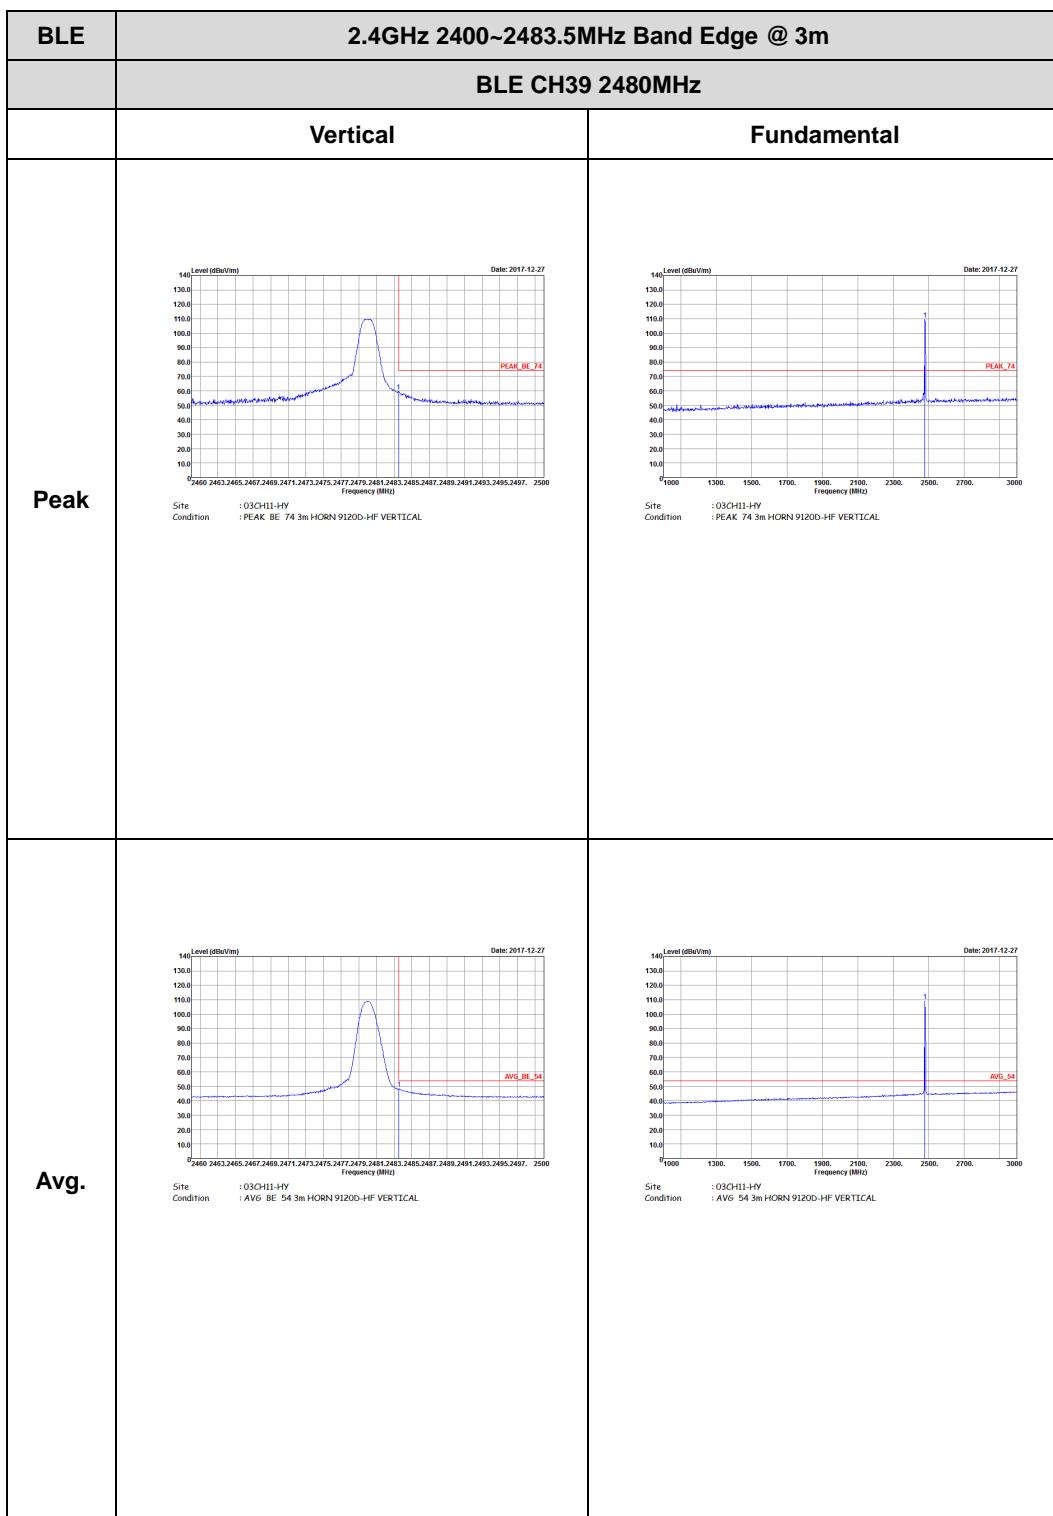





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

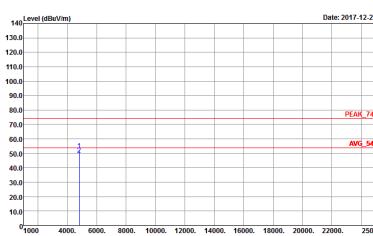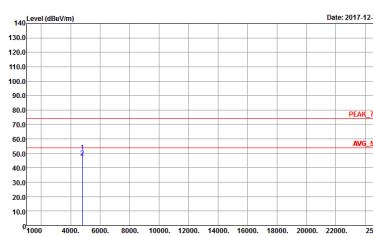BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Level (dBuV/m) Date: 2017-12-27</p> <p>Site Condition : 03CH11-HY : PEAK 74 3m HORN 9120D-HF HORIZONTAL</p> <p>Frequency (MHz) 1000 4000 6000 8000 10000 12000 14000 16000 18000 20000 22000 25000</p> <p>PEAK 74</p> <p>APG 54</p>	 <p>Level (dBuV/m) Date: 2017-12-27</p> <p>Site Condition : 03CH11-HY : PEAK 74 3m HORN 9120D-HF VERTICAL</p> <p>Frequency (MHz) 1000 4000 6000 8000 10000 12000 14000 16000 18000 20000 22000 25000</p> <p>PEAK 74</p> <p>APG 54</p>


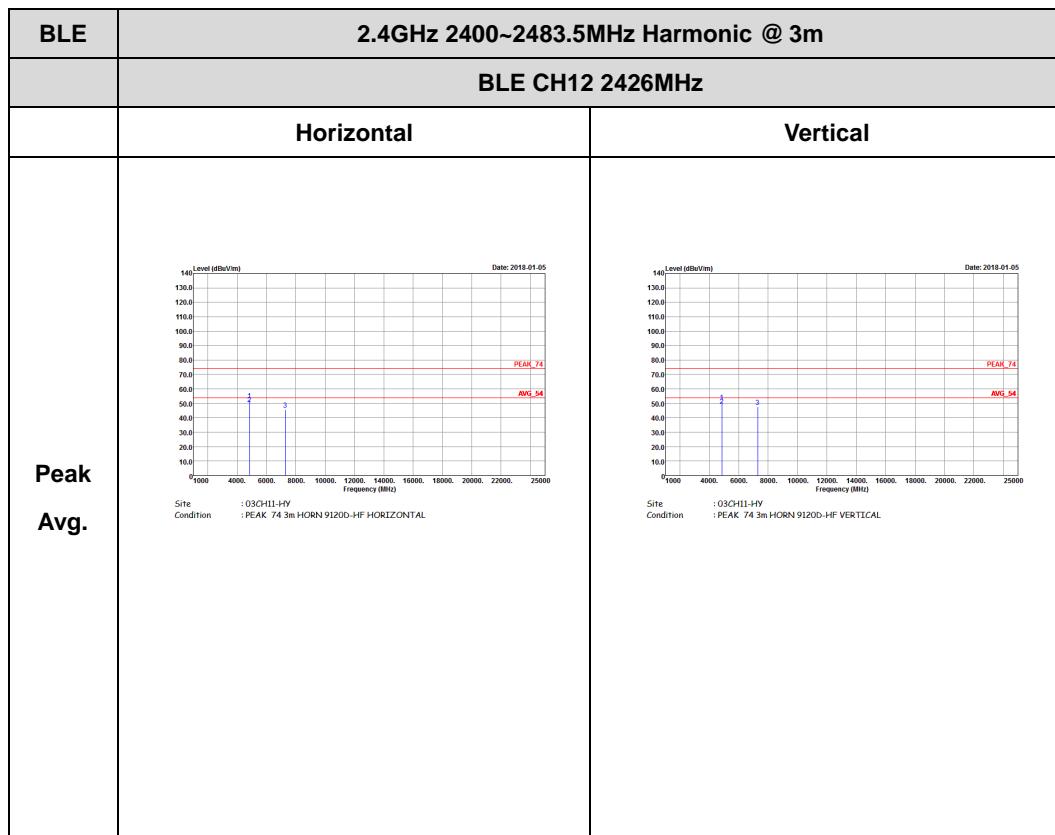


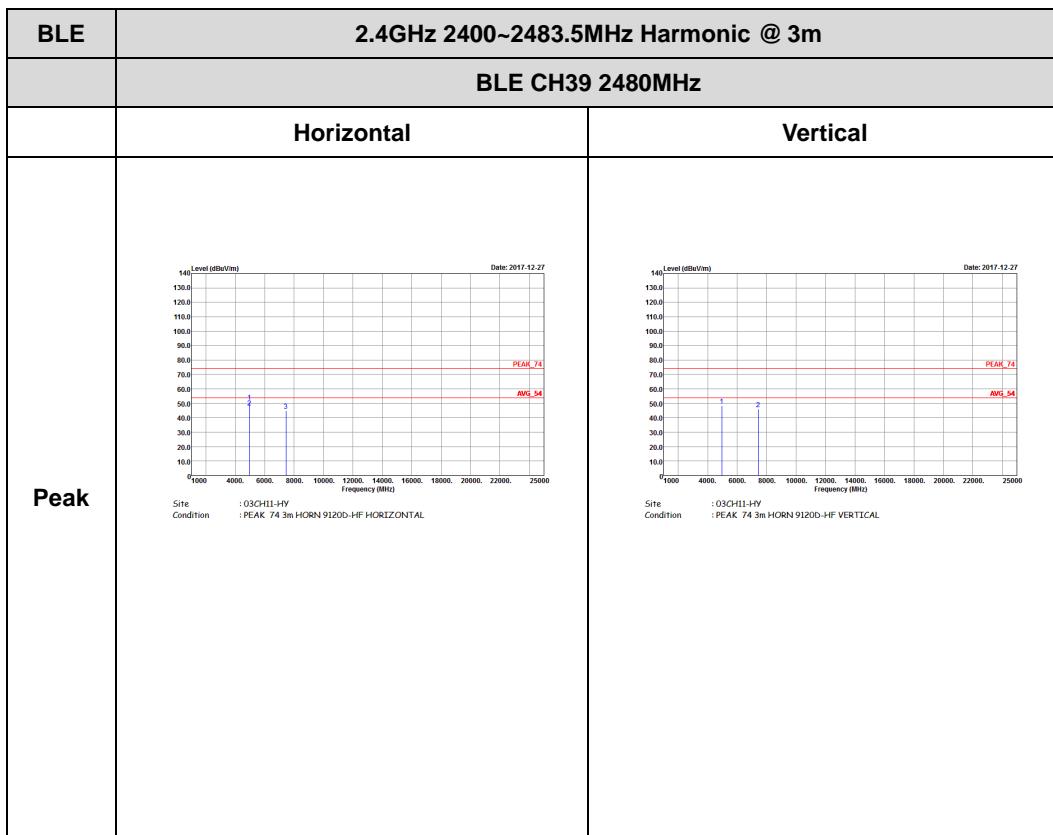



Emission below 1GHz

2.4GHz BLE (LF)



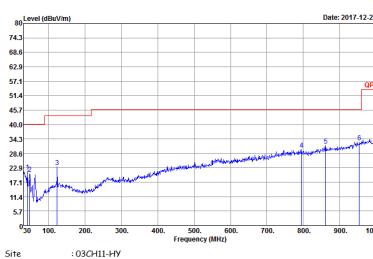
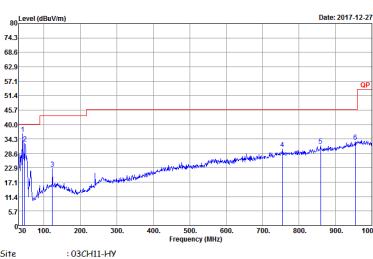
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site Condition : 03CH11-HY : QP 3m BI-LOG 6111D-LF ETC HORIZONTAL</p>	 <p>Site Condition : 03CH11-HY : QP 3m BI-LOG 6111D-LF ETC VERTICAL</p>




<For Sample 2>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

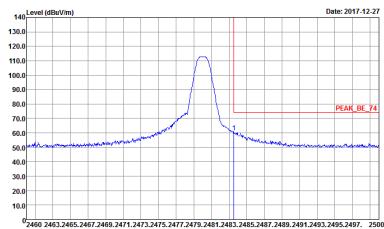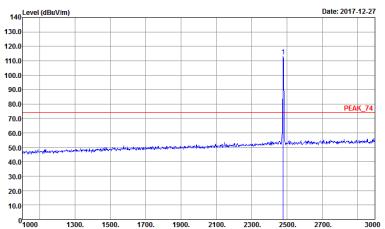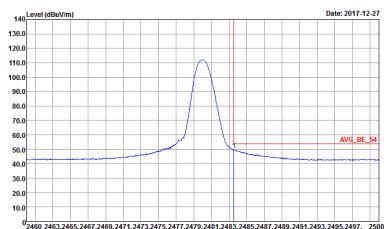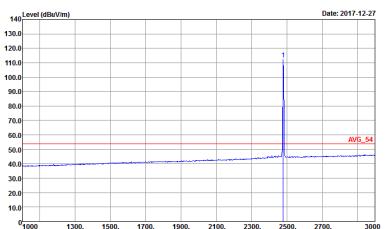
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK BE 74 3m HORN 91200-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 91200-HF HORIZONTAL
Avg.	 Site : 03CH11-HY Condition : AVG BE 54 3m HORN 91200-HF HORIZONTAL	 Site : 03CH11-HY Condition : AVG 54 3m HORN 91200-HF HORIZONTAL

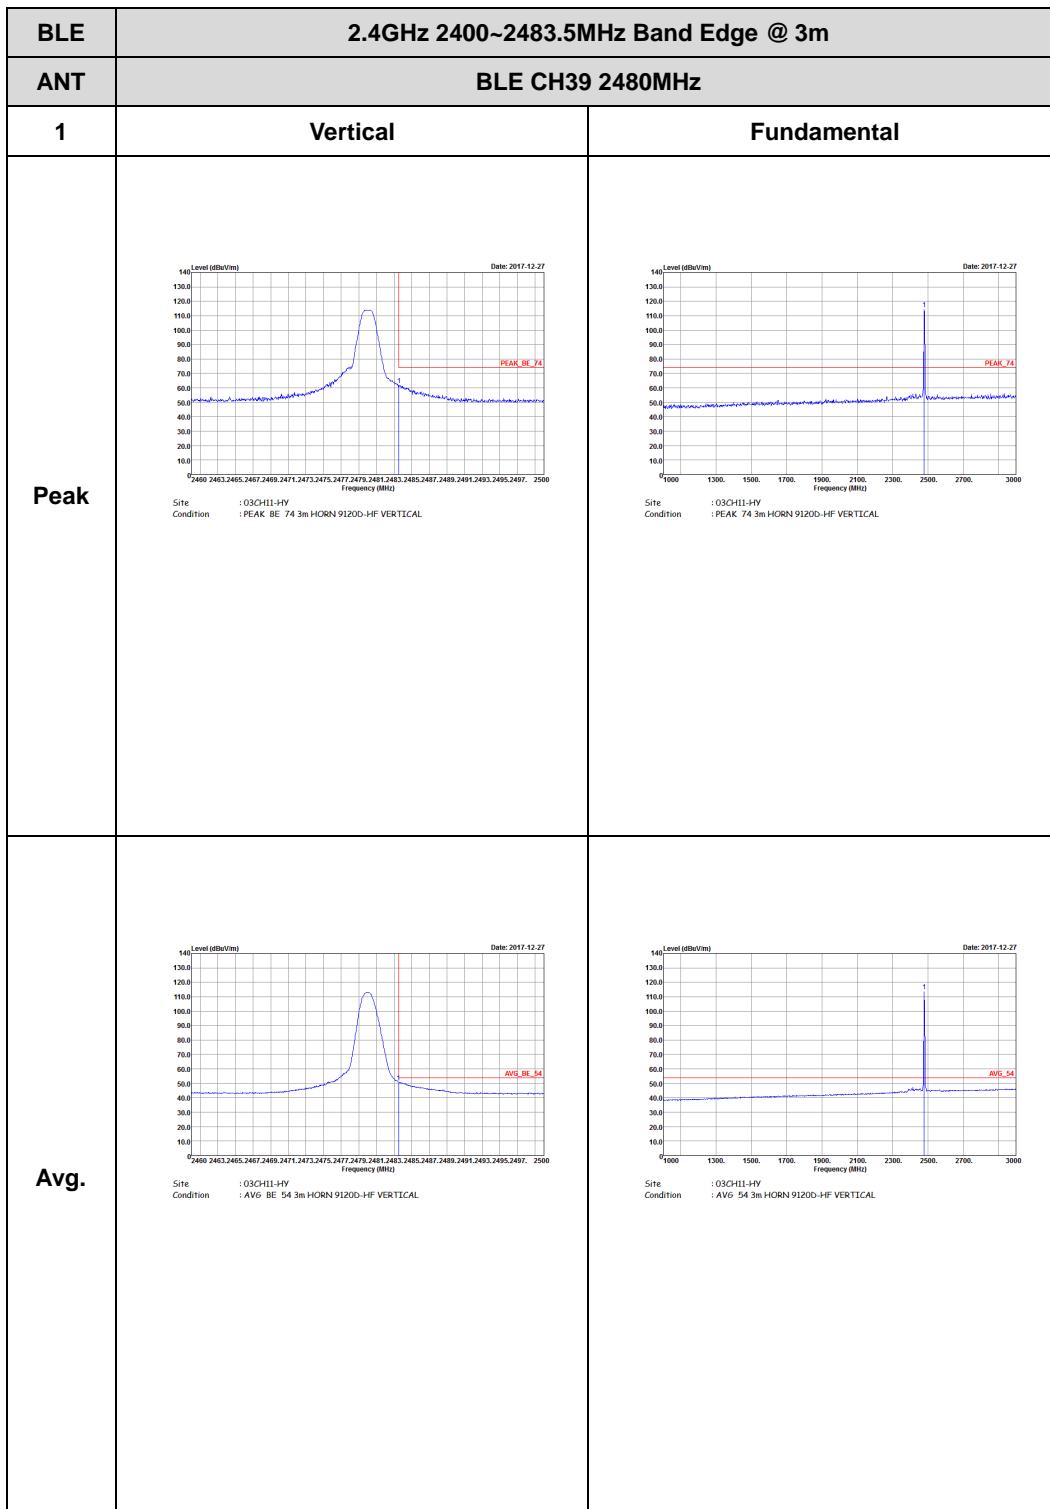



2.4GHz 2400~2483.5MHz


BLE (Harmonic @ 3m)

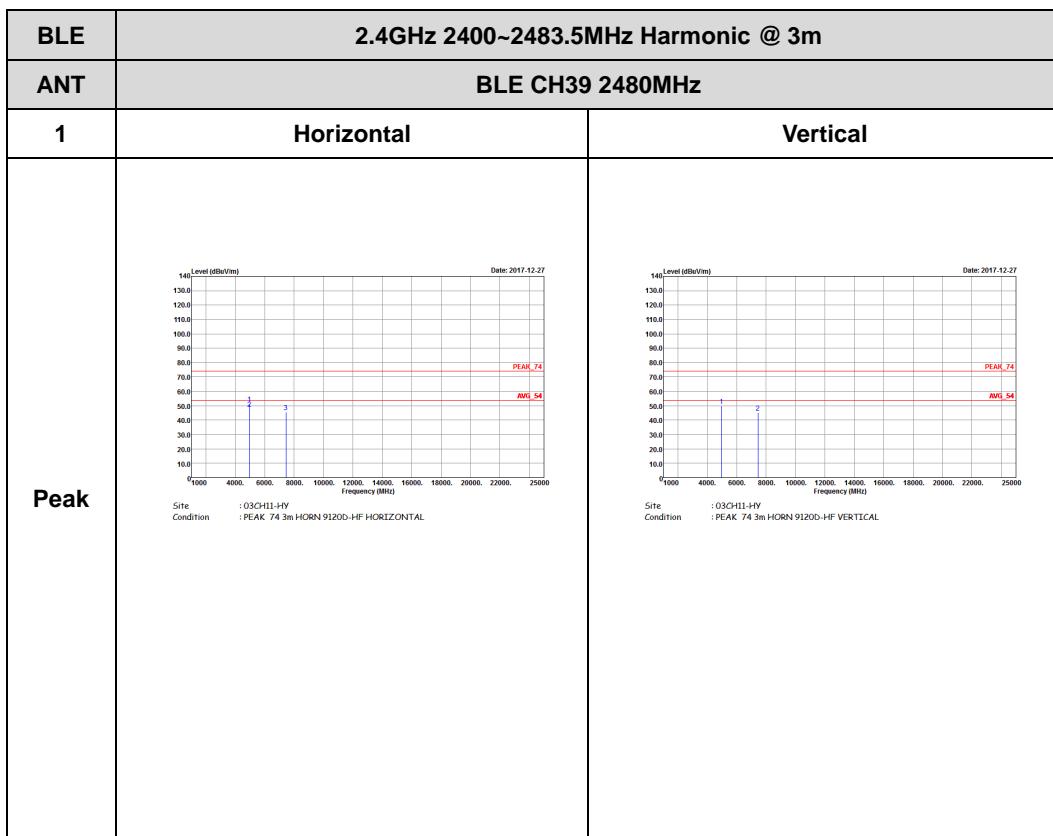

Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE	62.42	392.00	2.55	3kHz

Bluetooth - LE

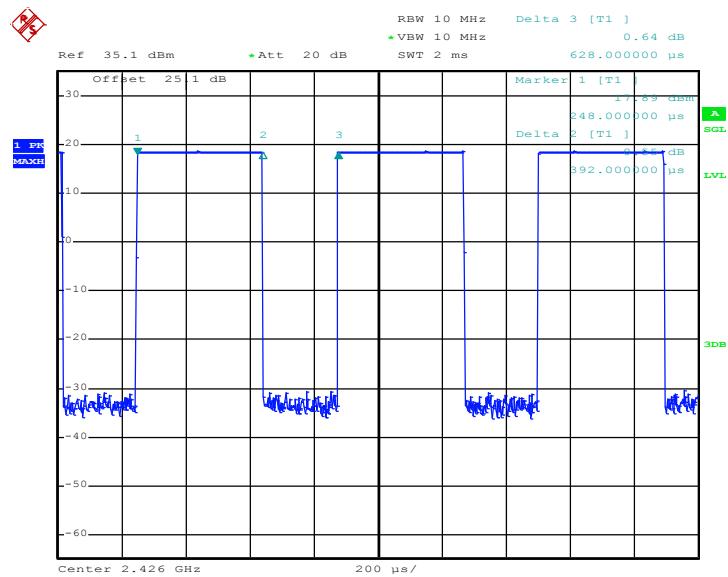

Date: 8.JAN.2018 15:41:11