



TEST REPORT

Report Reference No. : **TRE1612009602** R/C.....: 46619

FCC ID : **ZSW-10-008**

Applicant's name : **b mobile HK Limited**

Address : Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung; New Territories, HONG KONG

Manufacturer : b mobile HK Limited

Address : Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong

Test item description : Mobile Phone

Trade Mark : Bmobile

Model/Type reference : W100

Listed Model(s) : -

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample : Dec. 16, 2016

Date of testing : Dec. 19, 2016 - Dec. 29, 2016

Date of issue : Dec. 29, 2016

Result : **PASS**

Compiled by
(position+printedname+signature)....: File administrators Shayne Zhu

Shayne Zhu

Supervised by
(position+printedname+signature)....: Project Engineer Lion Cai

Lion Cai

Approved by
(position+printedname+signature)....: RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>TEST STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna requirement	10
5.2.	Conducted Emission (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20dB Emission Bandwidth	17
5.5.	Carrier Frequencies Separation	20
5.6.	Hopping Channel Number	22
5.7.	Dwell Time	24
5.8.	Pseudorandom Frequency Hopping Sequence	27
5.9.	Restricted band (radiated)	28
5.10.	Bandedge and Spurious Emission (conducted)	30
5.11.	Spurious Emission (radiated)	34
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>39</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>41</u>

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Version No.	Date of issue	Description
00	Dec. 29, 2016	Original

2. Test Description

Test Item	Section in CFR 47	sResult
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Restricted band	15.247(d)/15.205	Pass
Radiated Emission	15.247(d)/15.209	Pass

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;New Territories,HONG KONG
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;New Territories,HONG KONG

3.2. Product Description

Name of EUT	Mobile Phone
Trade Mark:	Bmobile
Model No.:	W100
Listed Model(s):	-
IMEI :	869748022331551
Power supply:	DC 3.7V From internal battery
Adapter information:	Input: 100-240Va.c., 50-60Hz, 0.15A Output: 5Vd.c., 500mA
Bluetooth	
Version:	Supported BT2.1+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral Antenna
Antenna gain:	-0.72dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
0	2402
1	2403
:	:
39	2441
:	:
77	2479
78	2480

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit/receive.
For AC power line conducted emissions:
the EUT was set to connect with the Bluetooth under large package sizes transmission.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	PowerCable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

IC-Registration No.: 5377A&5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	11/13/2016
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	11/13/2016
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	11/13/2016
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	11/13/2016
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	11/13/2016
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	11/13/2016
8	Amplifer	Sonoma	310N	E009-13	11/13/2016
9	JS amplifer	Rohde&Schwarz	JS4-00101800-28-5A	F201504	11/13/2016
10	High pass filter	Compliance Direction systems	BSU-6	34202	11/13/2016
11	HORNANTENNA	ShwarzBeck	9120D	1012	11/13/2016
12	Amplifer	Compliance Direction systems	PAP1-4060	120	11/13/2016
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	11/13/2016
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	11/13/2016
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	11/13/2016

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	11/13/2016

The Cal.Interval was one year

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

☒ **Passed** ☐ **Not Applicable**

The antenna is integral antenna, the best case gain of the antenna is -0.72dBi

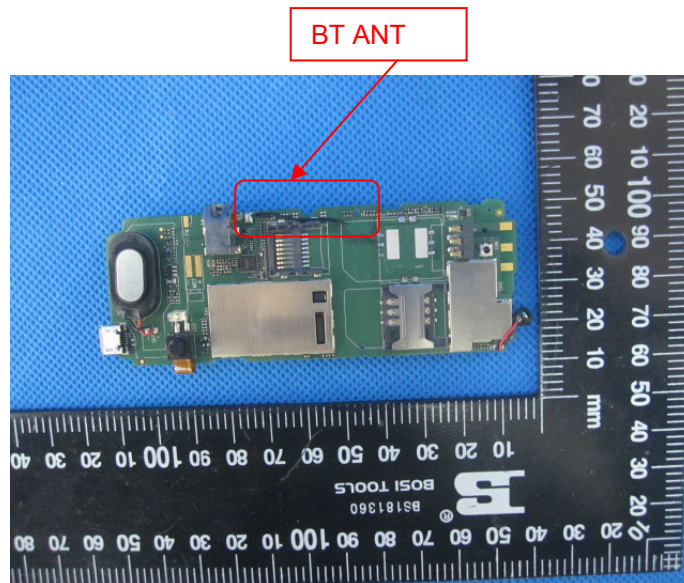

5.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

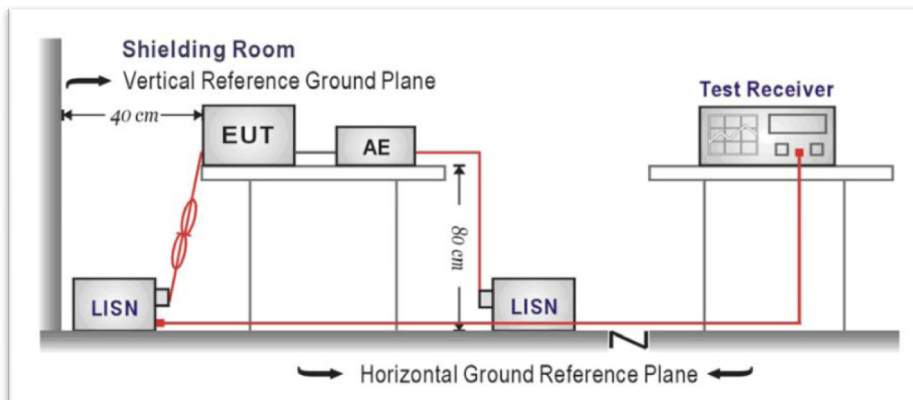

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.
- 9.

TEST RESULTS


☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Test Line:

L

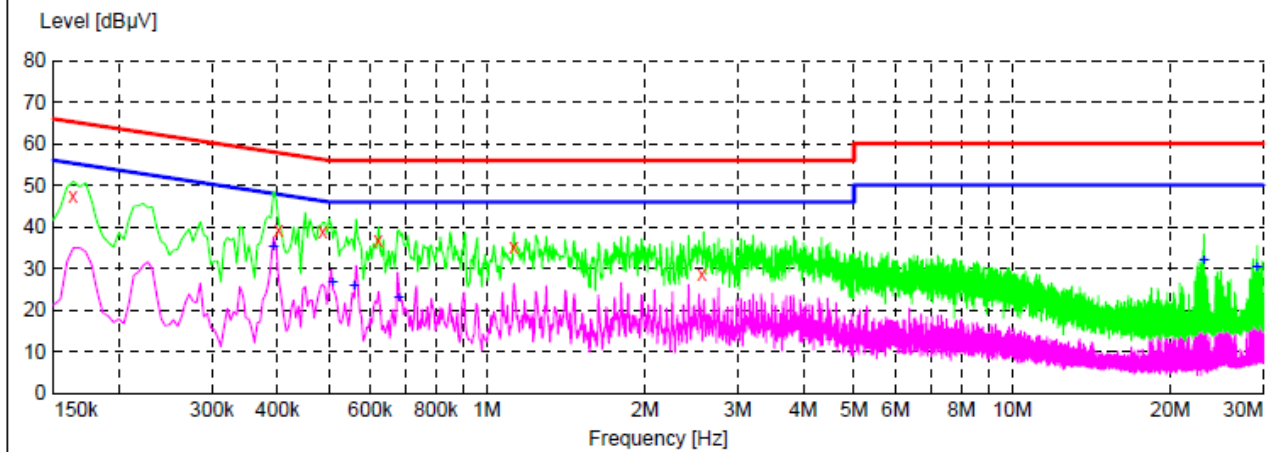


x x MES GM1612215008_fin

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	47.50	10.4	65	17.8	QP	L1	GND
0.402000	39.40	10.2	58	18.4	QP	L1	GND
0.487500	38.70	10.2	56	17.5	QP	L1	GND
0.622500	37.00	10.2	56	19.0	QP	L1	GND
1.126500	35.30	10.2	56	20.7	QP	L1	GND
2.571000	28.80	10.2	56	27.2	QP	L1	GND
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.393000	35.40	10.2	48	12.6	AV	L1	GND
0.510000	26.70	10.2	46	19.3	AV	L1	GND
0.559500	25.80	10.2	46	20.2	AV	L1	GND
0.681000	22.80	10.2	46	23.2	AV	L1	GND
23.131500	31.90	10.7	50	18.1	AV	L1	GND
29.238000	30.20	10.8	50	19.8	AV	L1	GND

Test Line:

N

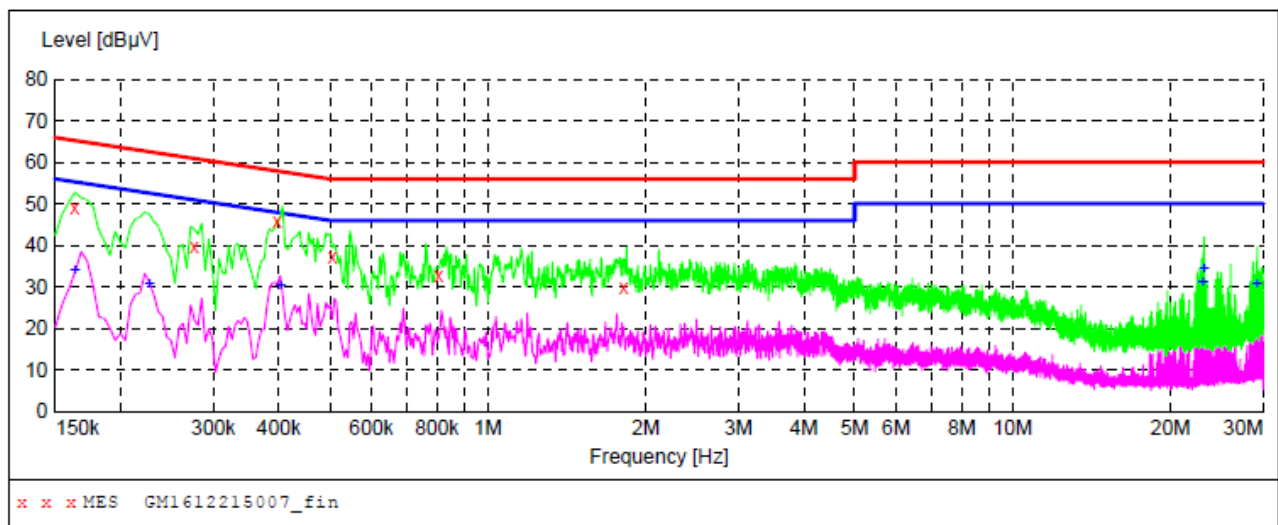


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	49.00	10.4	65	16.3	QP	N	GND
0.276000	39.80	10.2	61	21.1	QP	N	GND
0.397500	45.90	10.2	58	12.0	QP	N	GND
0.505500	37.10	10.2	56	18.9	QP	N	GND
0.807000	32.70	10.2	56	23.3	QP	N	GND
1.815000	30.00	10.2	56	26.0	QP	N	GND
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	33.80	10.4	55	21.5	AV	N	GND
0.226500	30.90	10.3	53	21.7	AV	N	GND
0.402000	30.40	10.2	48	17.4	AV	N	GND
23.068500	31.30	10.7	50	18.7	AV	N	GND
23.131500	34.50	10.7	50	15.5	AV	N	GND
29.238000	30.60	10.8	50	19.4	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**

TEST CONFIGURATION

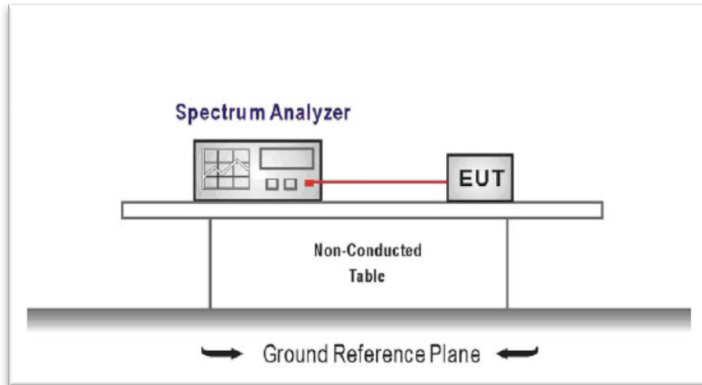

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	1.68	30.00	Pass
	39	4.31		
	78	2.54		
$\pi/4$ DQPSK	00	1.28	21.00	Pass
	39	3.59		
	78	1.90		
8DPSK	00	1.50	21.00	Pass
	39	3.84		
	78	2.13		

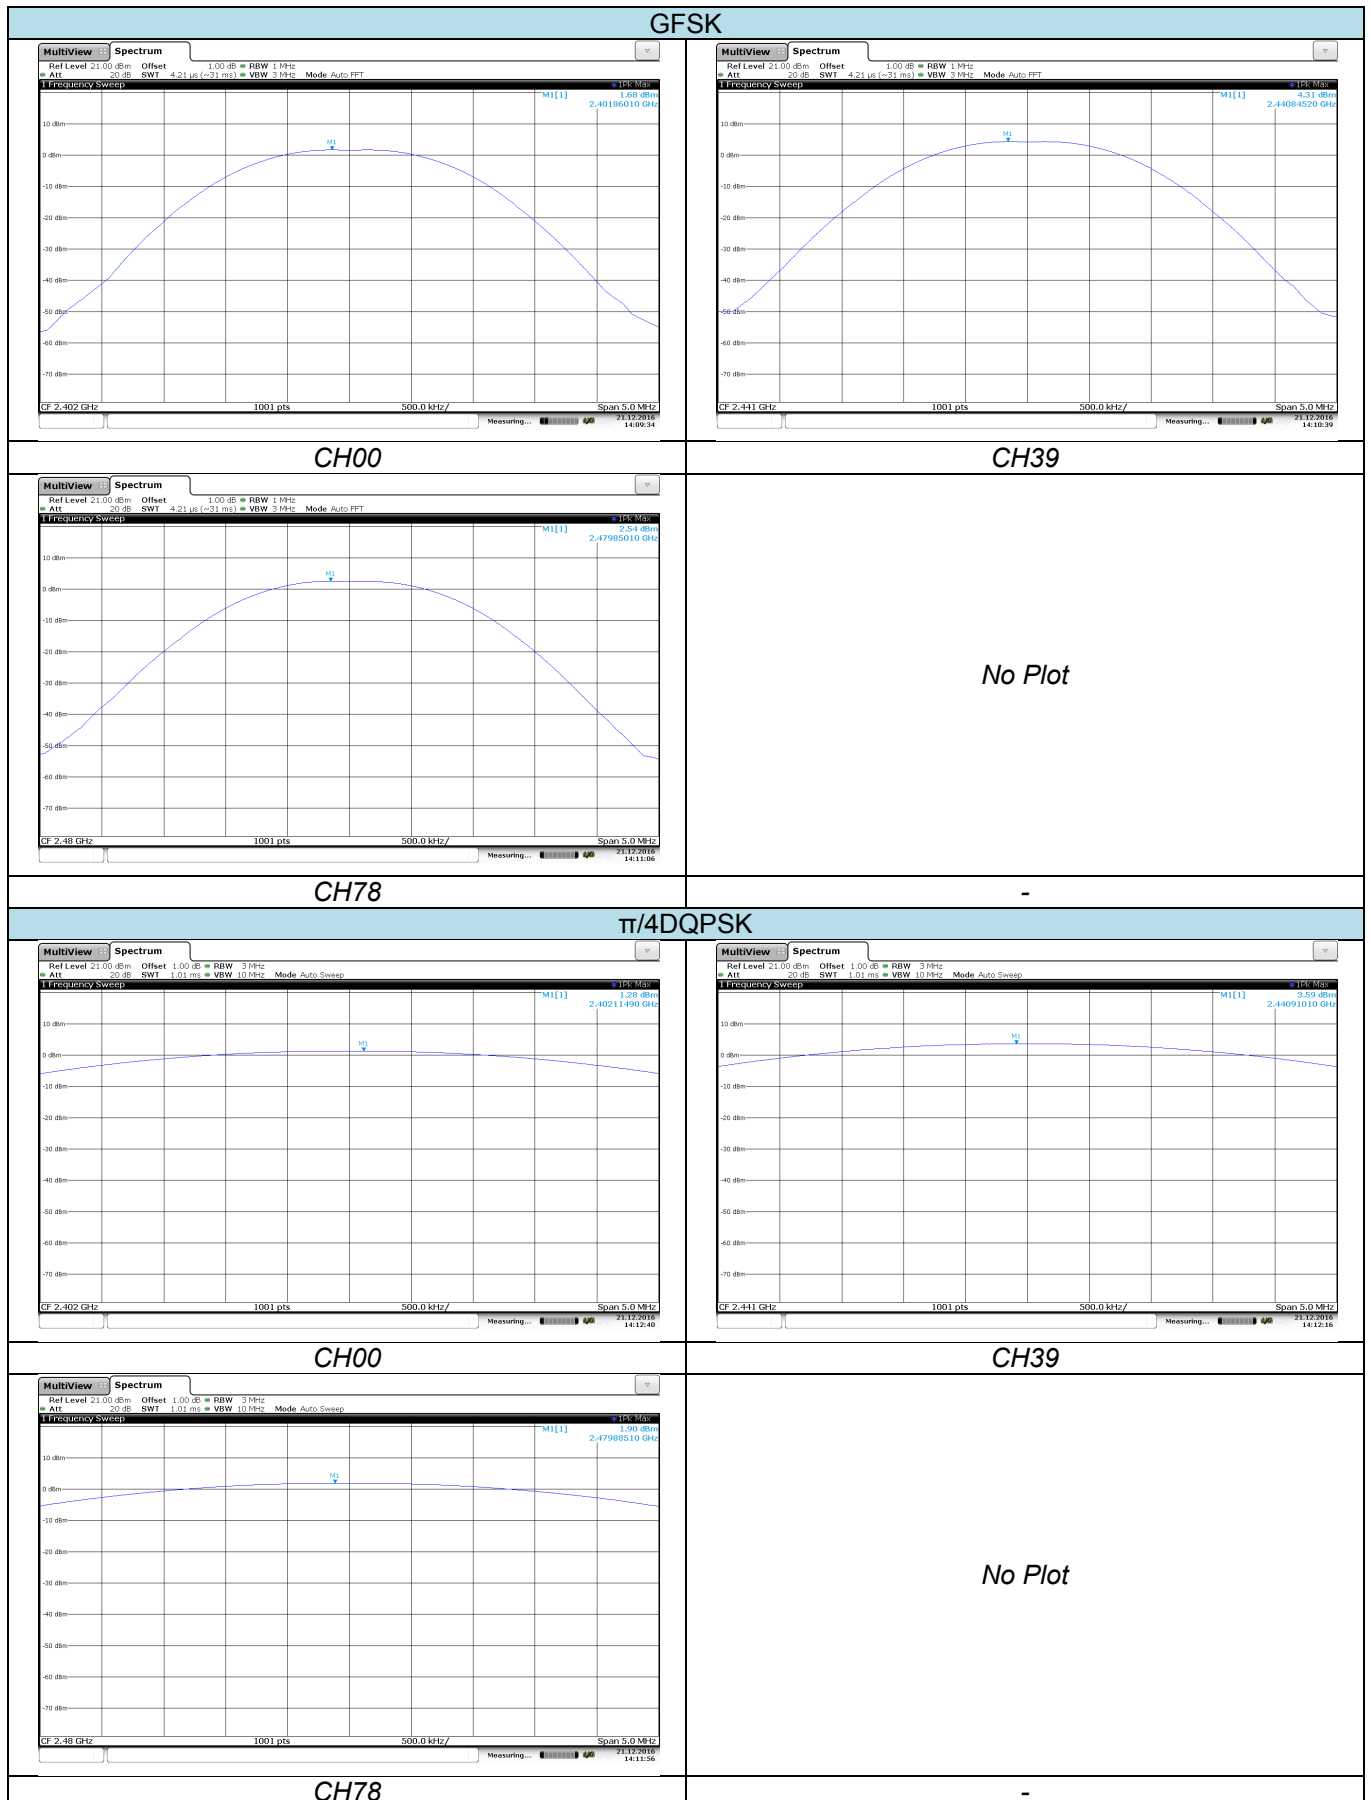

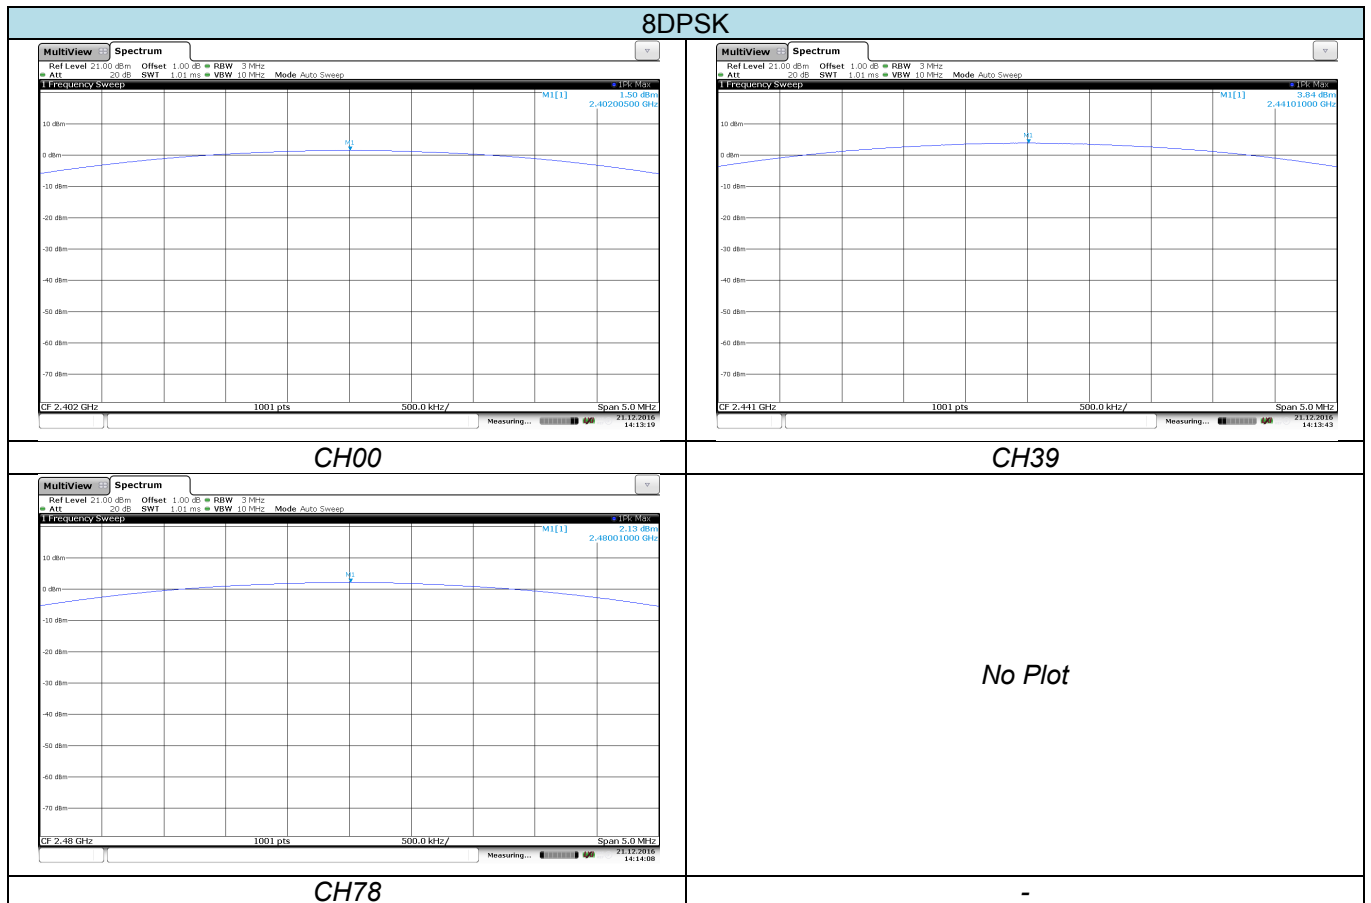


5.4. 20dB Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

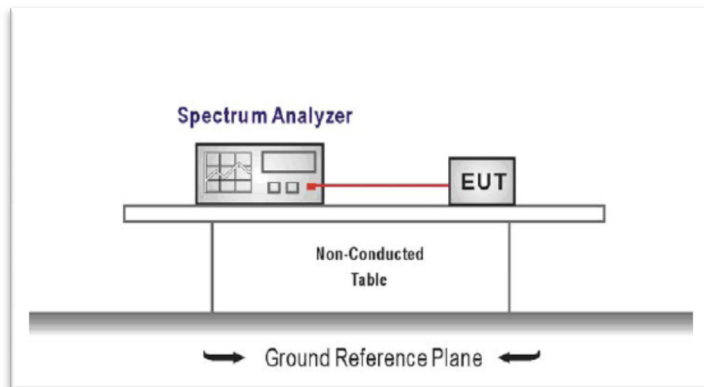

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	20dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.928	-	Pass
	39	0.928		
	78	0.929		
$\pi/4$ DQPSK	00	1.305	-	Pass
	39	1.313		
	78	1.299		
8DPSK	00	1.294	-	Pass
	39	1.288		
	78	1.281		

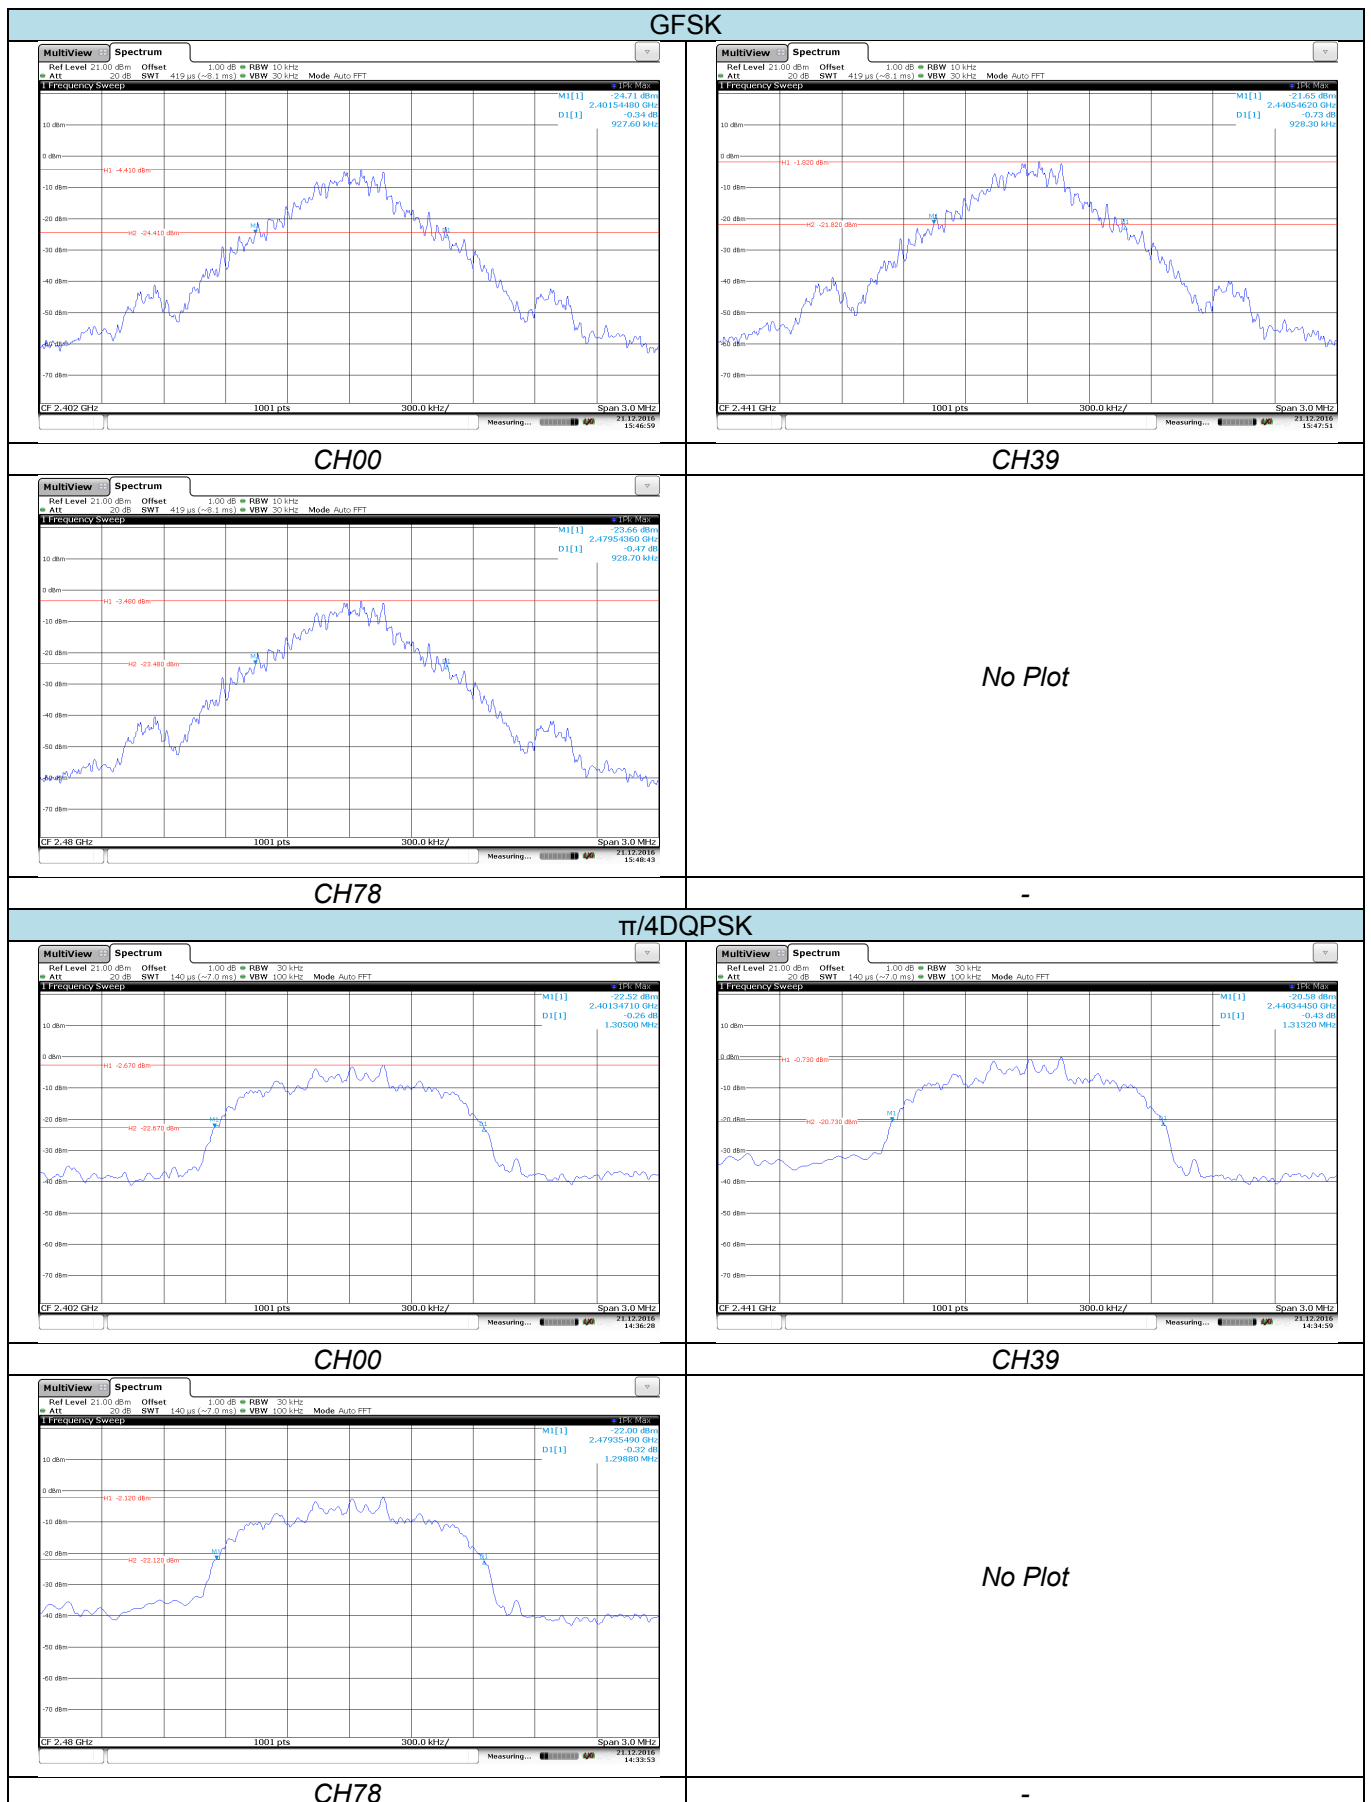

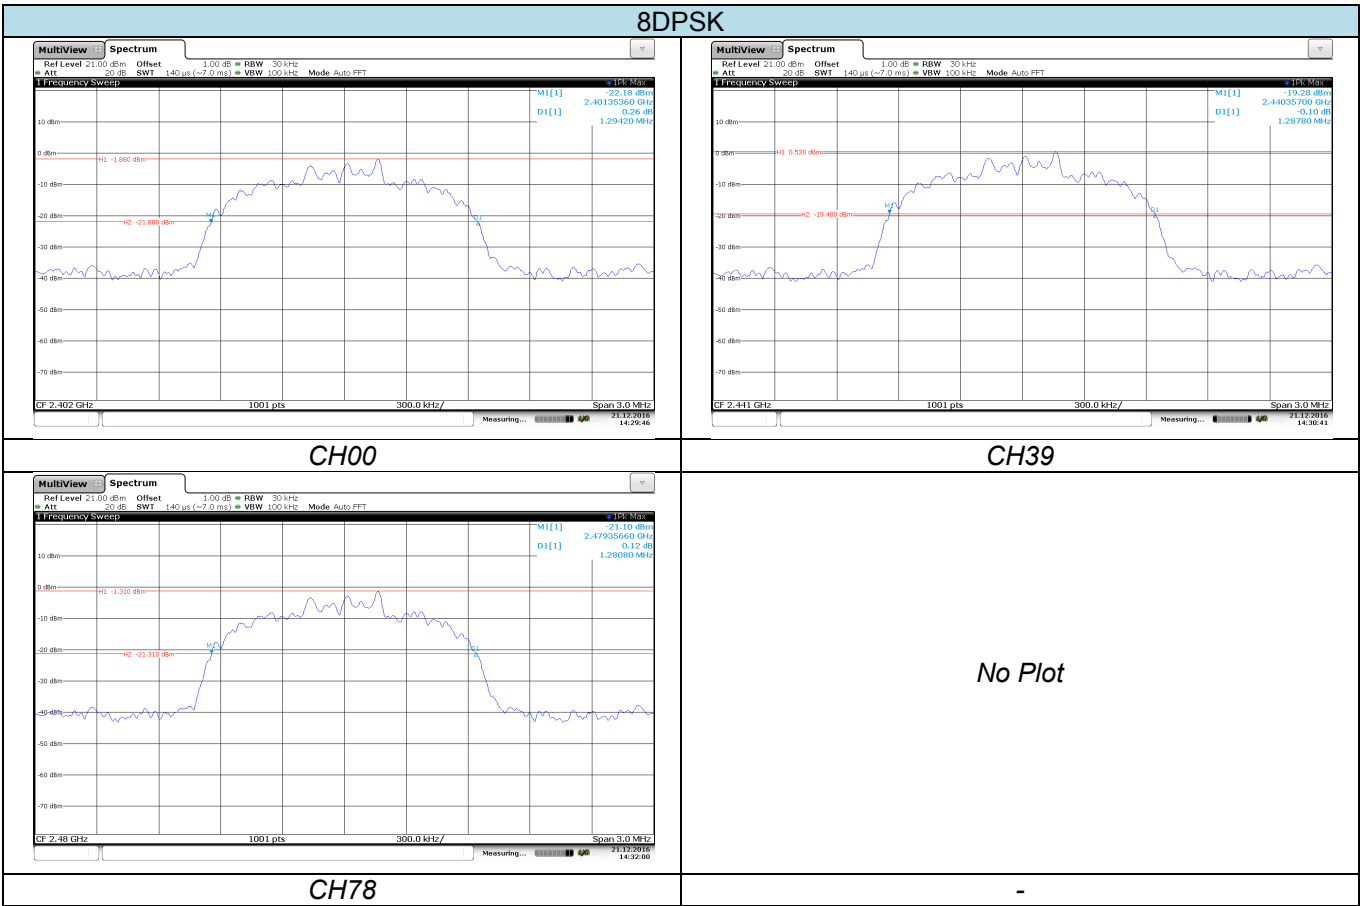


5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST CONFIGURATION

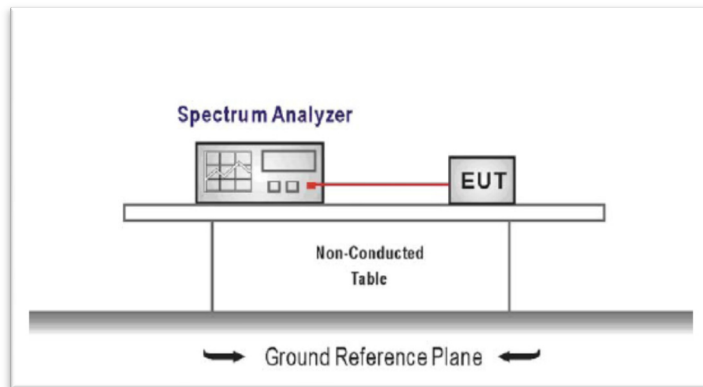

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq 1\%$ of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ Passed ☐ Not Applicable


Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	39	0.995	0.928	Pass
$\pi/4$ DQPSK	39	1.003	0.875	Pass
8DPSK	39	0.945	0.854	Pass

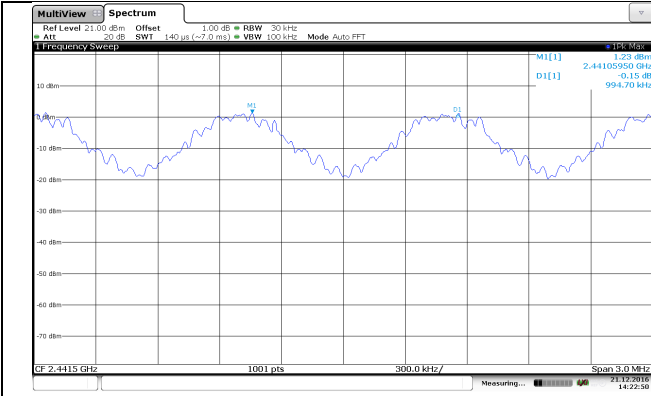


GFSK

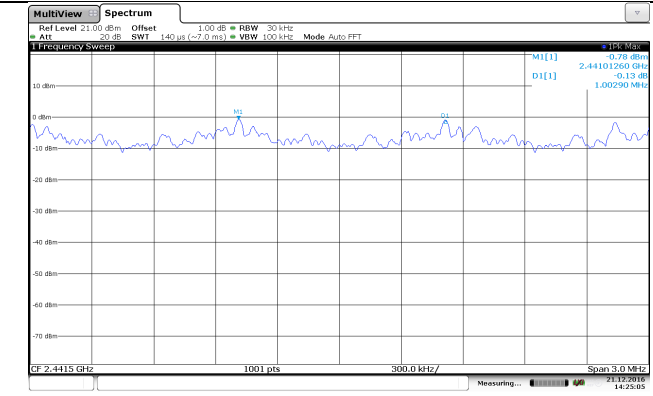

$\pi/4$ DQPSK

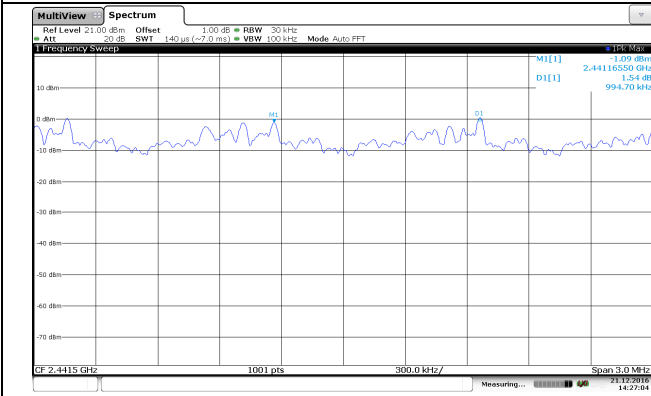

8DPSK

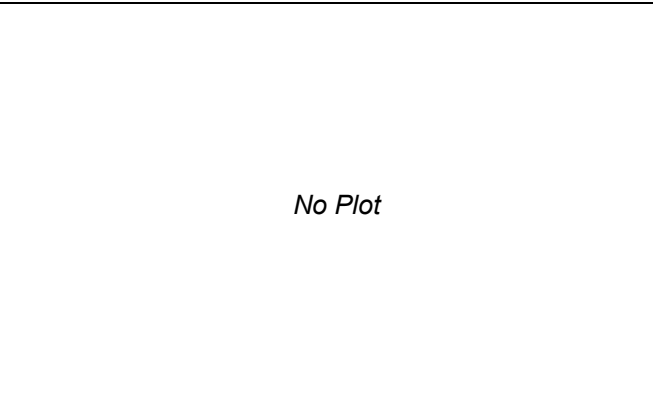

-


5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

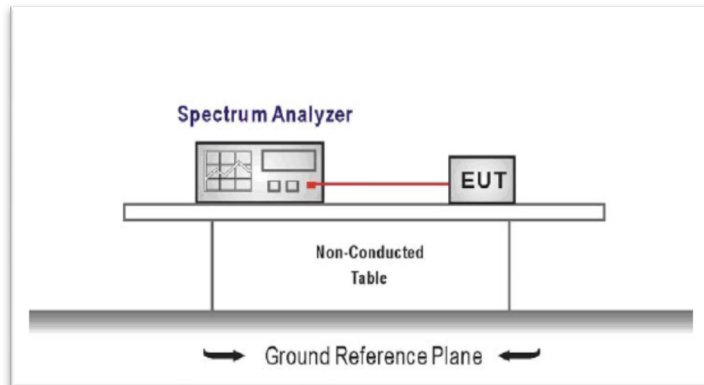

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW $\geq 1\%$ of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**


Modulation type	Channel number	Limit	Result
GFSK	79	15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

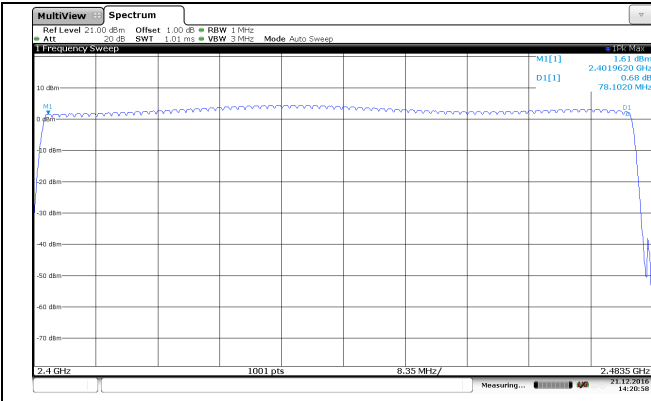


GFSK

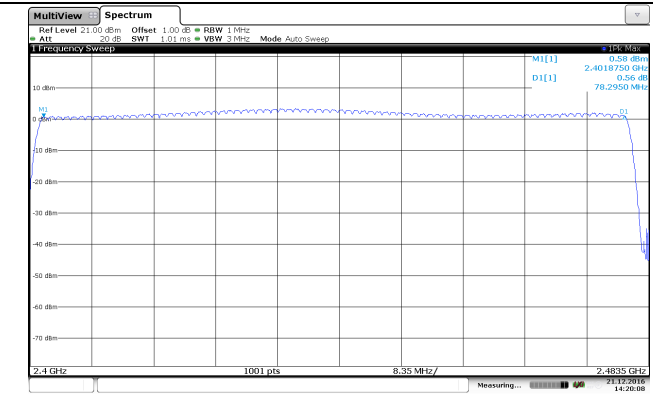

$\pi/4$ DQPSK

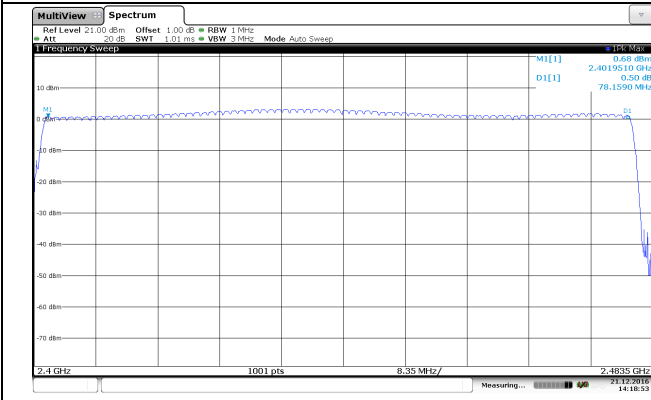

8DPSK

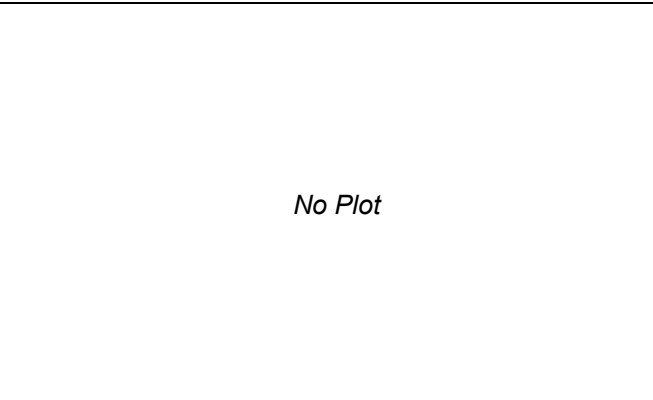

No Plot

-


5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

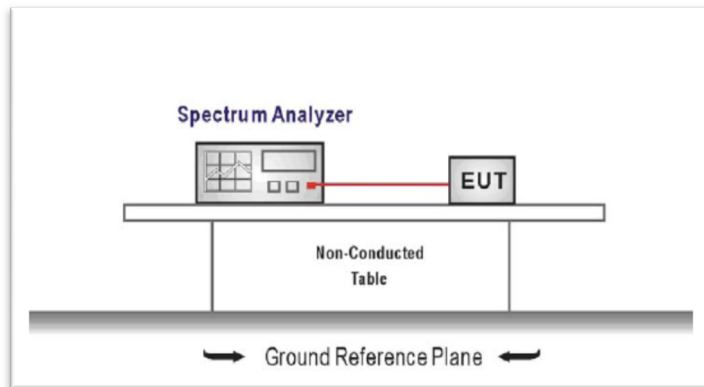

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS


☒ Passed ☐ Not Applicable

Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.186	0.40	Pass
	DH3	0.293		
	DH5	0.317		
π/4DQPSK	2-DH1	0.187	0.40	Pass
	2-DH3	0.294		
	2-DH5	0.309		
8DPSK	3-DH1	0.184	0.40	Pass
	3-DH3	0.291		
	3-DH5	0.300		

Note:

1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1, 3-DH1
Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3, 3-DH3
Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5, 3-DH5

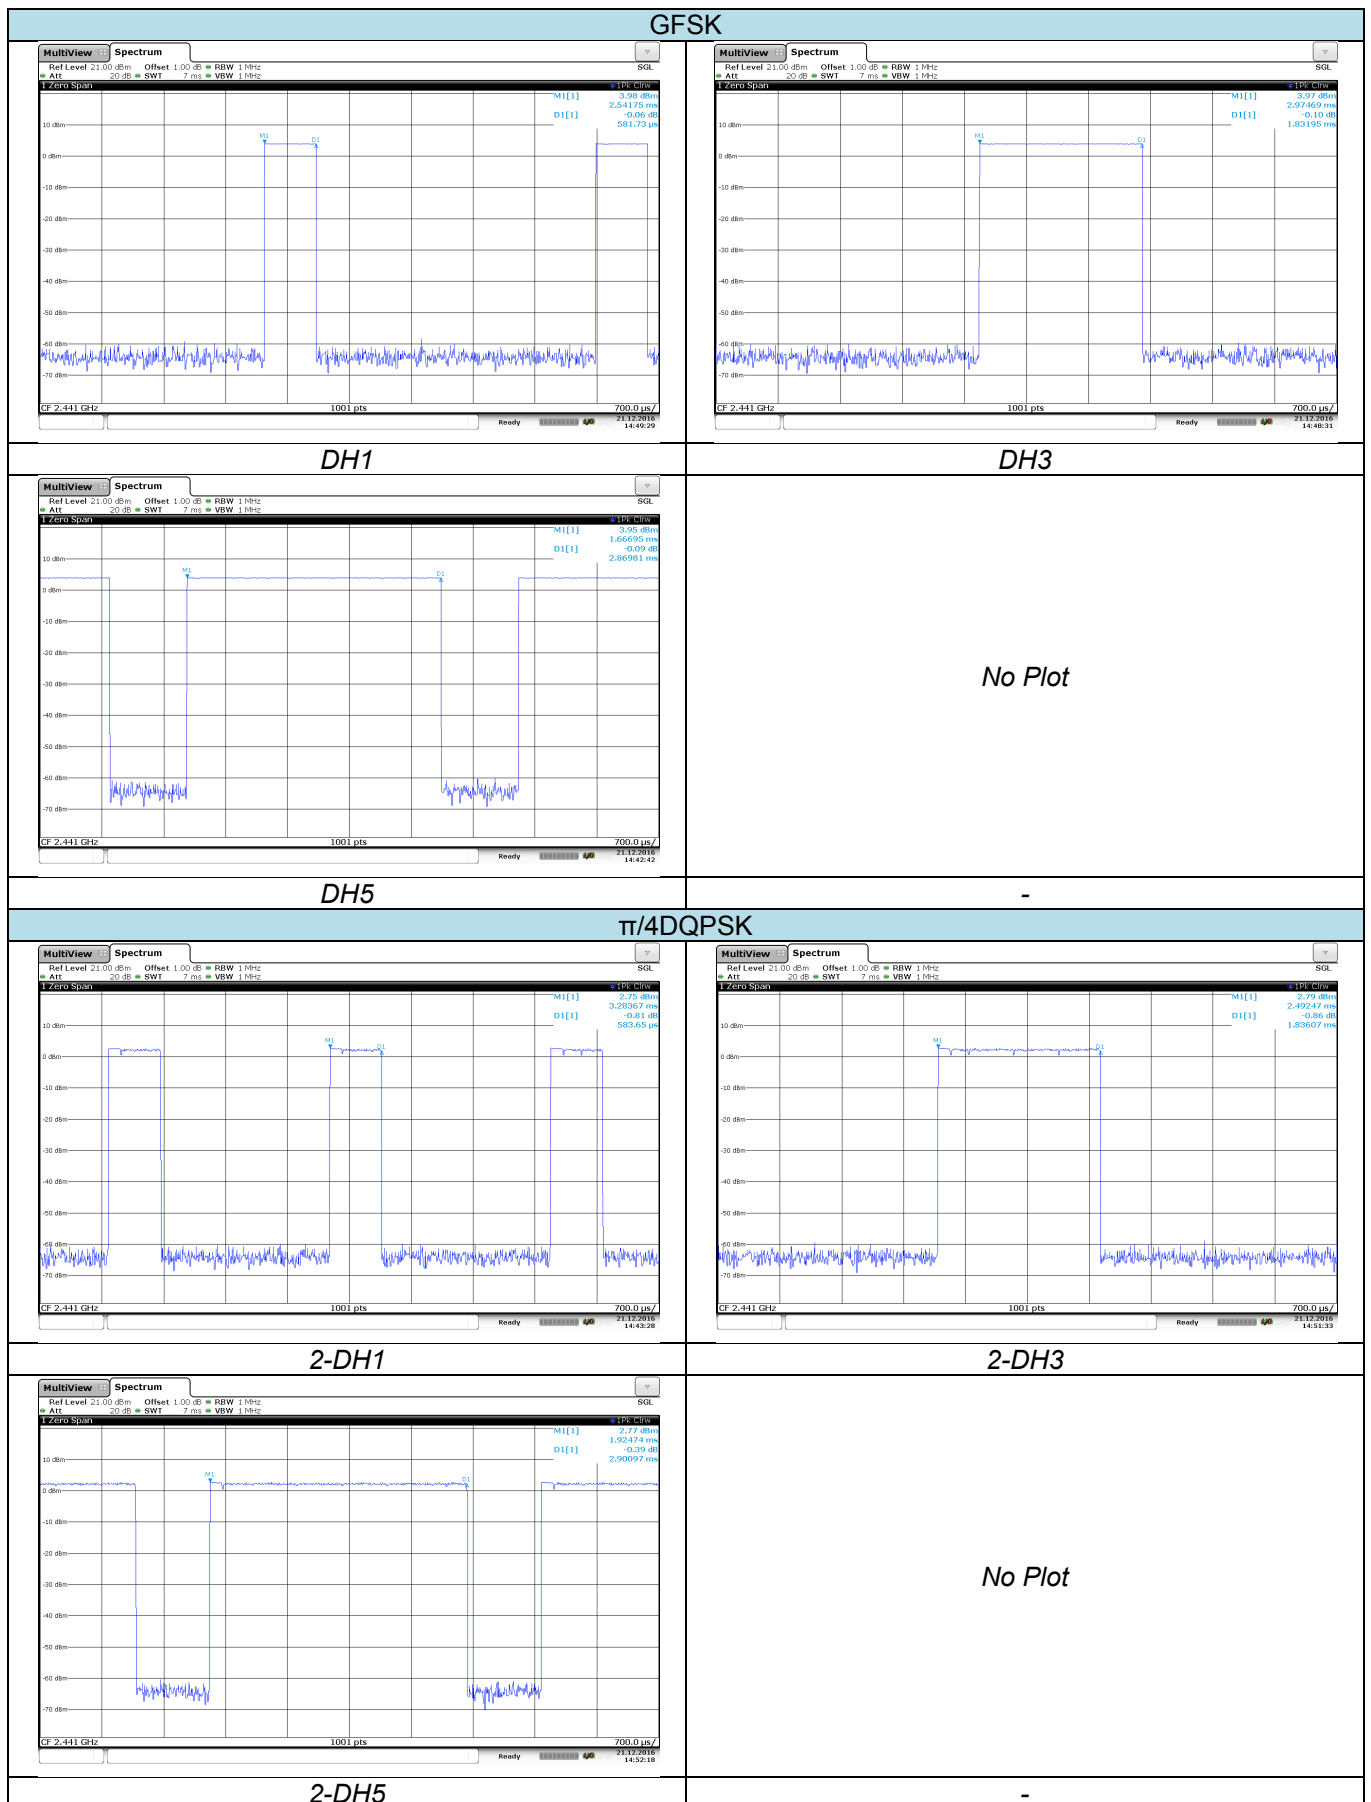

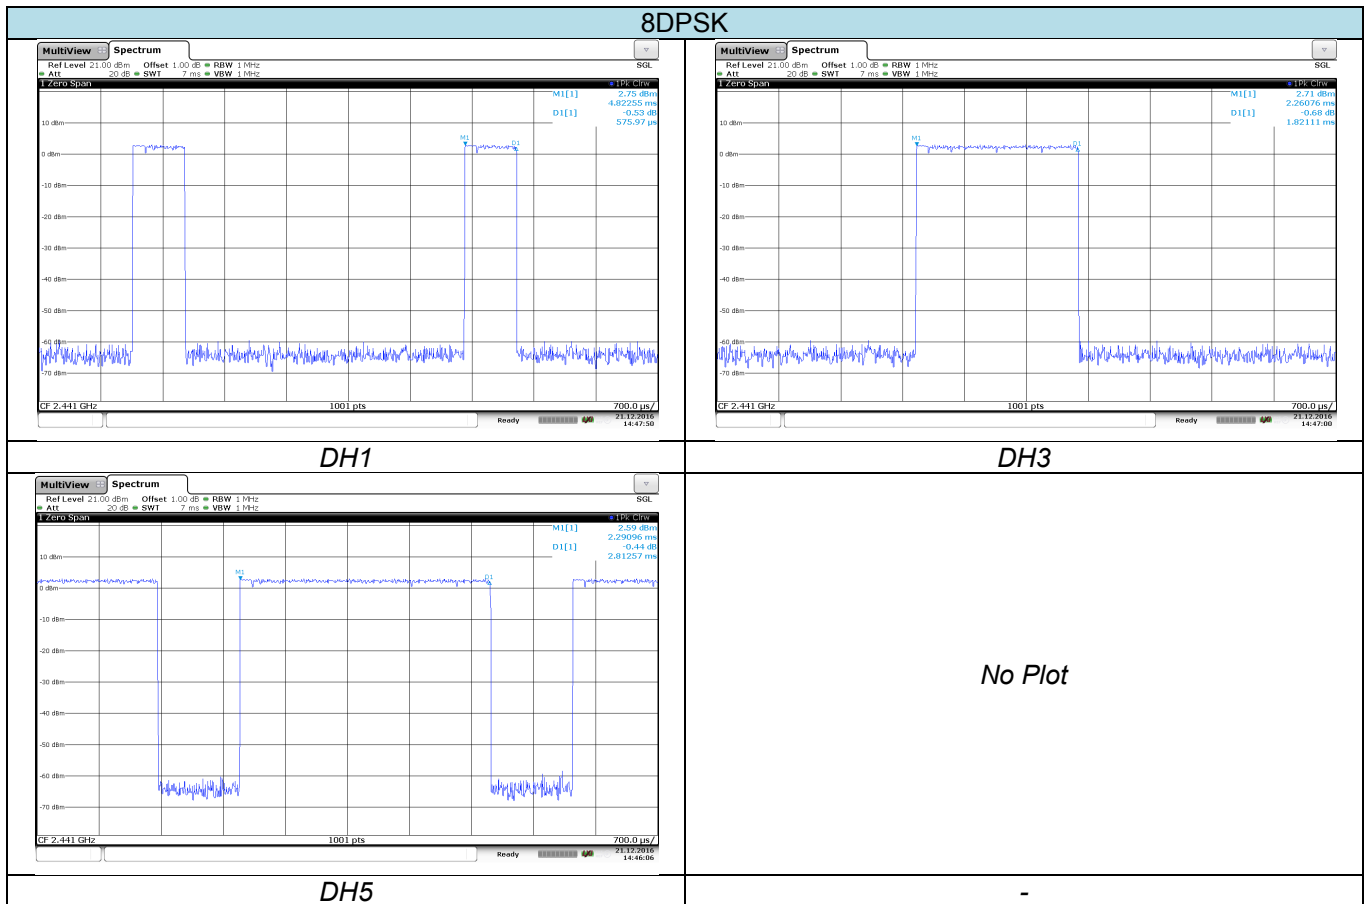

5.8. Pseudorandom Frequency Hopping Sequence

LIMIT


FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

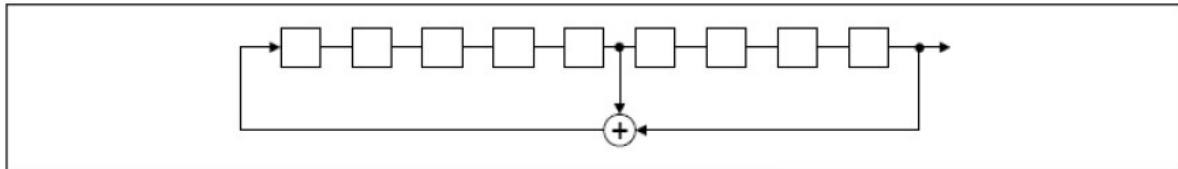

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

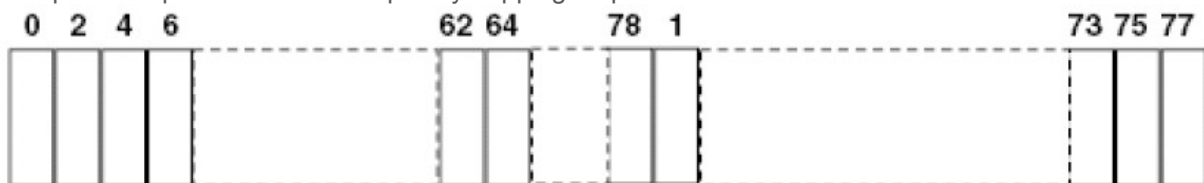

Each frequency used equally on the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shifts frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

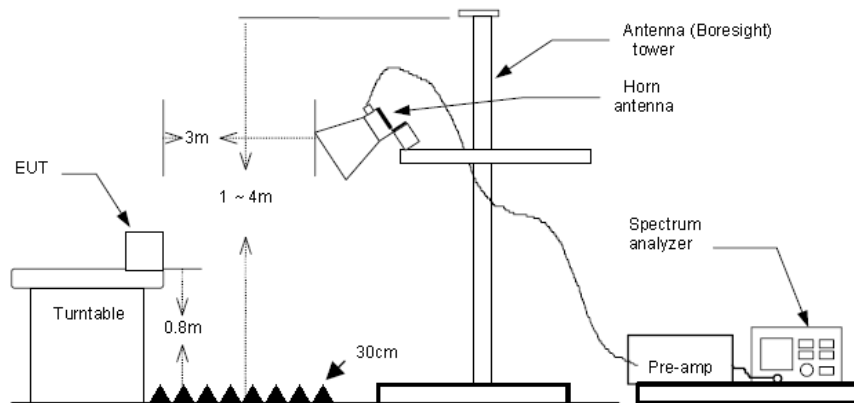

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz for Peak value
 RBW=1MHz, VBW=10Hz for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note:

- 1) *Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor*
- 2) *Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.*

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	36.33	27.27	6.62	37.65	32.57	74.00	-41.43	Vertical	Peak
2388.75	71.82	27.53	6.75	37.87	68.23	74.00	-5.77	Vertical	
2390.00	46.47	27.53	6.75	37.87	42.88	74.00	-31.12	Vertical	
2310.00	36.91	27.27	6.62	37.65	33.15	74.00	-40.85	Horizontal	
2388.46	63.54	27.53	6.75	37.87	59.95	74.00	-14.05	Horizontal	
2390.00	38.85	27.53	6.75	37.87	35.26	74.00	-38.74	Horizontal	
2310.00	24.70	27.27	6.62	37.65	20.94	54.00	-33.06	Vertical	Average
2388.75	53.73	27.53	6.75	37.87	50.14	54.00	-3.86	2388.75	
2390.00	26.11	27.53	6.75	37.87	22.52	54.00	-31.48	Vertical	
2388.46	50.84	27.53	6.75	37.87	47.25	54.00	-6.75	Horizontal	
2310.00	24.14	27.27	6.62	37.65	20.38	54.00	-33.62	Horizontal	
2390.00	24.50	27.53	6.75	37.87	20.91	54.00	-33.09	Horizontal	

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	54.12	27.85	6.83	37.87	50.93	74.00	-23.07	Vertical	Peak
2487.12	56.59	27.85	6.83	37.87	53.40	74.00	-20.60	Vertical	
2500.00	38.54	27.90	6.84	37.87	35.41	74.00	-38.59	Vertical	
2483.50	50.2	27.85	6.83	37.87	47.01	74.00	-26.99	Horizontal	
2485.37	68.62	27.85	6.83	37.87	65.43	74.00	-8.57	Horizontal	
2500.00	36.39	27.90	6.84	37.87	33.26	74.00	-40.74	Horizontal	
2483.50	34.41	27.85	6.83	37.87	31.22	54.00	-22.78	Vertical	Average
2487.12	45.66	27.85	6.83	37.87	42.47	54.00	-11.53	Vertical	
2500.00	25.76	27.90	6.84	37.87	22.63	54.00	-31.37	Vertical	
2483.50	32.32	27.85	6.83	37.87	29.13	54.00	-24.87	Horizontal	
2485.37	52.77	27.85	6.83	37.87	49.58	54.00	-4.42	Horizontal	
2500.00	24.64	27.90	6.84	37.87	21.51	54.00	-32.49	Horizontal	


5.10. Bandedge and Spurious Emission (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

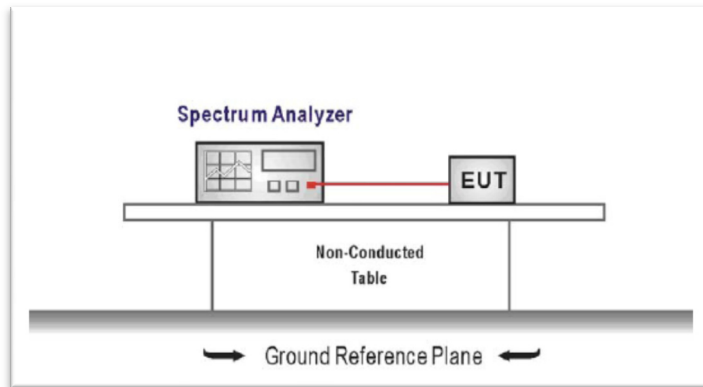

TEST PROCEDURE


1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW= 100 KHz, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

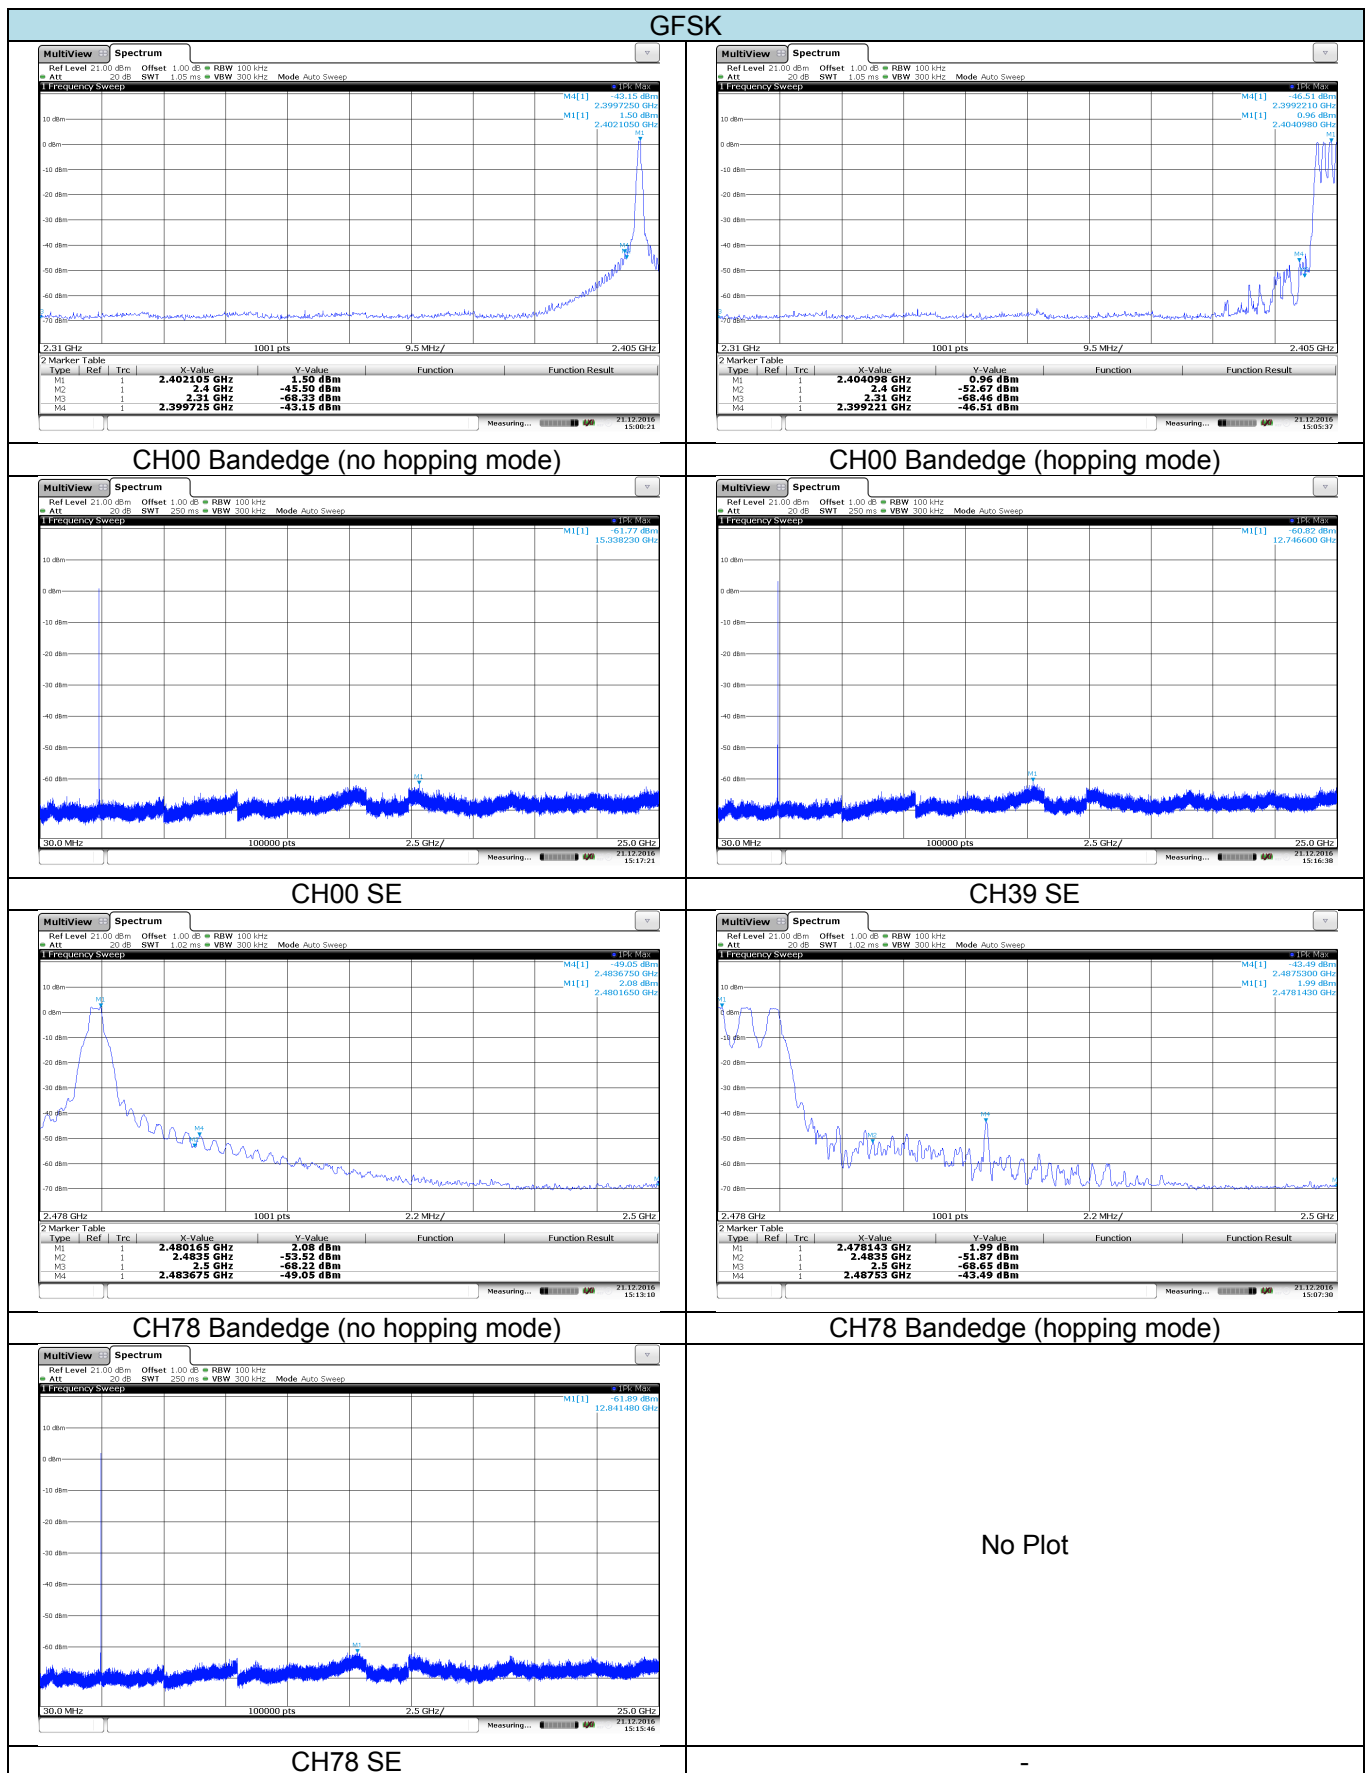

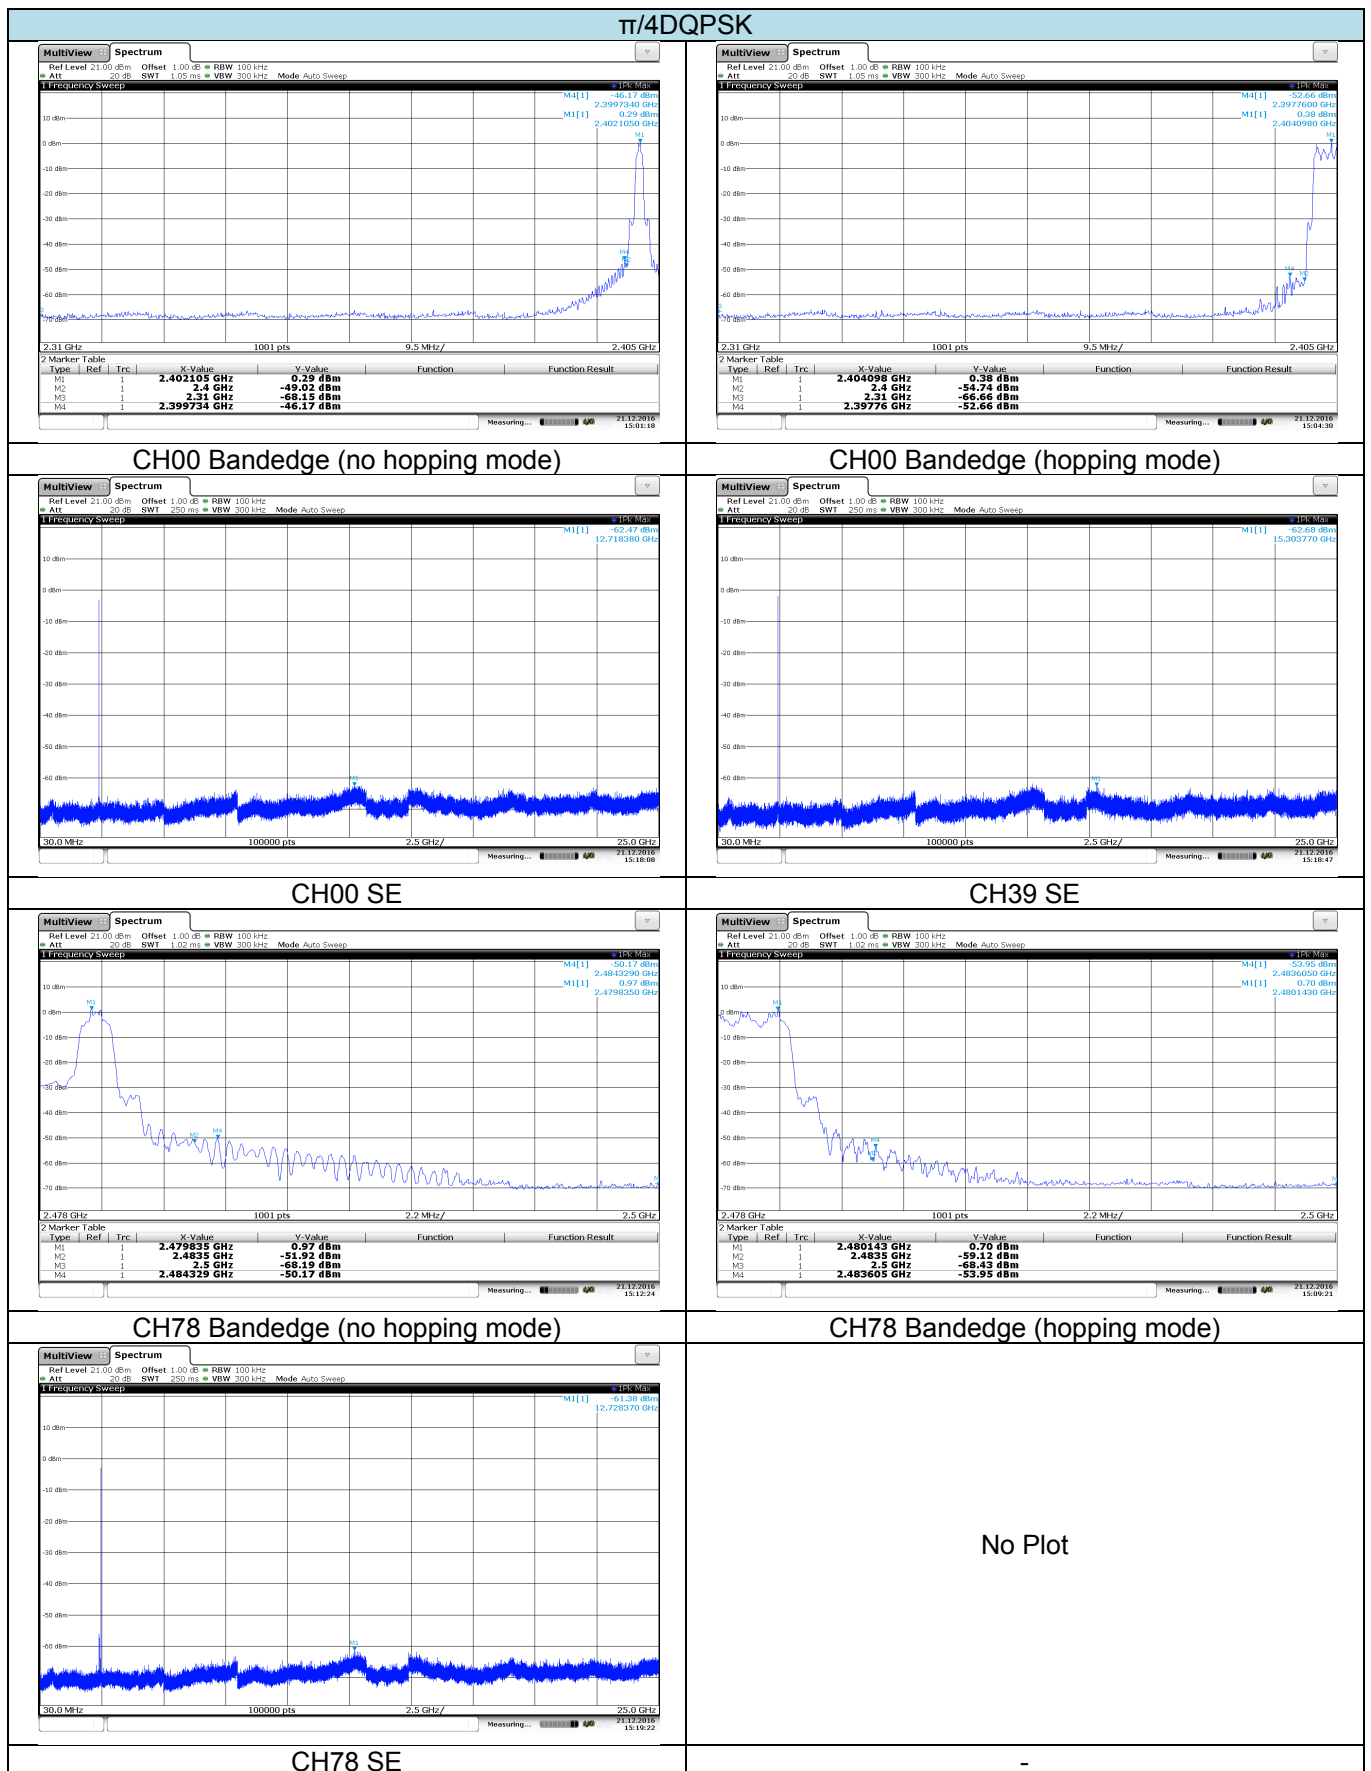

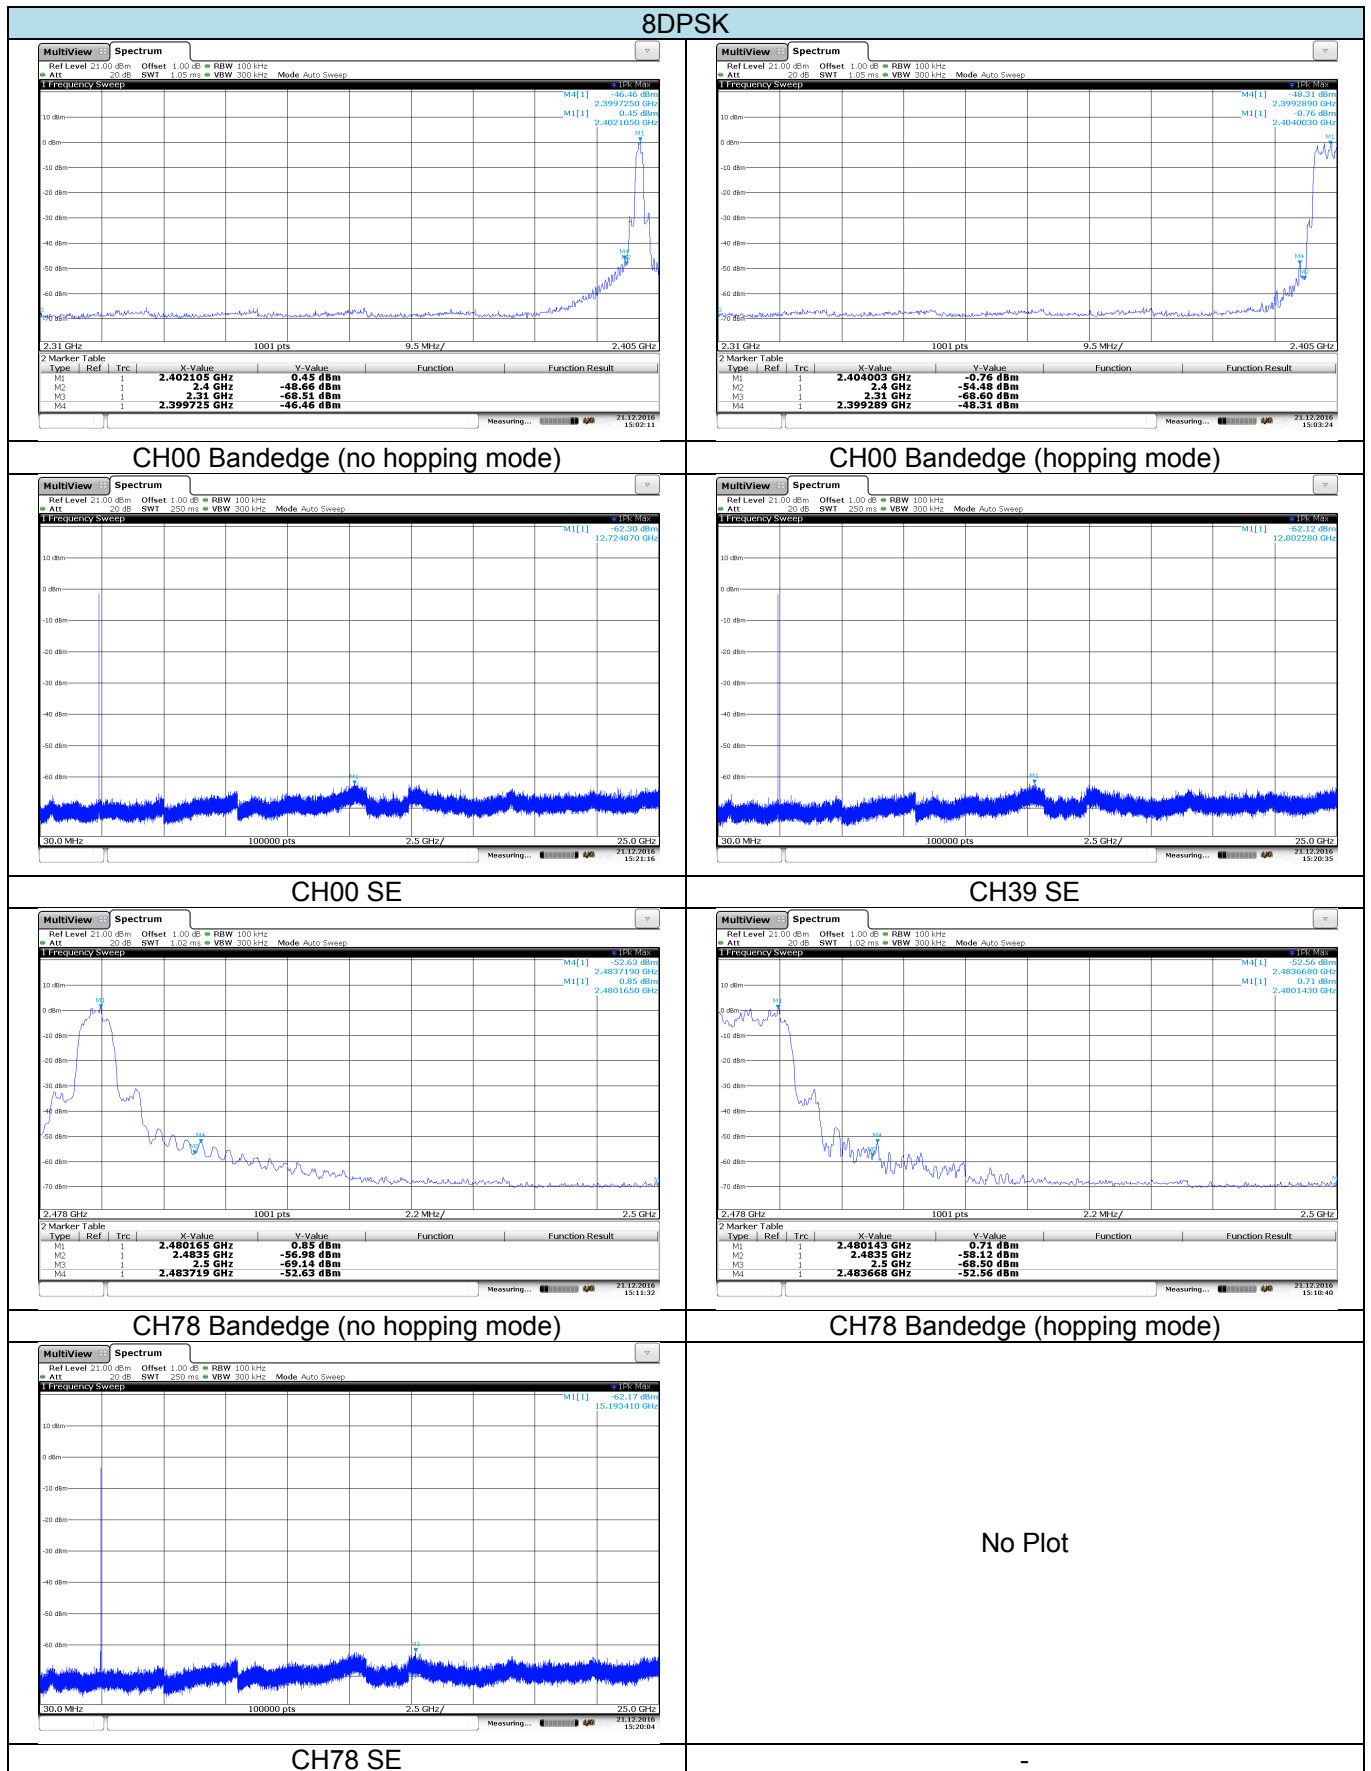

5.11. Spurious Emission (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


➤ Below 30MHz

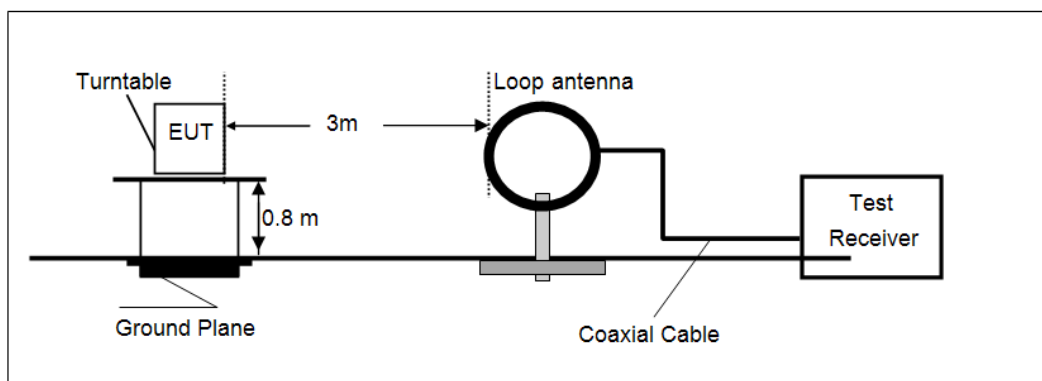

➤ 30MHz~1000MHz

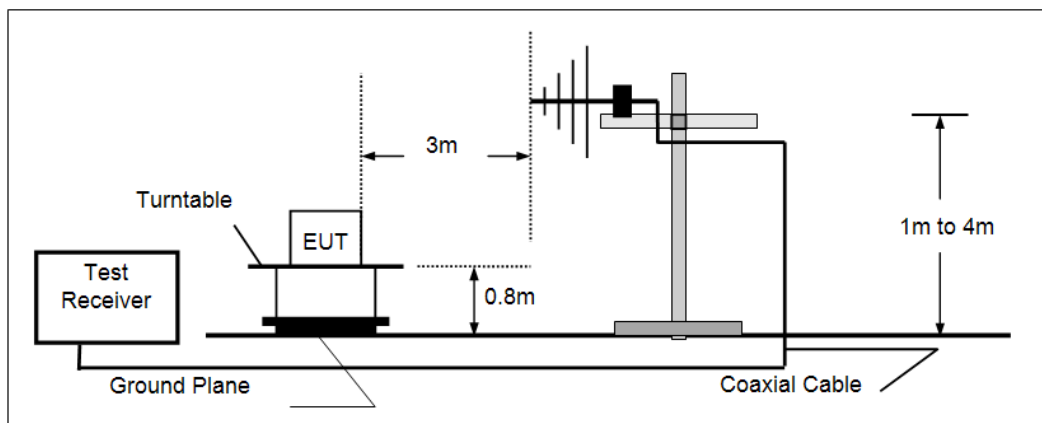

➤ Above 1GHz

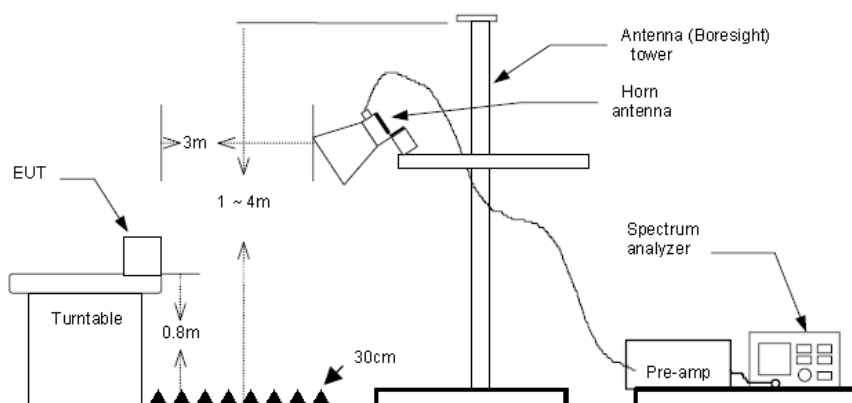

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
 - (1) Span shall be wide enough to fully capture the emission being measured;
 - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) Above 1GHz, RBW=1MHz, VBW=3MHz for Peak value
RBW=1MHz, VBW=10Hz for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note:

- 1) *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
- 2) *The emission levels of other frequencies are very lower than the limit and not shown in test report.*
- 3) *Below 1GHz, Have pre-scan all modulation mode, found the GFSK modulation Mid channel which it was worst case, so only the worst case's data on the test report.*
- 4) *Above 1GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report*


➤ **9kHz ~ 30MHz**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

➤ 30MHz ~ 1GHz

Polarization:

Vertical

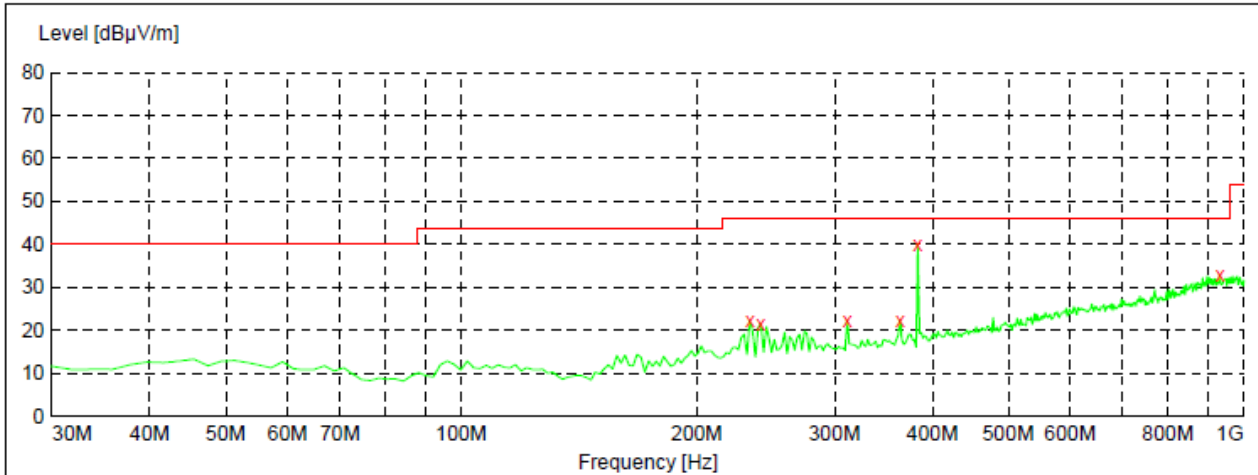


x x x MES GM1612236066_red

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
233.700000	22.10	-14.8	46.0	23.9	QP	100.0	133.00	HORIZONTAL
241.460000	21.50	-14.6	46.0	24.5	QP	100.0	38.00	HORIZONTAL
311.300000	22.30	-12.6	46.0	23.7	QP	100.0	338.00	HORIZONTAL
363.680000	22.40	-11.4	46.0	23.6	QP	100.0	327.00	HORIZONTAL
383.080000	40.10	-11.0	46.0	5.9	QP	100.0	266.00	HORIZONTAL
932.100000	32.80	1.4	46.0	13.2	QP	300.0	212.00	HORIZONTAL

Polarization:

Horizontal

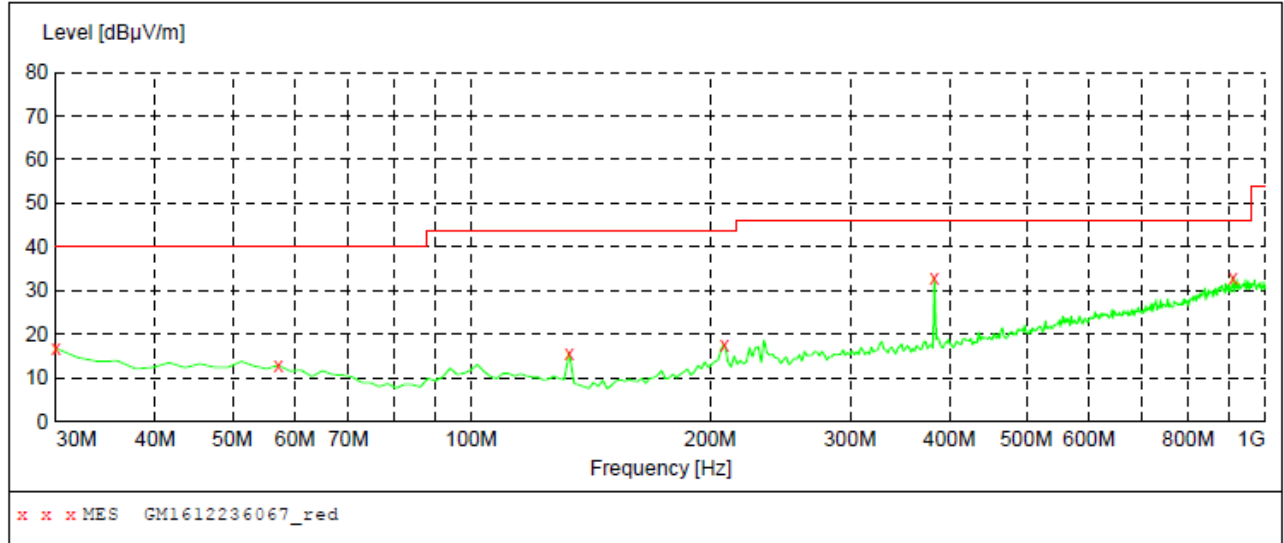

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	16.70	-18.6	40.0	23.3	QP	100.0	242.00	VERTICAL
57.160000	12.80	-16.9	40.0	27.2	QP	100.0	0.00	VERTICAL
132.820000	15.70	-19.7	43.5	27.8	QP	100.0	74.00	VERTICAL
208.480000	17.70	-15.7	43.5	25.8	QP	100.0	348.00	VERTICAL
383.080000	32.90	-11.0	46.0	13.1	QP	100.0	0.00	VERTICAL
910.760000	33.00	1.2	46.0	13.0	QP	100.0	132.00	VERTICAL

➤ Above 1GHz


CH00 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1549.34	42.35	24.85	5.43	36.65	35.98	74.00	-38.02	Vertical	Peak
3690.85	42.08	29.02	8.37	38.25	41.22	74.00	-32.78	Vertical	Peak
4809.50	34.53	31.09	9.55	36.93	38.24	54.00	-15.76	Vertical	Average
4809.50	53.23	31.09	9.55	36.93	56.94	74.00	-17.06	Vertical	Peak
7209.01	31.83	35.97	11.87	35.07	44.60	54.00	-9.40	Vertical	Average
7209.02	48.39	35.97	11.87	35.07	61.16	74.00	-12.84	Vertical	Peak
1573.19	43.32	24.94	5.49	36.69	37.06	74.00	-36.94	Horizontal	Peak
3943.39	38.57	29.41	8.70	38.14	38.54	74.00	-35.46	Horizontal	Peak
4809.50	34.53	31.09	9.55	36.93	38.24	54.00	-15.76	Horizontal	Average
4809.50	49.39	31.09	9.55	36.93	53.10	74.00	-20.90	Horizontal	Peak
7209.01	35.40	35.97	11.87	35.07	48.17	54.00	-5.83	Horizontal	Average
7209.02	52.09	35.97	11.87	35.07	64.86	74.00	-9.14	Horizontal	Peak

CH39 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1577.20	41.43	24.95	5.51	36.69	35.20	74.00	-38.80	Vertical	Peak
3834.51	38.94	29.24	8.55	38.21	38.52	74.00	-35.48	Vertical	Peak
4883.52	36.55	31.14	9.59	36.73	40.55	54.00	-13.45	Vertical	Average
4883.52	52.55	31.14	9.59	36.73	56.55	74.00	-17.45	Vertical	Peak
7319.96	28.46	36.07	11.99	34.92	41.60	54.00	-12.40	Vertical	Average
7319.96	47.56	36.07	11.99	34.92	60.70	74.00	-13.30	Vertical	Peak
4883.52	42.75	31.14	9.59	36.73	46.75	74.00	-27.25	Horizontal	Peak
4883.52	34.23	31.14	9.59	36.73	38.23	54.00	-15.77	Horizontal	Average
7319.96	51.56	36.07	11.99	34.92	64.70	74.00	-9.30	Horizontal	Peak
7319.96	32.64	36.07	11.99	34.92	45.78	54.00	-8.22	Horizontal	Average


CH78 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1593.34	41.42	24.99	5.55	36.71	35.25	74.00	-38.75	Vertical	Peak
3192.37	38.35	28.58	7.71	38.2	36.44	74.00	-37.56	Vertical	Peak
4958.68	35.19	31.18	9.64	36.52	39.49	54.00	-14.51	Vertical	Average
4958.68	51.49	31.18	9.64	36.52	55.79	74.00	-18.21	Vertical	Peak
7451.57	32.64	36.17	12.24	34.86	46.19	54.00	-7.81	Vertical	Average
7451.57	43.93	36.17	12.24	34.86	57.48	74.00	-16.52	Vertical	Peak
1577.20	44.78	24.95	5.51	36.69	38.55	74.00	-35.45	Horizontal	Peak
3598.09	38.27	28.87	8.27	38.27	37.14	74.00	-36.86	Horizontal	Peak
4958.68	32.51	31.18	9.64	36.52	36.81	54.00	-17.19	Horizontal	Average
4958.68	49.97	31.18	9.64	36.52	54.27	74.00	-19.73	Horizontal	Peak
7451.57	28.28	36.17	12.24	34.86	41.83	54.00	-12.17	Horizontal	Average
7451.57	48.20	36.17	12.24	34.86	61.75	74.00	-12.25	Horizontal	Peak


6. Test Setup Photos of the EUT

Conducted Emission (AC Mains)

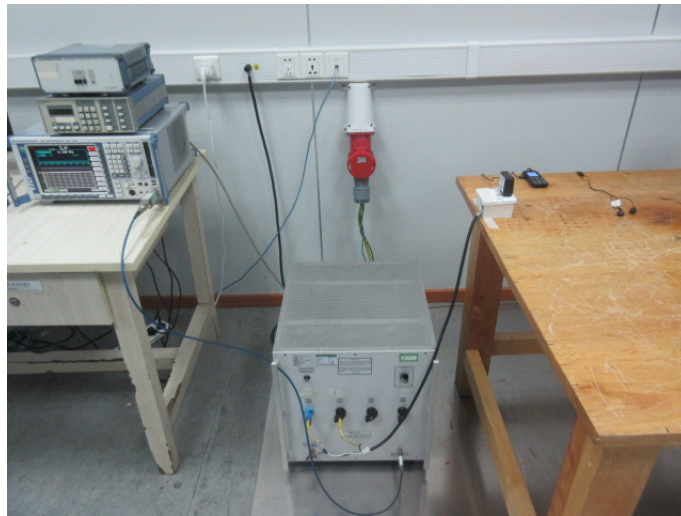

Radiated Emission

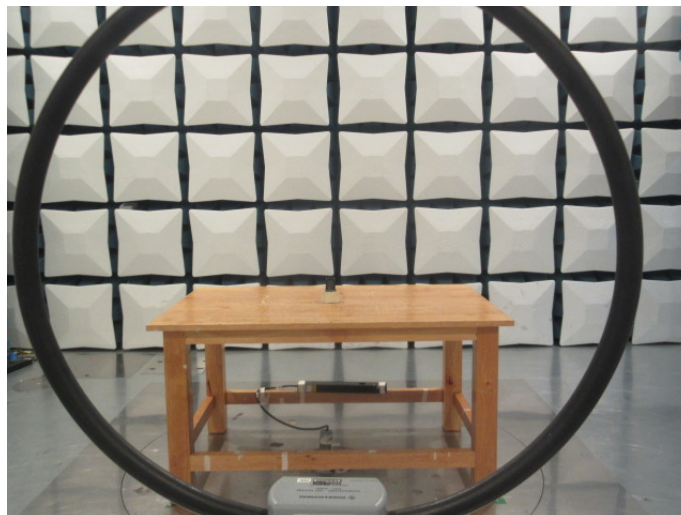

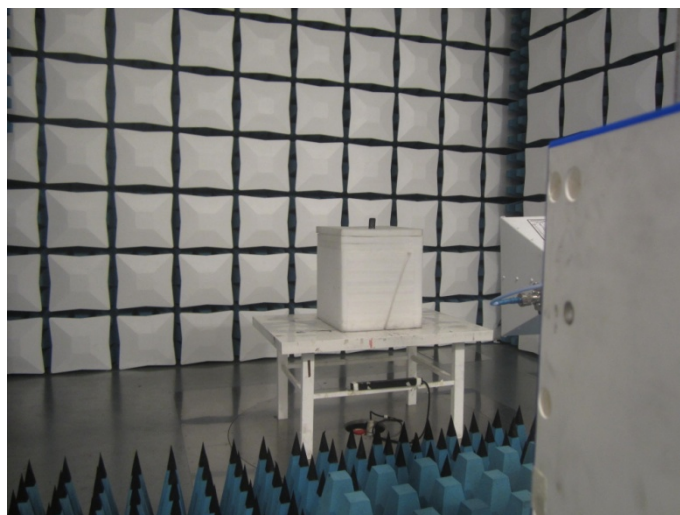

7. **External and Internal Photos of the EUT**

Reference to Test Report No.: TRE1612009601.

.....***End of Report***.....