

# FCC TEST REPORT

**Product Name:** Mobile Phone  
**Trade Mark:** Bmobile  
**Model No.:** K372  
**Report Number:** 180903035RFC-1  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
**FCC ID:** ZSW-10-021  
**Test Result:** PASS  
**Date of Issue:** September 19, 2018


Prepared for:

**b mobile HK Limited**  
**Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung; New Territories; HONG KONG; China**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6, Baoneng Science and Technology Park,**  
**Qingxiang Road No.1, Longhua New District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Tested by:

  
Henry Lu  
Project Engineer

Reviewed by:

  
Kevin Liang  
Assistant Manager

Approved by:

  
Billy Li  
Technical Director

Date:

September 19, 2018



**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

**Version**

| Version No. | Date               | Description |
|-------------|--------------------|-------------|
| V1.0        | September 19, 2018 | Original    |

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)[Http://www.uttlab.com](http://www.uttlab.com)

## CONTENTS

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                          | <b>4</b>  |
| 1.1 CLIENT INFORMATION                                 | 4         |
| 1.2 EUT INFORMATION                                    | 4         |
| 1.2.1 GENERAL DESCRIPTION OF EUT                       | 4         |
| 1.2.2 DESCRIPTION OF ACCESSORIES                       | 4         |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD  | 5         |
| 1.4 OTHER INFORMATION                                  | 5         |
| 1.5 DESCRIPTION OF SUPPORT UNITS                       | 5         |
| 1.6 TEST LOCATION                                      | 6         |
| 1.7 TEST FACILITY                                      | 6         |
| 1.8 DEVIATION FROM STANDARDS                           | 6         |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS             | 6         |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER       | 6         |
| 1.11 MEASUREMENT UNCERTAINTY                           | 7         |
| <b>2. TEST SUMMARY</b>                                 | <b>8</b>  |
| <b>3. EQUIPMENT LIST</b>                               | <b>9</b>  |
| <b>4. TEST CONFIGURATION</b>                           | <b>10</b> |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING               | 10        |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS                | 10        |
| 4.2 TEST CHANNELS                                      | 10        |
| 4.3 EUT TEST STATUS                                    | 10        |
| 4.4 PRE-SCAN                                           | 11        |
| 4.5 TEST SETUP                                         | 12        |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP                | 12        |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP               | 13        |
| 4.5.3 FOR CONDUCTED RF TEST SETUP                      | 14        |
| 4.6 SYSTEM TEST CONFIGURATION                          | 14        |
| 4.7 DUTY CYCLE                                         | 15        |
| <b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>   | <b>16</b> |
| 5.1 REFERENCE DOCUMENTS FOR TESTING                    | 16        |
| 5.2 ANTENNA REQUIREMENT                                | 16        |
| 5.3 CONDUCTED PEAK OUTPUT POWER                        | 17        |
| 5.4 20 dB BANDWIDTH                                    | 20        |
| 5.5 CARRIER FREQUENCIES SEPARATION                     | 23        |
| 5.6 NUMBER OF HOPPING CHANNEL                          | 25        |
| 5.7 DWELL TIME                                         | 29        |
| 5.8 CONDUCTED OUT OF BAND EMISSION                     | 33        |
| 5.9 RADIATED SPURIOUS EMISSIONS                        | 38        |
| 5.10 BAND EDGE MEASUREMENTS (RADIATED)                 | 42        |
| 5.11 CONDUCTED EMISSION                                | 45        |
| <b>APPENDIX 1 PHOTOS OF TEST SETUP</b>                 | <b>48</b> |
| <b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> | <b>48</b> |

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>               | b mobile HK Limited                                                                                                 |
| <b>Address of Applicant:</b>    | Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories;HONG KONG;China |
| <b>Manufacturer:</b>            | b mobile HK Limited                                                                                                 |
| <b>Address of Manufacturer:</b> | Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories;HONG KONG;China |

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

|                               |                                         |                    |
|-------------------------------|-----------------------------------------|--------------------|
| <b>Product Name:</b>          | Mobile Phone                            |                    |
| <b>Model No.:</b>             | K372                                    |                    |
| <b>Add. Model No.:</b>        | N/A                                     |                    |
| <b>Trade Mark:</b>            | Bmobile                                 |                    |
| <b>DUT Stage:</b>             | Identical Prototype                     |                    |
| <b>EUT Supports Function:</b> | <b>GSM Bands:</b>                       | GSM850/1900        |
|                               | <b>2.4 GHz ISM Band:</b>                | Bluetooth V2.0+EDR |
| <b>Software Version:</b>      | Bmobile_k372_OM_V05_2018090617          |                    |
| <b>Hardware Version:</b>      | DF800_PCB_V2.0                          |                    |
| <b>IMEI Code:</b>             | 352273017386340, 352751019523267        |                    |
| <b>Sample Received Date:</b>  | September 4, 2018                       |                    |
| <b>Sample Tested Date:</b>    | September 4, 2018 to September 13, 2018 |                    |

#### 1.2.2 Description of Accessories

| Adapter            |                                      |
|--------------------|--------------------------------------|
| <b>Trade Mark:</b> | Bmobile                              |
| <b>Model No.:</b>  | N/A                                  |
| <b>Input:</b>      | 100-240 V~50/60 Hz 0.2 A             |
| <b>Output:</b>     | 5.0 V $\overline{\text{---}}$ 500 mA |
| <b>AC Cable:</b>   | N/A                                  |
| <b>DC Cable:</b>   | 1 Meter, Unshielded without ferrite  |

| Battery                |                                  |
|------------------------|----------------------------------|
| <b>Trade Mark:</b>     | Bmobile                          |
| <b>Model No.:</b>      | BL-5C                            |
| <b>Battery Type:</b>   | Lithium-ion Rechargeable Battery |
| <b>Rated Voltage:</b>  | 3.7 Vdc                          |
| <b>Rated Capacity:</b> | 600 mAh                          |

| Cable               |           |
|---------------------|-----------|
| <b>Trade Mark:</b>  | Bmobile   |
| <b>Model No.:</b>   | N/A       |
| <b>Description:</b> | Earphone  |
| <b>Length:</b>      | 1.0 Meter |

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

|                       |                                         |
|-----------------------|-----------------------------------------|
| Frequency Band:       | 2400 MHz to 2483.5 MHz                  |
| Frequency Range:      | 2402 MHz to 2480 MHz                    |
| Bluetooth Version:    | Bluetooth BR+EDR                        |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS) |
| Type of Modulation:   | GFSK, $\pi/4$ DQPSK, 8DPSK              |
| Number of Channels:   | 79                                      |
| Channel Separation:   | 1 MHz                                   |
| Hopping Channel Type: | Adaptive Frequency Hopping Systems      |
| Antenna Type:         | Integral Antenna                        |
| Antenna Gain:         | 0.5 dBi                                 |
| Maximum Peak Power:   | 5.73 dBm                                |
| Normal Test Voltage:  | 3.7 Vdc                                 |

### 1.4 OTHER INFORMATION

| Operation Frequency Each of Channel          |                                   |
|----------------------------------------------|-----------------------------------|
| $f = 2402 + k \text{ MHz}, k = 0, \dots, 78$ |                                   |
| Note:                                        |                                   |
| f                                            | is the operating frequency (MHz); |
| k                                            | is the operating channel.         |

| Modulation Configure |        |             |             |
|----------------------|--------|-------------|-------------|
| Modulation           | Packet | Packet Type | Packet Size |
| GFSK                 | 1-DH1  | 4           | 27          |
|                      | 1-DH3  | 11          | 183         |
|                      | 1-DH5  | 15          | 339         |
| $\pi/4$ DQPSK        | 2-DH1  | 20          | 54          |
|                      | 2-DH3  | 26          | 367         |
|                      | 2-DH5  | 30          | 679         |
| 8DPSK                | 3-DH1  | 24          | 83          |
|                      | 3-DH3  | 27          | 552         |
|                      | 3-DH5  | 31          | 1021        |

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

#### 1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------|--------------|-----------|---------------|-------------|
| N/A         | N/A          | N/A       | N/A           | N/A         |

#### 2) Support Cable

| Cable No. | Description   | Connector | Length     | Supplied by |
|-----------|---------------|-----------|------------|-------------|
| 1         | Antenna Cable | SMA       | 0.30 Meter | UnionTrust  |

## 1.6 TEST LOCATION

---

### **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109  
Telephone: +86 (0) 755 2823 0888  
Fax: +86 (0) 755 2823 0886

---

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### **IC-Registration No.: 21600-1**

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

### **A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **FCC Accredited Lab.**

Designation Number: CN1194  
Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Conducted emission 9KHz-150KHz  | $\pm 3.8$ dB            |
| 2   | Conducted emission 150KHz-30MHz | $\pm 3.4$ dB            |
| 3   | Radiated emission 9KHz-30MHz    | $\pm 4.9$ dB            |
| 4   | Radiated emission 30MHz-1GHz    | $\pm 4.7$ dB            |
| 5   | Radiated emission 1GHz-18GHz    | $\pm 5.1$ dB            |
| 6   | Radiated emission 18GHz-26GHz   | $\pm 5.2$ dB            |
| 7   | Radiated emission 26GHz-40GHz   | $\pm 5.2$ dB            |

## 2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases |                                                        |                                                 |        |
|-----------------------------------------|--------------------------------------------------------|-------------------------------------------------|--------|
| Test Item                               | Test Requirement                                       | Test Method                                     | Result |
| Antenna Requirement                     | FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | N/A                                             | PASS   |
| AC Power Line Conducted Emission        | FCC 47 CFR Part 15 Subpart C Section 15.207            | ANSI C63.10-2013 Section 6.2                    | PASS   |
| Conducted Peak Output Power             | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)     | ANSI C63.10-2013 Section 7.8.5                  | PASS   |
| 20 dB Bandwidth                         | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)     | ANSI C63.10-2013 Section 6.9.2                  | PASS   |
| Carrier Frequencies Separation          | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)     | ANSI C63.10-2013 Section 7.8.2                  | PASS   |
| Number of Hopping Channel               | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)     | ANSI C63.10-2013 Section 7.8.3                  | PASS   |
| Dwell Time                              | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)     | ANSI C63.10-2013 Section 7.8.4                  | PASS   |
| Conducted Out of Band Emission          | FCC 47 CFR Part 15 Subpart C Section 15.247(d)         | ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8 | PASS   |
| Radiated Emissions                      | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209     | ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6        | PASS   |
| Band Edge Measurement                   | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209     | ANSI C63.10-2013 Section 6.10.5                 | PASS   |

### 3. EQUIPMENT LIST

| Radiated Emission Test Equipment List |                                         |               |           |                            |                         |                             |
|---------------------------------------|-----------------------------------------|---------------|-----------|----------------------------|-------------------------|-----------------------------|
| Used                                  | Equipment                               | Manufacturer  | Model No. | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>   | 3M Chamber & Accessory Equipment        | ETS-LINDGREN  | 3M        | N/A                        | Dec. 20, 2015           | Dec. 19, 2018               |
| <input checked="" type="checkbox"/>   | Receiver                                | R&S           | ESIB26    | 100114                     | Dec. 10, 2017           | Dec. 10, 2018               |
| <input checked="" type="checkbox"/>   | Loop Antenna                            | ETS-LINDGREN  | 6502      | 00202525                   | Dec. 22, 2017           | Dec. 22, 2018               |
| <input checked="" type="checkbox"/>   | Broadband Antenna                       | ETS-LINDGREN  | 3142E     | 00201566                   | Dec. 17, 2017           | Dec. 17, 2018               |
| <input checked="" type="checkbox"/>   | Preamplifier                            | HP            | 8447F     | 2805A02960                 | Dec. 10, 2017           | Dec. 10, 2018               |
| <input checked="" type="checkbox"/>   | Horn Antenna (Pre-amplifier)            | ETS-LINDGREN  | 3117-PA   | 00201874                   | May 22, 2018            | May 22, 2019                |
| <input checked="" type="checkbox"/>   | Horn Antenna (Pre-amplifier)            | ETS-LINDGREN  | 3116C-PA  | 00202652                   | Dec. 17, 2017           | Dec. 17, 2018               |
| <input checked="" type="checkbox"/>   | Multi device Controller                 | ETS-LINDGREN  | 7006-001  | 00160105                   | N/A                     | N/A                         |
| <input checked="" type="checkbox"/>   | Band Rejection Filter (2400MHz~2500MHz) | Micro-Tronics | BRM50702  | G248                       | June 06, 2018           | June 06, 2019               |
| <input checked="" type="checkbox"/>   | Wideband Radio Communication Tester     | R&S           | CMW500    | 1201.002k50-104945-zQ      | Mar. 05, 2018           | Mar. 04, 2019               |
| <input checked="" type="checkbox"/>   | Test Software                           | Audix         | e3        | Software Version: 9.160323 |                         |                             |

| Conducted Emission Test Equipment List |               |              |           |                            |                         |                             |
|----------------------------------------|---------------|--------------|-----------|----------------------------|-------------------------|-----------------------------|
| Used                                   | Equipment     | Manufacturer | Model No. | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>    | Receiver      | R&S          | ESR7      | 1316.3003K07-101181-K3     | Dec. 10, 2017           | Dec. 10, 2018               |
| <input checked="" type="checkbox"/>    | Pulse Limiter | R&S          | ESH3-Z2   | 0357.8810.54               | Dec. 10, 2017           | Dec. 10, 2018               |
| <input checked="" type="checkbox"/>    | LISN          | R&S          | ESH2-Z5   | 860014/024                 | Dec. 10, 2017           | Dec. 10, 2018               |
| <input checked="" type="checkbox"/>    | Test Software | Audix        | e3        | Software Version: 9.160323 |                         |                             |

| Conducted RF test Equipment List    |                                     |              |           |                       |                         |                             |
|-------------------------------------|-------------------------------------|--------------|-----------|-----------------------|-------------------------|-----------------------------|
| Used                                | Equipment                           | Manufacturer | Model No. | Serial Number         | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer               | KEYSIGHT     | N9010A    | MY51440197            | Dec.10, 2017            | Dec. 10, 2018               |
| <input checked="" type="checkbox"/> | Wideband Radio Communication Tester | R&S          | CMW500    | 1201.002k50-104945-zQ | Mar. 05, 2018           | Mar. 04, 2019               |

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

| Environment Parameter                                           | Selected Values During Tests |             |                       |
|-----------------------------------------------------------------|------------------------------|-------------|-----------------------|
| Test Condition                                                  | Ambient                      |             |                       |
|                                                                 | Temperature (°C)             | Voltage (V) | Relative Humidity (%) |
| NT/NV                                                           | +15 to +35                   | 3.7         | 20 to 75              |
| <b>Remark:</b><br>1) NV: Normal Voltage; NT: Normal Temperature |                              |             |                       |

### 4.2 TEST CHANNELS

| Mode                             | Tx/Rx Frequency      | Test RF Channel Lists |            |            |
|----------------------------------|----------------------|-----------------------|------------|------------|
|                                  |                      | Lowest(L)             | Middle(M)  | Highest(H) |
| GFSK<br>(DH1, DH3, DH5)          | 2402 MHz to 2480 MHz | Channel 0             | Channel 39 | Channel 78 |
|                                  |                      | 2402 MHz              | 2441 MHz   | 2480 MHz   |
| $\pi/4$ DQPSK<br>(DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0             | Channel 39 | Channel 78 |
|                                  |                      | 2402 MHz              | 2441 MHz   | 2480 MHz   |
| 8DPSK<br>(DH1, DH3, DH5)         | 2402 MHz to 2480 MHz | Channel 0             | Channel 39 | Channel 78 |
|                                  |                      | 2402 MHz              | 2441 MHz   | 2480 MHz   |

### 4.3 EUT TEST STATUS

| Type of Modulation            | Tx Function | Description                                                                                                                                                      |
|-------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GFSK/ $\pi/4$ DQPSK/<br>8DPSK | 1Tx         | 1. Keep the EUT in continuously transmitting with Modulation test single<br>2. Keep the EUT in continuously transmitting with Modulation test Hopping Frequency. |

| Power Setting                                                          |
|------------------------------------------------------------------------|
| Power Setting: not applicable, test used software default power level. |

| Test Software |
|---------------|
| EngineerMode  |



## 4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

| Type of Modulation                                                               | GFSK                                    |                                     |                                     | $\pi/4$ DQPSK                       |                                     |                                     | 8DPSK                               |                                     |                                     |
|----------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Data Packets                                                                     | 1-DH1                                   | 1-DH3                               | 1-DH5                               | 2-DH1                               | 2-DH3                               | 2-DH5                               | 3-DH1                               | 3-DH3                               | 3-DH5                               |
| Available Channel                                                                | 0 to 78                                 |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| Test Item                                                                        | Test channel and choose of data packets |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| AC Power Line Conducted Emission                                                 | Frequency Hopping Channel 0 to 78       |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | Link                                    |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| Conducted Peak Output Power                                                      | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| 20 dB Bandwidth                                                                  | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Carrier Frequencies Separation                                                   | Frequency Hopping Channel 0 to 78       |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Number of Hopping Channel                                                        | Frequency Hopping Channel 0 to 78       |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Dwell Time                                                                       | Channel 39                              |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input checked="" type="checkbox"/>     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Conducted Out of Band Emission                                                   | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Radiated Emissions                                                               | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Band Edge Measurements (Radiated)                                                | Channel 0 & 78                          |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Remark:                                                                          |                                         |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| 1. The mark " <input checked="" type="checkbox"/> " means is chosen for testing; |                                         |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| 2. The mark " <input type="checkbox"/> " means is not chosen for testing.        |                                         |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |


## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

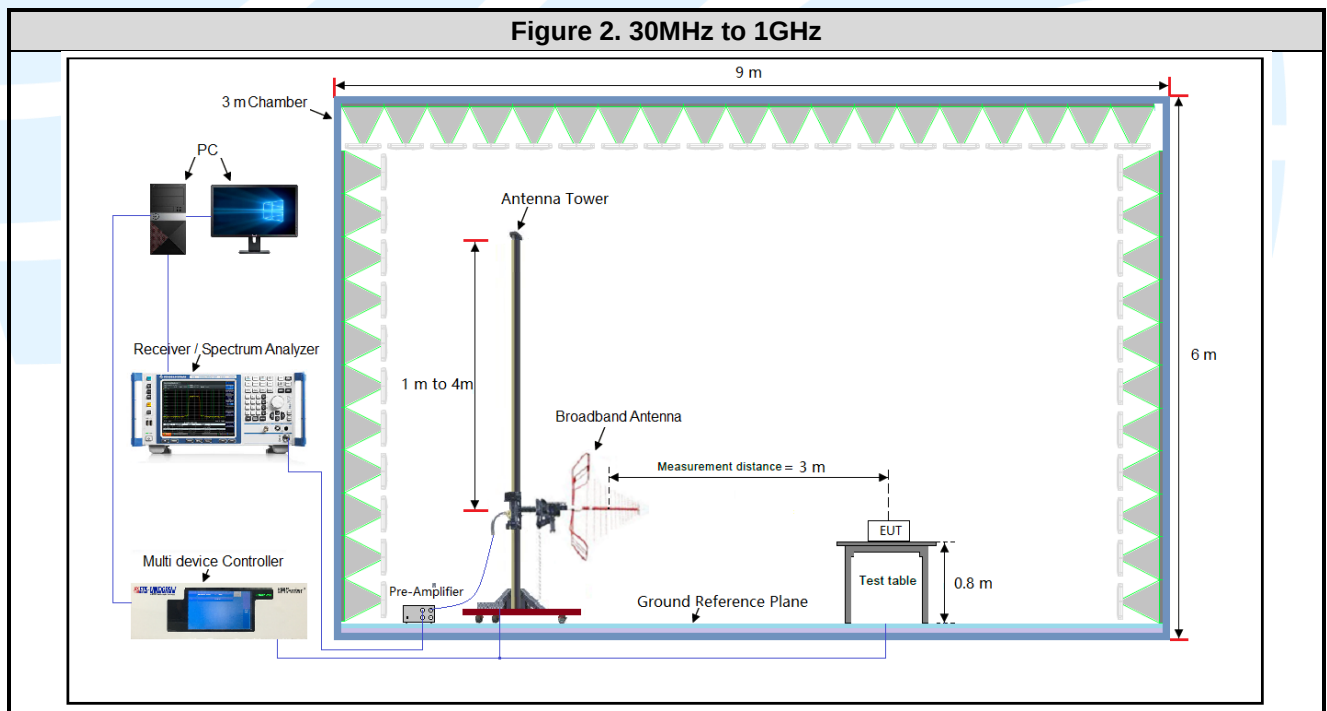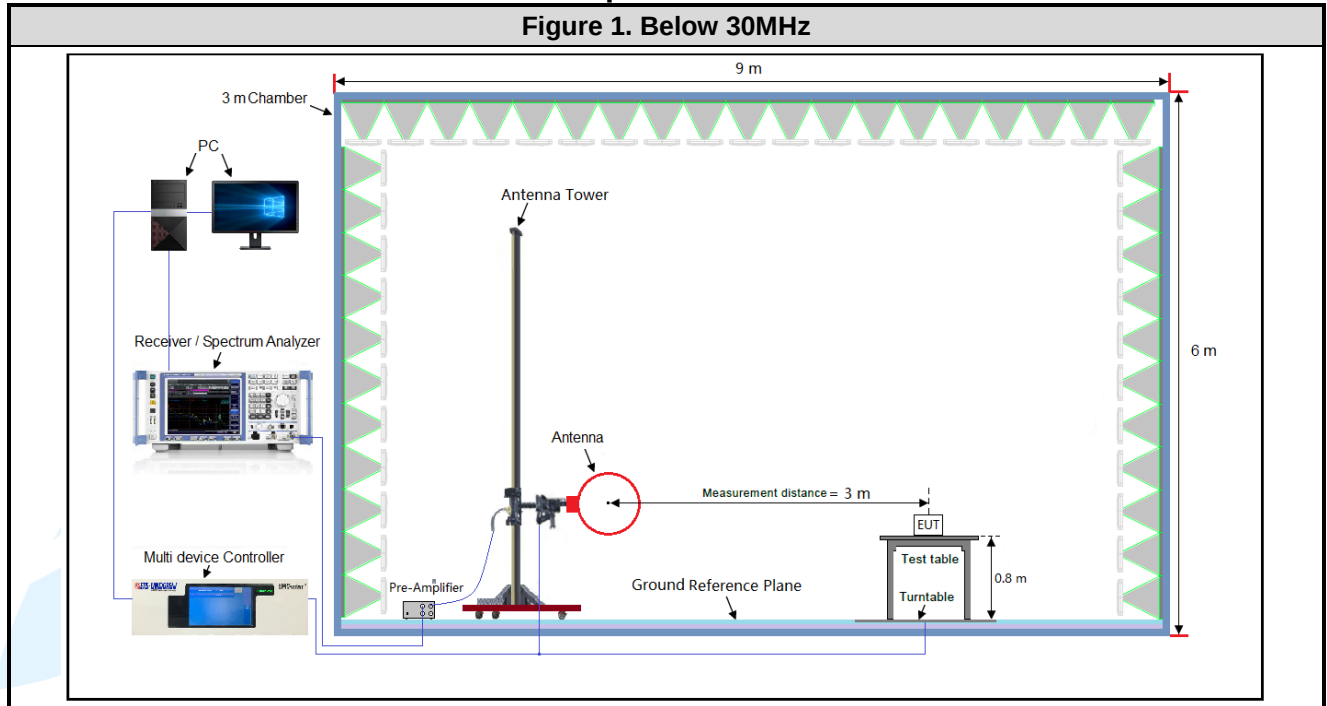


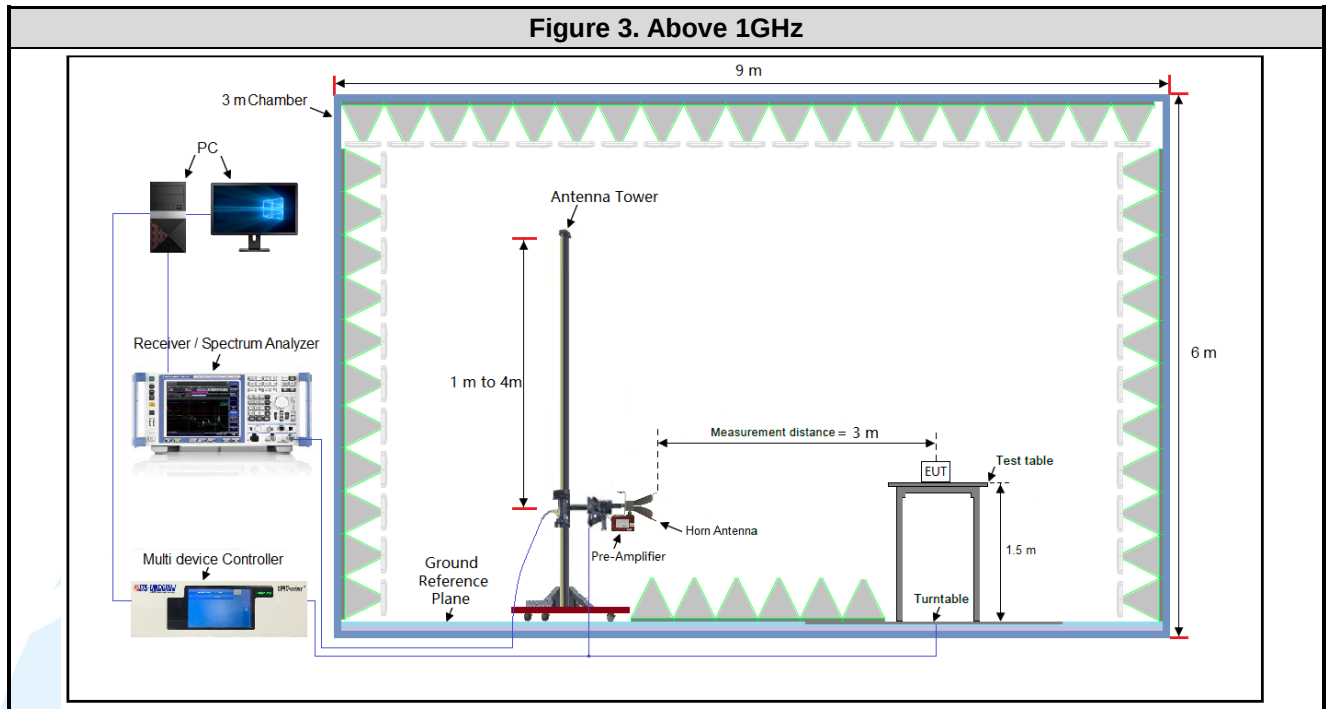

#### 4.5.2 For Conducted Emissions test setup

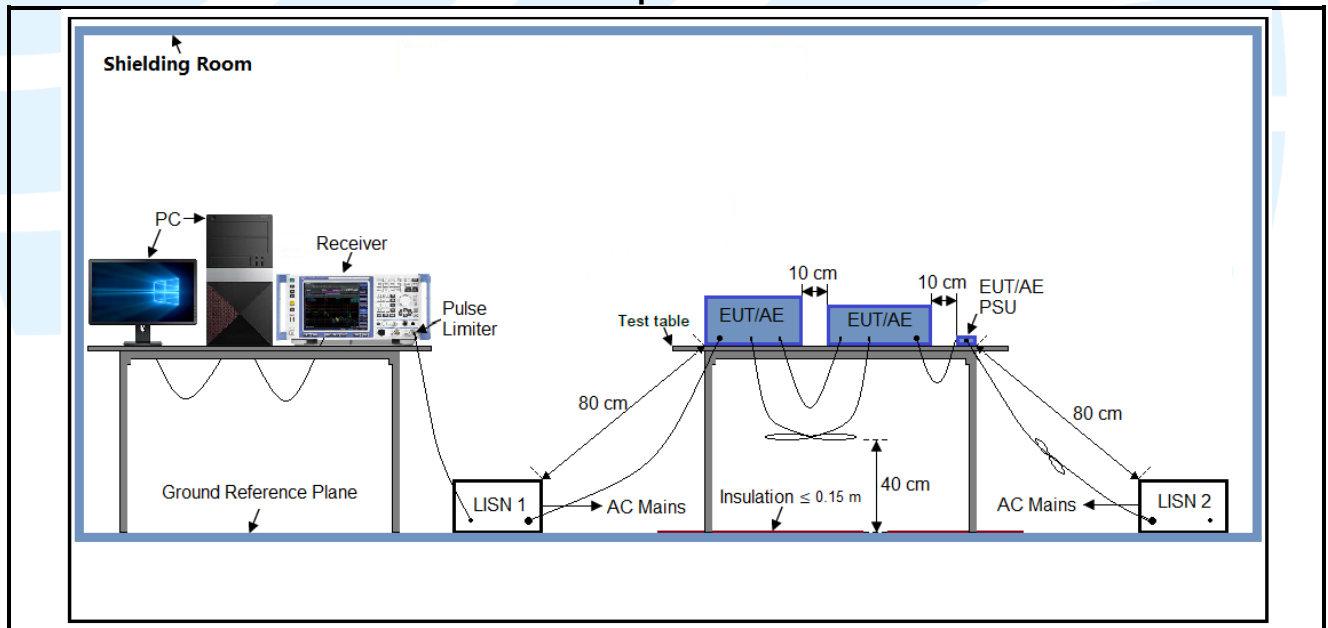

### 4.5.3 For Conducted RF test setup

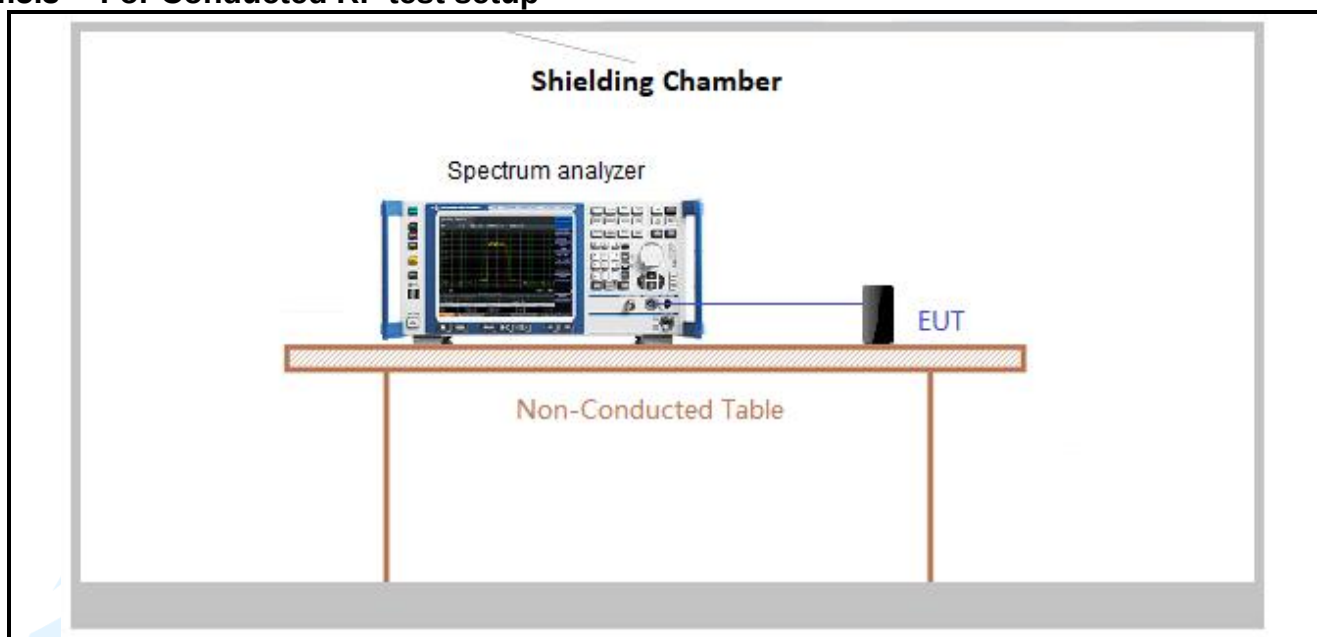

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


### Test Results

| Type of Modulation | Packets | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/ T Minimum VBW (kHz) | Average Factor (dB) |
|--------------------|---------|----------------|---------------|---------------------|----------------|------------------------|------------------------|---------------------|
| GFSK               | 3DH5    | 2.88           | 3.74          | 0.77                | 77.11          | 1.13                   | 0.35                   | -2.26               |

### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;
- 3) Average factor =  $20 \log_{10} \text{Duty Cycle}$ .

The test plot as follows

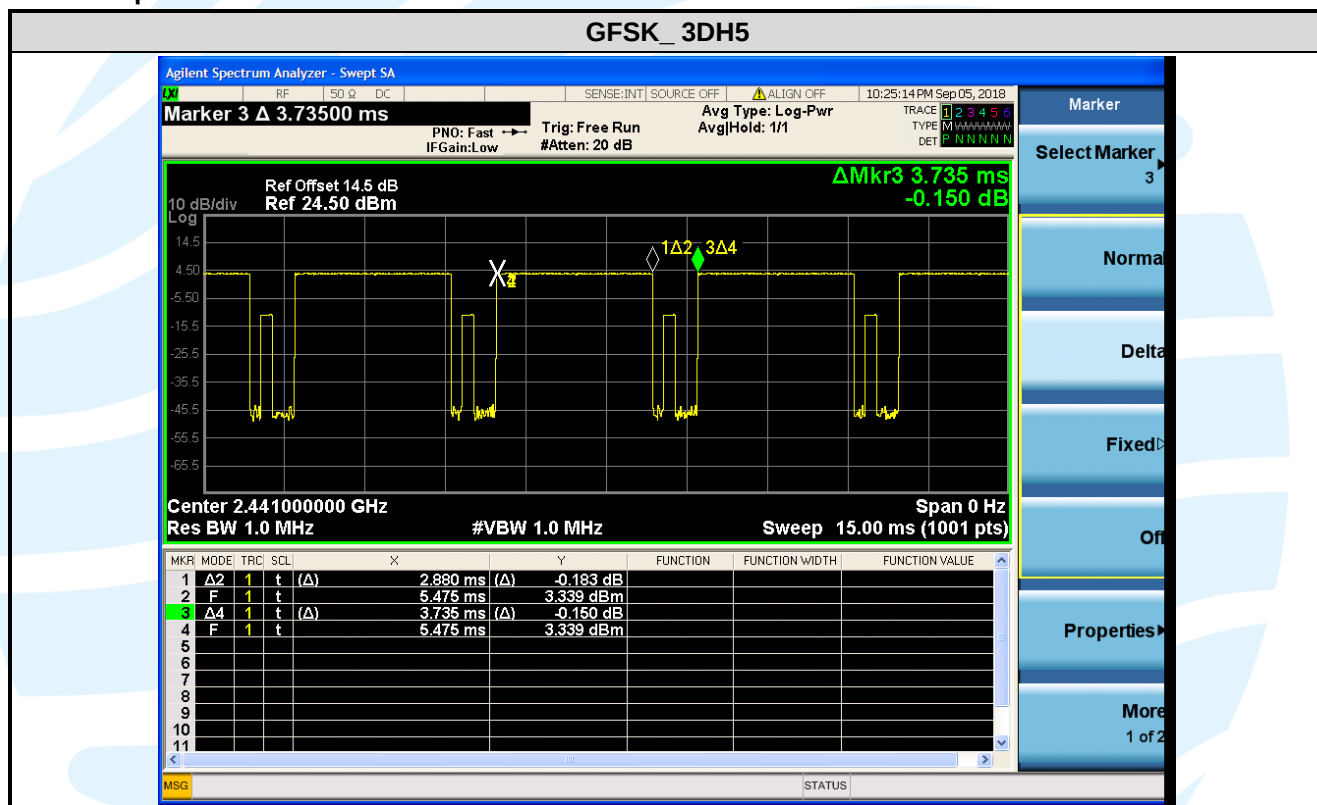

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity           | Document Title                                                                |
|-----|--------------------|-------------------------------------------------------------------------------|
| 1   | FCC 47 CFR Part 2  | Frequency allocations and radio treaty matters; general rules and regulations |
| 2   | FCC 47 CFR Part 15 | Radio Frequency Devices                                                       |
| 3   | ANSI C63.10-2013   | American National Standard for Testing Unlicensed Wireless Devices            |

### 5.2 ANTENNA REQUIREMENT

| Standard Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>15.203 requirement:</b><br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(b) (4) requirement:</b><br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |
| <p><b>EUT Antenna:</b><br/>Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 0.5 dBi.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |


### 5.3 CONDUCTED PEAK OUTPUT POWER



- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)
- Test Method:** ANSI C63.10-2013 Section 7.8.5
- Limit:** For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.  
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Use the following spectrum analyzer settings:
    - Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
    - RBW > 20 dB bandwidth of the emission being measured.
    - VBW  $\geq$  RBW.
    - Sweep: Auto.
    - Detector function: Peak.
    - Trace: Max hold.
  - Allow trace to stabilize.
  - Use the marker-to-peak function to set the marker to the peak of the emission.
  - The indicated level is the peak output power, after any corrections for external attenuators and cables.
  - A plot of the test results and setup description shall be included in the test report.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:** Pass

| Type of Modulation | Peak Output Power (dBm) |            |            | Peak Output Power (mW) |            |            |
|--------------------|-------------------------|------------|------------|------------------------|------------|------------|
|                    | Channel 0               | Channel 39 | Channel 78 | Channel 0              | Channel 39 | Channel 78 |
| GFSK               | 3.33                    | 3.07       | 4.04       | 2.15                   | 2.03       | 2.54       |
| $\pi/4$ DQPSK      | 4.79                    | 4.40       | 5.39       | 3.02                   | 2.75       | 3.46       |
| 8DPSK              | 5.09                    | 4.76       | 5.73       | 3.22                   | 2.99       | 3.74       |

Note: The antenna gain of 0.5 dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

The test plot as follows:

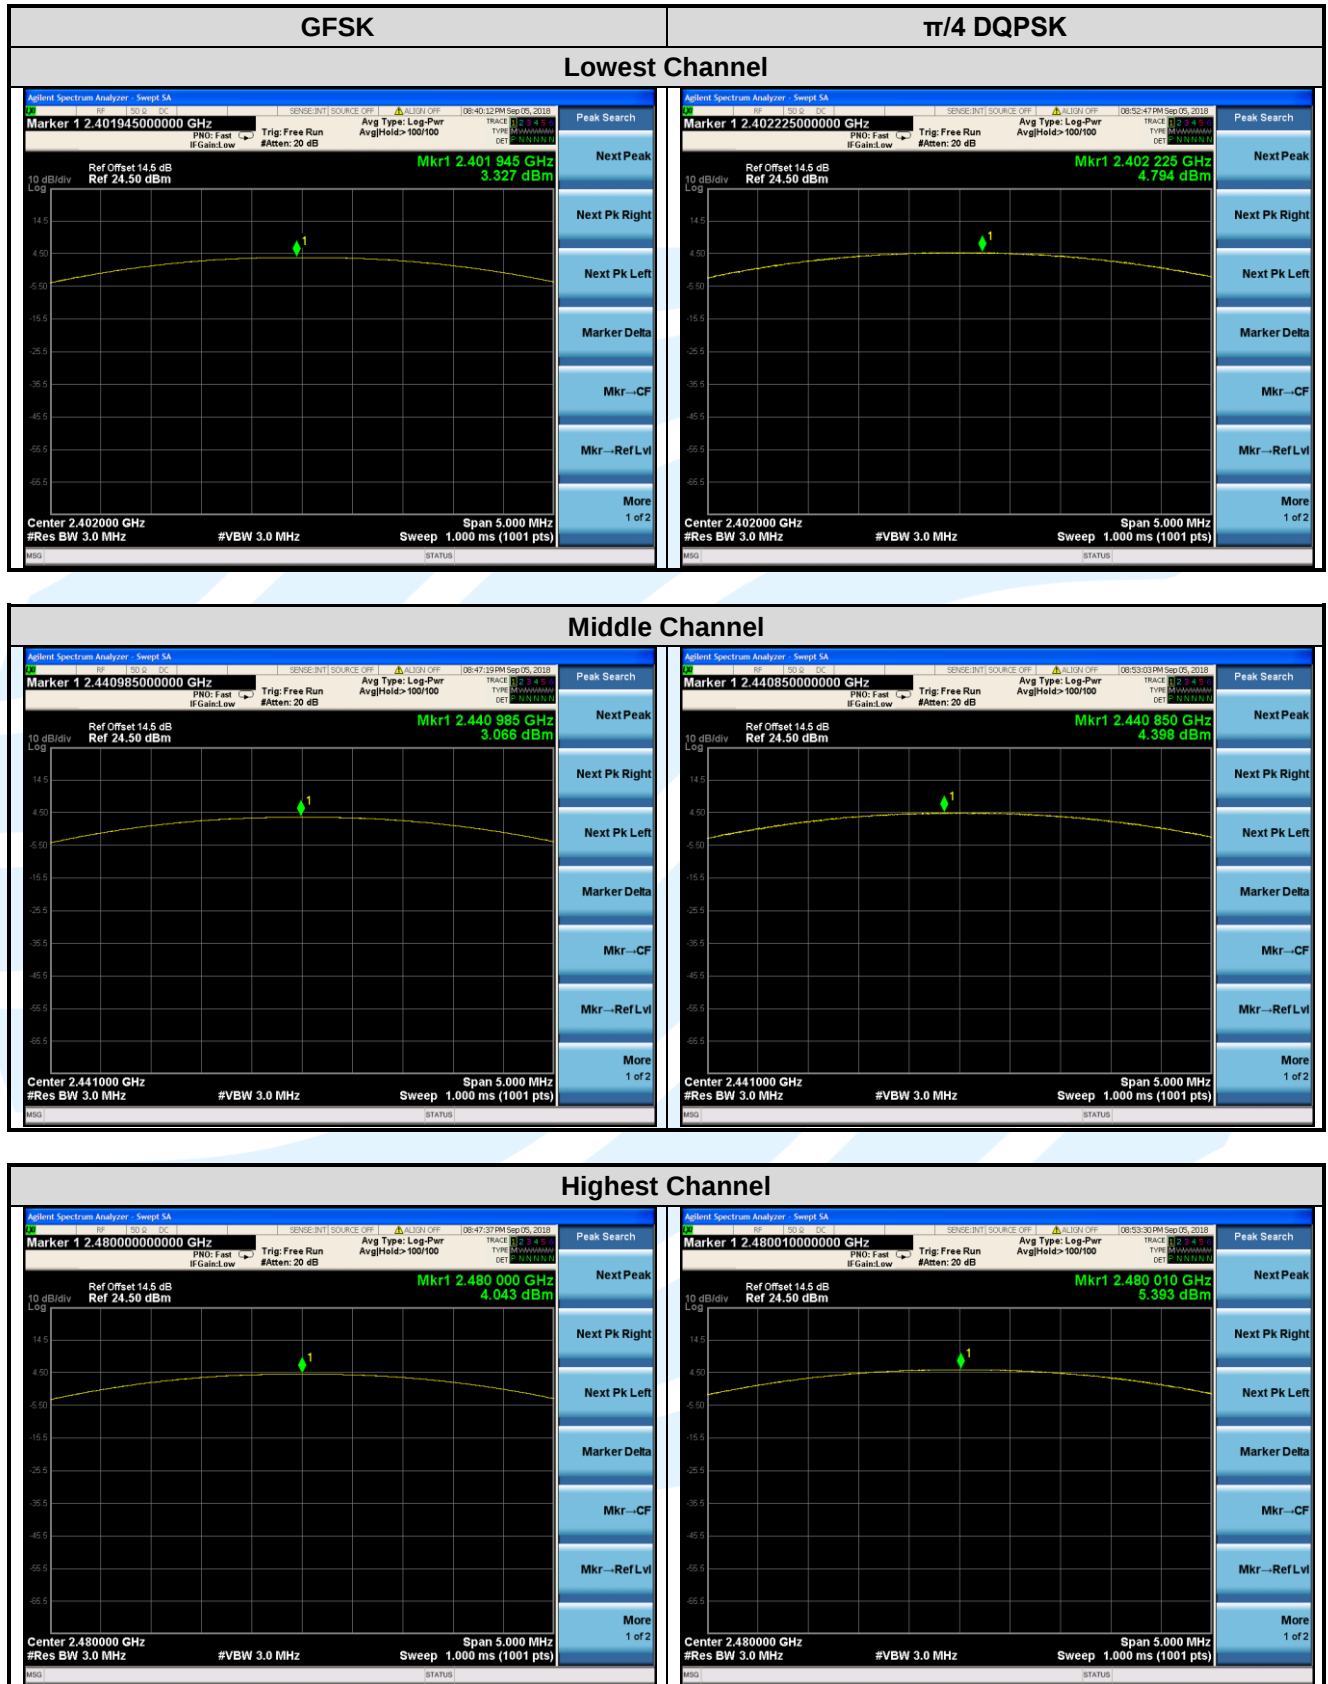

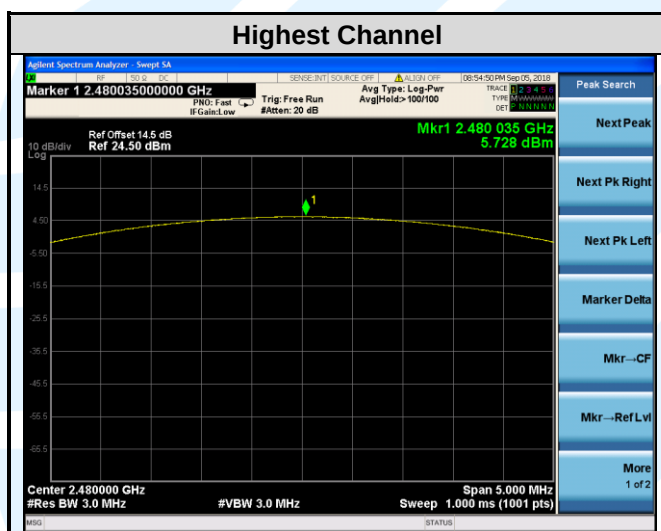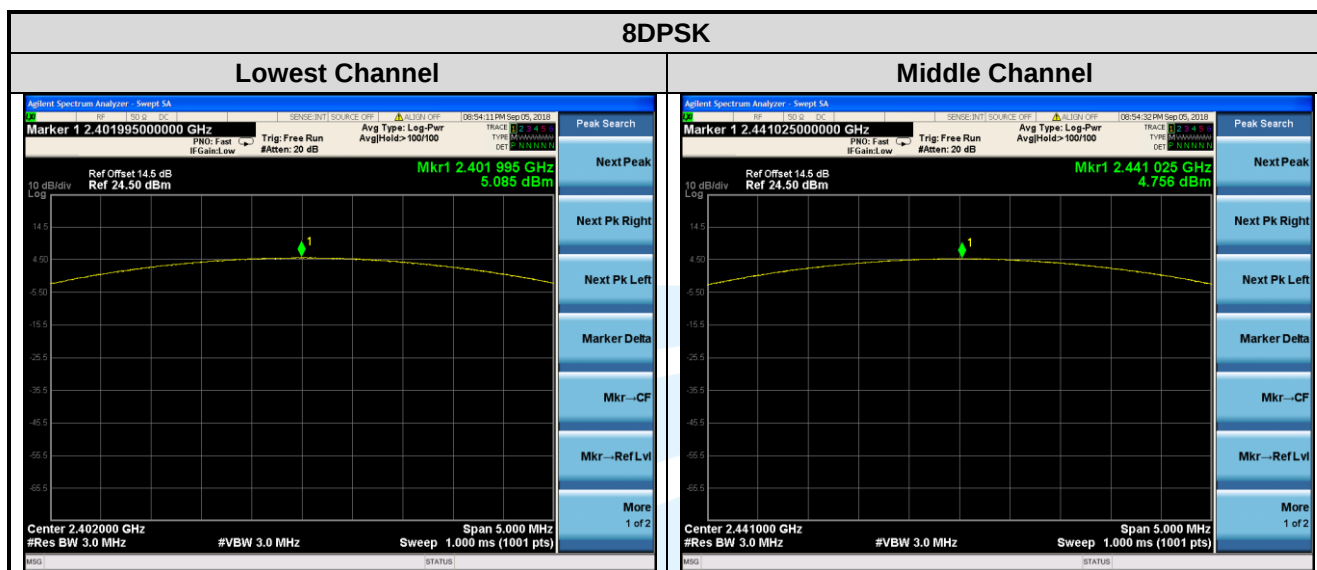




## 5.420 DB BANDWIDTH

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)
- Test Method:** ANSI C63.10-2013 Section 6.9.2
- Limit:** None; for reporting purposes only.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
Use the following spectrum analyzer settings:
- Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
  - RBW = 1% to 5% of the OBW.
  - VBW  $\geq 3 \times$  RBW
  - Sweep = auto;
  - Detector function = peak
  - Trace = max hold
  - All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:** Pass

| Type of Modulation | 20 dB Bandwidth (MHz) |            |            | 99% Bandwidth (MHz) |            |            |
|--------------------|-----------------------|------------|------------|---------------------|------------|------------|
|                    | Channel 0             | Channel 39 | Channel 78 | Channel 0           | Channel 39 | Channel 78 |
| GFSK               | 0.9598                | 0.9604     | 0.9566     | 0.8905              | 0.9022     | 0.8945     |
| $\pi/4$ DQPSK      | 1.3220                | 1.3220     | 1.3220     | 1.1864              | 1.1908     | 1.1925     |
| 8DPSK              | 1.3200                | 1.3140     | 1.3140     | 1.2049              | 1.2091     | 1.2008     |

The test plot as follows:

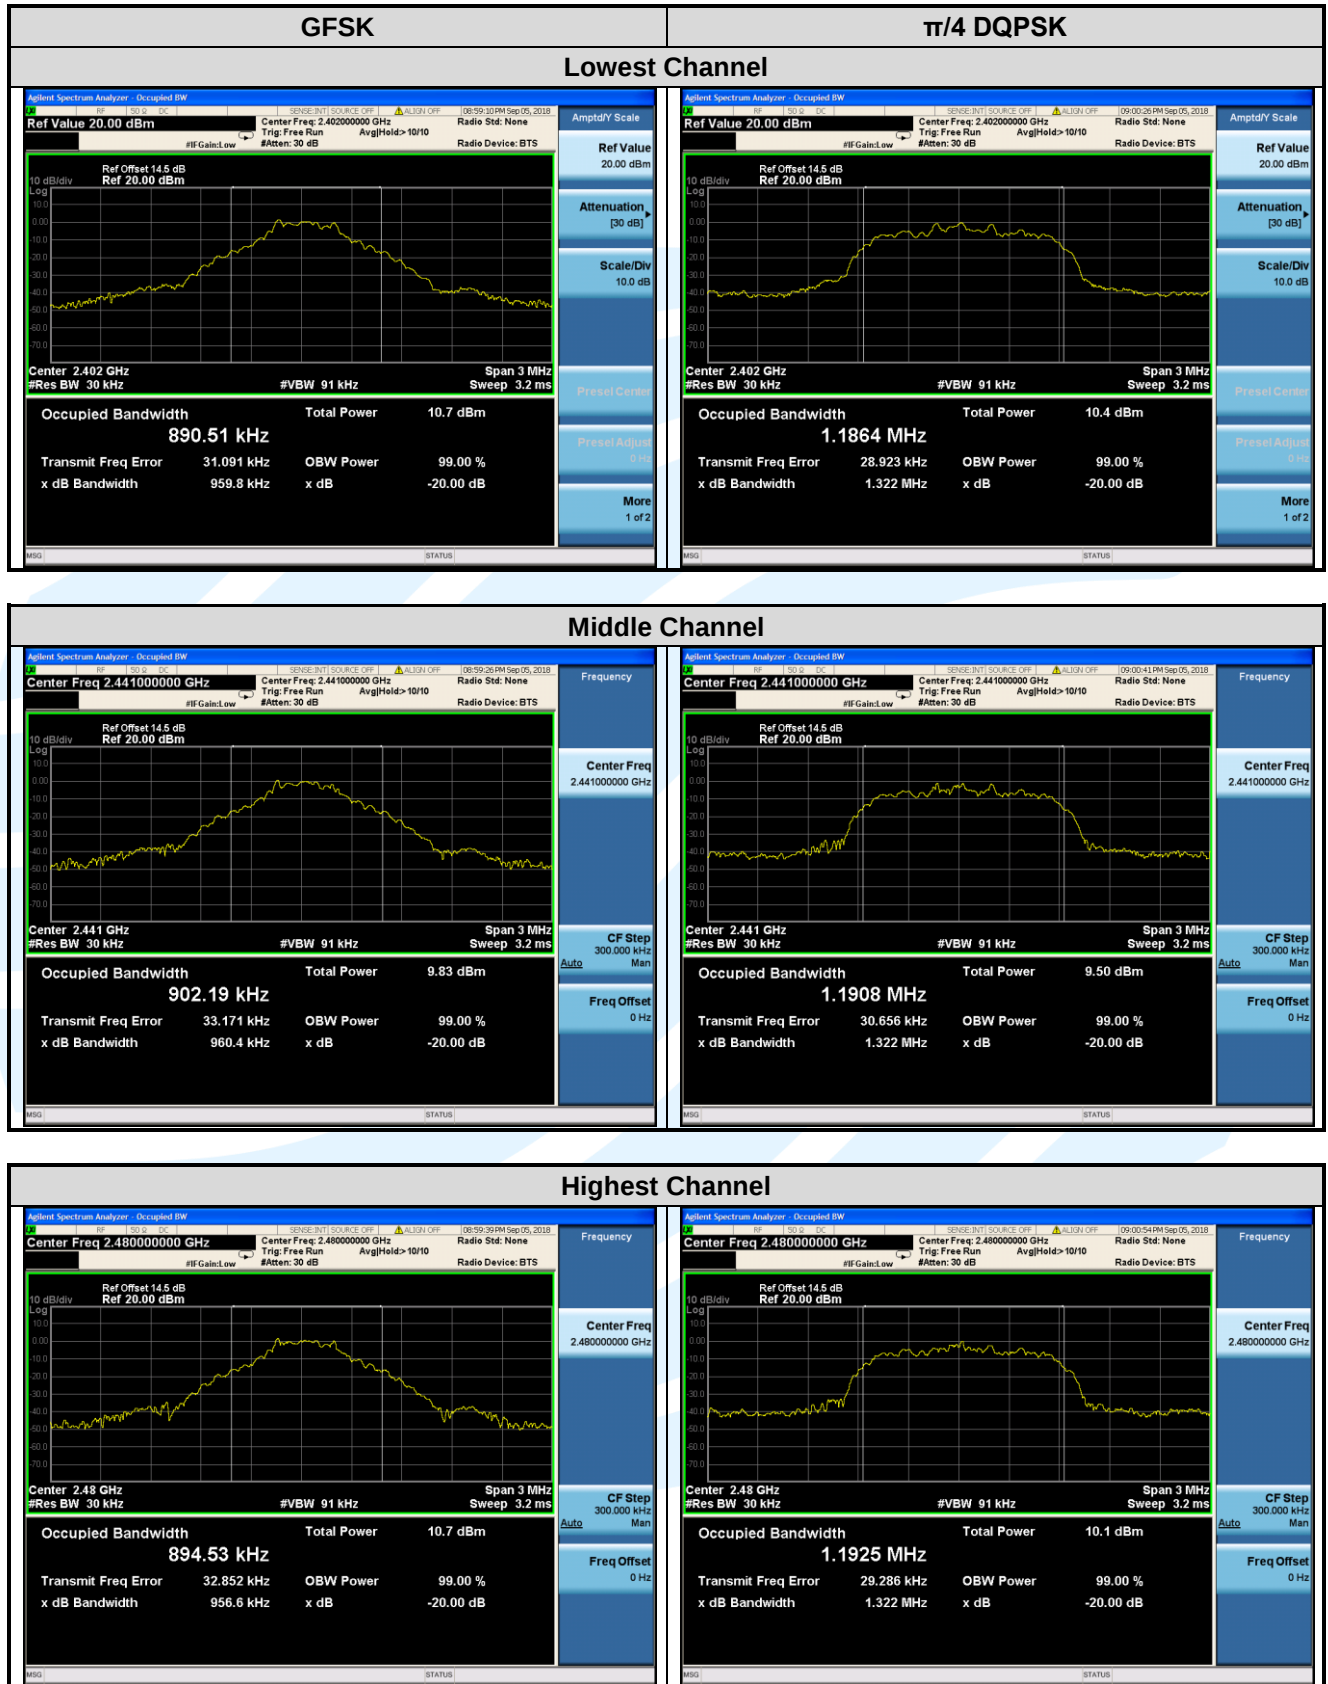

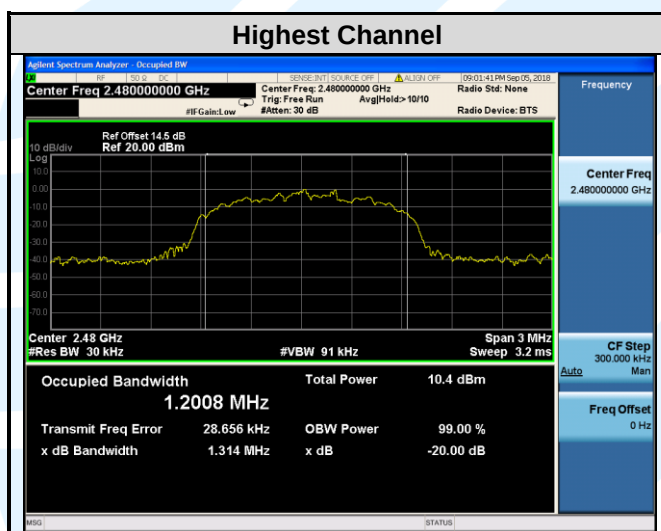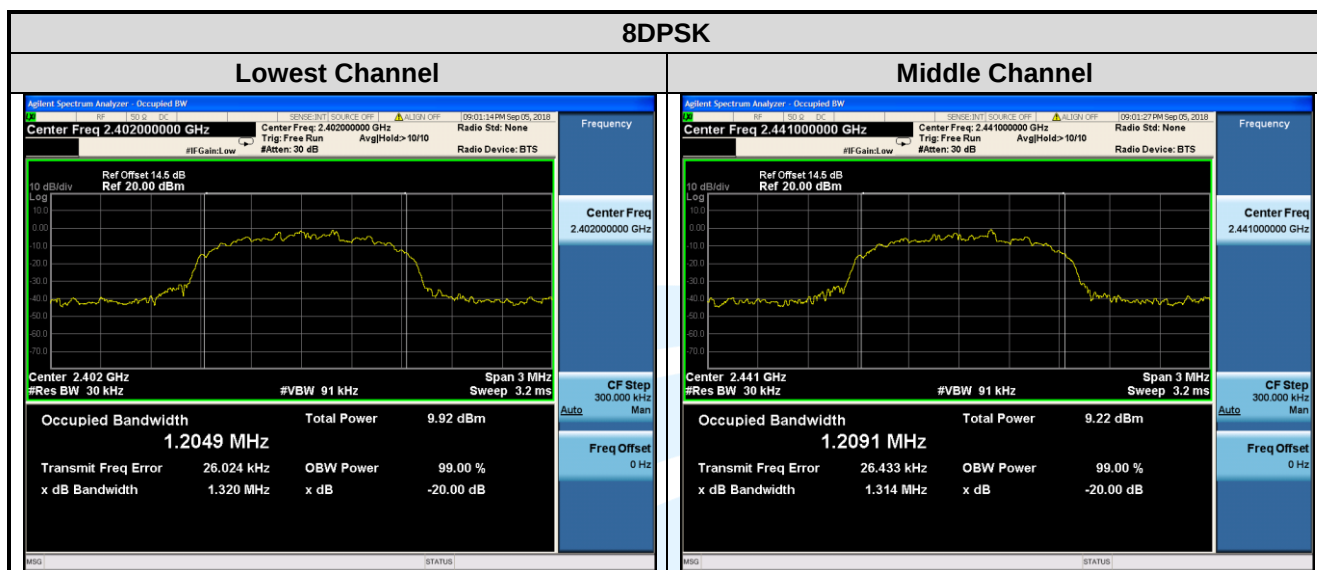

## 5.5 CARRIER FREQUENCIES SEPARATION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.2

**Limit:** Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.  
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW)  $\geq$  RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.
- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

| Type of Modulation                                    | Adjacent Channel Separation (MHz) | Minimum Limit (MHz) |
|-------------------------------------------------------|-----------------------------------|---------------------|
|                                                       | Channel 39                        | Channel 39          |
| GFSK                                                  | 1.000                             | 0.638               |
| $\pi/4$ DQPSK                                         | 1.000                             | 0.881               |
| 8DPSK                                                 | 1.000                             | 0.876               |
| Note: The minimum limit is two-third 20 dB bandwidth. |                                   |                     |

The test plot as follows:

