

RF TEST REPORT



Report No.: 15050043-FCC-R2

Supersede Report No.: N/A

Applicant	b mobile HK Limited	
Product Name	Mobile phone	
Model No.	B1+	
Serial No.	AX1095	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	November 06 to November 23, 2015	
Issue Date	November 23, 2015	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
Winnie. Zhang	David Huang	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15050043-FCC-R2
Page	3 of 59

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 CHANNEL SEPARATION	11
6.3 20DB BANDWIDTH.....	15
6.4 PEAK OUTPUT POWER.....	19
6.5 NUMBER OF HOPPING CHANNEL.....	23
6.6 TIME OF OCCUPANCY (DWELL TIME)	25
6.7 BAND EDGE.....	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED SPURIOUS EMISSIONS	42
ANNEX A. TEST INSTRUMENT.....	47
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	48
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	54
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	58
ANNEX E. DECLARATION OF SIMILARITY	59

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050043-FCC-R2	NONE	Original	November 23, 2015

2. Customer information

Applicant Name	b mobile HK Limited
Applicant Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong
Manufacturer	b mobile HK Limited
Manufacturer Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile phone

Main Model: B1+

Serial Model: AX1095

Date EUT received: November 05, 2015

Test Date(s): November 06 to November 23, 2015

Equipment Category : DSS

GSM850: -1dBi

PCS1900: 0 dBi

UMTS-FDD Band V: 0 dBi

UMTS-FDD Band IV: 0.5 dBi

UMTS-FDD Band II: 0.5 dBi

Bluetooth/BLE: 0.5 dBi

Antenna Gain: WIFI:0.5dBi

LTE Band 2: 0.5 dBi

LTE Band 4: 0.5 dBi

LTE Band 5: 0dBi

LTE Band 7: 0.8 dBi

LTE Band 12: 0 dBi

GPS:1.8 dBi

GSM / GPRS: GMSK

EGPRS: GMSK,8PSK

UMTS-FDD: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

BLE: GFSK

LTE Band: QPSK, 16QAM

GPS:BPSK

Type of Modulation:

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz;
RX : 2112.4 ~ 2152.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WIFI: 802.11b/g/n(20M): 2412-2472 MHz
WIFI: 802.11n(40M): 2422-2462 MHz
Bluetooth& BLE: 2402-2480 MHz
LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz
LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz
LTE Band 5 TX: 826.5 ~ 846.5 MHz; RX : 871.5 ~ 891.5 MHz
LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
LTE Band 12 TX: 699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz
GPS RX: 1575.42 MHz

Max. Output Power: 6.347dBm

GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V : 102CH
UMTS-FDD Band IV: 202CH
UMTS-FDD Band II : 277CH
WIFI :802.11b/g/n(20M): 13CH
WIFI :802.11n(40M): 9CH
Bluetooth: 79CH
BLE: 40CH
GPS:1CH

Port: Power Port, Earphone Port, USB Port

Adapter:
Model: UD2AA50150
Input: AC 100-240V; 50/60Hz;
Output: DC 5.0V,1.5A
Battery:
Spec: 3000mAh/11.4wh+

Input Power: Input: AC 100-240V; 50/60Hz; 250mA

Test Report	15050043-FCC-R2
Page	8 of 59

Trade Name : Bmobile

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: ZSW-30-018

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 0.5dBi for Bluetooth/BLE, the gain is 0.5dBi for WIFI.

A permanently attached PIFA antenna for GSM/PCS/LTE and UMTS, the gain is -1dBi for GSM850, 0dBi for PCS1900,0dBi for UMTS-FDD Band V, 0.5dBi for UMTS-FDD Band IV, 0.5dBi for UMTS-FDD Band II, 0.5dBi for LTE Band 2, 0.5dBi for LTE Band 4, 0dBi for LTE Band 5, 0.8dBi for LTE Band 7, 0dBi for LTE Band 12.

A permanently attached PIFA antenna for GPS, the gain is 1.8dBi for GPS.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	November 13, 2015
Tested By :	Winnie Zhang

Requirement(s):

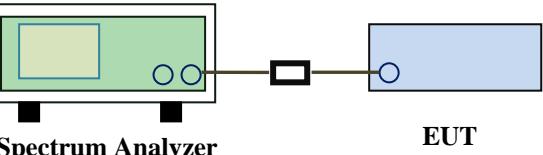Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 	

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.686	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.685	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.975	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.867	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.874	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.873	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.873	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.873	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.869	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

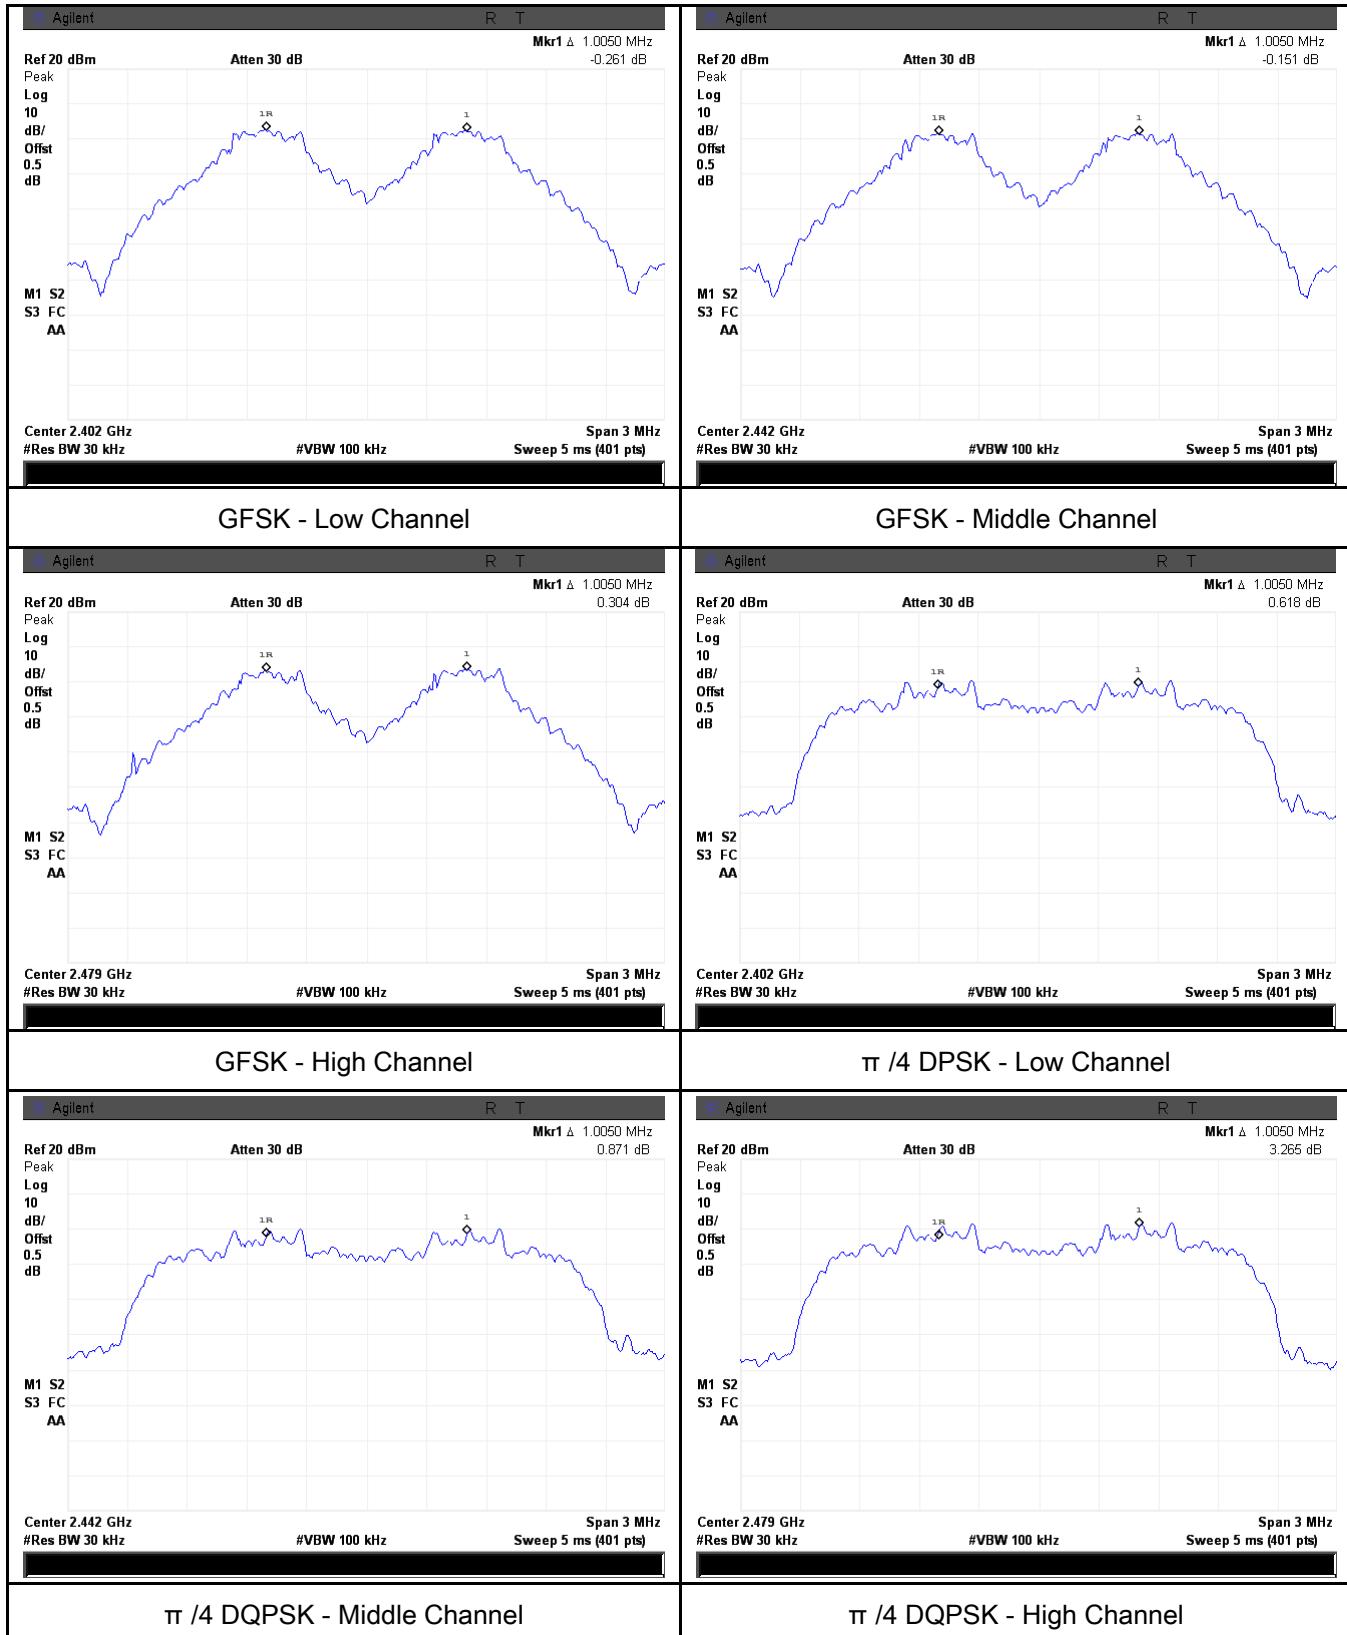


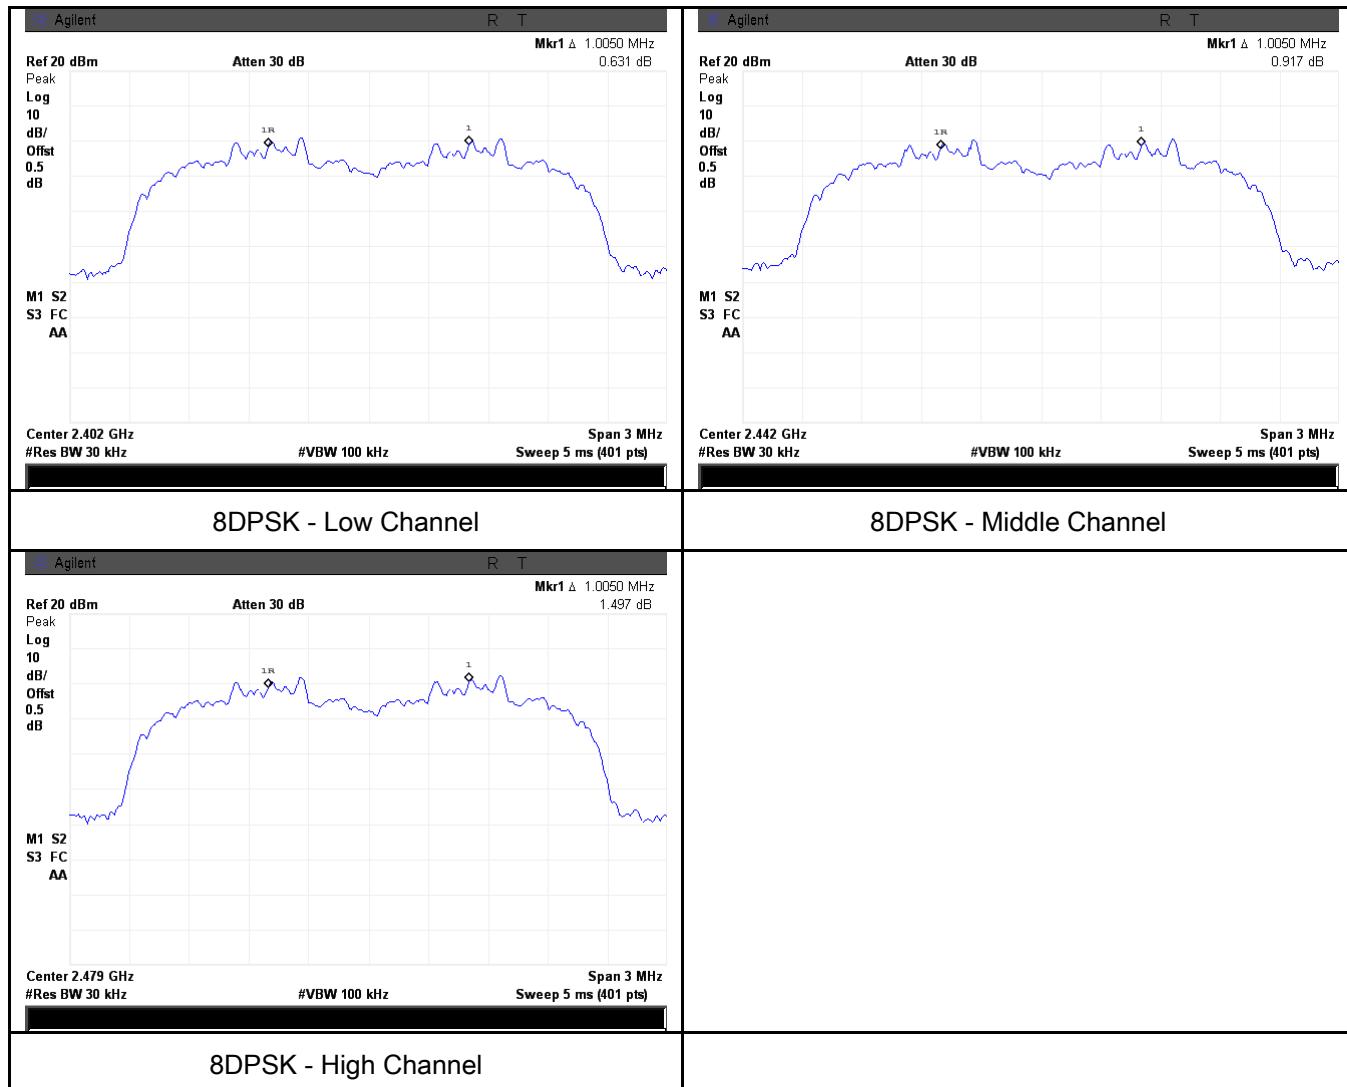

6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	November 13, 2015
Tested By :	Winnie Zhang

Requirement(s):

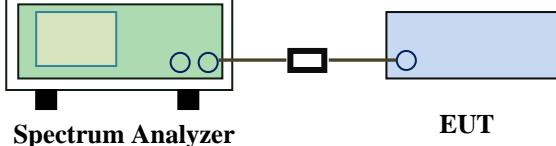Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.029	0.8860
	Mid	2441	1.028	0.9005
	High	2480	0.975	0.8907
$\pi/4$ DQPSK	Low	2402	1.301	1.1703
	Mid	2441	1.311	1.1775
	High	2480	1.309	1.1708
8-DPSK	Low	2402	1.309	1.1854
	Mid	2441	1.310	1.2025
	High	2480	1.304	1.1795

Test Plots

20dB Bandwidth measurement result

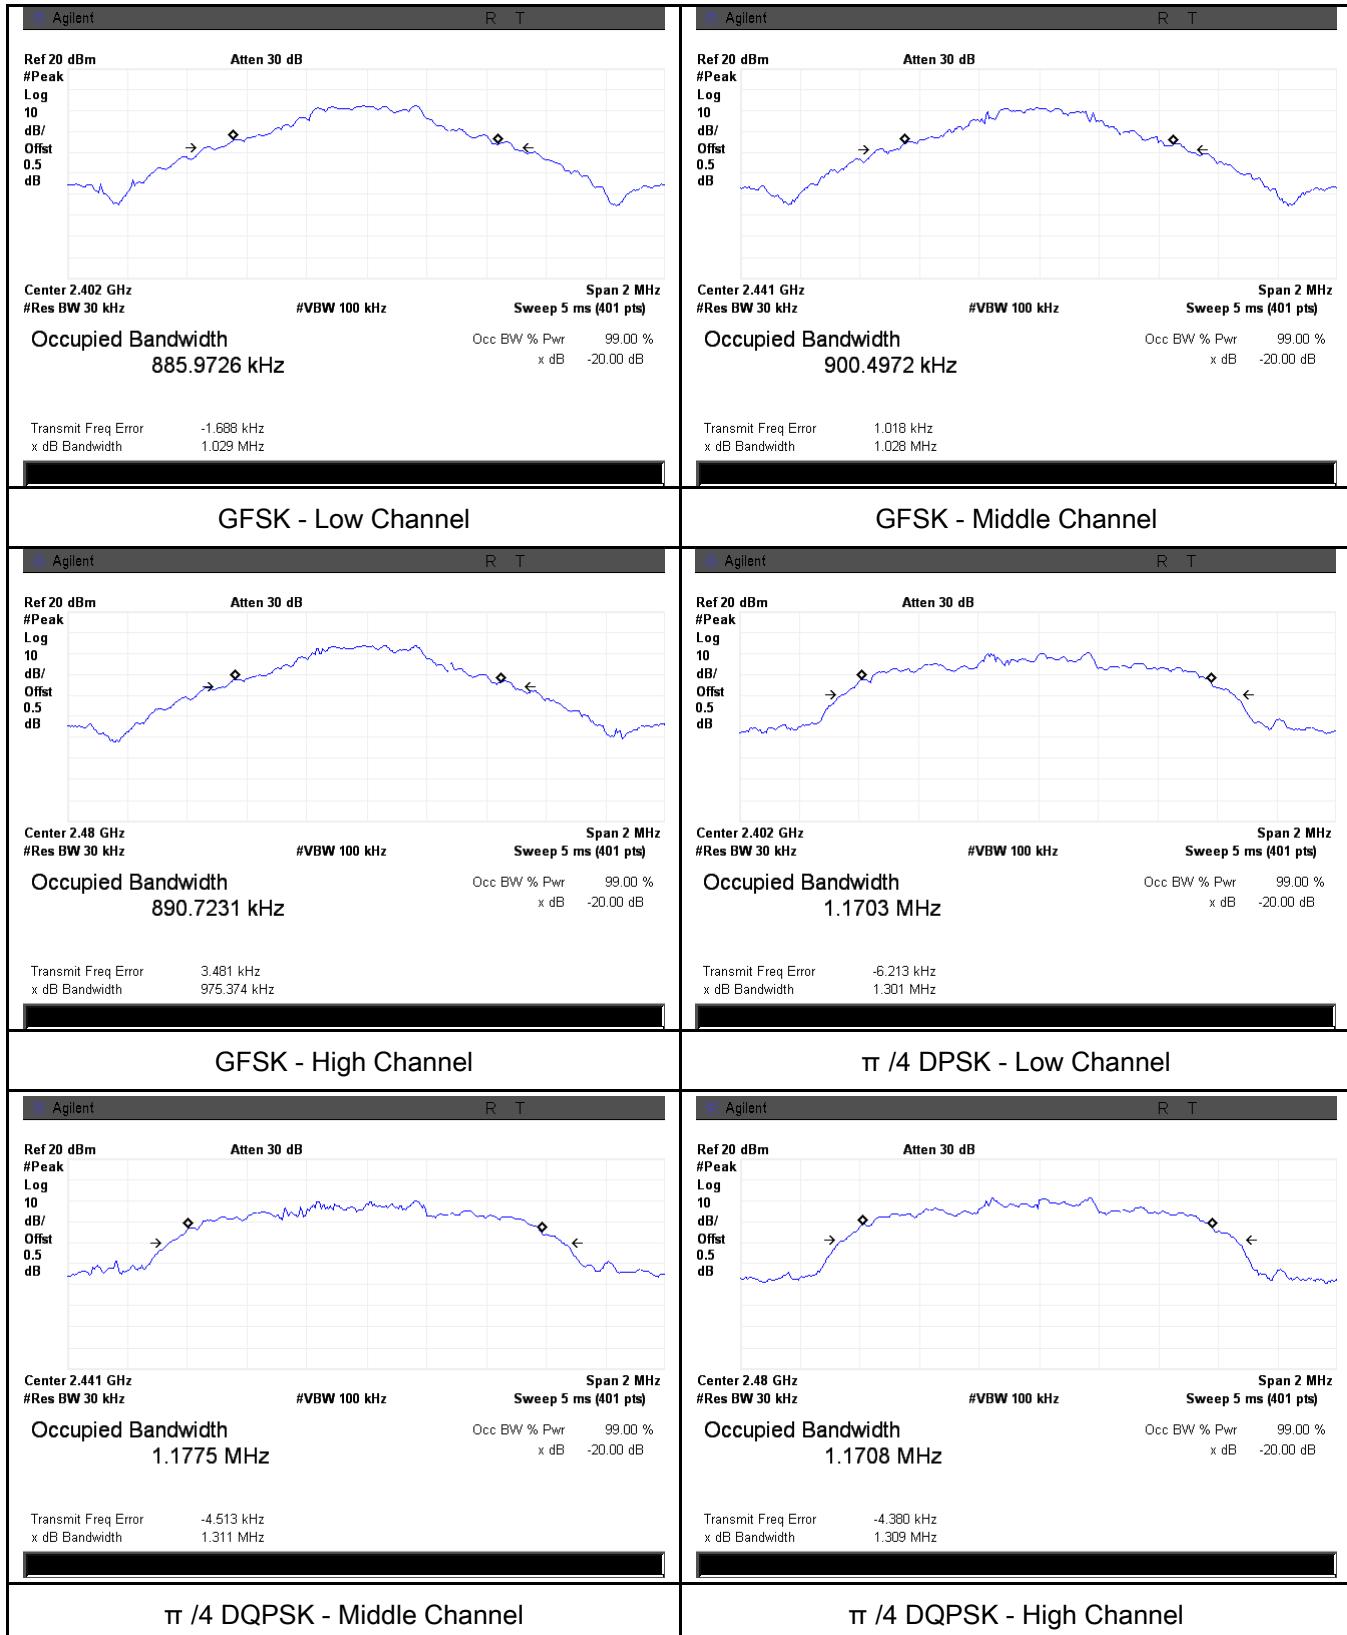


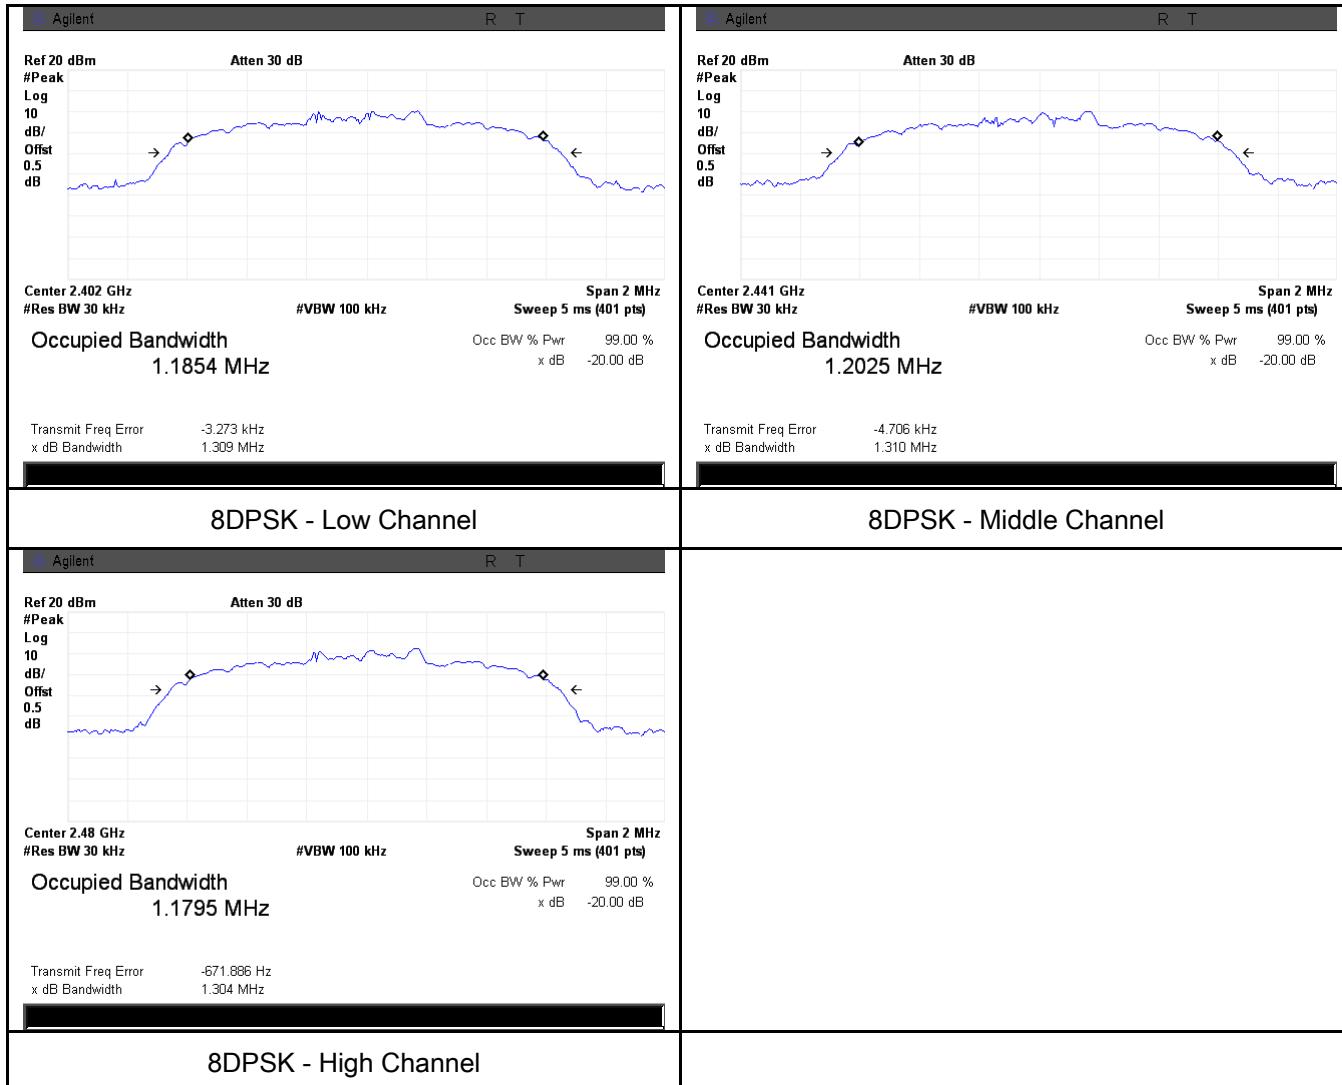

6.4 Peak Output Power

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	November 13, 2015
Tested By :	Winnie Zhang

Requirement(s):

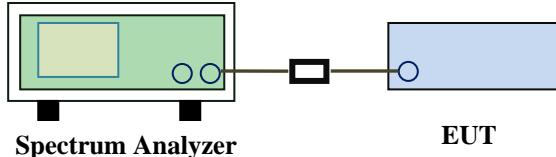Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold 	

	<ul style="list-style-type: none"> - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	5.045	125	Pass
		Mid	2441	4.021	125	Pass
		High	2480	6.347	1000	Pass
	$\pi/4$ DQPSK	Low	2402	4.119	125	Pass
		Mid	2441	3.435	125	Pass
		High	2480	5.600	125	Pass
	8-DPSK	Low	2402	4.279	125	Pass
		Mid	2441	3.582	125	Pass
		High	2480	5.751	125	Pass

Test Plots

Output Power measurement result

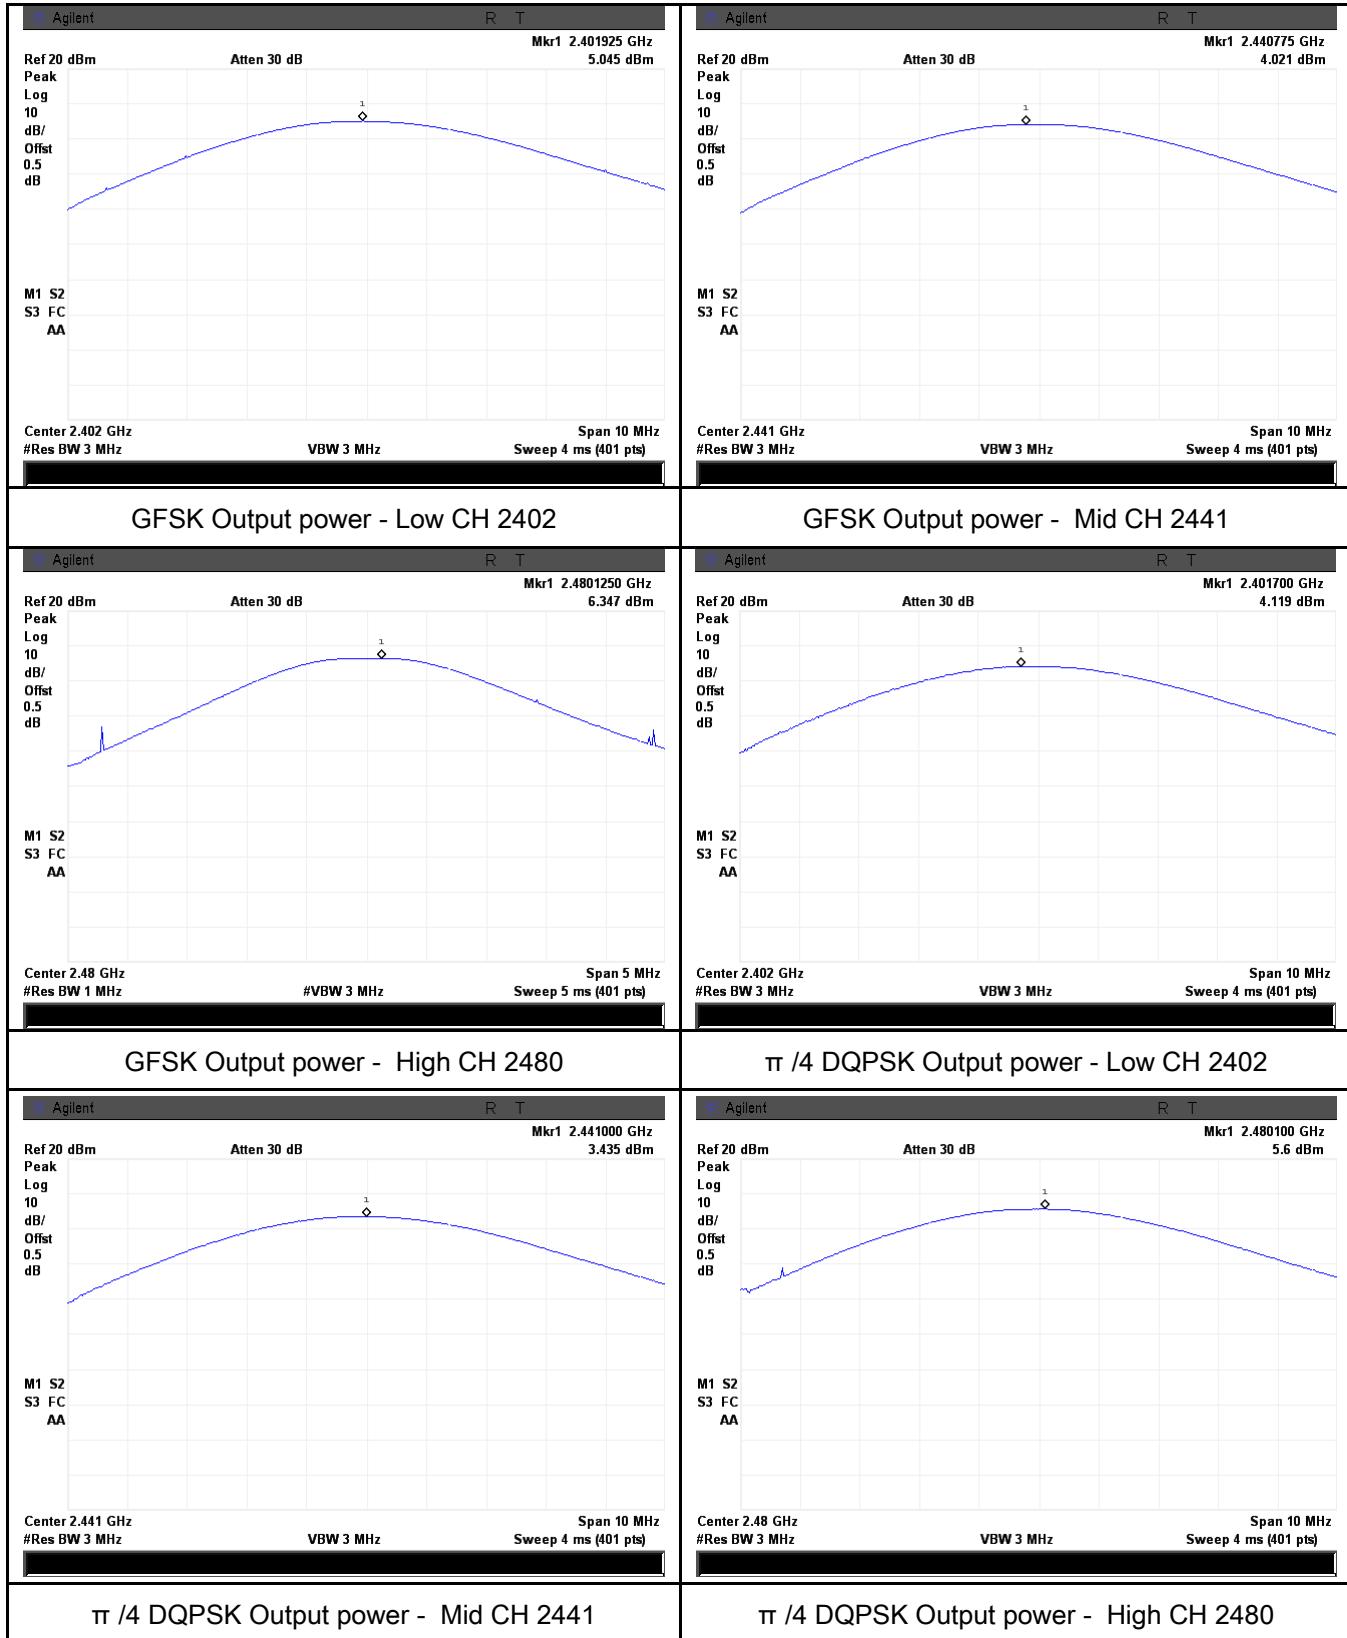

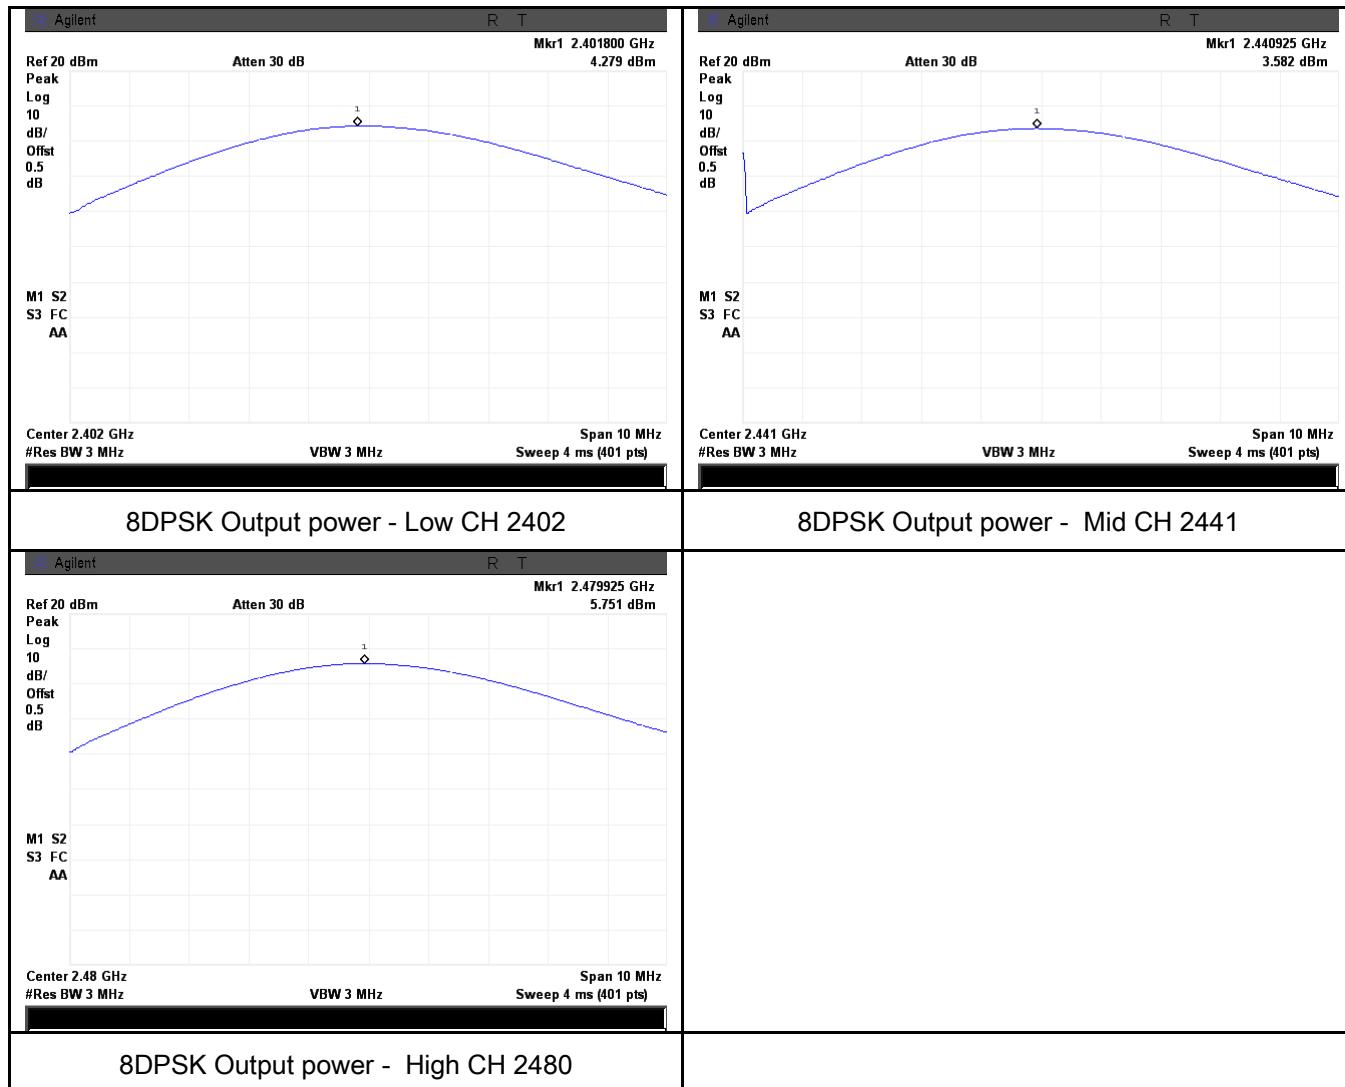

6.5 Number of Hopping Channel

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	November 13, 2015
Tested By :	Winnie Zhang

Requirement(s):

Test Data Yes

Yes (See below) N/A


Test Plot  Yes (See below)  N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots

Number of Hopping Channels measurement result

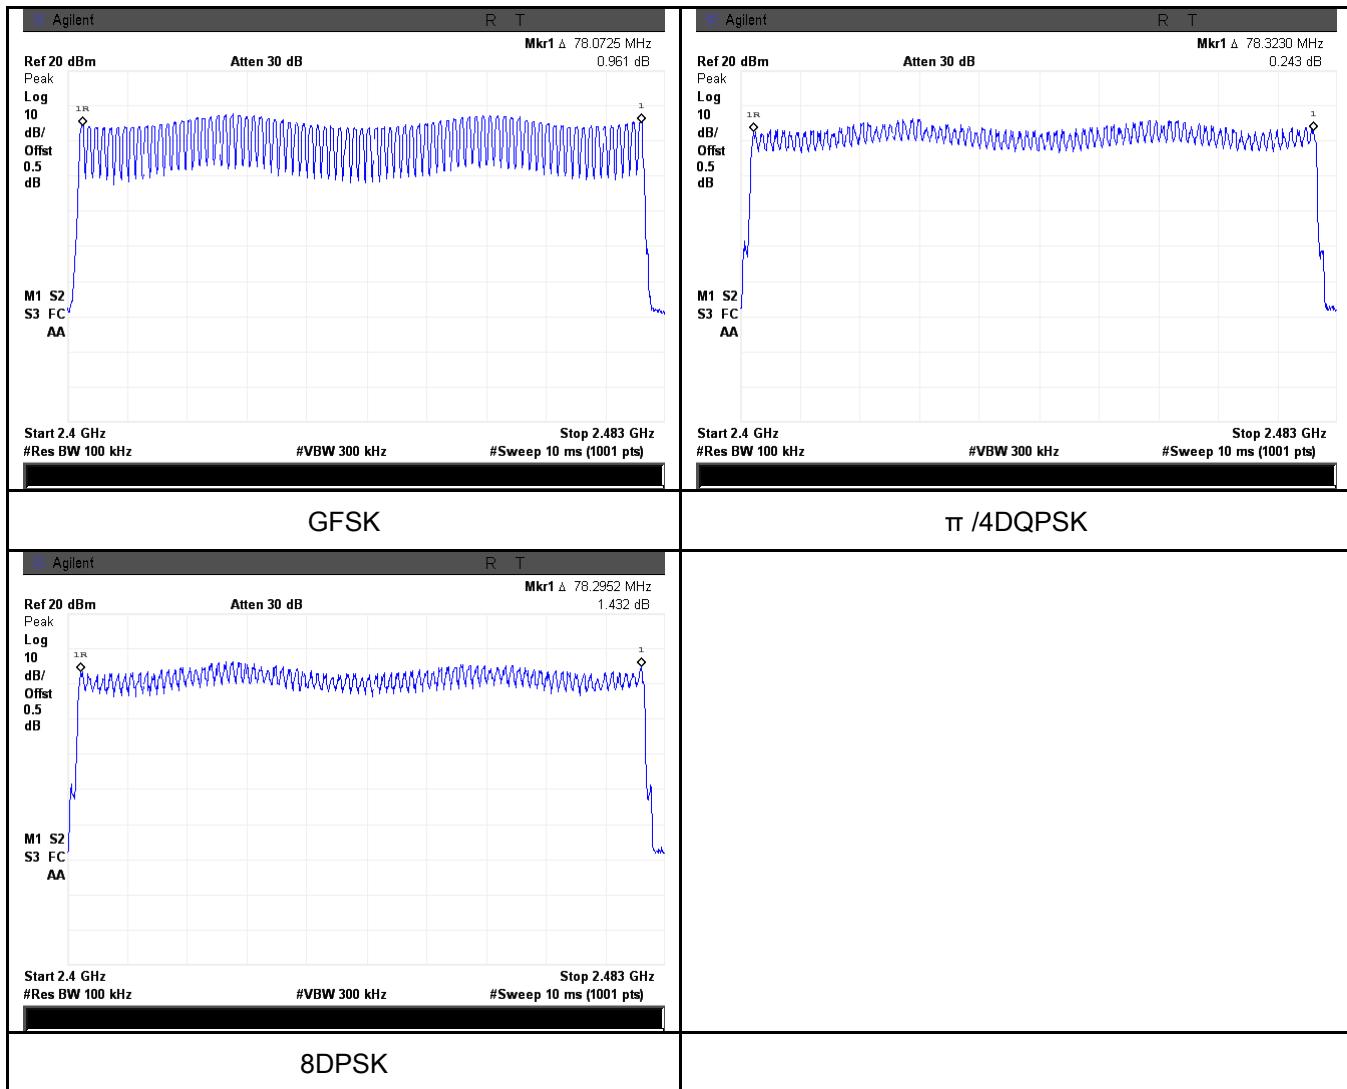

6.6 Time of Occupancy (Dwell Time)

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	November 13, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass		<input type="checkbox"/> Fail

Test Data Yes N/A

Yes (See below) N/A


Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.90	309.333	400	Pass
		Mid	2.91	310.400	400	Pass
		High	2.89	308.267	400	Pass
	$\pi/4$ DQPSK	Low	2.89	308.267	400	Pass
		Mid	2.90	309.333	400	Pass
		High	2.90	309.333	400	Pass
	8-DPSK	Low	2.90	309.333	400	Pass
		Mid	2.90	309.333	400	Pass
		High	2.90	309.333	400	Pass

 Note: Dwell time=Pulse Time (ms) \times (1600 \div 6 \div 79) \times 31.6

Test Plots

Dwell Time measurement result

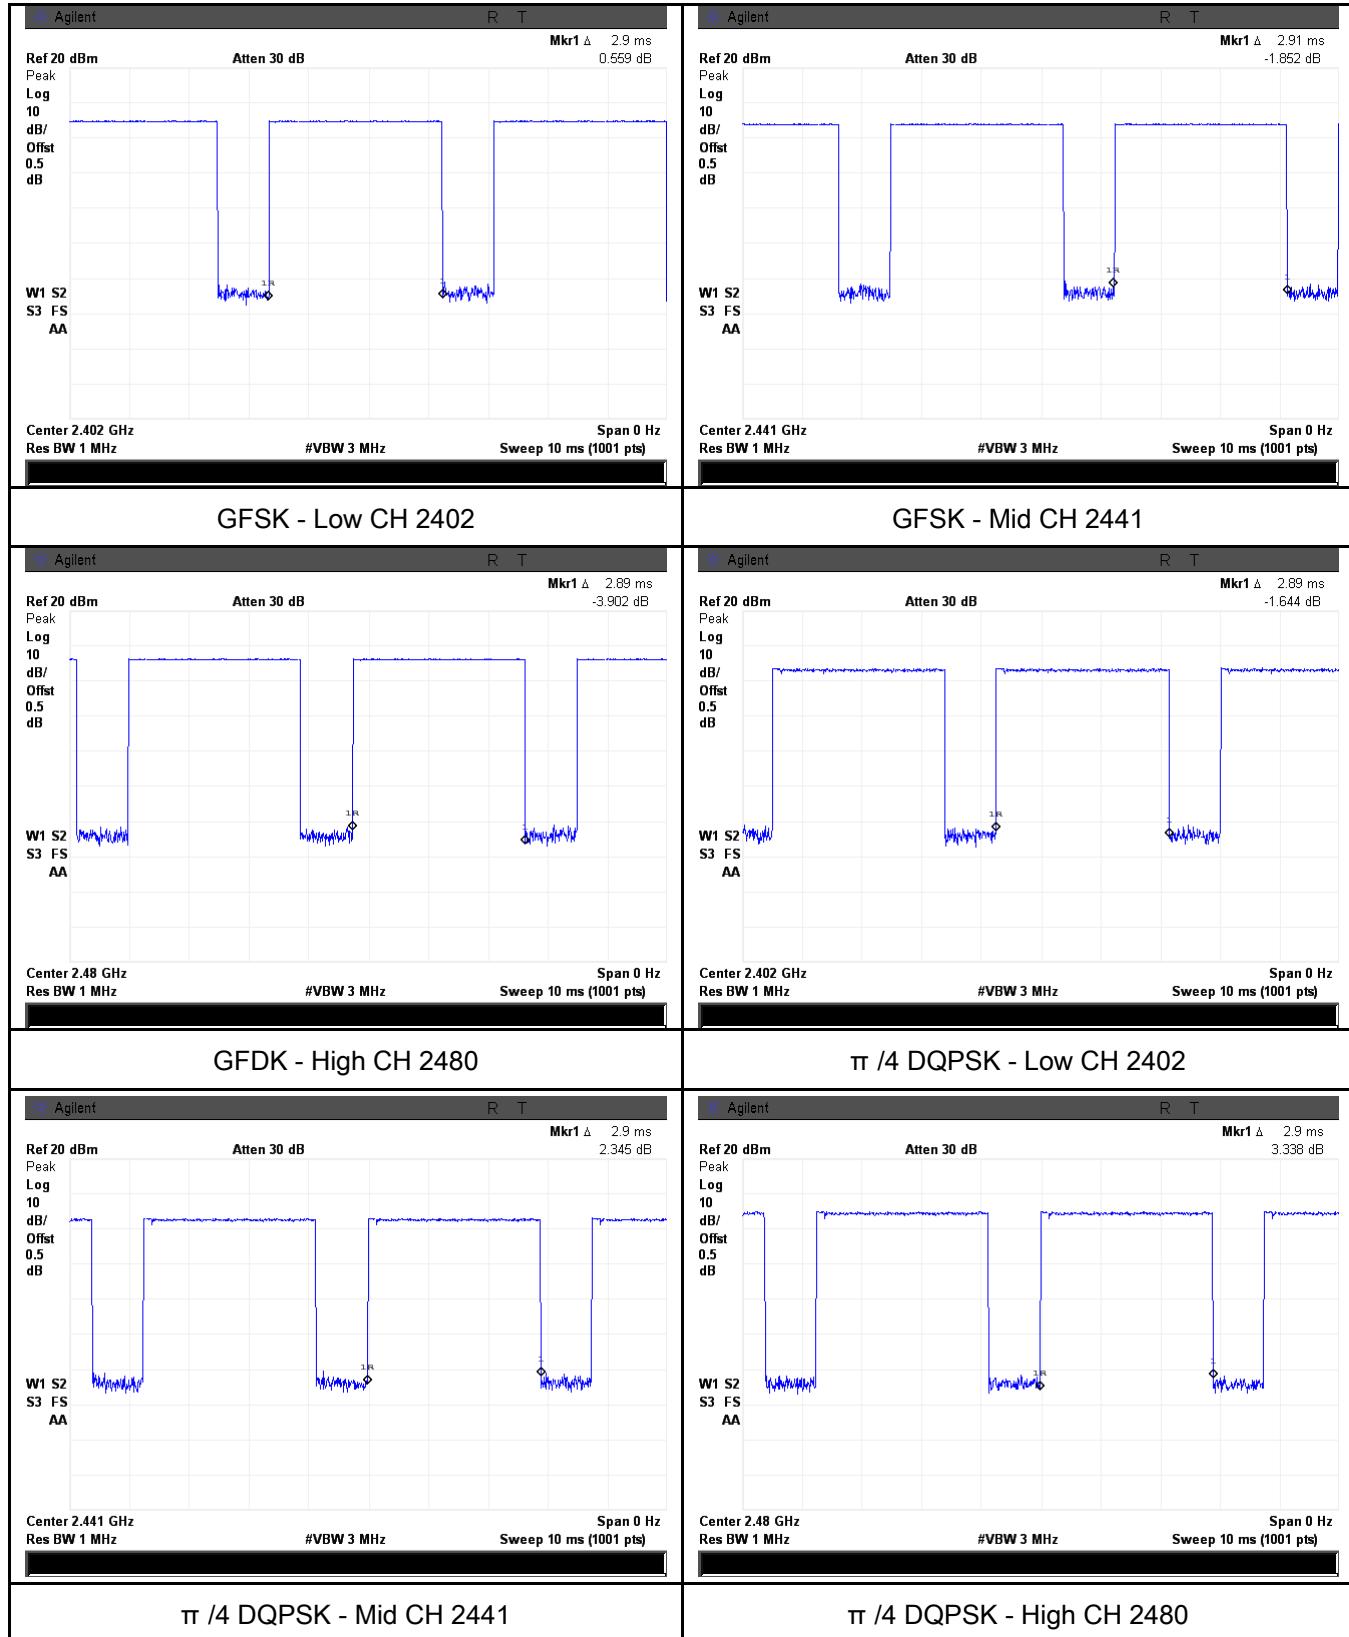


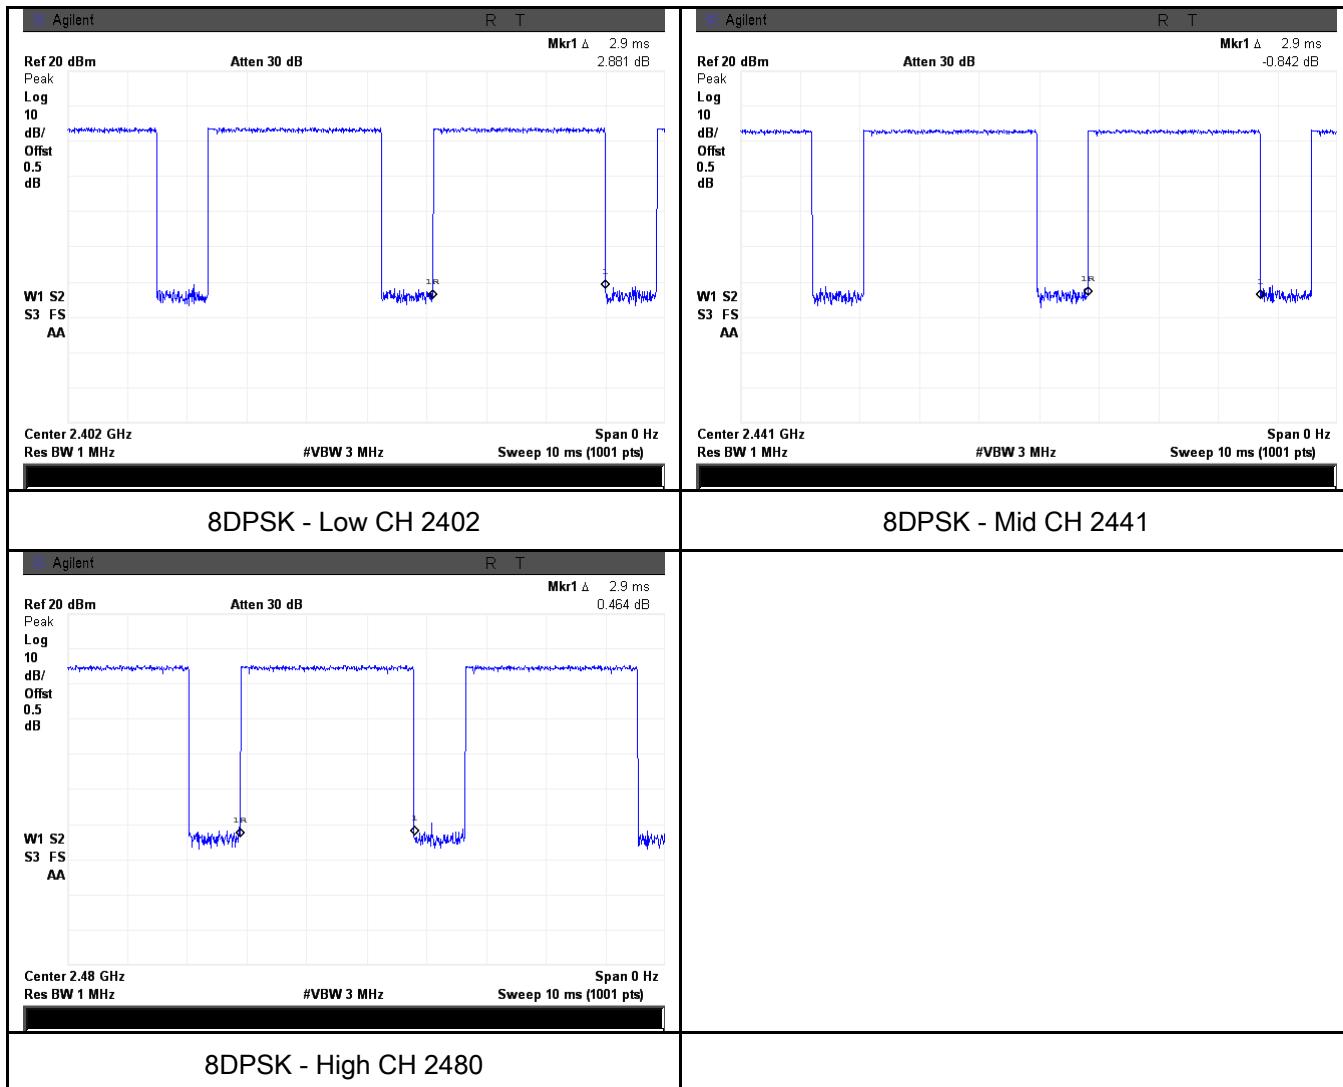

6.7 Band Edge

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	November 18, 2015
Tested By :	Winnie Zhang

Requirement(s):

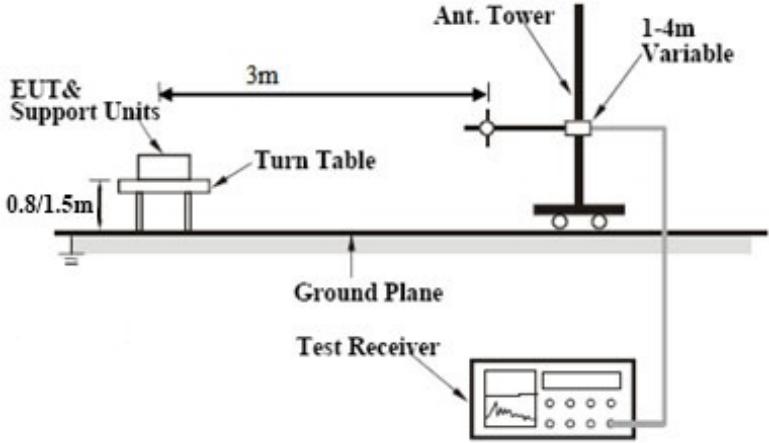Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units are placed on a Turn Table, which is positioned 0.8/1.5m above a Ground Plane. The Turn Table is connected to an Ant. Tower via a cable. The Ant. Tower is a vertical mast with a height of 1-4m, mounted on a base. A Test Receiver is connected to the base of the Ant. Tower. The distance between the EUT & Support Units and the Ant. Tower is 3m.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		





	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Plots

GFSK Mode:

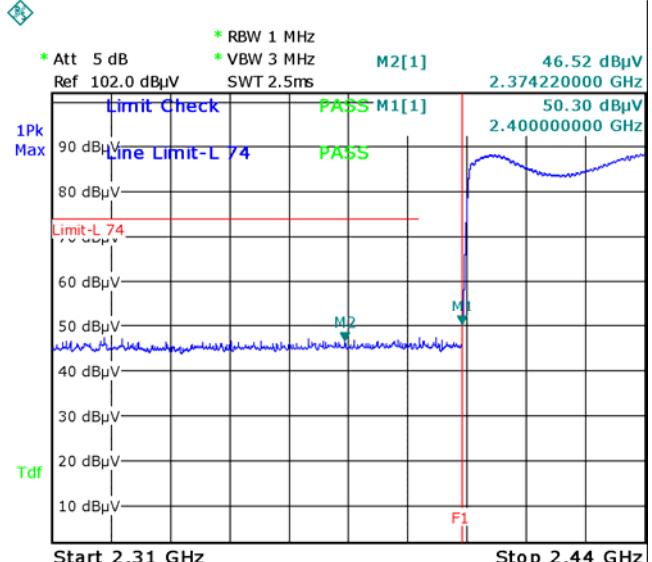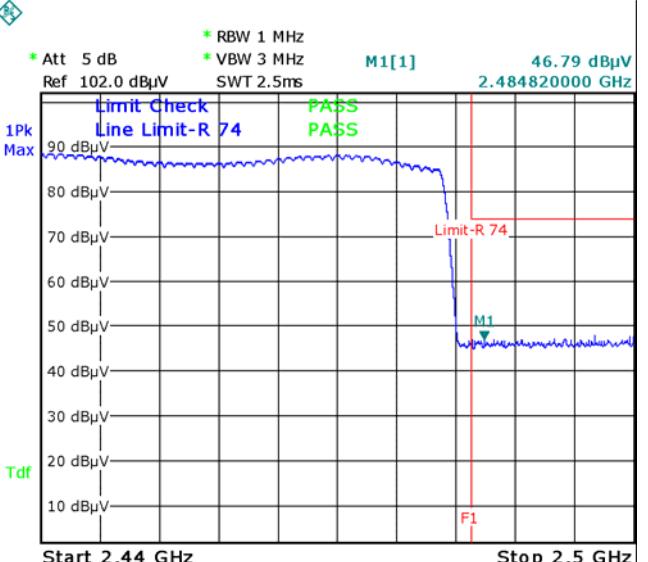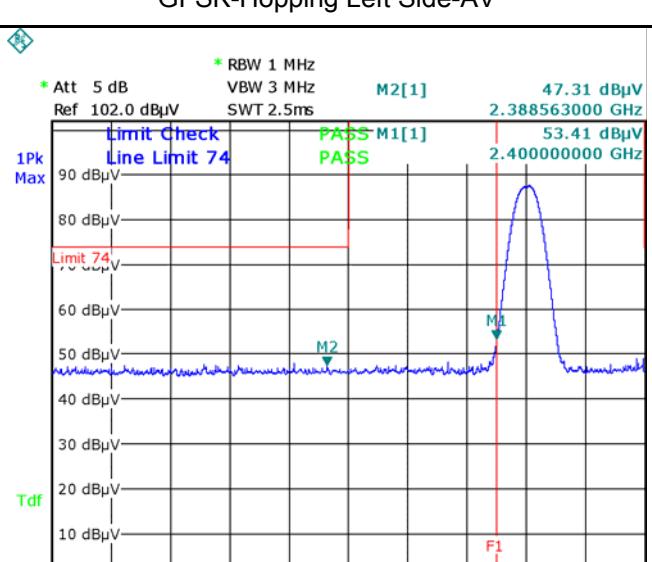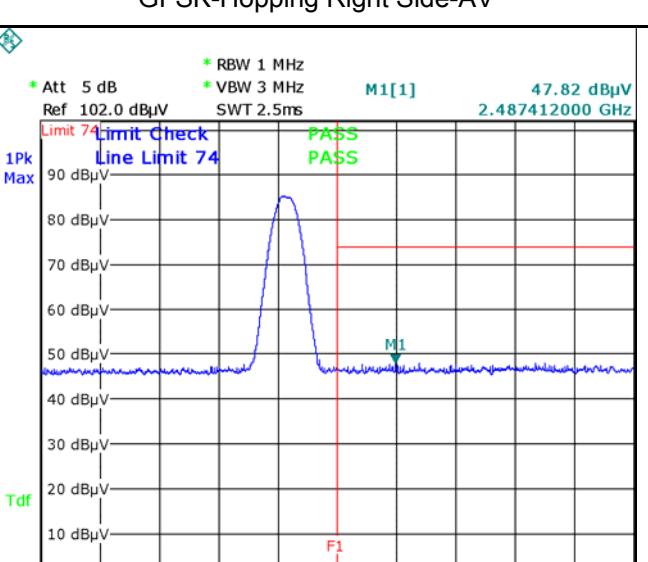
 <p>M2[1] 46.52 dBμV 2.374220000 GHz</p> <p>M1[1] 50.30 dBμV 2.400000000 GHz</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 18.NOV.2015 09:31:37</p>	 <p>M1[1] 46.79 dBμV 2.484820000 GHz</p> <p>M1 50.30 dBμV 2.483500000 GHz</p> <p>Start 2.44 GHz Stop 2.5 GHz</p> <p>Date: 18.NOV.2015 09:30:22</p>
<p>GFSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p> <p>Note: (no need if PK value less than the AV limit)</p>	<p>GFSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p> <p>Note: (no need if PK value less than the AV limit)</p>
<p>GFSK-Hopping Left Side-AV</p>  <p>M2[1] 47.31 dBμV 2.388563000 GHz</p> <p>M1[1] 53.41 dBμV 2.400000000 GHz</p> <p>CF 2.39 GHz Span 40.0 MHz</p> <p>Date: 18.NOV.2015 09:13:19</p>	<p>GFSK-Hopping Right Side-AV</p>  <p>M1[1] 47.82 dBμV 2.487412000 GHz</p> <p>M1 53.41 dBμV 2.483500000 GHz</p> <p>CF 2.4835 GHz Span 40.0 MHz</p> <p>Date: 18.NOV.2015 09:23:19</p>
<p>GFSK-Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p> <p>Note: (no need if PK value less than the AV limit)</p> <p>GFSK-Left Side-AV</p>	<p>GFSK-Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p> <p>Note: (no need if PK value less than the AV limit)</p> <p>GFSK-Right Side-AV</p>

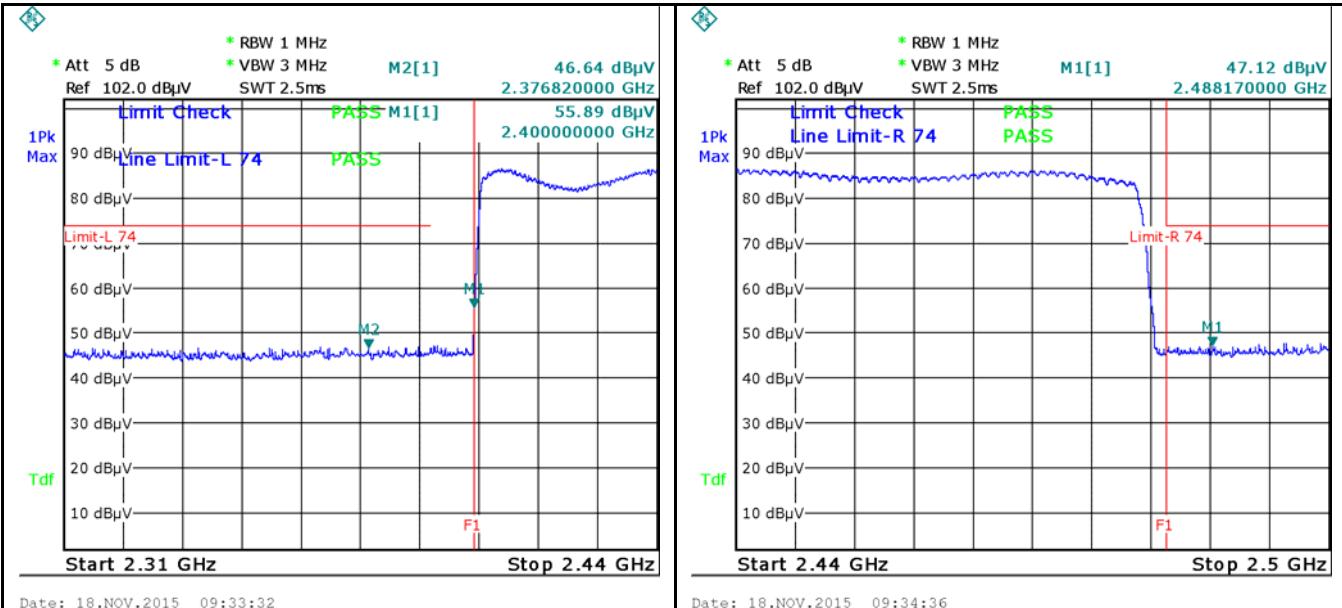
π /4 DQPSK Mode:

π /4 DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz





π /4 DQPSK-Hopping Right Side-PK

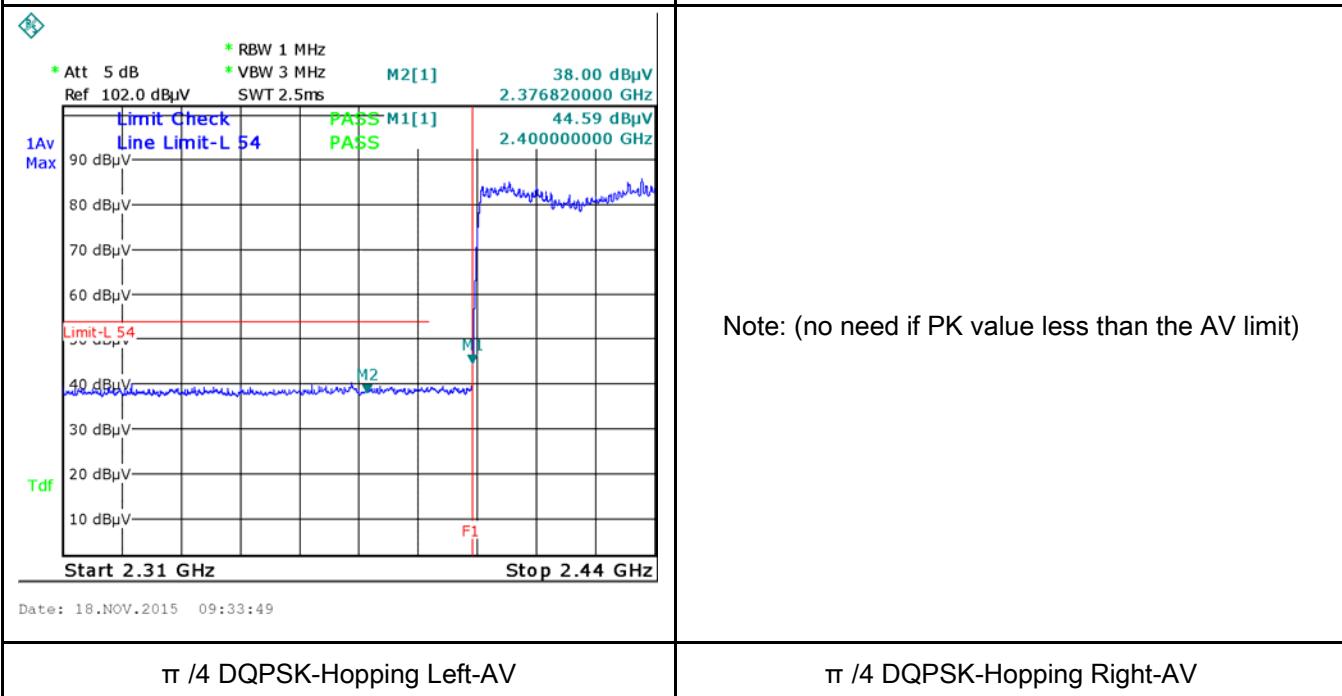
Note: F1 is frequency 2483.5MHz

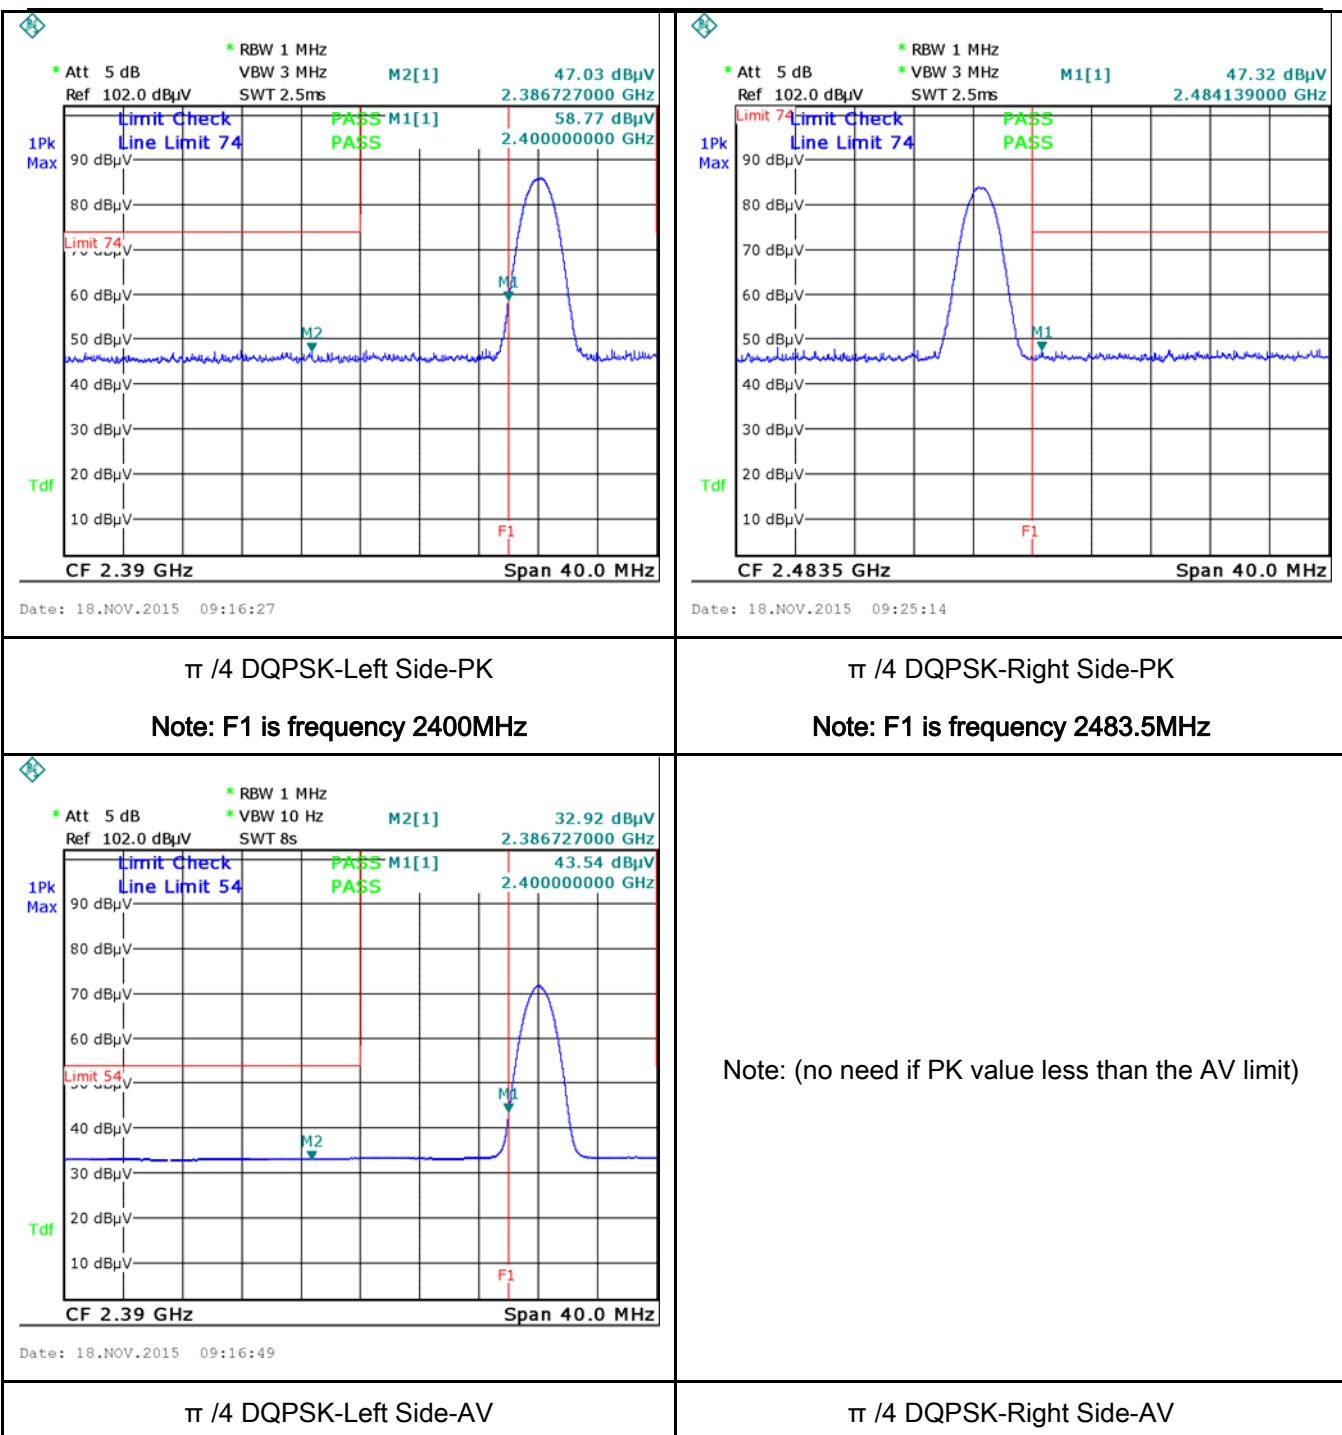



8-DPSK Mode:

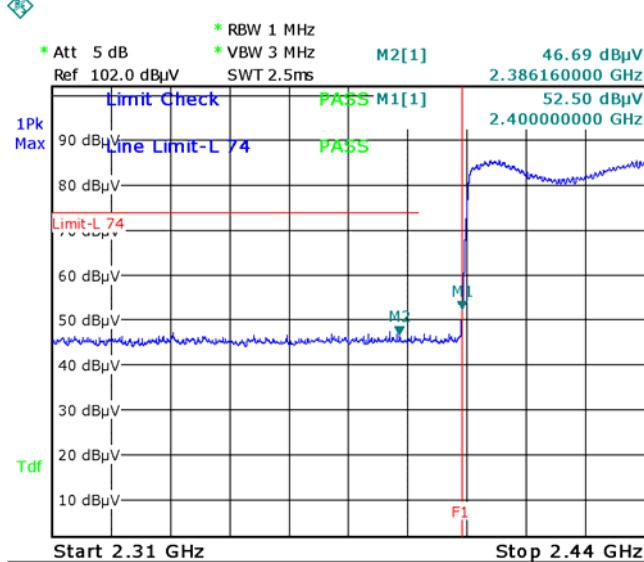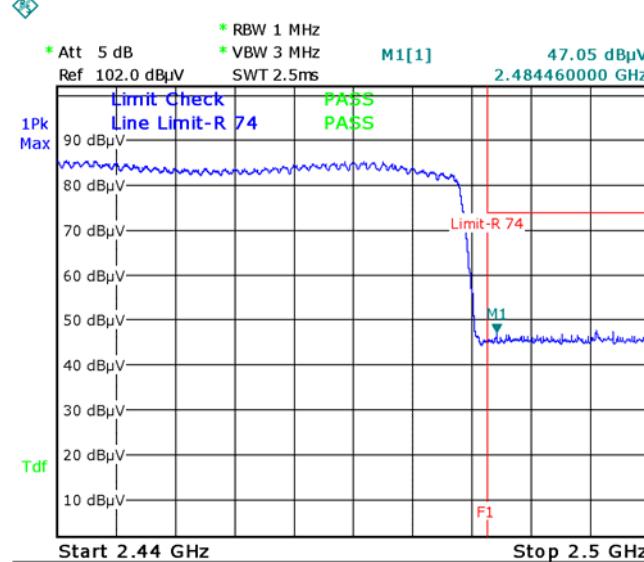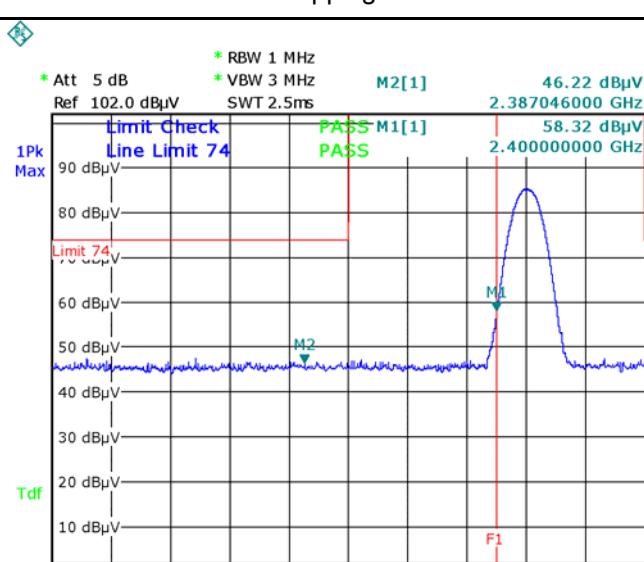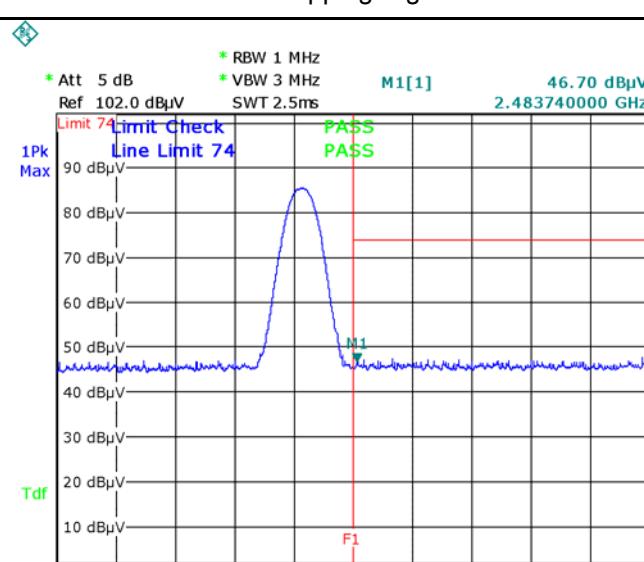 <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>M2[1] 46.69 dBμV 2.386160000 GHz Limit Check PASS M1[1] 52.50 dBμV 2.400000000 GHz Line Limit-L 74 PASS</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 18.NOV.2015 09:38:06</p>	 <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>M1[1] 47.05 dBμV 2.484460000 GHz Limit Check Line Limit-R 74 PASS Limit-R 74</p> <p>Start 2.44 GHz Stop 2.5 GHz</p> <p>Date: 18.NOV.2015 09:37:28</p>
<p>8DPSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>8DPSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>8DPSK-Hopping Left-AV</p>  <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>M2[1] 46.22 dBμV 2.387046000 GHz Limit Check Line Limit 74 PASS M1[1] 58.32 dBμV 2.400000000 GHz Limit 74</p> <p>CF 2.39 GHz Span 40.0 MHz</p> <p>Date: 18.NOV.2015 09:19:01</p>	<p>8DPSK-Hopping Right-AV</p>  <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>M1[1] 46.70 dBμV 2.483740000 GHz Limit 74 Limit Check Line Limit 74 PASS Limit 74</p> <p>CF 2.4835 GHz Span 40.0 MHz</p> <p>Date: 18.NOV.2015 09:26:33</p>
<p>8DPSK-Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>8DPSK-Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>

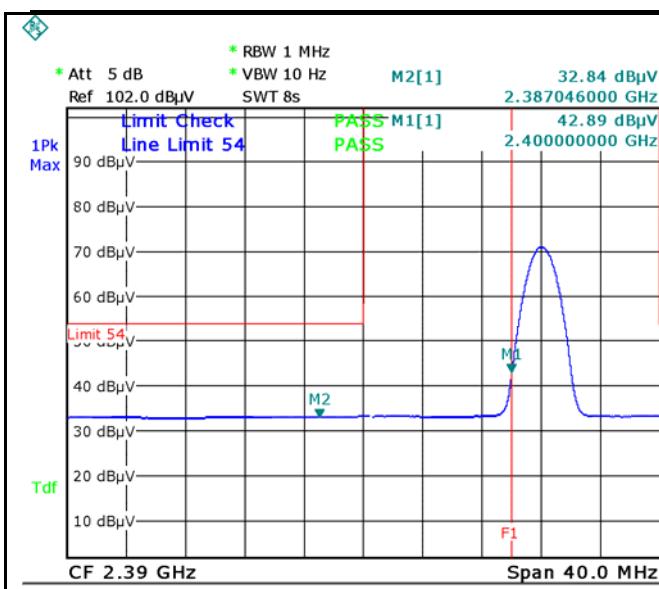

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV

6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	November 18, 2015
Tested By :	Winnie Zhang

Requirement(s):


Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup																	
Procedure	<ol style="list-style-type: none"> 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

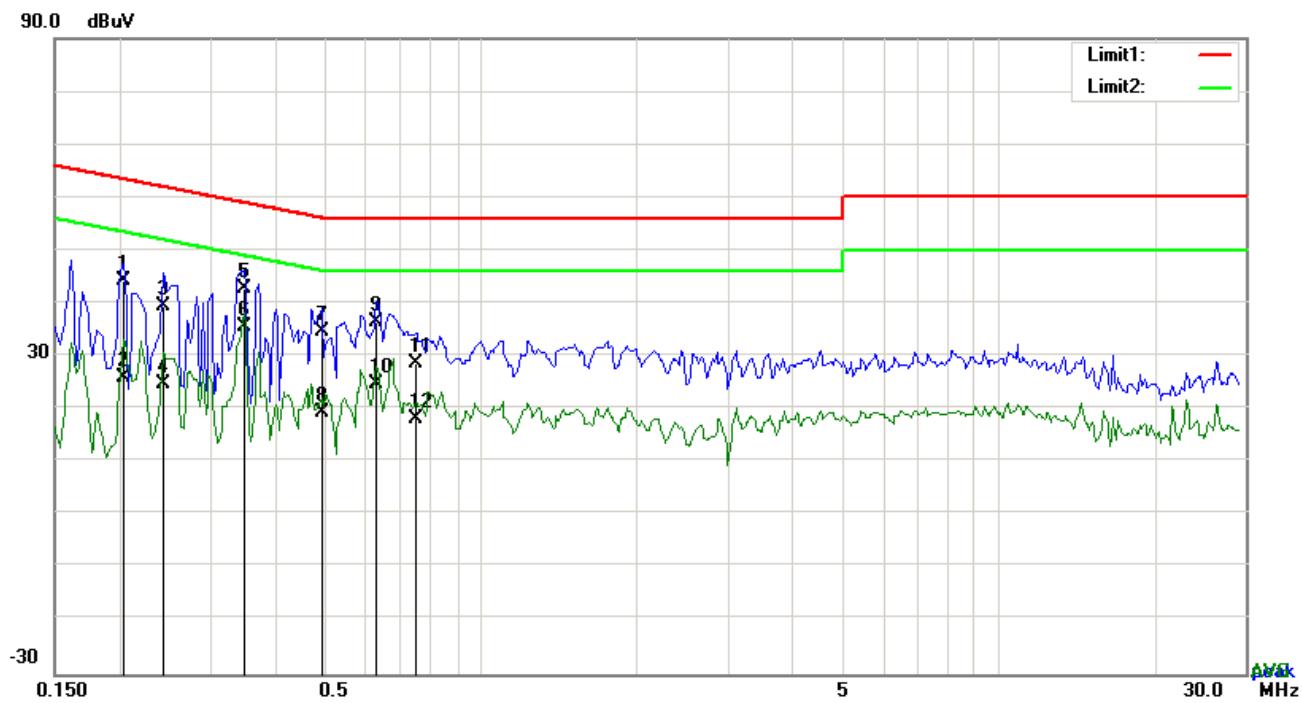


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2046	34.13	QP	10.03	44.16	63.42	-19.26
2	L1	0.2046	15.93	AVG	10.03	25.96	53.42	-27.46
3	L1	0.2436	29.28	QP	10.03	39.31	61.97	-22.66
4	L1	0.2436	14.72	AVG	10.03	24.75	51.97	-27.22
5	L1	0.3489	32.63	QP	10.03	42.66	58.99	-16.33
6	L1	0.3489	25.41	AVG	10.03	35.44	48.99	-13.55
7	L1	0.4932	24.61	QP	10.03	34.64	56.11	-21.47
8	L1	0.4932	9.40	AVG	10.03	19.43	46.11	-26.68
9	L1	0.6297	26.48	QP	10.03	36.51	56.00	-19.49
10	L1	0.6297	14.85	AVG	10.03	24.88	46.00	-21.12
11	L1	0.7506	18.72	QP	10.03	28.75	56.00	-27.25
12	L1	0.7506	8.25	AVG	10.03	18.28	46.00	-27.72

Test Mode: Bluetooth Mode

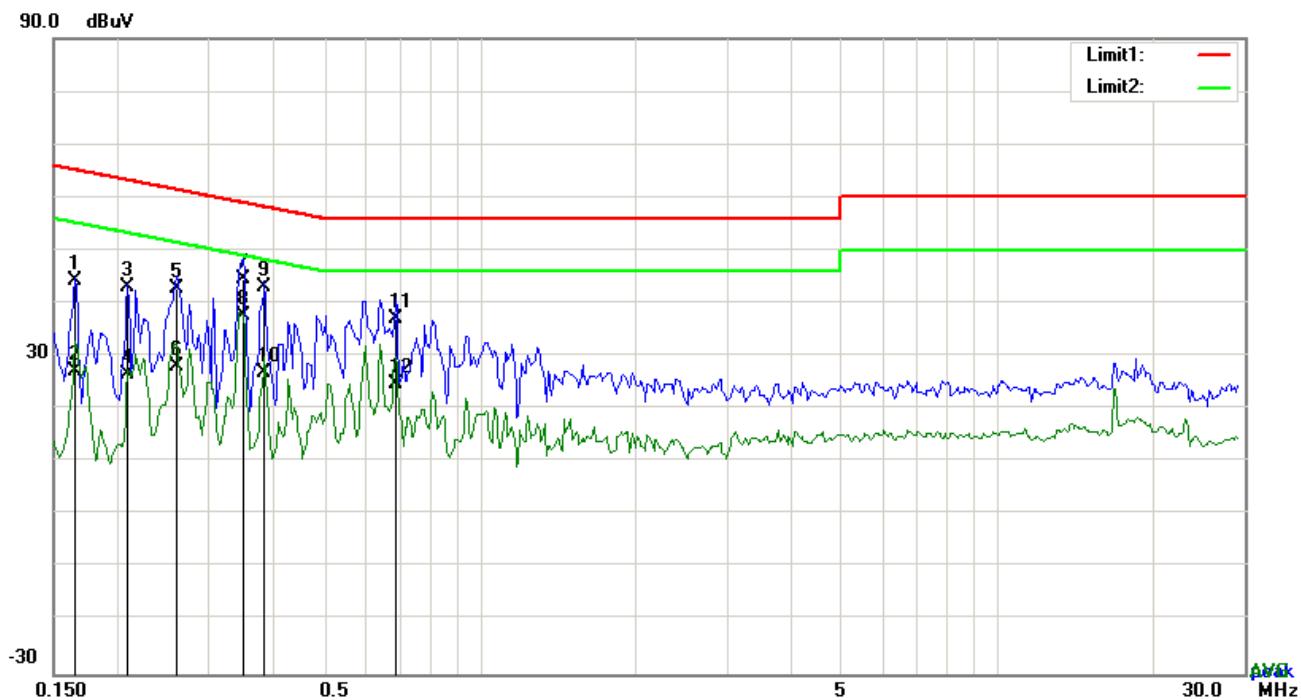


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1656	34.29	QP	10.02	44.31	65.18	-20.87
2	N	0.1656	17.06	AVG	10.02	27.08	55.18	-28.10
3	N	0.2085	32.96	QP	10.02	42.98	63.26	-20.28
4	N	0.2085	16.62	AVG	10.02	26.64	53.26	-26.62
5	N	0.2592	32.61	QP	10.02	42.63	61.46	-18.83
6	N	0.2592	17.91	AVG	10.02	27.93	51.46	-23.53
7	N	0.3489	34.54	QP	10.02	44.56	58.99	-14.43
8	N	0.3489	27.76	AVG	10.02	37.78	48.99	-11.21
9	N	0.3840	32.91	QP	10.02	42.93	58.19	-15.26
10	N	0.3840	16.87	AVG	10.02	26.89	48.19	-21.30
11	N	0.6882	27.01	QP	10.02	37.03	56.00	-18.97
12	N	0.6882	14.72	AVG	10.02	24.74	46.00	-21.26

Test Mode: Bluetooth Mode

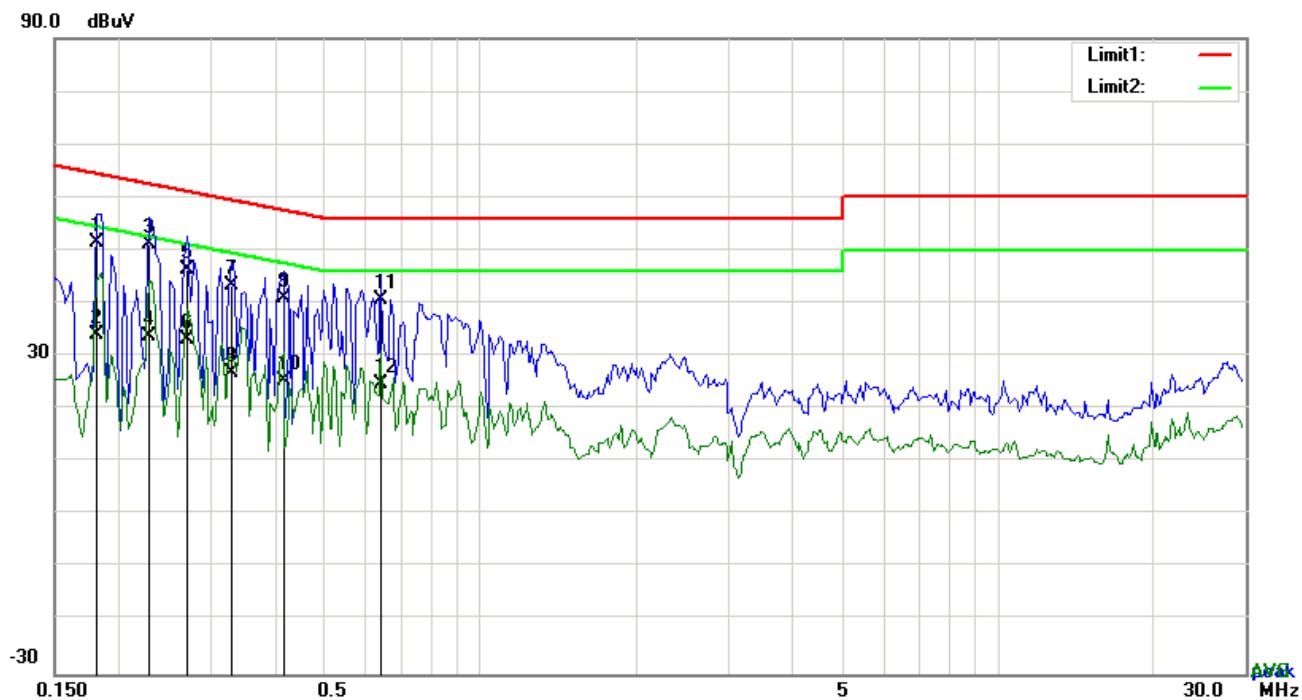


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1812	41.40	QP	10.03	51.43	64.43	-13.00
2	L1	0.1812	24.00	AVG	10.03	34.03	54.43	-20.40
3	L1	0.2280	41.22	QP	10.03	51.25	62.52	-11.27
4	L1	0.2280	23.67	AVG	10.03	33.70	52.52	-18.82
5	L1	0.2709	36.28	QP	10.03	46.31	61.09	-14.78
6	L1	0.2709	23.27	AVG	10.03	33.30	51.09	-17.79
7	L1	0.3294	33.39	QP	10.03	43.42	59.47	-16.05
8	L1	0.3294	16.88	AVG	10.03	26.91	49.47	-22.56
9	L1	0.4152	30.96	QP	10.03	40.99	57.54	-16.55
10	L1	0.4152	15.22	AVG	10.03	25.25	47.54	-22.29
11	L1	0.6414	30.49	QP	10.03	40.52	56.00	-15.48
12	L1	0.6414	14.77	AVG	10.03	24.80	46.00	-21.20

Test Mode: Bluetooth Mode

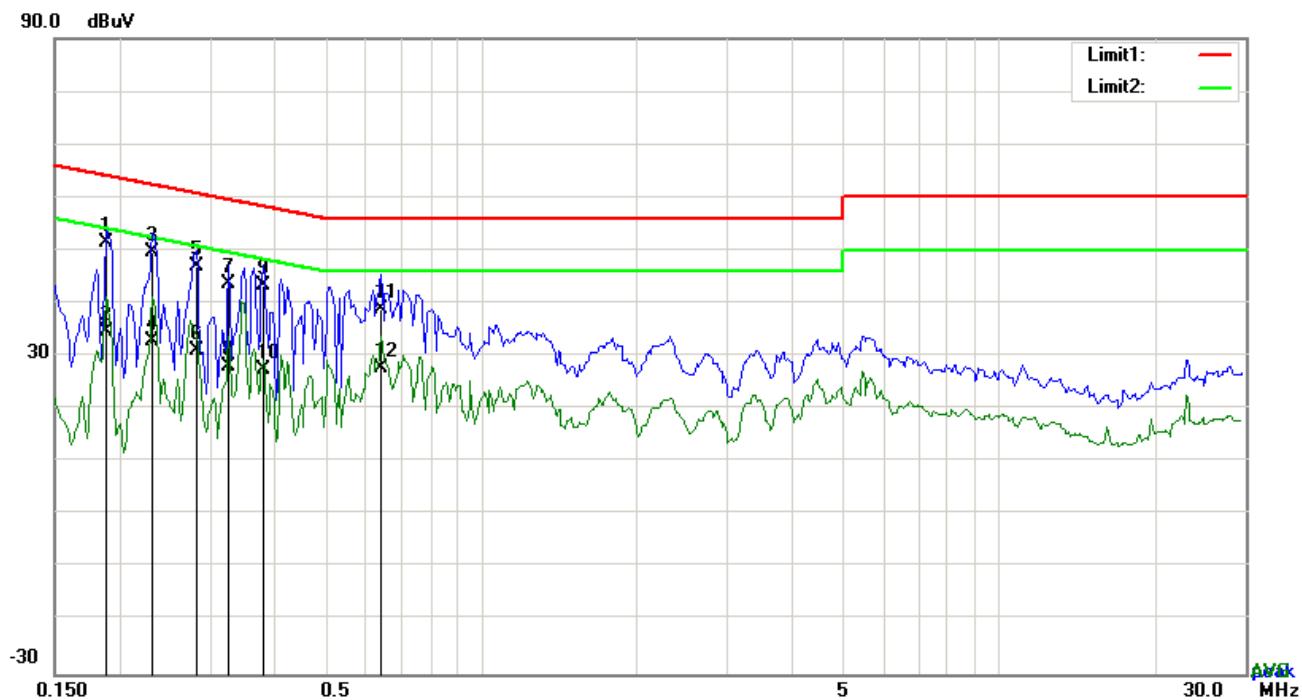

Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1890	41.37	QP	10.02	51.39	64.08	-12.69
2	N	0.1890	24.64	AVG	10.02	34.66	54.08	-19.42
3	N	0.2319	39.72	QP	10.02	49.74	62.38	-12.64
4	N	0.2319	22.87	AVG	10.02	32.89	52.38	-19.49
5	N	0.2826	36.90	QP	10.02	46.92	60.74	-13.82
6	N	0.2826	20.96	AVG	10.02	30.98	50.74	-19.76
7	N	0.3255	33.54	QP	10.02	43.56	59.57	-16.01
8	N	0.3255	18.12	AVG	10.02	28.14	49.57	-21.43
9	N	0.3801	33.21	QP	10.02	43.23	58.28	-15.05
10	N	0.3801	17.54	AVG	10.02	27.56	48.28	-20.72
11	N	0.6414	28.87	QP	10.02	38.89	56.00	-17.11
12	N	0.6414	17.87	AVG	10.02	27.89	46.00	-18.11

6.9 Radiated Spurious Emissions

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	November 18, 2015
Tested By :	Winnie Zhang

Requirement(s):

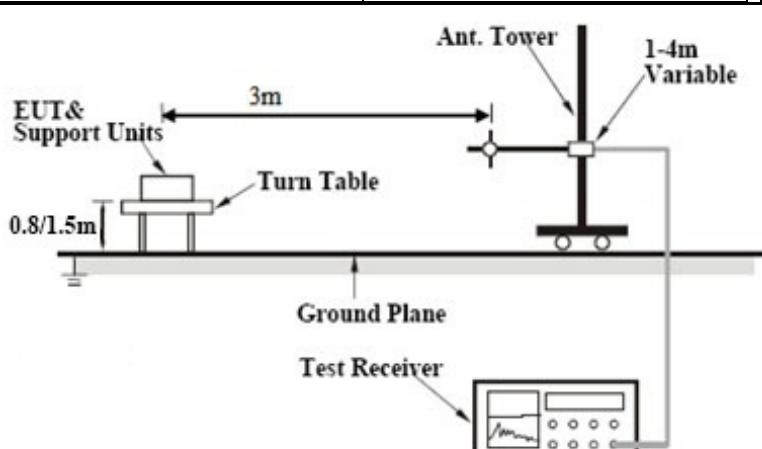Spec	Item	Requirement	Applicable										
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup	 <p>The diagram illustrates the test setup for radiated spurious emissions. It shows a 'Turn Table' on a 'Ground Plane' with a 'EUT & Support Units' mounted on it. A '3m' horizontal distance is marked between the EUT and a 'Ant. Tower'. The 'Ant. Tower' is a vertical mast with a '1-4m Variable' height adjustment. A 'Test Receiver' is connected to the tower, and its signal is processed through a 'Turn Table' and a 'Ground Plane' to the receiver unit.</p>												
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: 												


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

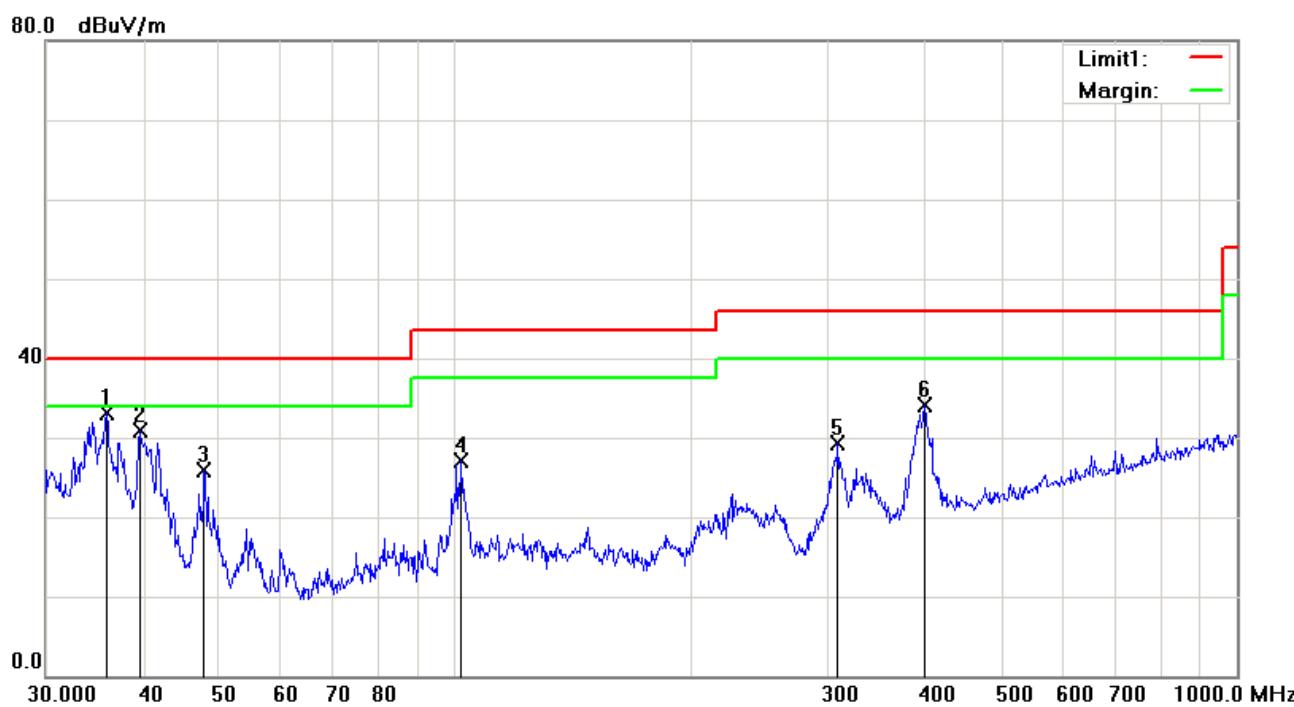


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	H	35.8747	37.60	peak	-4.58	33.02	40.00	-6.98	100	36
2	H	39.5757	38.09	peak	-7.28	30.81	40.00	-9.19	100	265
3	H	47.8260	38.09	peak	-12.20	25.89	40.00	-14.11	100	74
4	H	102.0014	37.45	peak	-10.44	27.01	43.50	-16.49	100	0
5	H	308.9126	35.93	peak	-6.65	29.28	46.00	-16.72	100	261
6	H	399.0302	38.46	peak	-4.32	34.14	46.00	-11.86	100	227

Below 1GHz

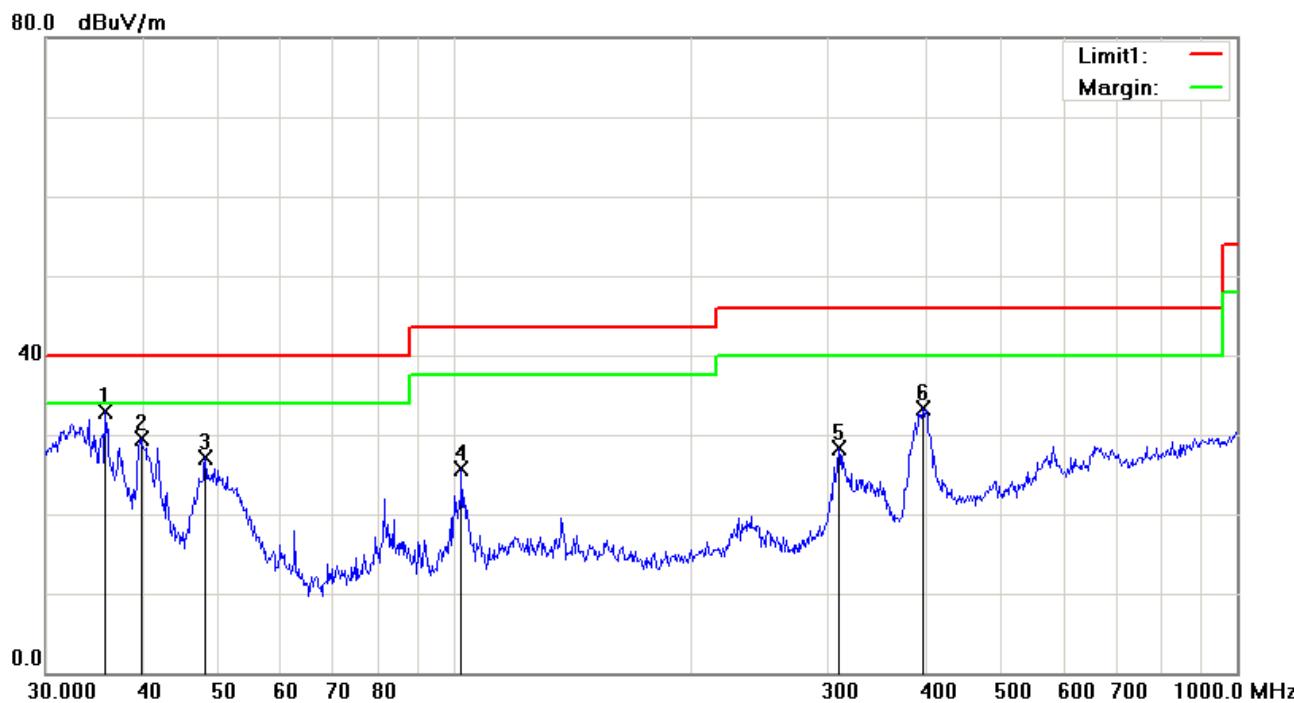

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree
1	V	35.7491	37.35	peak	-4.49	32.86	40.00	-7.14	100	0
2	V	39.7147	36.80	peak	-7.38	29.42	40.00	-10.58	100	31
3	V	47.9940	39.44	peak	-12.28	27.16	40.00	-12.84	100	94
4	V	102.0014	36.17	peak	-10.44	25.73	43.50	-17.77	100	229
5	V	309.9977	34.97	peak	-6.61	28.36	46.00	-17.64	100	0
6	V	397.6334	37.74	peak	-4.36	33.38	46.00	-12.62	100	87

Test Mode:	Transmitting Mode
------------	-------------------

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	38.34	AV	V	33.83	6.86	31.72	47.31	54	-6.69
4804	38.19	AV	H	33.83	6.86	31.72	47.16	54	-6.84
4804	46.36	PK	V	33.83	6.86	31.72	55.33	74	-18.67
4804	46.12	PK	H	33.83	6.86	31.72	55.09	74	-18.91

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	38.41	AV	V	33.86	6.82	31.82	47.27	54	-6.73
4882	38.25	AV	H	33.86	6.82	31.82	47.11	54	-6.89
4882	46.28	PK	V	33.86	6.82	31.82	55.14	74	-18.86
4882	46.13	PK	H	33.86	6.82	31.82	54.99	74	-19.01

High Channel (2480 MHz)


Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	38.37	AV	V	33.9	6.76	31.92	47.11	54	-6.89
4960	38.16	AV	H	33.9	6.76	31.92	46.9	54	-7.10
4960	46.22	PK	V	33.9	6.76	31.92	54.96	74	-19.04
4960	46.05	PK	H	33.9	6.76	31.92	54.79	74	-19.21

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

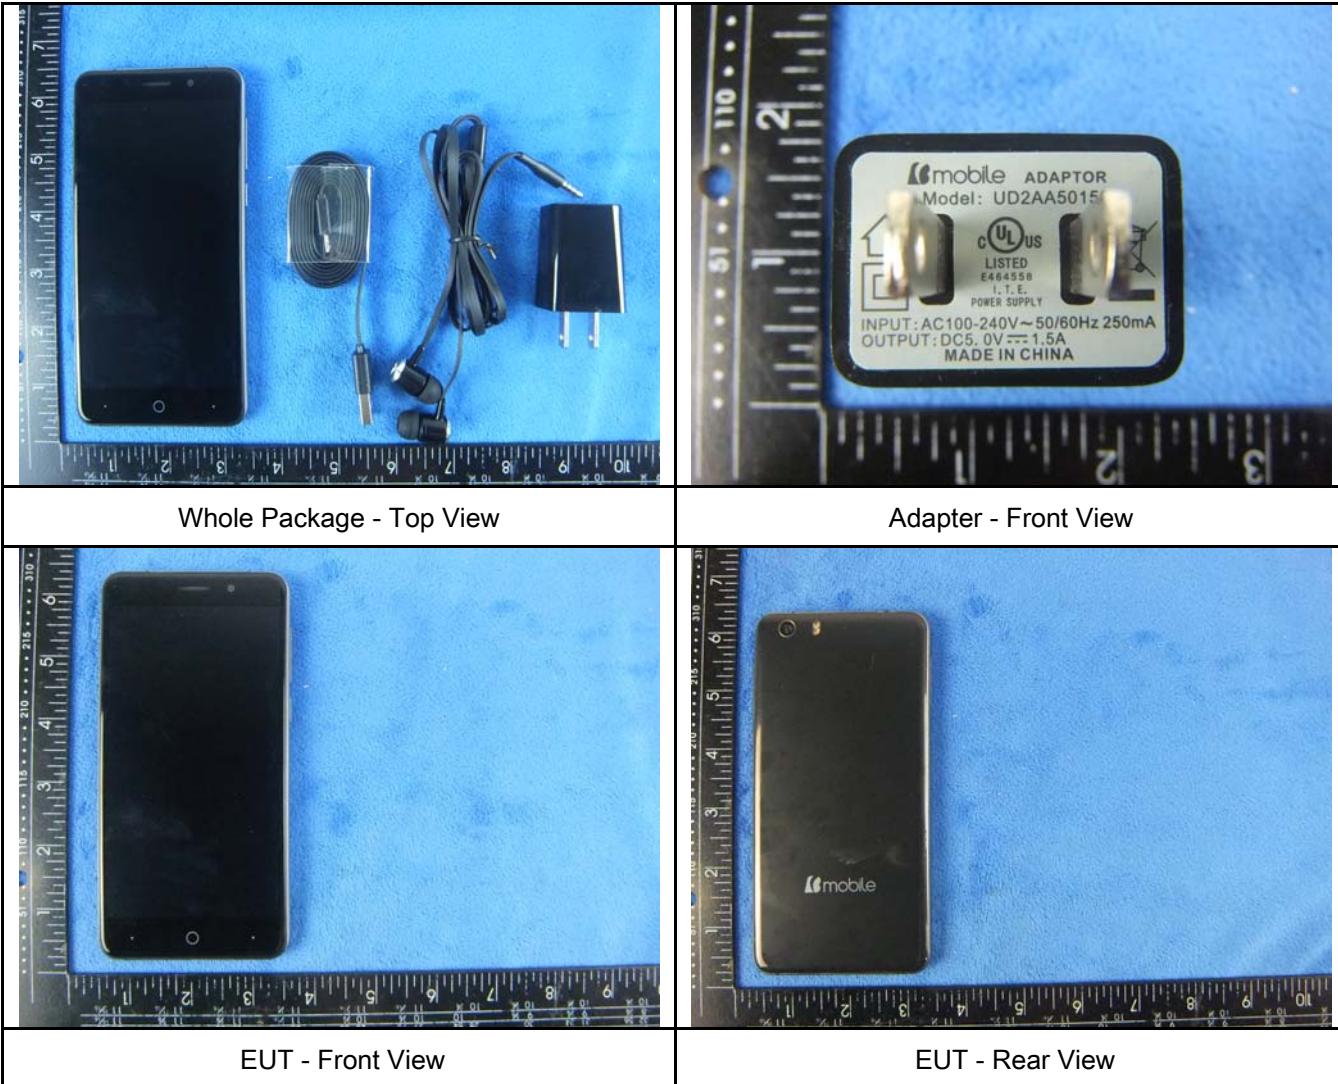




EUT - Top View



EUT - Bottom View

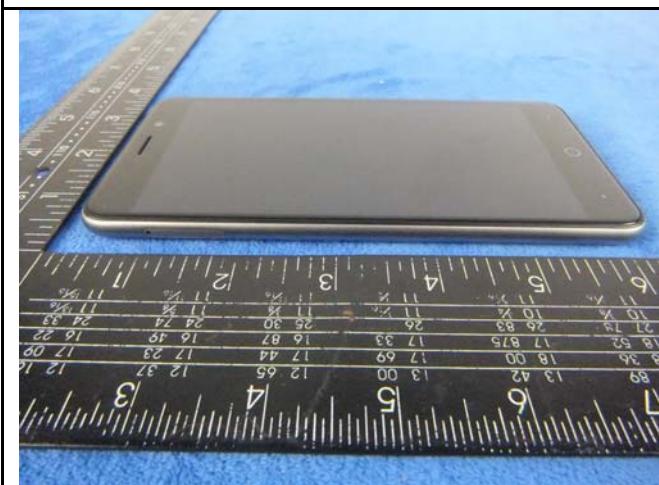




EUT - Left View



EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo

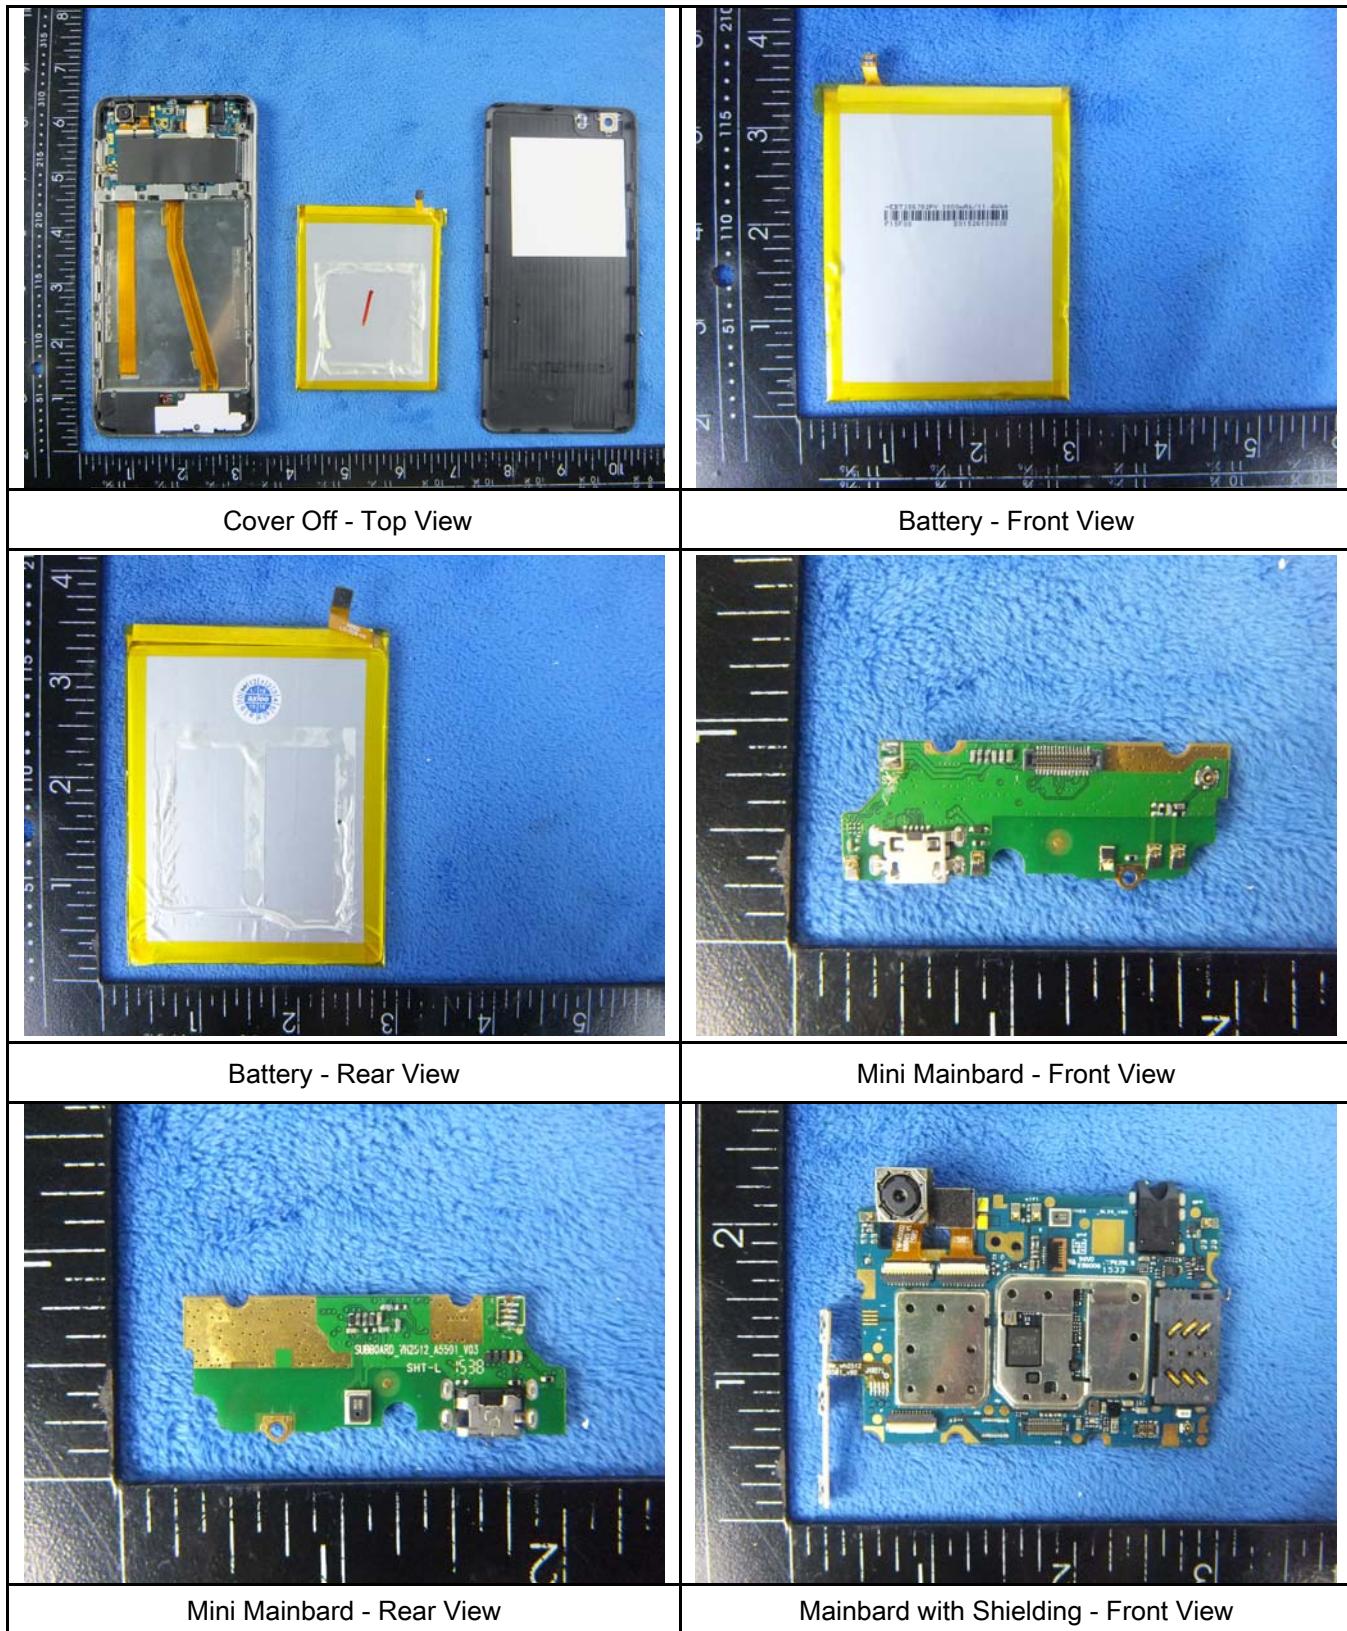

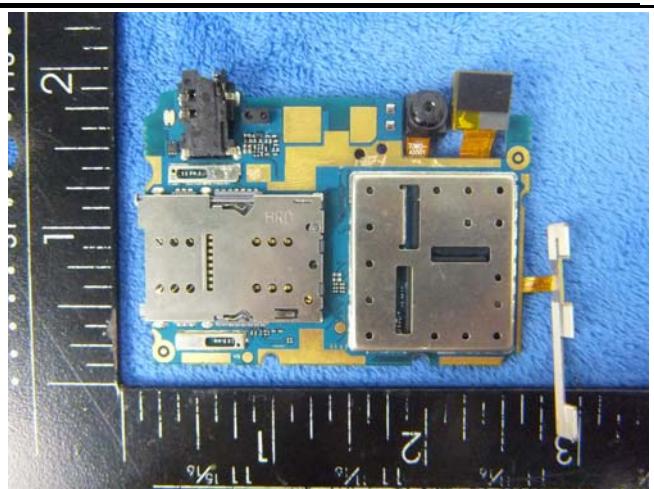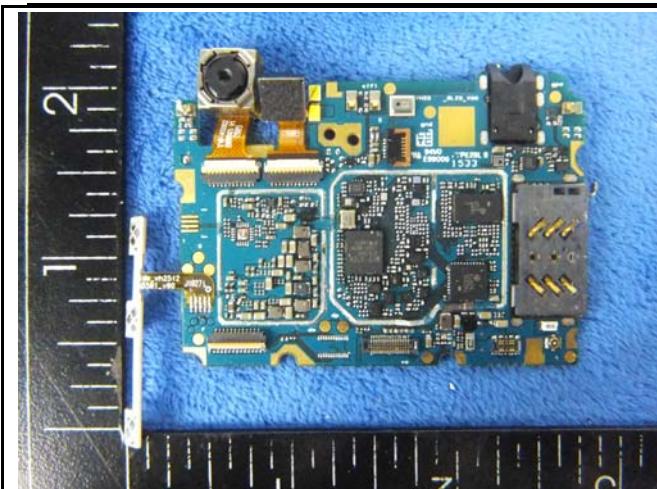



Mainboard without Shielding - Front View

Mainboard with Shielding - Rear View

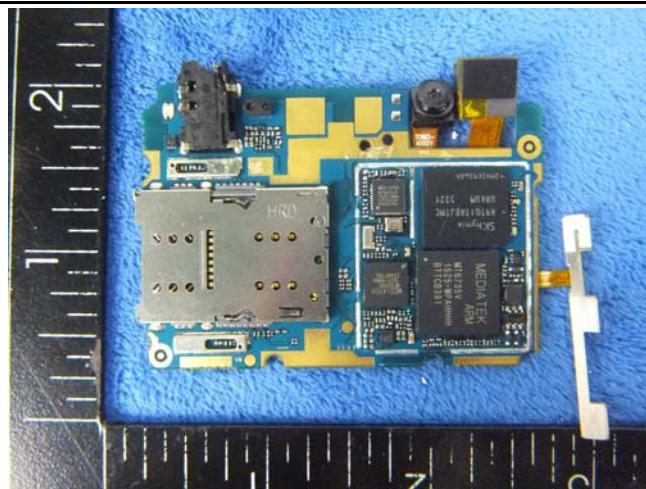


Mainboard without Shielding - Rear View

LCD - Front View

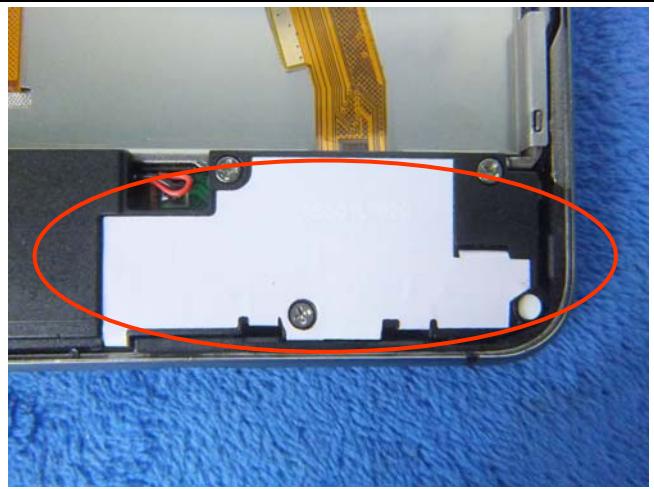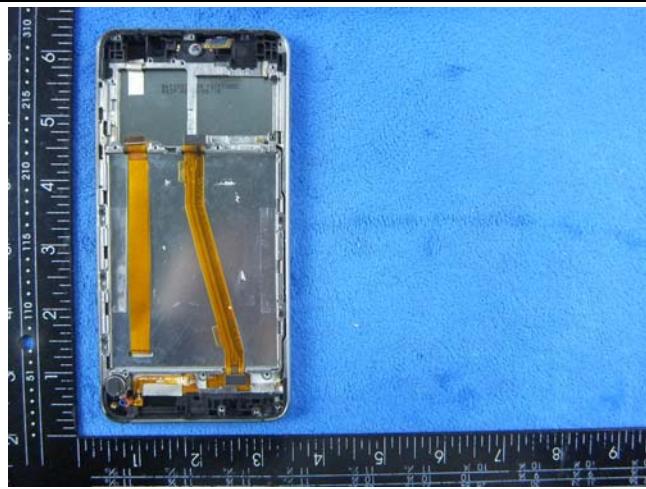


LCD - Rear View

GSM/PCS/UMTS-FDD/LTE Antenna View


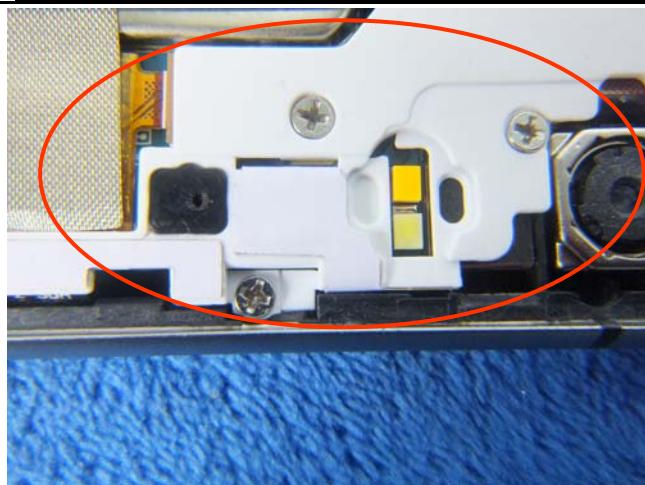


WIFI/BT/BLE - Antenna View

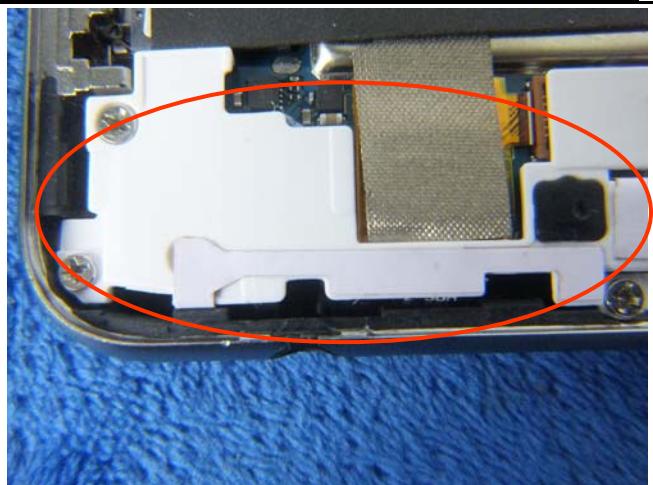

GPS - Antenna View


Annex B.iii. Photograph: Test Setup Photo

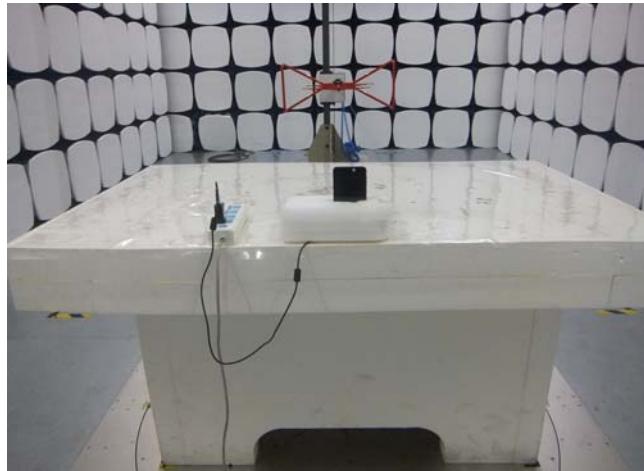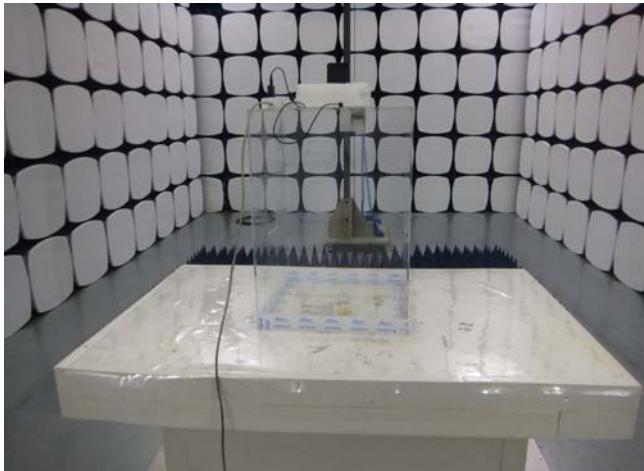 A photograph showing a wooden table in a test chamber. A black device is connected to a white power source on the table. A power strip and other equipment are visible in the background.	 A photograph showing a side view of the conducted emissions test setup. A black device is connected to a white power source on a wooden table. A power strip and other equipment are visible in the background.
Conducted Emissions Test Setup Front View	Conducted Emissions Test Setup Side View
 A photograph showing a white marble table in a test chamber. A black device is connected to a white power source on the table. The background is a white and black grid pattern.	 A photograph showing a white marble table in a test chamber. A black device is connected to a white power source on the table. The background is a white and black grid pattern.
Radiated Spurious Emissions Test Setup Below 1GHz	Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

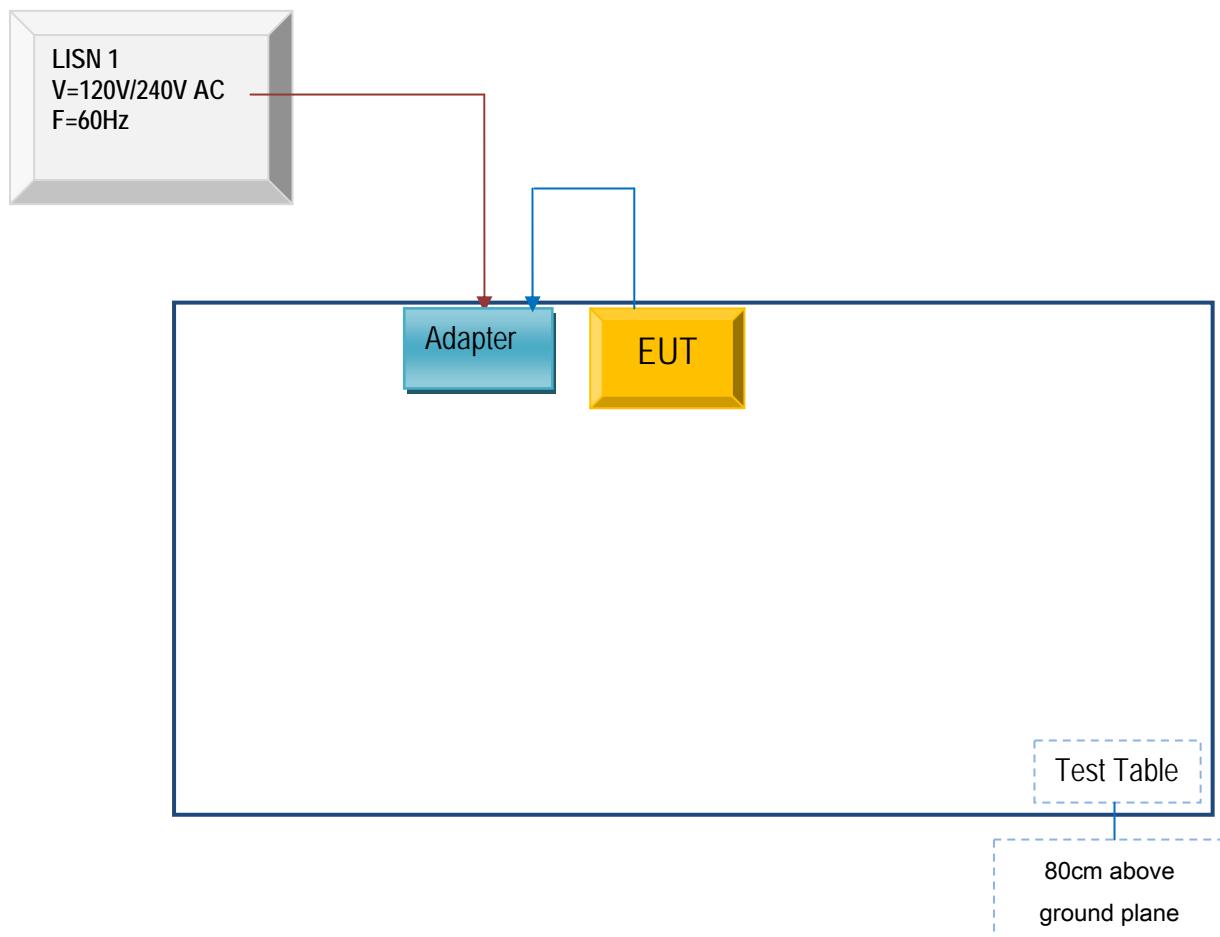

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

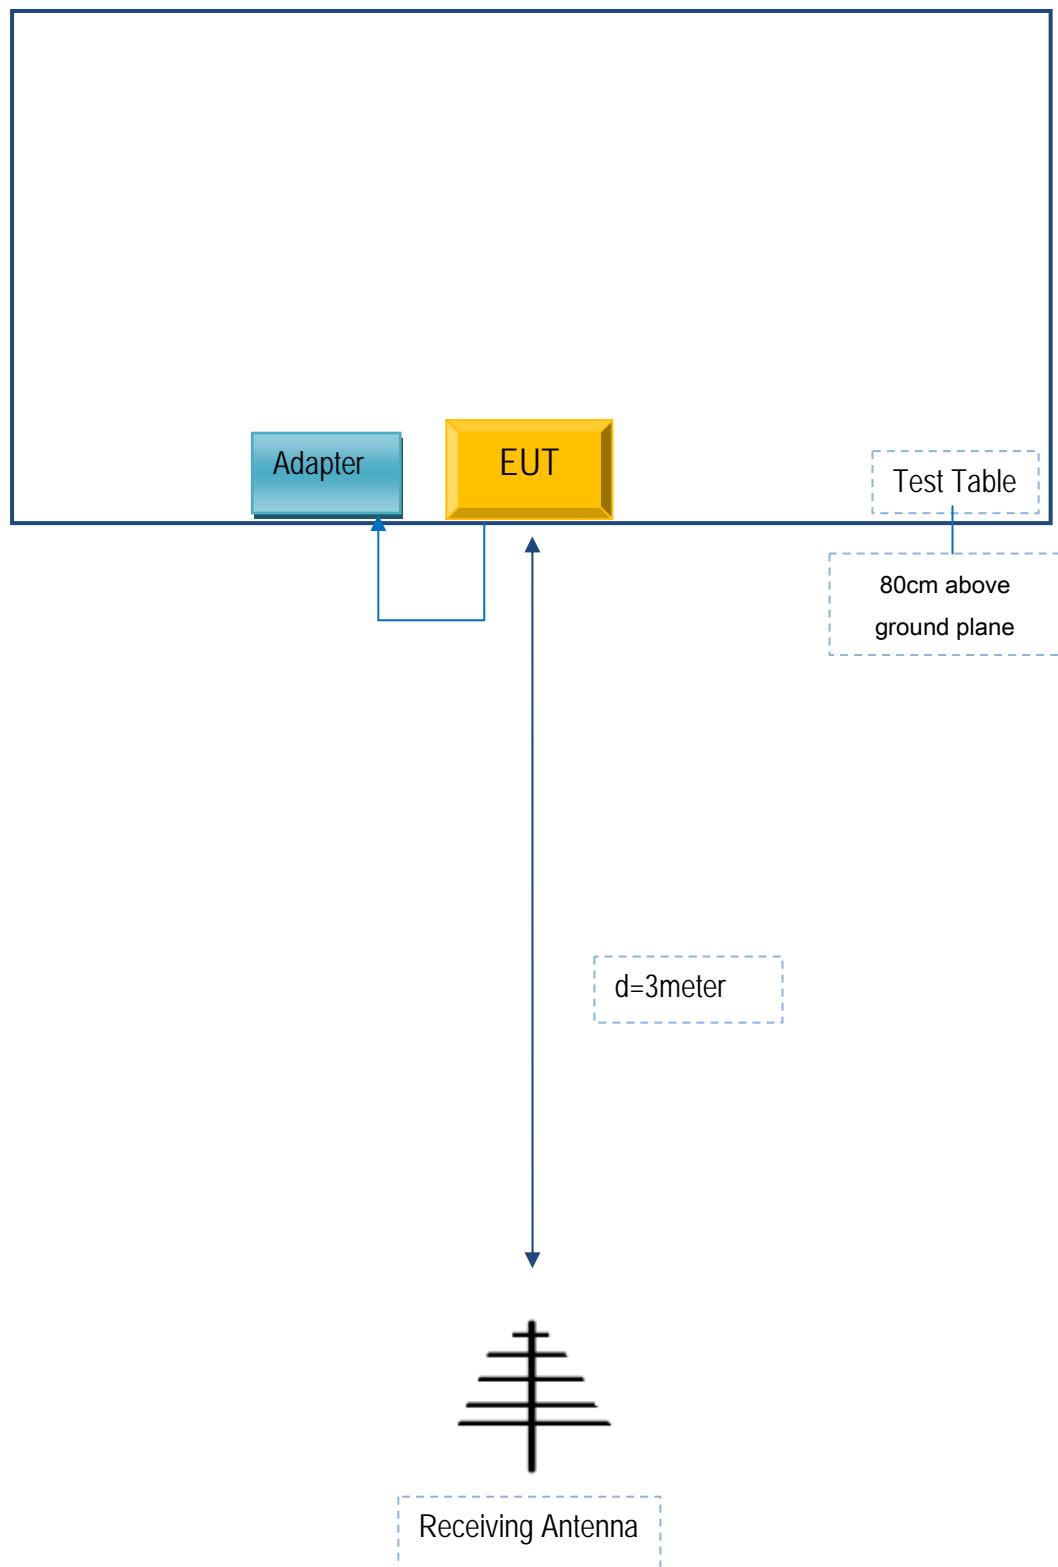

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

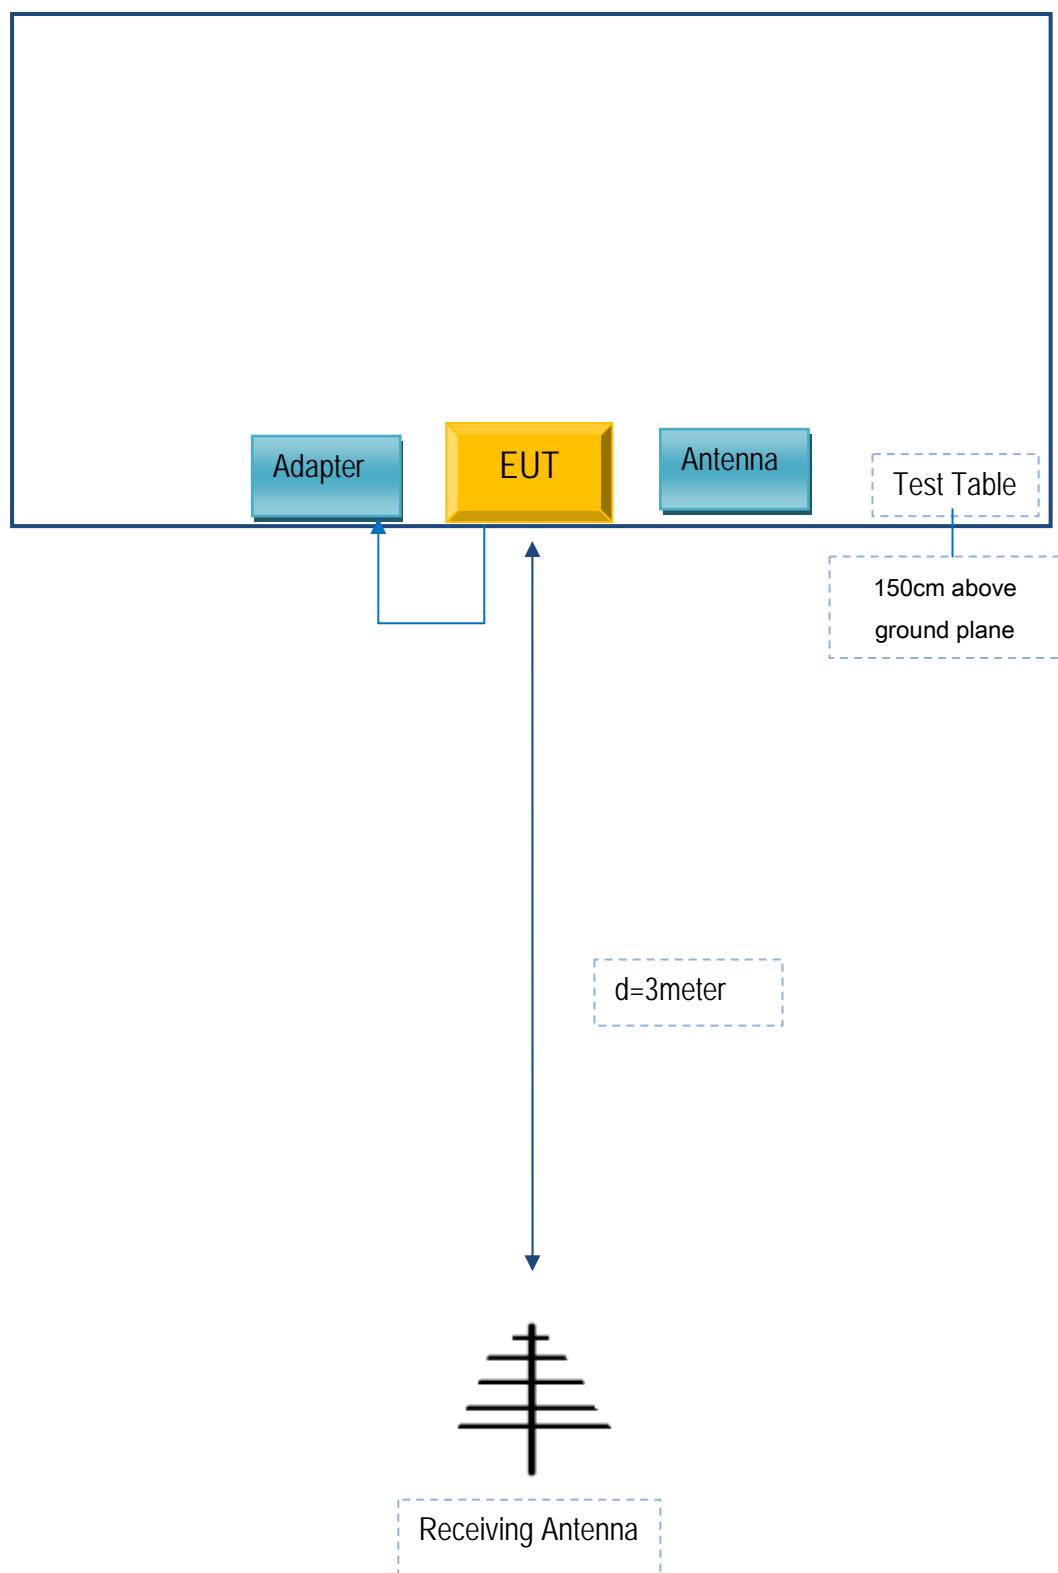

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

As shown below

To SIEMIC Inc
775 Montague Expressway
Milpitas, CA 95035.

Statement

We, **b Mobile HK Limited** apply a multiple-listing certification for the below models.

Product Name: Mobile phone

Model number: AX1095/B1+

FCC ID: ZSW-30-018

We hereby state that these models are identical in interior structure, electrical circuits and components, and just model name is different for the marketing requirement.

Your ~~possible~~ assistance on this matter is highly appreciated.

b mobile HK Limited

Sincerely, *Authorized Signature(s)*

Name: KA SHING LAM

Title: Director

Signature: