

RF TEST REPORT



Report No.: 15050054-FCC-R3

Supersede Report No.: N/A

Applicant	b mobile HK Limited	
Product Name	Mobile Phone	
Model No.	AX1010	
Serial No.	AX1005	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	November 24 to December 04, 2015	
Issue Date	December 08, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Winnie.Zhang	David Huang	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	15050054-FCC-R3
Page	3 of 55

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH.....	11
6.3 MAXIMUM OUTPUT POWER	17
6.4 POWER SPECTRAL DENSITY.....	21
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	25
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	33
6.7 RADIATED EMISSIONS	39
ANNEX A. TEST INSTRUMENT.....	44
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	45
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	50
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	54
ANNEX E. DECLARATION OF SIMILARITY	55

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050054-FCC-R3	NONE	Original	December 08, 2015

2. Customer information

Applicant Name	b mobile HK Limited
Applicant Add	Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong
Manufacturer	b mobile HK Limited
Manufacturer Add	Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	AX1010
Serial Model:	AX1005
Date EUT received:	November 23,2015
Test Date(s):	November 24 to December 04, 2015
Equipment Category :	DTS
	GSM850: -3.3dBi
	PCS1900: -4.6dBi
	UMTS-FDD Band V: -3.4dBi
	UMTS-FDD Band II: -3.4dBi
	Bluetooth/BLE: -3.5dBi
Antenna Gain:	WIFI: -4.2dBi
	LTE Band 2: -5.2 dBi
	LTE Band 4: -4.1dBi
	LTE Band 5: -3.5dBi
	LTE Band 7: -2.9dBi
	GPS: -3.9dBi
	GSM / GPRS: GMSK
	EGPRS: GMSK, 8PSK
	UMTS-FDD: QPSK, 16QAM
Type of Modulation:	802.11b/g/n: DSSS, OFDM
	Bluetooth: GFSK, π /4DQPSK, 8DPSK
	BLE: GFSK
	LTE Band: QPSK, 16QAM
	GPS:BPSK
	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
RF Operating Frequency (ies):	PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
	UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
	UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;

Test Report No.	15050054-FCC-R3
Page	7 of 55

RX: 1932.4 ~ 1987.6 MHz

WIFI:802.11b/g/n(20M): 2412-2472 MHz

WIFI:802.11n(40M): 2422-2462 MHz

Bluetooth& BLE: 2402-2480 MHz

LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz

LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz

LTE Band 5 TX: 826.5 ~ 846.5 MHz; RX : 871.5 ~ 891.5 MHz

LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz

GPS RX:1575.42 MHz

802.11b:9.33dBm

802.11g:9.27dBm

802.11n(20M):9.47dBm

802.11n(40M):9.27dBm

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V : 102CH

UMTS-FDD Band II : 277CH

Number of Channels: WIFI :802.11b/g/n(20M): 11CH

WIFI :802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH

GPS:1CH

Battery:

Model:AX1010

Standard Voltage:DC3.8V

Rated Capacity:1450mAh,5.51Wh

Input Power:

Adapter:

Model:N/A

Input: AC100-240V; 50/60Hz; 0.15A

Output: DC 5.0V,700mA

Port: Power Port, Earphone Port, USB Port

Trade Name : Bmobile

Test Report No.	15050054-FCC-R3
Page	8 of 55

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: ZSW-30-021

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is -3.5dBi for Bluetooth and BLE, the gain is -4.2dBi for WIFI, the gain is -3.9dBi for GPS.


A permanently attached PIFA antenna for GSM /UMTS and LTE, the gain is -3.3dBi for GSM850, -4.6dBi for PCS1900, -3.4dBi for UMTS-FDD Band V and Band II, the gain is -5.2dBi for LTE Band 2, the gain is -4.1dBi for LTE Band 4, the gain is -3.5dBi for LTE Band 5, the gain is -2.9dBi for LTE Band 7.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	November 24, 2015
Tested By :	Winnie Zhang

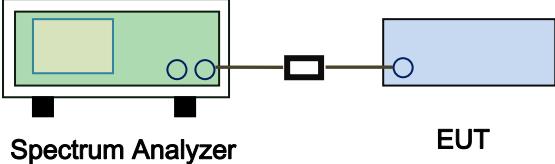Spec	Item	Requirement	Applicable
§ 15.247(a)(2)	a)	6dB BW \geq 500kHz; 20dB BW \geq 500kHz;	<input checked="" type="checkbox"/>
	b)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth</p> <p><u>6dB bandwidth</u></p> <ol style="list-style-type: none"> Set RBW = 100 kHz. Set the video bandwidth (VBW) \geq 3 \times RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ol style="list-style-type: none"> Set RBW = 1%-5% OBW. Set the video bandwidth (VBW) \geq 3 x RBW. Set the span range between 2 times and 5 times of the OBW. Sweep time=Auto, Detector=PK, Trace=Max hold. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst- 		

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result



Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.09	16.30	≥ 0.5
	Mid	2442	10.06	16.25	≥ 0.5
	High	2472	10.07	16.29	≥ 0.5
802.11g	Low	2412	16.38	19.09	≥ 0.5
	Mid	2442	16.39	19.08	≥ 0.5
	High	2472	16.40	19.15	≥ 0.5
802.11n (20M)	Low	2412	17.39	19.62	≥ 0.5
	Mid	2442	17.60	19.41	≥ 0.5
	High	2472	17.62	19.52	≥ 0.5
802.11n (40M)	Low	2422	36.10	39.56	≥ 0.5
	Mid	2442	35.77	39.57	≥ 0.5
	High	2462	36.38	39.55	≥ 0.5

Test Plots

6dB Bandwidth measurement result


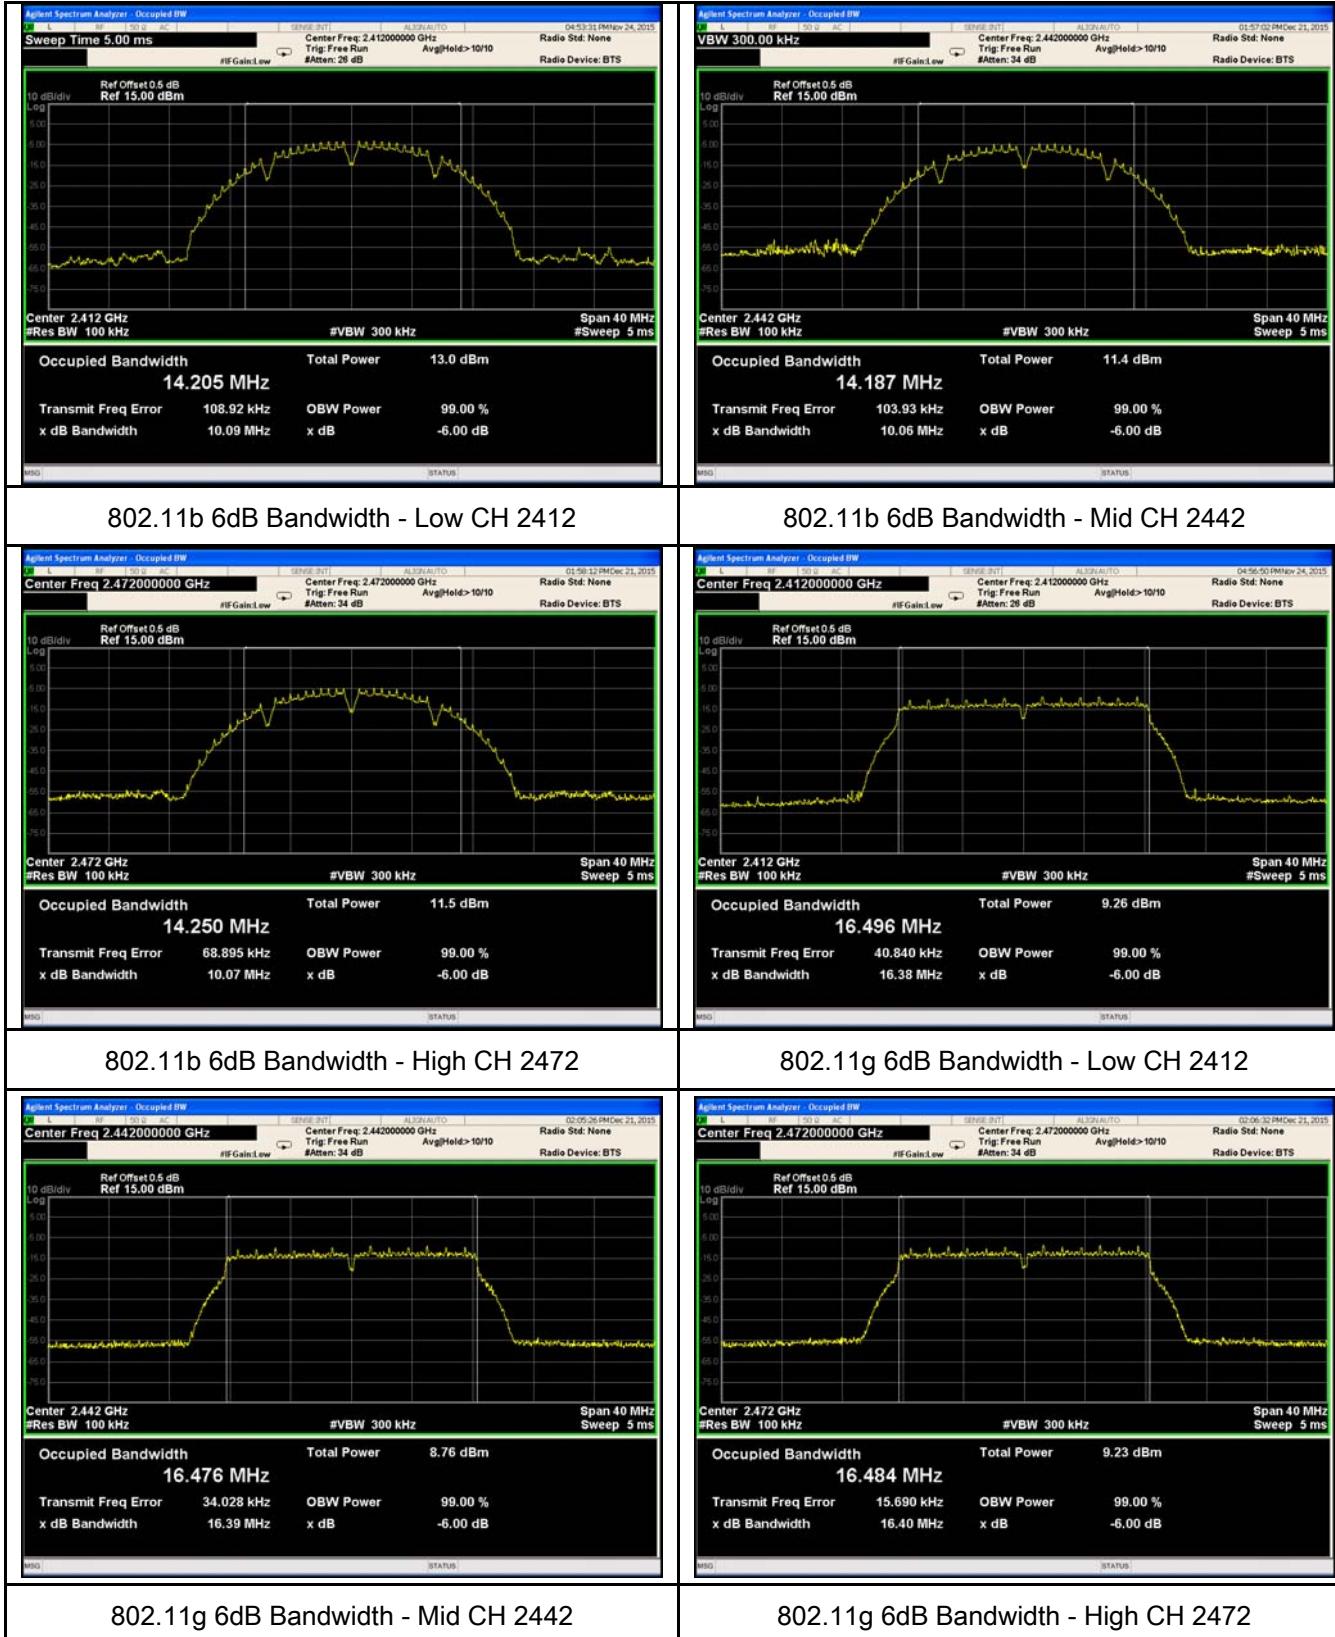


Test Report No.	15050054-FCC-R3
Page	14 of 55

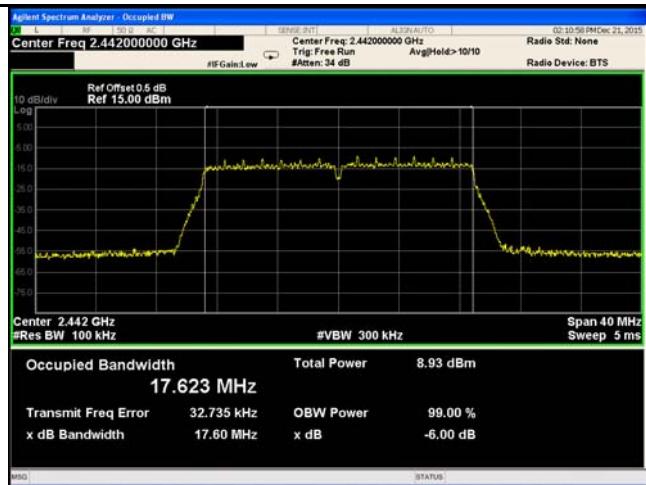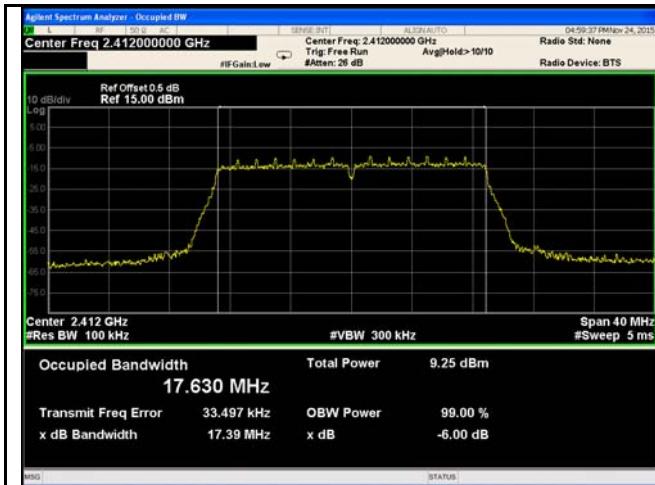



802.11n20 6dB Bandwidth - Low CH 2412

802.11n20 6dB Bandwidth - Mid CH 2442

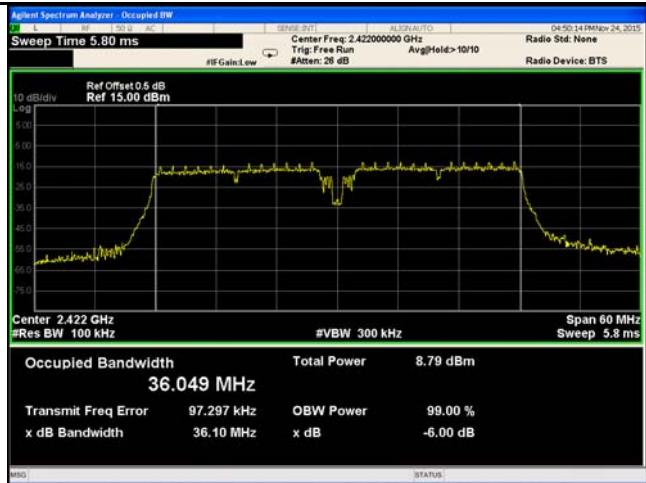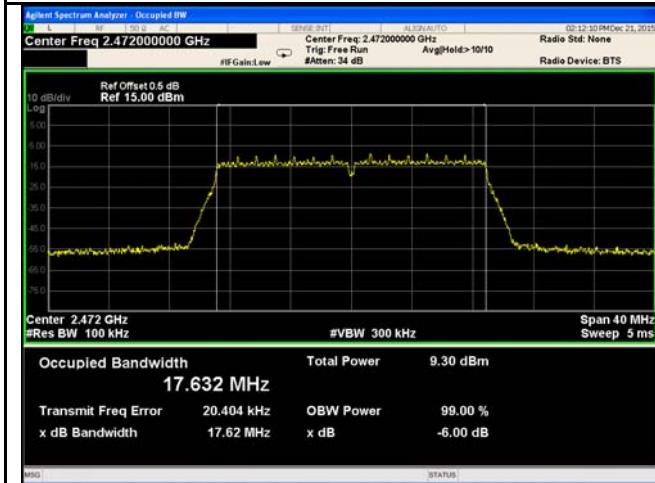

802.11n20 6dB Bandwidth - High CH 2472




802.11n40 6dB Bandwidth - Low CH 2422

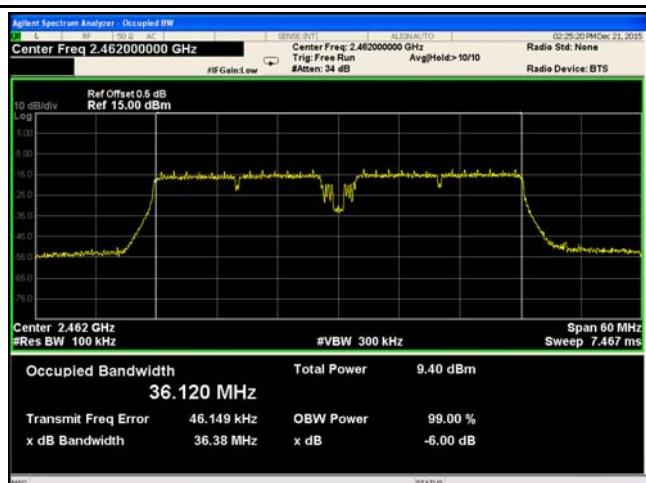
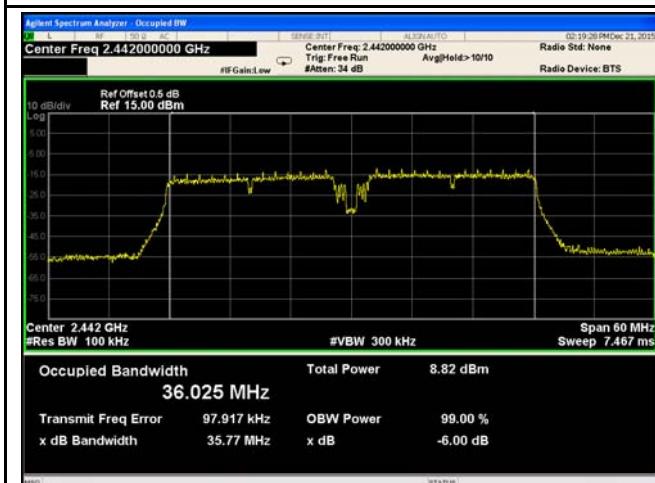


802.11n40 6dB Bandwidth - Mid CH 2442


802.11n40 6dB Bandwidth - High CH 2462

20 dB Bandwidth measurement result

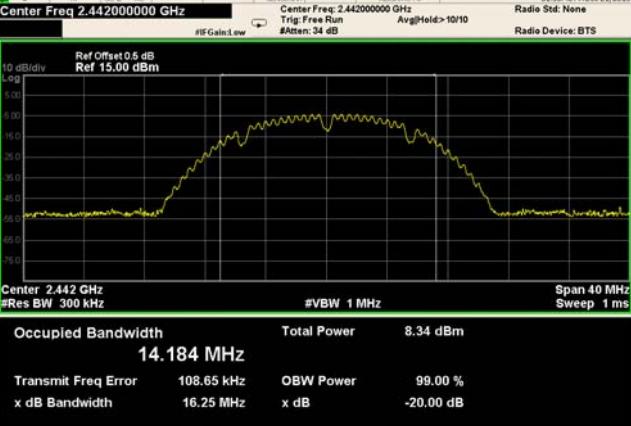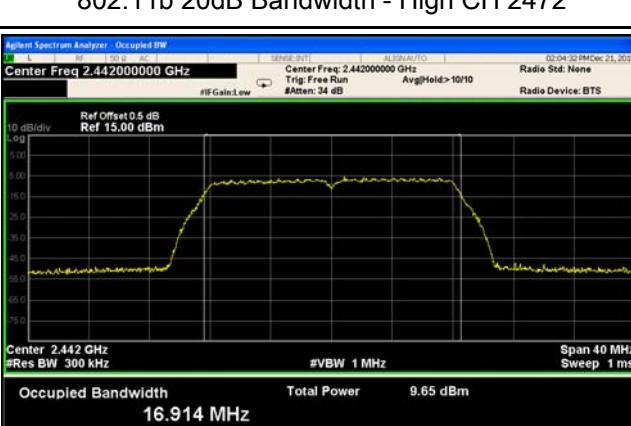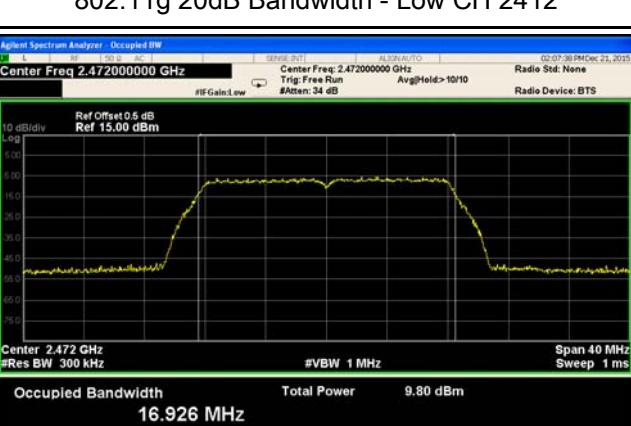
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Value 15.00 dBm</p> <p>Center Freq: 2.47200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 34 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.472 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 14.244 MHz</p> <p>Total Power 8.72 dBm</p> <p>Transmit Freq Error 70.964 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.29 MHz x dB -20.00 dB</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Value 15.00 dBm</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.925 MHz</p> <p>Total Power 10.1 dBm</p> <p>Transmit Freq Error 74.868 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 19.09 MHz x dB -20.00 dB</p>
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Value 15.00 dBm</p> <p>Center Freq: 2.44200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 34 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.442 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.914 MHz</p> <p>Total Power 9.65 dBm</p> <p>Transmit Freq Error 77.154 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 19.08 MHz x dB -20.00 dB</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Value 15.00 dBm</p> <p>Center Freq: 2.47200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 34 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.472 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.926 MHz</p> <p>Total Power 9.80 dBm</p> <p>Transmit Freq Error 28.092 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 19.15 MHz x dB -20.00 dB</p>
<p>802.11b 20dB Bandwidth - Low CH 2412</p>	<p>802.11b 20dB Bandwidth - Mid CH 2442</p>
<p>802.11b 20dB Bandwidth - High CH 2472</p>	<p>802.11g 20dB Bandwidth - Low CH 2412</p>
<p>802.11g 20dB Bandwidth - Mid CH 2442</p>	<p>802.11g 20dB Bandwidth - High CH 2472</p>

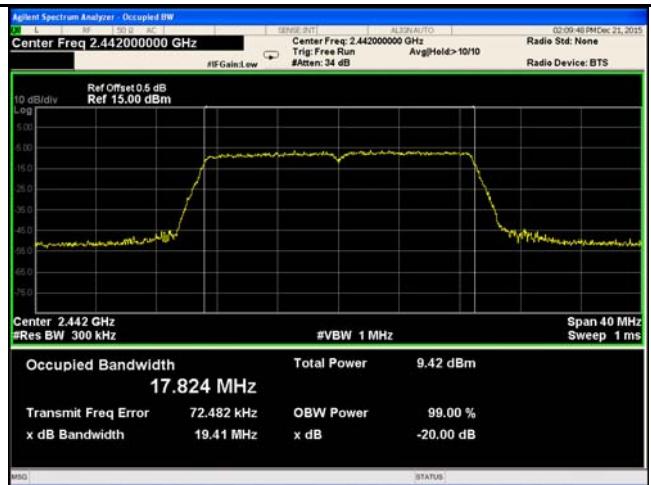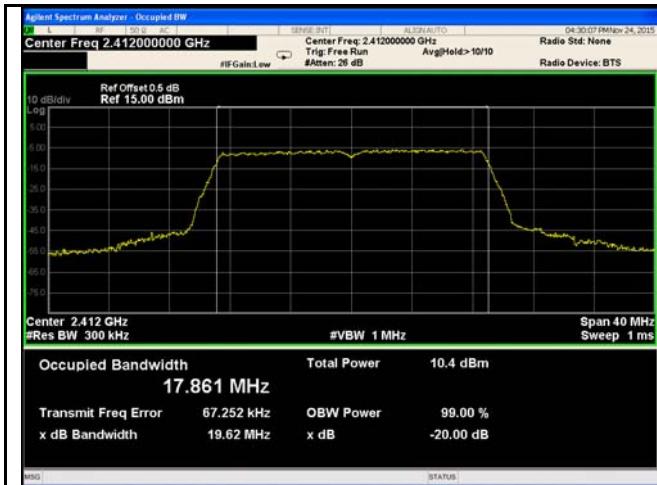

802.11n20 20dB Bandwidth - Low CH 2412

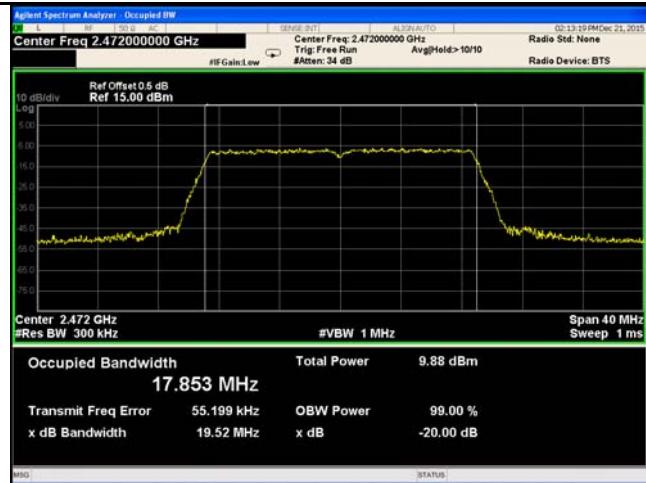

802.11n20 20dB Bandwidth - Mid CH 2442

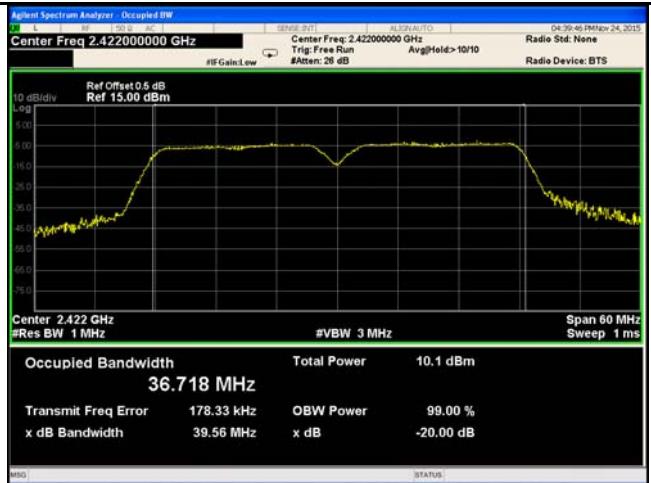

802.11n20 20dB Bandwidth - High CH 2472



802.11n40 20dB Bandwidth - Low CH 2422




802.11n40 20dB Bandwidth - Mid CH 2442

802.11n40 20dB Bandwidth - High CH 2462

6.3 Maximum Output Power

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	November 24, 2015
Tested By :	Winnie Zhang

Requirement(s):

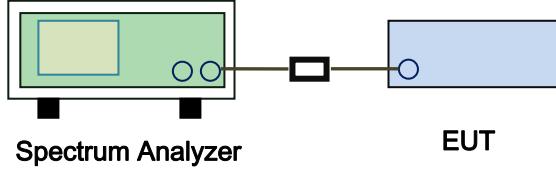Spec	Item	Requirement	Applicable
§15.247(b) (3), RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & < 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz \leq 1 Watt	<input checked="" type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW \geq 3 x RBW. - d) Number of points in sweep \geq 2 x span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle $<$ 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum 	

	<p>power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “ free run” .</p> <ul style="list-style-type: none"> - h) Trace average at least 100 traces in power averaging (i.e., RMS) mode. - i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’ s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A




Test Plot Yes (See below) N/A


Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	9.33	30	Pass
		Mid	2442	8.38	30	Pass
		High	2472	8.72	30	Pass
	802.11g	Low	2412	9.29	30	Pass
		Mid	2442	9.25	30	Pass
		High	2472	9.26	30	Pass
	802.11n (20M)	Low	2412	9.24	30	Pass
		Mid	2442	9.34	30	Pass
		High	2472	9.47	30	Pass
	802.11n (40M)	Low	2422	9.27	30	Pass
		Mid	2442	8.81	30	Pass
		High	2462	8.85	30	Pass

Test Plots


The Average Power

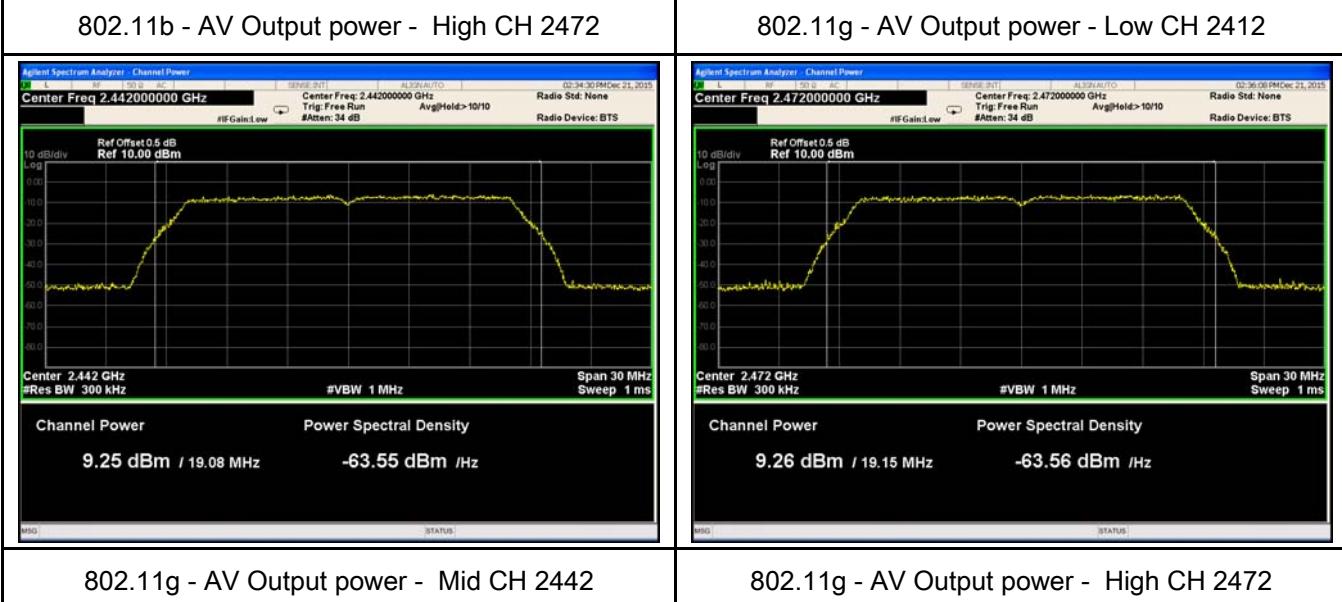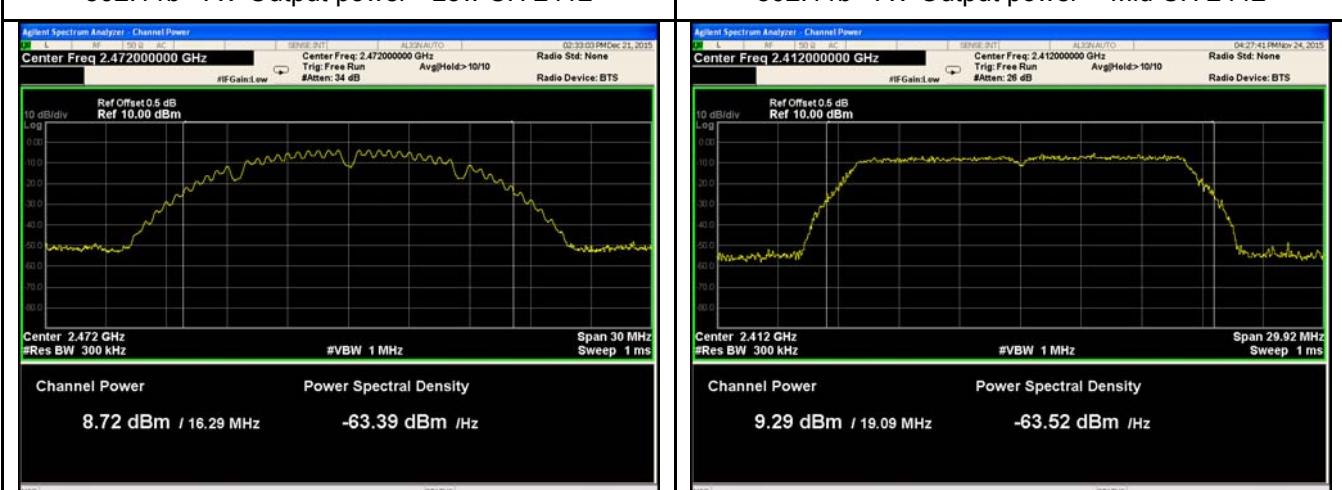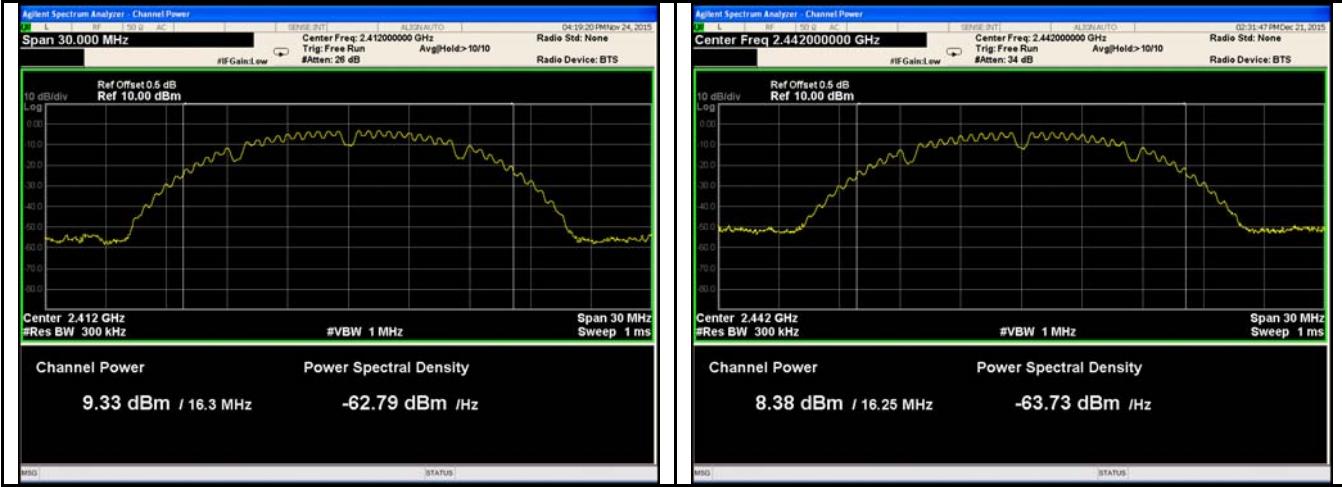

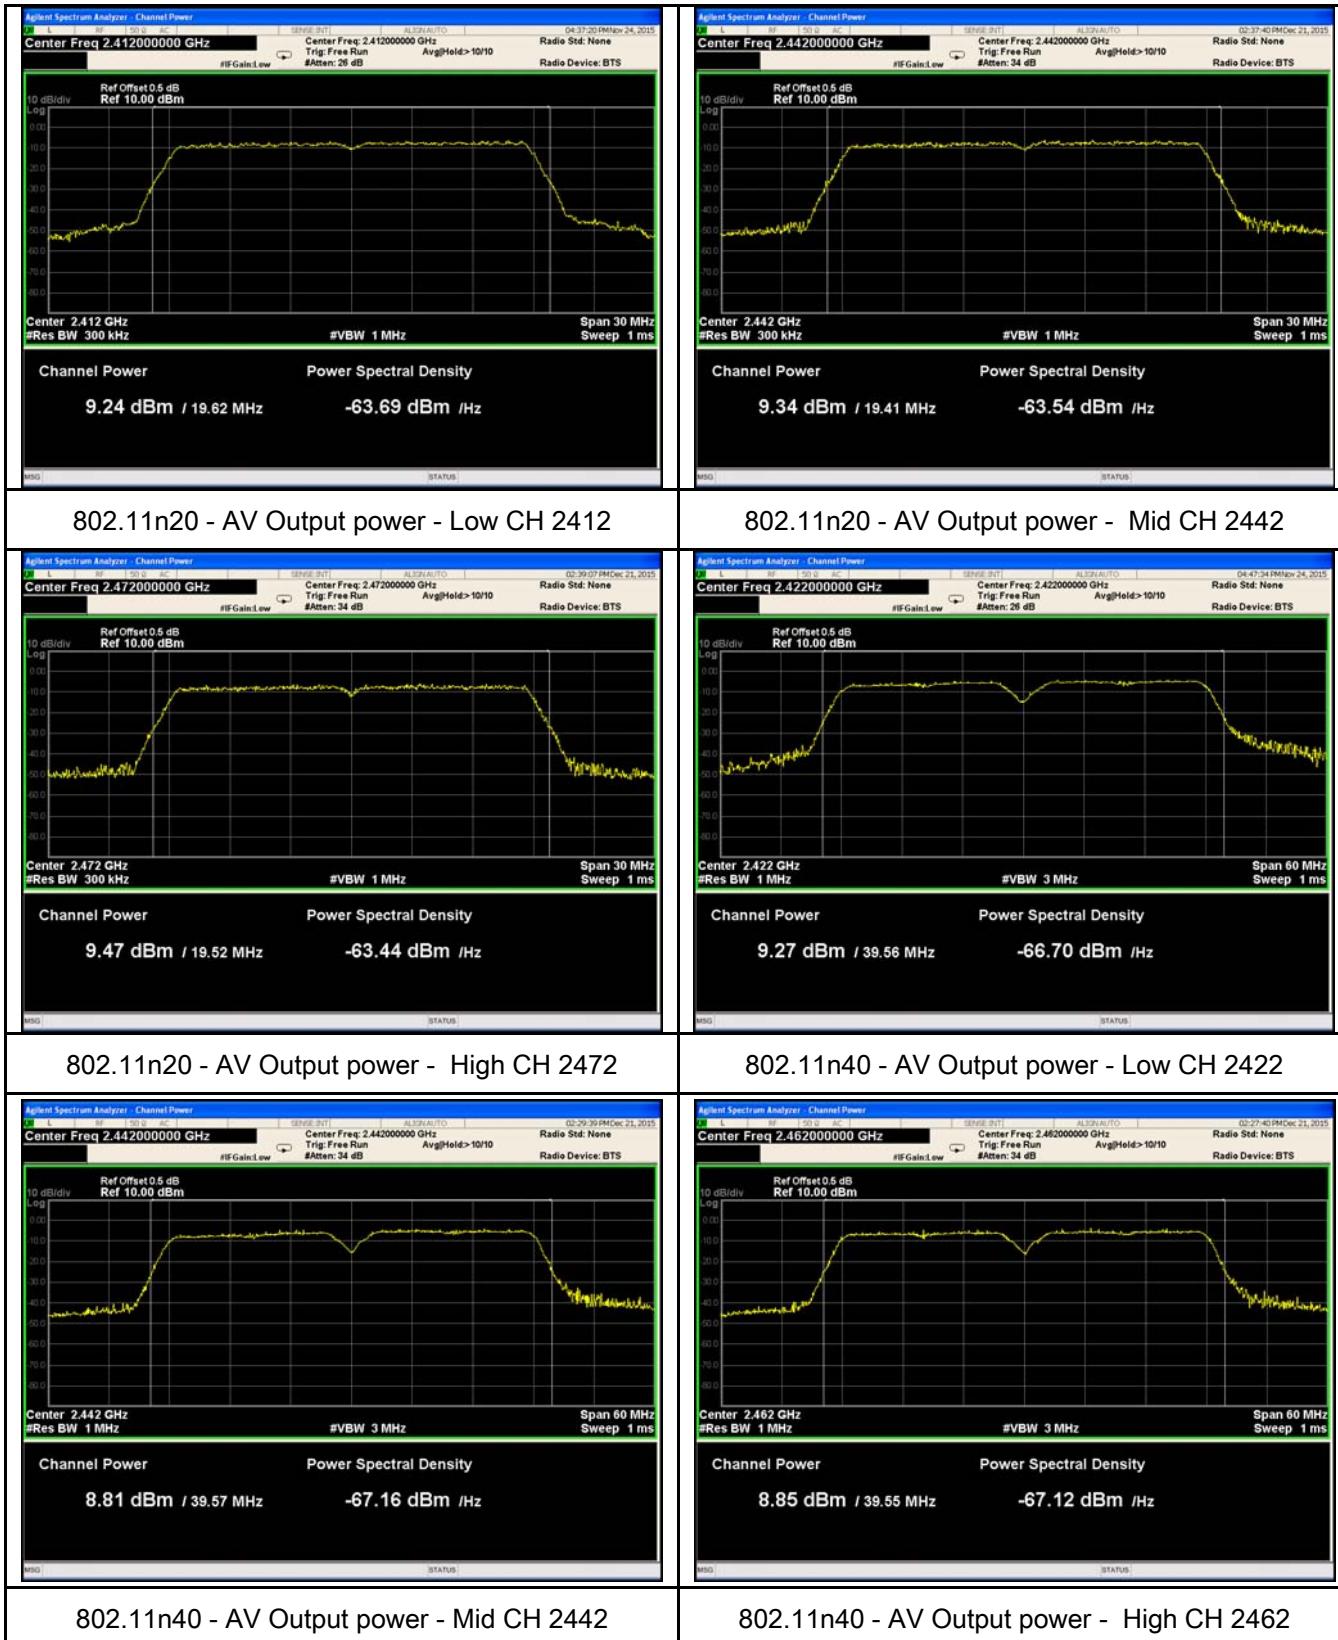

6.4 Power Spectral Density

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	November 24, 2015
Tested By :	Winnie Zhang

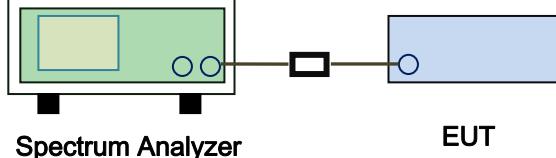Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> - a) Set analyzer center frequency to DTS channel center frequency. - b) Set the span to 1.5 times the DTS bandwidth. - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - d) Set the VBW $\geq 3 \times \text{RBW}$. - e) Detector = peak. - f) Sweep time = auto couple. - g) Trace mode = max hold. - h) Allow trace to fully stabilize. - i) Use the peak marker function to determine the maximum amplitude level within the RBW. - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A
 Test Plot Yes (See below) N/A

Power Spectral Density measurement result :


Type	Test mode	CH	Freq (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	-3.481	-10.0	-13.481	8	Pass
		Mid	2442	-3.992	-10.0	-13.992	8	Pass
		High	2472	-3.753	-10.0	-13.753	8	Pass
	802.11g	Low	2412	-13.234	-10.0	-23.234	8	Pass
		Mid	2442	-12.648	-10.0	-22.648	8	Pass
		High	2472	-11.863	-10.0	-21.863	8	Pass
	802.11n (20M)	Low	2412	-13.522	-10.0	-23.522	8	Pass
		Mid	2442	-12.511	-10.0	-22.511	8	Pass
		High	2472	-11.976	-10.0	-21.976	8	Pass
	802.11n (40M)	Low	2422	-12.507	-15.2	-27.707	8	Pass
		Mid	2442	-10.467	-15.2	-25.667	8	Pass
		High	2472	-10.676	-15.2	-25.876	8	Pass


Note: Factor= $10\log(3/30)$ dB= -10.0 dB (b, g, n20 mode);

Factor= $10\log(3/100)$ dB= -15.2 dB (n40 mode).

Test Plots

Power Spectral Density measurement result

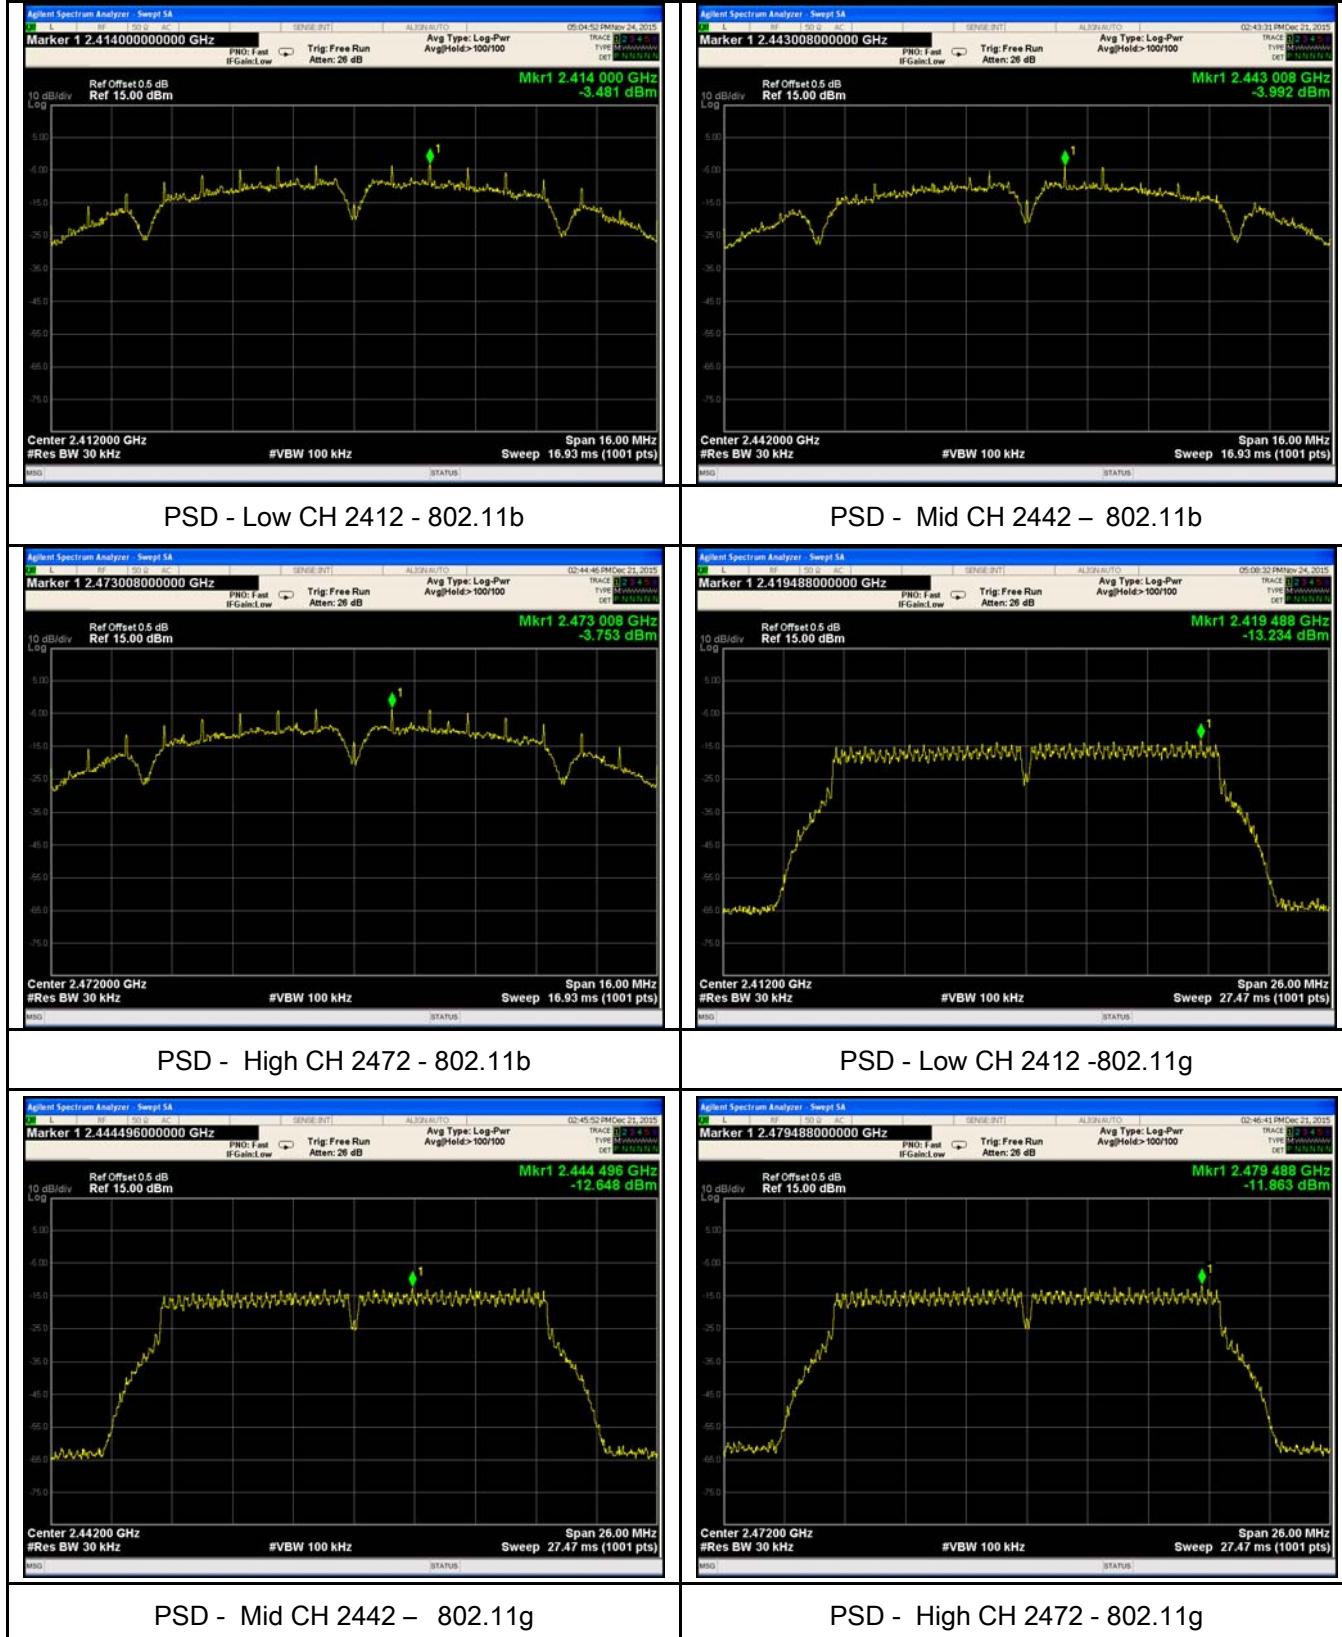


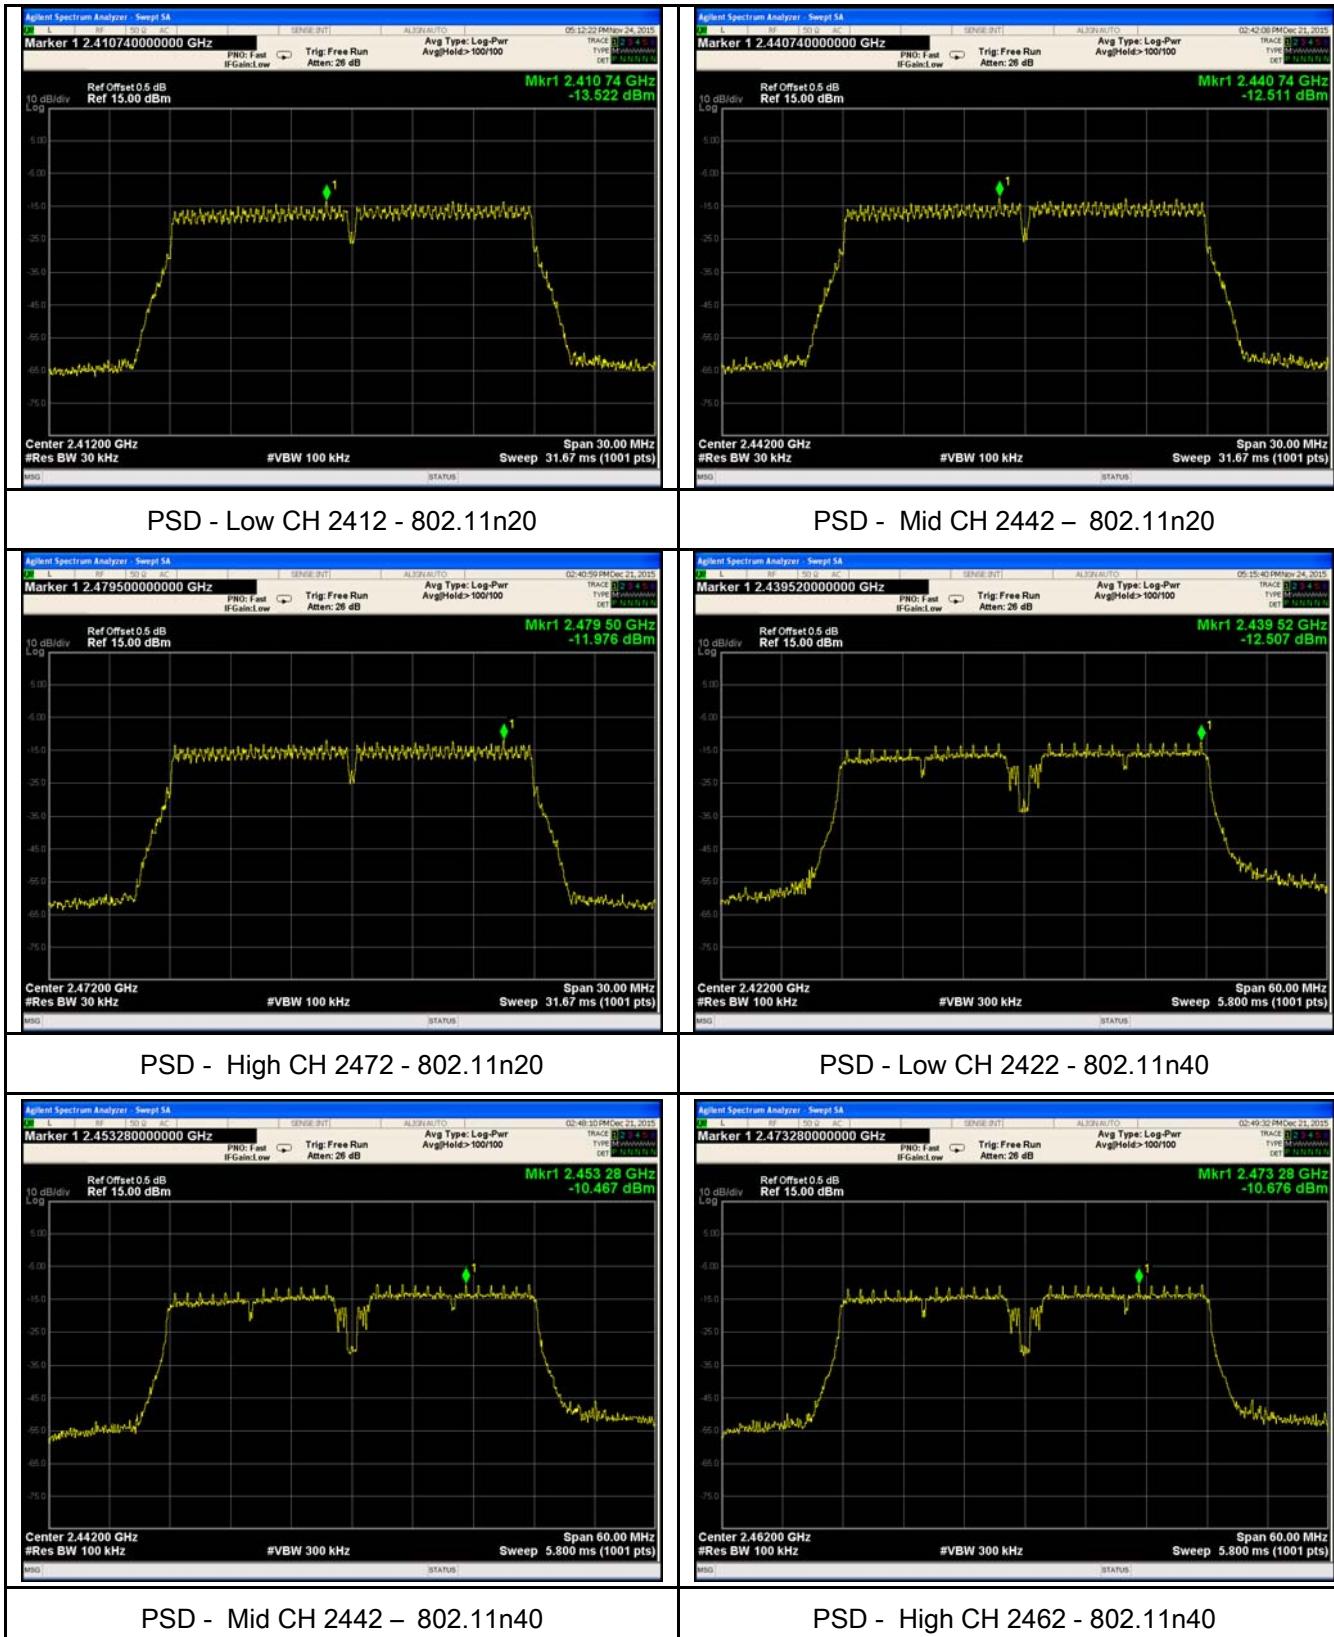

6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	
Relative Humidity	
Atmospheric Pressure	
Test date :	
Tested By :	Winnie Zhang

Requirement(s):

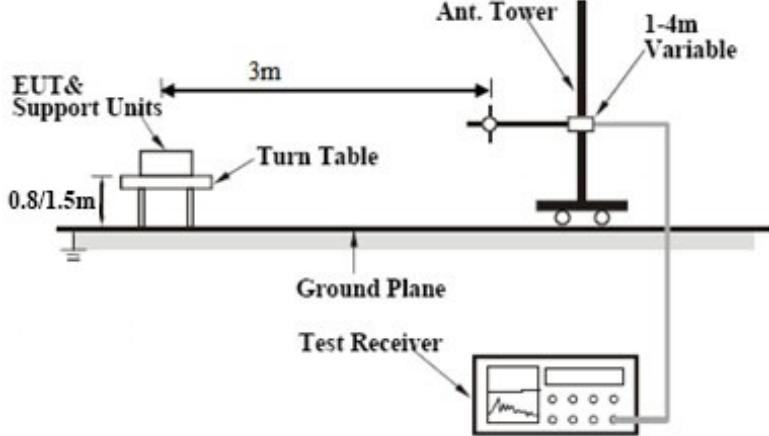Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, 		


	<p>check the emission of EUT, if pass then set Spectrum Analyzer as below:</p> <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail




Test Data Yes N/A




Test Plot Yes (See below) N/A





Test Plots

Band Edge measurement result

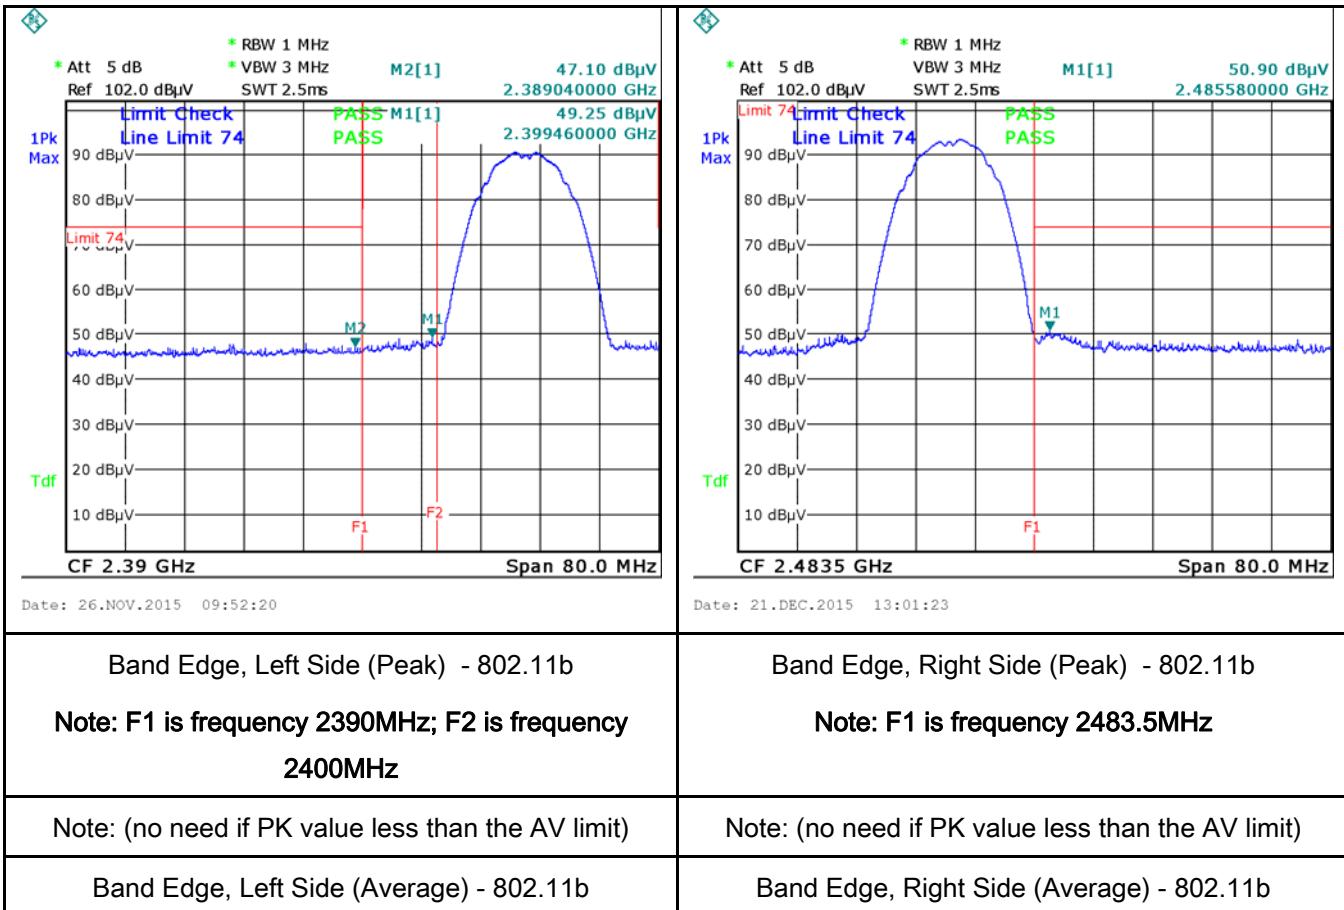


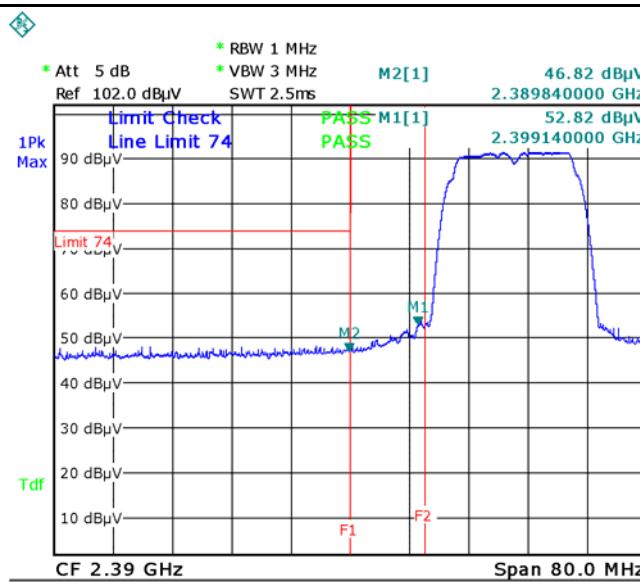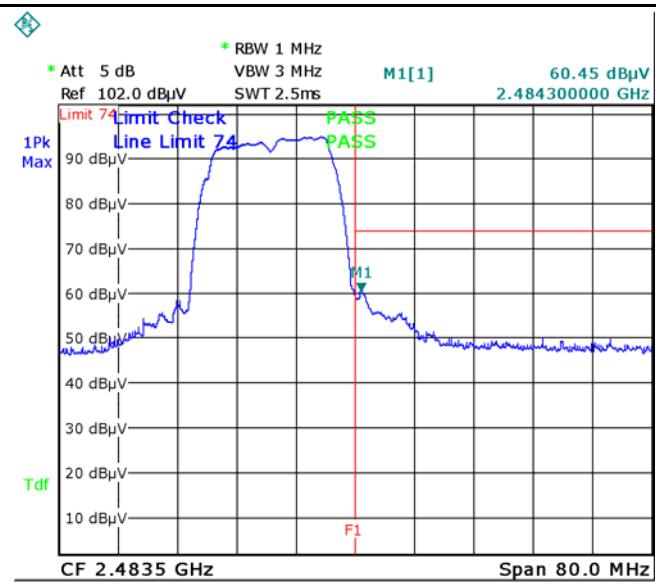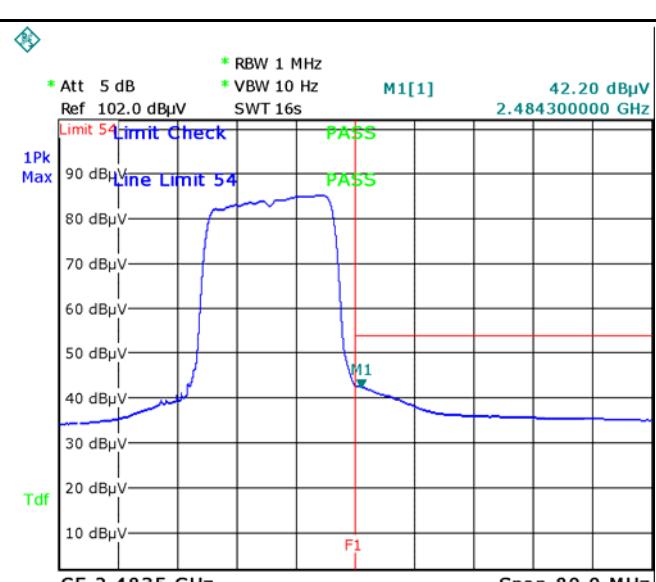
 <p>CF 2.39 GHz Span 80.0 MHz</p> <p>Date: 26.NOV.2015 09:54:32</p> <p>Band Edge, Left Side (Peak) - 802.11g</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	 <p>CF 2.4835 GHz Span 80.0 MHz</p> <p>Date: 21.DEC.2015 13:02:56</p> <p>Band Edge, Right Side (Peak) - 802.11g</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	 <p>CF 2.4835 GHz Span 80.0 MHz</p> <p>Date: 21.DEC.2015 13:04:05</p> <p>Band Edge, Left Side (Average) - 802.11g</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>
<p>Band Edge, Right Side (Average) - 802.11g</p> <p>Note: F1 is frequency 2483.5MHz</p>	

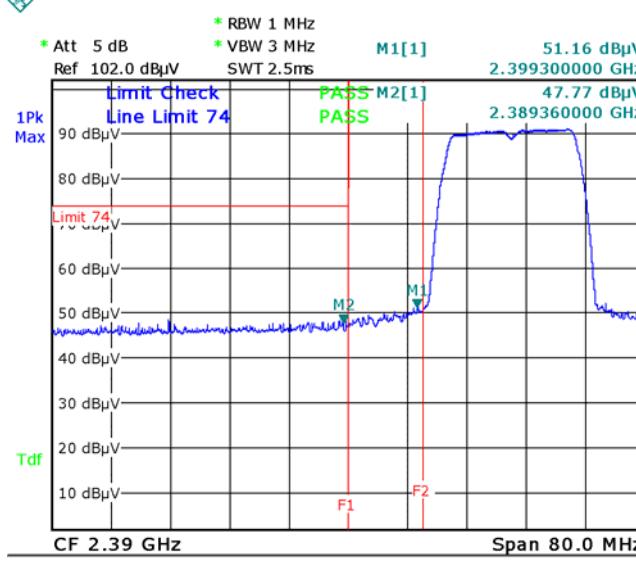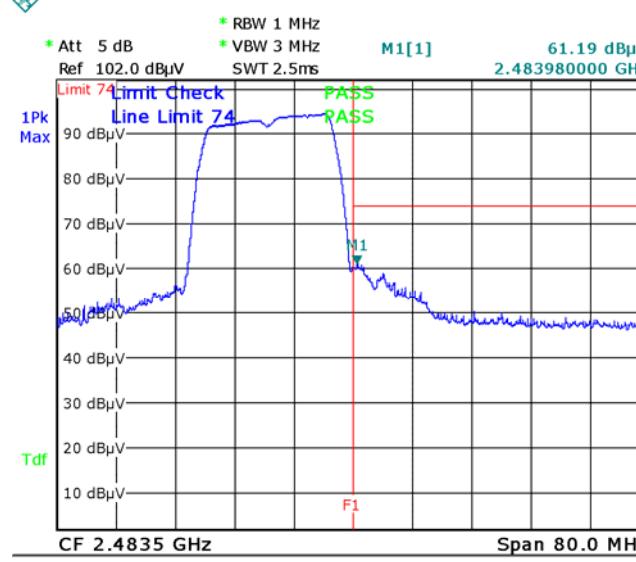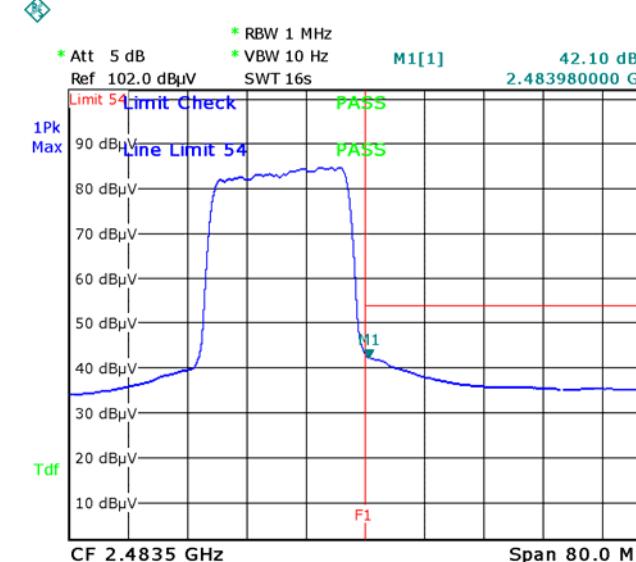 <p>Test Report No. 15050054-FCC-R3</p> <p>Page 29 of 55</p> <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M1[1] 51.16 dBμV 2.399300000 GHz</p> <p>1Pk Max</p> <p>Limit Check Line Limit 74</p> <p>PASS M2[1] 47.77 dBμV 2.389360000 GHz</p> <p>Tdf</p> <p>CF 2.39 GHz Span 80.0 MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M1[1] 61.19 dBμV 2.483980000 GHz</p> <p>1Pk Max</p> <p>Limit 74 Limit Check Line Limit 74</p> <p>PASS M1 42.10 dBμV 2.483980000 GHz</p> <p>Tdf</p> <p>CF 2.4835 GHz Span 80.0 MHz</p>
<p>Date: 26.NOV.2015 09:57:26</p> <p>Band Edge, Left Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 21.DEC.2015 13:06:28</p> <p>Band Edge, Right Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBμV SWT 16s</p> <p>M1[1] 42.10 dBμV 2.483980000 GHz</p> <p>1Pk Max</p> <p>Limit 54 Limit Check</p> <p>PASS M1 42.10 dBμV 2.483980000 GHz</p> <p>Tdf</p> <p>CF 2.4835 GHz Span 80.0 MHz</p>
<p>Band Edge, Left Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>

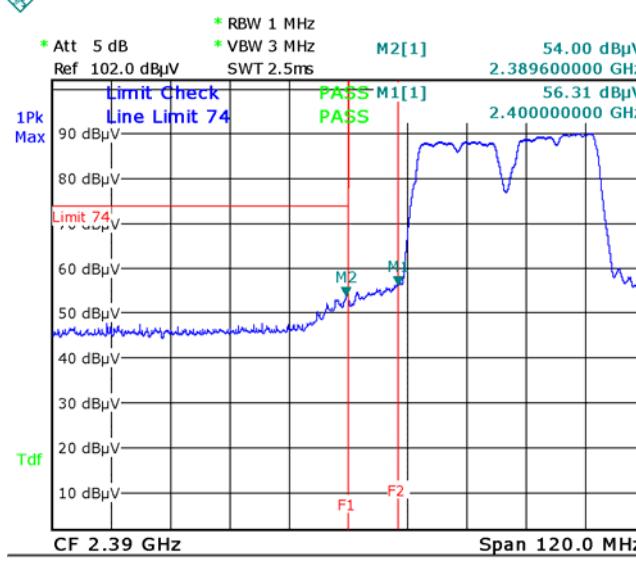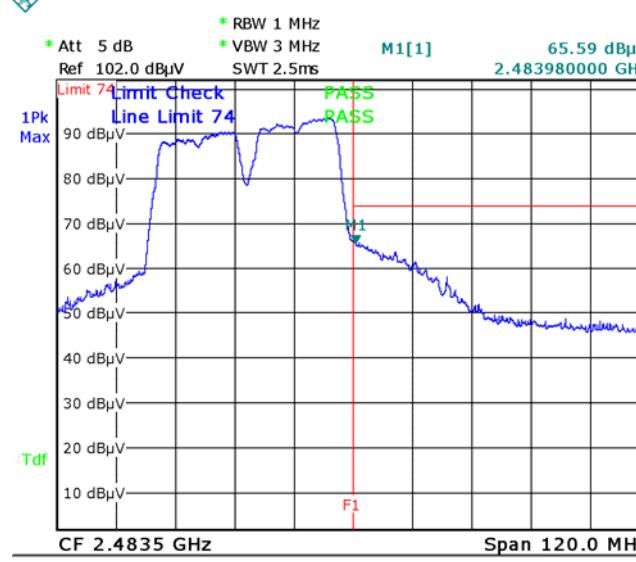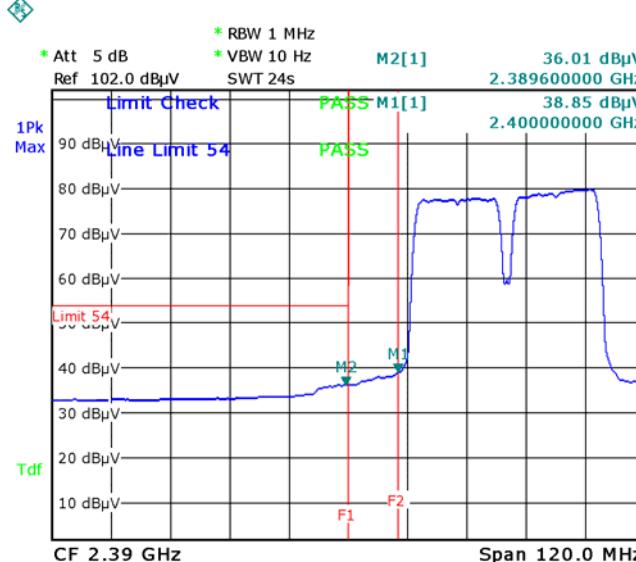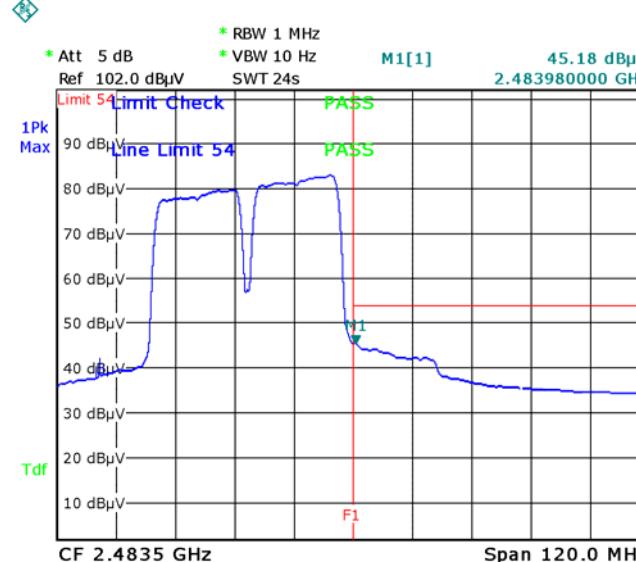 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M2[1] 54.00 dBμV 2.389600000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf 56.31 dBμV 2.400000000 GHz</p> <p>PASS M1[1] M2 M1 F1 F2</p> <p>CF 2.39 GHz Span 120.0 MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBμV SWT 2.5ms</p> <p>M1[1] 65.59 dBμV 2.483980000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf 74 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>PASS M1 M1 F1</p> <p>CF 2.4835 GHz Span 120.0 MHz</p>
<p>Date: 26.NOV.2015 10:00:35</p> <p>Band Edge, Left Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 21.DEC.2015 13:09:44</p> <p>Band Edge, Right Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBμV SWT 24s</p> <p>M2[1] 36.01 dBμV 2.389600000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf 38.85 dBμV 38.000000000 GHz</p> <p>PASS M1[1] M2 M1 F1 F2</p> <p>CF 2.39 GHz Span 120.0 MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBμV SWT 24s</p> <p>M1[1] 45.18 dBμV 2.483980000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Tdf 54 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>PASS M1 M1 F1</p> <p>CF 2.4835 GHz Span 120.0 MHz</p>
<p>Date: 26.NOV.2015 10:01:28</p> <p>Band Edge, Left Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 21.DEC.2015 13:11:24</p> <p>Band Edge, Right Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>

Band Edge measurement result (Conducted measurement)

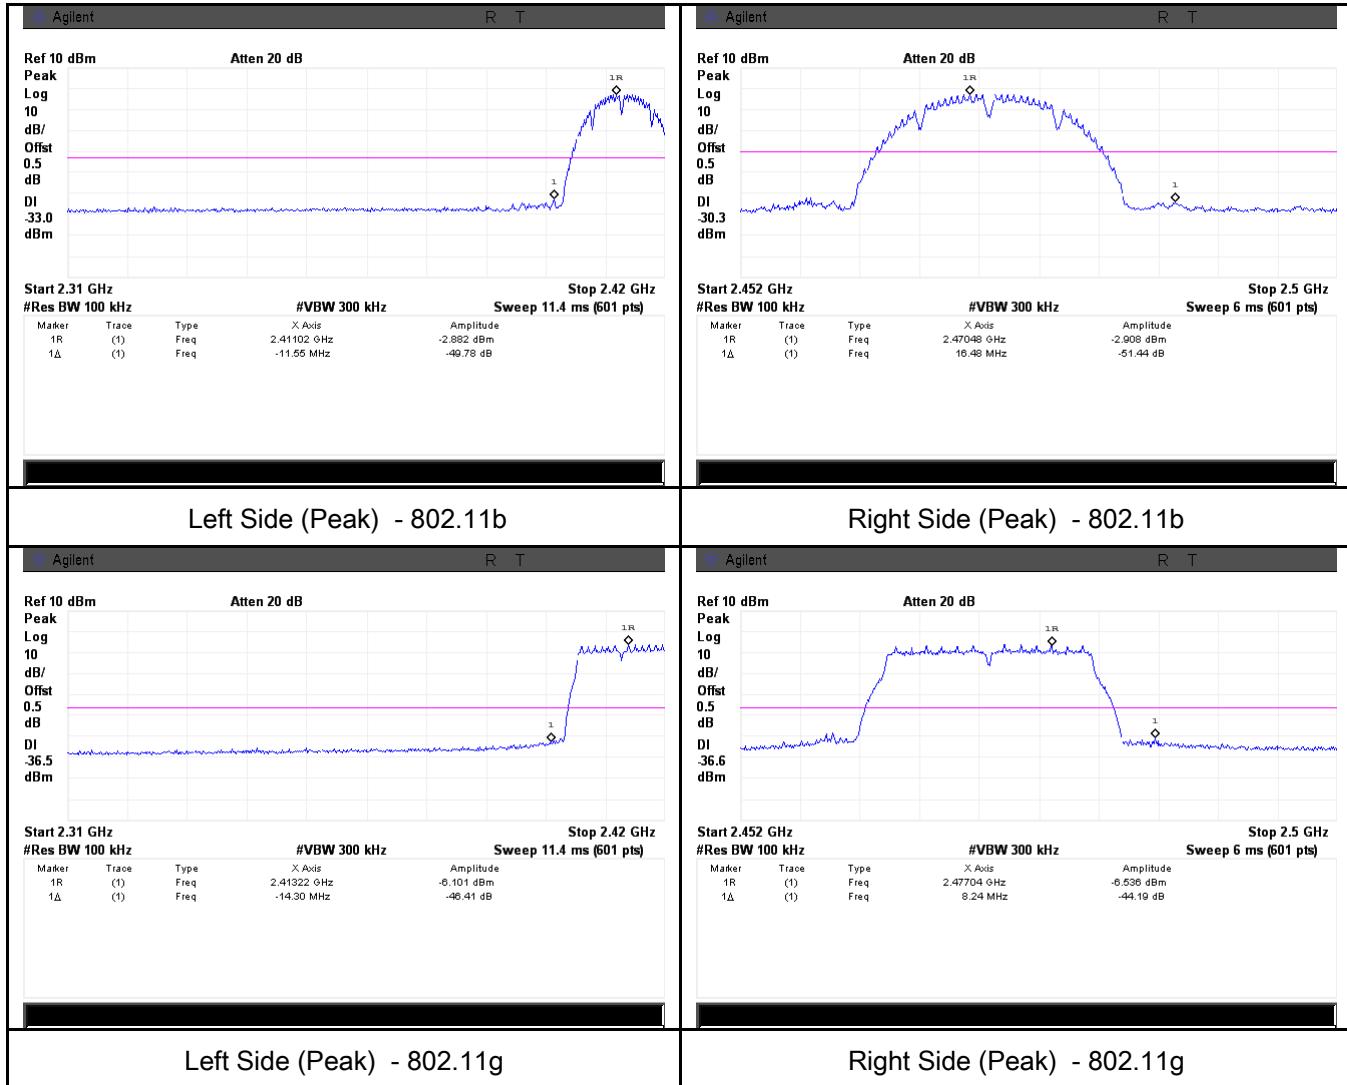


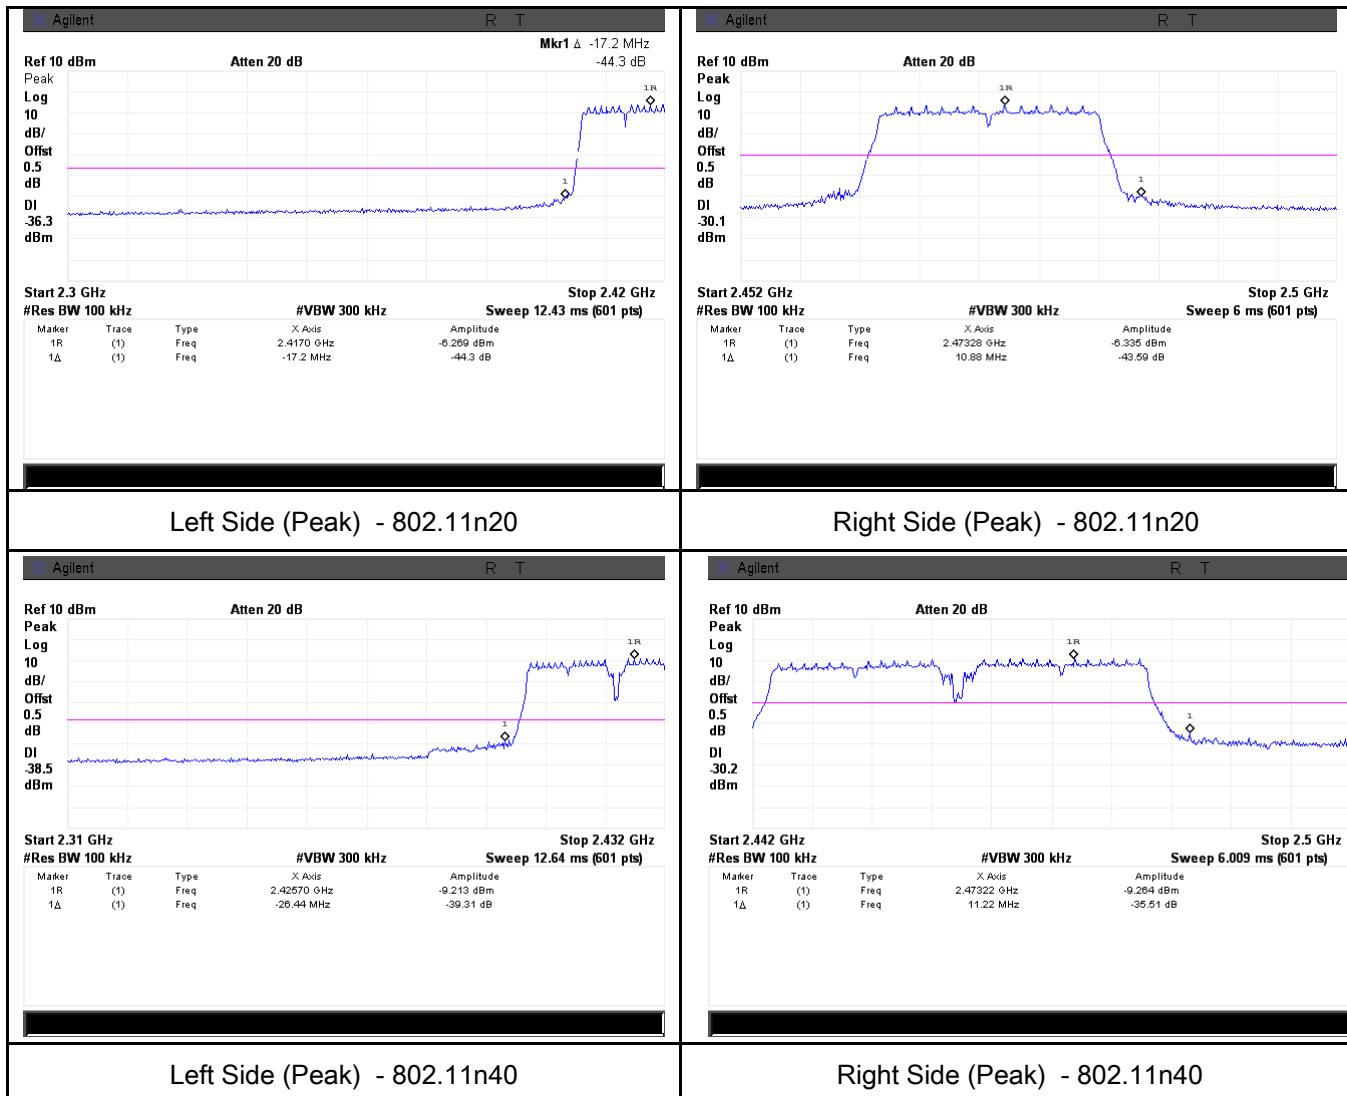

6.6 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	59%
Atmospheric Pressure	1026mbar
Test date :	November 26, 2015
Tested By :	Winnie Zhang

Requirement(s):

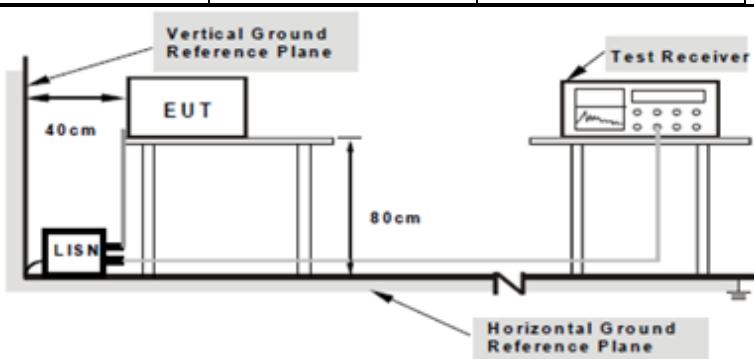
Spec	Item	Requirement	Applicable														
47CFR§15. 207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 																

	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode:	Transmitting Mode
------------	-------------------

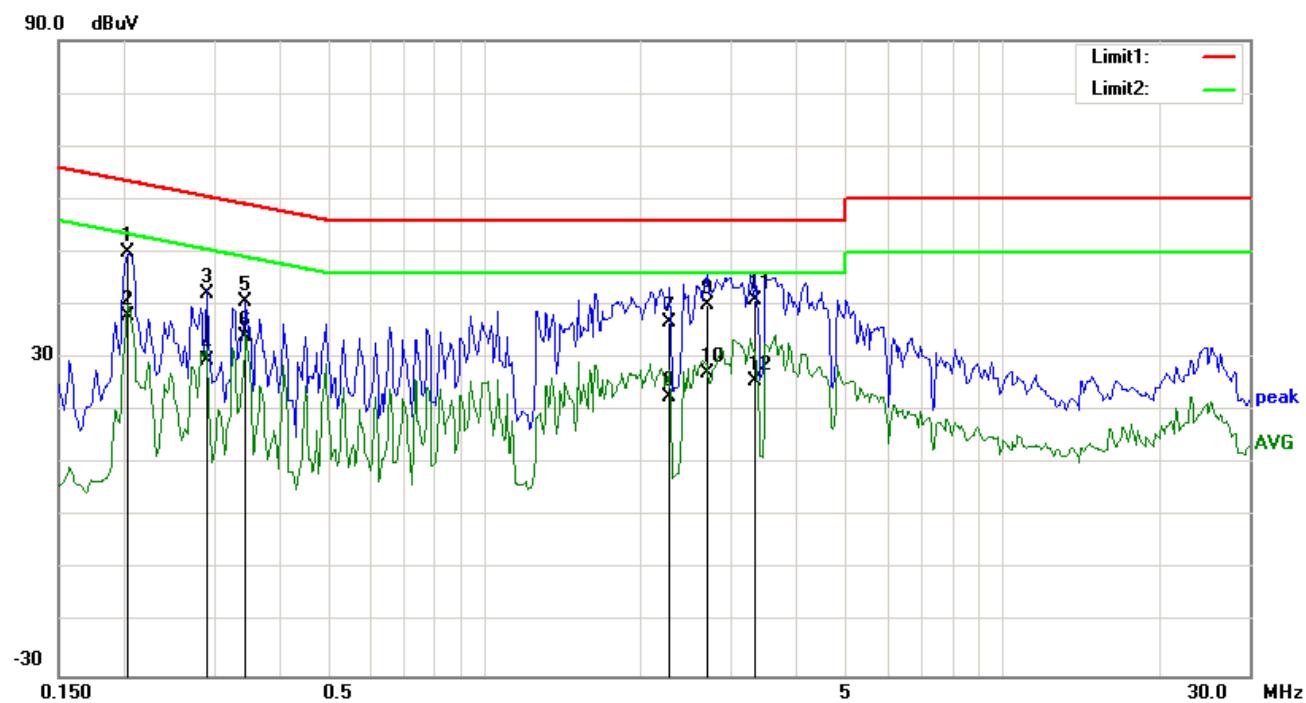


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.2046	39.85	QP	10.03	49.88	63.42	-13.54
2	L1	0.2046	27.99	AVG	10.03	38.02	53.42	-15.40
3	L1	0.2904	32.03	QP	10.03	42.06	60.51	-18.45
4	L1	0.2904	19.61	AVG	10.03	29.64	50.51	-20.87
5	L1	0.3450	30.66	QP	10.03	40.69	59.08	-18.39
6	L1	0.3450	24.07	AVG	10.03	34.10	49.08	-14.98
7	L1	2.2755	26.69	QP	10.05	36.74	56.00	-19.26
8	L1	2.2755	12.48	AVG	10.05	22.53	46.00	-23.47
9	L1	2.6811	30.05	QP	10.05	40.10	56.00	-15.90
10	L1	2.6811	17.01	AVG	10.05	27.06	46.00	-18.94
11	L1	3.3354	30.80	QP	10.06	40.86	56.00	-15.14
12	L1	3.3354	15.58	AVG	10.06	25.64	46.00	-20.36

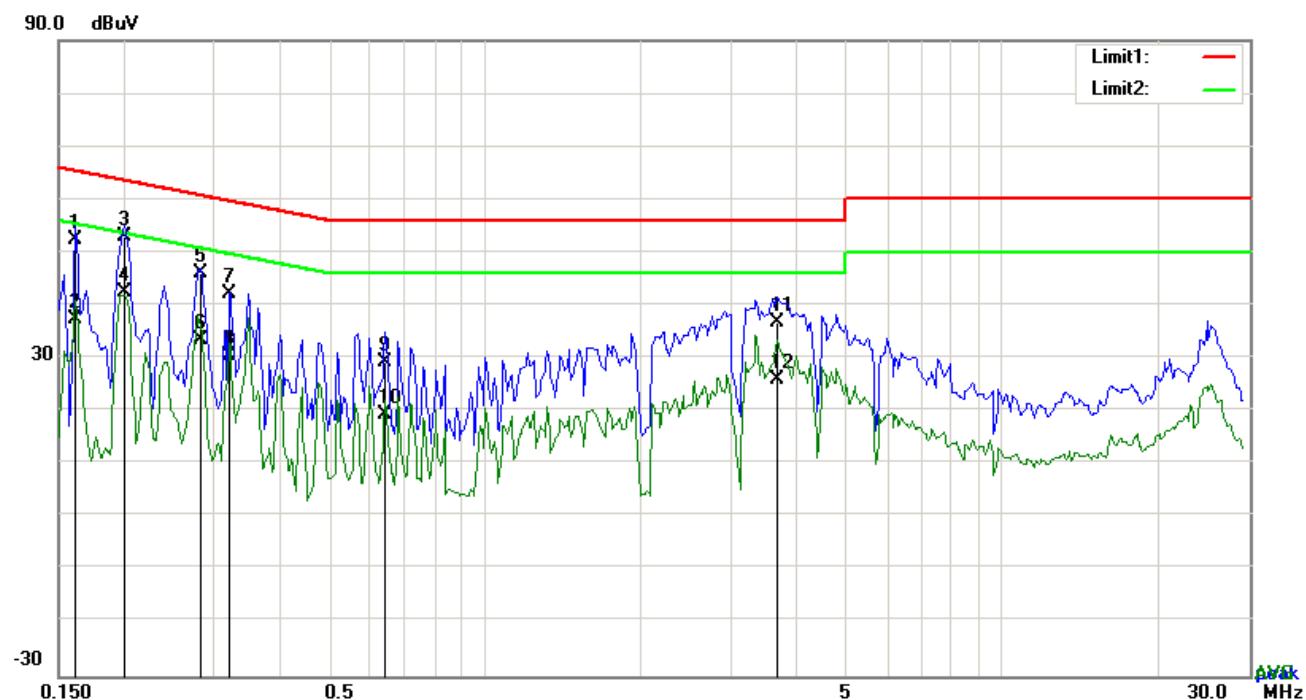Test Mode:
Transmitting Mode

Test Data
Phase Neutral Plot at 120Vac, 60Hz

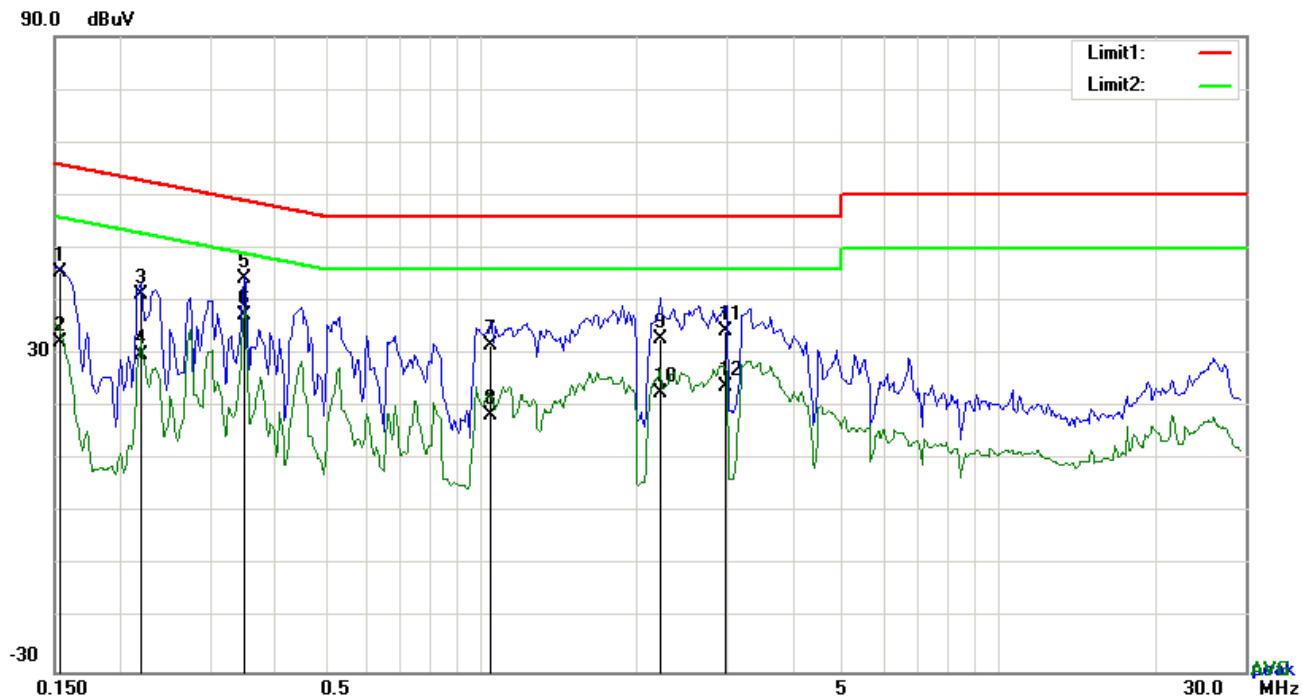No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.1617	42.28	QP	10.02	52.30	65.38	-13.08
2	N	0.1617	27.23	AVG	10.02	37.25	55.38	-18.13
3	N	0.2007	42.79	QP	10.02	52.81	63.58	-10.77
4	N	0.2007	32.40	AVG	10.02	42.42	53.58	-11.16
5	N	0.2826	36.10	QP	10.02	46.12	60.74	-14.62
6	N	0.2826	23.58	AVG	10.02	33.60	50.74	-17.14
7	N	0.3216	32.21	QP	10.02	42.23	59.67	-17.44
8	N	0.3216	20.36	AVG	10.02	30.38	49.67	-19.29
9	N	0.6414	19.38	QP	10.02	29.40	56.00	-26.60
10	N	0.6414	9.34	AVG	10.02	19.36	46.00	-26.64
11	N	3.6630	26.83	QP	10.06	36.89	56.00	-19.11
12	N	3.6630	15.76	AVG	10.06	25.82	46.00	-20.18


Test Mode:
Transmitting Mode


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.1539	35.42	QP	10.03	45.45	65.79	-20.34
2	L1	0.1539	22.18	AVG	10.03	32.21	55.79	-23.58
3	L1	0.2202	31.22	QP	10.03	41.25	62.81	-21.56
4	L1	0.2202	19.71	AVG	10.03	29.74	52.81	-23.07
5	L1	0.3489	34.15	QP	10.03	44.18	58.99	-14.81
6	L1	0.3489	27.47	AVG	10.03	37.50	48.99	-11.49
7	L1	1.0470	21.71	QP	10.03	31.74	56.00	-24.26
8	L1	1.0470	8.47	AVG	10.03	18.50	46.00	-27.50
9	L1	2.2248	22.82	QP	10.05	32.87	56.00	-23.13
10	L1	2.2248	12.56	AVG	10.05	22.61	46.00	-23.39
11	L1	2.9619	24.23	QP	10.05	34.28	56.00	-21.72
12	L1	2.9619	13.67	AVG	10.05	23.72	46.00	-22.28

Test Mode:	Transmitting Mode
------------	-------------------

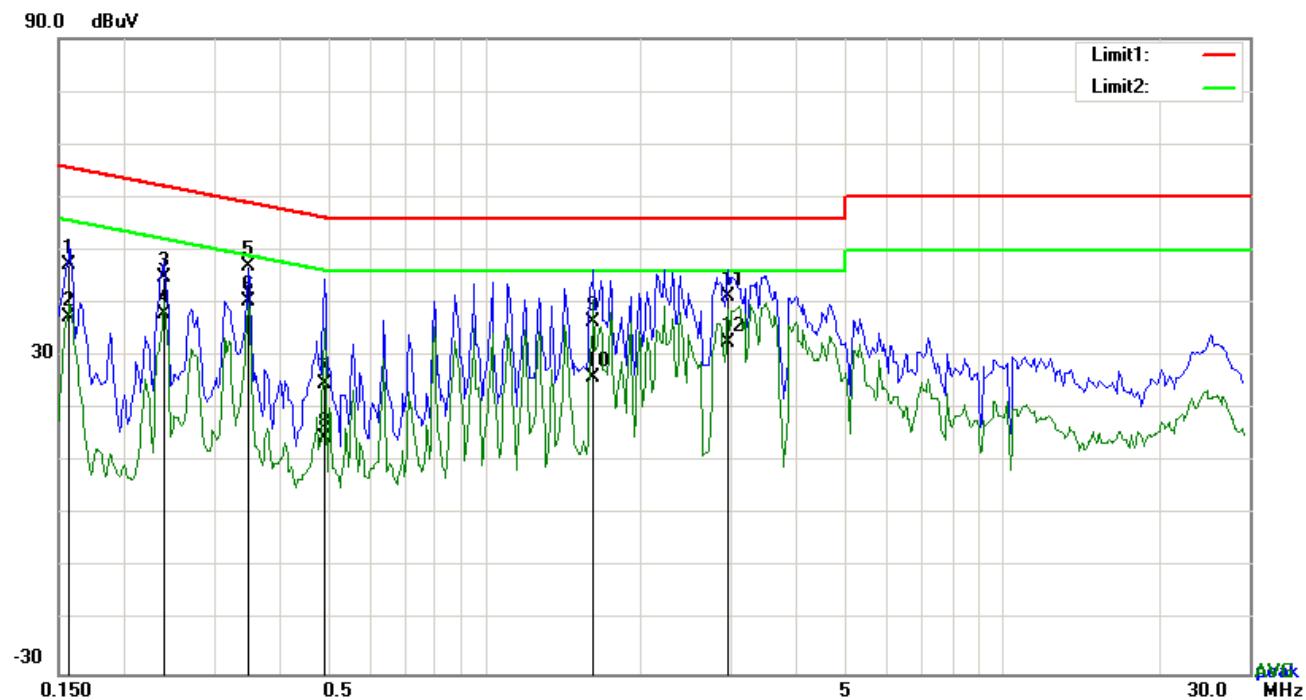

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.1578	37.33	QP	10.02	47.35	65.58	-18.23
2	N	0.1578	27.28	AVG	10.02	37.30	55.58	-18.28
3	N	0.2397	34.98	QP	10.02	45.00	62.11	-17.11
4	N	0.2397	27.85	AVG	10.02	37.87	52.11	-14.24
5	N	0.3489	37.02	QP	10.02	47.04	58.99	-11.95
6	N	0.3489	30.29	AVG	10.02	40.31	48.99	-8.68
7	N	0.4893	14.84	QP	10.02	24.86	56.18	-31.32
8	N	0.4893	4.66	AVG	10.02	14.68	46.18	-31.50
9	N	1.6203	26.55	QP	10.04	36.59	56.00	-19.41
10	N	1.6203	15.82	AVG	10.04	25.86	46.00	-20.14
11	N	2.9463	31.27	QP	10.05	41.32	56.00	-14.68
12	N	2.9463	22.54	AVG	10.05	32.59	46.00	-13.41

6.7 Radiated Emissions

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	November 25, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15. 247(d), RSS210 (A8.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
b)	<p>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required</p> <p><input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down</p>	<input checked="" type="checkbox"/>											
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>											

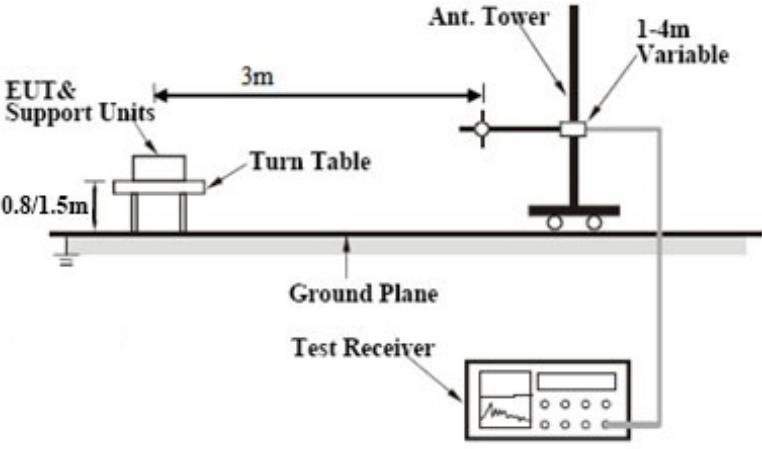
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units assembly is mounted on a Turn Table, which is positioned on a Ground Plane. The Turn Table is 0.8/1.5m from the ground plane. A vertical Ant. Tower is connected to the turn table via a horizontal bar. The tower has a height adjustment mechanism labeled '1-4m Variable'. A Test Receiver is connected to the tower and is shown with a waveform display on its screen.</p>
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	<p>Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2442MHz mode.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

(Below 1GHz)

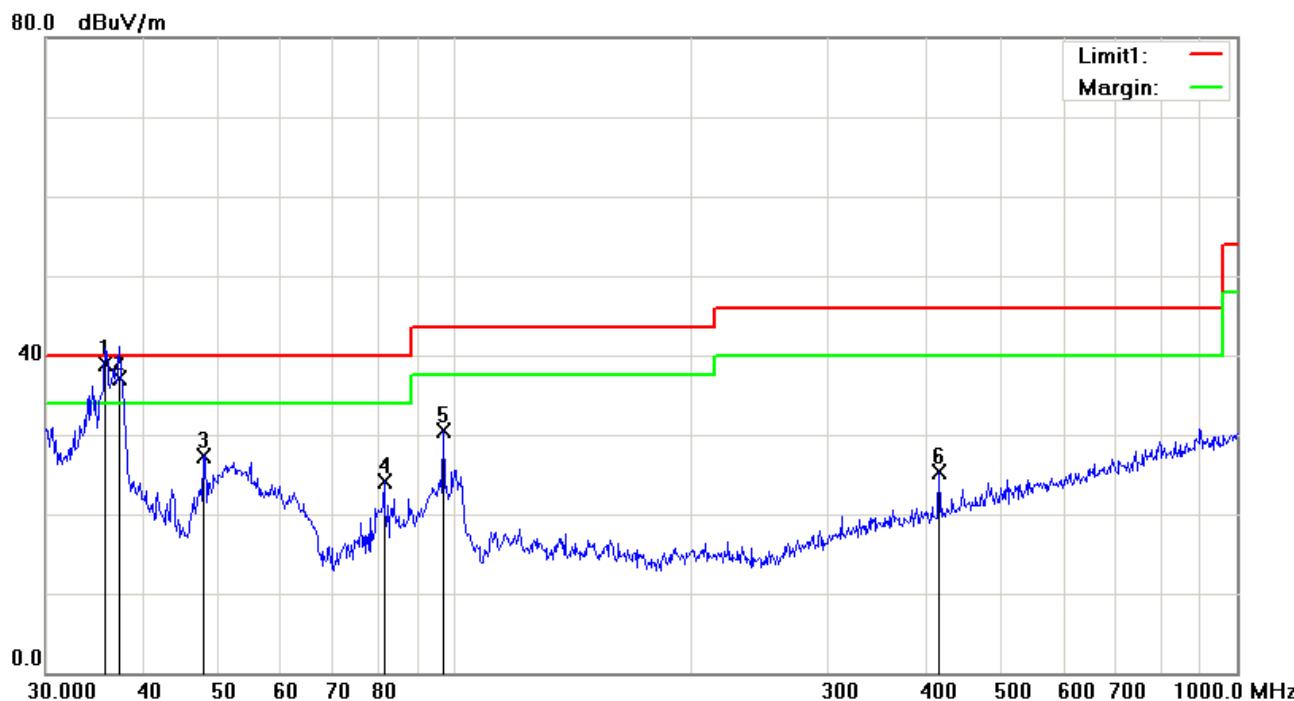


Test Data

Vertical Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Height	Degree
1	V	35.7491	43.39	QP	-4.49	38.90	40.00	-1.10	100	51
2	V	37.2855	42.78	QP	-5.61	37.17	40.00	-2.83	100	153
3	V	47.6586	39.47	peak	-12.13	27.34	40.00	-12.66	100	96
4	V	81.2117	37.84	peak	-13.71	24.13	40.00	-15.87	100	0
5	V	96.7749	42.07	peak	-11.65	30.42	43.50	-13.08	100	66
6	V	416.1791	29.12	peak	-3.91	25.21	46.00	-20.79	100	186

(Below 1GHz)

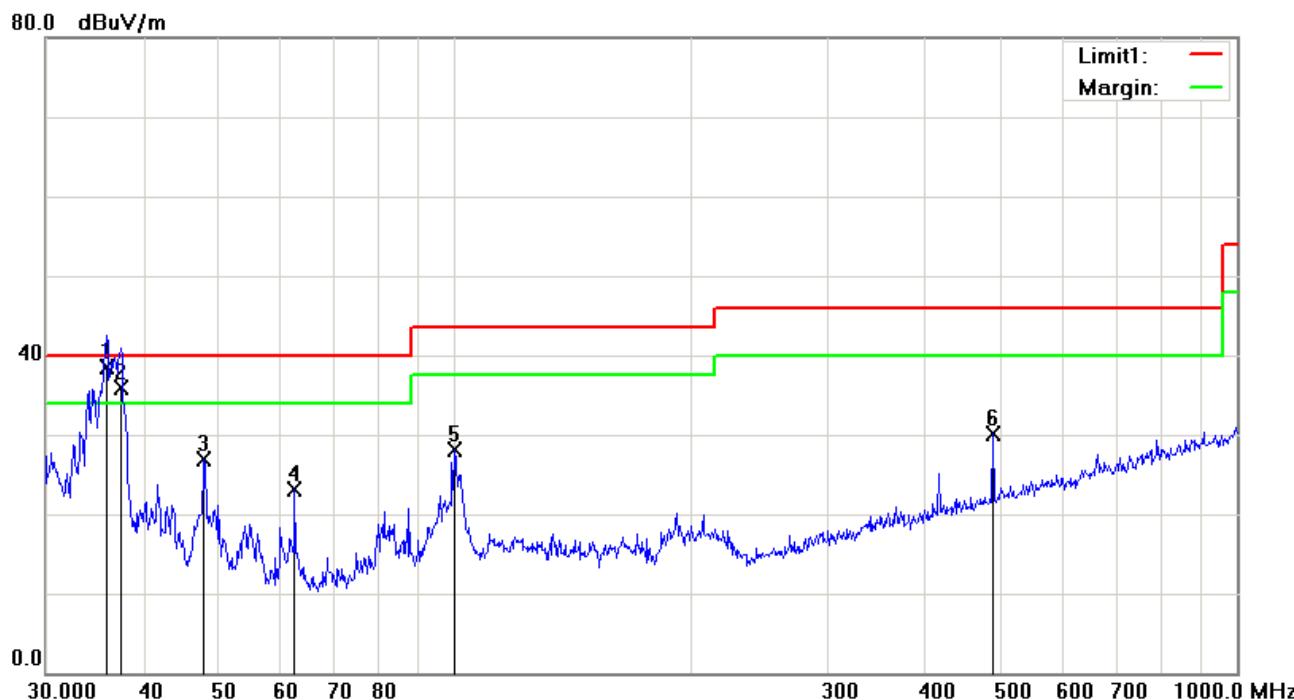

Test Data

Horizontal Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Height	Degree
1	H	35.8747	43.16	QP	-4.58	38.58	40.00	-1.42	100	274
2	H	37.4165	41.52	QP	-5.70	35.82	40.00	-4.18	100	128
3	H	47.8260	39.01	peak	-12.20	26.81	40.00	-13.19	100	349
4	H	62.4314	37.22	peak	-14.17	23.05	40.00	-16.95	100	278
5	H	99.8777	38.90	peak	-10.83	28.07	43.50	-15.43	100	300
6	H	487.3151	32.23	peak	-2.04	30.19	46.00	-15.81	100	72

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel (2412 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824	38.59	AV	V	34	6.86	31.72	47.73	54	-6.27
4824	38.24	AV	H	33.8	6.86	31.72	47.18	54	-6.82
4824	46.92	PK	V	34	6.86	31.72	56.06	74	-17.94
4824	46.75	PK	H	33.8	6.86	31.72	55.69	74	-18.31

Middle Channel (2442 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4884	38.63	AV	V	33.6	6.82	31.82	47.23	54	-6.77
4884	38.27	AV	H	33.8	6.82	31.82	47.07	54	-6.93
4884	46.88	PK	V	33.6	6.82	31.82	55.48	74	-18.52
4884	46.71	PK	H	33.8	6.82	31.82	55.51	74	-18.49

High Channel (2472 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4944	38.61	AV	V	34.6	6.76	31.92	48.05	54	-5.95
4944	38.19	AV	H	34.7	6.76	31.92	47.73	54	-6.27
4944	46.85	PK	V	34.6	6.76	31.92	56.29	74	-17.71
4944	46.68	PK	H	34.7	6.76	31.92	56.22	74	-17.78

Note:

- 1, The testing has been conformed to 10*2472MHz=24,720MHz
- 2, All other emissions more than 30 dB below the limit

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/23/2016	<input checked="" type="checkbox"/>

Annex B. EUT and Test Setup Photographs

Annex B.i. Photograph: EUT External Photo







EUT - Top View



EUT - Bottom View

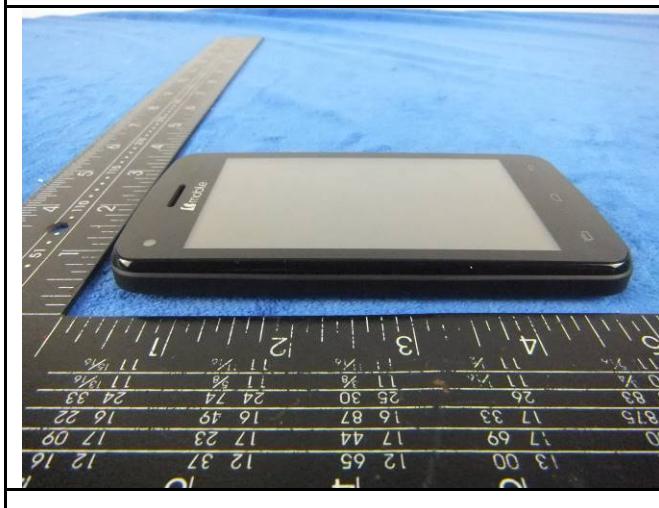


EUT - Left View

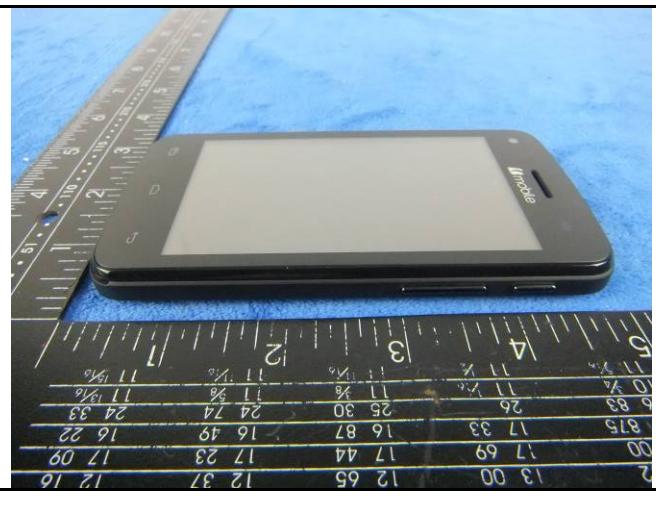


EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



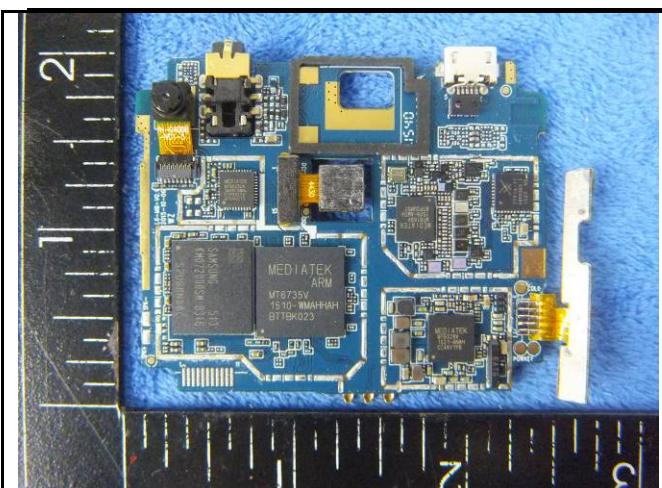

Mainboard without shielding - Front View

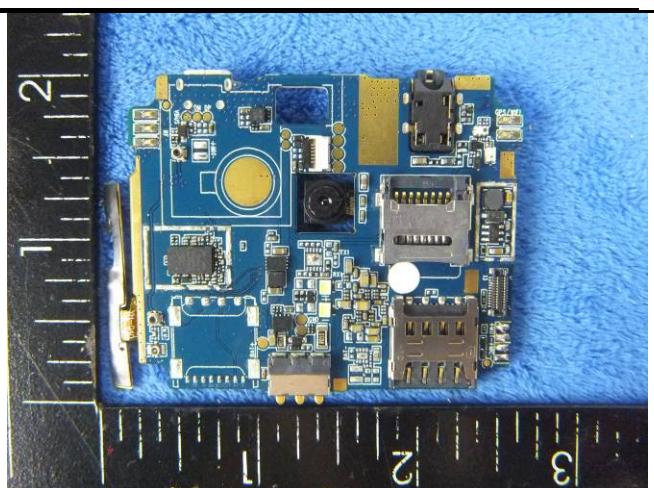

Mainboard without Shielding - Rear View




LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD/LTE - Antenna View

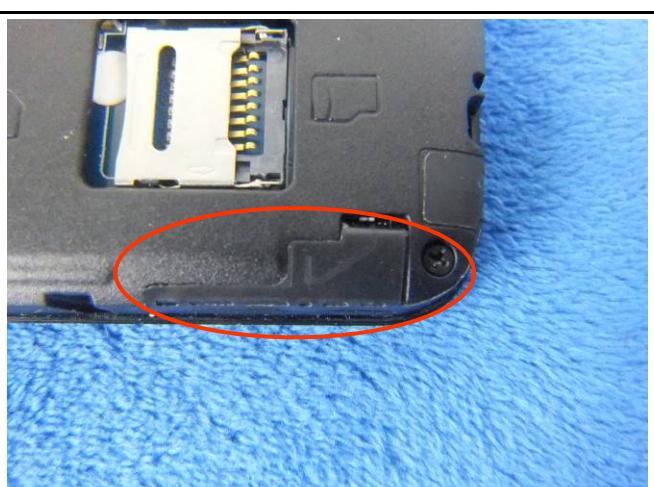

WIFI/BT/BLE/GPS - Antenna View


Annex B.iii. Photograph: Test Setup Photo




Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

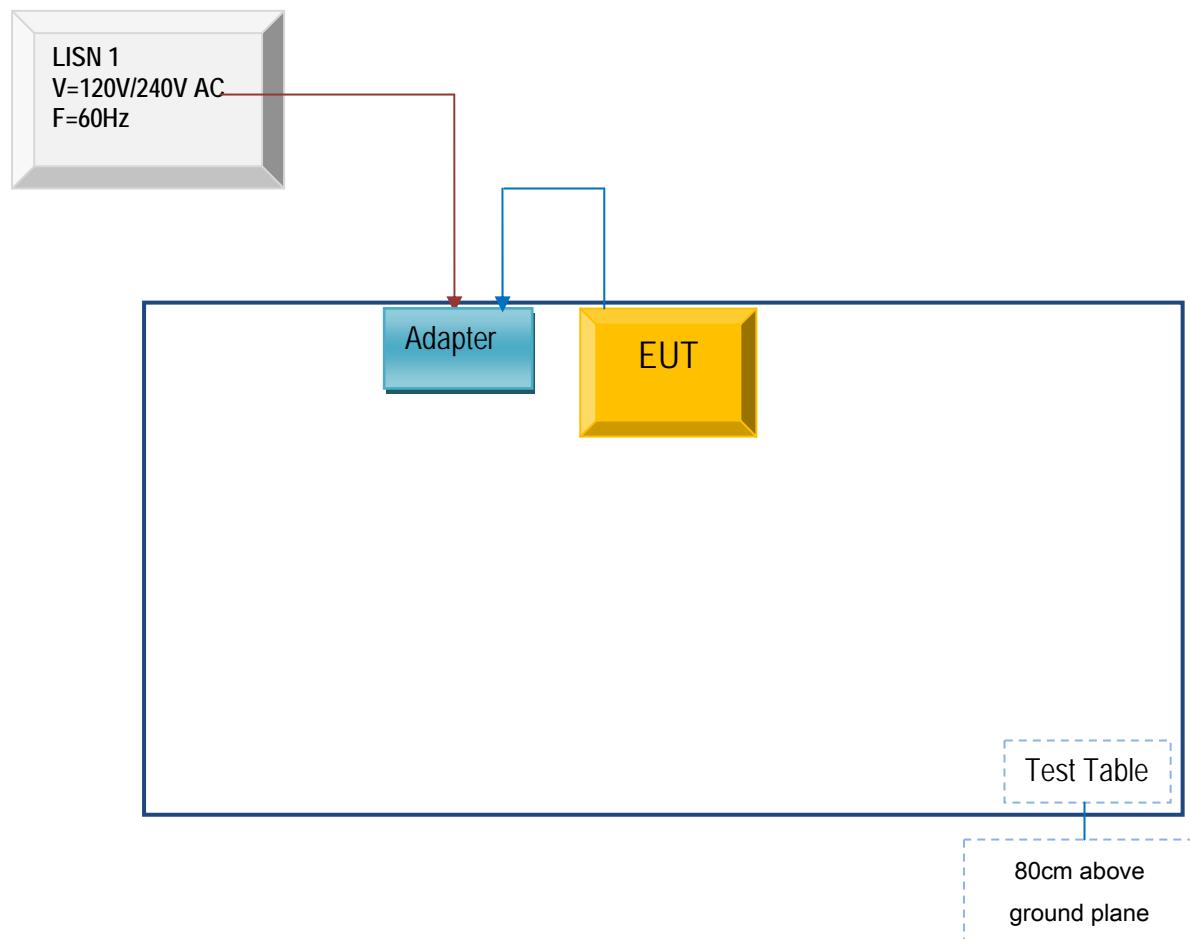

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

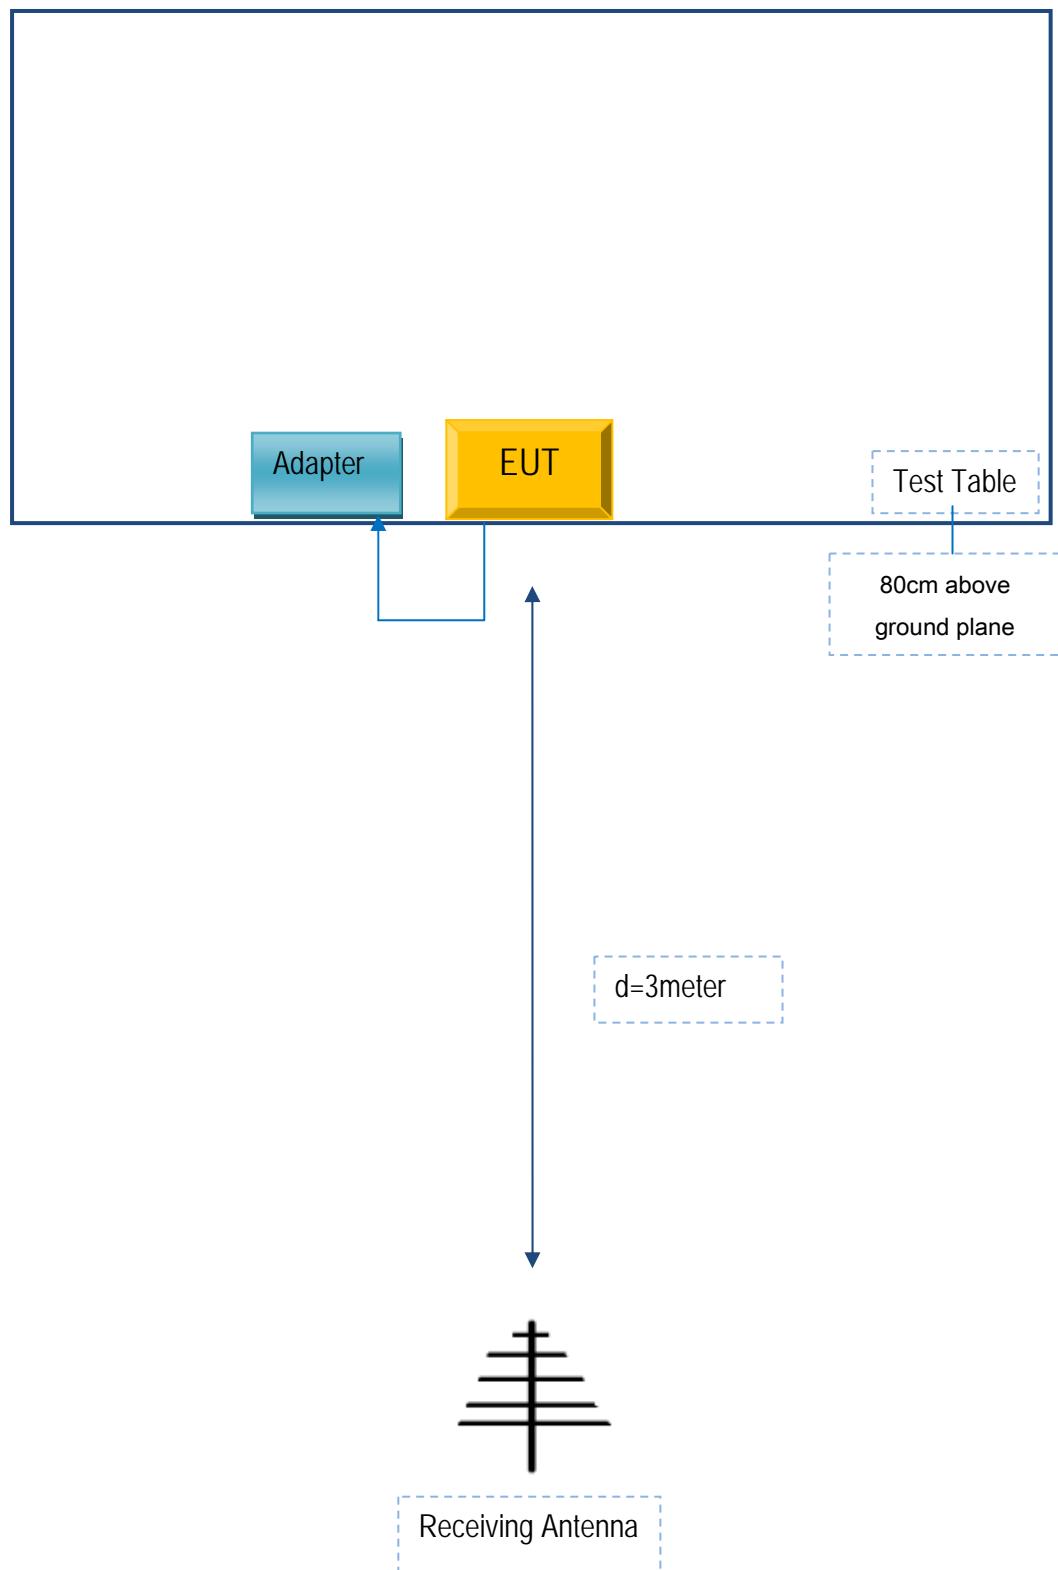

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

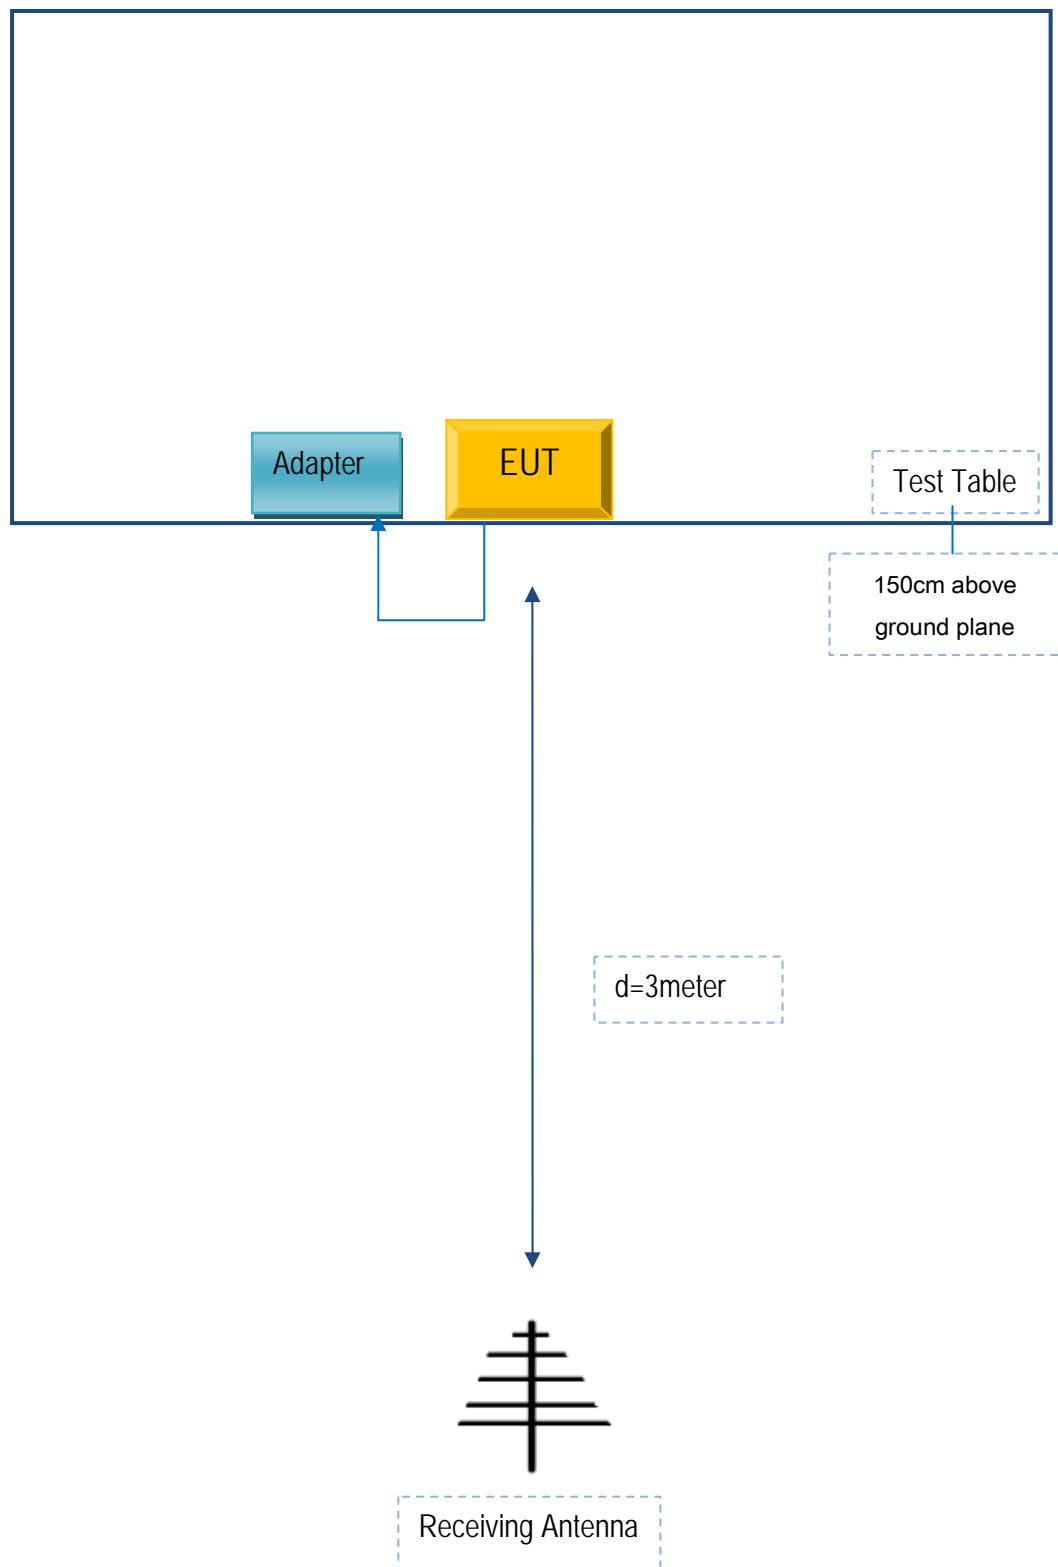

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Serial No
b mobile HK Limited	Adapter	N/A	CX12503647

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	KH13054266

Test Report No.	15050054-FCC-R3
Page	54 of 55

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

b Mobile HK Limited

To SIEMIC Inc
775 Montague Expressway
Milpitas, CA 95035.

Statement

We, b Mobile HK limited apply a multiple-listing certification for the below models.

Product Name: Mobile phone

Model number: AX1010/AX1005

FCC ID: ZSW-30-021

We hereby state that these models are identical in interior structure, electrical circuits and components, and just model name is different for the marketing requirement.


Your assistance on this matter is highly appreciated.

Sincerely,

Name: KA SHING LAM

Title: Director

Signature:

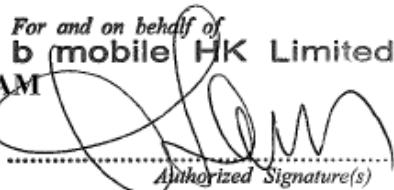For and on behalf of
b mobile HK Limited

Authorized Signature(s)