

FCC Test Report

Product Name	TABLET PC
Model No.	T70C
FCC ID.	ZWMT70C

Applicant	Ubiqconn Technology, Inc.
Address	No. 300 Yang Guang St., NeiHu, Taipei, Taiwan 114

Date of Receipt	Mar. 13, 2013
Issued Date	Apr. 29, 2013
Report No.	133279R-RFUSP43V01
Report Version	V1.0



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: Apr. 29, 2013

Report No.: 133279R-RFUSP43V01



Product Name	TABLET PC
Applicant	Ubiqconn Technology, Inc.
Address	No. 300 Yang Guang St., NeiHu, Taipei, Taiwan 114
Manufacturer	Ubiqconn Technology, Inc.
Model No.	T70C
FCC ID.	ZWMT70C
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	Ubiqconn, UTI
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.4: 2003, ANSI C63.10: 2009
Test Result	Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :

A handwritten signature in blue ink that reads 'Leven Huang'.

(Senior Adm. Specialist / Leven Huang)

Tested By :

A handwritten signature in blue ink that reads 'Andy Lin'.

(Engineer / Andy Lin)

Approved By :

A handwritten signature in blue ink that reads 'Vincent Lin'.

(Manager / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	8
1.3. Tested System Details.....	9
1.4. Configuration of Tested System	9
1.5. EUT Exercise Software	9
1.6. Test Facility	10
2. CONDUCTED EMISSION	11
2.1. Test Equipment.....	11
2.2. Test Setup	11
2.3. Limits	12
2.4. Test Procedure	12
2.5. Uncertainty	12
2.6. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	17
3.1. Test Equipment.....	17
3.2. Test Setup	17
3.3. Limit	17
3.4. Test Procedure	17
3.5. Uncertainty	17
3.6. Test Result of Peak Power Output.....	18
4. RADIATED EMISSION	21
4.1. Test Equipment.....	21
4.2. Test Setup	21
4.3. Limits	22
4.4. Test Procedure	23
4.5. Uncertainty	23
4.6. Test Result of Radiated Emission.....	24
5. RF ANTENNA CONDUCTED TEST	36
5.1. Test Equipment.....	36
5.2. Test Setup	36
5.3. Limits	36
5.4. Test Procedure	36
5.5. Uncertainty	36
5.6. Test Result of RF Antenna Conducted Test.....	37
6. BAND EDGE	55
6.1. Test Equipment.....	55
6.2. Test Setup	56
6.3. Limit	57
6.4. Test Procedure	57
6.5. Uncertainty	57
6.6. Test Result of Band Edge	58
7. CHANNEL NUMBER.....	70
7.1. Test Equipment.....	70
7.2. Test Setup	70
7.3. Limit	70
7.4. Test Procedure	70
7.5. Uncertainty	70
7.6. Test Result of Channel Number	71
8. CHANNEL SEPARATION.....	73
8.1. Test Equipment.....	73
8.2. Test Setup	73
8.3. Limit	73
8.4. Test Procedure	73
8.5. Uncertainty	73
8.6. Test Result of Channel Separation	74
9. DWELL TIME.....	78
9.1. Test Equipment.....	78

9.2.	Test Setup	78
9.3.	Limit	78
9.4.	Test Procedure	78
9.5.	Uncertainty	78
9.6.	Test Result of Dwell Time	79
10.	OCCUPIED BANDWIDTH (20DB BW).....	83
10.1.	Test Equipment.....	83
10.2.	Test Setup	83
10.3.	Limits	83
10.4.	Test Procedure	83
10.5.	Uncertainty	83
10.6.	Test Result of Occupied Bandwidth	84
11.	OCCUPIED BANDWIDTH (6DB BW).....	90
11.1.	Test Equipment.....	90
11.2.	Test Setup	90
11.3.	Limits	90
11.4.	Test Procedure	90
11.5.	Uncertainty	90
11.6.	Test Result of Occupied Bandwidth	91
12.	POWER DENSITY	94
12.1.	Test Equipment.....	94
12.2.	Test Setup	94
12.3.	Limits	94
12.4.	Test Procedure	94
12.5.	Uncertainty	94
12.6.	Test Result of Power Density	95
13.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	98

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	TABLET PC
Trade Name	Ubiqconn,UTI
Model No.	T70C
FCC ID.	ZWMT70C
Frequency Range	2402 – 2480MHz
Channel Number	V3.0+HS, V2.1+EDR: 79CH V4.0: 40CH
Type of Modulation	V3.0+HS, V2.1+EDR: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps) V4.0: GFSK(1Mbps)
Antenna Type	Printed on PCB
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Adapter	MFR: FSP, M/N: FSP065-RAB Input: AC 100-240V, 50-60Hz, 1.5A Output: DC 19V, 3.42A Cable out: Non-Shielded, 1.5m, with one ferrite core bonded.
Power Cable	Non-Shielded, 1.7m
Contain Module	CastleNet / BSLIM2-A10

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	CastleNet	N/A	Printed on PCB	1dBi For 2.4GHz

Note: The antenna of EUT is conform to FCC 15.203.

Center Frequency of Each Channel: (For V3.0+HS, V2.1+EDR)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Center Frequency of Each Channel: (For V4.0)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. This device is a TABLET PC, Contains functions and so on WLAN、Bluetooth, This report for Bluetooth.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 3Mbps (8DPSK) Mode 3: Transmit - BLE (GFSK)
-----------	--

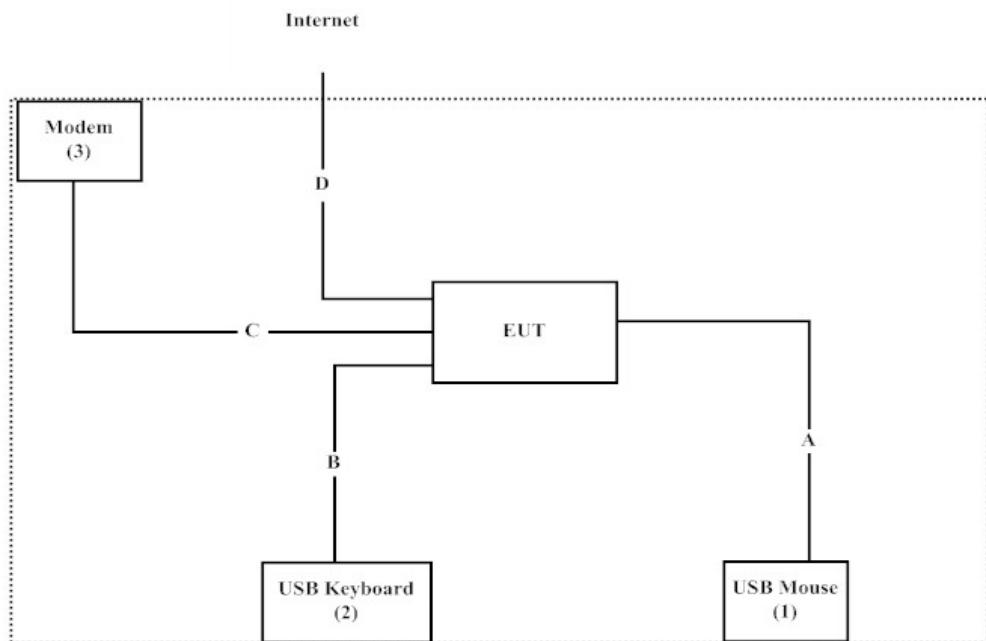
1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
(1) USB Mouse	DELL	MO56UOA	G0Y02ES8	N/A
(2) USB Keyboard	Logitech	Y-UR83	SY853UK	N/A
(3) Modem	ACEEX	DM-1414	0102027533	Non-Shielded, 1.8m

Signal Cable Type		Signal cable Description
A	USB Mouse Cable	Non-Shielded, 1.8m
B	USB Keyboard Cable	Non-Shielded, 1.8m
C	Modem Cable	Non-Shielded, 1.5m
D	LAN Cable	Non-Shielded, 1.8m

1.4. Configuration of Tested System



1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute program “Bluesuite v2.5” on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded

from QuieTek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site:
<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Accreditation on NVLAP
NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2012	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2013	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2013	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2013	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2013	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

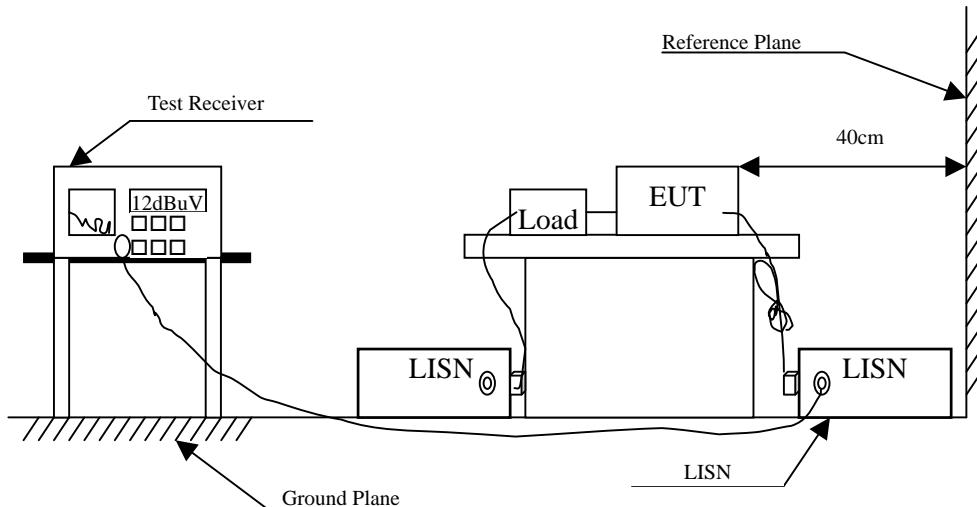2.2. Test Setup



2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 1					
Quasi-Peak					
0.205	9.790	32.350	42.140	-22.289	64.429
0.318	9.790	25.450	35.240	-25.960	61.200
0.630	9.790	34.170	43.960	-12.040	56.000
1.400	9.800	28.420	38.220	-17.780	56.000
2.580	9.810	24.940	34.750	-21.250	56.000
14.529	10.074	28.480	38.554	-21.446	60.000
Average					
0.205	9.790	23.900	33.690	-20.739	54.429
0.318	9.790	16.500	26.290	-24.910	51.200
0.630	9.790	25.020	34.810	-11.190	46.000
1.400	9.800	16.370	26.170	-19.830	46.000
2.580	9.810	13.640	23.450	-22.550	46.000
14.529	10.074	28.150	38.224	-11.776	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "  " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
LINE 2					
Quasi-Peak					
0.212	9.770	37.320	47.090	-17.139	64.229
0.416	9.770	25.840	35.610	-22.790	58.400
0.638	9.770	37.740	47.510	-8.490	56.000
1.361	9.780	29.720	39.500	-16.500	56.000
2.115	9.790	28.230	38.020	-17.980	56.000
13.580	10.107	31.400	41.507	-18.493	60.000
Average					
0.212	9.770	26.160	35.930	-18.299	54.229
0.416	9.770	15.500	25.270	-23.130	48.400
0.638	9.770	26.790	36.560	-9.440	46.000
1.361	9.780	14.630	24.410	-21.590	46.000
2.115	9.790	13.760	23.550	-22.450	46.000
13.580	10.107	30.890	40.997	-9.003	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " █ " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2440MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
LINE 1					
Quasi-Peak					
0.205	9.790	32.370	42.160	-22.269	64.429
0.314	9.790	25.340	35.130	-26.184	61.314
0.634	9.790	34.400	44.190	-11.810	56.000
1.396	9.800	28.440	38.240	-17.760	56.000
2.127	9.810	25.300	35.110	-20.890	56.000
14.529	10.074	28.980	39.054	-20.946	60.000
Average					
0.205	9.790	23.940	33.730	-20.699	54.429
0.314	9.790	16.830	26.620	-24.694	51.314
0.634	9.790	25.470	35.260	-10.740	46.000
1.396	9.800	17.170	26.970	-19.030	46.000
2.127	9.810	14.290	24.100	-21.900	46.000
14.529	10.074	28.780	38.854	-11.146	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "  " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : TABLET PC
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2440MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
LINE 2					
Quasi-Peak					
0.197	9.770	37.300	47.070	-17.587	64.657
0.302	9.770	27.850	37.620	-24.037	61.657
0.630	9.770	37.350	47.120	-8.880	56.000
1.361	9.780	29.680	39.460	-16.540	56.000
2.435	9.790	27.080	36.870	-19.130	56.000
13.580	10.107	31.580	41.687	-18.313	60.000
Average					
0.197	9.770	23.940	33.710	-20.947	54.657
0.302	9.770	16.440	26.210	-25.447	51.657
0.630	9.770	25.160	34.930	-11.070	46.000
1.361	9.780	14.290	24.070	-21.930	46.000
2.435	9.790	13.980	23.770	-22.230	46.000
13.580	10.107	30.890	40.997	-9.003	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " █ " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Peak Power Output

3.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Power Meter	Anritsu	ML2495A/6K00003357	May, 2012
X Power Sensor	Anritsu	MA2411B/0738448	Jun, 2012

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

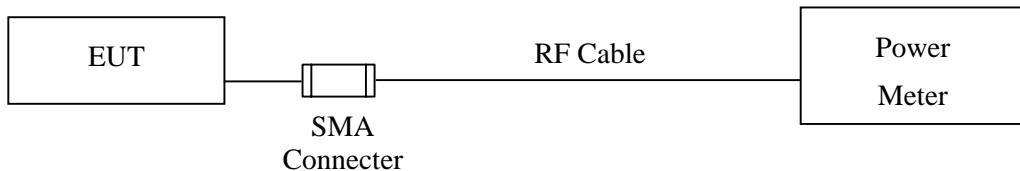3.2. Test Setup



3.3. Limit

The maximum peak power shall be less 1Watt.

3.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 and ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : TABLET PC
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	4.08	1 Watt= 30 dBm	Pass
Channel 39	2441.00	5.61	1 Watt= 30 dBm	Pass
Channel 78	2480.00	4.78	1 Watt= 30 dBm	Pass

Product : TABLET PC
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	2.81	1 Watt= 30 dBm	Pass
Channel 39	2441.00	4.66	1 Watt= 30 dBm	Pass
Channel 78	2480.00	3.71	1 Watt= 30 dBm	Pass

Product : TABLET PC
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	4.15	1 Watt= 30 dBm	Pass
Channel 19	2440.00	5.73	1 Watt= 30 dBm	Pass
Channel 39	2480.00	4.93	1 Watt= 30 dBm	Pass

4. Radiated Emission

4.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2012
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2012
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2012
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2012
	X	Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2013
	X	Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

4.2. Test Setup

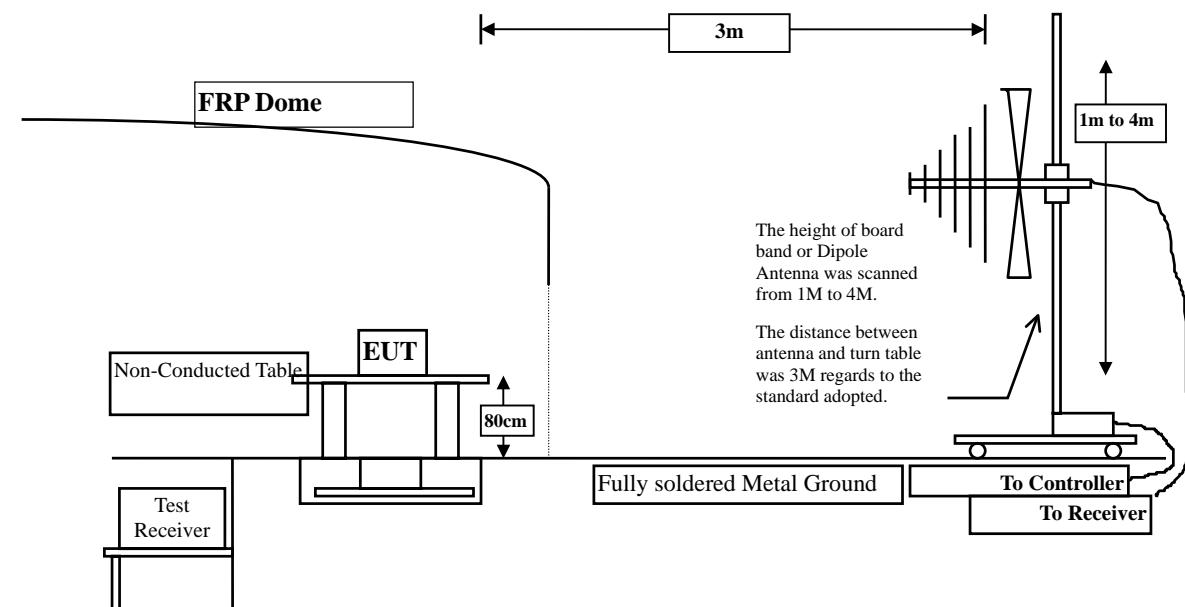Below 1GHz



Above 1GHz

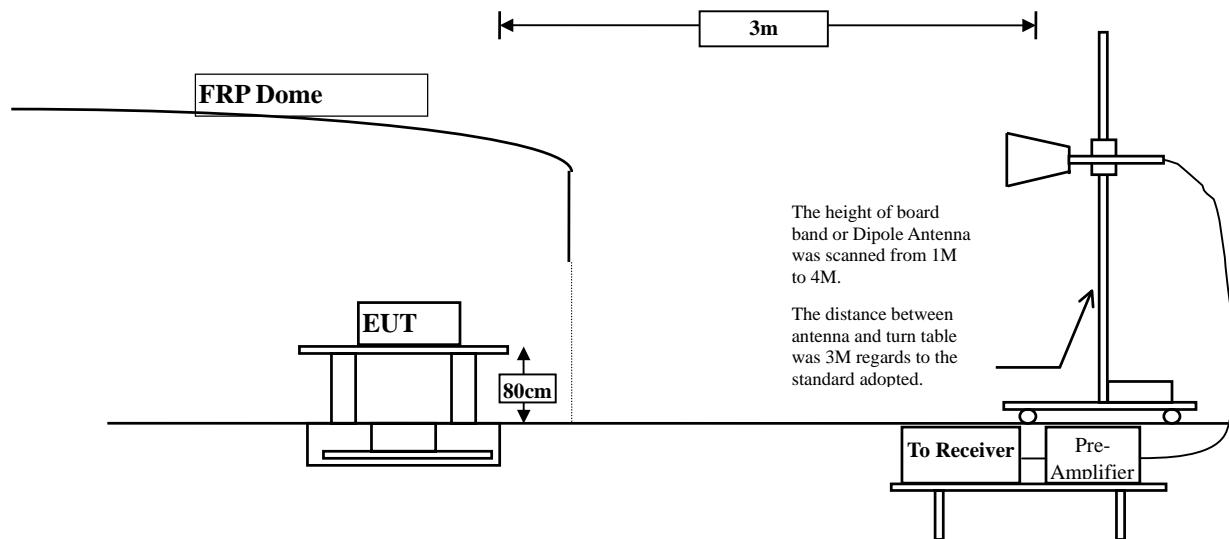

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks:

1. RF Voltage (dBuV) = $20 \log_{10}$ RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to FHSS test procedure of FCC Public Notice DA 00-705 and ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range from 30MHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4804.000	3.327	43.970	47.297	-26.703	74.000
7206.000	10.136	37.460	47.596	-26.404	74.000
9608.000	13.706	36.830	50.536	-23.464	74.000
Average					
Detector:					
--					
Vertical					
Peak Detector:					
4804.000	6.638	42.390	49.027	-24.973	74.000
7206.000	11.005	37.520	48.525	-25.475	74.000
9608.000	14.103	37.020	51.123	-22.877	74.000
Average					
Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4882.000	3.001	40.540	43.541	-30.459	74.000
7323.000	11.846	36.100	47.947	-26.053	74.000
9764.000	12.563	38.330	50.893	-23.107	74.000

Average

Detector:

--

Vertical

Peak Detector:

4882.000	5.713	38.960	44.674	-29.326	74.000
7323.000	12.727	36.950	49.678	-24.322	74.000
9764.000	13.028	38.100	51.128	-22.872	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4960.000	2.760	44.980	47.740	-26.260	74.000
7440.000	12.567	35.720	48.286	-25.714	74.000
9920.000	13.456	38.090	51.546	-22.454	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	5.557	43.660	49.217	-24.783	74.000
7440.000	13.426	35.630	49.055	-24.945	74.000
9920.000	13.958	37.900	51.858	-22.142	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4804.000	3.327	41.840	45.167	-28.833	74.000
7206.000	10.136	37.910	48.046	-25.954	74.000
9608.000	13.706	37.680	51.386	-22.614	74.000

Average

Detector:

--

Vertical

Peak Detector:

4804.000	6.638	39.470	46.107	-27.893	74.000
7206.000	11.005	37.220	48.225	-25.775	74.000
9608.000	14.103	36.670	50.773	-23.227	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor	Reading Level dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------	------------------------	--------------------------------	--------------	-----------------

Horizontal

Peak Detector:

4882.000	3.001	41.060	44.061	-29.939	74.000
7323.000	11.846	36.970	48.817	-25.183	74.000
9764.000	12.563	37.320	49.883	-24.117	74.000

Average

Detector:

--

Vertical

Peak Detector:

4882.000	5.713	39.960	45.674	-28.326	74.000
7323.000	12.727	36.030	48.758	-25.242	74.000
9764.000	13.028	37.280	50.308	-23.692	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4960.000	2.760	44.520	47.280	-26.720	74.000
7440.000	12.567	35.530	48.096	-25.904	74.000
9920.000	13.456	36.560	50.016	-23.984	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	5.557	43.560	49.117	-24.883	74.000
7440.000	13.426	36.280	49.705	-24.295	74.000
9920.000	13.958	36.720	50.678	-23.322	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2402MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4804.000	3.327	44.290	47.617	-26.383	74.000
7206.000	10.136	38.300	48.436	-25.564	74.000
9608.000	13.706	36.600	50.306	-23.694	74.000

Average

Detector:

--

Vertical

Peak Detector:

4804.000	6.638	42.350	48.987	-25.013	74.000
7206.000	11.005	36.950	47.955	-26.045	74.000
9608.000	14.103	36.680	50.783	-23.217	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2440MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4880.000	3.010	40.400	43.410	-30.590	74.000
7320.000	11.833	36.260	48.094	-25.906	74.000
9760.000	12.580	38.390	50.971	-23.029	74.000

Average

Detector:

--

Vertical

Peak Detector:

4880.000	5.738	38.990	44.728	-29.272	74.000
7320.000	12.703	36.370	49.073	-24.927	74.000
9760.000	13.052	37.540	50.592	-23.408	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK)(2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4960.000	2.760	45.280	48.040	-25.960	74.000
7440.000	12.567	36.020	48.586	-25.414	74.000
9920.000	13.456	38.020	51.476	-22.524	74.000

Average

Detector:

--

Vertical

Peak Detector:

4960.000	5.557	43.370	48.927	-25.073	74.000
7440.000	13.426	36.290	49.715	-24.285	74.000
9920.000	13.958	37.970	51.928	-22.072	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
105.660	-3.862	29.402	25.540	-48.460	74.000
336.520	-3.440	31.785	28.345	-45.655	74.000
431.580	-3.291	33.294	30.003	-43.997	74.000
606.180	-3.084	33.041	29.957	-44.043	74.000
720.640	-2.949	39.002	36.053	-37.947	74.000
961.200	-2.710	40.328	37.618	-36.382	74.000
Vertical					
227.880	-8.519	28.032	19.514	-26.486	46.000
373.380	-2.373	28.749	26.376	-19.624	46.000
528.580	-0.462	29.329	28.867	-17.133	46.000
623.640	-2.631	31.731	29.100	-16.900	46.000
817.640	3.272	27.903	31.175	-14.825	46.000
961.200	7.260	31.111	38.371	-15.629	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
103.720	-6.751	33.624	26.872	-16.628	43.500
239.520	-6.851	29.391	22.541	-23.459	46.000
431.580	-2.099	32.011	29.912	-16.088	46.000
573.200	2.537	26.764	29.301	-16.699	46.000
745.860	3.308	27.359	30.667	-15.333	46.000
912.700	6.132	26.953	33.085	-12.915	46.000
Vertical					
57.160	-4.403	27.549	23.146	-16.854	40.000
161.920	-6.696	29.884	23.189	-20.311	43.500
386.960	-3.064	29.633	26.569	-19.431	46.000
623.640	-2.631	32.656	30.025	-15.975	46.000
817.640	3.272	28.057	31.329	-14.671	46.000
912.700	1.762	27.251	29.013	-16.987	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : TABLET PC
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2440MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
171.620	-10.242	31.220	20.978	-22.522	43.500
336.520	-3.860	30.401	26.541	-19.459	46.000
458.740	0.833	28.029	28.862	-17.138	46.000
600.360	3.977	24.706	28.683	-17.317	46.000
745.860	3.308	27.904	31.212	-14.788	46.000
912.700	6.132	27.207	33.339	-12.661	46.000
Vertical					
163.860	-7.204	29.893	22.689	-20.811	43.500
299.660	-6.855	27.412	20.557	-25.443	46.000
431.580	-9.509	33.731	24.222	-21.778	46.000
623.640	-2.631	31.920	29.289	-16.711	46.000
720.640	-0.099	32.840	32.741	-13.259	46.000
817.640	3.272	26.826	30.098	-15.902	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.


5. RF Antenna Conducted Test

5.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.
2. The test instruments Marked "X" are used to measure the final test results.

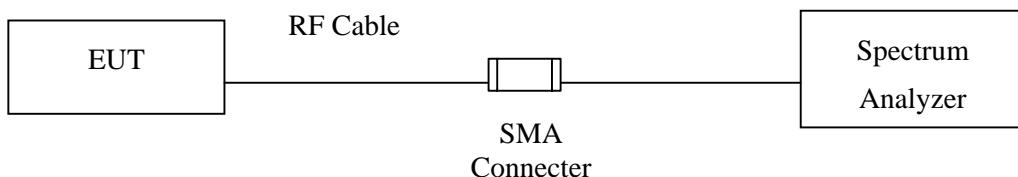5.2. Test Setup



5.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 and ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.


5.5. Uncertainty



± 150Hz

5.6. Test Result of RF Antenna Conducted Test

Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

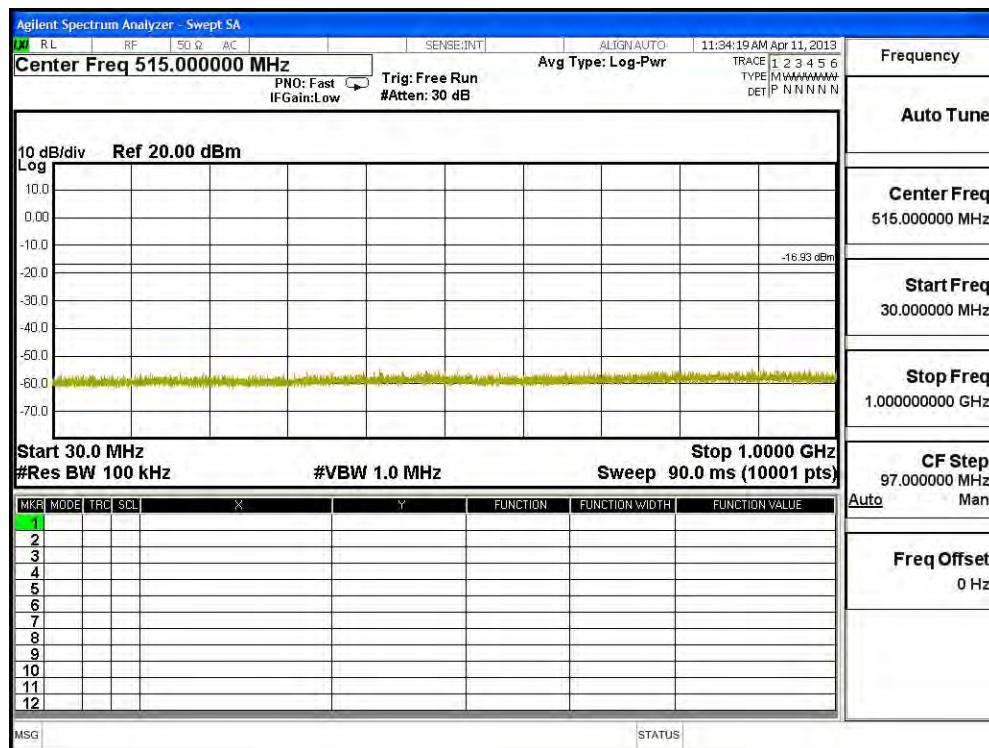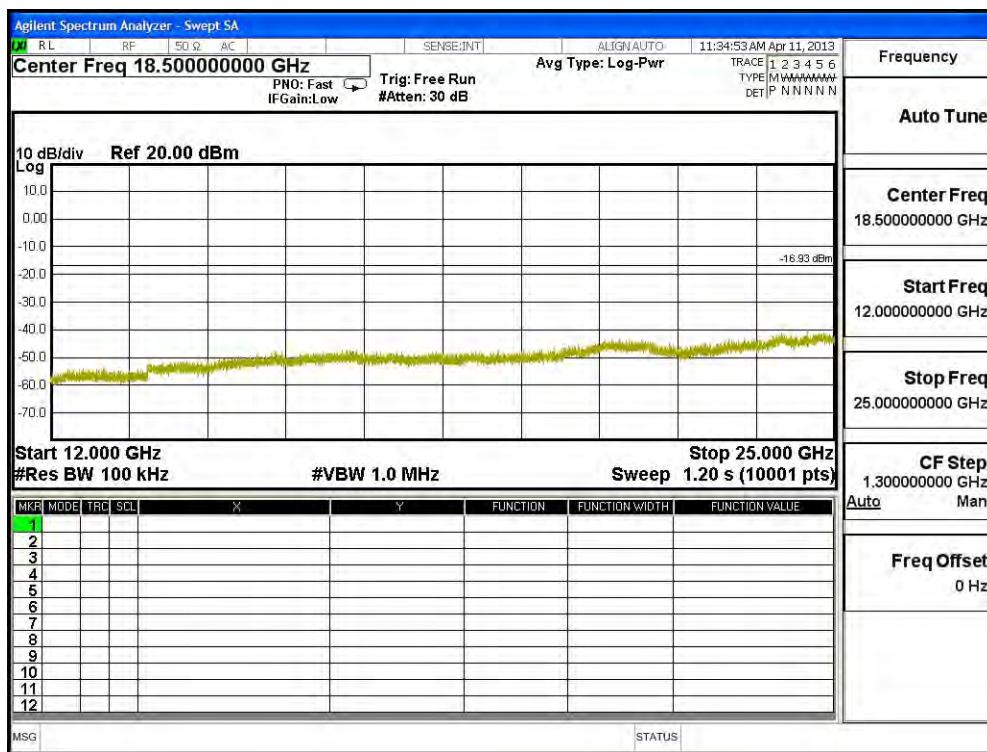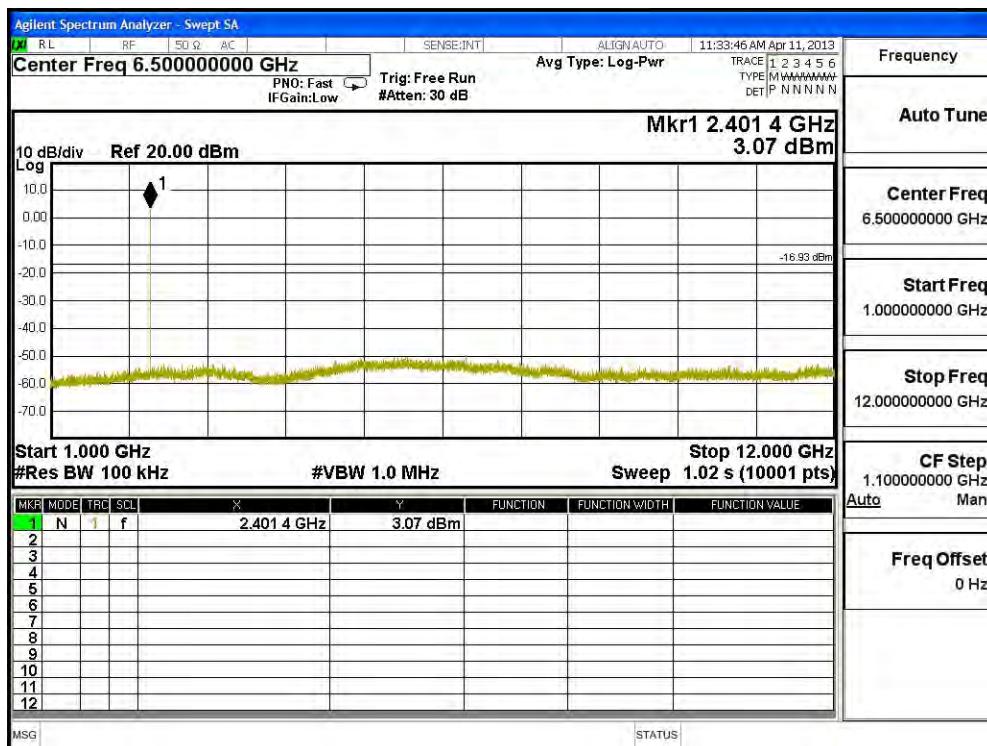
Figure Channel 00:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

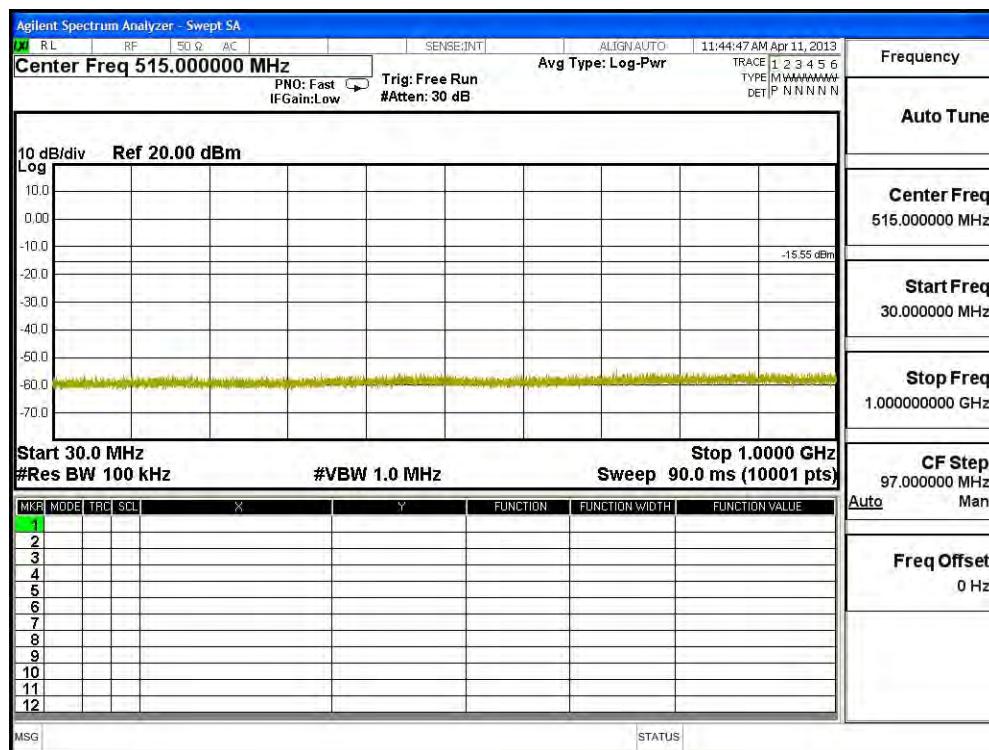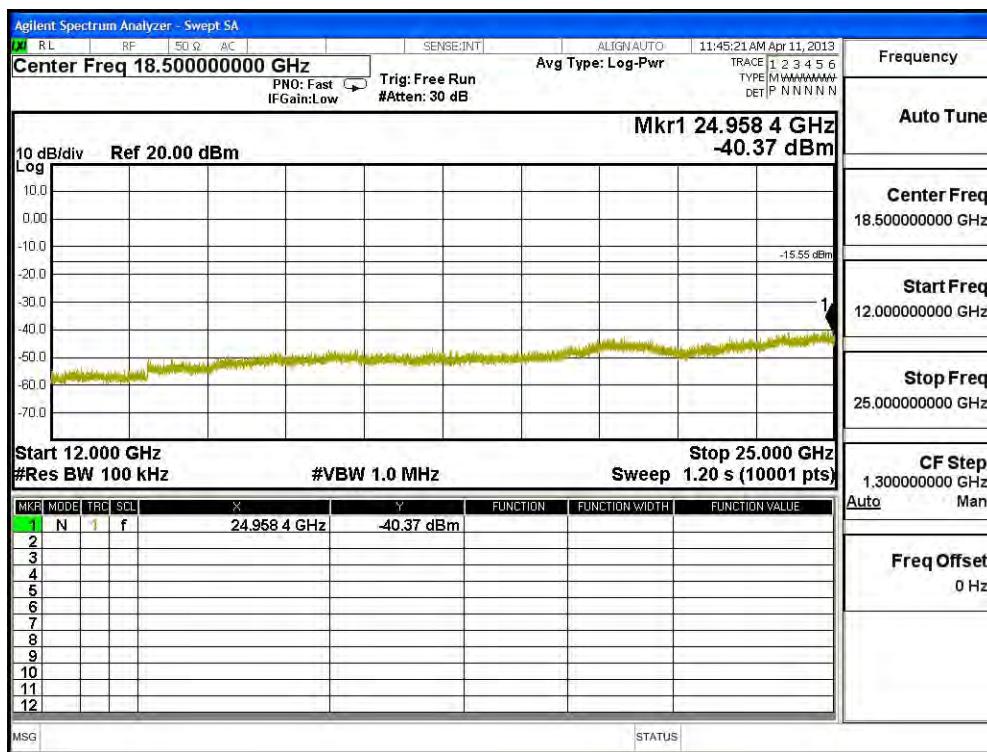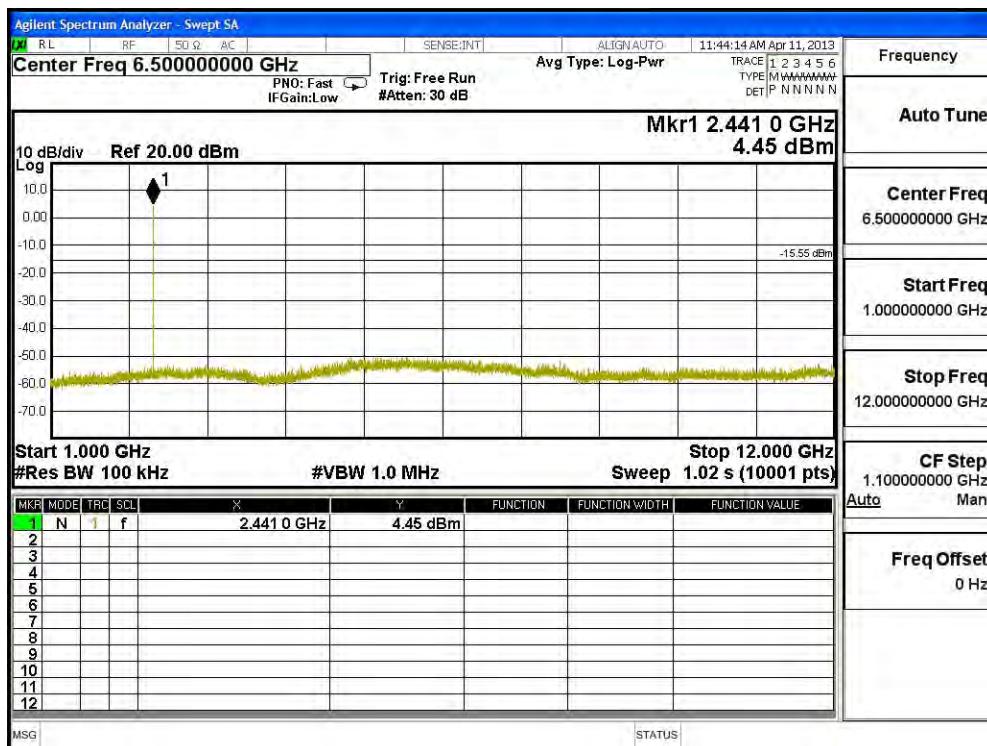
Figure Channel 39:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

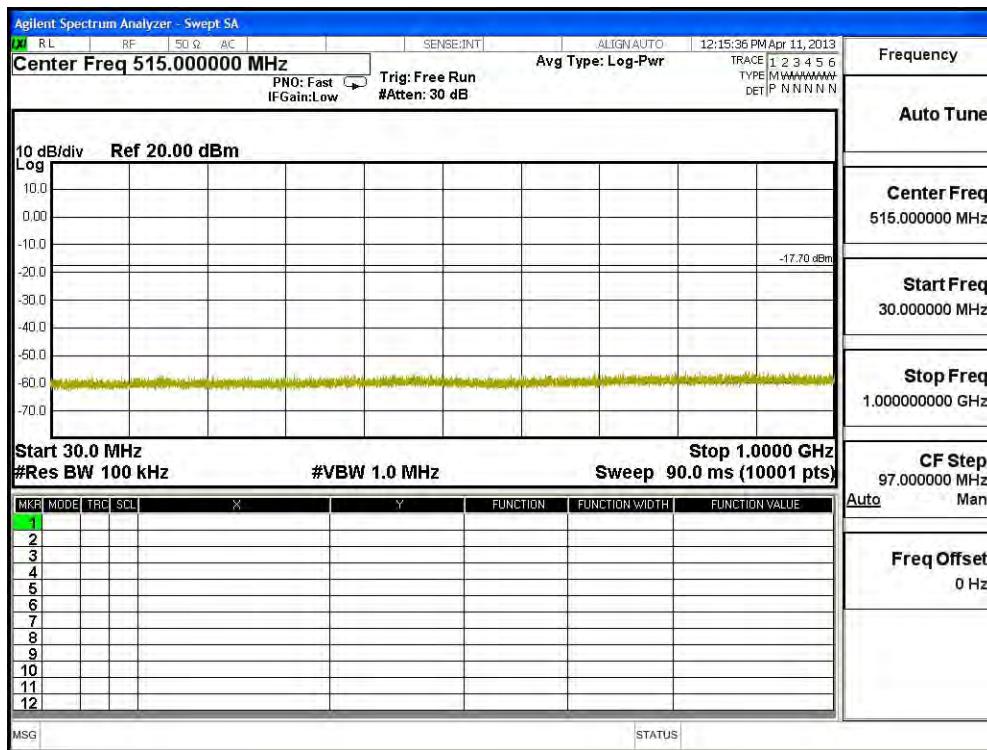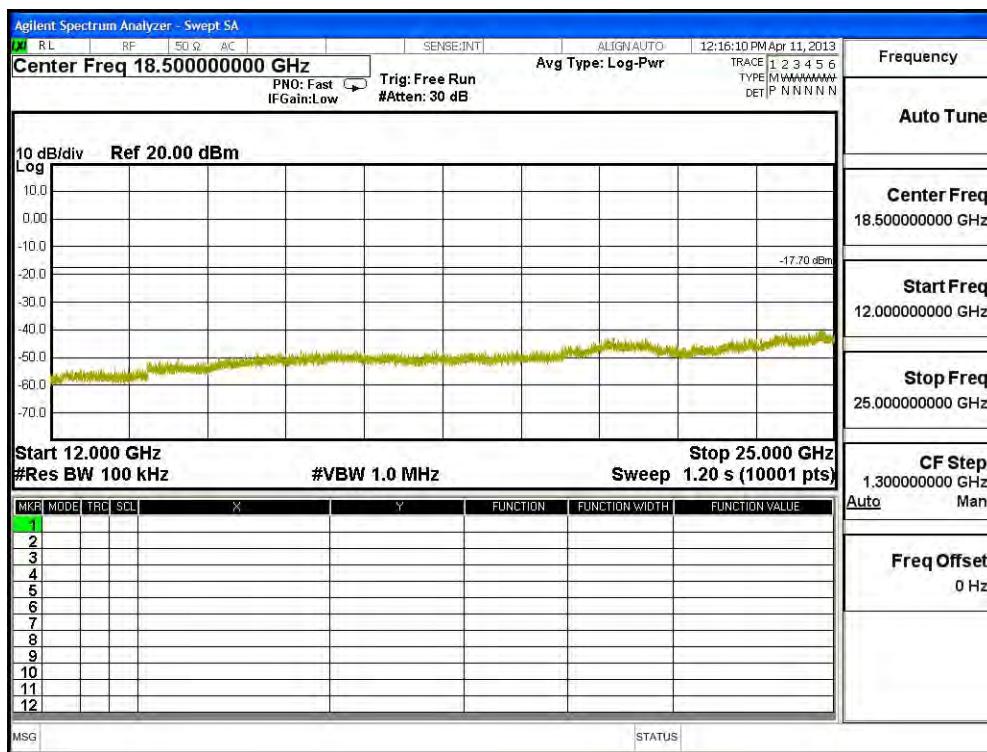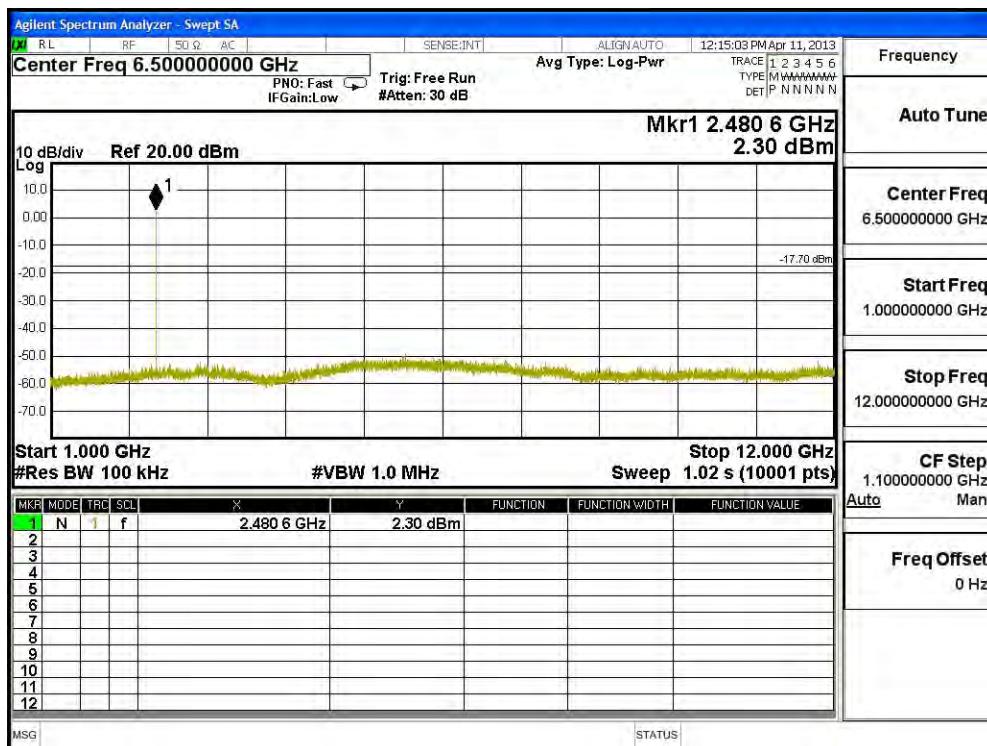
Figure Channel 78:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

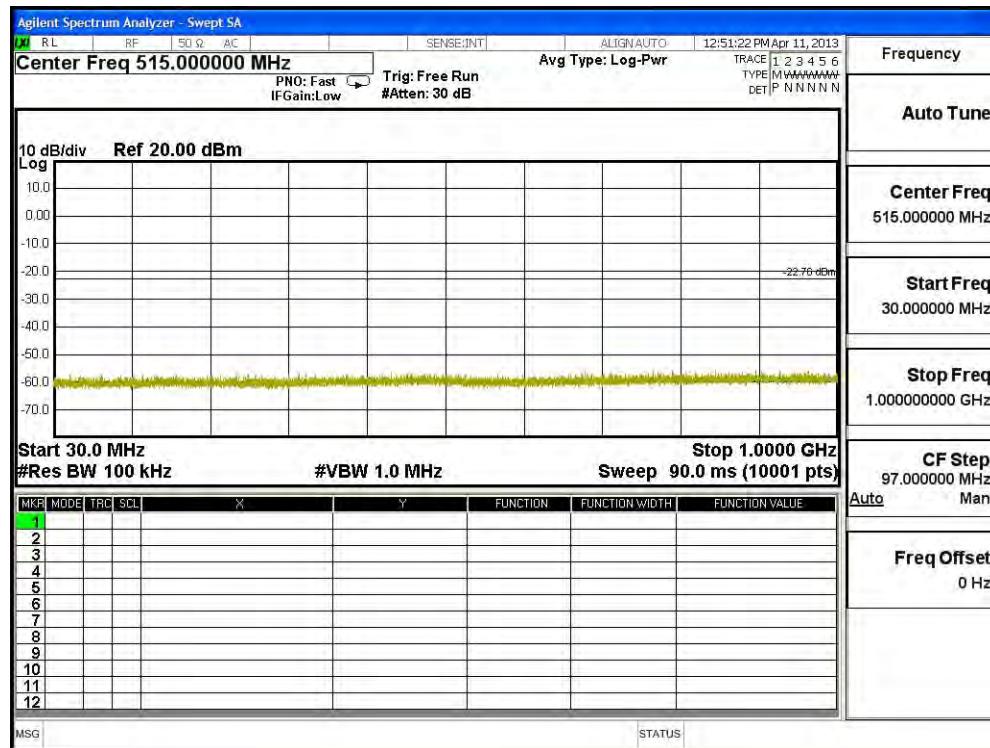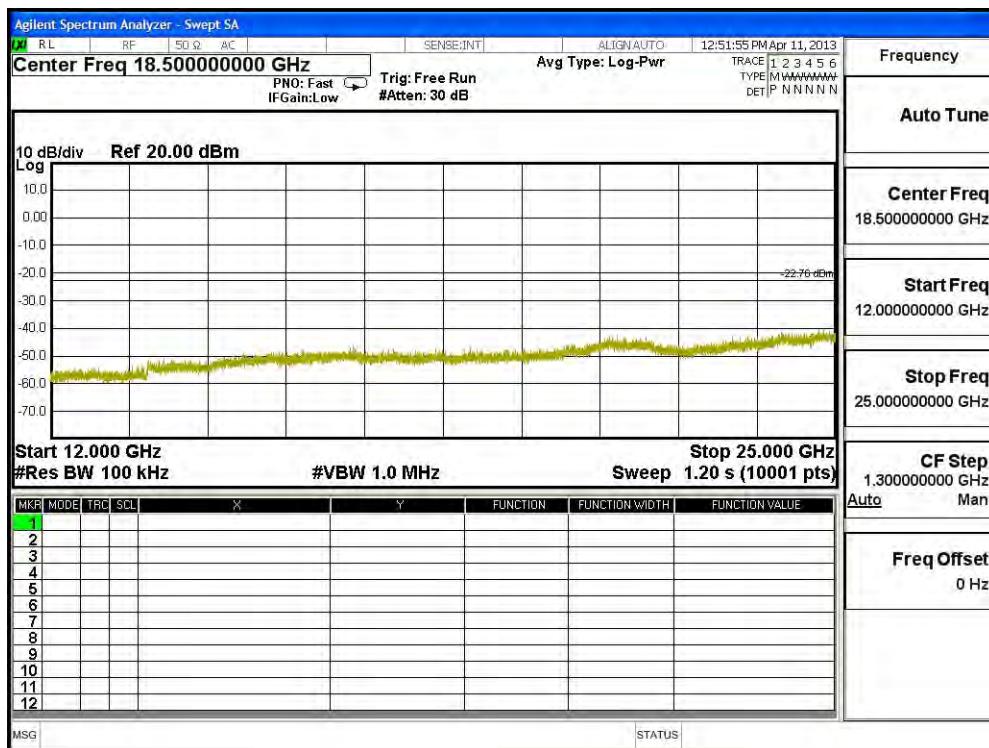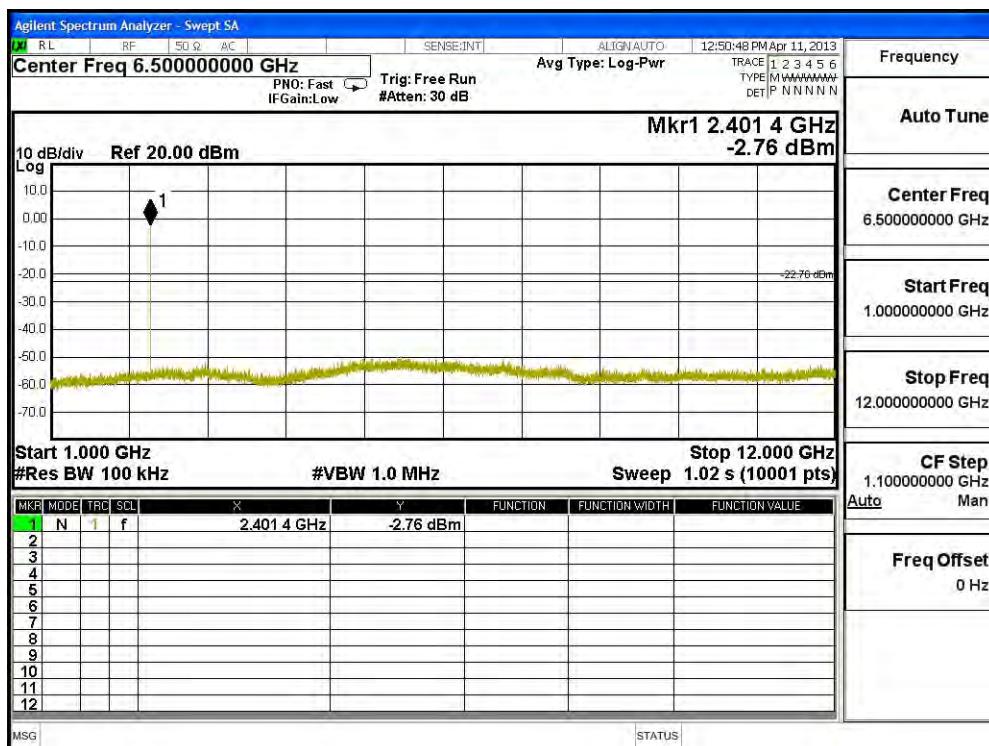
Figure Channel 00:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

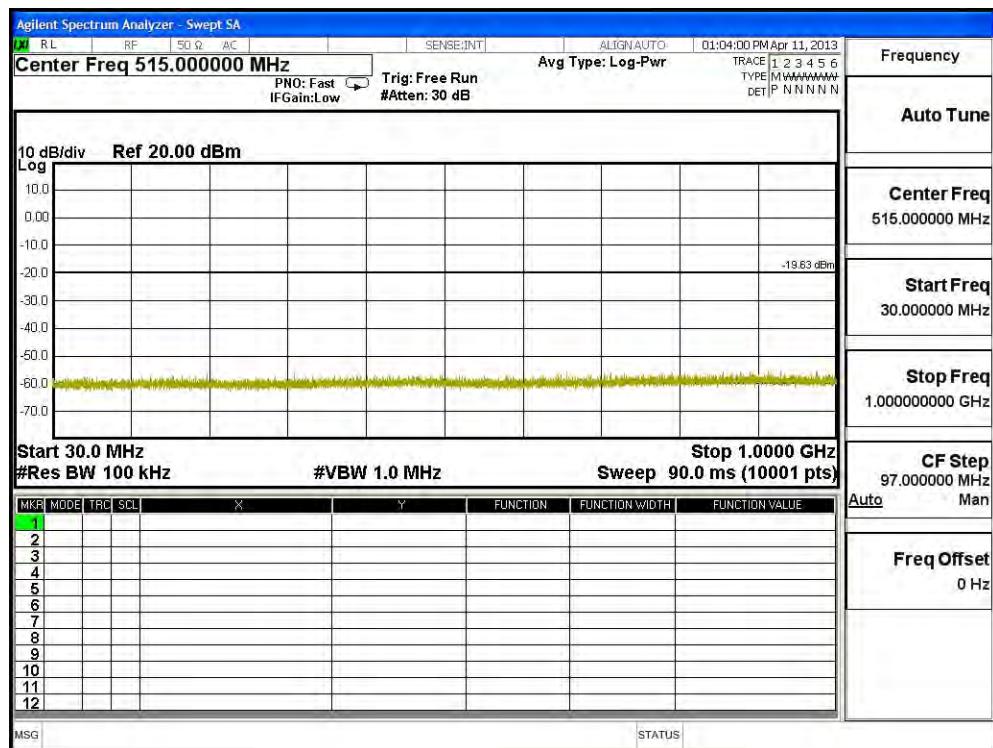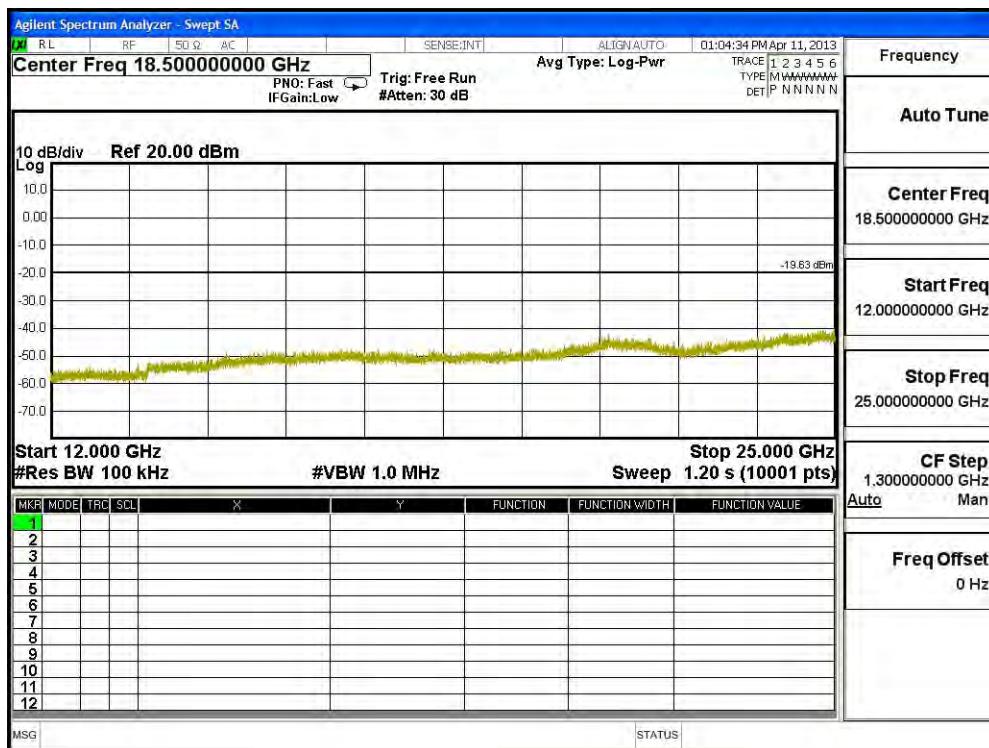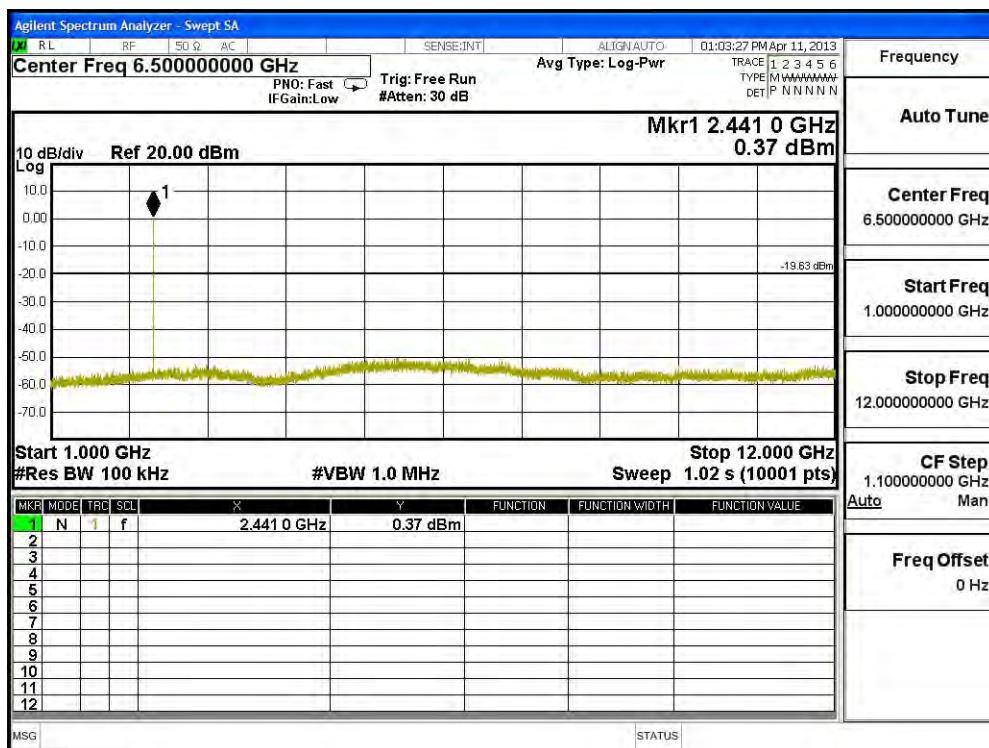
Figure Channel 39:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

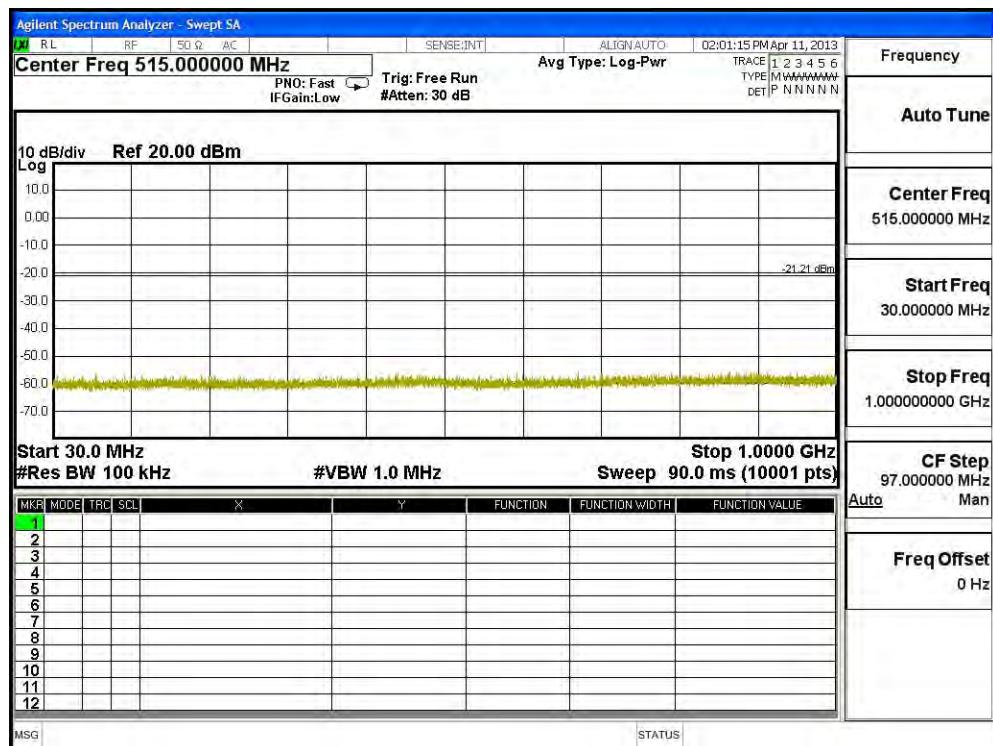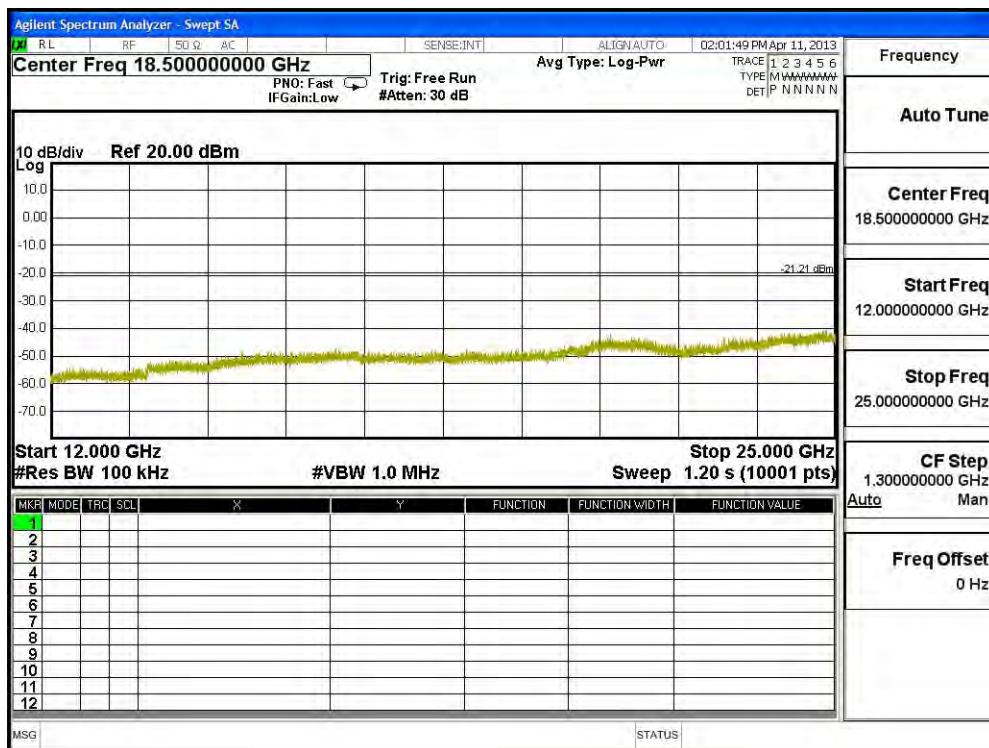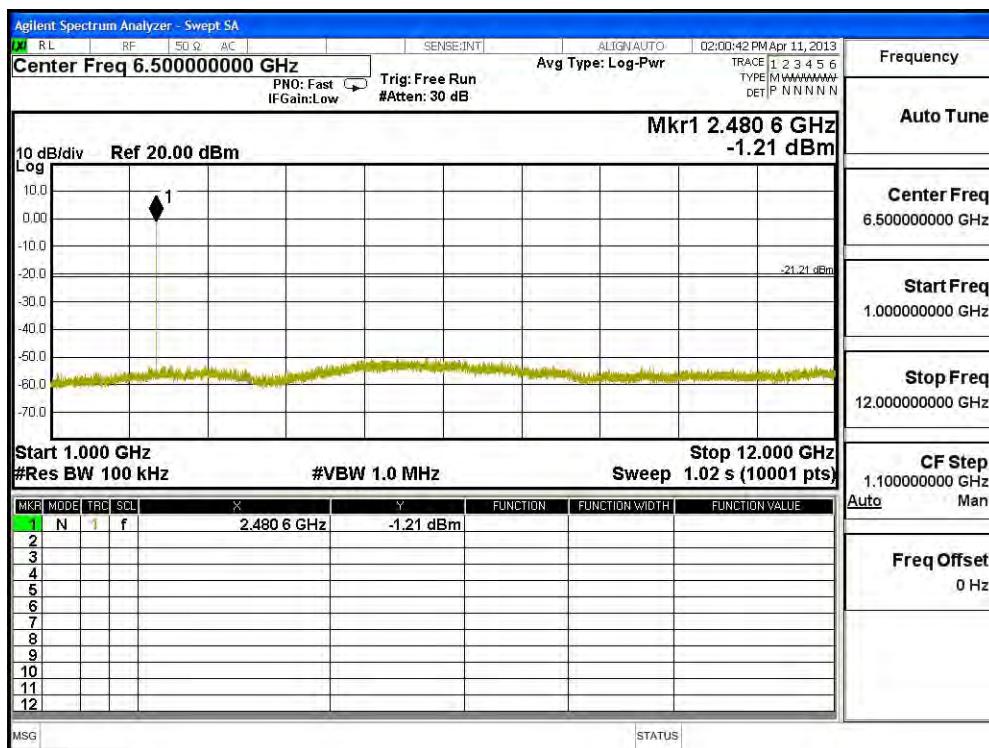
Figure Channel 78:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK)

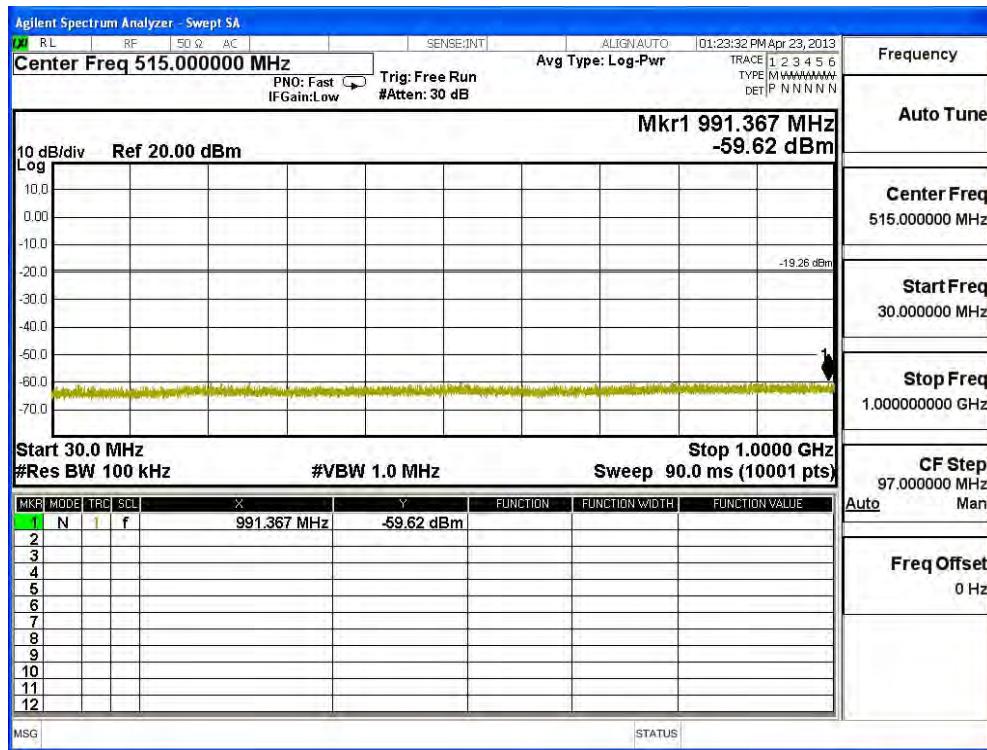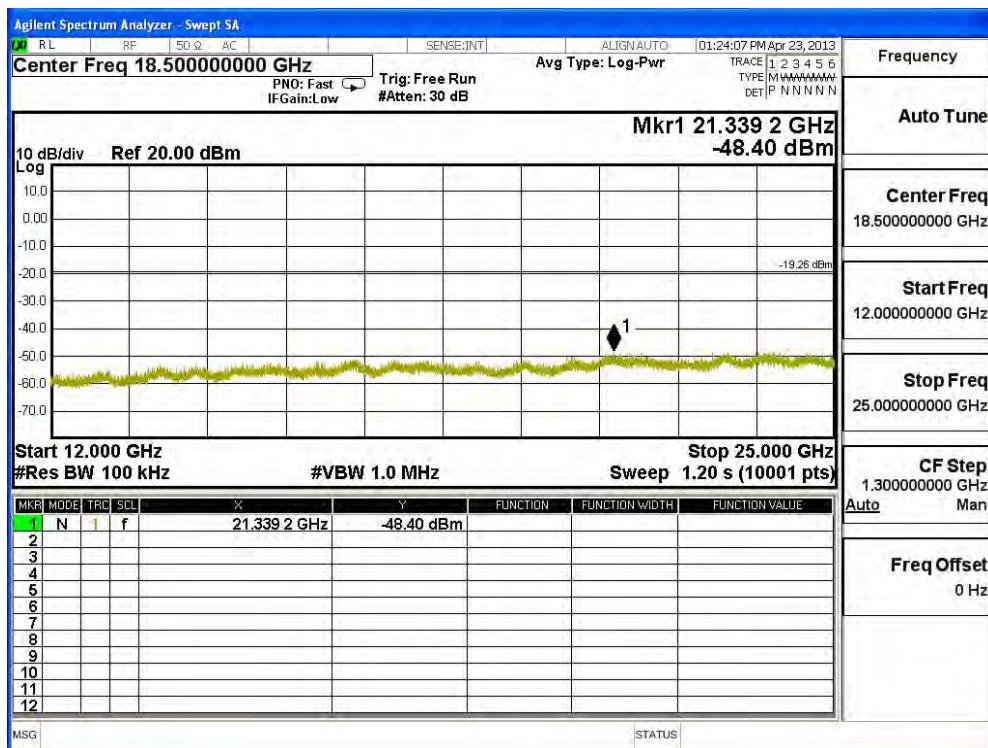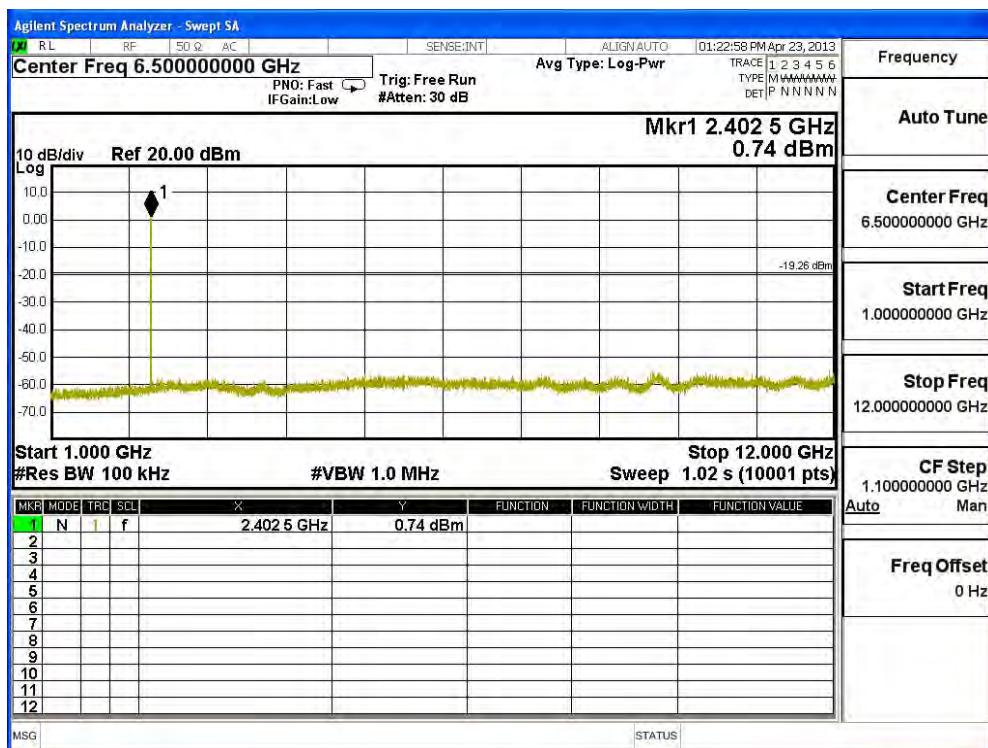
Figure Channel 00:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK)

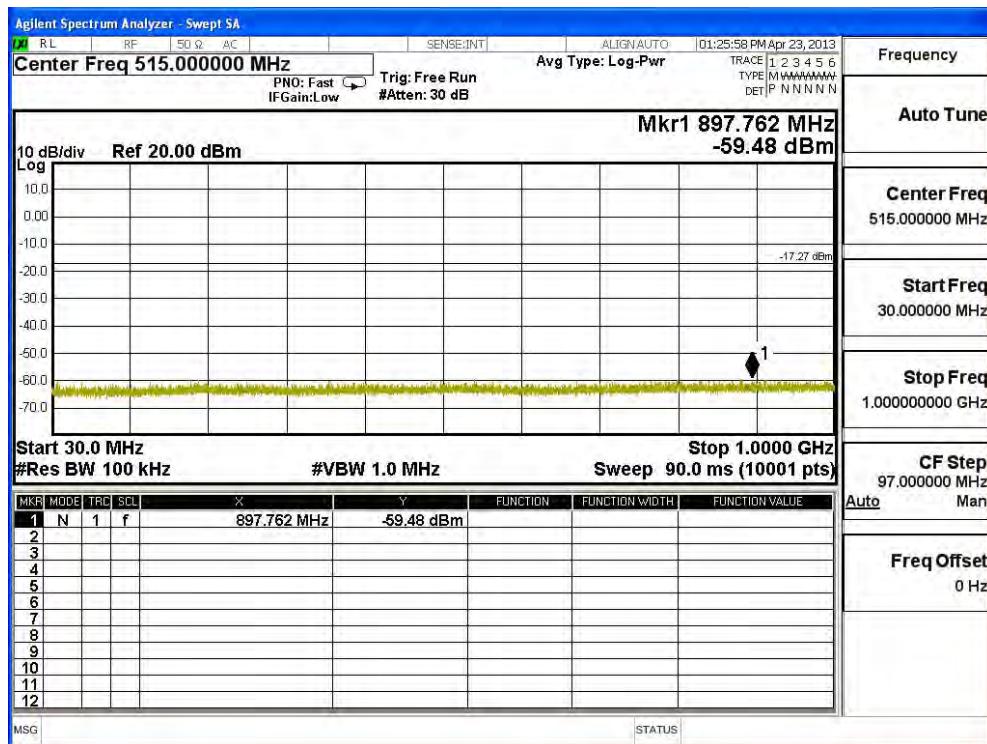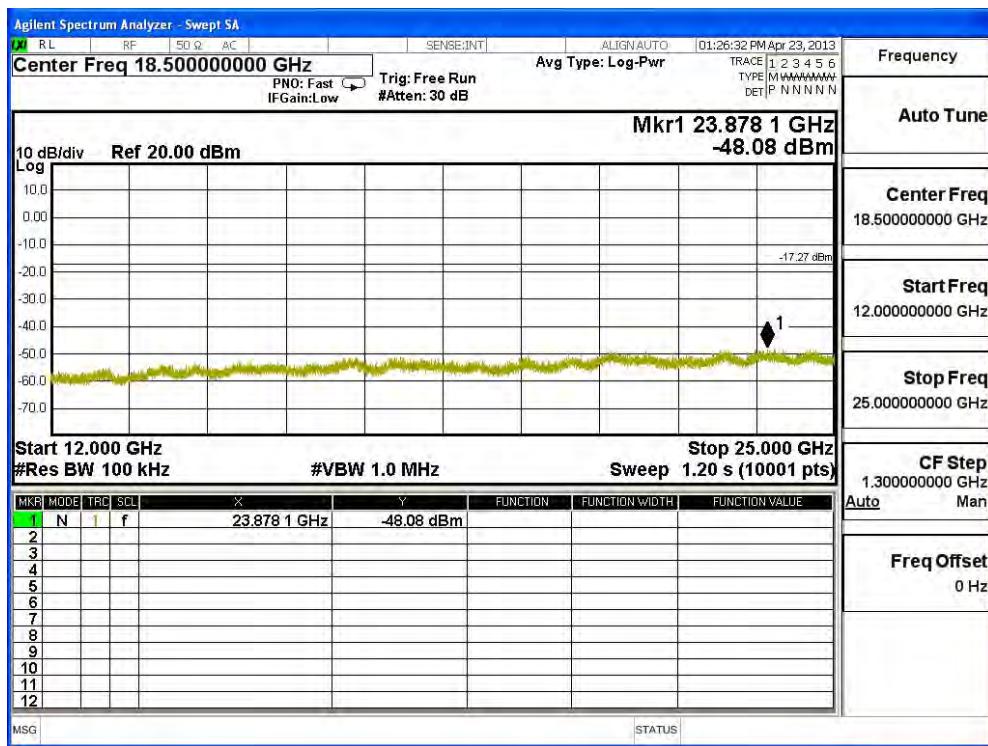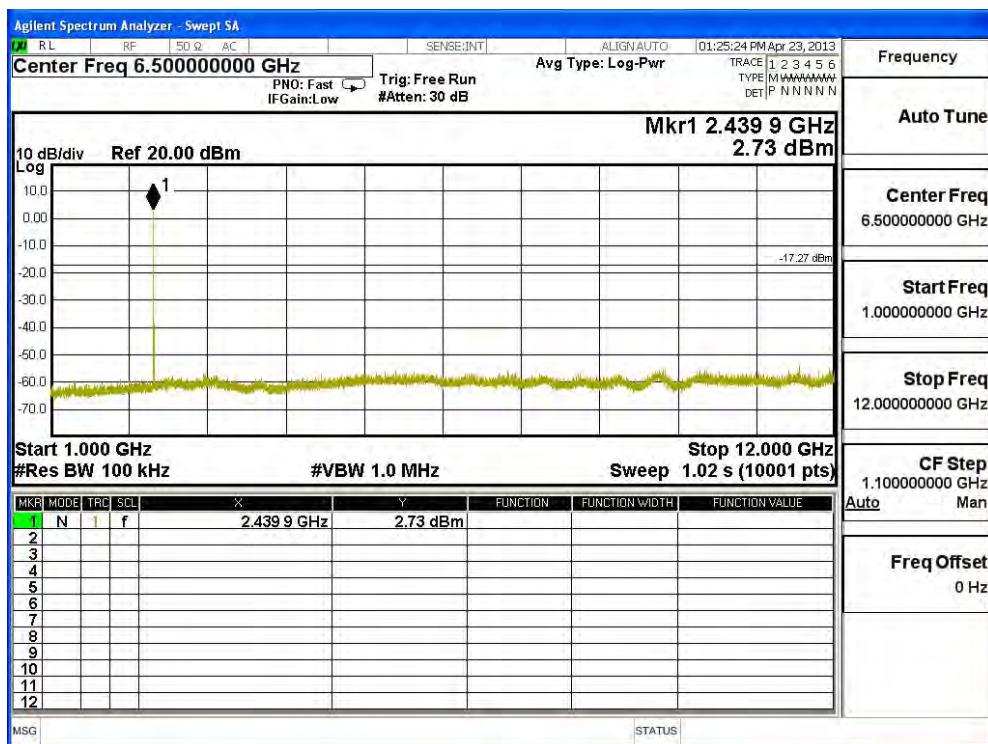
Figure Channel 19:







Product : TABLET PC
 Test Item : RF Antenna Conducted Test
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK)

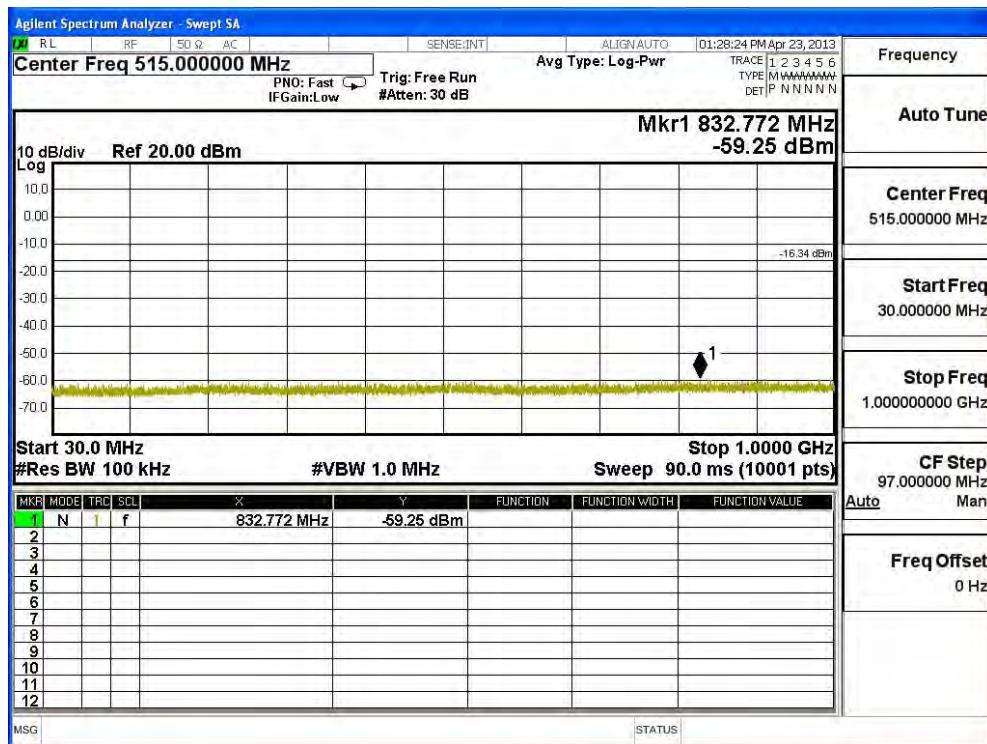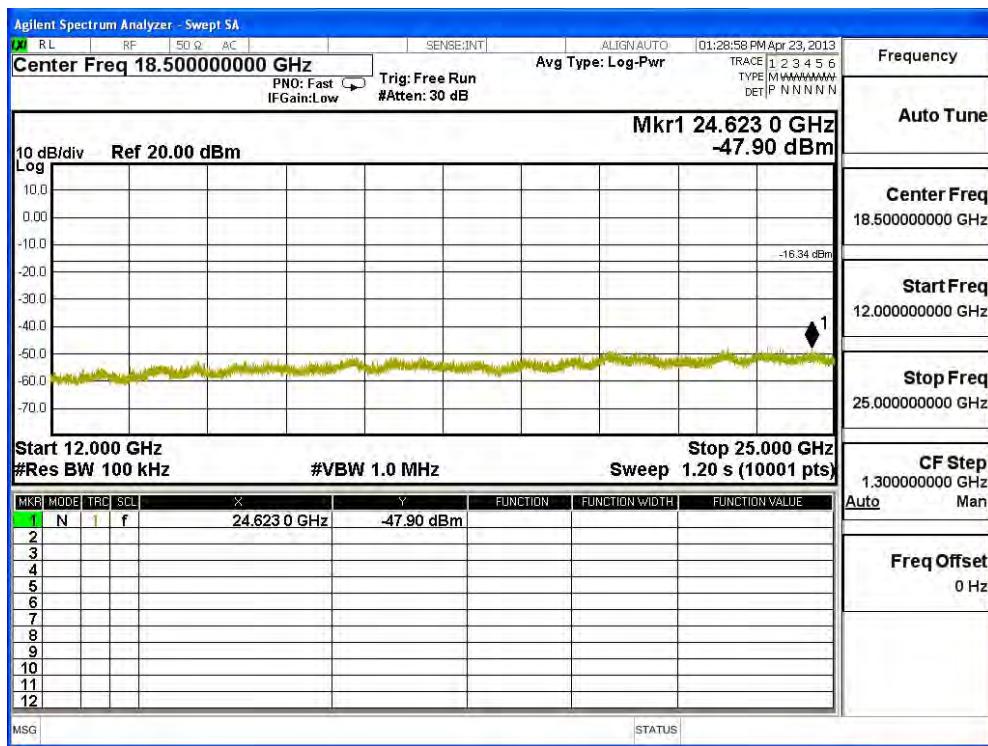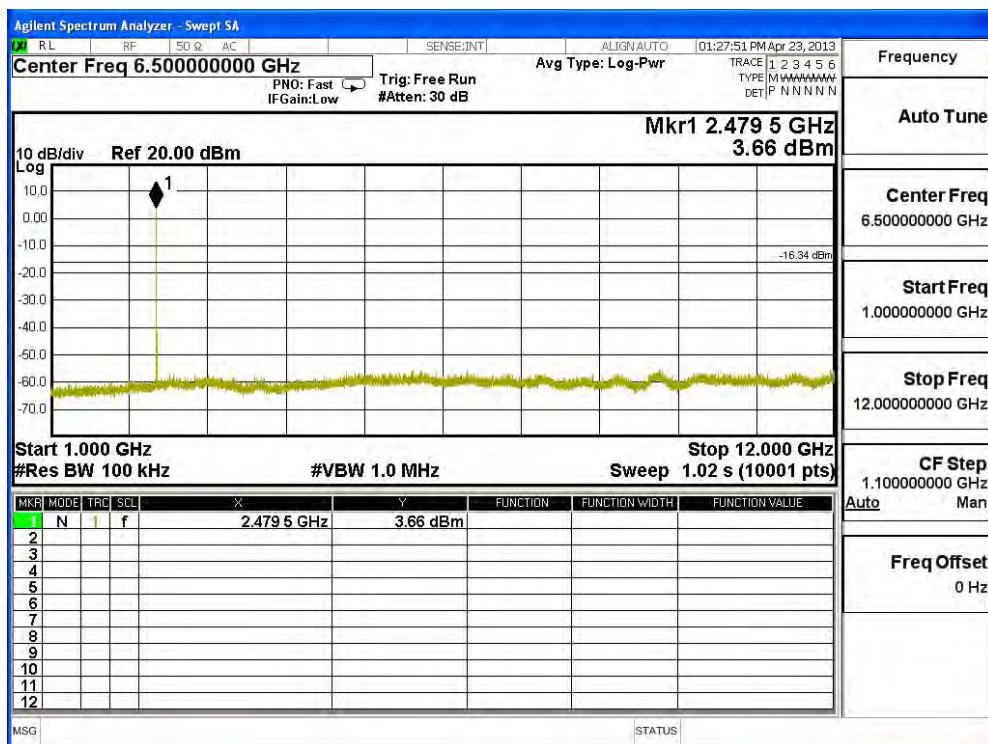Figure Channel 39:





6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2012
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2012
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2012
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2012
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2012
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2012
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.


6.2. Test Setup

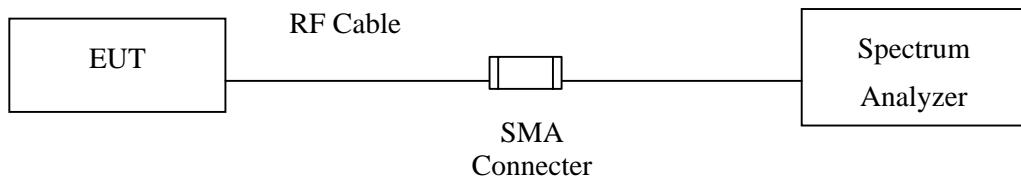RF Conducted Measurement



RF Radiated Measurement:

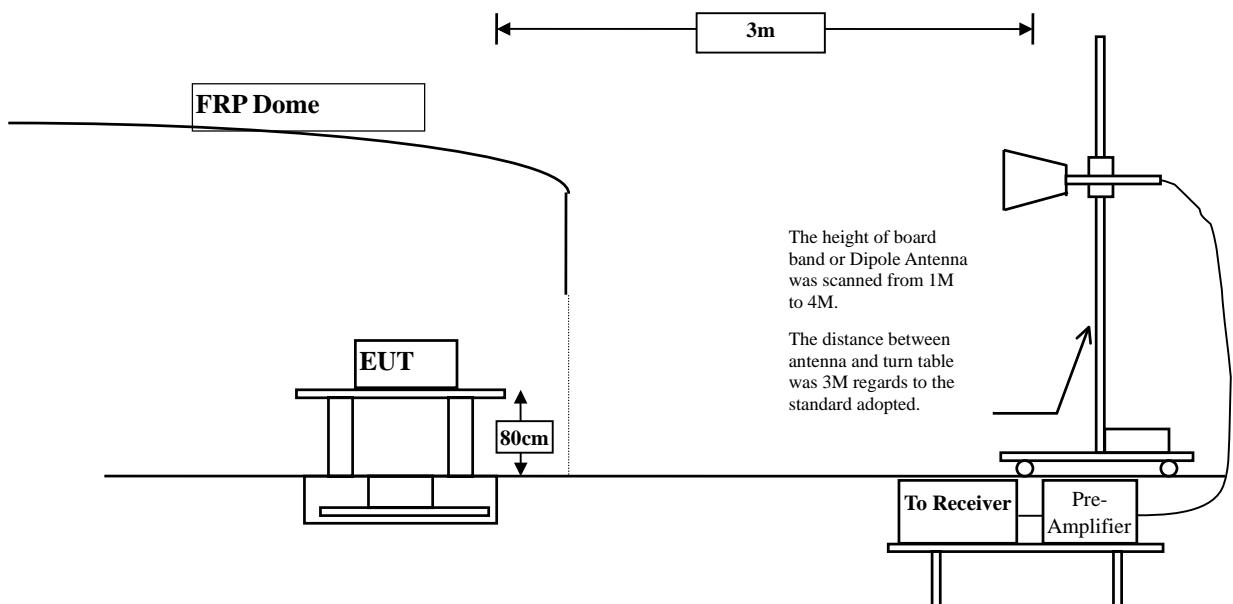Above 1GHz



6.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 and ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2388.600	31.504	25.518	57.022	74.00	54.00	Pass
00 (Peak)	2390.000	31.509	23.700	55.209	74.00	54.00	Pass
00 (Peak)	2402.200	31.574	60.368	91.943	--	--	Pass
00 (Average)	2388.600	31.504	12.587	44.091	74.00	54.00	Pass
00 (Average)	2390.000	31.509	12.564	44.073	74.00	54.00	Pass
00 (Average)	2402.000	31.573	49.618	81.192	--	--	Pass

Figure Channel 00:

Horizontal (Peak)


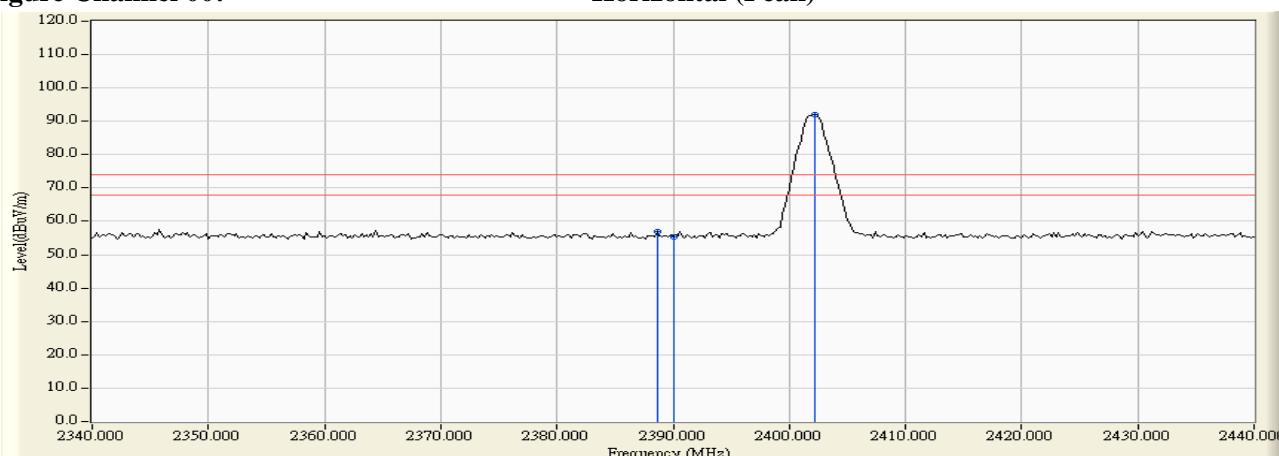


Figure Channel 00:

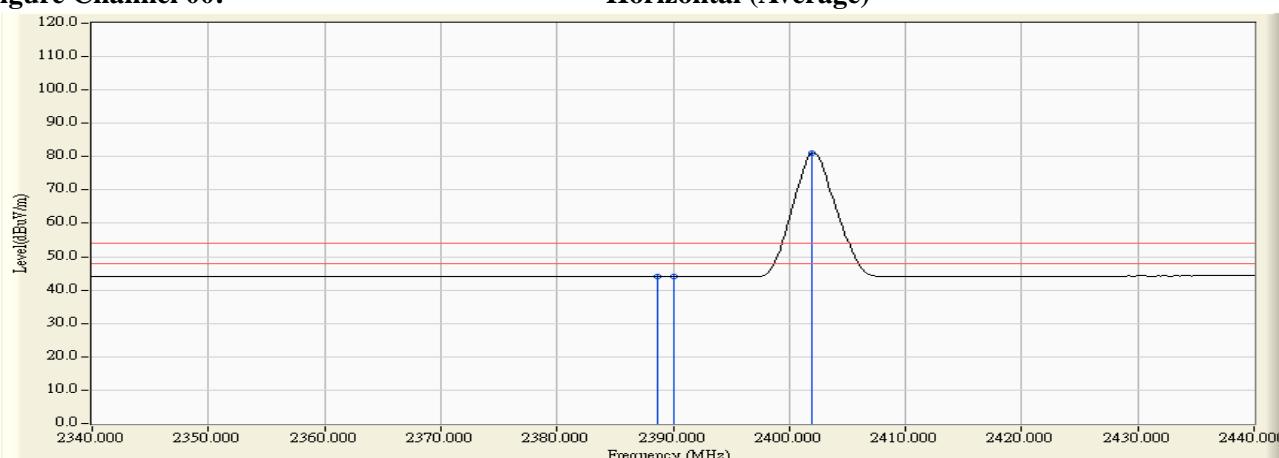Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2402MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2389.200	30.919	24.358	55.277	74.00	54.00	Pass
00 (Peak)	2390.000	30.915	24.061	54.976	74.00	54.00	Pass
00 (Peak)	2402.200	30.917	64.617	95.535	--	--	Pass
00 (Average)	2389.200	30.919	12.329	43.248	74.00	54.00	Pass
00 (Average)	2390.000	30.915	12.348	43.263	74.00	54.00	Pass
00 (Average)	2402.000	30.917	52.853	83.770	--	--	Pass

Figure Channel 00:

Vertical (Peak)


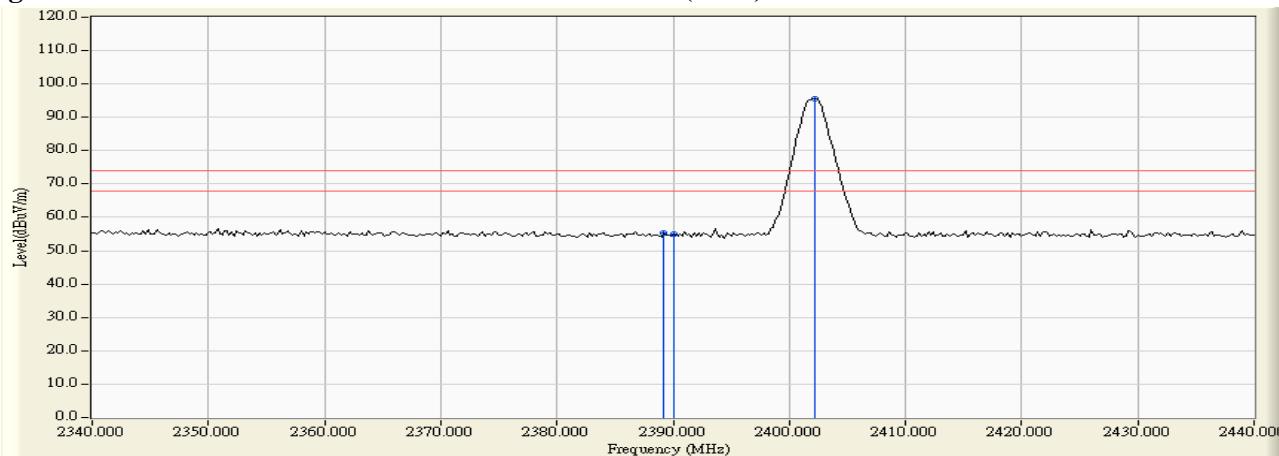


Figure Channel 00:

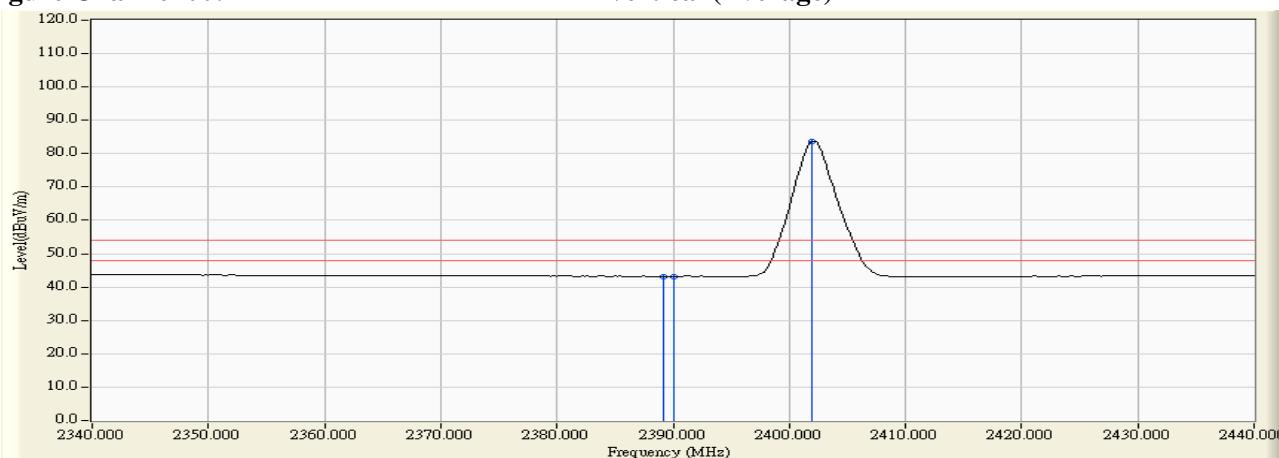Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	32.155	63.237	95.392	--	--	Pass
78 (Peak)	2483.500	32.182	29.916	62.098	74.00	54.00	Pass
78 (Average)	2480.100	31.026	51.861	84.017	--	--	Pass
78 (Average)	2483.500	31.050	21.713	53.895	74.00	54.00	Pass

Figure Channel 78:

Horizontal (Peak)


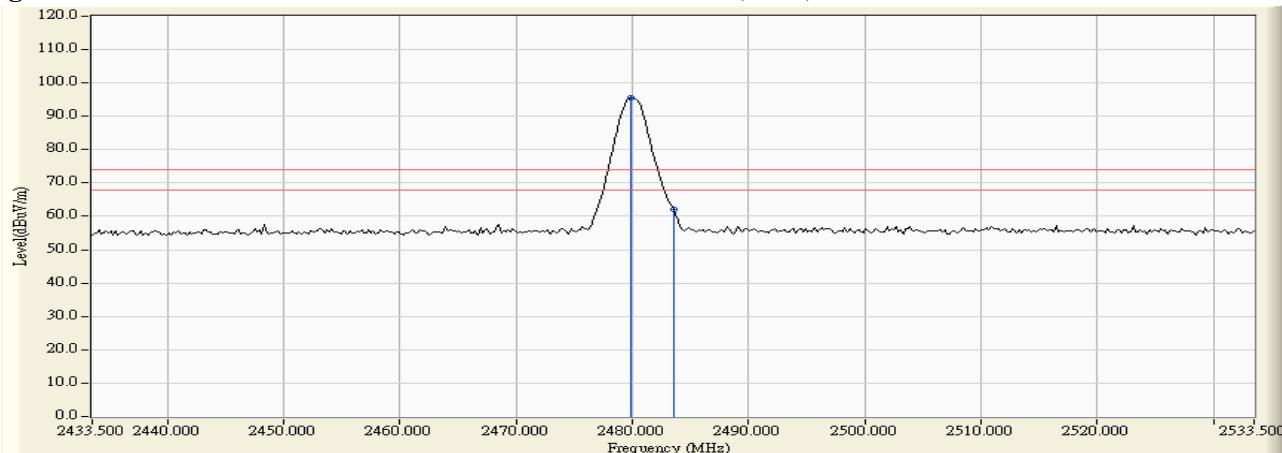


Figure Channel 78:

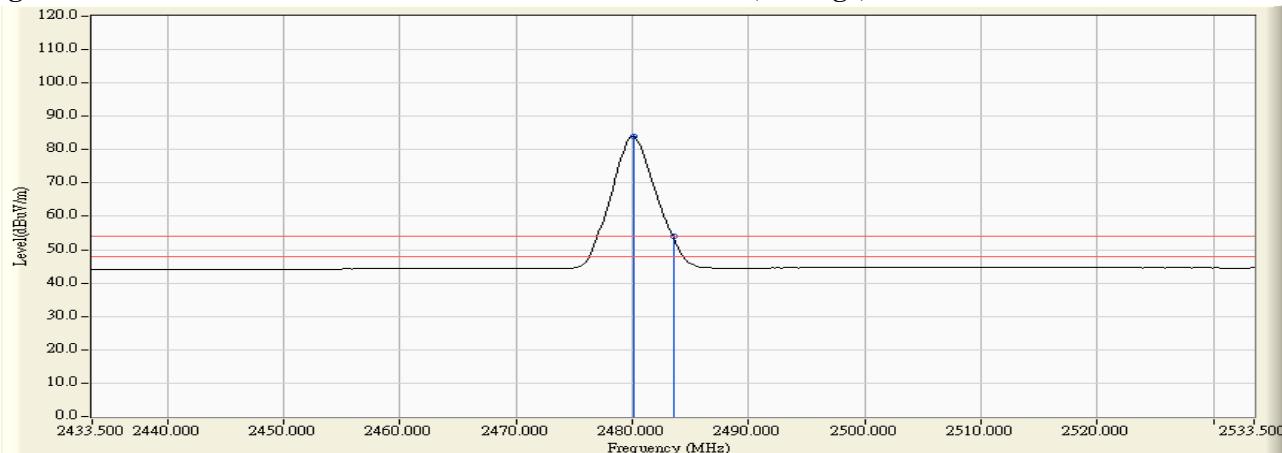Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2480MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	31.411	64.315	95.726	--	--	Pass
78 (Peak)	2483.500	31.435	30.925	62.360	74.00	54.00	Pass
78 (Average)	2480.100	31.413	52.736	84.149	--	--	Pass
78 (Average)	2483.500	31.435	22.437	53.872	74.00	54.00	Pass

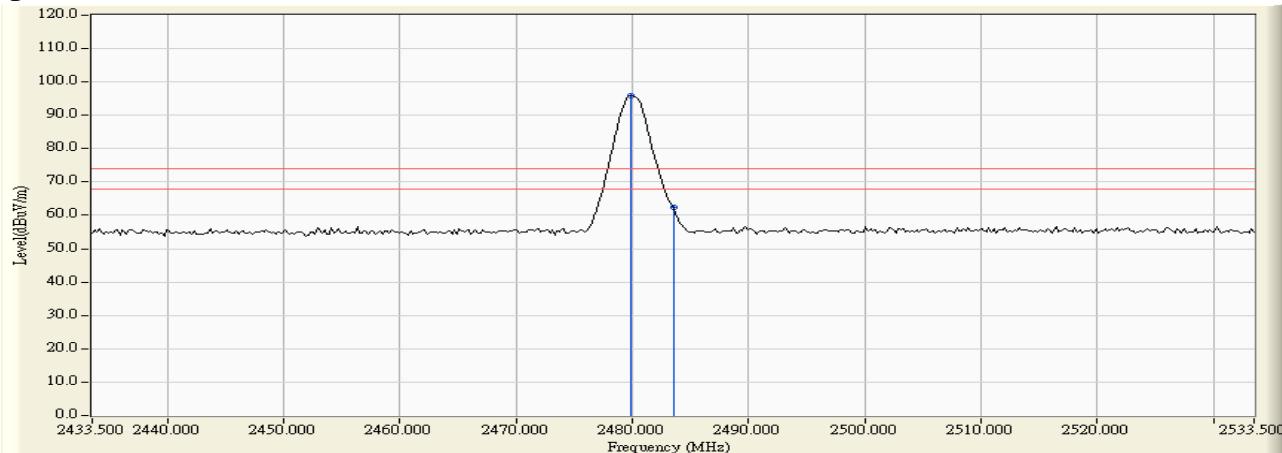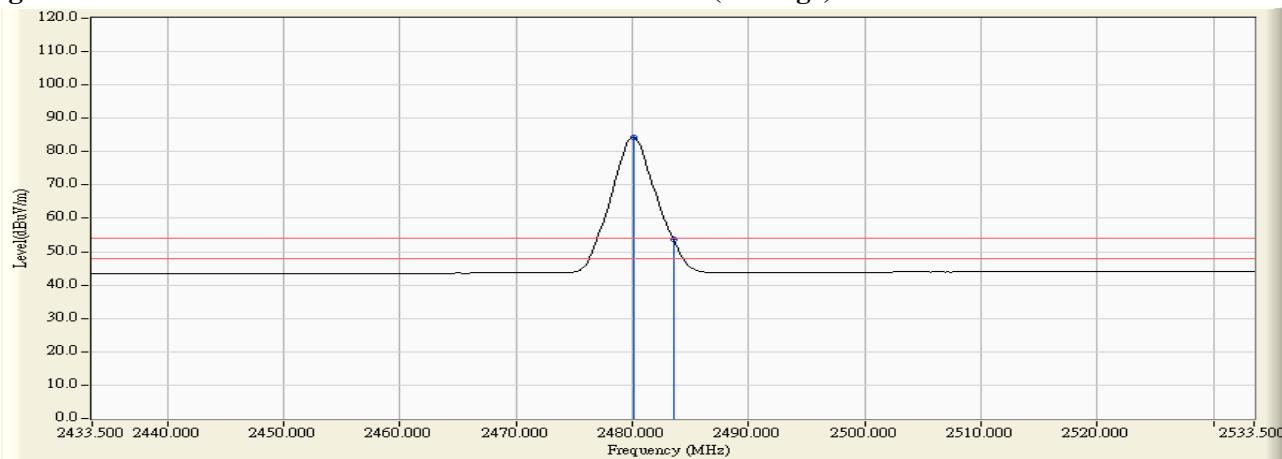Figure Channel 78:
Vertical (Peak)

Figure Channel 78:
Vertical (Average)


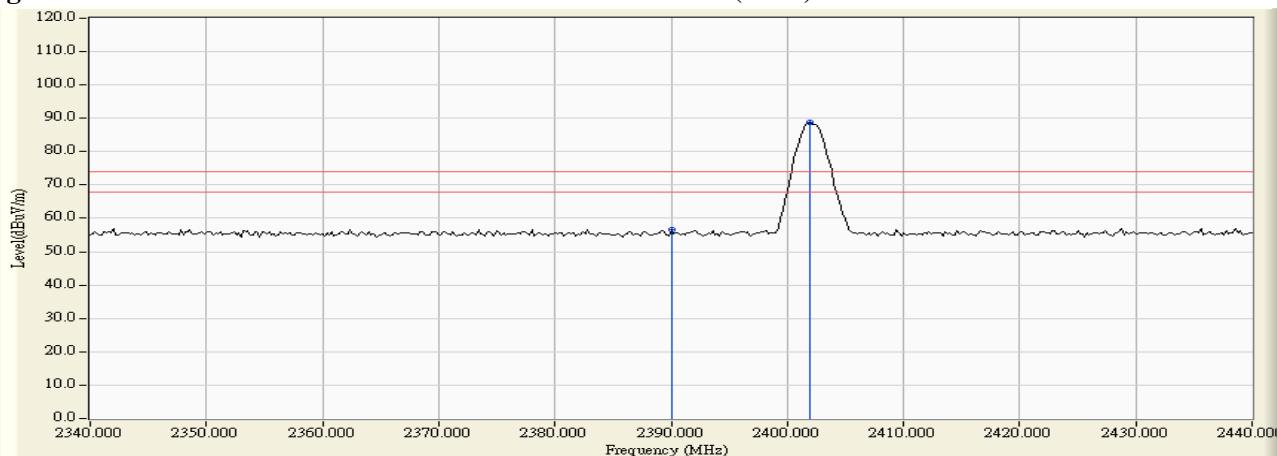
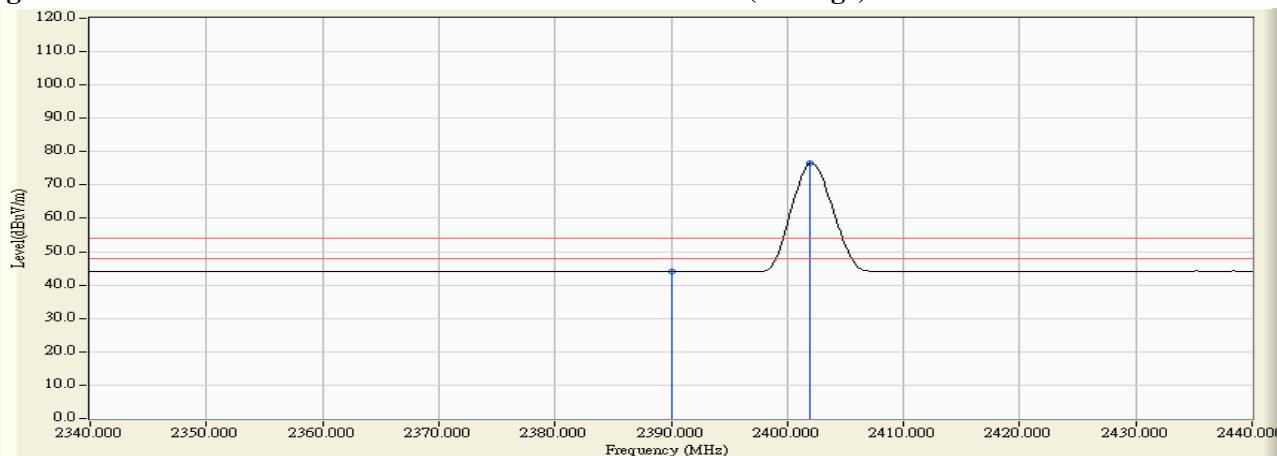
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	31.509	25.271	56.780	74.00	54.00	Pass
00 (Peak)	2402.000	31.573	57.086	88.660	--	--	Pass
00 (Average)	2390.000	31.509	12.493	44.002	74.00	54.00	Pass
00 (Average)	2402.000	31.573	44.842	76.416	--	--	Pass

Figure Channel 00:
Horizontal (Peak)

Figure Channel 00:
Horizontal (Average)


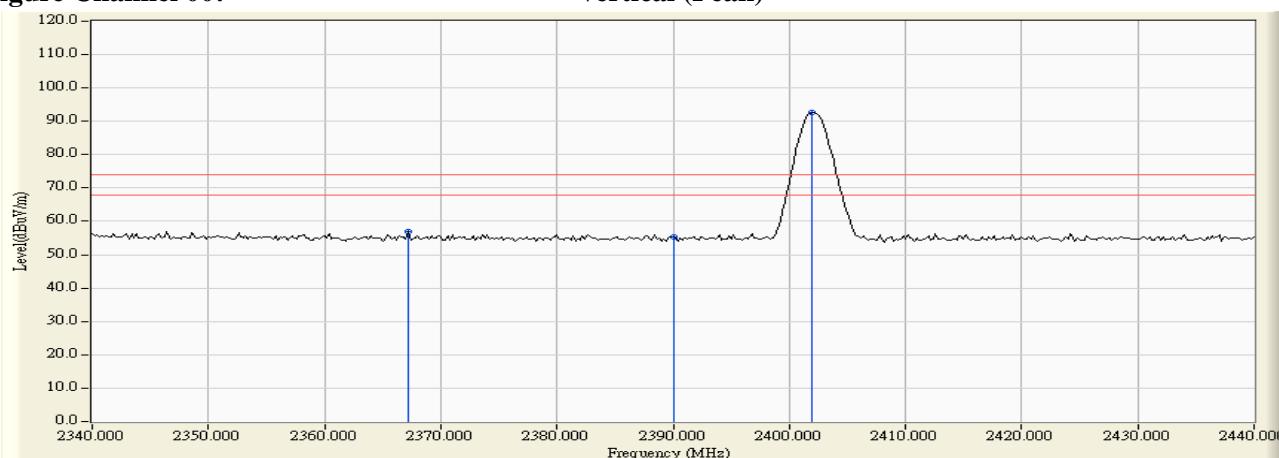
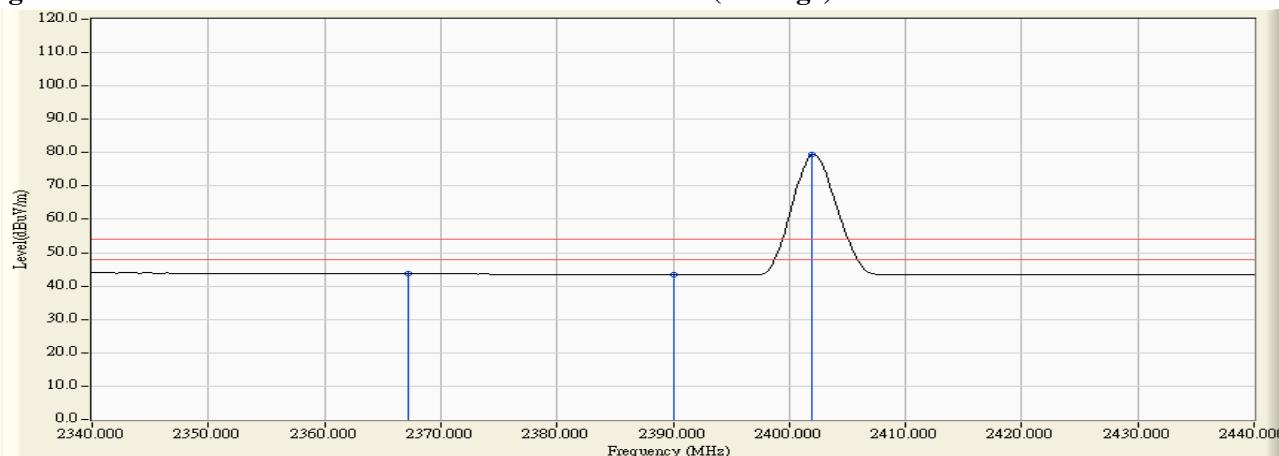
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2367.200	31.020	25.923	56.944	74.00	54.00	Pass
00 (Peak)	2390.000	30.915	24.393	55.308	74.00	54.00	Pass
00 (Peak)	2402.000	30.917	61.832	92.749	--	--	Pass
00 (Average)	2367.200	31.020	12.654	43.675	74.00	54.00	Pass
00 (Average)	2390.000	30.915	12.514	43.429	74.00	54.00	Pass
00 (Average)	2402.000	30.917	48.457	79.374	--	--	Pass

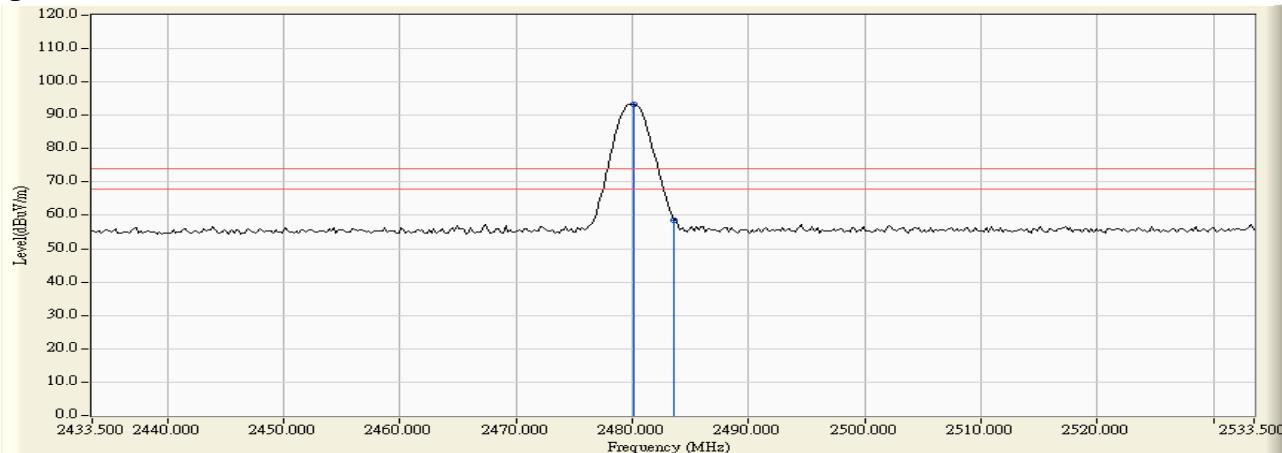
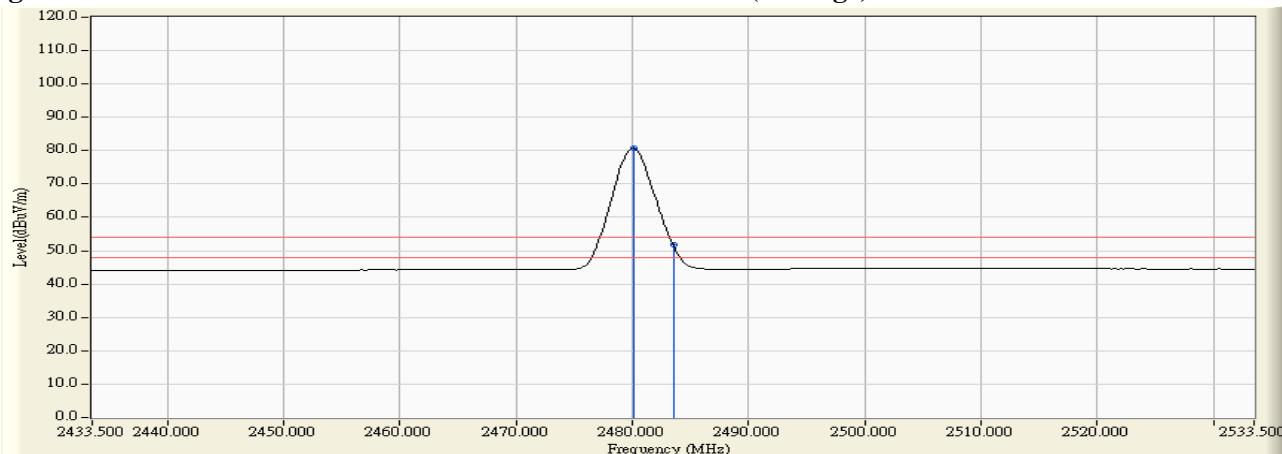
Figure Channel 00:
Vertical (Peak)

Figure Channel 00:
Vertical (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.100	32.157	61.250	93.406	--	--	Pass
78 (Peak)	2483.500	32.182	26.361	58.543	74.00	54.00	Pass
78(Average)	2480.100	32.157	48.452	80.608	--	--	Pass
78 (Average)	2483.500	32.182	19.472	51.654	74.00	54.00	Pass

Figure Channel 78:
Horizontal (Peak)

Figure Channel 78:
Horizontal (Average)


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	31.411	63.522	94.933	--	--	Pass
78 (Peak)	2483.500	31.435	28.611	60.046	74.00	54.00	Pass
78 (Average)	2480.100	31.413	50.109	81.522	--	--	Pass
78 (Average)	2483.500	31.435	21.067	52.502	74.00	54.00	Pass

Figure Channel 78

Vertical (Peak)


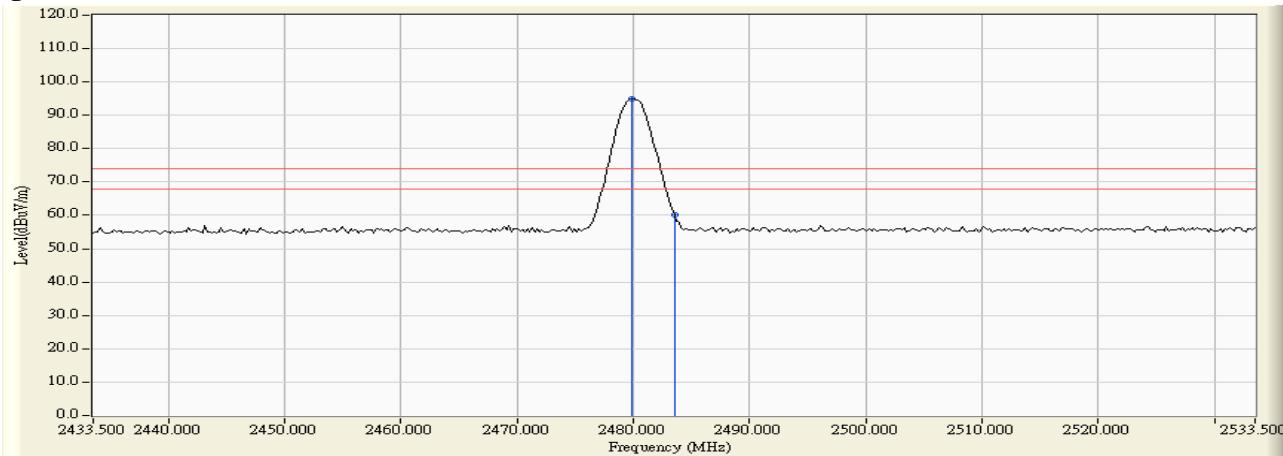


Figure Channel 78:

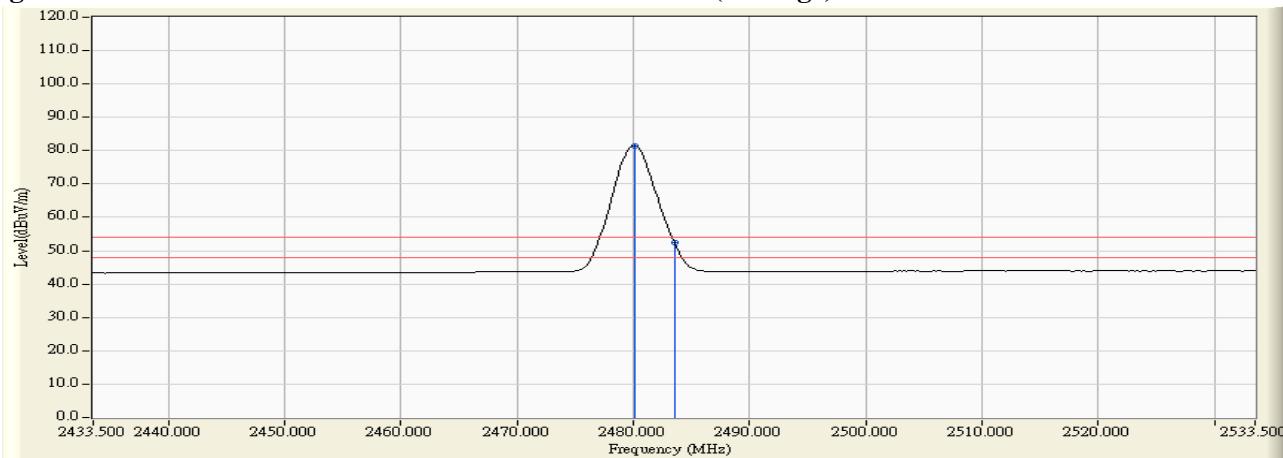Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2402MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2389.000	31.505	24.869	56.374	74.00	54.00	Pass
00 (Peak)	2390.000	31.509	23.605	55.114	74.00	54.00	Pass
00 (Peak)	2402.200	31.574	59.426	91.001	--	--	Pass
00 (Average)	2389.000	31.505	12.544	44.049	74.00	54.00	Pass
00 (Average)	2390.000	31.509	12.506	44.015	74.00	54.00	Pass
00 (Average)	2402.000	31.573	41.346	72.920	--	--	Pass

Figure Channel 00:

Horizontal (Peak)


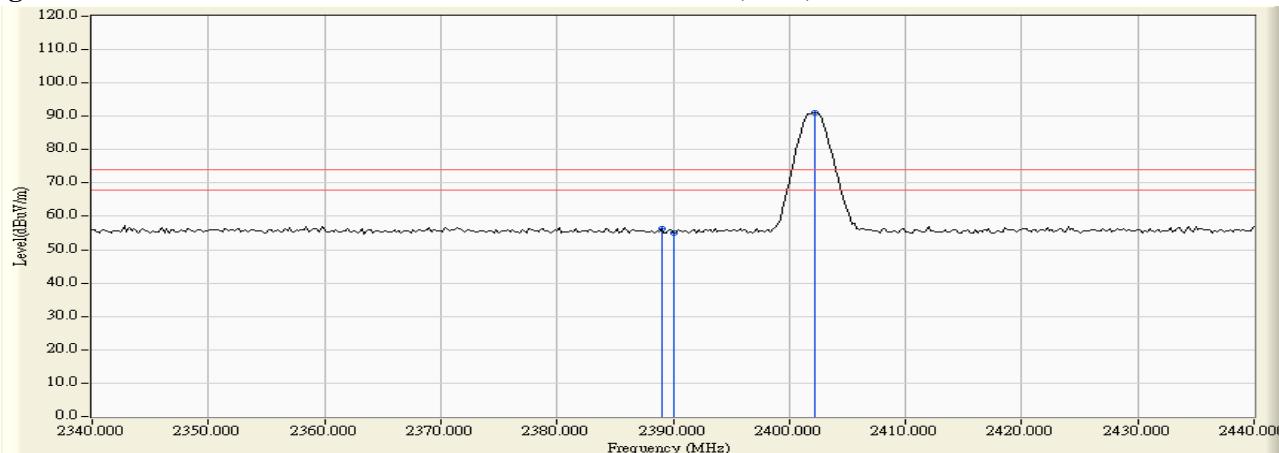


Figure Channel 00:

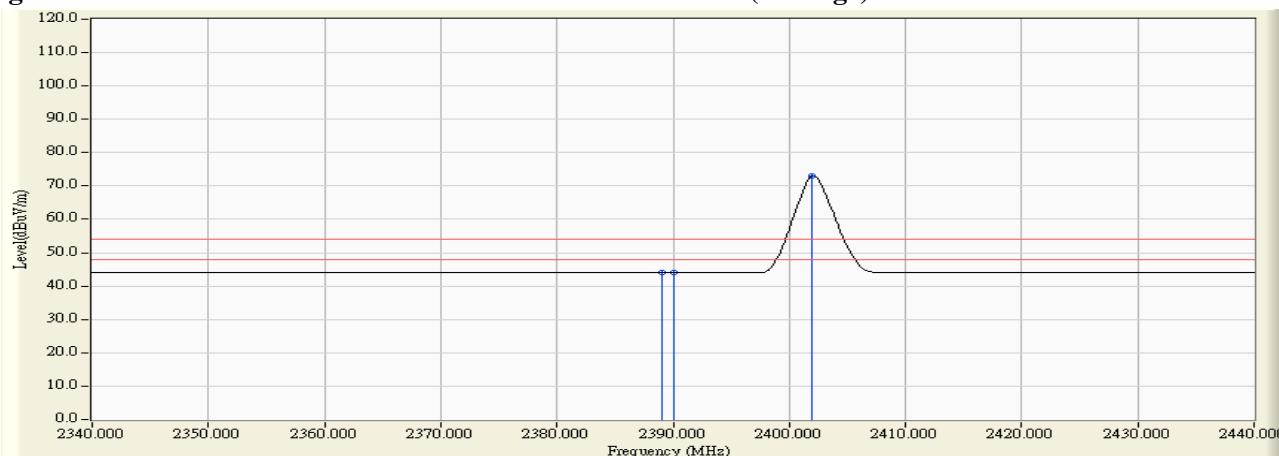Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2402MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2386.800	30.930	24.904	55.834	74.00	54.00	Pass
00 (Peak)	2390.000	30.915	24.251	55.166	74.00	54.00	Pass
00 (Peak)	2402.200	30.917	64.186	95.104	--	--	Pass
00 (Average)	2386.800	30.930	12.251	43.181	74.00	54.00	Pass
00 (Average)	2390.000	30.915	12.289	43.204	74.00	54.00	Pass
00 (Average)	2402.200	30.917	44.517	75.435	--	--	Pass

Figure Channel 00:

Vertical (Peak)


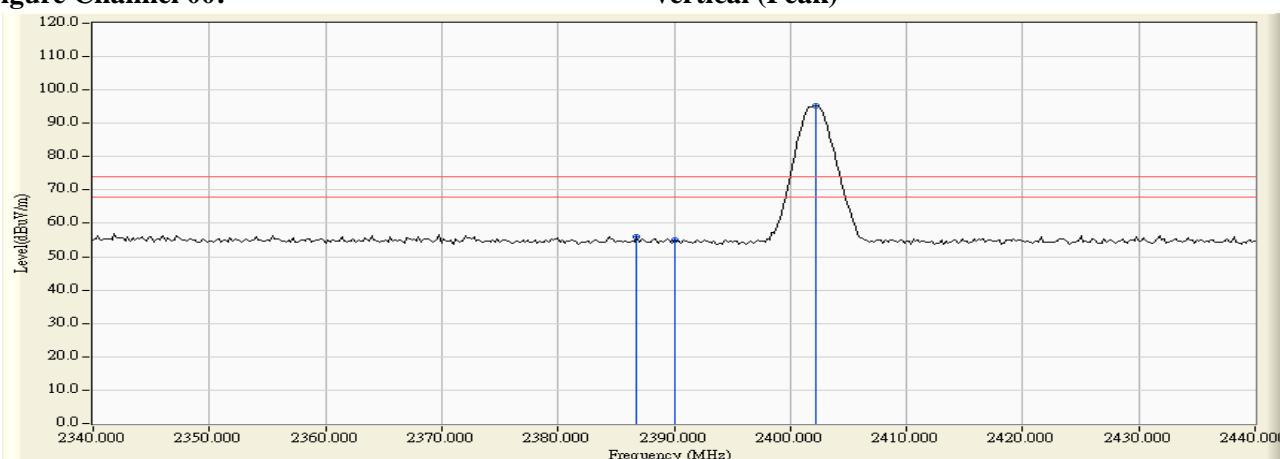


Figure Channel 00:

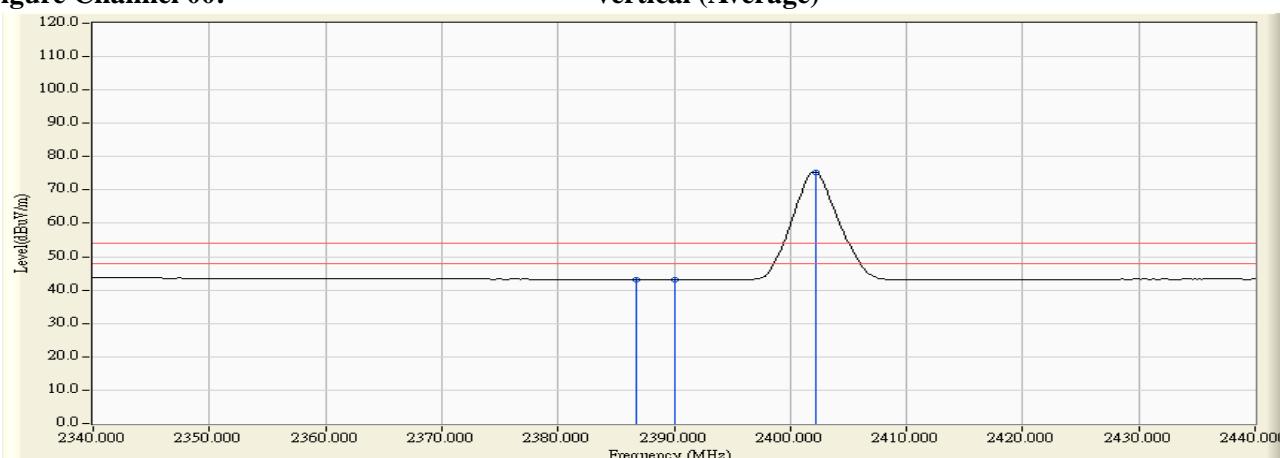Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2480MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2479.700	32.154	61.628	93.781	--	--	Pass
39 (Peak)	2483.500	32.182	30.072	62.254	74.00	54.00	Pass
39 (Average)	2480.100	32.157	43.024	75.180	--	--	Pass
39 (Average))	2483.500	32.182	18.842	51.024	74.00	54.00	Pass

Figure Channel 39:

Horizontal (Peak)


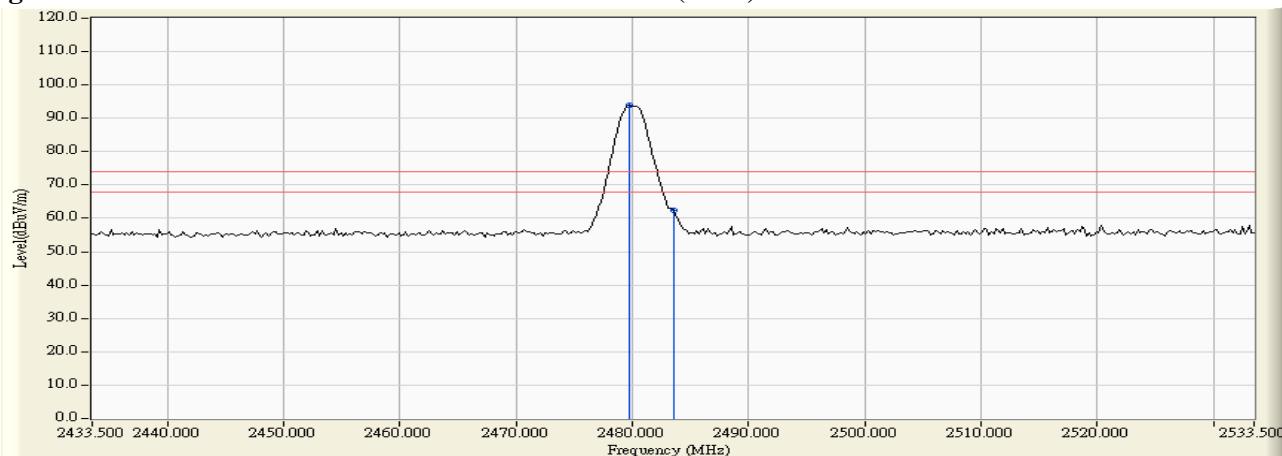


Figure Channel 39:

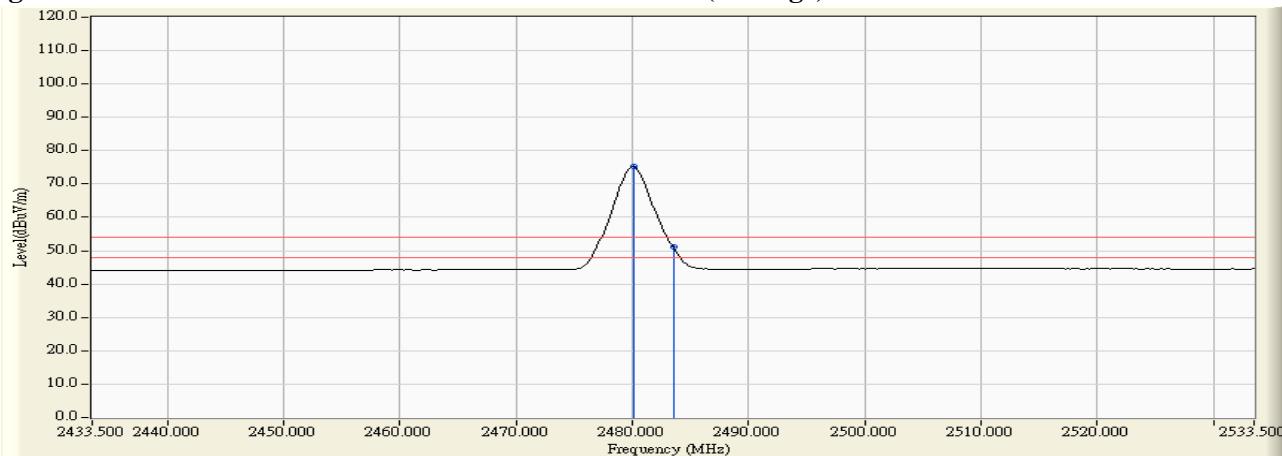Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : TABLET PC
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2480MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2479.700	31.410	64.372	95.782	--	--	Pass
39 (Peak)	2483.500	31.435	31.645	63.080	74.00	54.00	Pass
39 (Average)	2480.100	31.413	44.816	76.229	--	--	Pass
39 (Average))	2483.500	31.435	20.361	51.796	74.00	54.00	Pass

Figure Channel 39:

Vertical (Peak)


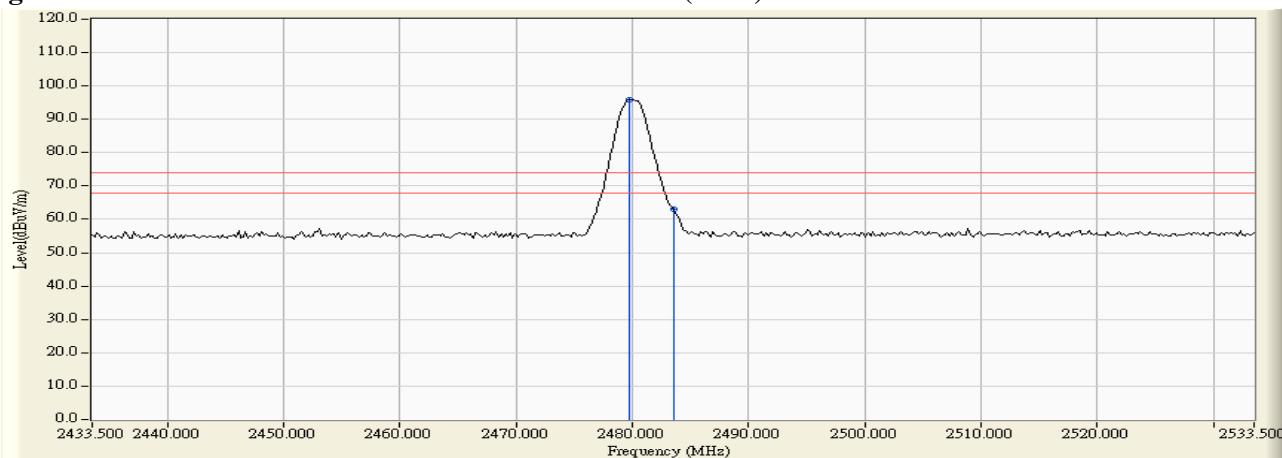


Figure Channel 39:

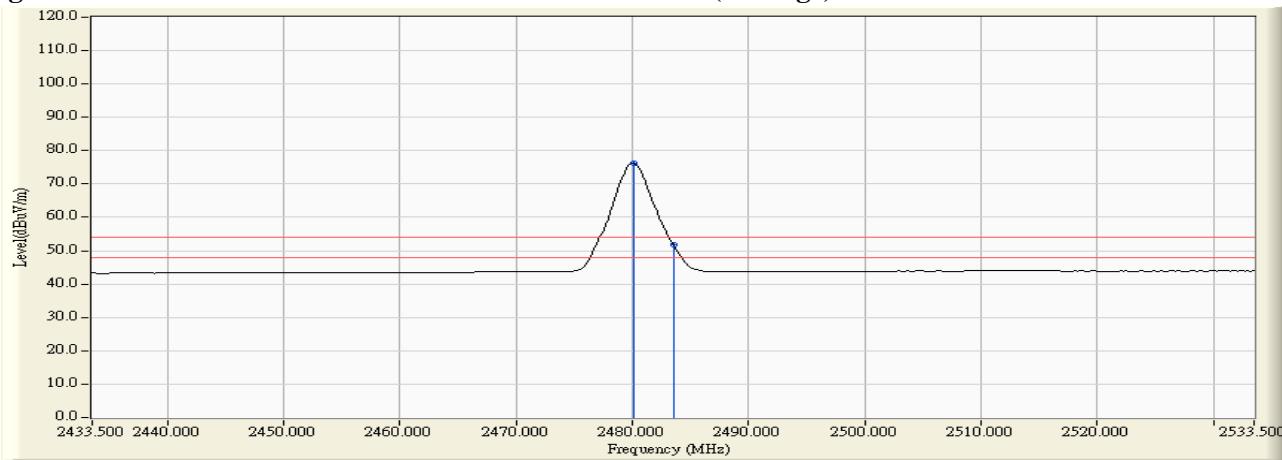Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


7. Channel Number

7.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

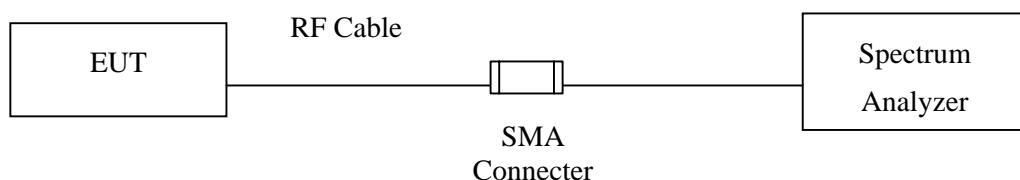7.2. Test Setup



7.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty


N/A

7.6. Test Result of Channel Number


Product : TABLET PC
 Test Item : Channel Number
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

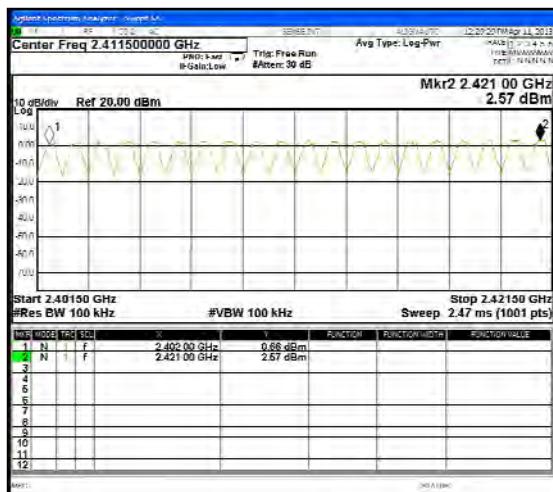
2402-2421MHz




2422-2441MHz

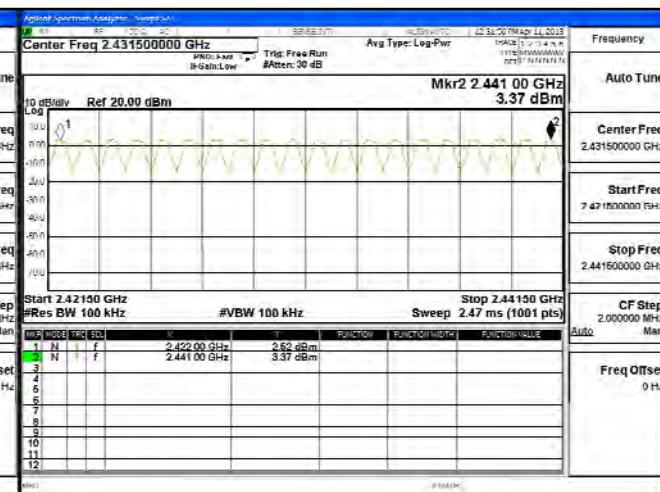

2442-2461MHz

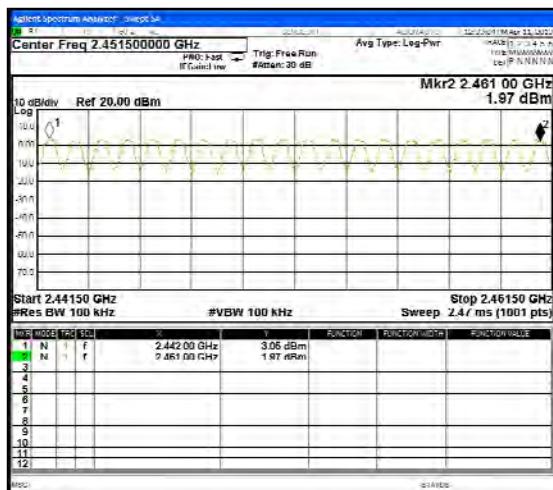


2462-2480MHz

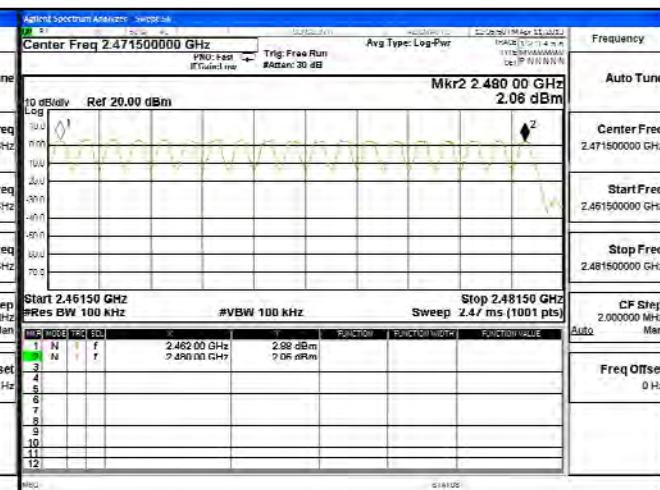


Product : TABLET PC
Test Item : Channel Number
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


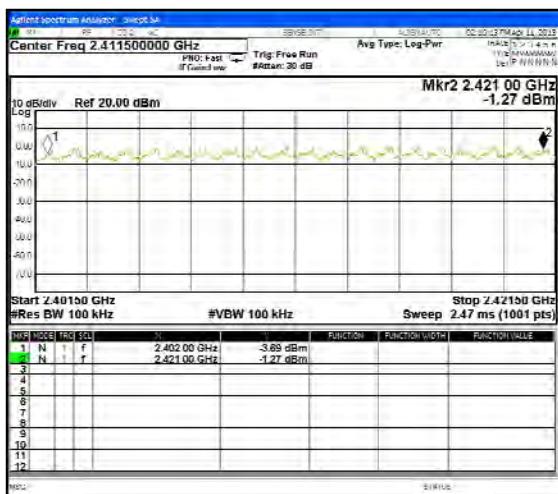
2402-2421MHz



2422-2441MHz

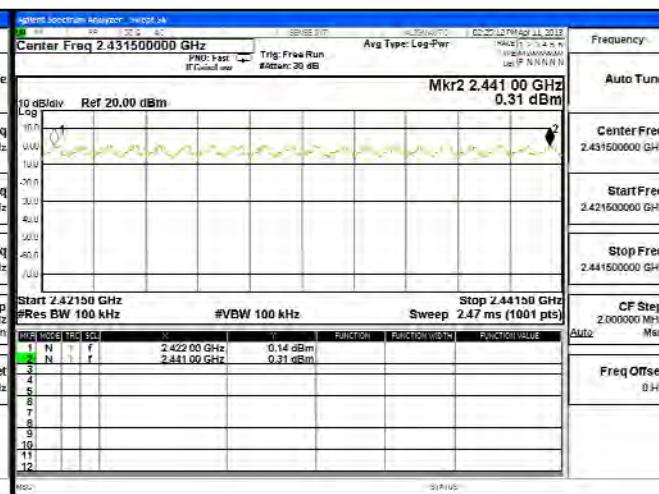

2442-2461MHz

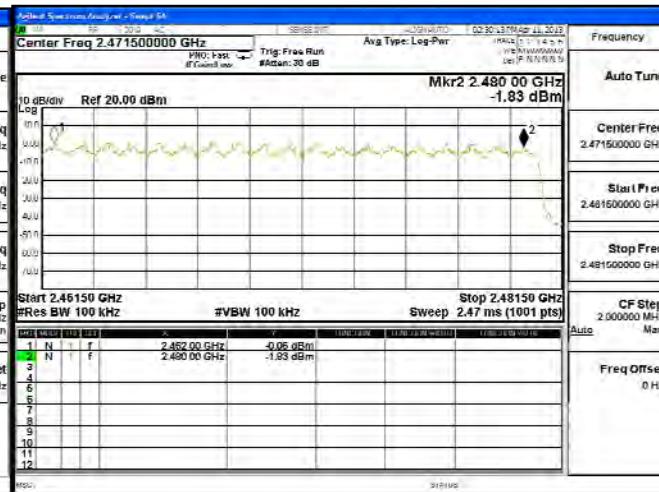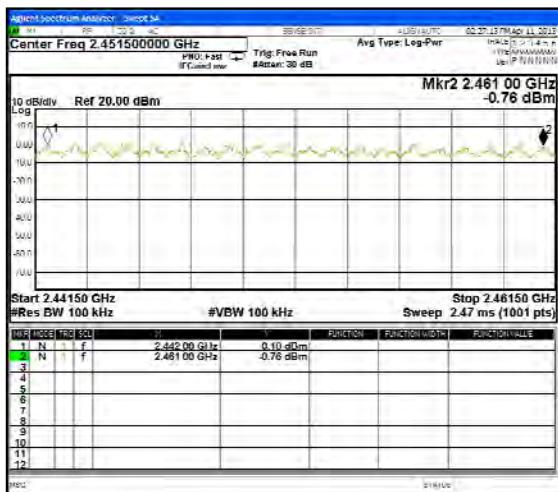


8. Channel Separation

8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.
2. The test instruments mark by "X" are used to measure the final test results.

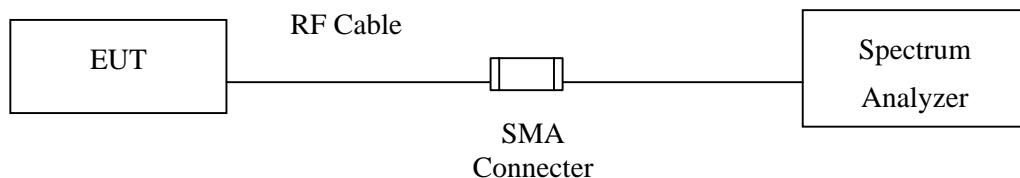8.2. Test Setup



8.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.5. Uncertainty


± 150Hz

8.6. Test Result of Channel Separation


Product : TABLET PC
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	753.3	Pass
39	2441	1000	>25 kHz	760.0	Pass
78	2480	1000	>25 kHz	753.3	Pass

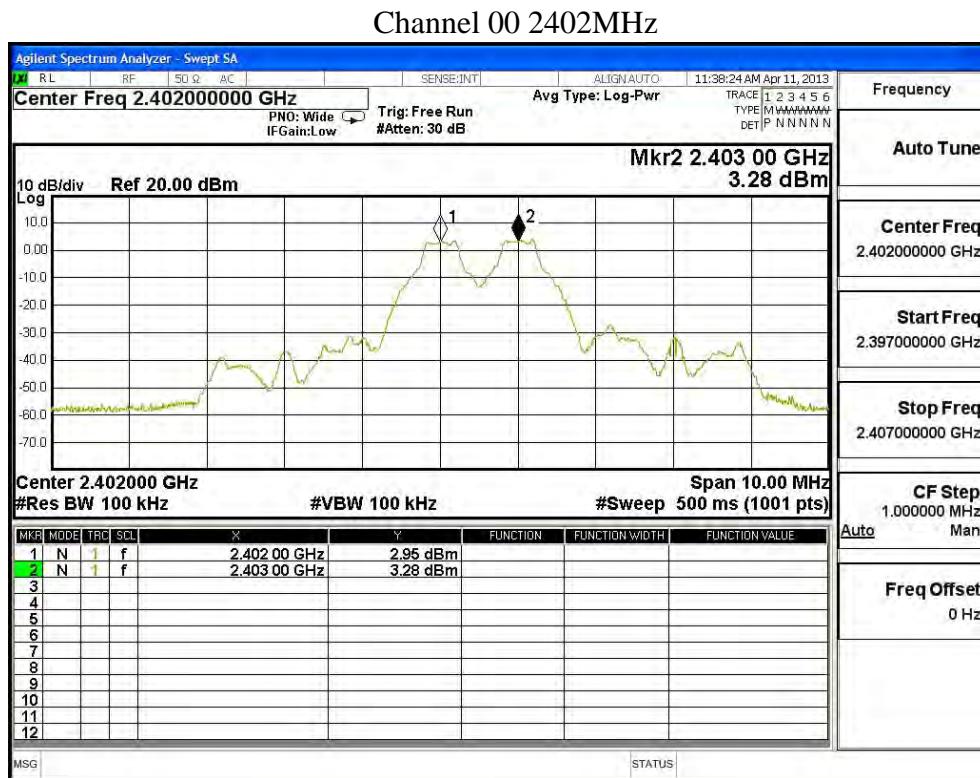
NOTE: The 20dB Bandwidth is refer to section 10.



Channel 39 2441MHz

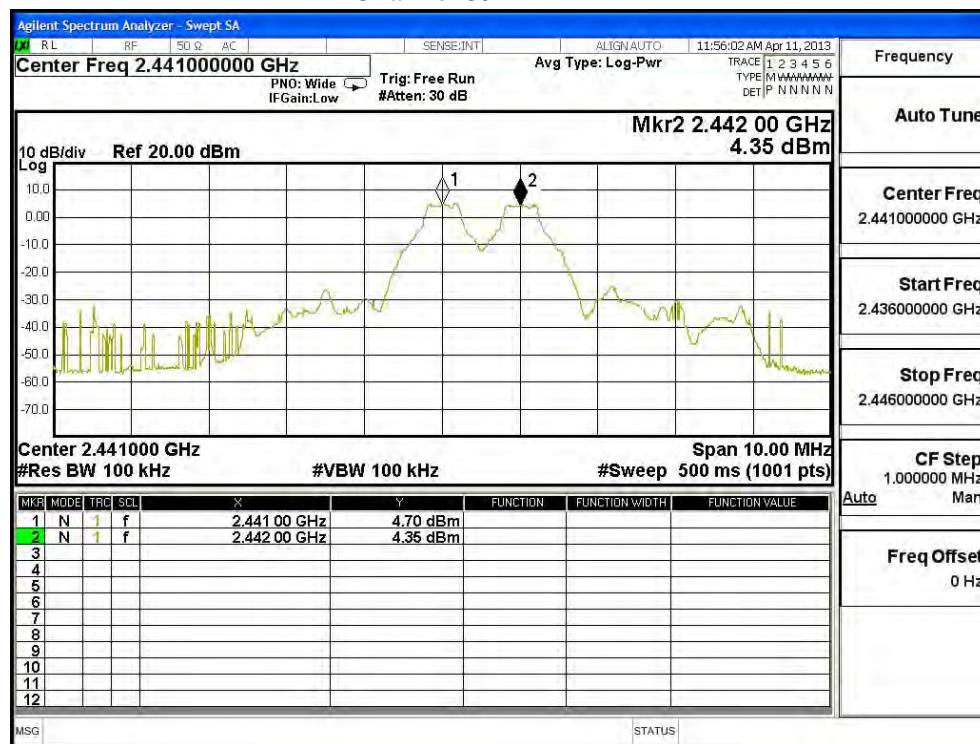

Channel 78 2480 MHz

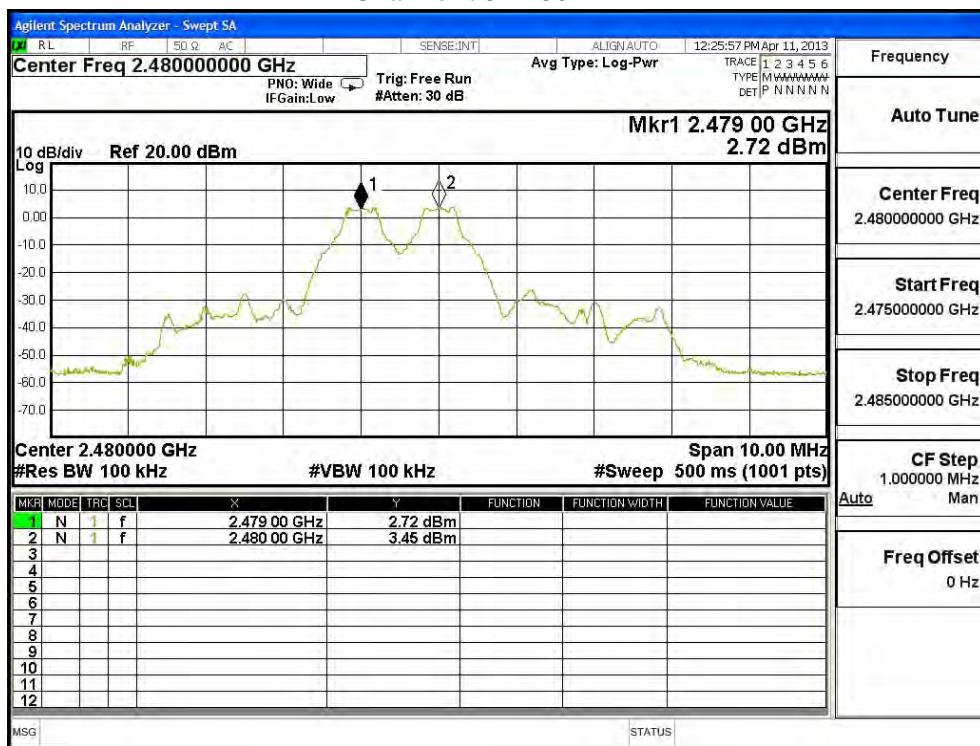


Product : TABLET PC
 Test Item : Channel Separation
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	926.7	Pass
39	2441	1000	>25 kHz	926.7	Pass
78	2480	1000	>25 kHz	926.7	Pass

NOTE: The 20dB Bandwidth is refer to section 10.

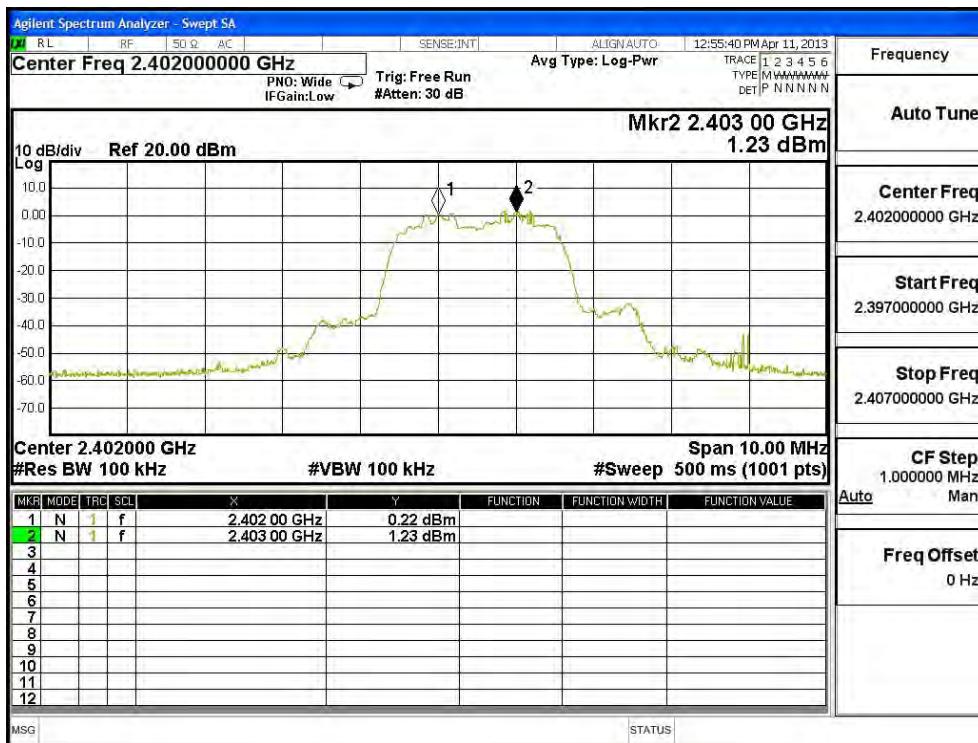
Channel 00 2402MHz



Channel 39 2441MHz

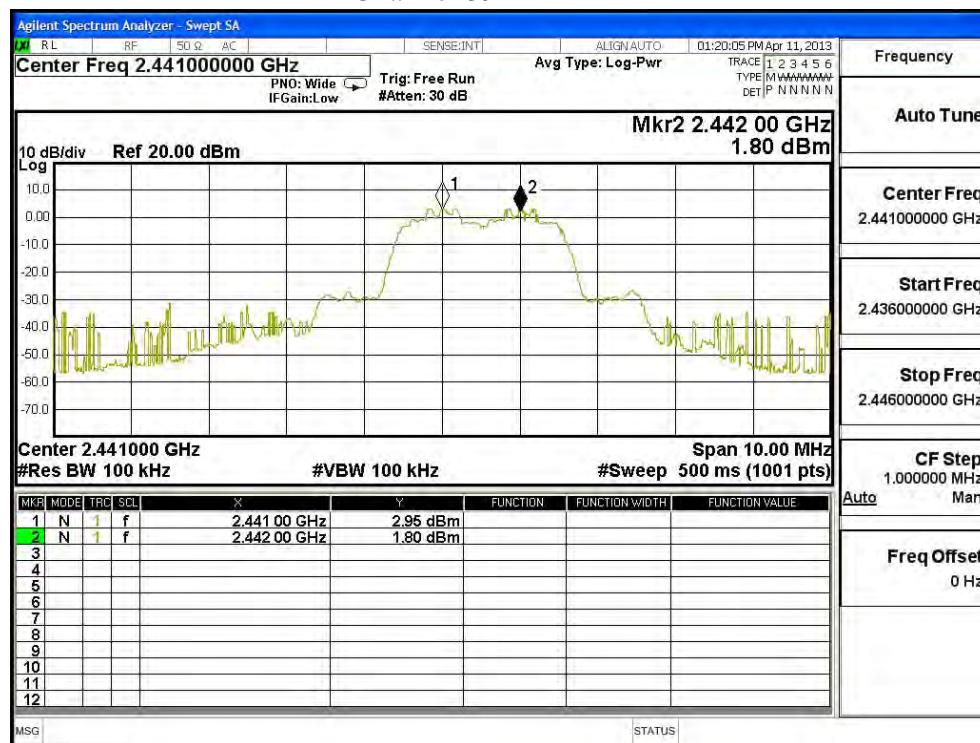

Channel 78 2480 MHz

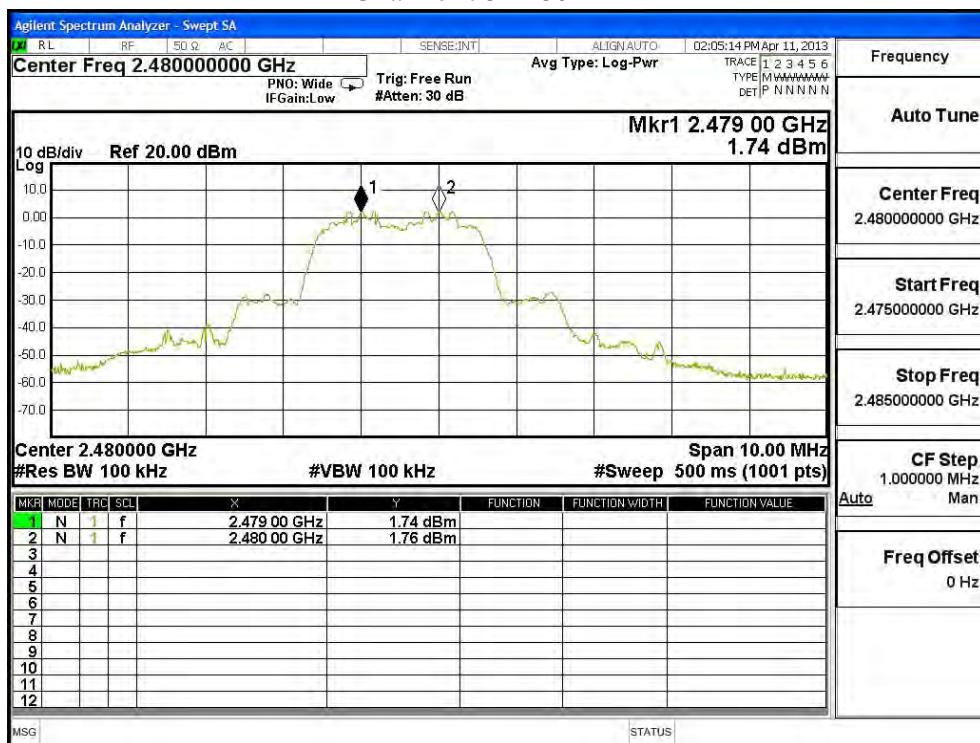


9. Dwell Time

9.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr, 2013

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

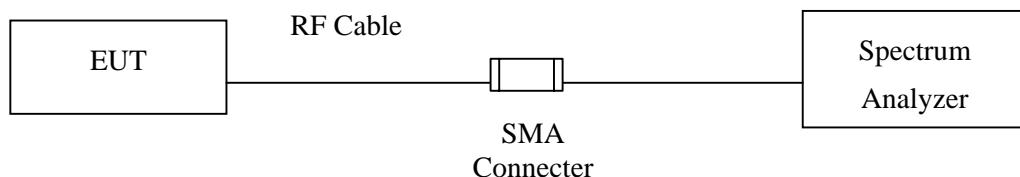9.2. Test Setup



9.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

9.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.5. Uncertainty

± 25msec

9.6. Test Result of Dwell Time


Product : TABLET PC
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 -DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.895	13	50	0.75	0.301	0.4	Pass
2441	2.887	13	50	0.75	0.300	0.4	Pass
2480	2.887	13	50	0.75	0.300	0.4	Pass


Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)

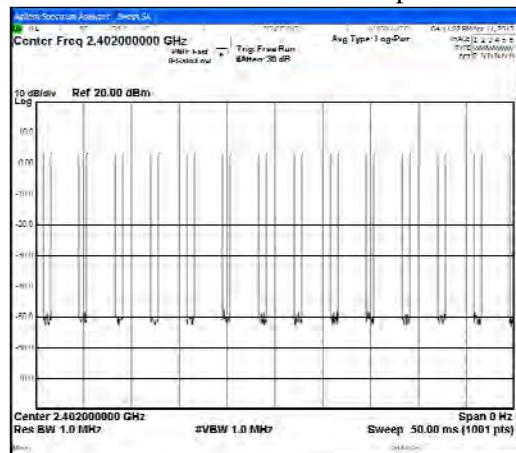
CH 00 Time Interval between hops




CH 00 Transmission Time

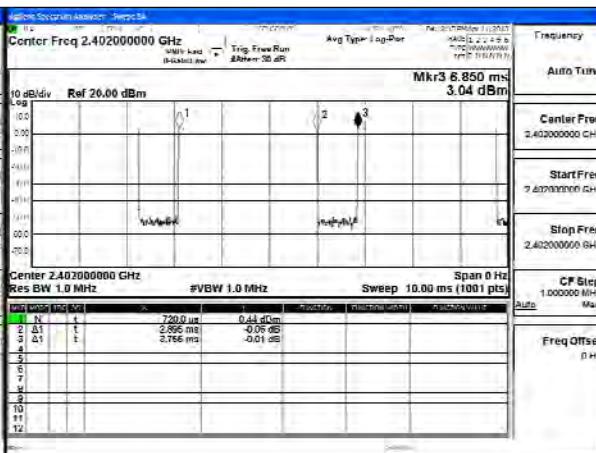


CH39 Time Interval between hops

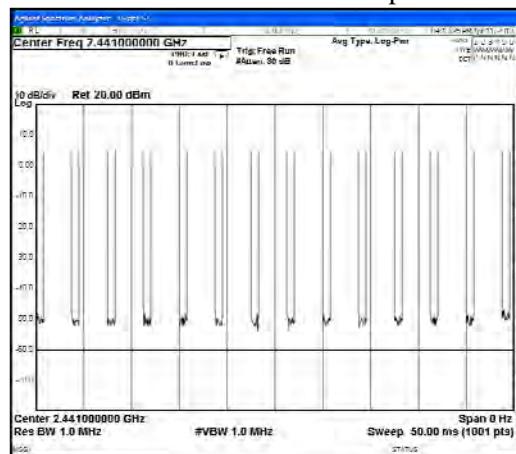


CH 39 Transmission Time

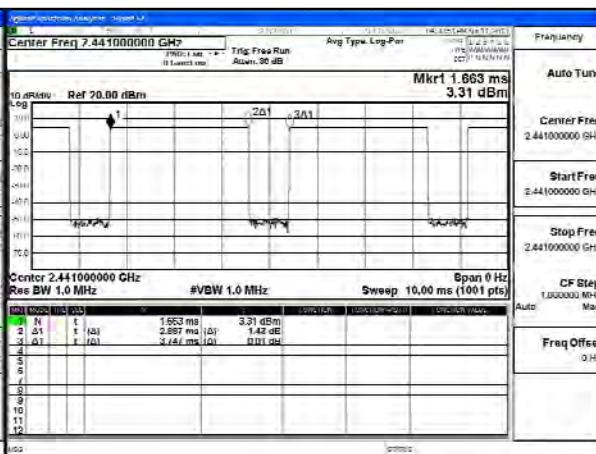

CH 78 Time Interval between hops

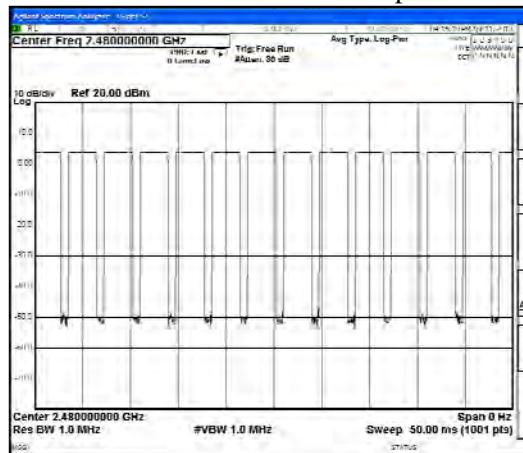

CH 78 Transmission Time

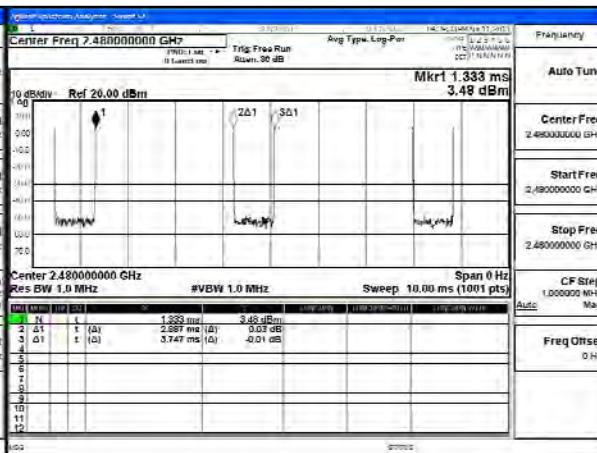

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : TABLET PC
 Test Item : Dwell Time
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 -DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.905	14	50	0.81	0.325	0.4	Pass
2441	2.897	13	50	0.75	0.301	0.4	Pass
2480	2.887	13	50	0.75	0.300	0.4	Pass


Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)

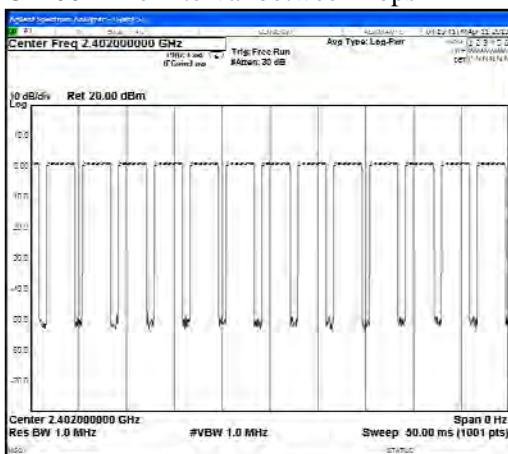
CH 00 Time Interval between hops




CH 00 Transmission Time

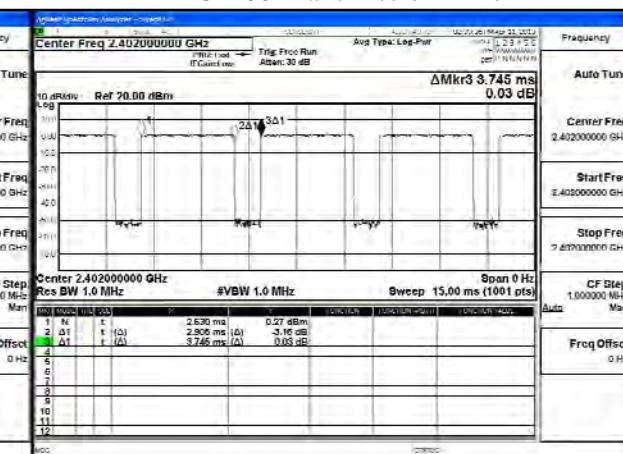


CH39 Time Interval between hops

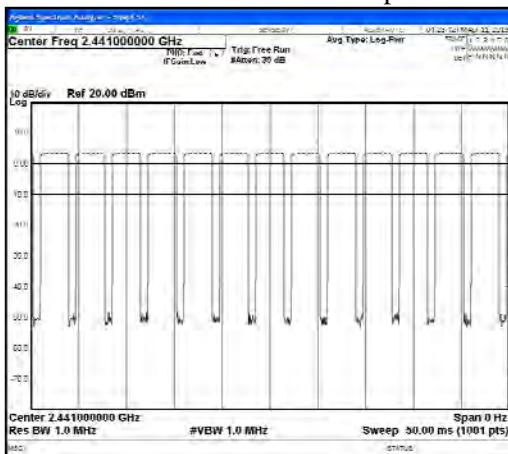


CH 39 Transmission Time

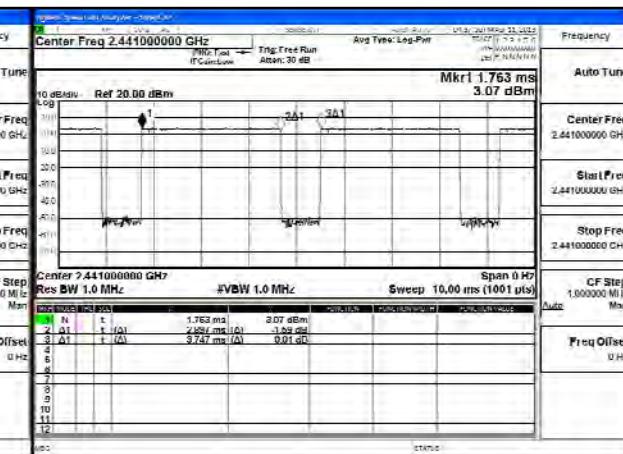

CH 78 Time Interval between hops

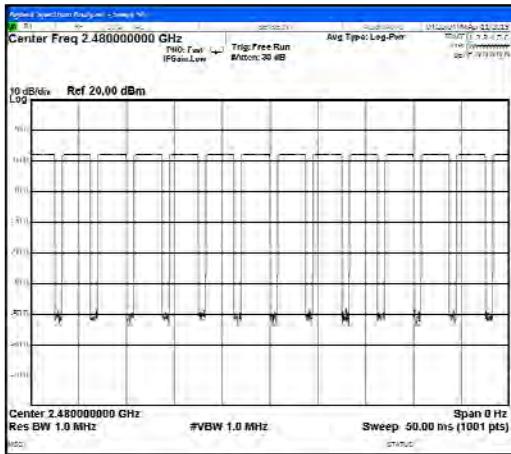

CH 78 Transmission Time

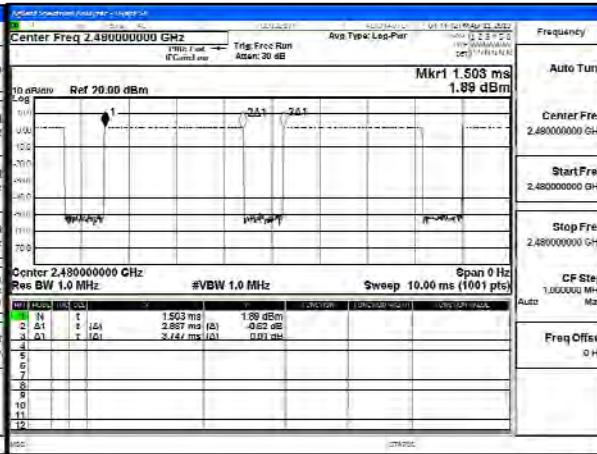

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


10. Occupied Bandwidth (20dB BW)

10.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

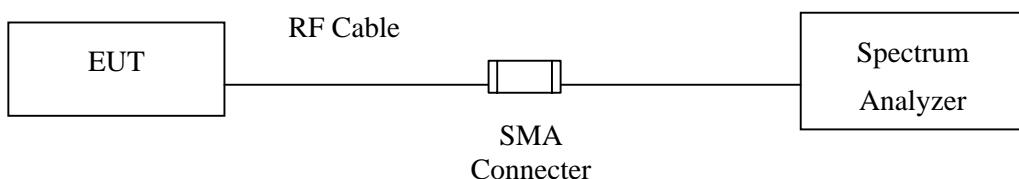10.2. Test Setup



10.3. Limits

N/A

10.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.5. Uncertainty


± 150Hz

10.6. Test Result of Occupied Bandwidth

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1130	--	NA

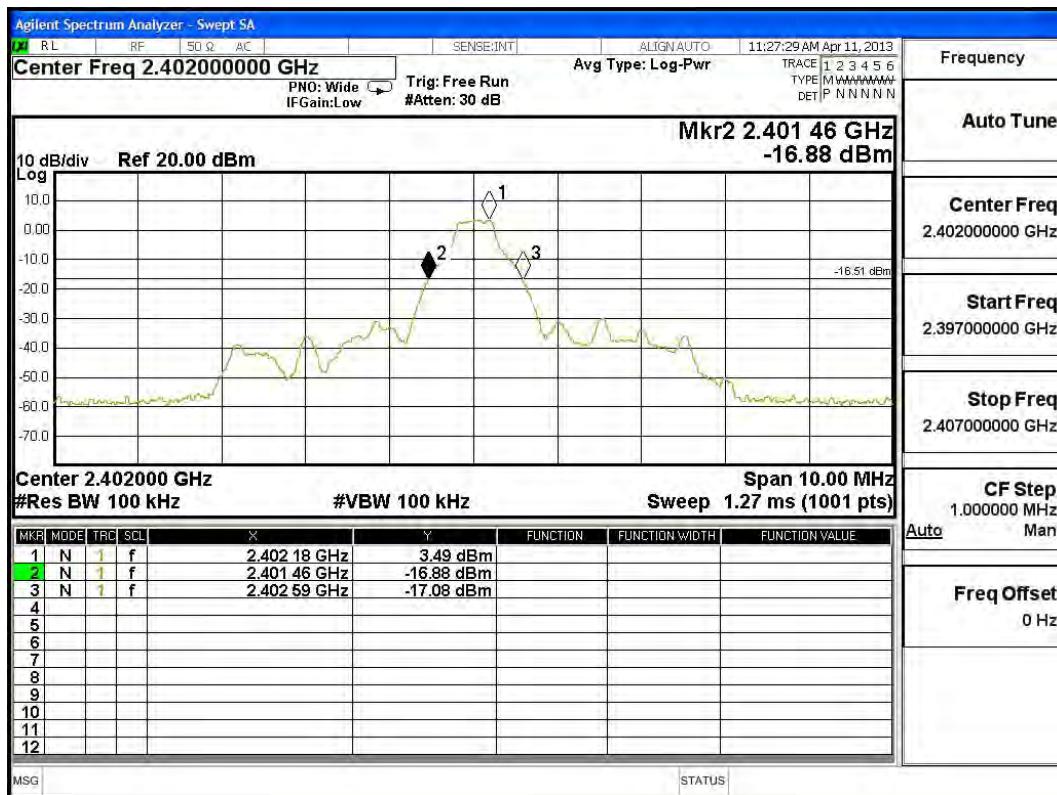
Figure Channel 00:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1140	--	NA

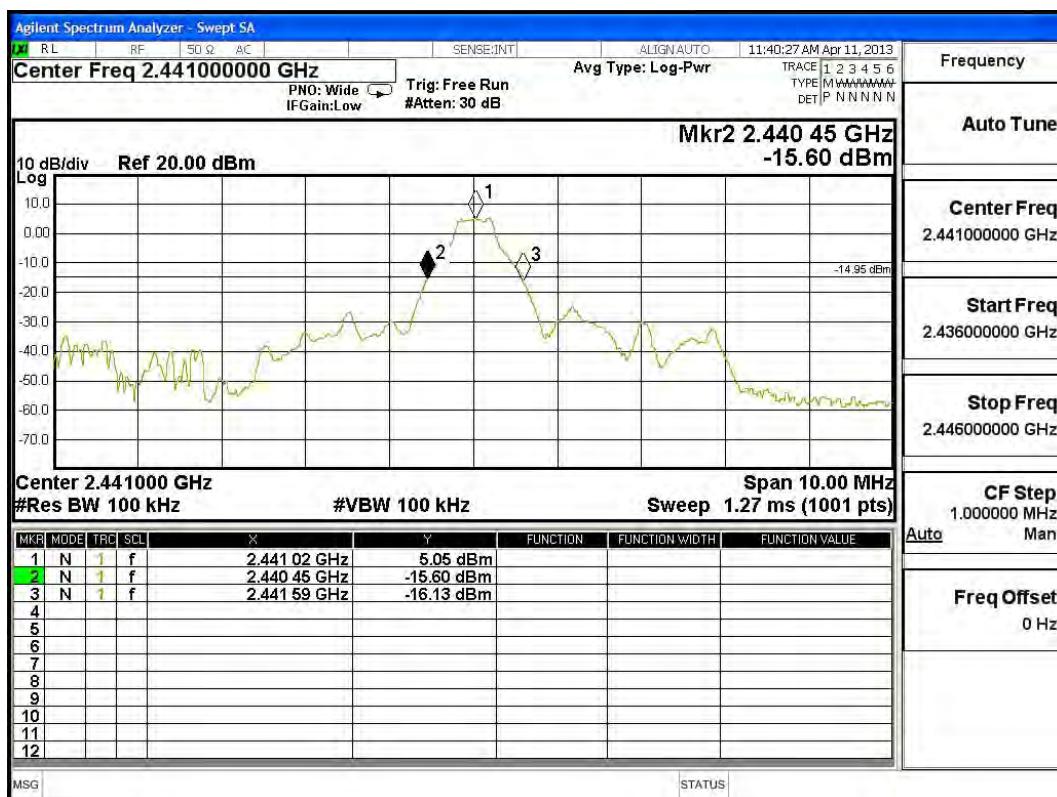Figure Channel 39:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1130	--	NA


Figure Channel 78:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1390	--	NA

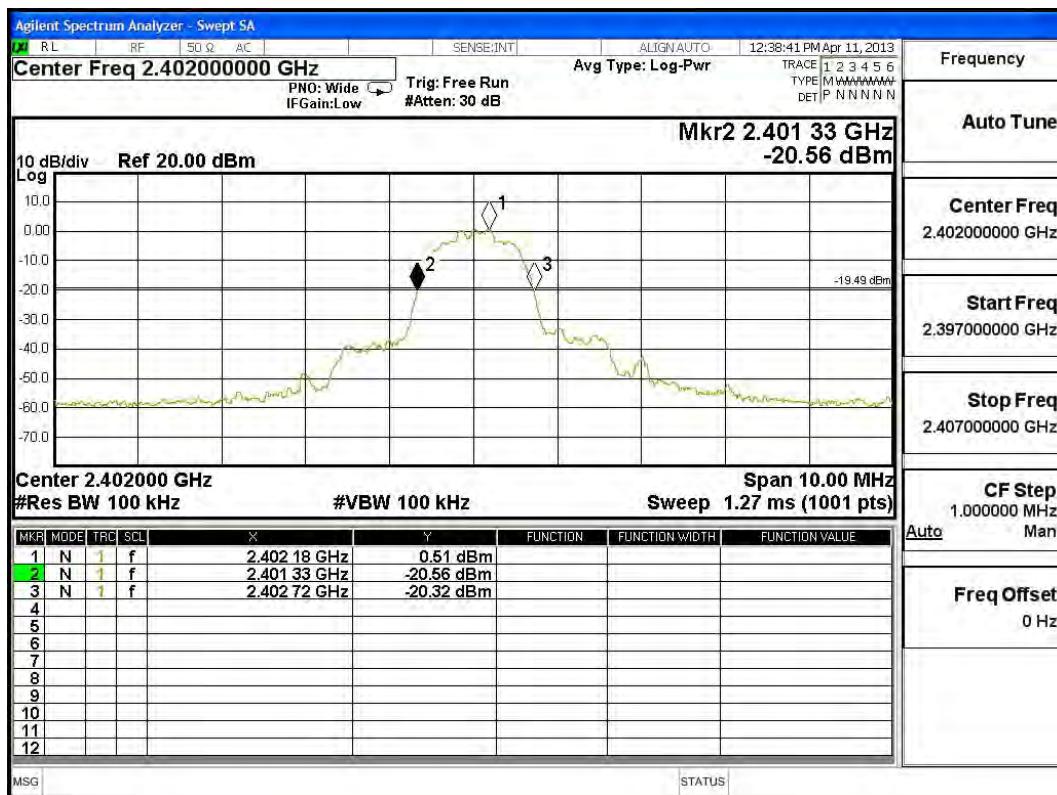
Figure Channel 00:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1390	--	NA

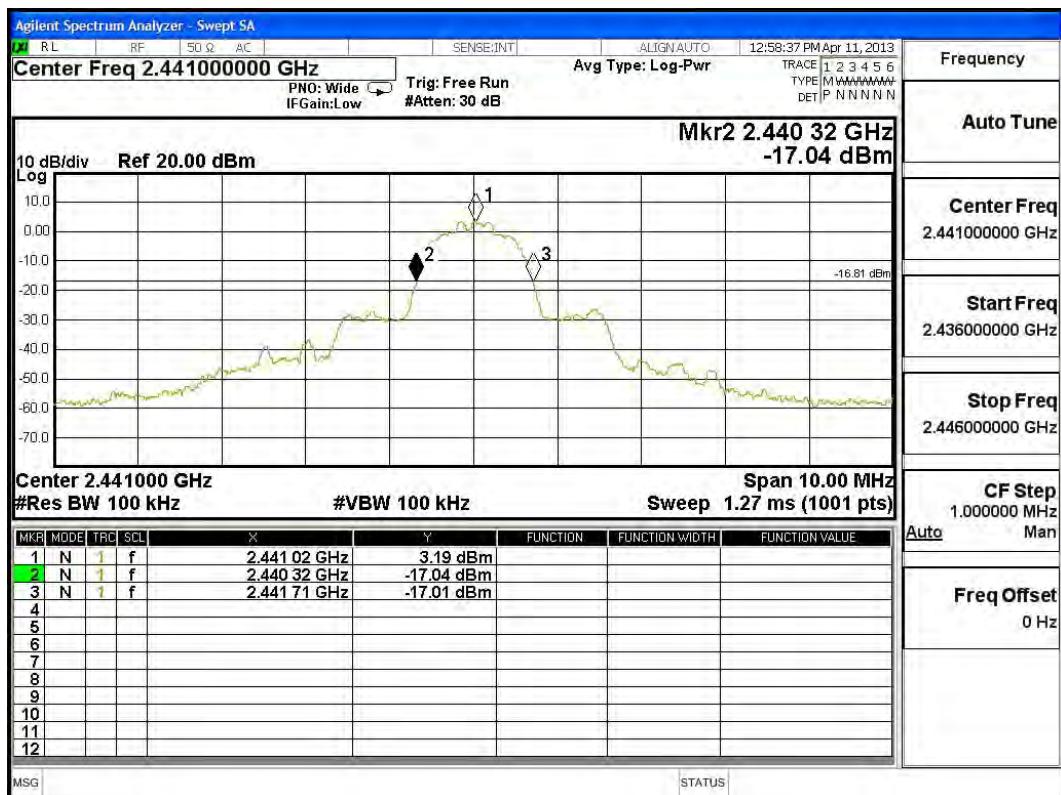
Figure Channel 39:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1390	--	NA

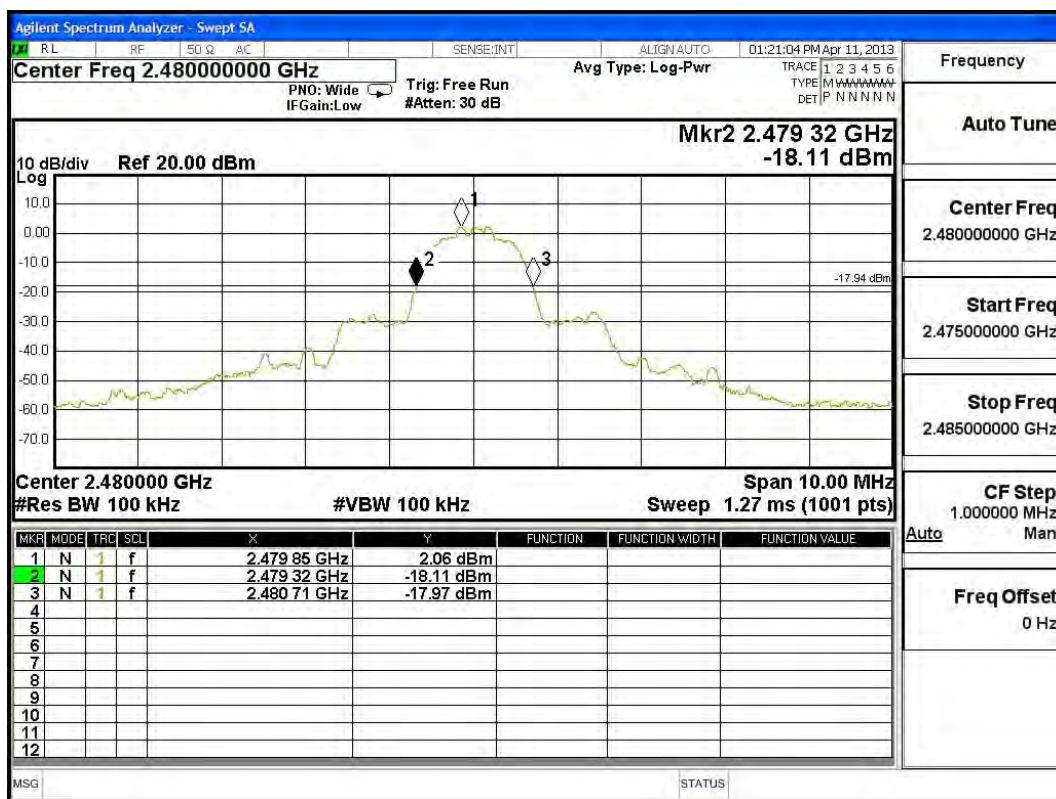Figure Channel 78:



11. Occupied Bandwidth (6dB BW)


11.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

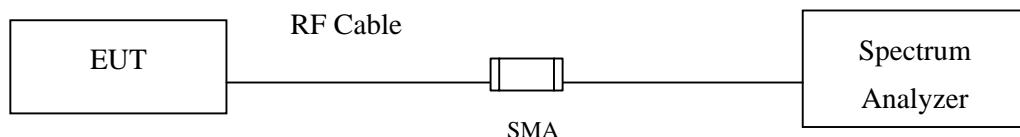11.2. Test Setup



11.3. Limits

The minimum bandwidth shall be at least 500 kHz.

11.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

11.5. Uncertainty


$\pm 150\text{Hz}$

11.6. Test Result of Occupied Bandwidth

Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	970.0	>500	Pass

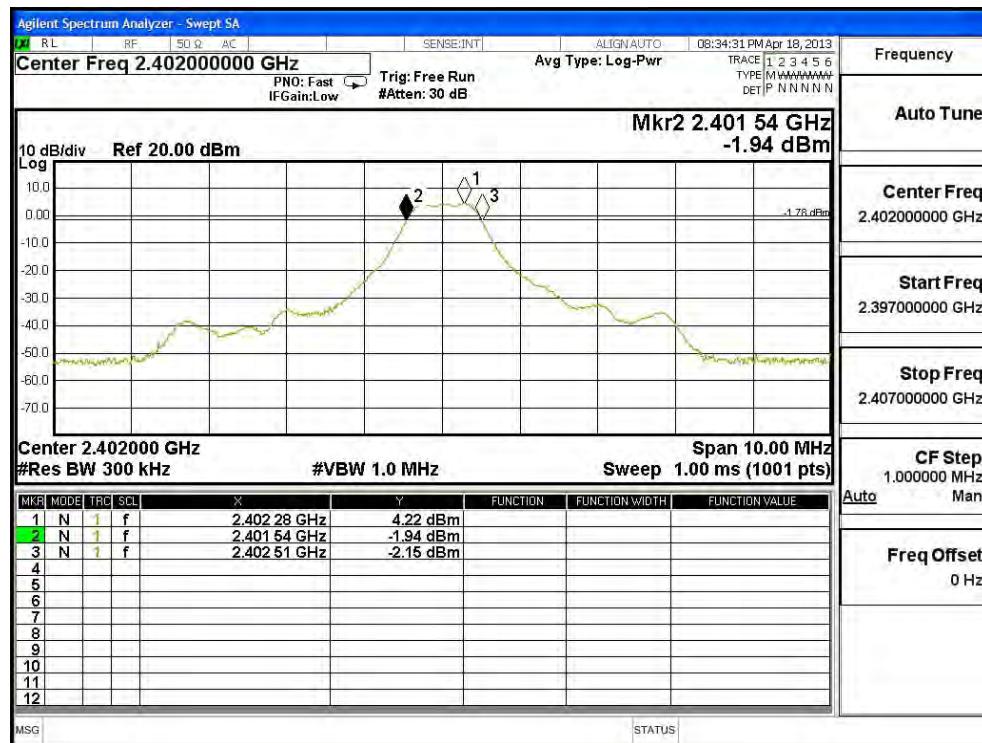
Figure Channel 00:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2440	980.0	>500	Pass

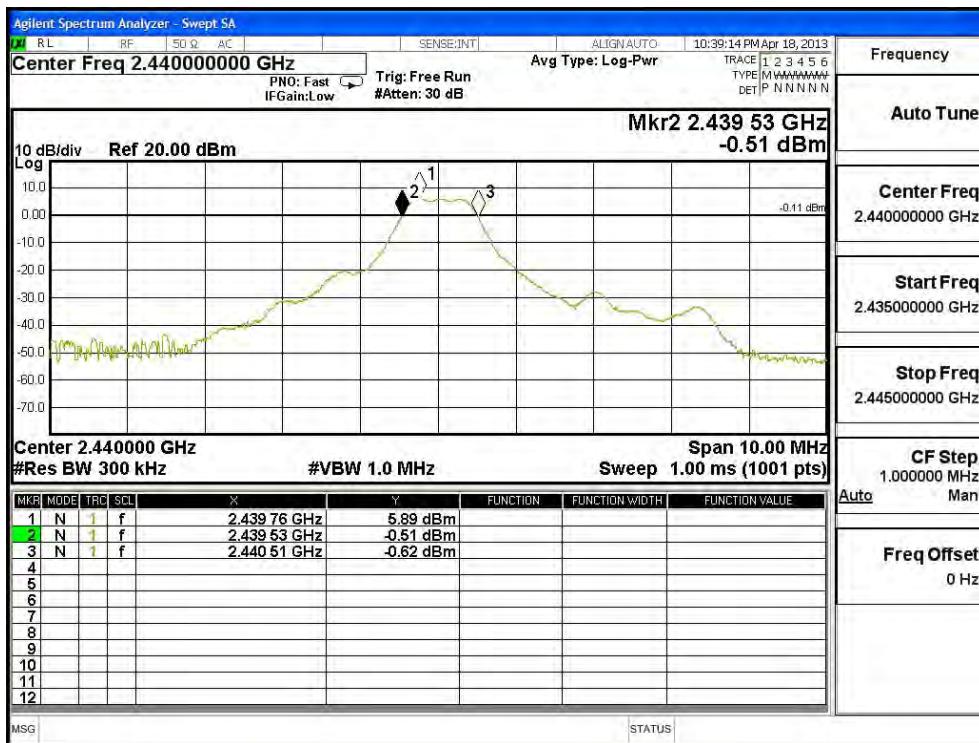
Figure Channel 19:



Product : TABLET PC
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2480	970.0	>500	Pass

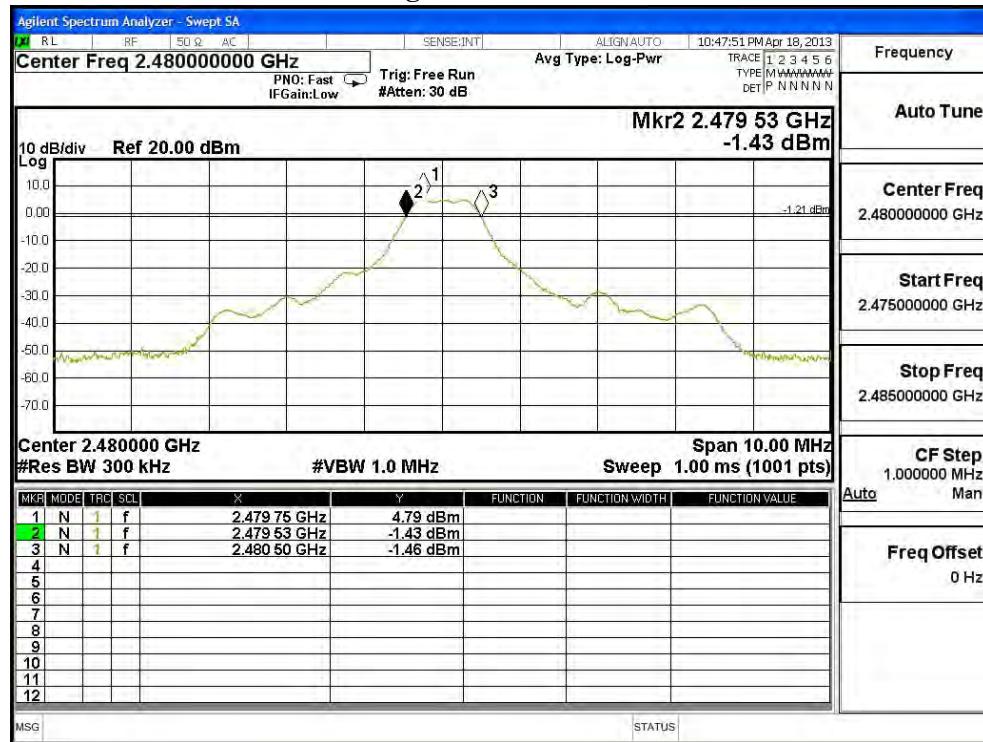Figure Channel 39:



12. Power Density


12.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

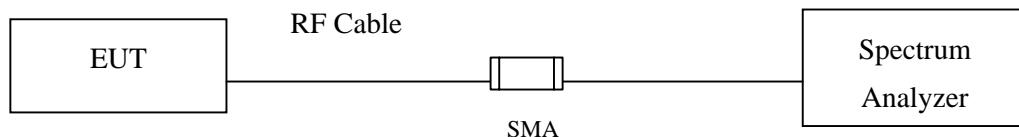12.2. Test Setup



12.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

12.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, VBW \geq 300KHz, SPAN to 5-30 % greater than the EBW,

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF = $10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$.

12.5. Uncertainty


$\pm 1.27 \text{ dB}$

12.6. Test Result of Power Density

Product : TABLET PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-11.727	< 8dBm	Pass

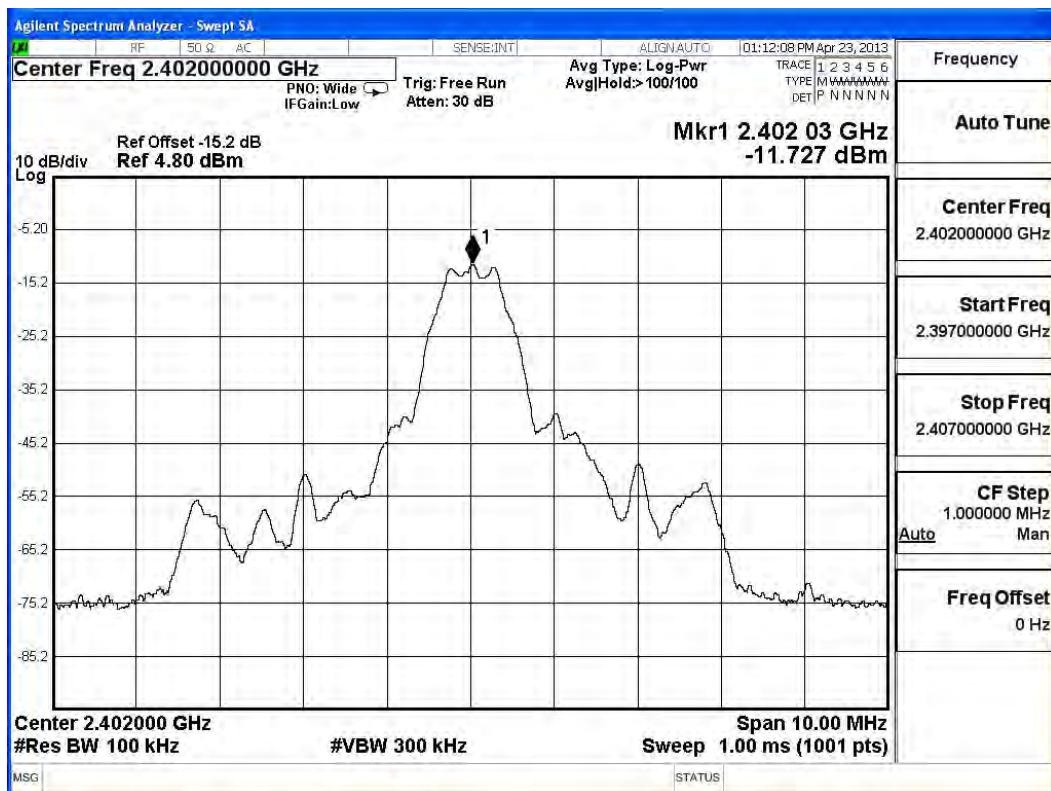
Figure Channel 00:



Product : TABLET PC
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2440	-9.439	< 8dBm	Pass

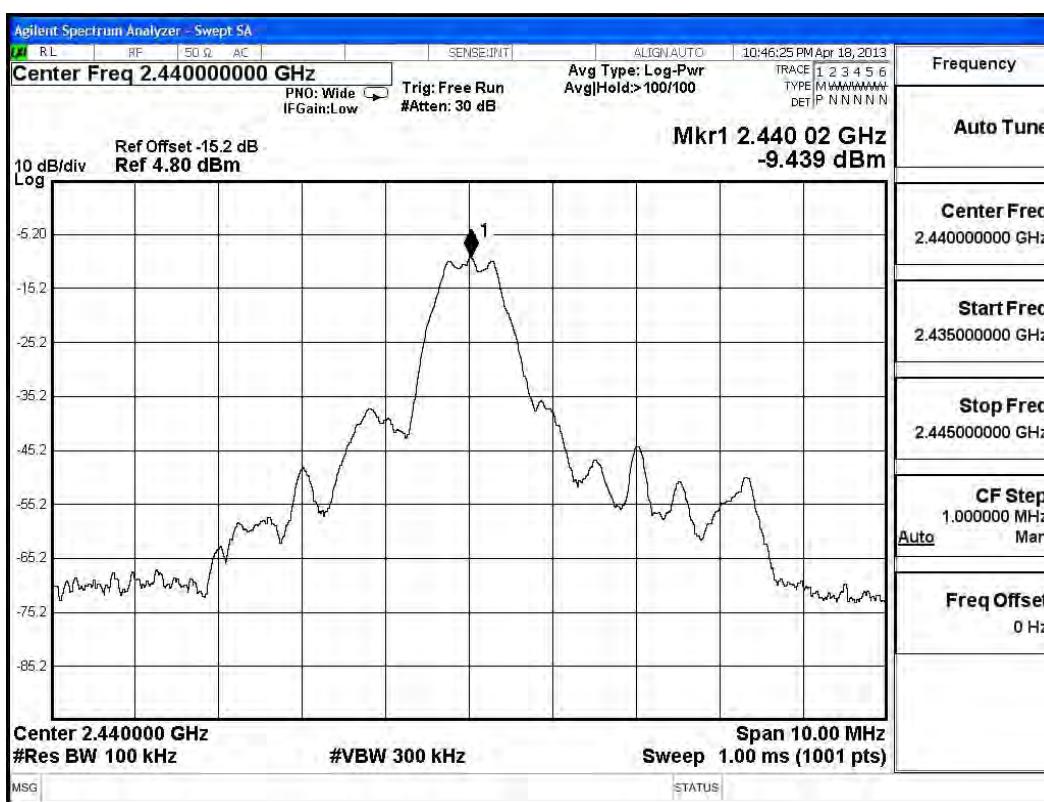
Figure Channel 19:



Product : TABLET PC
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit - BLE (GFSK) (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2480	-10.349	< 8dBm	Pass

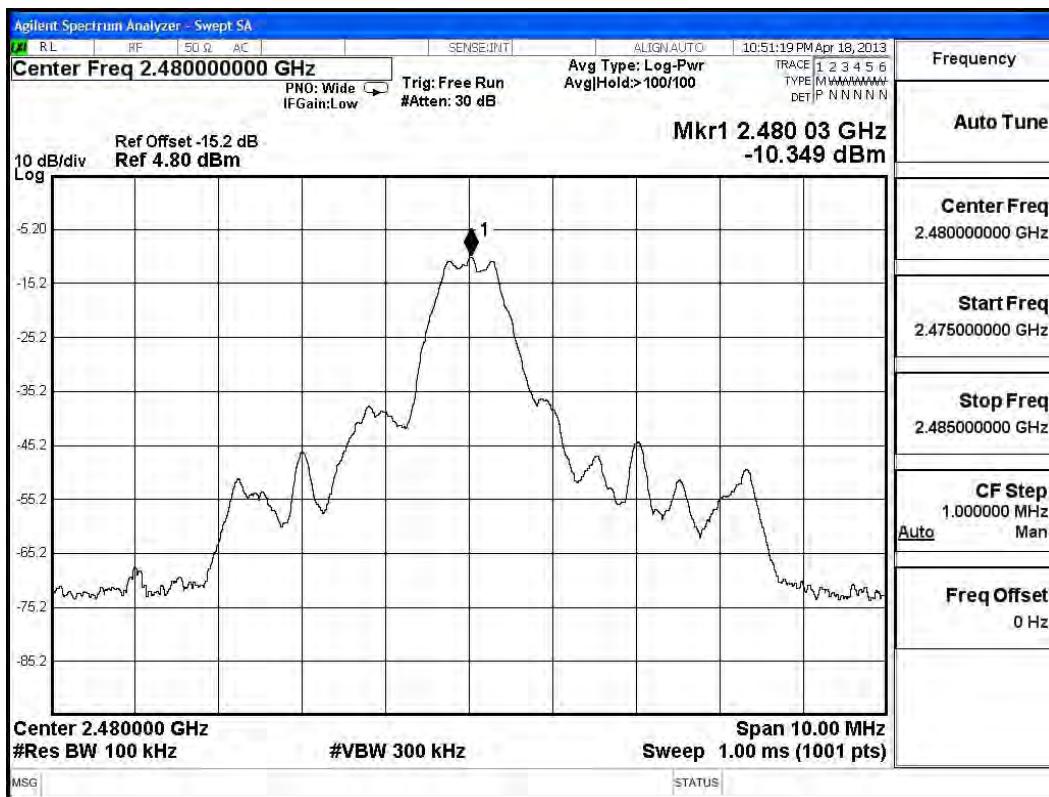Figure Channel 39:



13. EMI Reduction Method During Compliance Testing

No modification was made during testing.