



Compliance Certification Services Inc.

Report No: C140904S02-SF-R1

FCCID: ZXL-EZTWOB1

Date of Issue :Sep. 11, 2014

GSM 850-Right Head Cheek Low CH128	2
GSM 850-Right Head Cheek Middle CH190	3
GSM 850-Right Head Cheek High CH251	4
GSM 850-Right Head Tilted High CH251	5
GSM 850-Left Head Cheek High CH251	6
GSM 850-Left Head Tilted High CH251	7
GSM1900-Right Head Cheek Low CH512	8
GSM1900-Right Head Tilted Low CH512	9
GSM1900 -Left Head Cheek Low CH512	10
GSM1900 -Left Head Tilted Low CH512	11
WCDMA BandV-Right Head Cheek Low CH4132	12
WCDMA BandV-Right Head Cheek Middle CH4182	13
WCDMA BandV-Right Head Cheek High CH4233	14
WCDMA BandV-Right Head Tilted High CH4233	15
WCDMA BandV-Left Head Cheek Low CH4132	16
WCDMA BandV-Left Head Cheek Middle CH4182	17
WCDMA BandV-Left Head Cheek High CH4233	18
WCDMA BandV-Left Head Tilted High CH4233	19
WCDMA BandII-Right Head Cheek Low CH9262	20
WCDMA BandII-Right Head Tilted Low CH9262	21
WCDMA BandII-Left Head Cheek Low CH9262	22
WCDMA BandII-Left Head Tilted Low CH9262	23
GSM850-Body Front High CH251	24
GSM850-Body Rear High CH251	25
GSM1900-Body Front Low CH512	26
GSM1900-Body Rear Low CH512	27
WCDMA Band V-Body Front High CH4233	28
WCDMA Band V-Body Rear Low CH4132	29
WCDMA Band V-Body Rear Middle CH4182	30
WCDMA Band V-Body Rear High CH4233	31
WCDMA Band II-Body Front Low CH9262	32
WCDMA Band II-Body Rear Low CH9262	33
WCDMA Band V-Body repeat Rear High CH4233	34
WCDMA Band V-Body repeat Left High CH4233	35



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM 850-Right Head Cheek Low CH128

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);
Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.361$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Right Head Cheek Low CH128/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.861 W/kg


GSM850/Right Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.849 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.909 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 0.745 W/kg

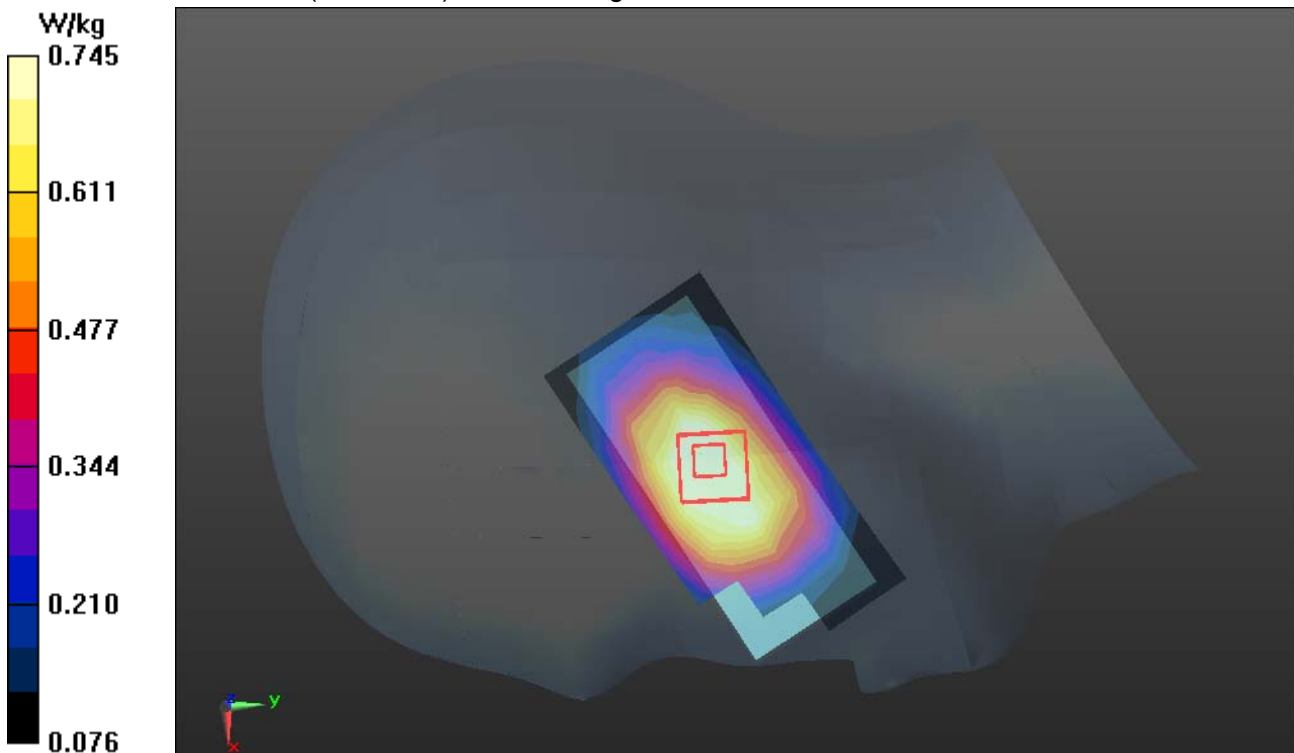



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM 850-Right Head Cheek Middle CH190

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.248$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Right Head Cheek Middle CH190/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.933 W/kg


GSM850/Right Head Cheek Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.467 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.986 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.546 W/kg

Maximum value of SAR (measured) = 0.803 W/kg

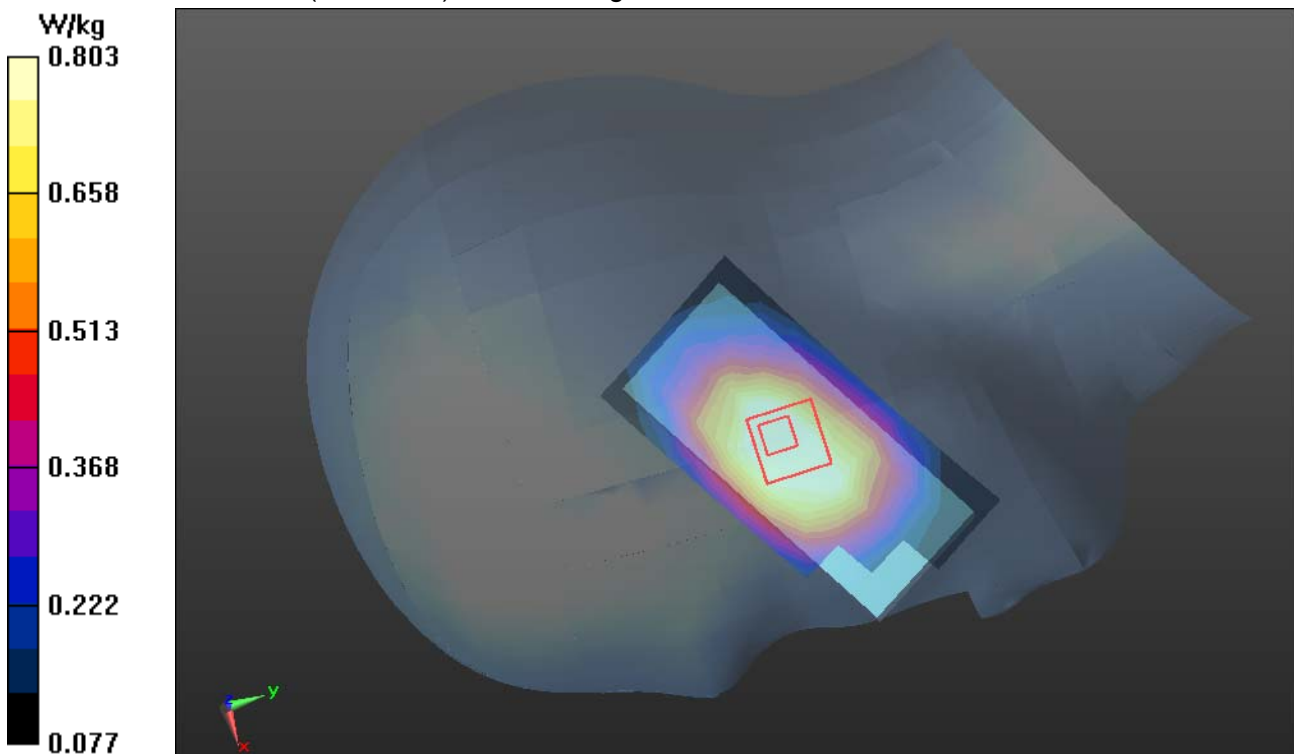



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM 850-Right Head Cheek High CH251

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.136$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Right Head Cheek High CH251/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg


GSM850/Right Head Cheek High CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.6209 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 0.735 W/kg

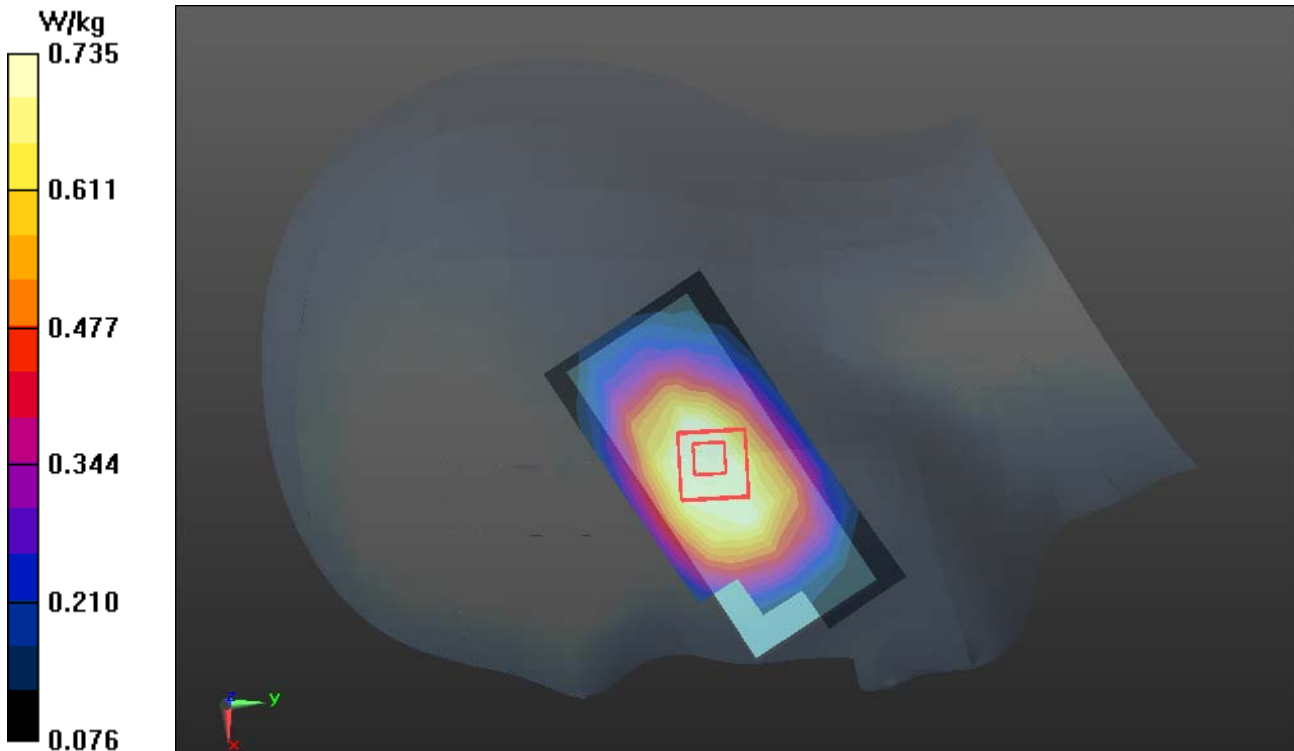



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM 850-Right Head Tilted High CH251

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.136$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Right Head Tilted High CH251/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.805 W/kg


GSM850/Right Head Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.579 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (measured) = 0.759 W/kg

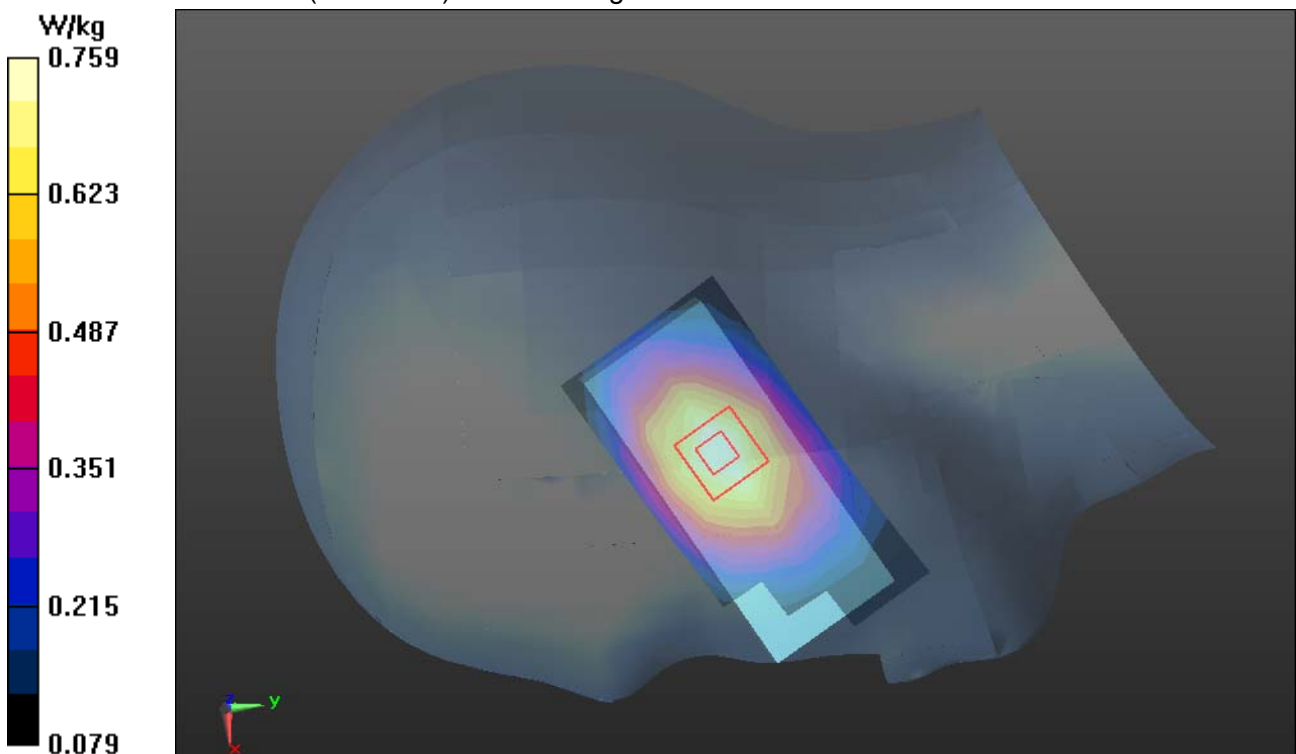



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM 850-Left Head Cheek High CH251

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.136$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Cheek High CH251/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.880 W/kg


GSM850/Left Head Cheek High CH251/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.163 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.518 W/kg

Maximum value of SAR (measured) = 0.897 W/kg

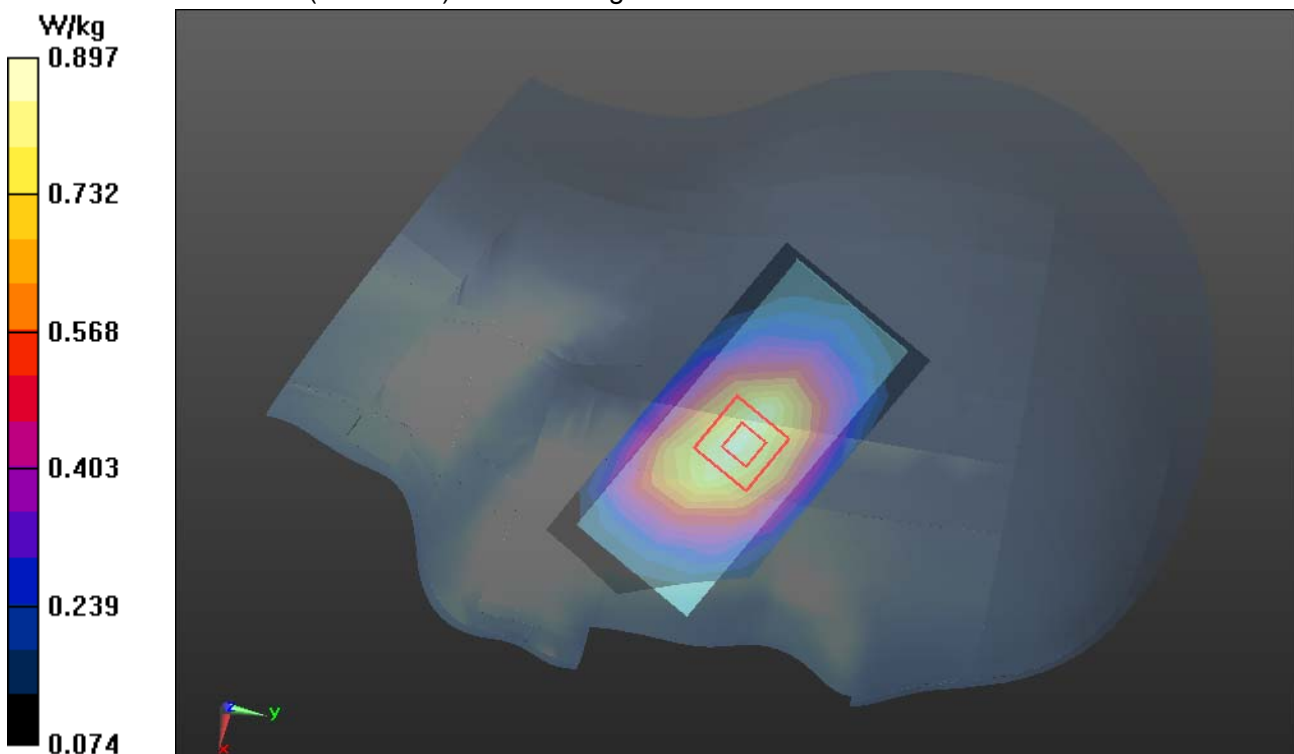



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM 850-Left Head Tilted High CH251

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.6 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.136$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Tilted High CH251/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.740 W/kg


GSM850/Left Head Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.645 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 0.706 W/kg

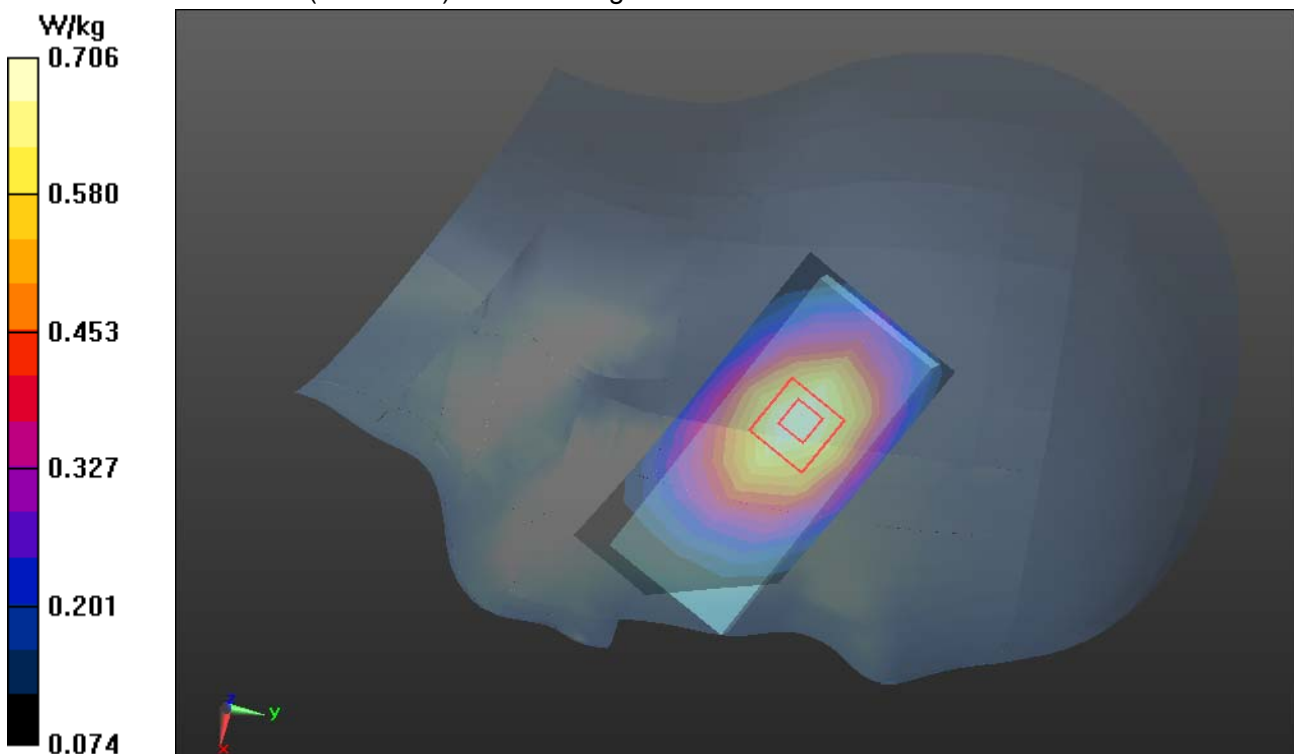



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM1900-Right Head Cheek Low CH512

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.894$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Right Head Cheek Low CH512/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.302 W/kg


PCS1900/Right Head Cheek Low CH512/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.341 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

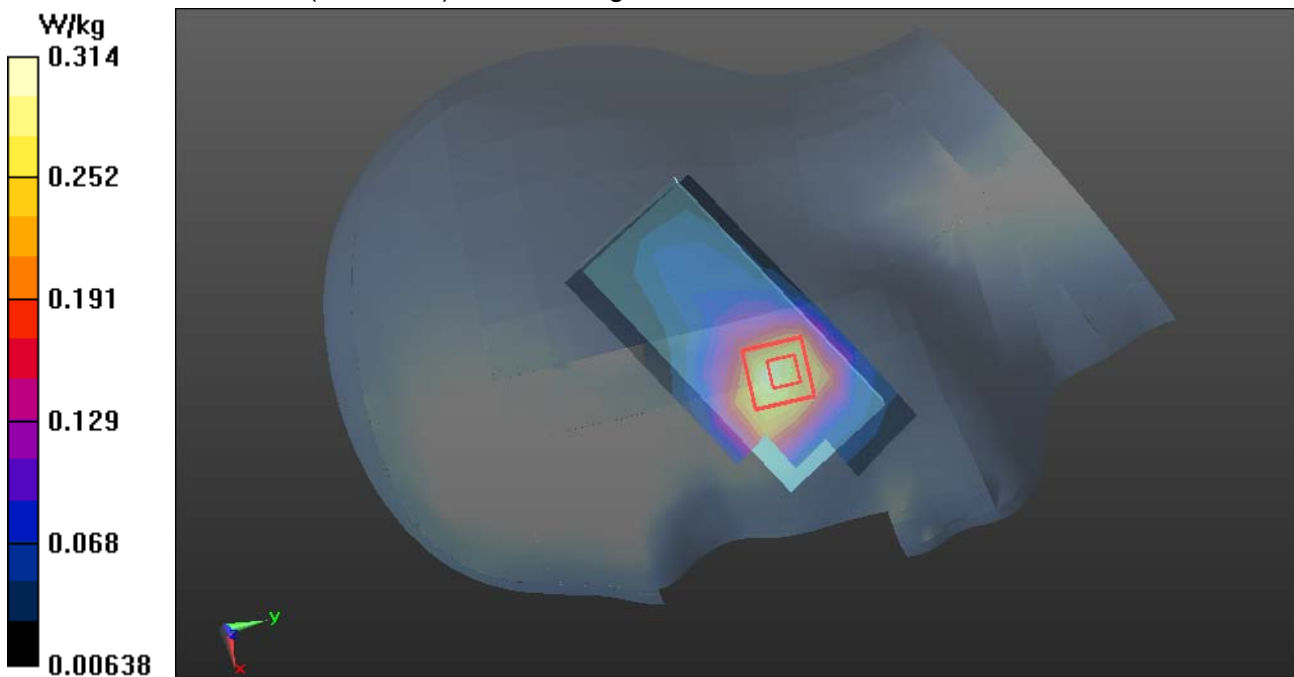



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM1900-Right Head Tilted Low CH512

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.894$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Right Head Tilted Low CH512/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0668 W/kg


PCS1900/Right Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.341 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0788 W/kg

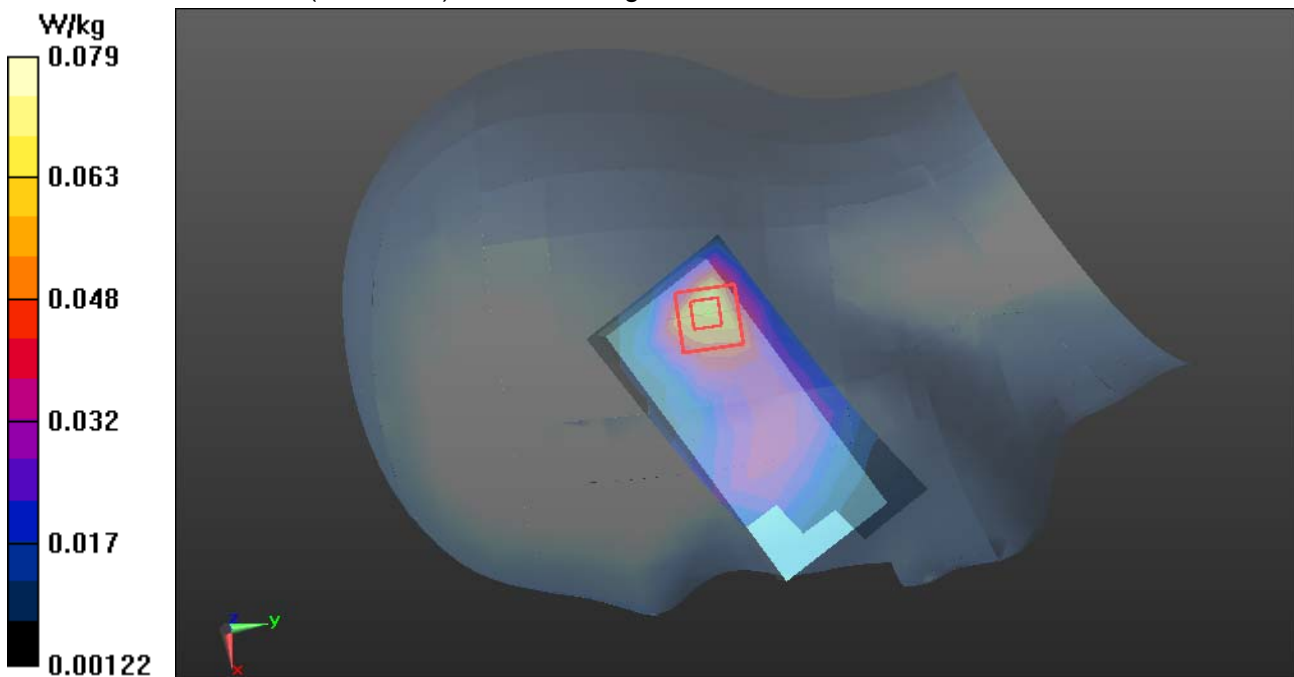



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM1900 -Left Head Cheek Low CH512

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.894$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM1900/Left Head Cheek Low CH512/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.459 W/kg


GSM1900/Left Head Cheek Low CH512/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.172 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.507 W/kg

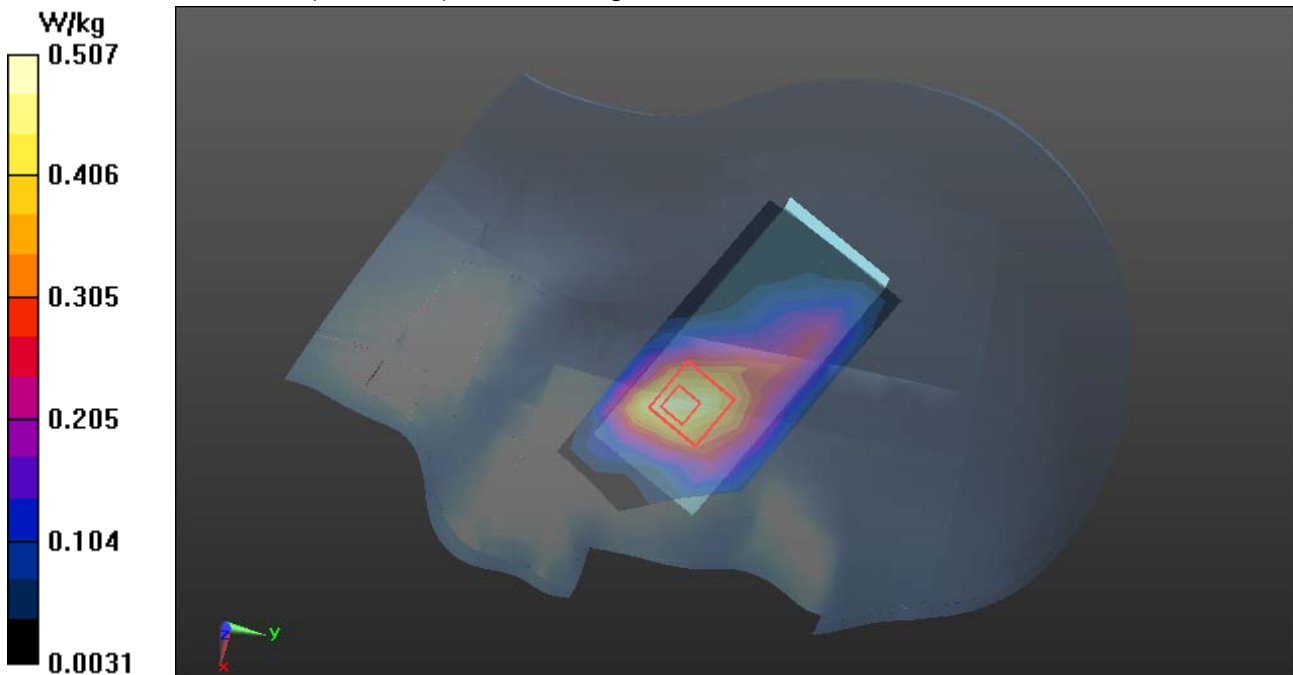



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM1900 -Left Head Tilted Low CH512

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.894$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM1900/Left Head Tilted Low CH512/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 W/kg


GSM1900/Left Head Tilted Low CH512/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.197 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

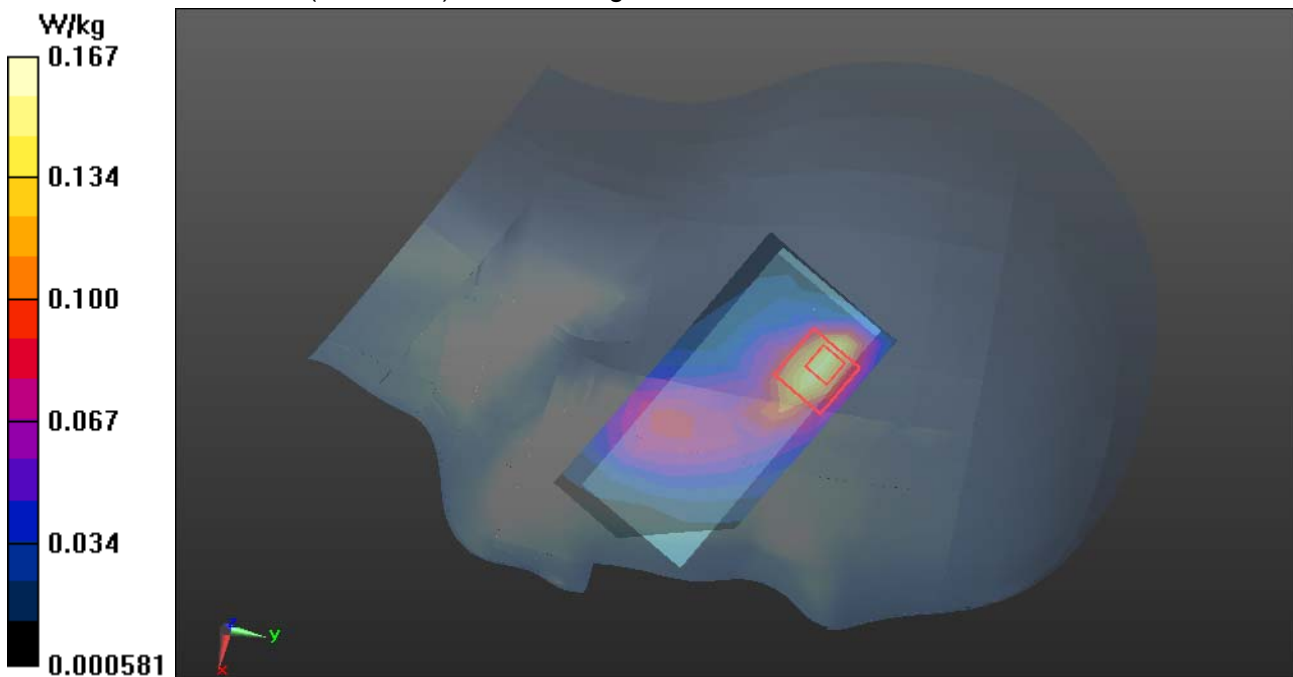



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Right Head Cheek Low CH4132

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.368$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Cheek Low CH4132/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg

WCDMA Band V/Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.234 V/m; Power Drift =0.04 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 0.603 W/kg

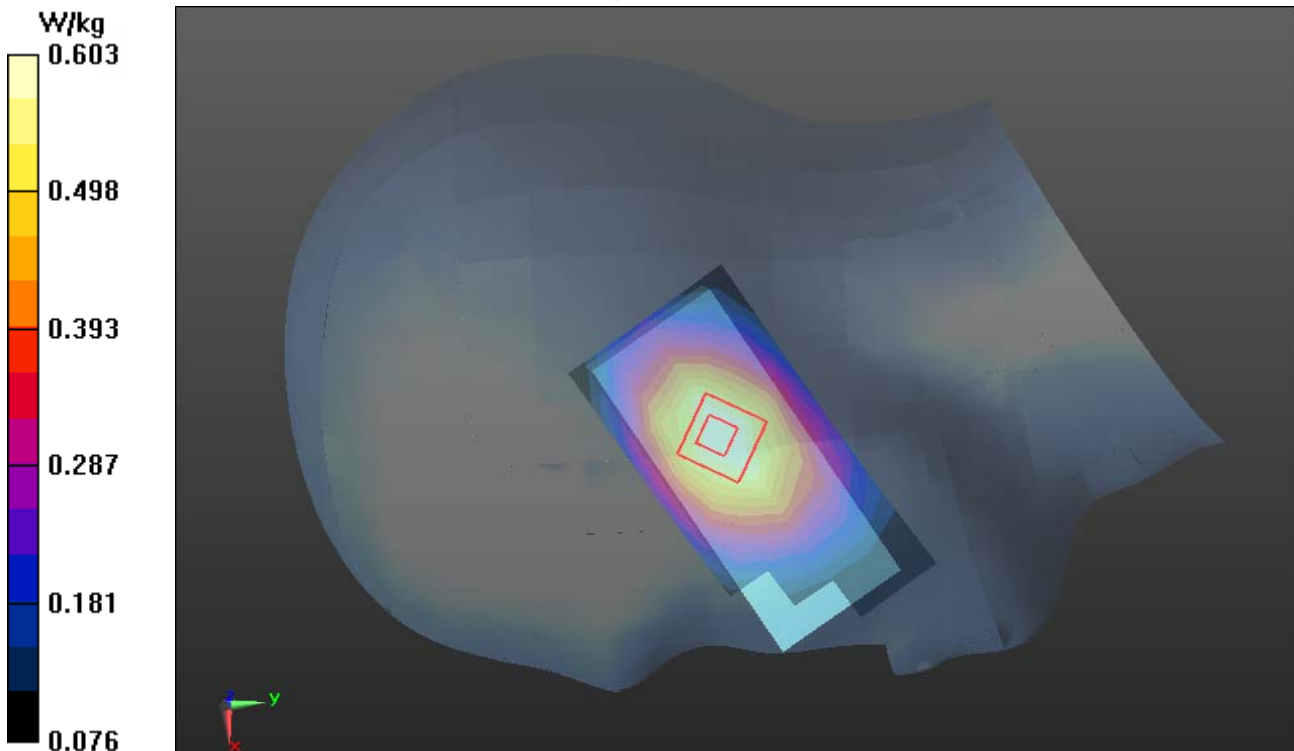



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Right Head Cheek Middle CH4182

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.248$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Cheek Middle CH4182/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.647 W/kg

WCDMA Band V/Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.127 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 0.608 W/kg

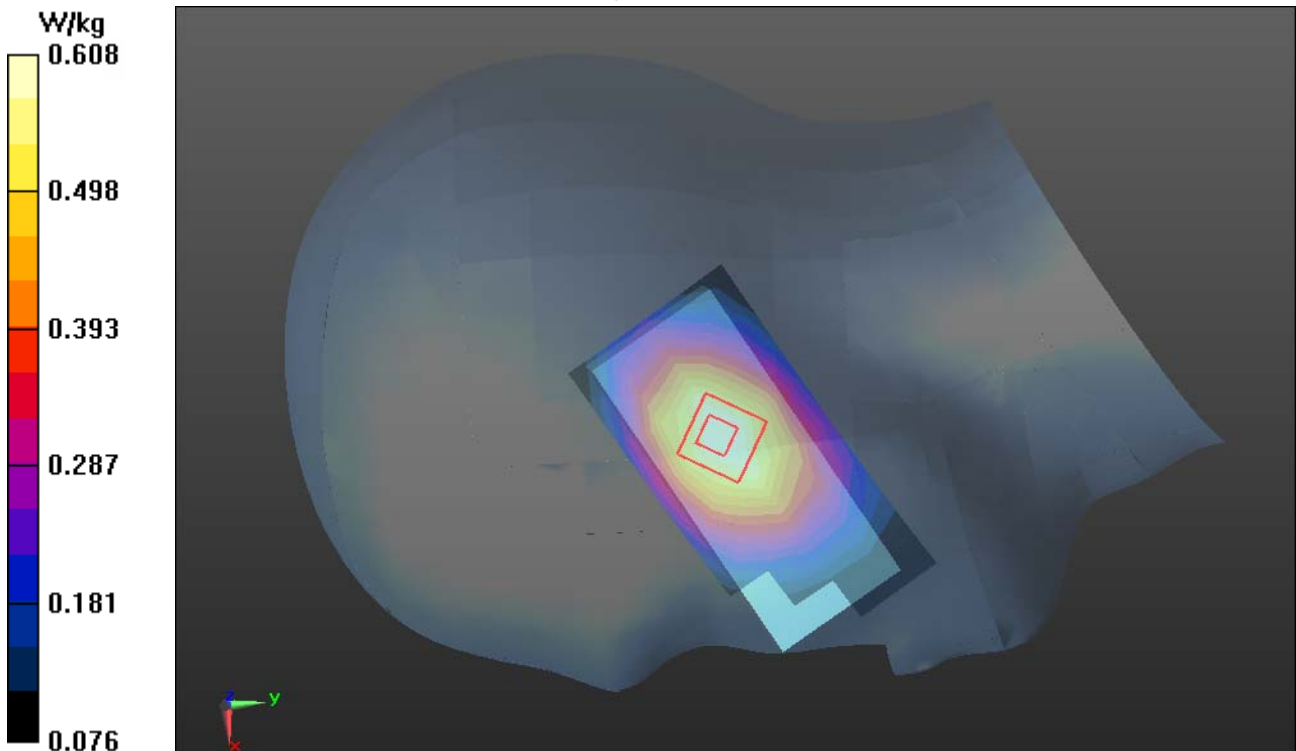



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Right Head Cheek High CH4233

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.161$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Cheek High CH4233/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg

WCDMA Band V/Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.012 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 0.629 W/kg

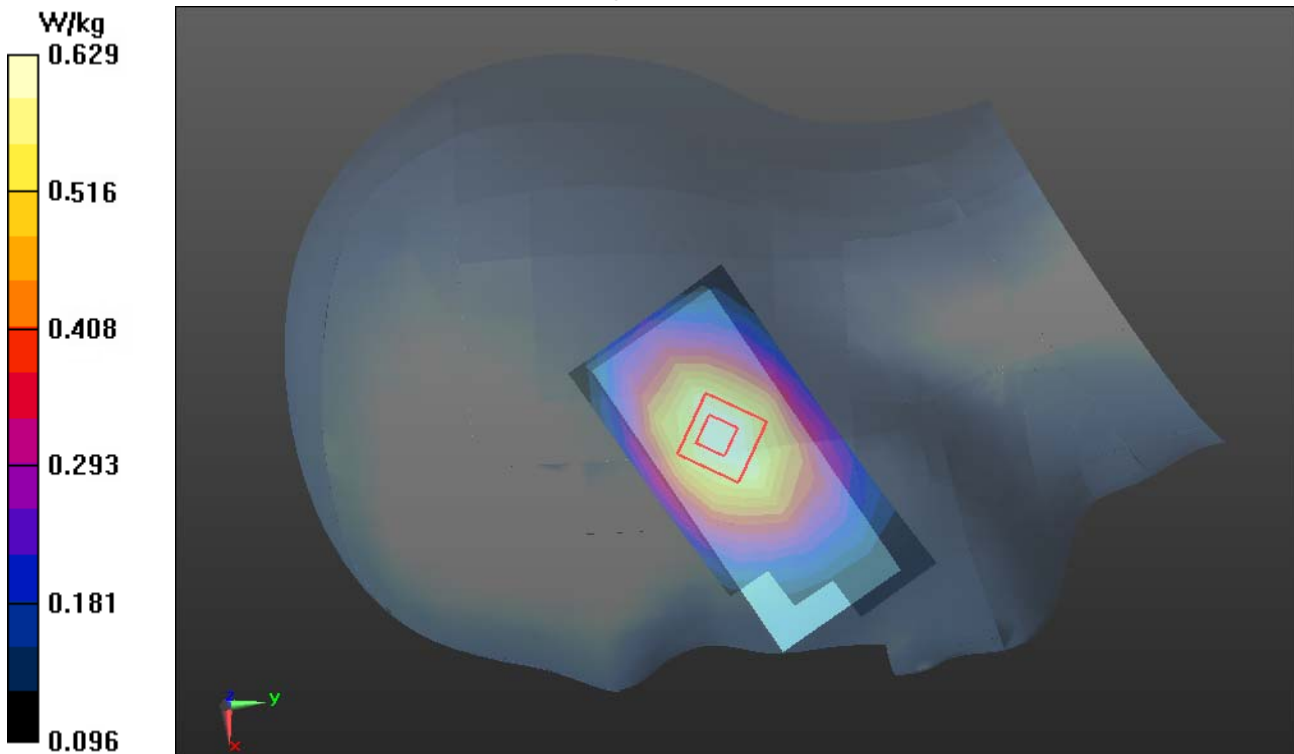



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Right Head Tilted High CH4182

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 836.6MHz;Duty Cycle: 1:1

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 41.161$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Left Head Tilted High CH4233/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.653 W/kg

WCDMA Band V/Left Head Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.047 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

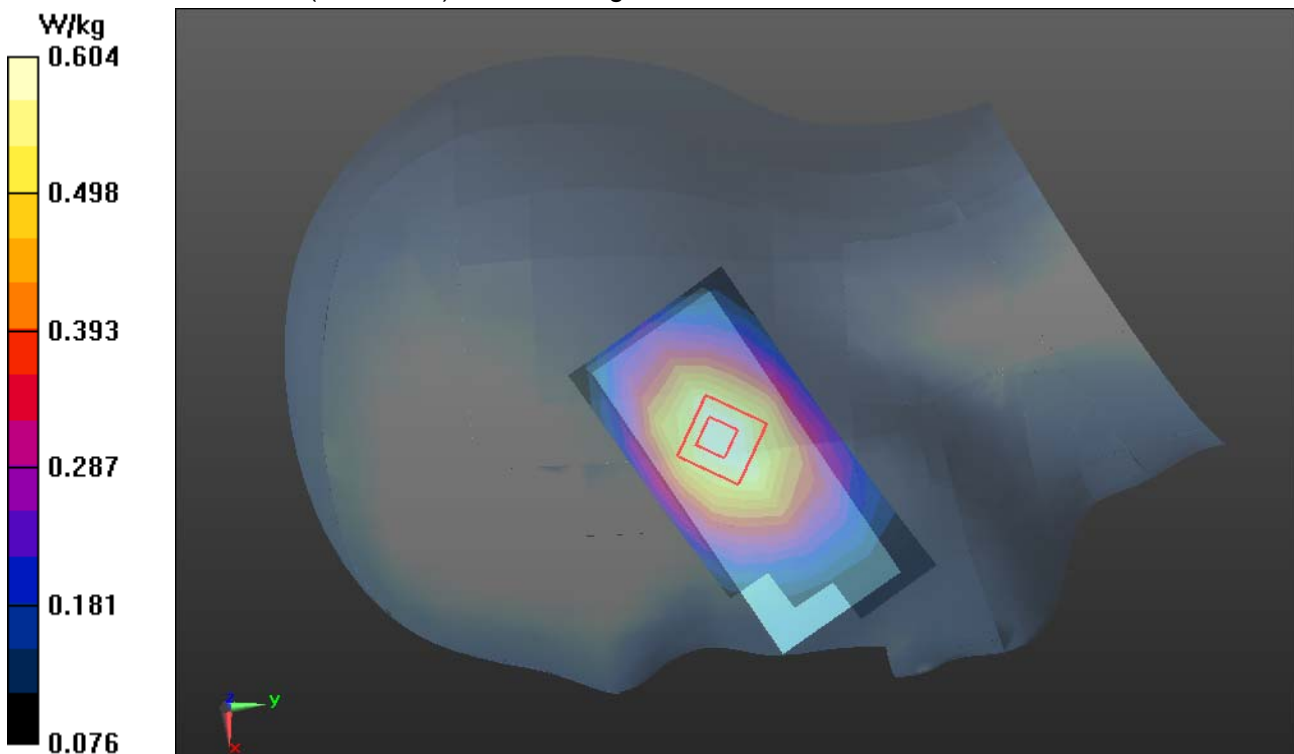



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Left Head Cheek Low CH4132

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.368$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Cheek Low CH4132/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.991 W/kg


WCDMA Band V/Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.802 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 0.965 W/kg

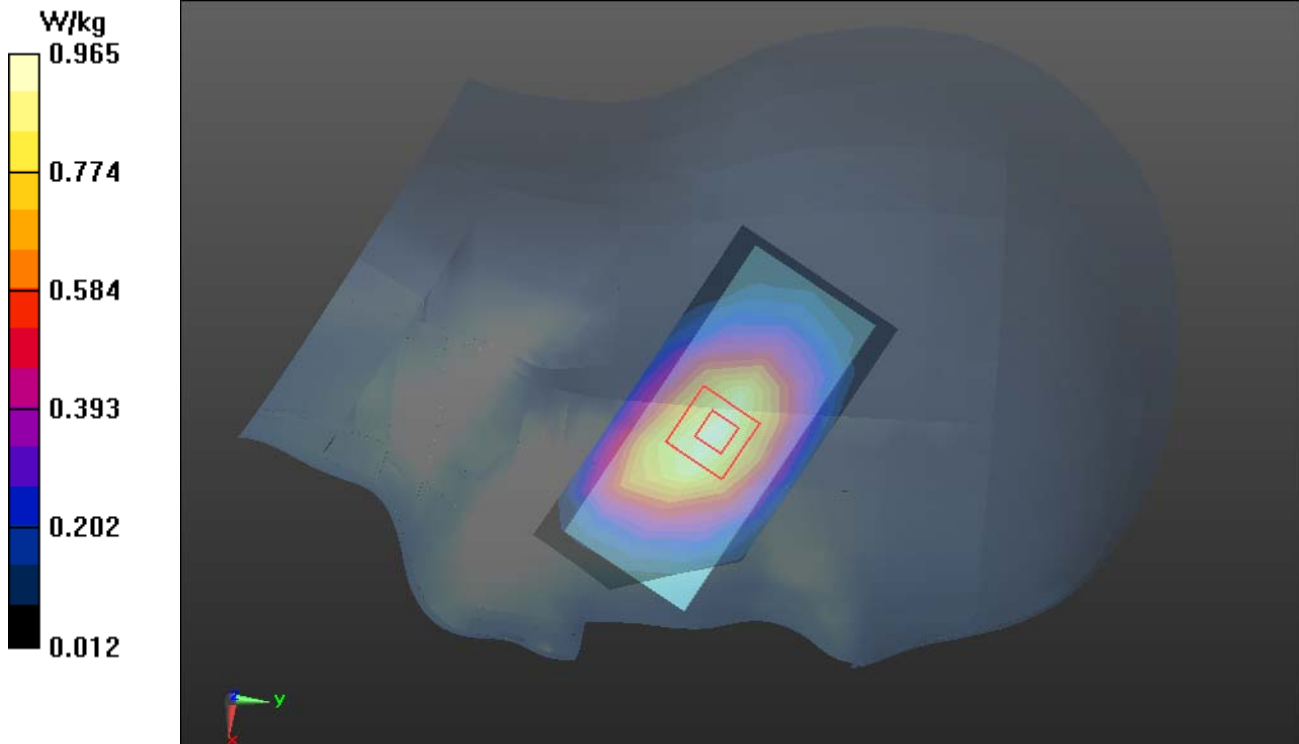



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Left Head Cheek Middle CH4182

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.248$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Cheek Middle CH4182/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.682 W/kg

WCDMA Band V/Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.047 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.800 W/kg

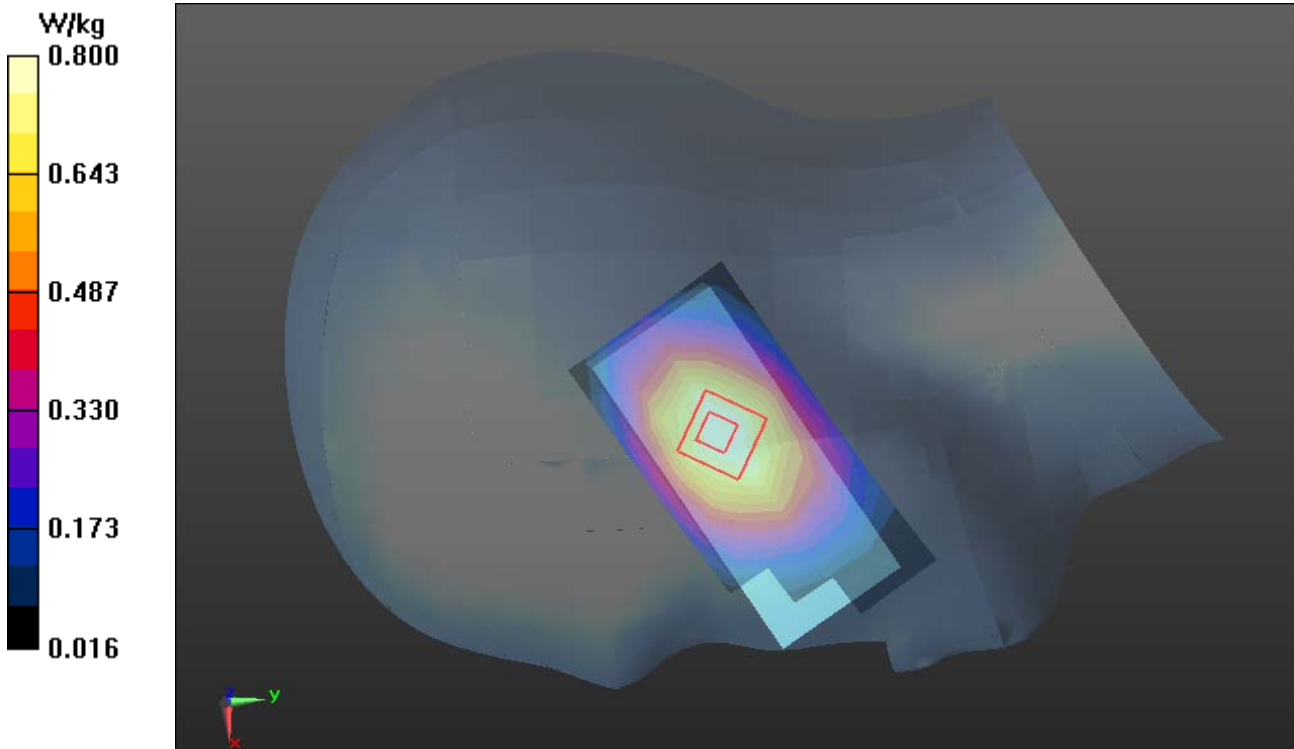



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Left Head Cheek High CH4233

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.161$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Cheek High CH4233/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg

WCDMA Band I/Body Rear Low CH9612/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.45 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.760 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

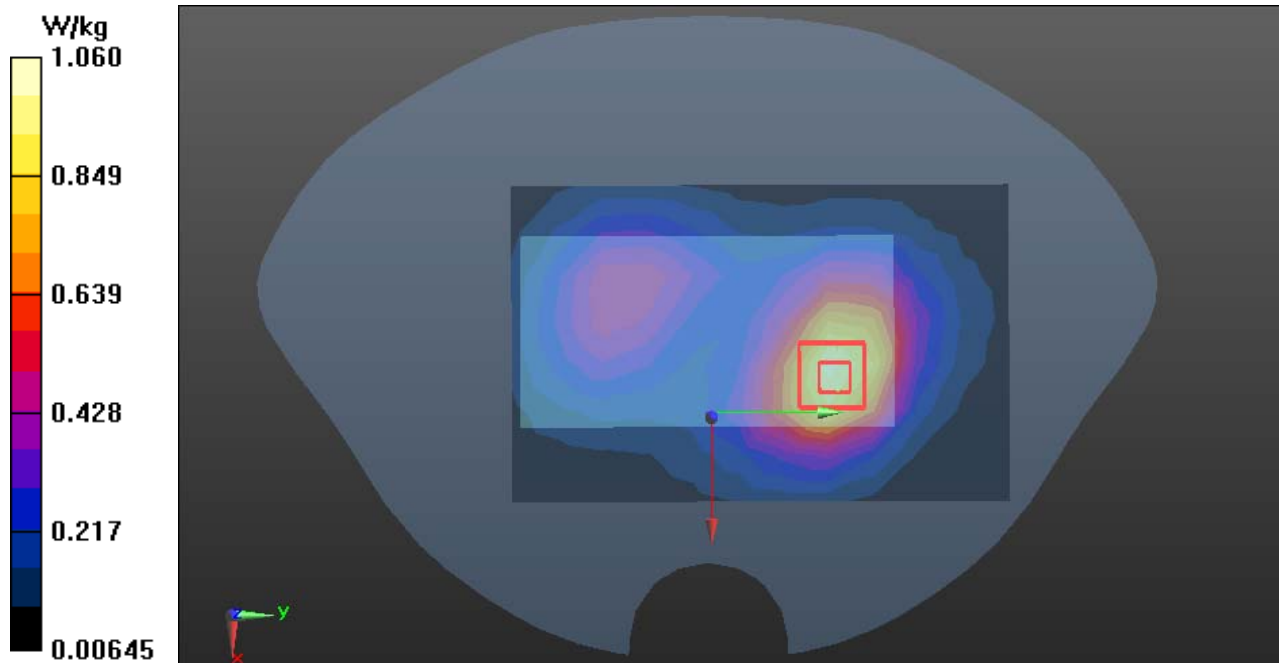



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandV-Left Head Tilted High CH4233

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.161$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA Band V/Tilted High CH4233/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.21 W/kg


WCDMA Band V/Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.341 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.520 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

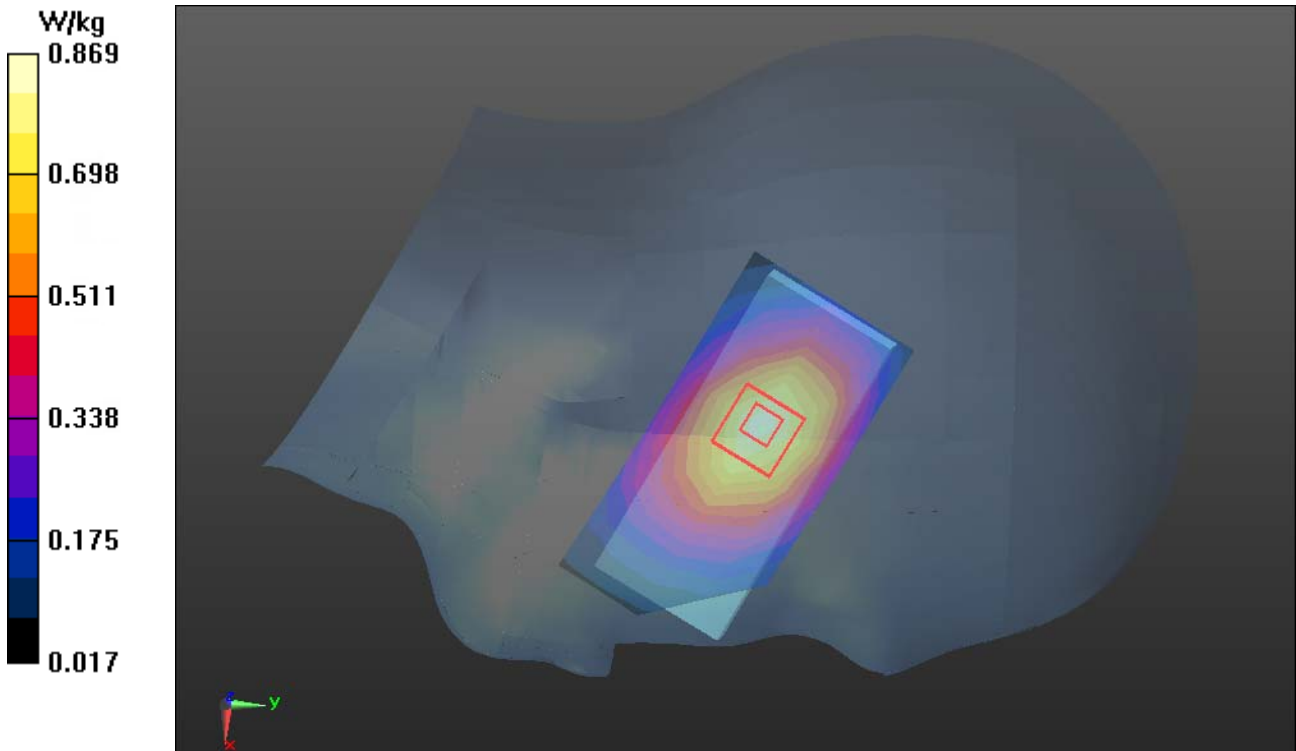



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandII-Right Head Cheek Low CH9262

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.905$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandII/Right Head Cheek Low CH9262/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.749 W/kg

WCDMA BandII/Right Head Cheek Low CH9262/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.985 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 0.806 W/kg

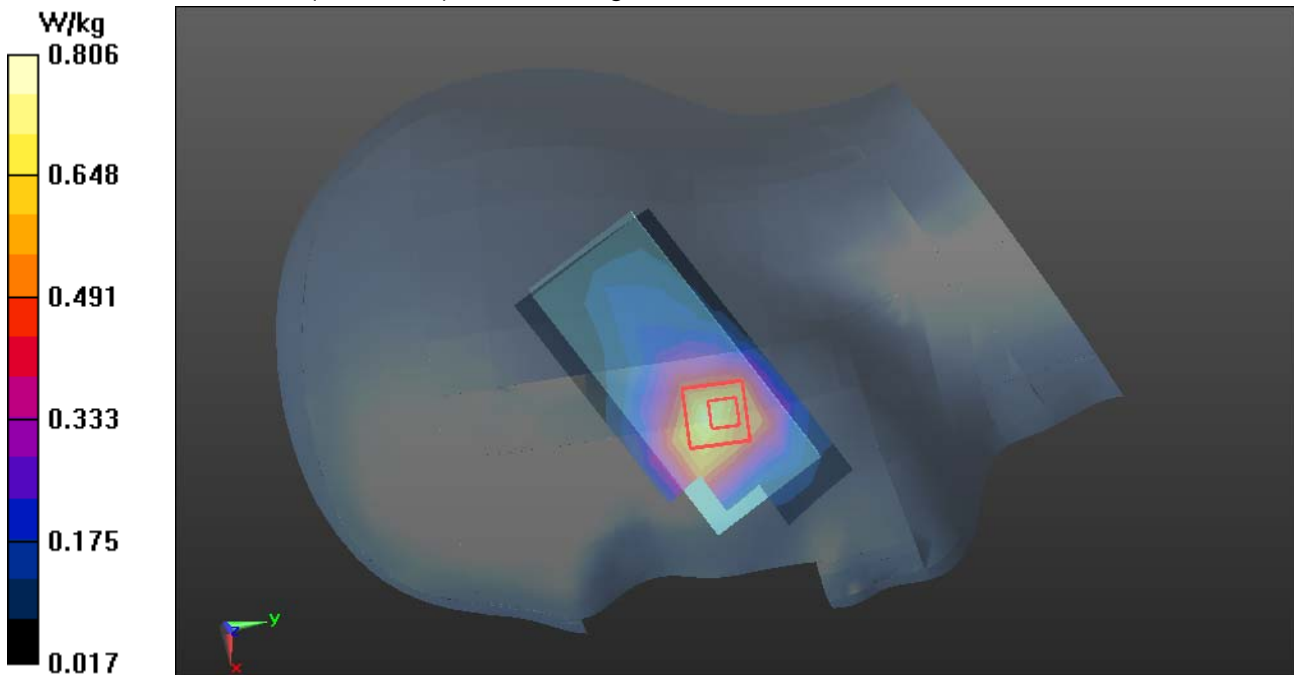



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandII-Right Head Tilted Low CH9262

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.905$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandII/Right Head Tilted Low CH9262/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.225 W/kg

WCDMA BandII/Right Head Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.407 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

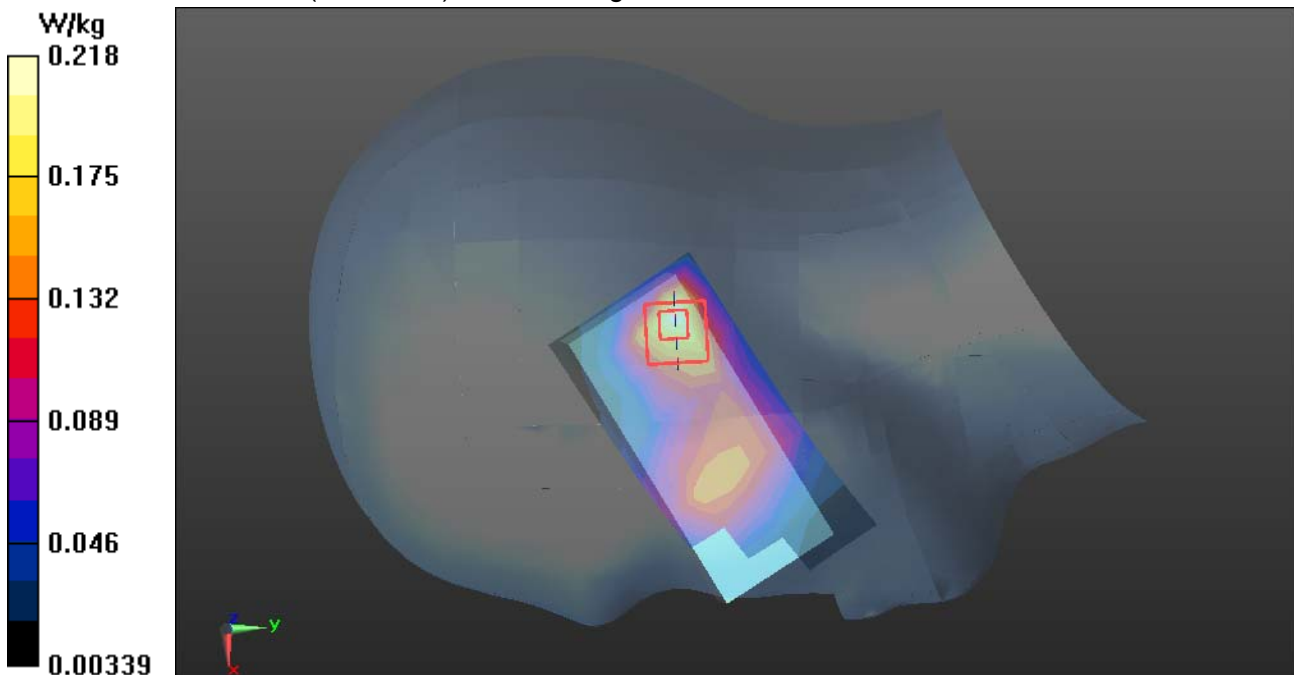



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandII-Left Head Cheek Low CH9262

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.905$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandII/Left Head Cheek Low CH9262/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.644 W/kg

WCDMA BandII/Left Head Cheek Low CH9262/Zoom Scan (8x8x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.661 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

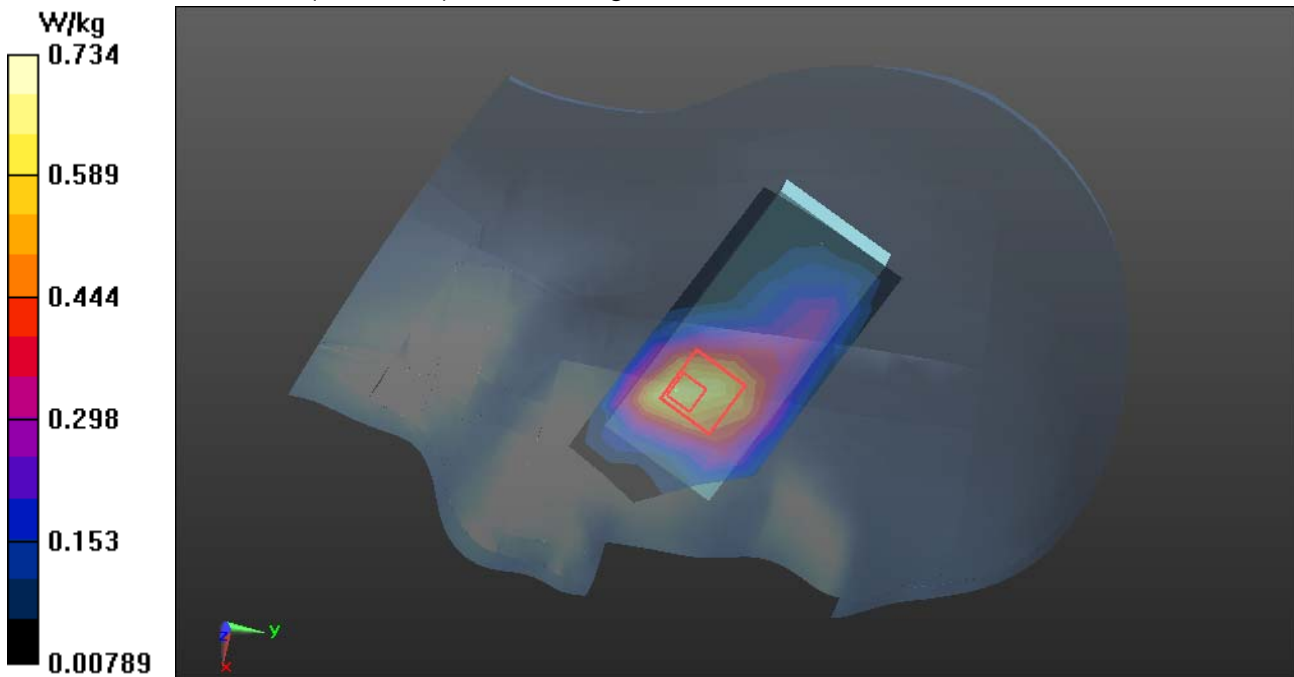



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandII-Left Head Tilted Low CH9262

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 39.905$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandII/Left Head Tilted Low CH9262/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.268 W/kg

WCDMA BandII/Left Head Tilted Low CH9262/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.850 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

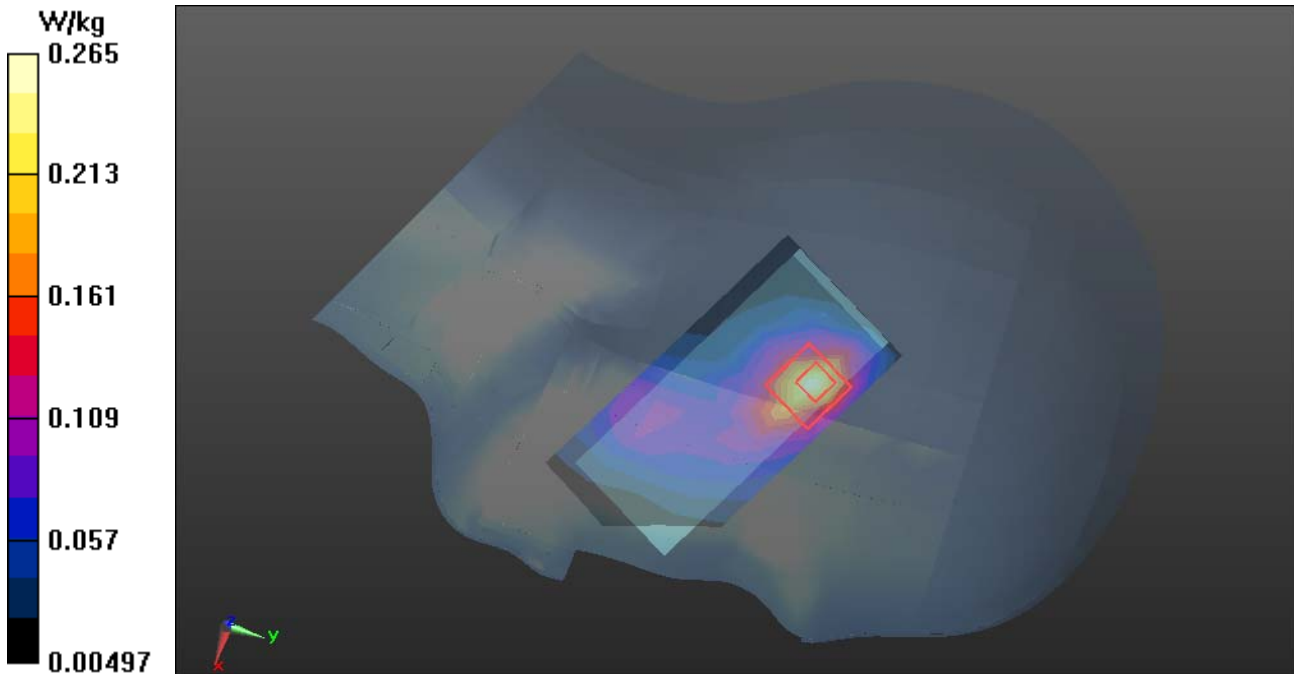



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM850-Body Front High CH251

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.237$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM/Front High CH251/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.516 W/kg


GSM/Front High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.093 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

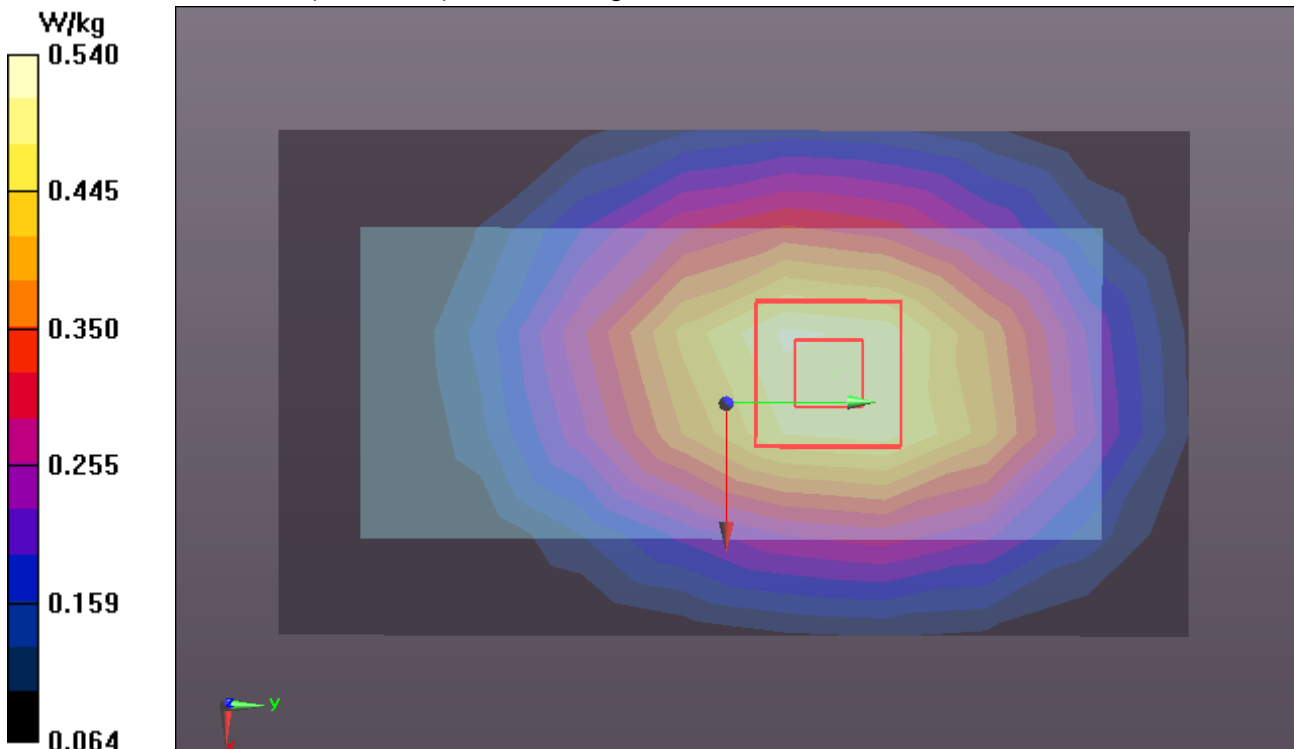



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM850-Body Rear High CH251

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 849$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.237$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM/Rear High CH251/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.841 W/kg


GSM/Rear High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.773 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.427 W/kg

Maximum value of SAR (measured) = 0.827 W/kg

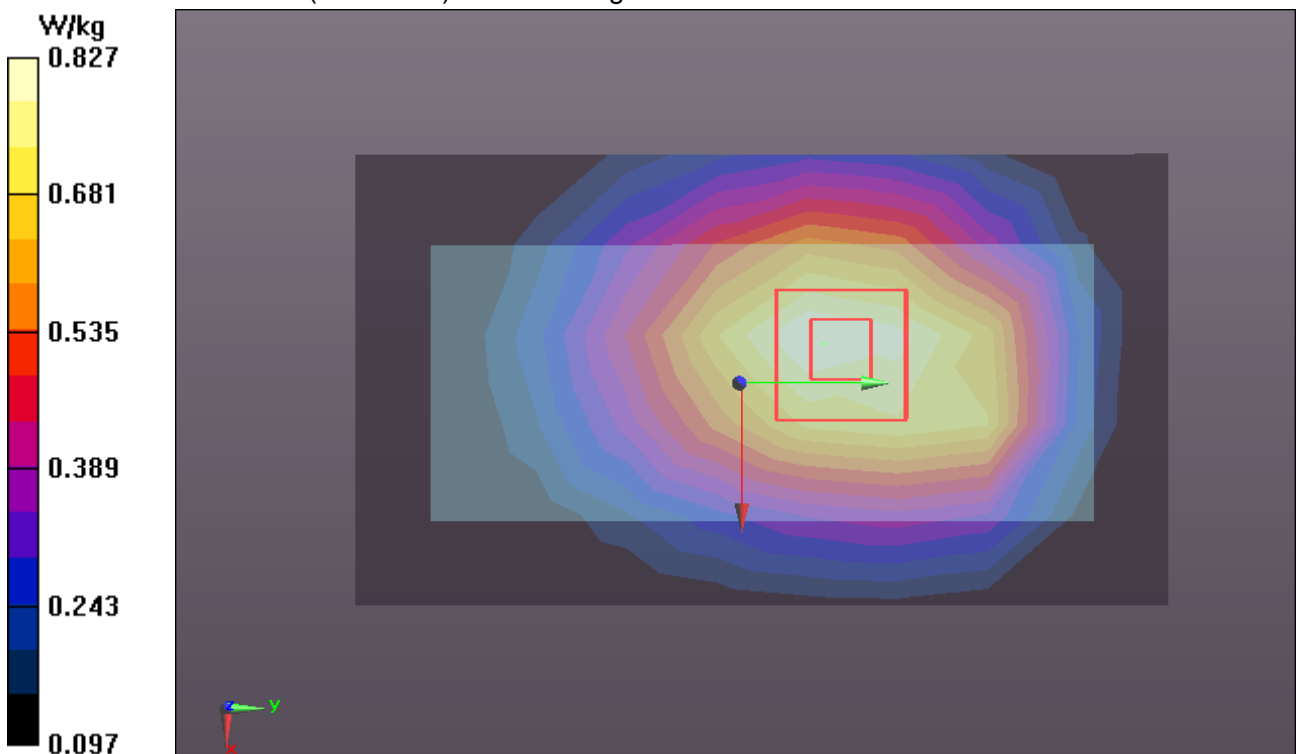



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM1900-Body Front Low CH512

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM/Front Low CH512/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.273 W/kg


GSM/Front Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.993 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

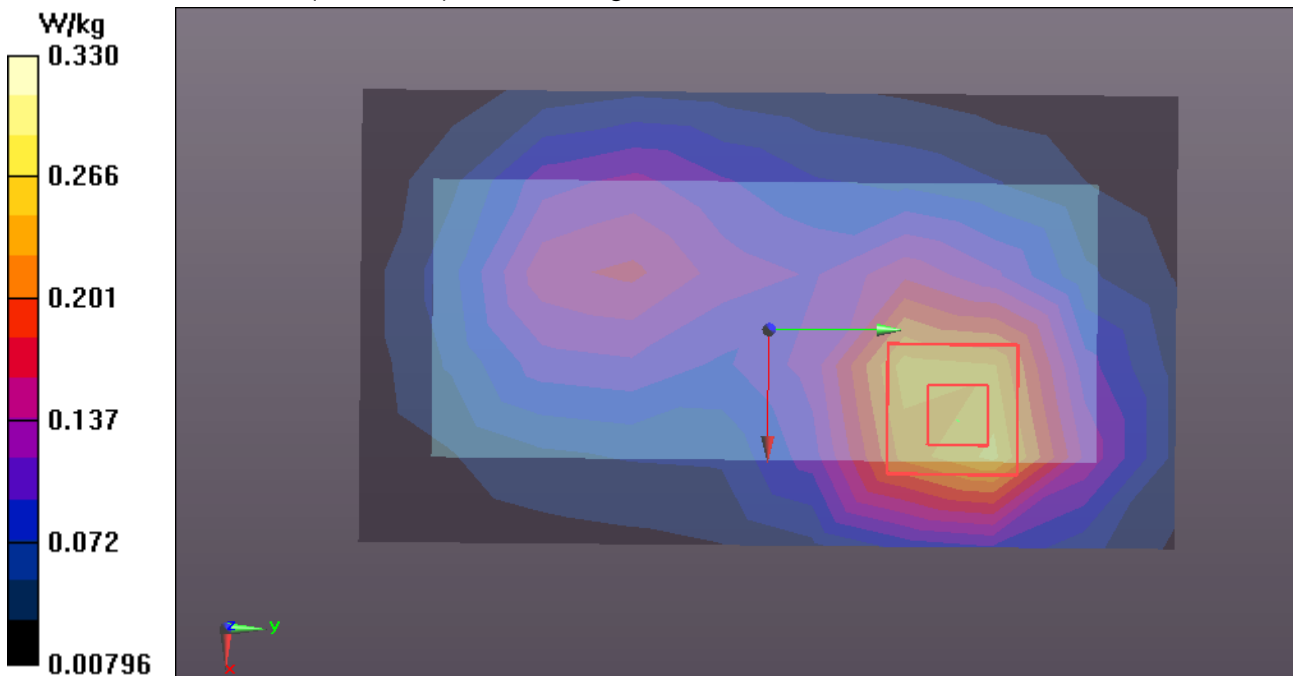



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

GSM1900-Body Rear Low CH512

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM/Rear Low CH512/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.466 W/kg


GSM/Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.744 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.505 W/kg

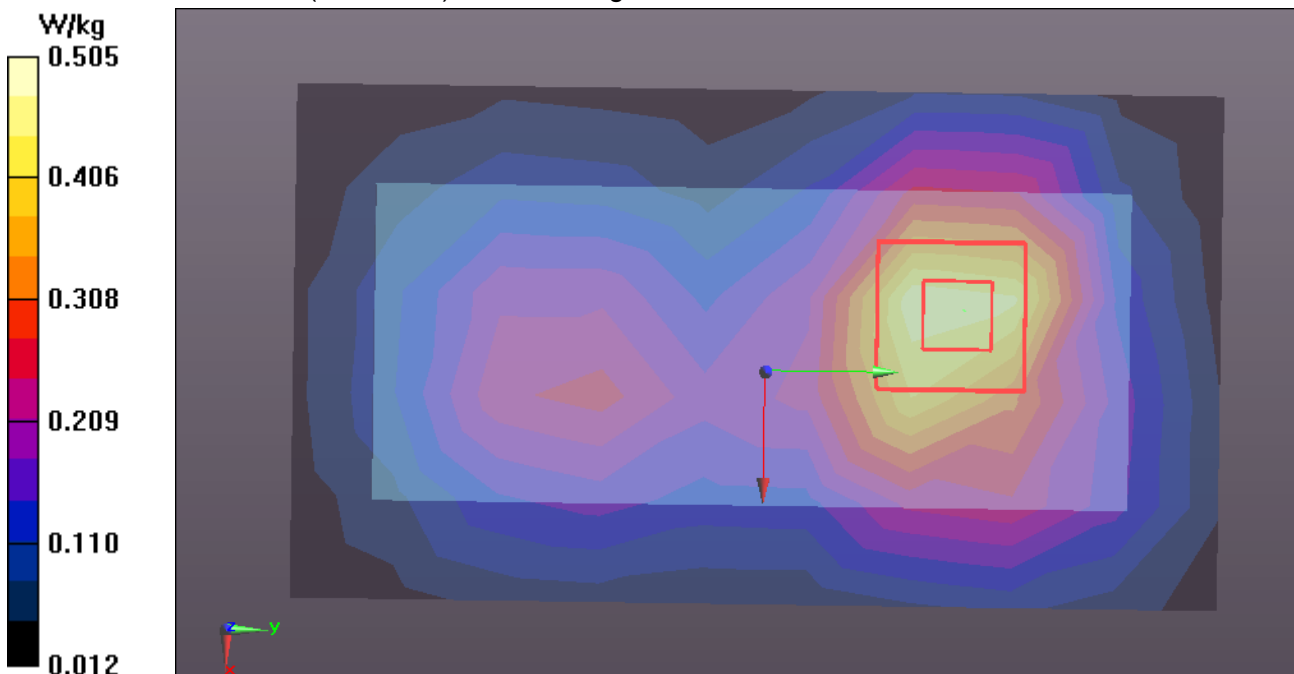



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA Band V-Body Front High CH4233

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.987 \text{ S/m}$; $\epsilon_r = 54.243$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22.9°C ; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandV/Front High CH4233/Area Scan (10x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.04 W/kg


WCDMA BandV/Front High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.020 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.910 W/kg

SAR(1 g) = 0.675 W/kg ; SAR(10 g) = 0.492 W/kg

Maximum value of SAR (measured) = 0.828 W/kg

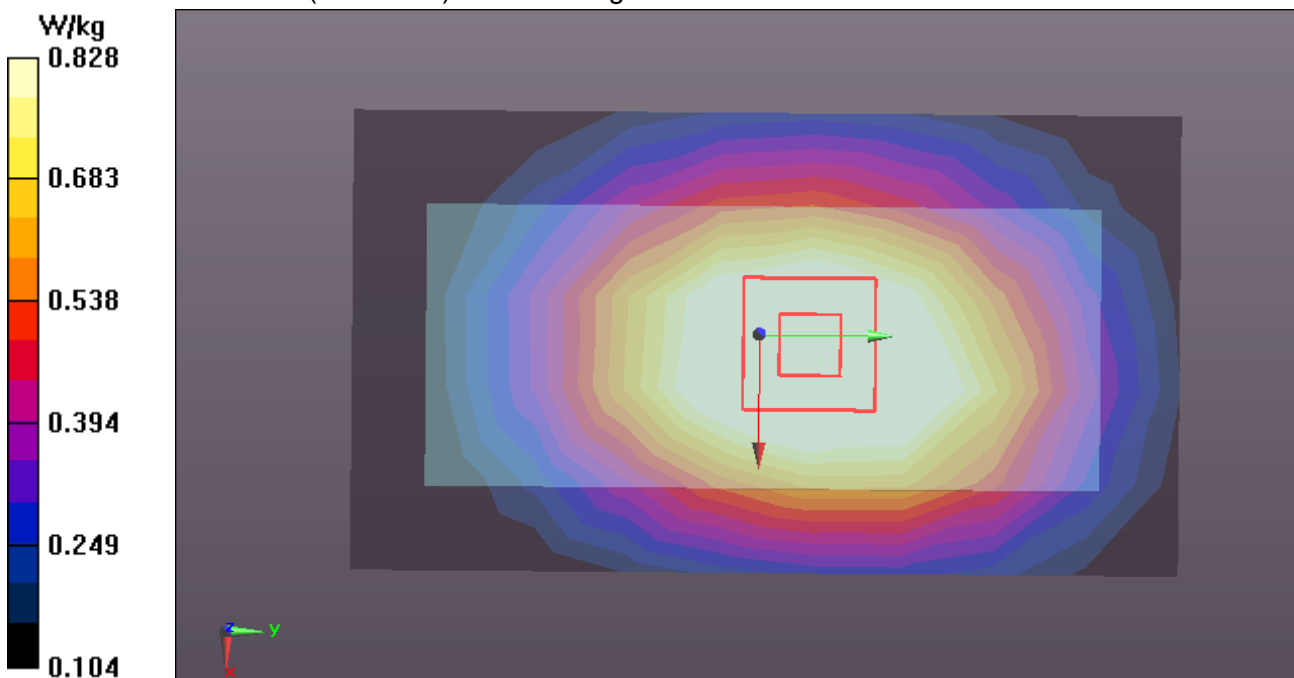



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA Band V-Body Rear Low CH4132

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.962$ S/m; $\epsilon_r = 54.369$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandV/Rear Low CH4132/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.975 W/kg

WCDMA BandV/Rear Low CH4132/Zoom Scan (7x6x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 28.414 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 0.939 W/kg

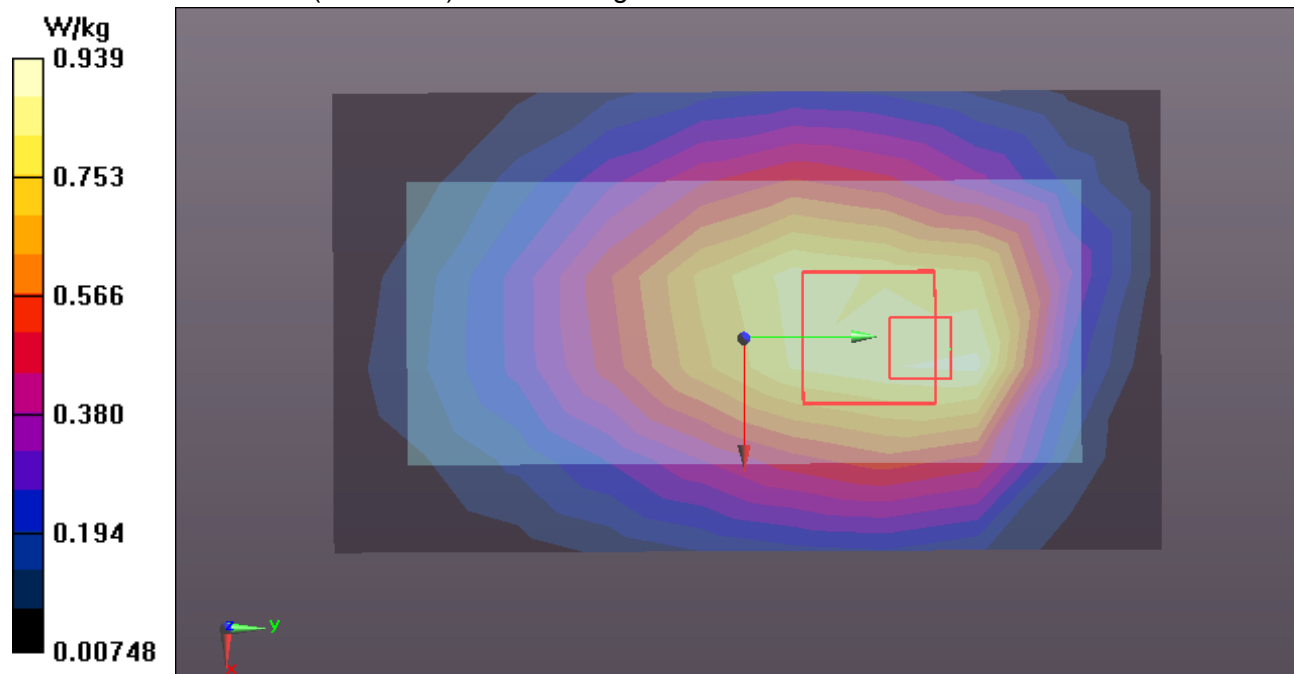



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA Band V-Body Rear Middle CH4182

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.296$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandV/Rear Middle CH4182/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.772 W/kg


WCDMA Band V/Rear Middle CH4182/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.588 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 0.766 W/kg

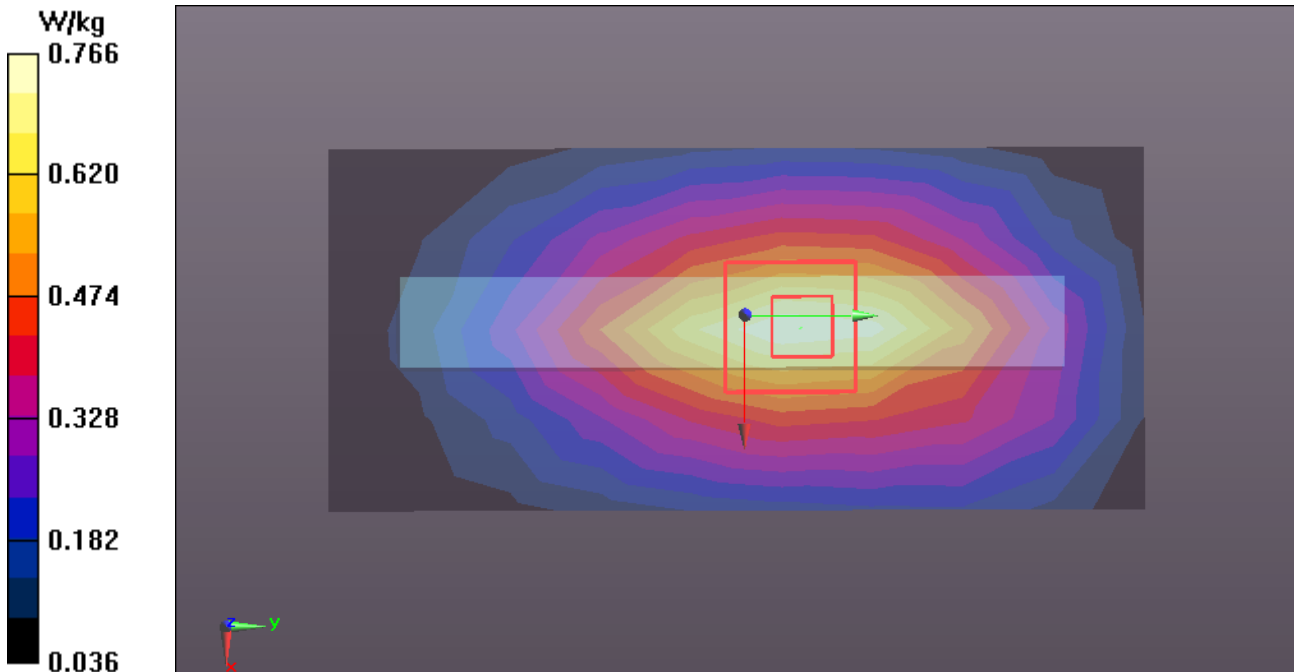



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA Band V-Body Rear High CH4233

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.243$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandV/Rear High CH4233/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.72 W/kg


WCDMA BandV/Rear High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 37.547 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 0.879 W/kg

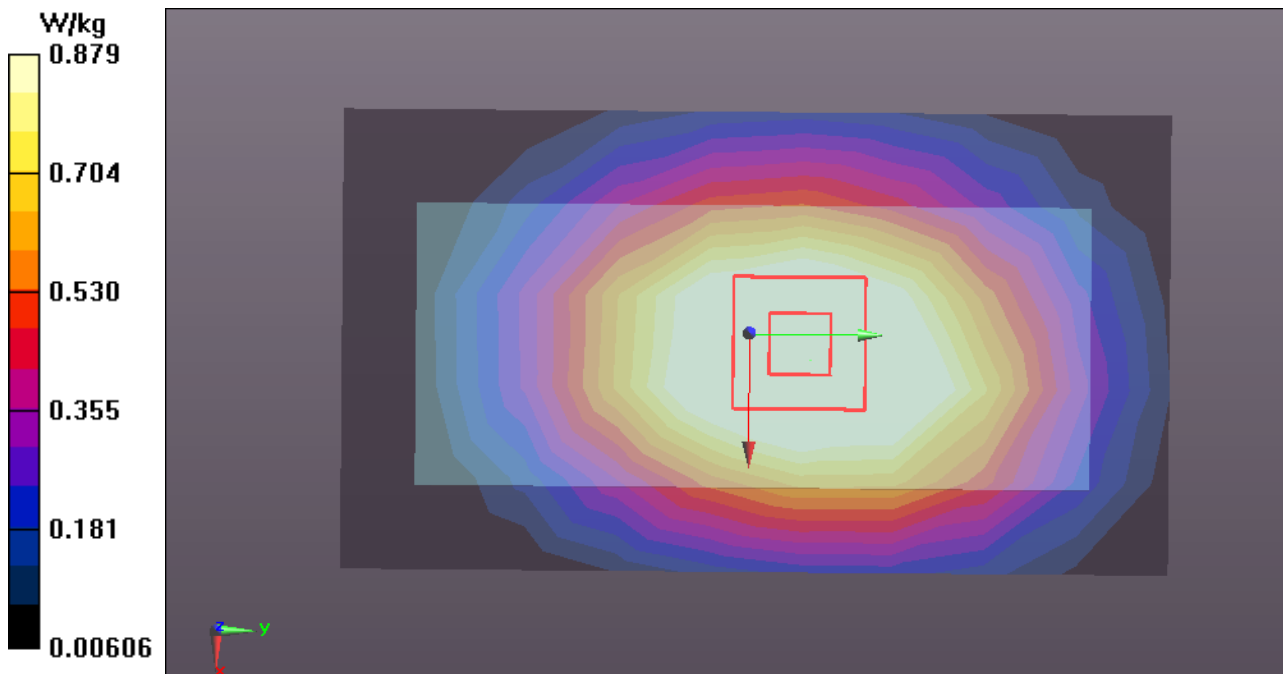



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandII-Body Front Low CH9262

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.389$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandII/Front Low CH9262/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.528 W/kg


WCDMA BandII/Front Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.769 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.646 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

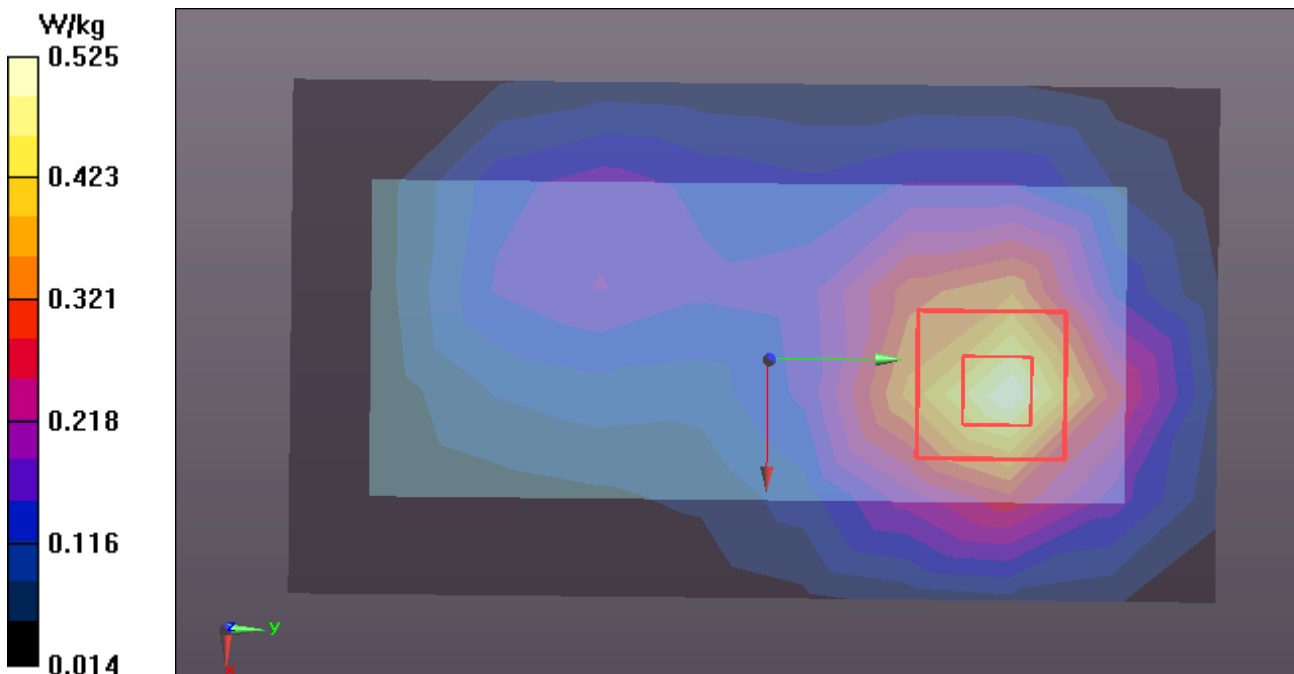



Test Laboratory: Compliance Certification Services Inc.

Date: 9/10/2014

WCDMA BandII-Body Rear Low CH9262

DUT:3G senior feature phone; Type: EZ TWO-B1; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.389$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA BandII/Rear Low CH9262/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.791 W/kg

WCDMA BandII/Rear Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.741 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

