

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com

Report No.: SZEM110600177201
Page: 1 of 70

FCC REPORT

Application No:	SZEM1106001772RF
Applicant:	WideFly Ltd.
Manufacturer/Factory:	WideFly Ltd.
Product Name:	POS PDA
Operation Frequency:	2.402GHz to 2.480GHz
FCC ID:	ZXWWF43
Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2010
Date of Receipt:	2011-06-29
Date of Test:	2011-06-29 to 2011-10-14
Date of Issue:	2011-11-29

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS.....	2
3 TEST SUMMARY	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF EUT	4
4.3 E.U.T OPERATION MODE.....	6
4.4 DESCRIPTION OF SUPPORT UNITS.....	6
4.5 TEST FACILITY	6
4.6 TEST LOCATION	6
4.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
4.8 TEST INSTRUMENTS LIST.....	7
5 TEST RESULTS AND MEASUREMENT DATA.....	9
5.1 ANTENNA REQUIREMENT:	9
5.2 CONDUCTED EMISSIONS.....	10
5.3 CONDUCTED PEAK OUTPUT POWER.....	13
5.4 20DB OCCUPY BANDWIDTH.....	20
5.5 CARRIER FREQUENCIES SEPARATION.....	26
5.6 HOPPING CHANNEL NUMBER	33
5.7 DWELL TIME	36
5.8 BAND EDGE	42
5.9 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS.....	49
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	55
5.11 RADIATED EMISSION.....	56
5.11.1 <i>Radiated emission below 1GHz</i>	58
5.11.2 <i>Transmitter emission above 1GHz</i>	60
5.11.3 <i>Band edge (Radiated Emission)</i>	63-70

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.

4 General Information

4.1 Client Information

Applicant:	WideFly Ltd.
Address of Applicant:	Unit 205, 2/F, Lakeside 2, Hong Kong Science Park, Shatin, N.T., HONG KONG
Manufacturer/Factory:	WideFly Ltd.
Address of Manufacturer/Factory:	Unit 205, 2/F, Lakeside 2, Hong Kong Science Park, Shatin, N.T., HONG KONG

4.2 General Description of EUT

Product Name:	POS PDA
Model No.:	WF43
Bluetooth Version	2.1 +EDR
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation Technique	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Test software of EUT	DutApi86xxBTUart.exe (manufacturer declare)
Antenna Type:	Integral antenna
Antenna gain:	-0.75dBi
Dwell time:	$\leq 0.4S$
Power supply:	AC/DC Adapter: Model: WHT0502000CN INPUT: AC100-240V 50/60Hz 20VA OUTPUT: DC 5V 2000mA
Battery:	3.7V LI-ION battery 2800mAh 10.36Wh
Voltage(declared by client)	Normal Voltage 3.7Vdc/Low Voltage 3.4Vdc /High Voltage 4.25Vdc

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The highest channel	2480MHz

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1004 mbar
Test mode:	
Transmitting mode:	Keep the EUT in Transmitting mode, and AC/DC adapter charge to EUT

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2011. Valid until September 28, 2014.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.

4.8 Test Instruments list

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2011-10-27
11	Band filter	Amindeon	82346	SEL0094	2012-05-26

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2011-10-26
3	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29

RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2011-10-27
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29

General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2011-11-04
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-03-10
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.75dBi.	


5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10: 2009																
Test Frequency Range:	150kHz to 30MHz																
Class / Severity:	Class B																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). They provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.</p>																
Test setup:	<p>Reference Plane</p> <p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test Instruments:	Refer to section 4.8 for details																
Test mode:	Pretest was performed at the EUT in Transmitting mode.																
Test results:	Pass																

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

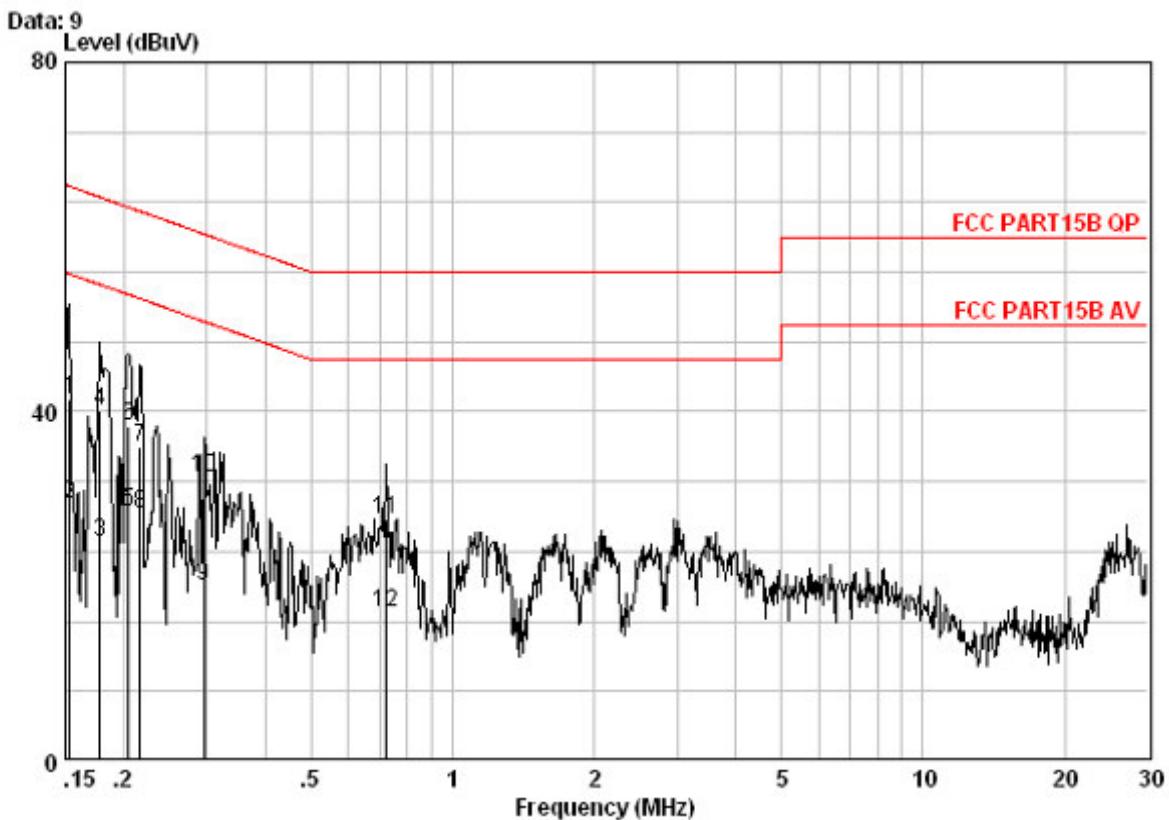
Live line:

Freq	Cable	LISN	Read	Limit		Over	Remark
	Loss	Factor	Level	Level	Line	Limit	
	MHz	dB	dB	dBuV	dBuV	dBuV	
1	0.15321	0.04	9.60	31.88	41.52	65.82	-24.30 QP
2	0.15321	0.04	9.60	19.73	29.37	55.82	-26.46 Average
3	0.17772	0.04	9.60	15.36	25.00	54.59	-29.60 Average
4	0.17772	0.04	9.60	30.58	40.22	64.59	-24.38 QP
5	0.20505	0.04	9.60	18.99	28.63	53.40	-24.78 Average
6	0.20505	0.04	9.60	28.76	38.40	63.40	-25.00 QP
7	0.21620	0.04	9.60	26.35	35.99	62.96	-26.98 QP
8	0.21620	0.04	9.60	18.64	28.29	52.96	-24.68 Average
9	0.29554	0.05	9.60	10.42	20.07	50.37	-30.30 Average
10	0.29554	0.05	9.60	22.82	32.47	60.37	-27.89 QP
11	0.72360	0.06	9.70	17.84	27.60	56.00	-28.40 QP
12	0.72360	0.06	9.70	7.24	17.00	46.00	-29.00 Average

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT.
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

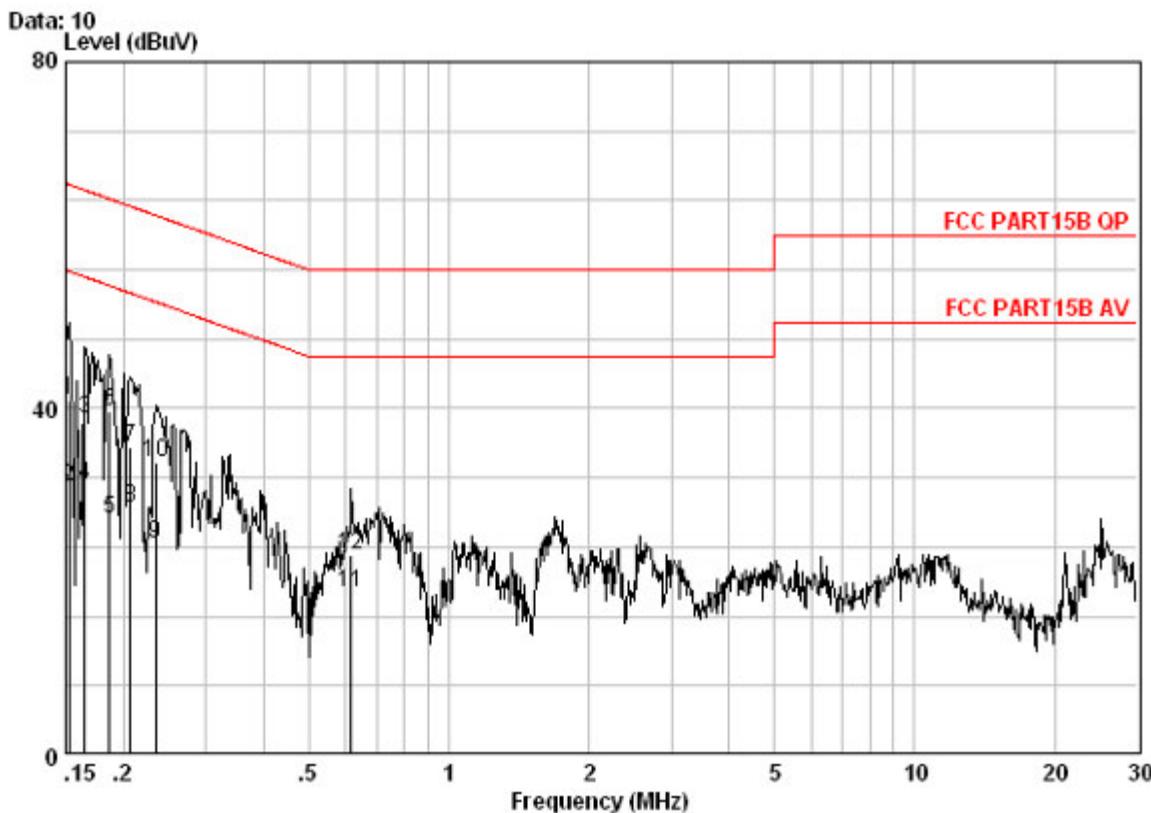

Neutral line:


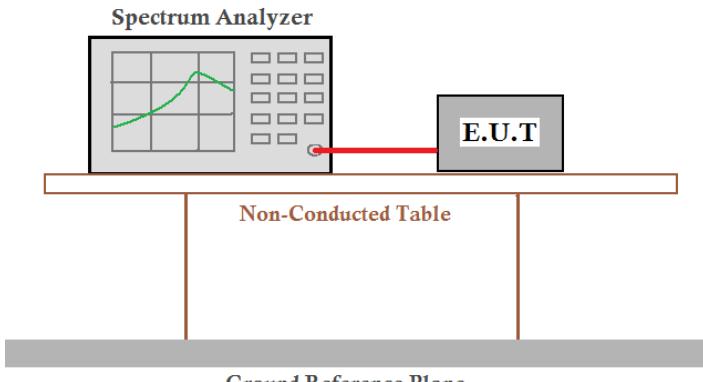
Freq	Cable	LISN	Read	Limit	Over	Remark
	Loss	Factor	Level			
	MHz	dB	dB	dBuV	dBuV	
1	0.15240	0.04	9.60	31.45	41.09	65.87 -24.78 QP
2	0.15240	0.04	9.60	21.24	30.88	55.87 -24.98 Average
3	0.16501	0.04	9.60	29.10	38.74	65.21 -26.46 QP
4	0.16501	0.04	9.60	21.51	31.15	55.21 -24.06 Average
5	0.18639	0.04	9.60	17.61	27.25	54.20 -26.95 Average
6	0.18639	0.04	9.60	30.00	39.64	64.20 -24.55 QP
7	0.20614	0.04	9.60	25.82	35.46	63.36 -27.90 QP
8	0.20614	0.04	9.60	18.98	28.62	53.36 -24.74 Average
9	0.23409	0.04	9.60	14.74	24.38	52.30 -27.92 Average
10	0.23409	0.04	9.60	24.10	33.74	62.30 -28.56 QP
11	0.61726	0.06	9.66	8.98	18.71	46.00 -27.29 Average
12	0.61726	0.06	9.66	13.47	23.19	56.00 -32.81 QP

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2009
Limit:	30dBm
Test setup:	 <p>Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details
Test state:	Non-hopping transmitting with all kinds of modulation.
Test results:	Pass

Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.12	30.00	Pass
Middle	1.89	30.00	Pass
Highest	1.59	30.00	Pass

π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	0.81	30.00	Pass
Middle	0.84	30.00	Pass
Highest	0.37	30.00	Pass


8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	0.89	30.00	Pass
Middle	1.02	30.00	Pass
Highest	-0.07	30.00	Pass

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

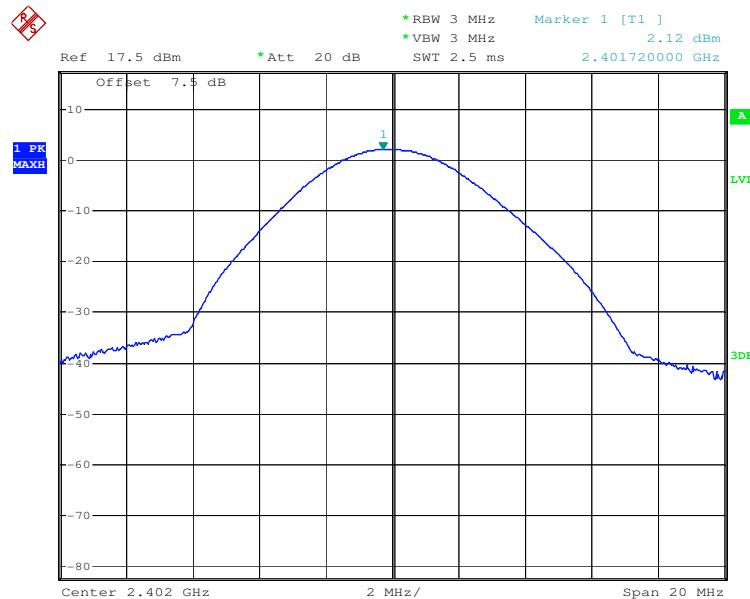


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

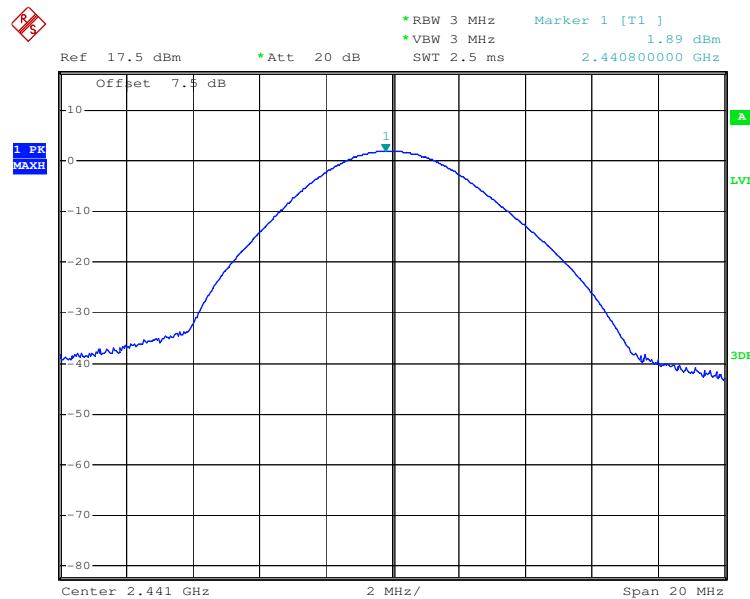


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

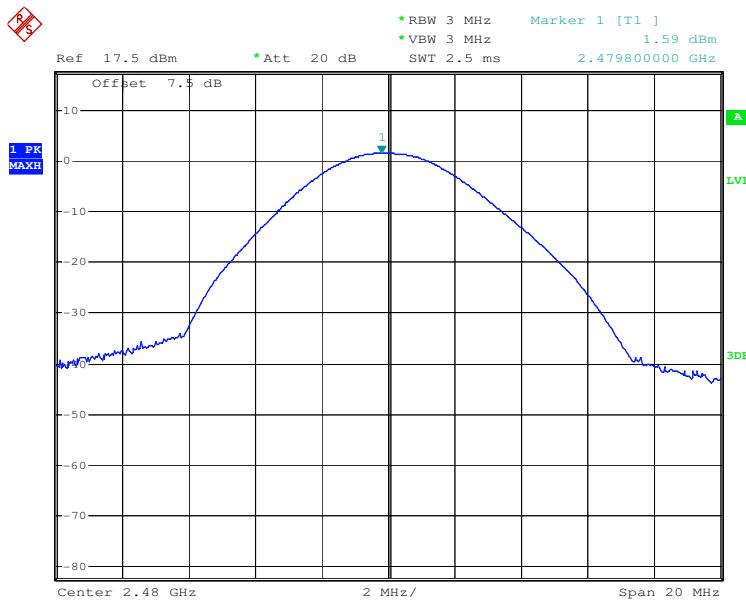


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

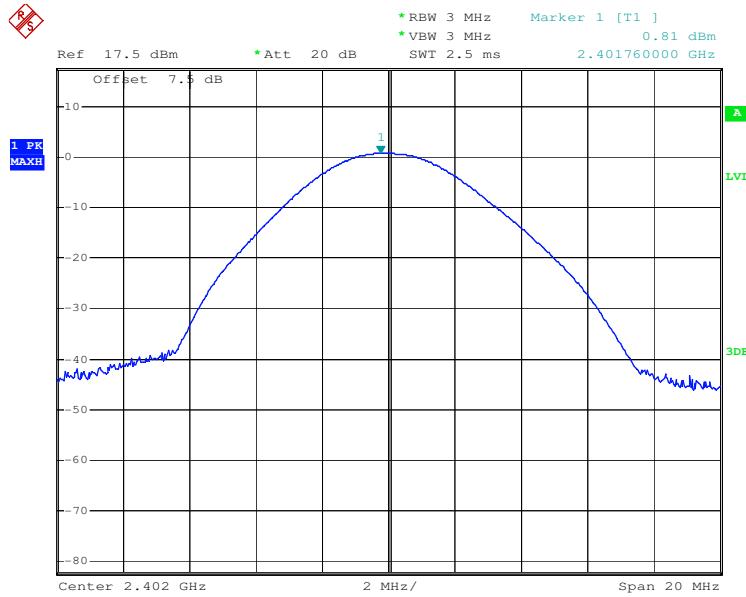


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

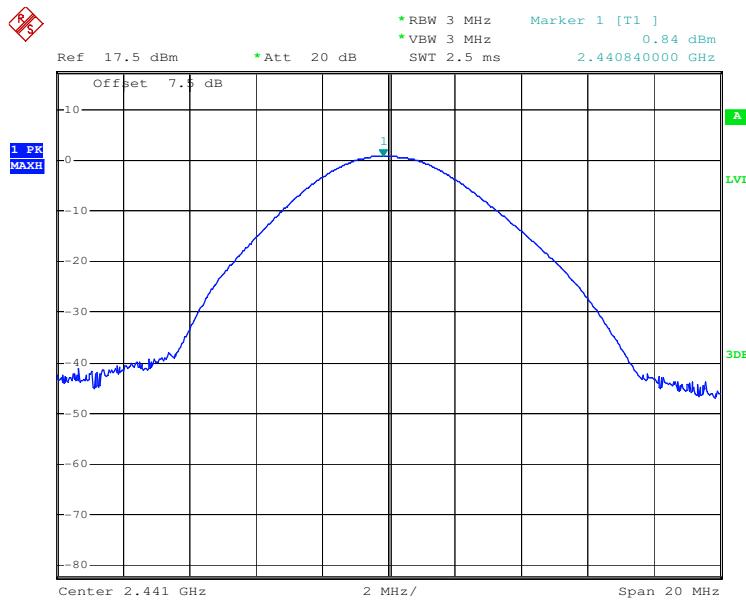


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

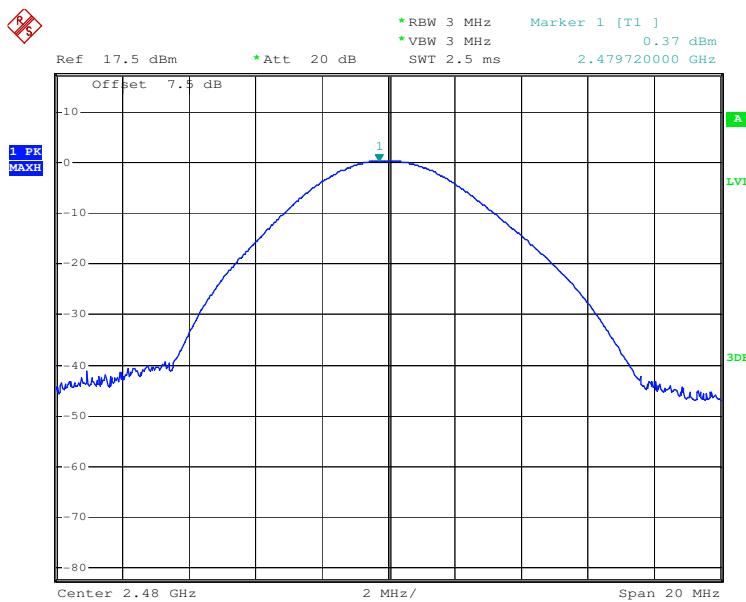


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

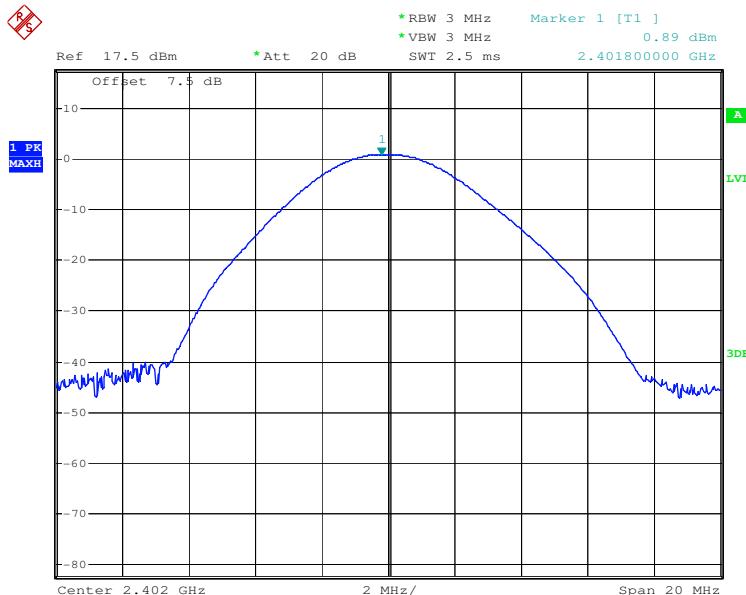

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

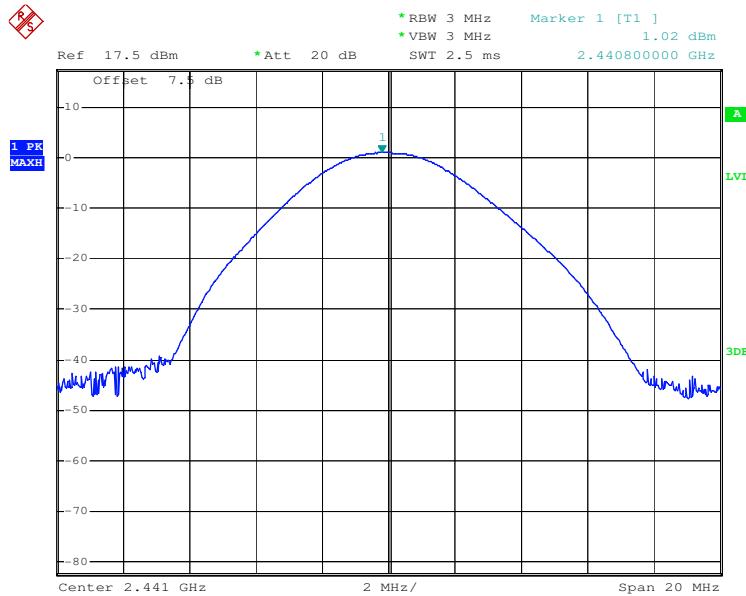

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

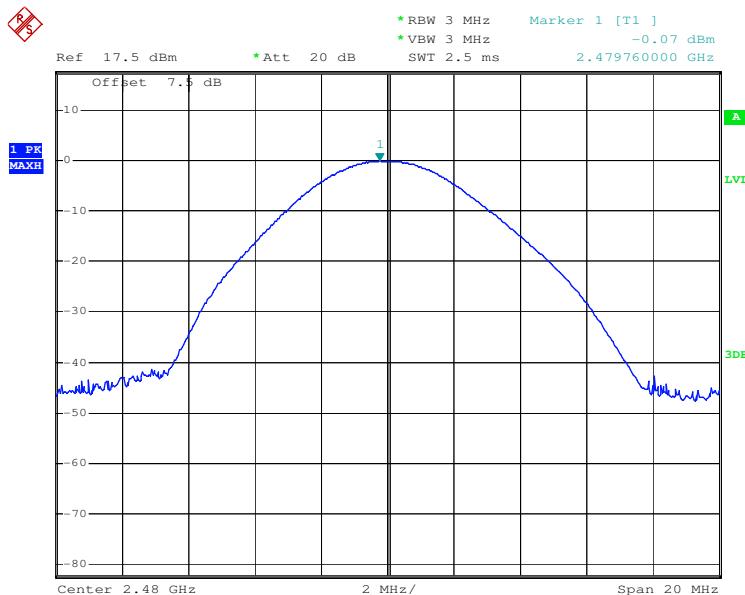

5.4 20dB Occupy Bandwidth


Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test state:	Non-hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data


Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	724	1112	1160
Middle	724	1108	1160
Highest	724	1108	1160

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

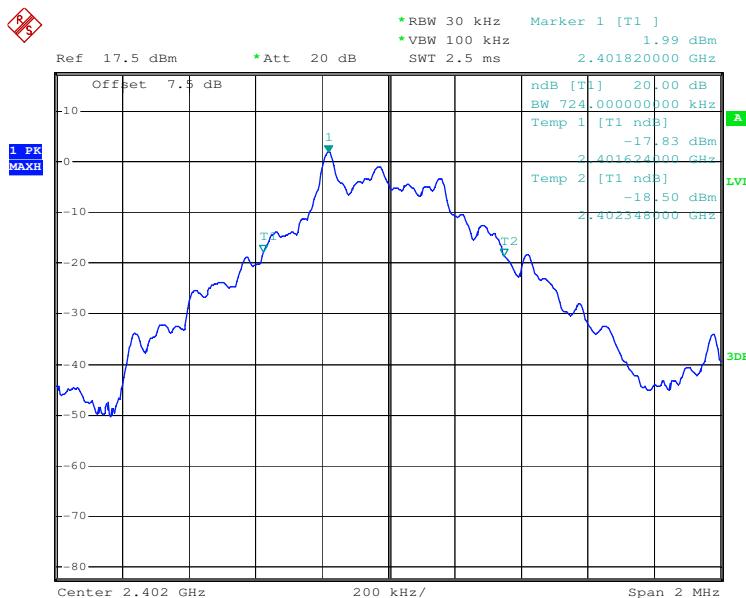


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

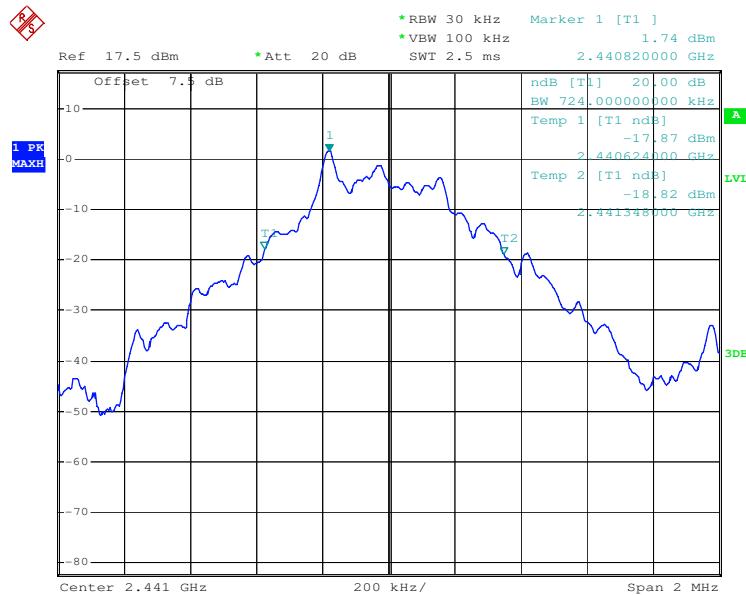


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

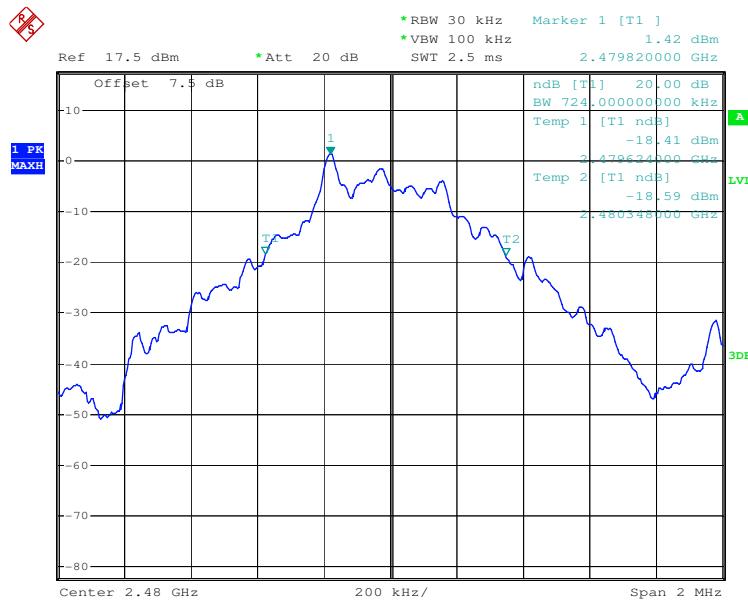


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

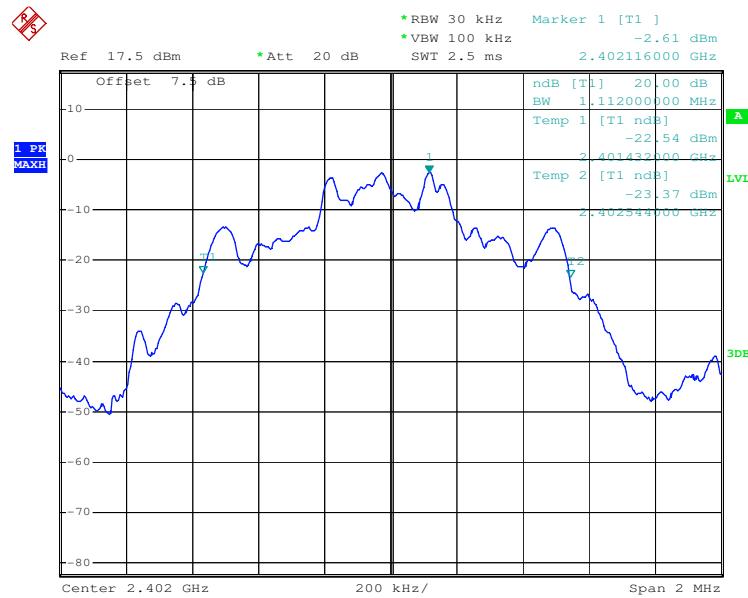


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

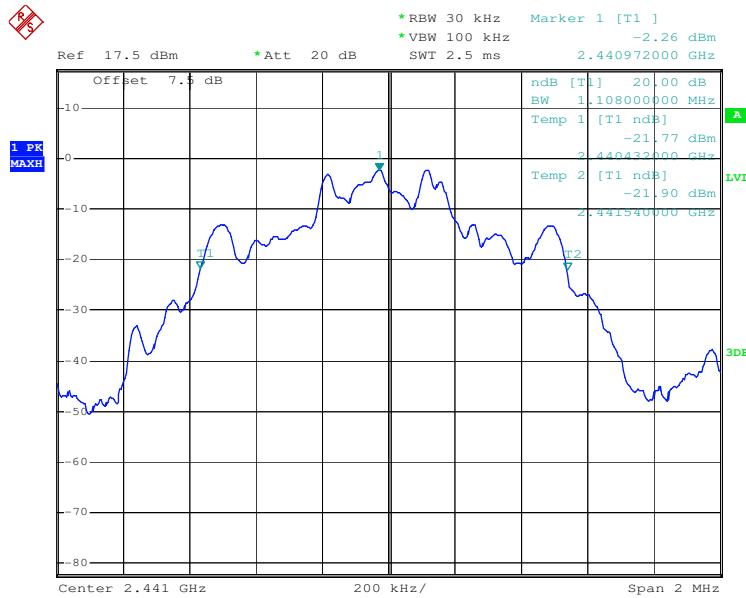


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

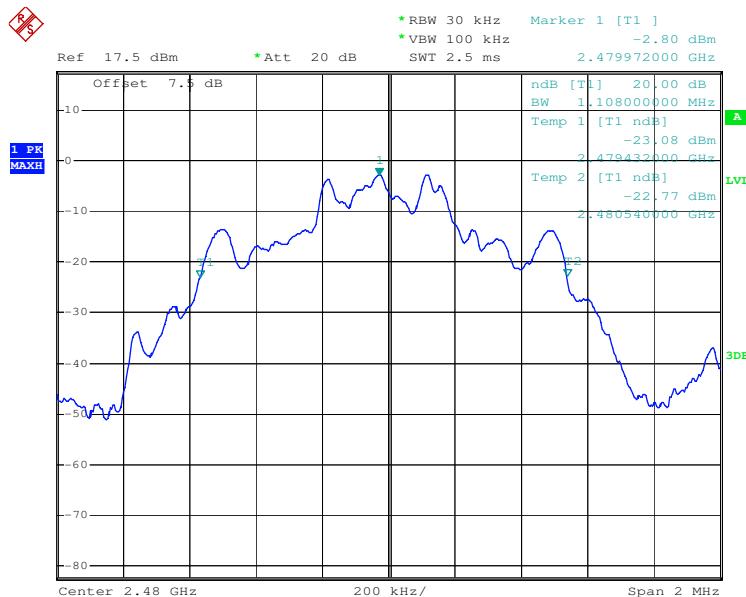


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

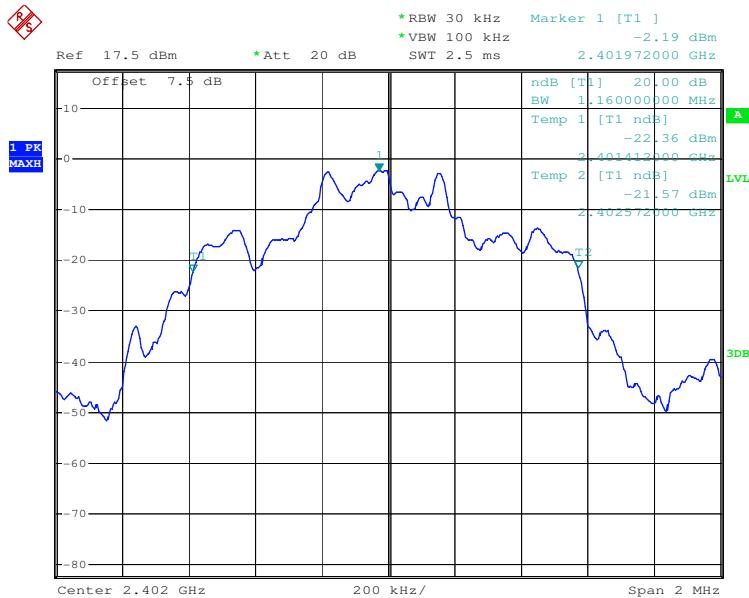


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

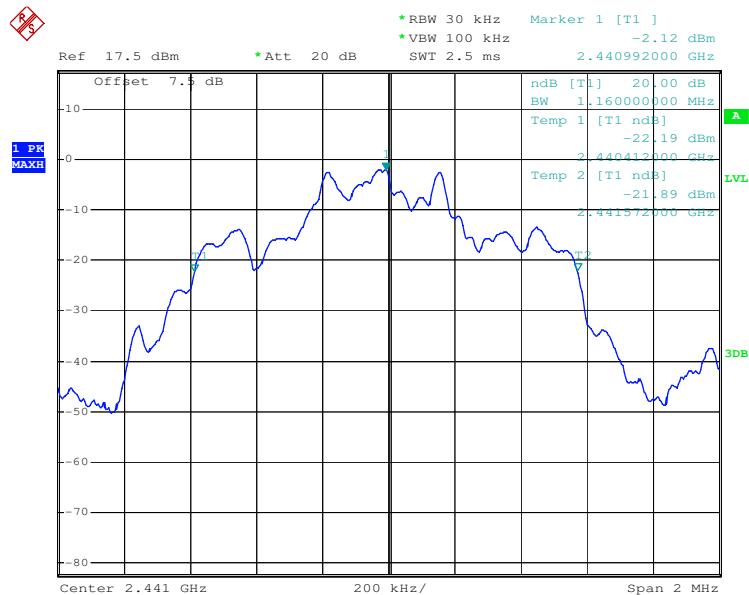

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

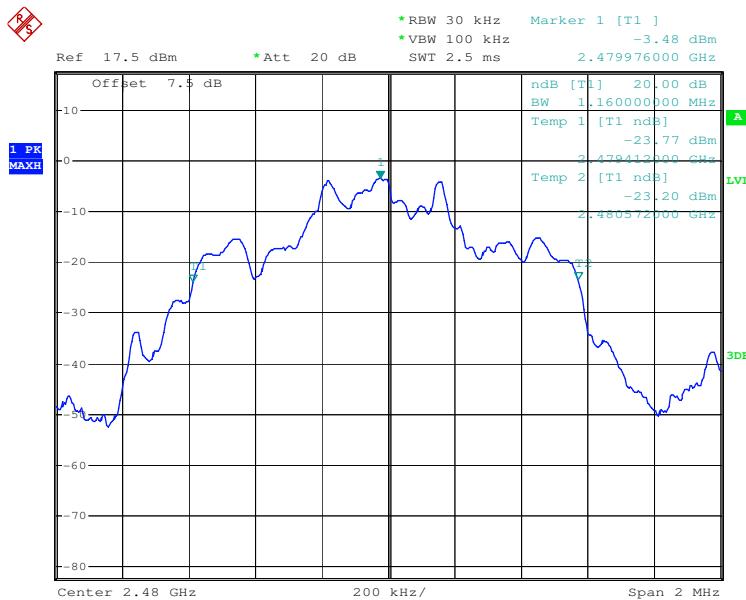

5.5 Carrier Frequencies Separation

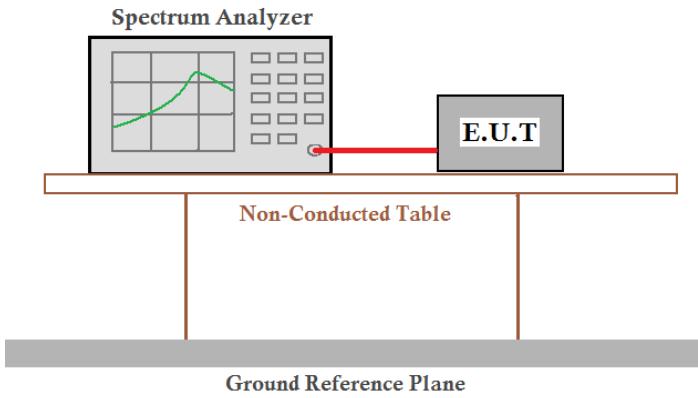Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test state:	Hopping transmitting with all kind of modulation.
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test results:	Pass

Measurement Data


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥773	Pass
Middle	1000	≥773	Pass
Highest	1004	≥773	Pass
π/4DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥773	Pass
Middle	1000	≥773	Pass
Highest	1004	≥773	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥773	Pass
Middle	1000	≥773	Pass
Highest	1008	≥773	Pass

Note: According to section 5.4,


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	724	483
π/4DQPSK	1112	741
8DPSK	1160	773

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

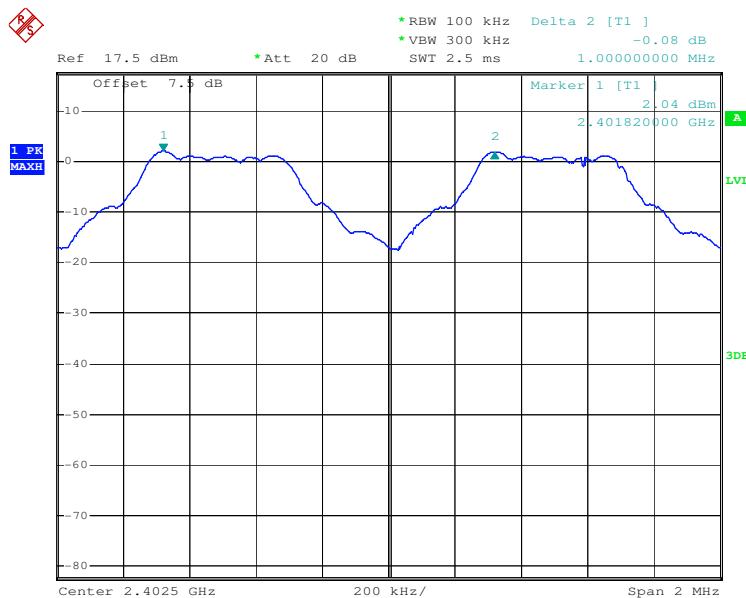


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

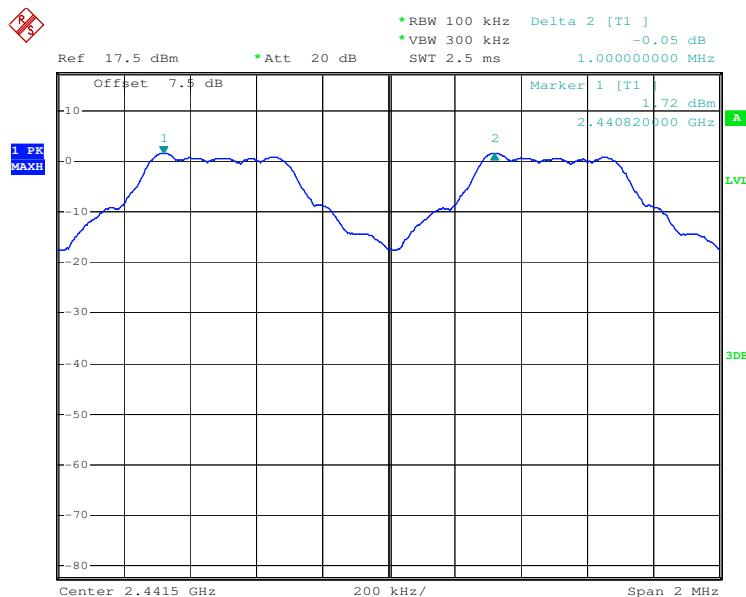


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

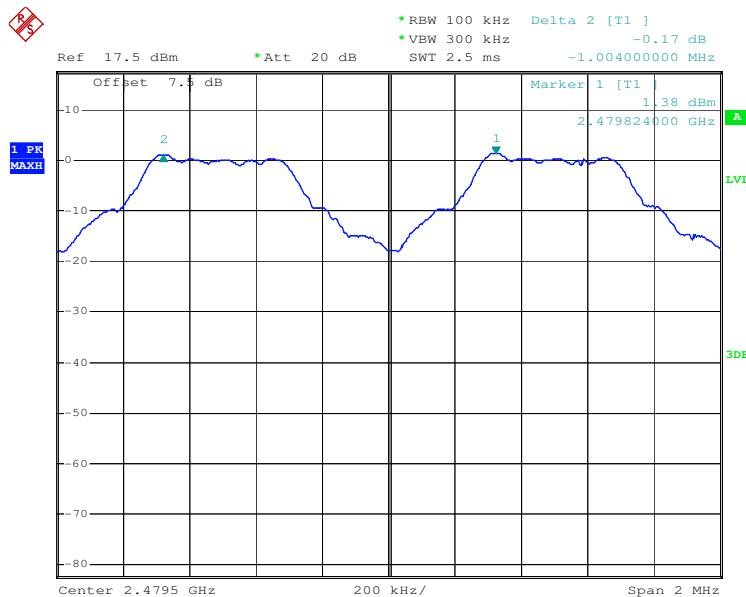


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

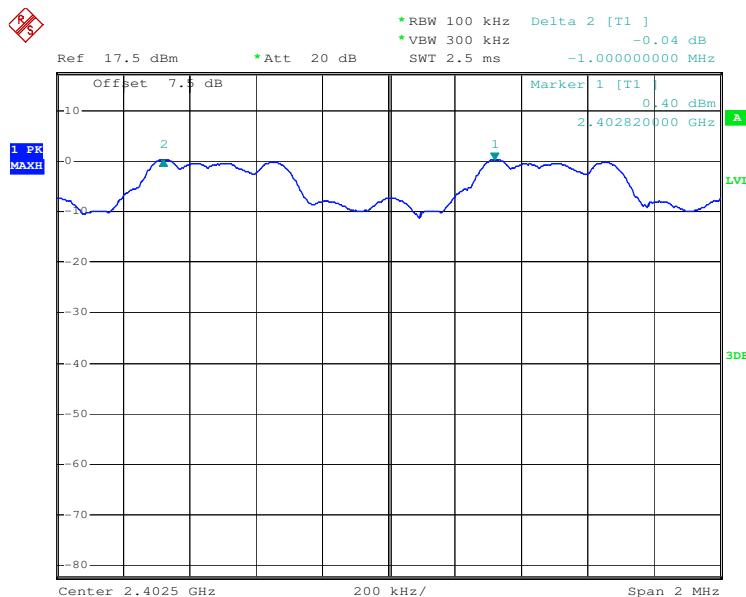


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

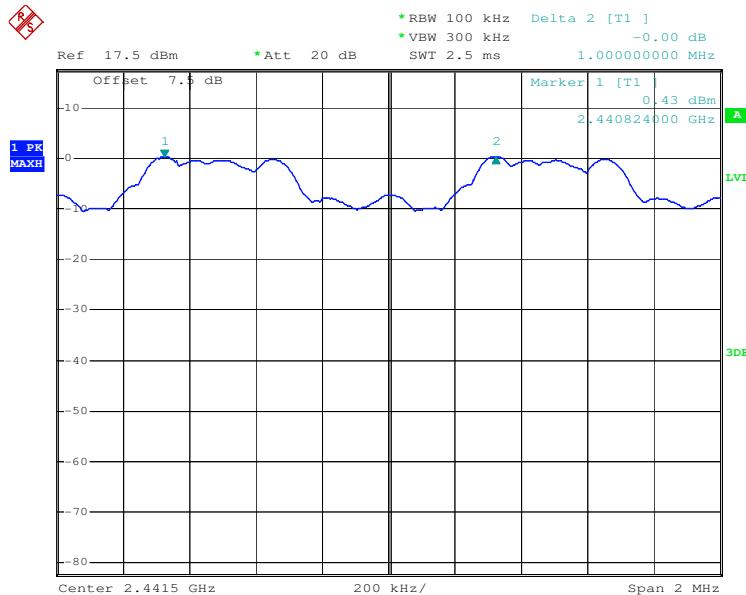


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

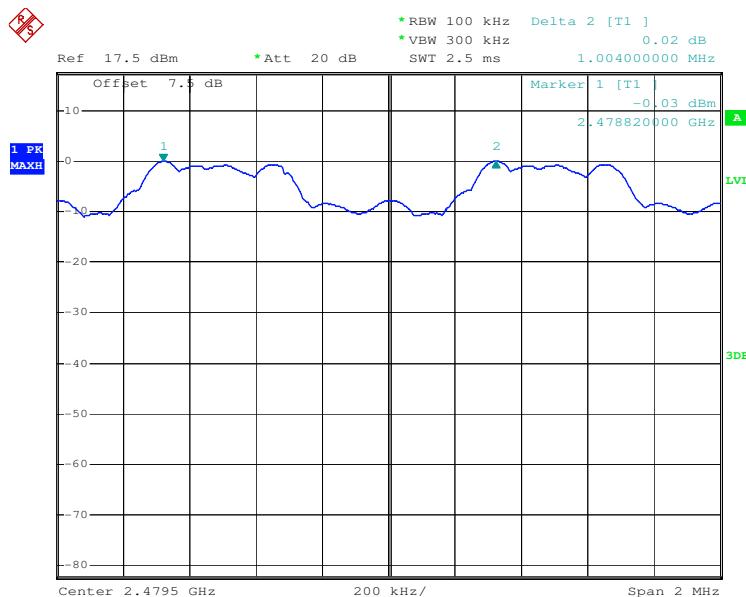

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

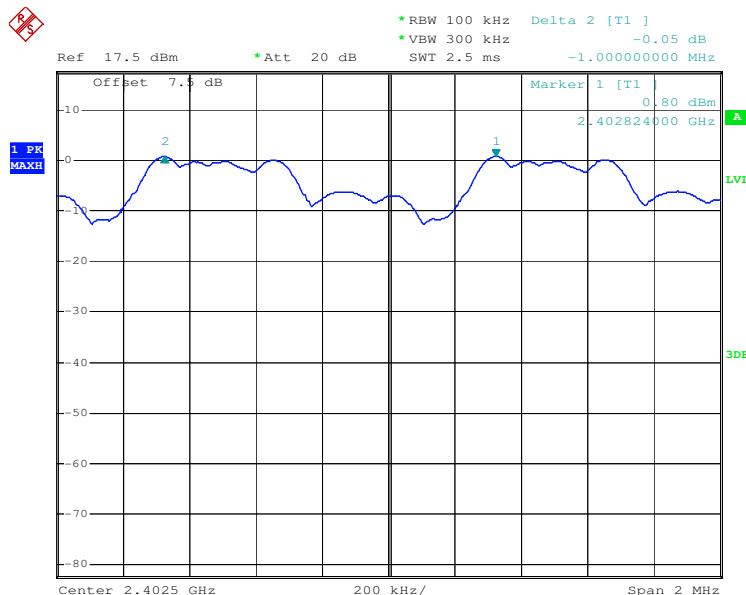


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

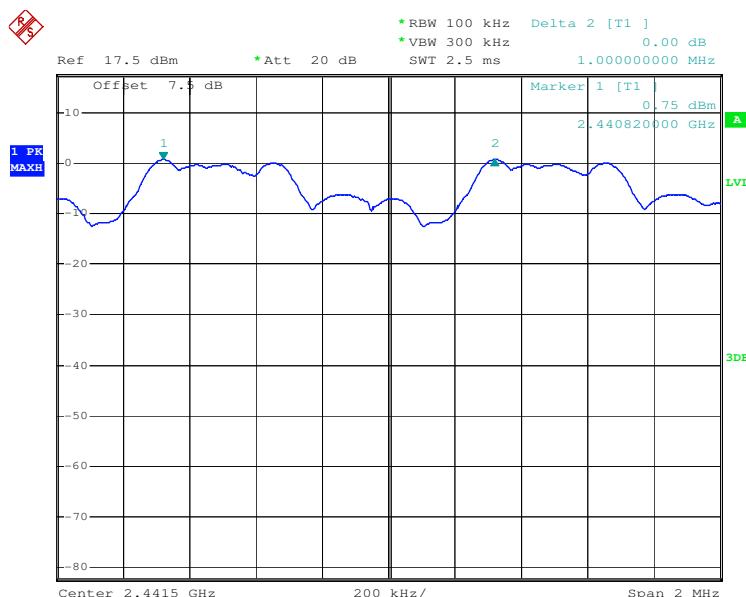

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

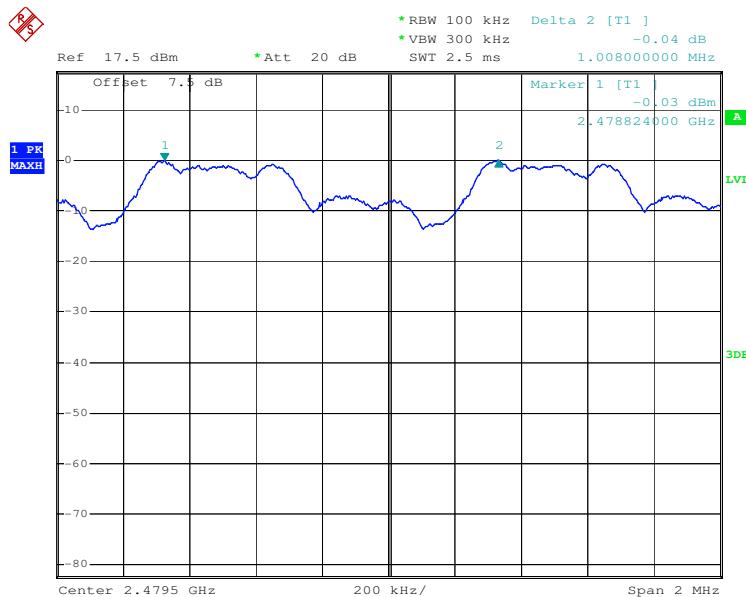

5.6 Hopping Channel Number


Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Limit:	75channels
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data


Mode	Hopping channel numbers	Limit
GFSK	79	≥ 75
$\pi/4$ DQPSK	79	≥ 75
8DPSK	79	≥ 75

Test plot as follows


Test mode:	GFSK
------------	------

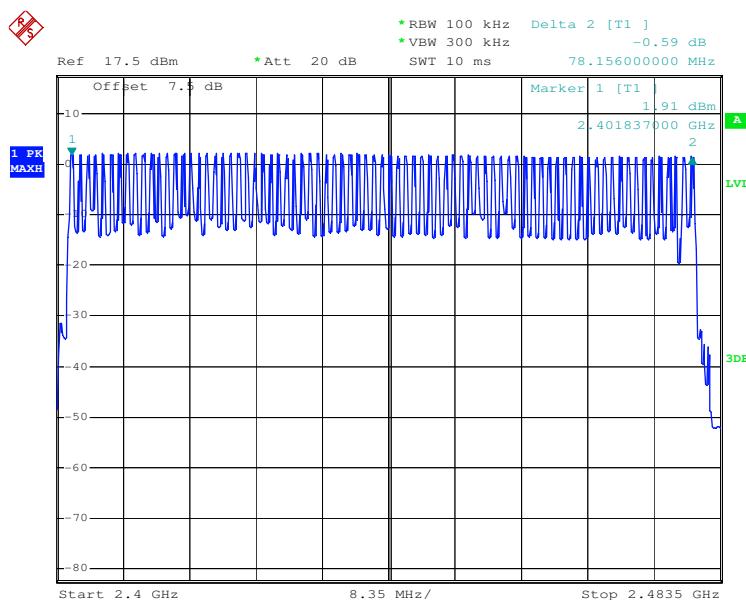

Test mode:	$\pi/4$ DQPSK
------------	---------------

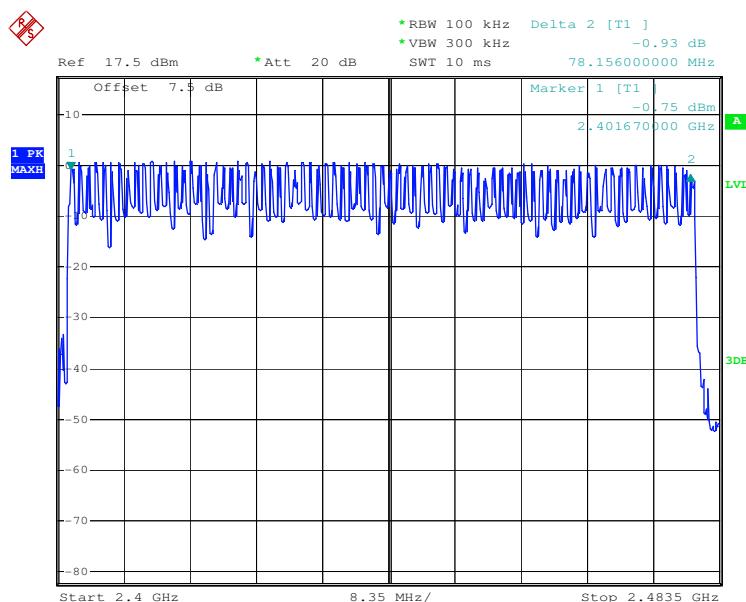

Test mode:	8DPSK
------------	-------

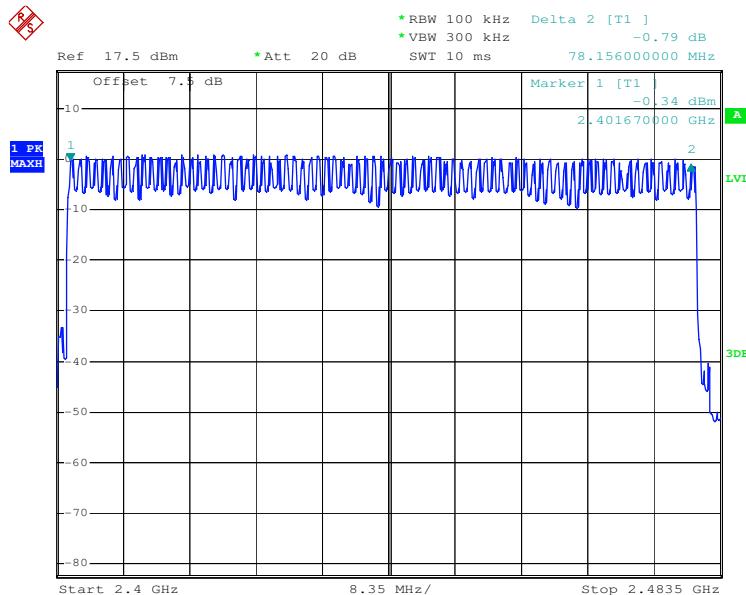

5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 4.8 for details
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1328	0.4
	DH3	0.2672	0.4
	DH5	0.3136	0.4
$\pi/4$ DQPSK	2-DH1	0.1328	0.4
	2-DH3	0.2672	0.4
	2-DH5	0.3136	0.4
8DPSK	3-DH1	0.1312	0.4
	3-DH3	0.2672	0.4
	3-DH5	0.3136	0.4

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow


$$\text{DH1 time slot} = 0.415(\text{ms}) * (1600 / (2 * 79)) * 31.6 = 0.1328\text{s}$$

$$\text{DH3 time slot} = 1.670(\text{ms}) * (1600 / (4 * 79)) * 31.6 = 0.2672\text{s}$$


$$\text{DH5 time slot} = 2.940(\text{ms}) * (1600 / (6 * 79)) * 31.6 = 0.3136\text{s}$$

Test plot as follows


Test mode:	GFSK	Test Packet:	DH1
------------	------	--------------	-----

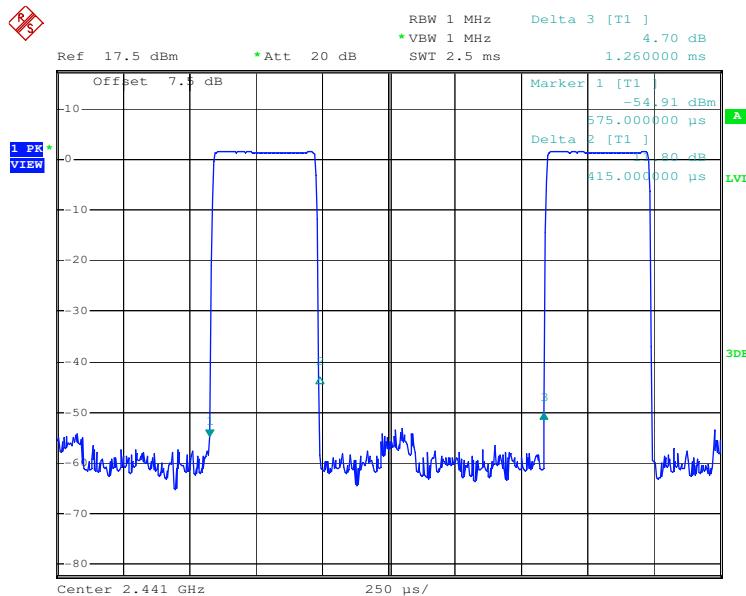


Test mode:	GFSK	Test Packet:	DH3
------------	------	--------------	-----

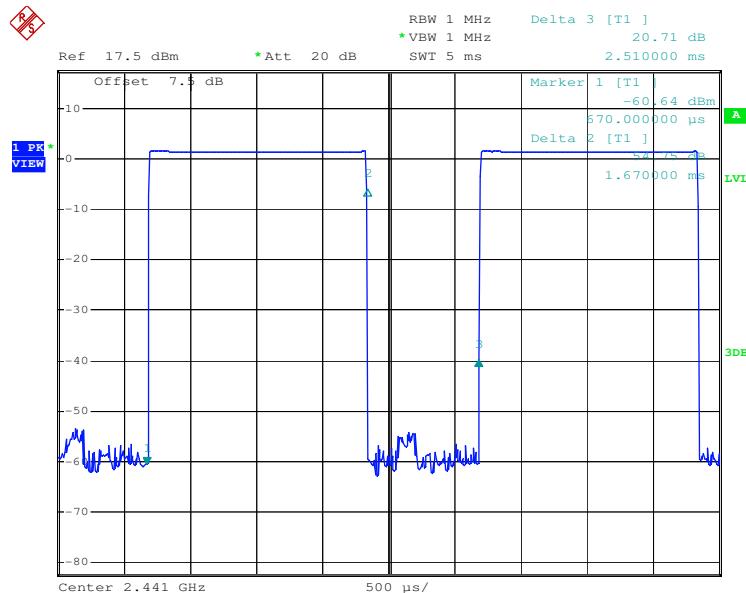


Test mode:	GFSK	Test Packet:	DH5
------------	------	--------------	-----

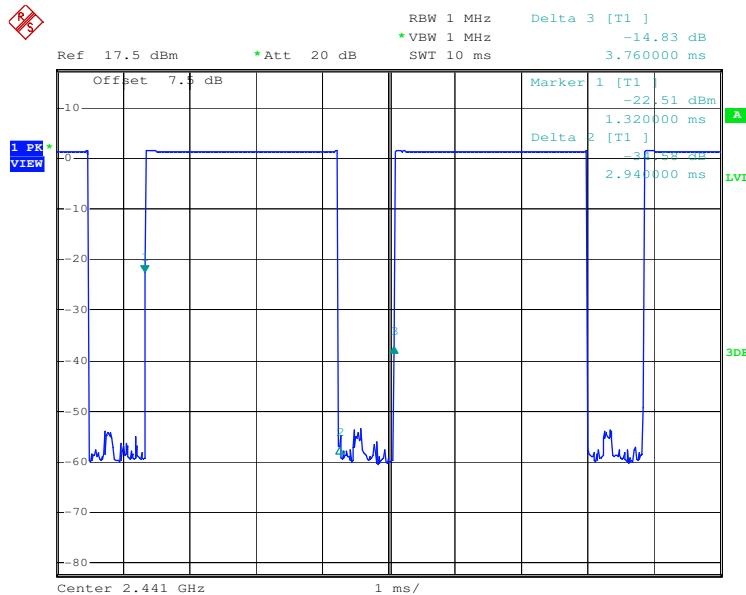


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH1
------------	---------------	--------------	-------

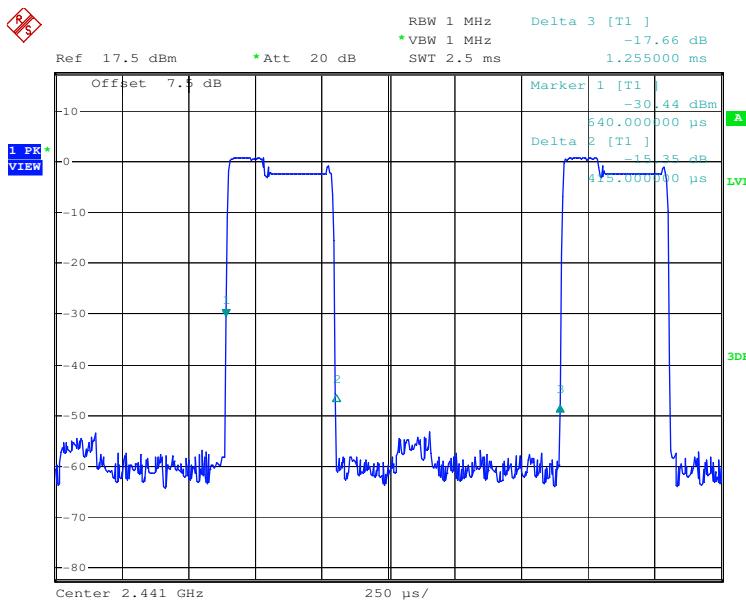


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH3
------------	---------------	--------------	-------

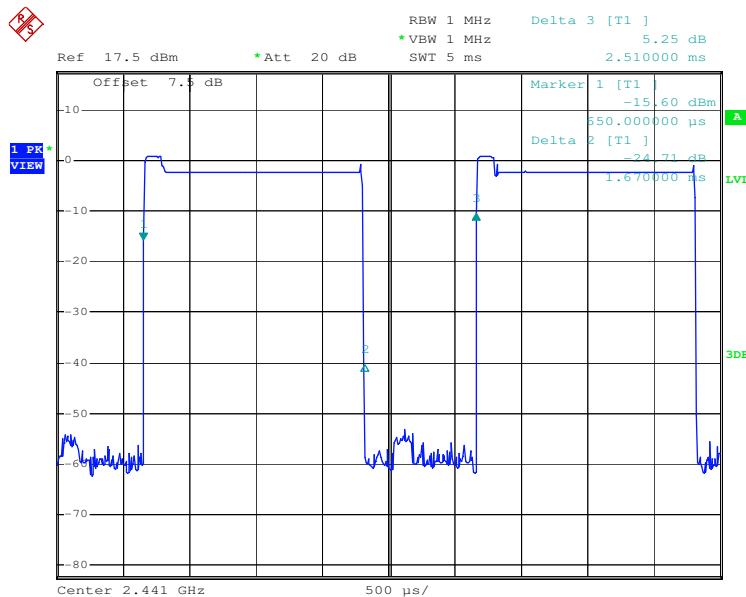


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH5
------------	---------------	--------------	-------

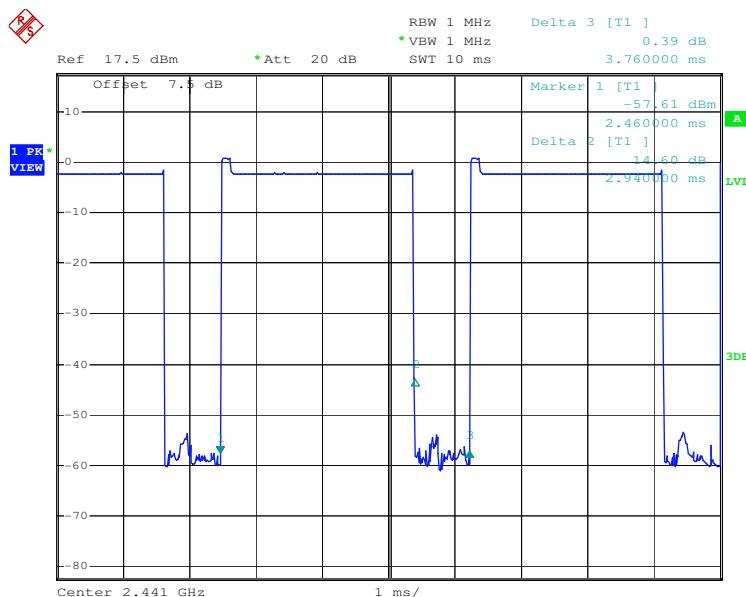


Test mode:	8DPSK	Test Packet:	3-DH1
------------	-------	--------------	-------

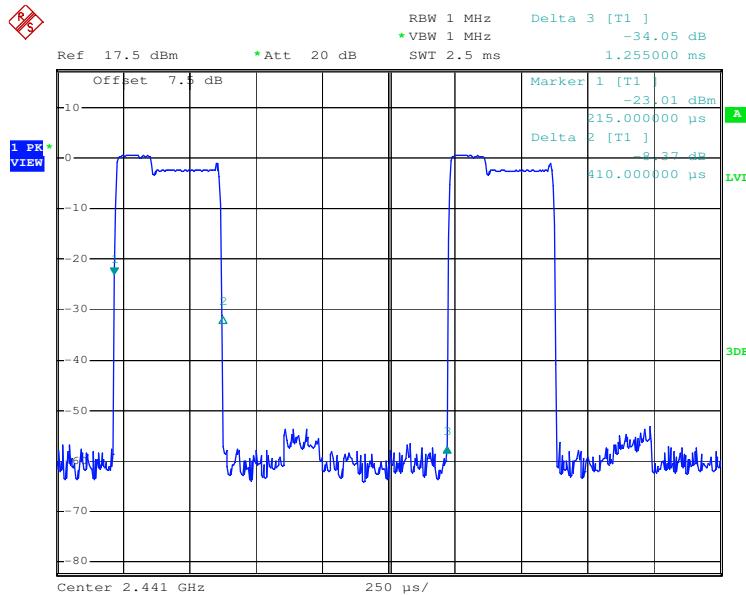

Test mode:	8DPSK	Test Packet:	3-DH3
------------	-------	--------------	-------

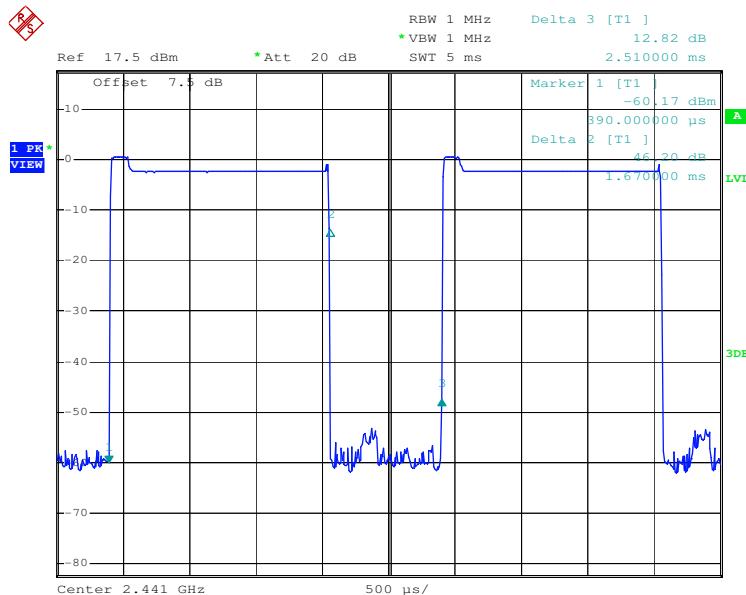

Test mode:	8DPSK	Test Packet:	3-DH5
------------	-------	--------------	-------


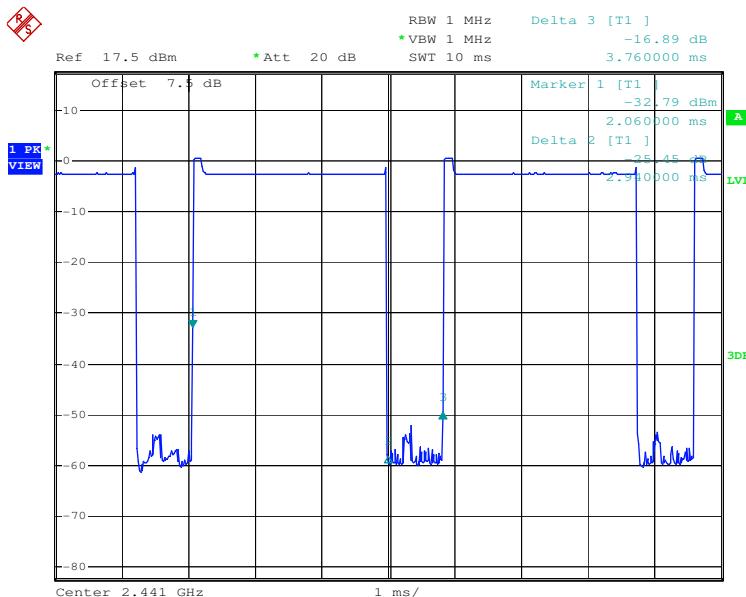


5.8 Band Edge



Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p> <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details
Test state:	Non hopping transmitting and Hopping transmitting with all kinds of modulation.
Test results:	Pass

Test plot as follows:



Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

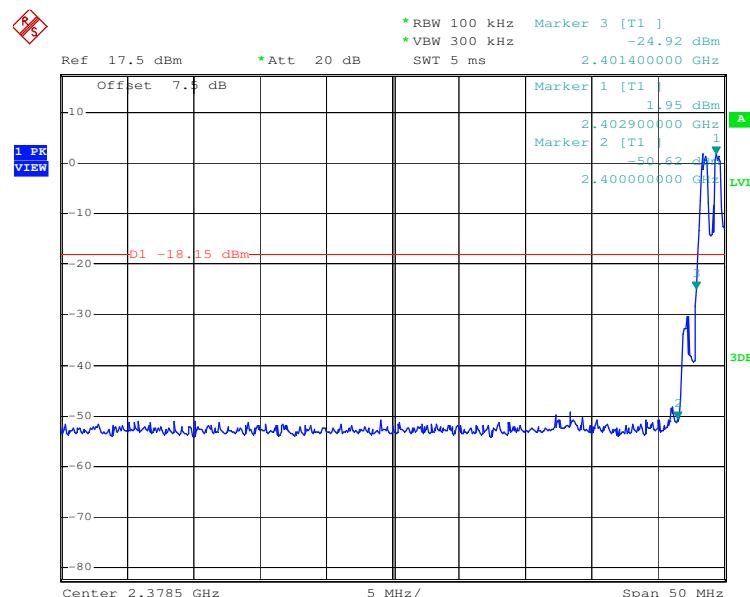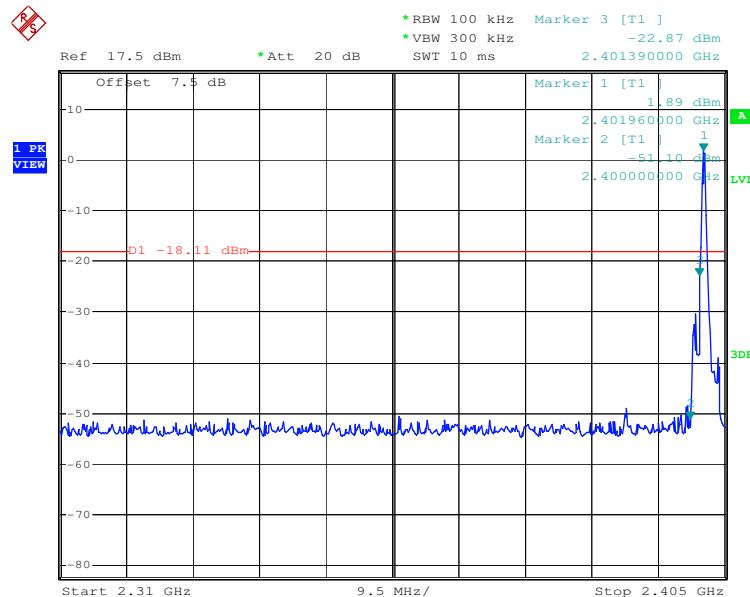



Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

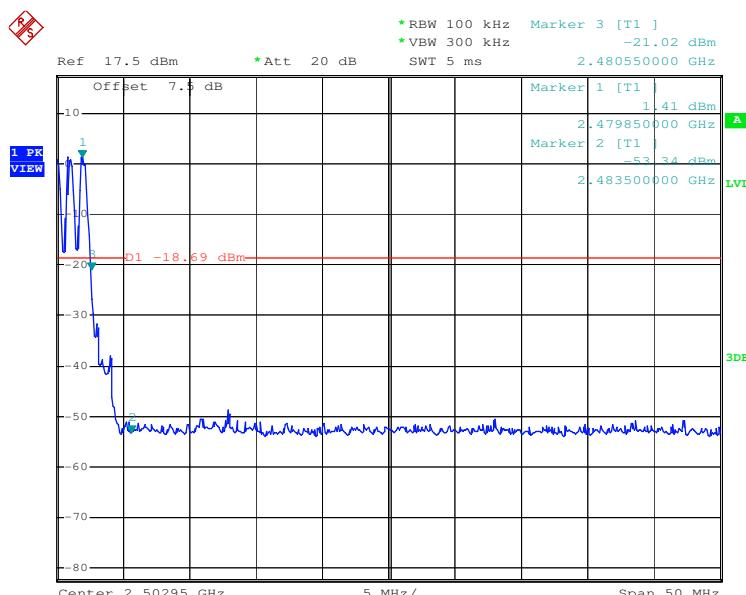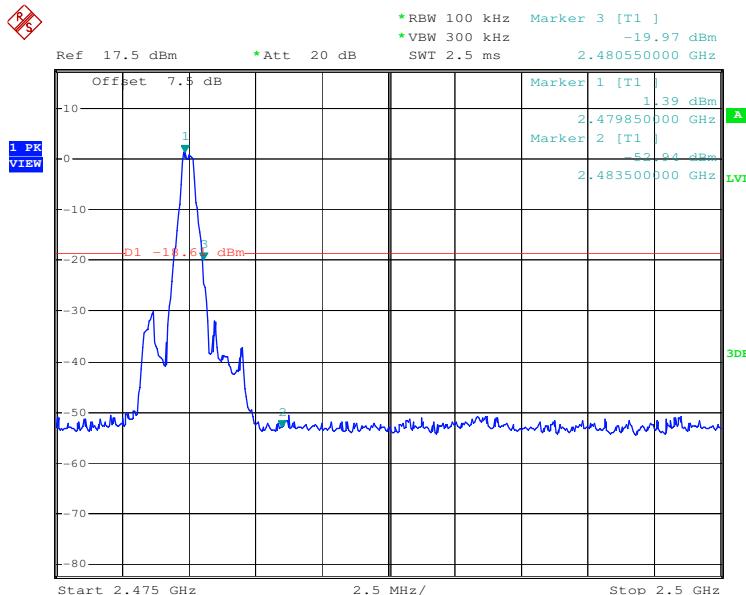



Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

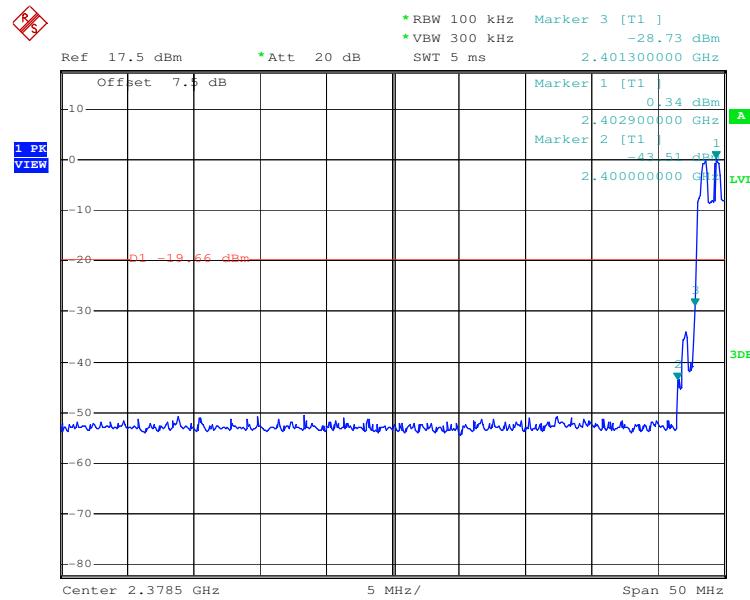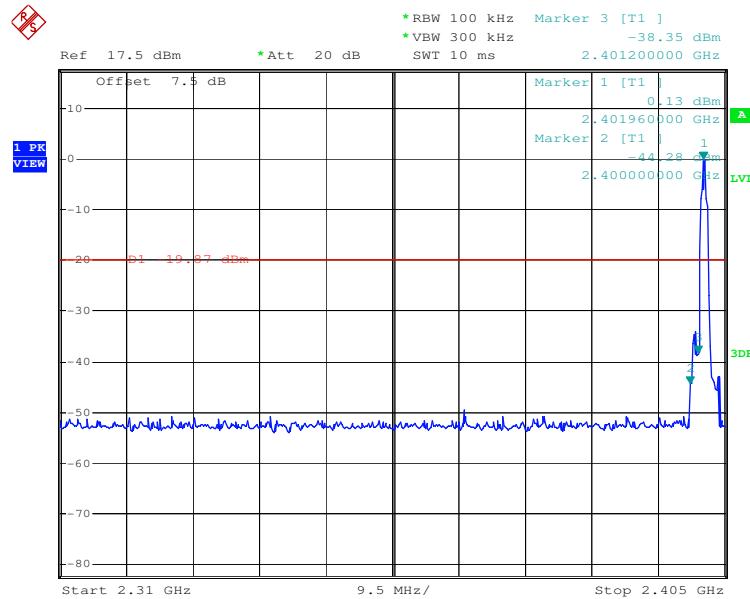



Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

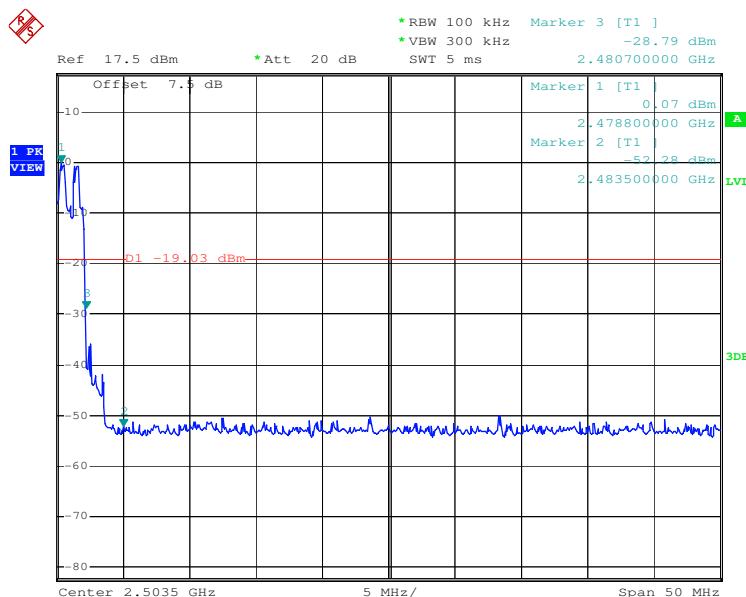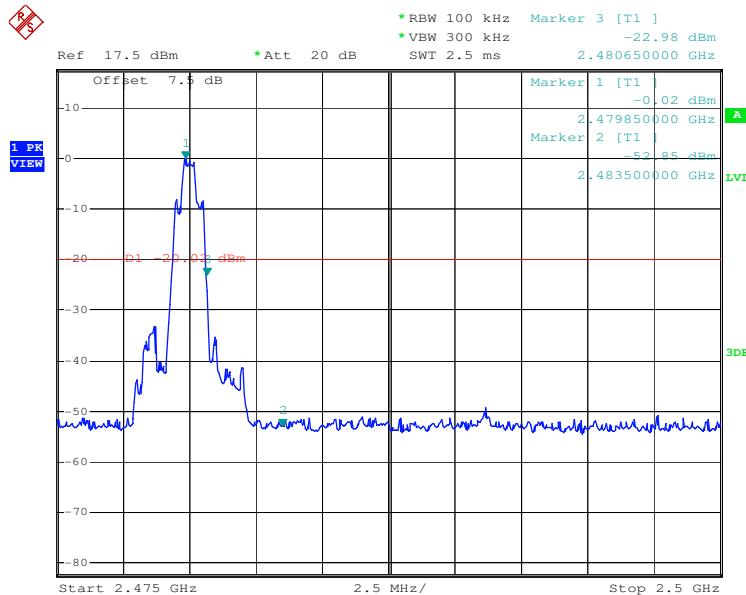


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

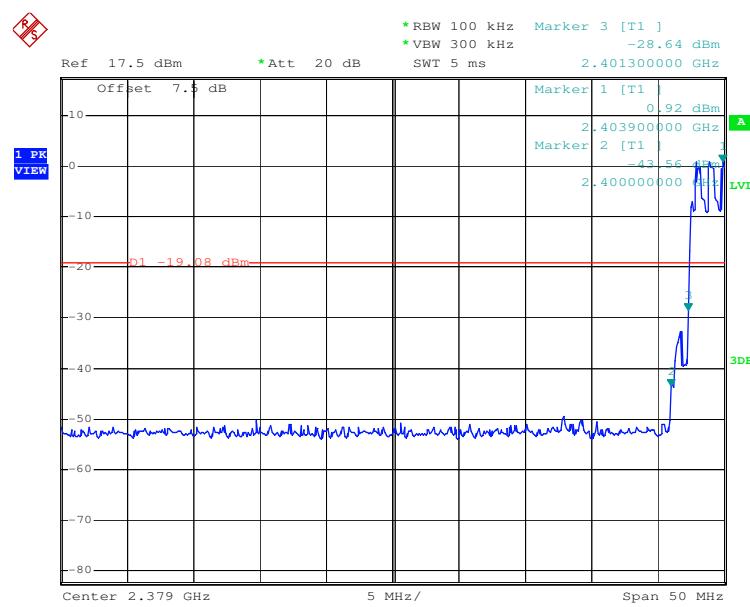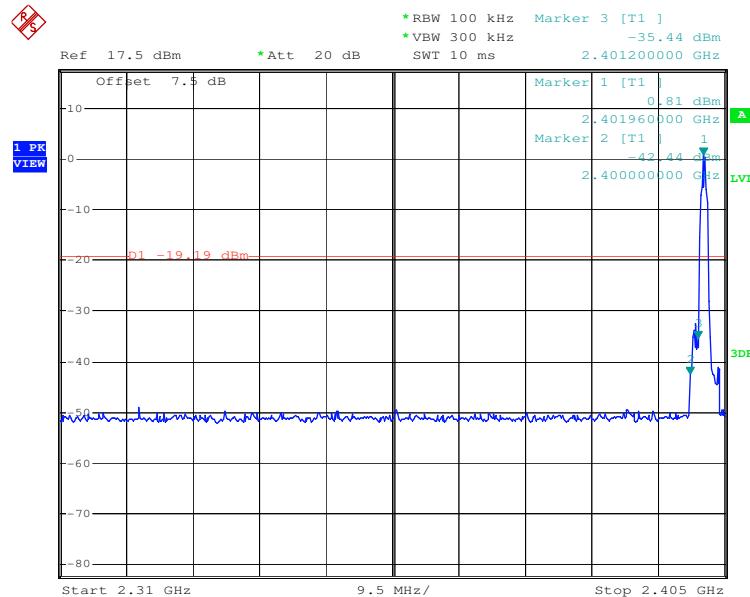


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

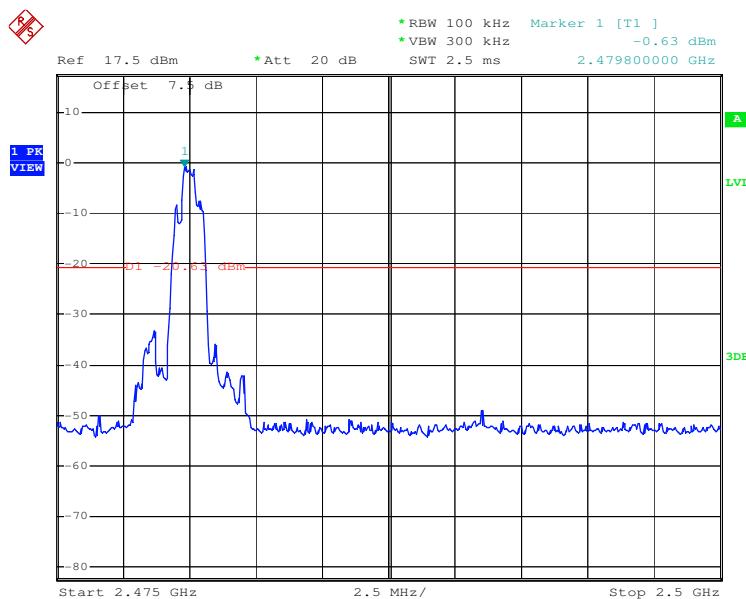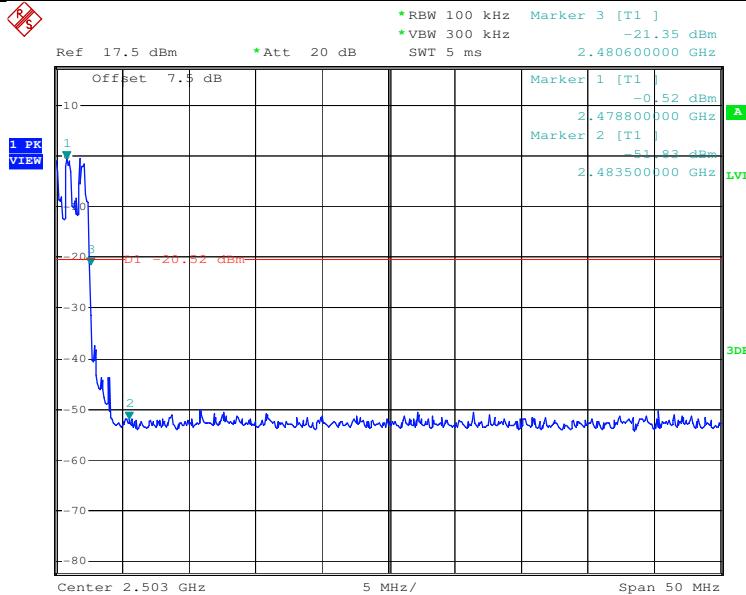


5.9 RF Antenna Conducted spurious emissions

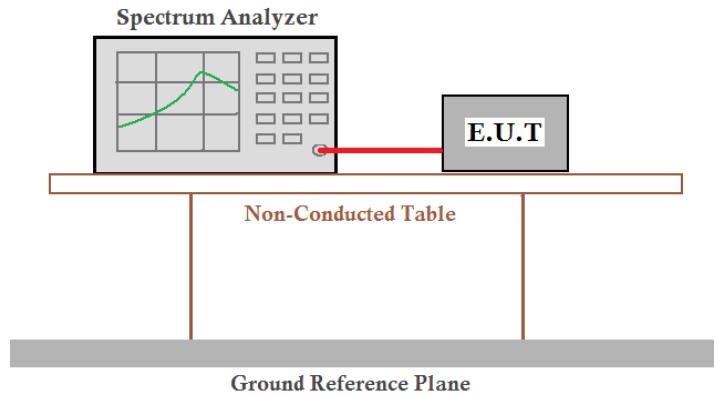Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details
Test results:	Pass


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

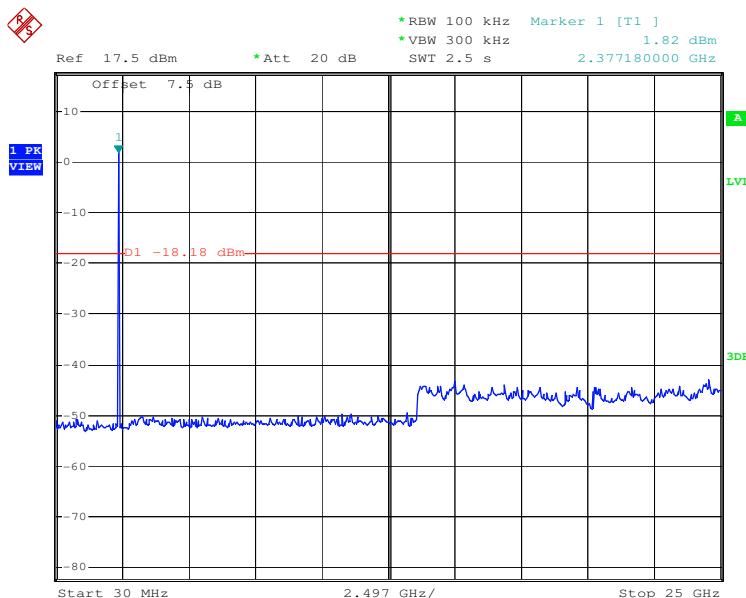


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

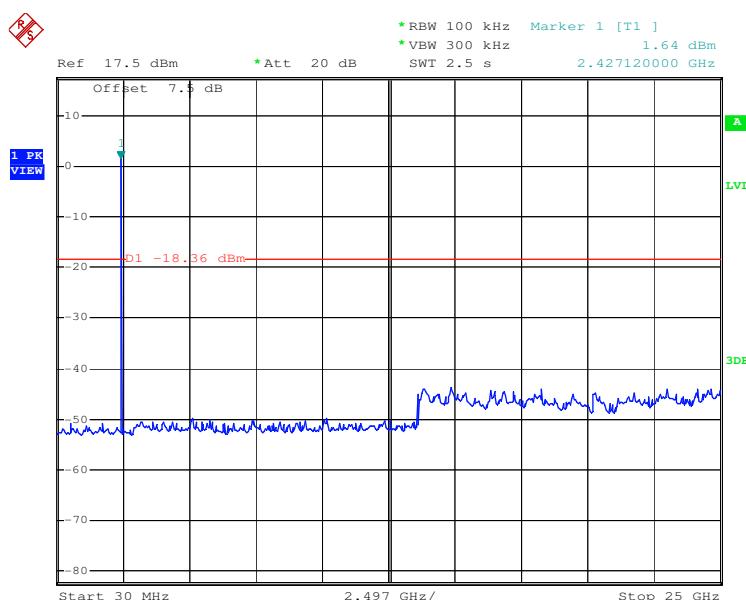


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

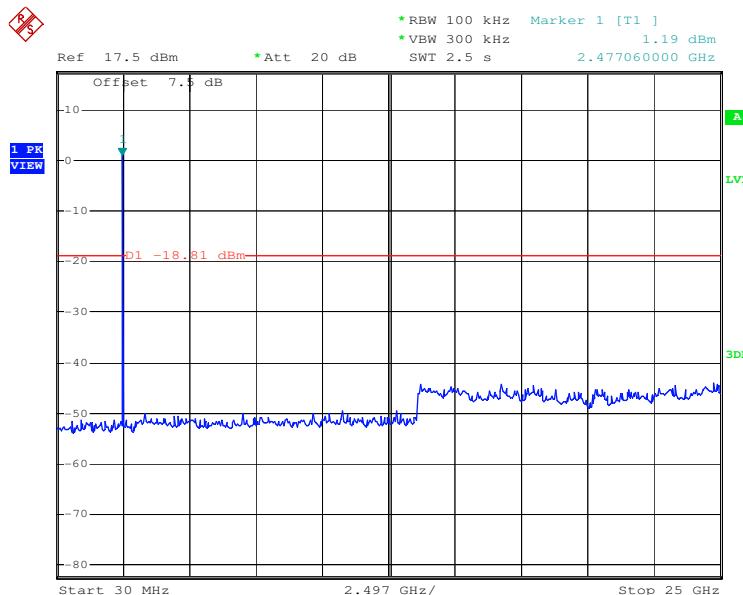


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

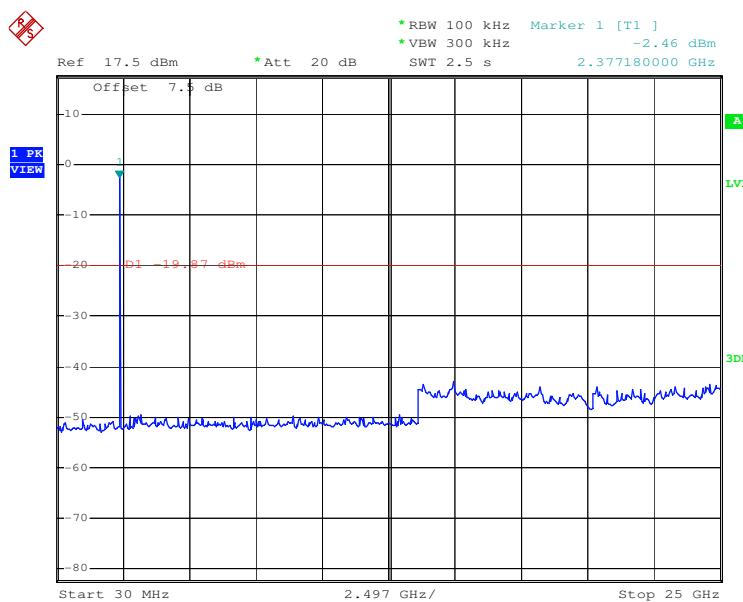


Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

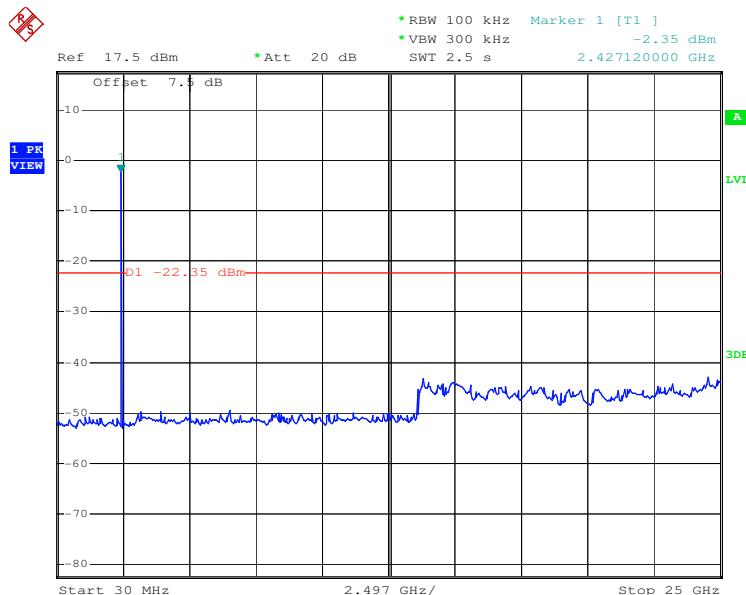


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

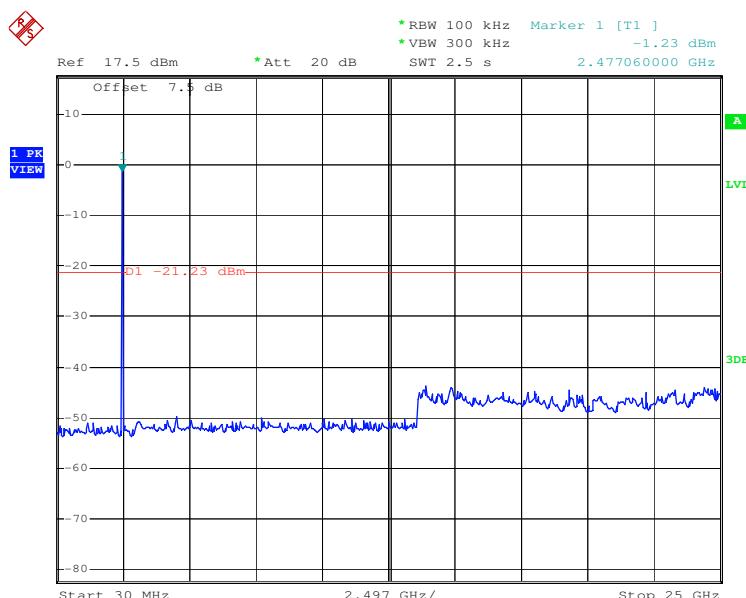


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

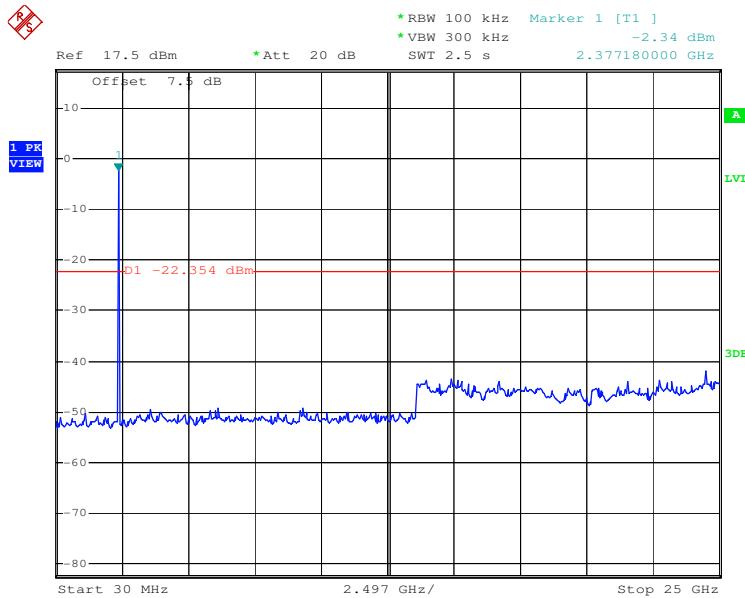


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

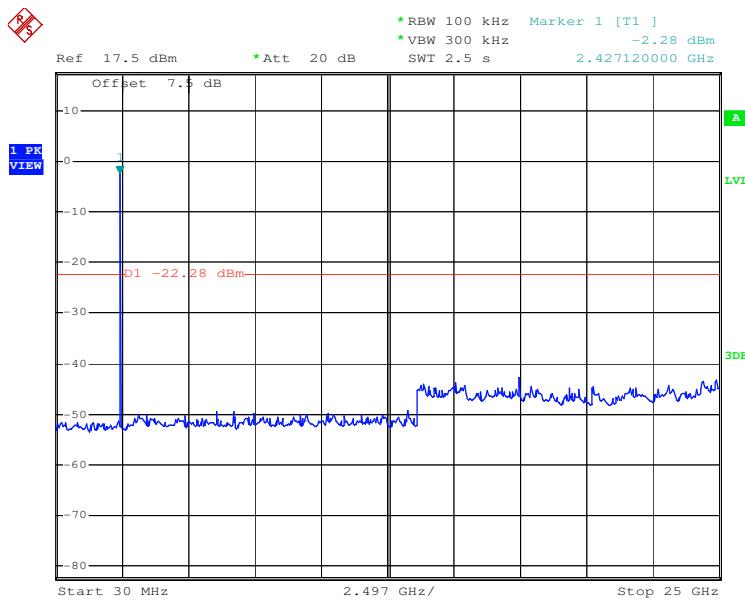

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

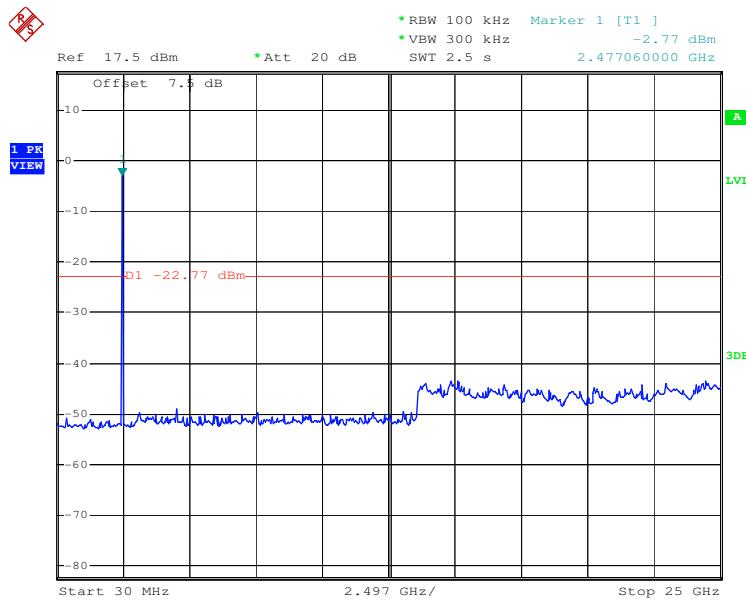

5.10 Pseudorandom Frequency Hopping Sequence

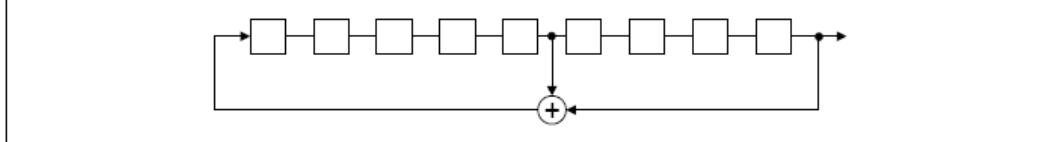Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
	<p>EUT Pseudorandom Frequency Hopping Sequence</p> <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none">• Number of shift register stages: 9• Length of pseudo-random sequence: $2^9 - 1 = 511$ bits• Longest sequence of zeros: 8 (non-inverted signal)																						
	 <p>Linear Feedback Shift Register for Generation of the PRBS sequence</p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"><tr><td>0</td><td>2</td><td>4</td><td>6</td><td>62</td><td>64</td><td>78</td><td>1</td><td>73</td><td>75</td><td>77</td></tr><tr><td> </td><td> </td></tr></table> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													

5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																								
Test Method:	ANSI C63.10: 2009																								
Test Frequency Range:	30MHz to 25GHz																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>100kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td>74.0</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report. 																								
Test Instruments:	Refer to section 4.8 for details																								

Test mode:	Non-hopping transmitting with modulation. 1. Pre-scan the EUT in GFSK, $\pi/4$ DQPSK and 8DPSK modes and find out the worst case is GFSK mode. 2. Test the EUT in Transmitting mode
Test results:	Pass
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>


Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


5.11.1 Radiated emission below 1GHz

Horizontal:

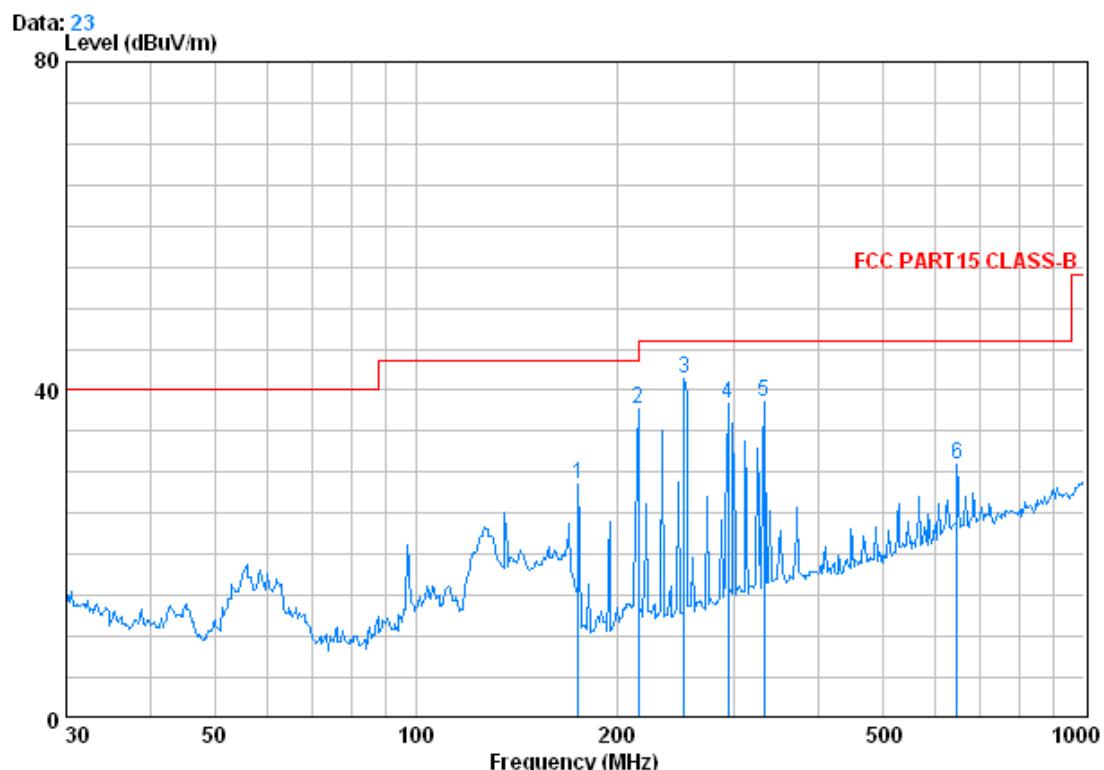

Freq	Cable			Antenna		Preamp		Read Level	Limit	Over Limit	
	Loss	Factor	Factor								
	MHz	dB	dB/m		dB			dBuV	dBuV/m	dBuV/m	dB
1	175.037	1.36	9.71	26.79	44.20	28.48	43.50		-15.02		
2	215.268	1.49	11.01	26.65	51.90	37.76	43.50		-5.74		
3	252.063	1.68	12.34	26.53	53.83	41.32	46.00		-4.68		
4	293.084	1.87	13.58	26.42	49.29	38.32	46.00		-7.68		
5	332.519	2.01	15.01	26.66	48.25	38.60	46.00		-7.40		
6	645.120	2.80	20.58	27.48	34.99	30.89	46.00		-15.11		

Vertical:

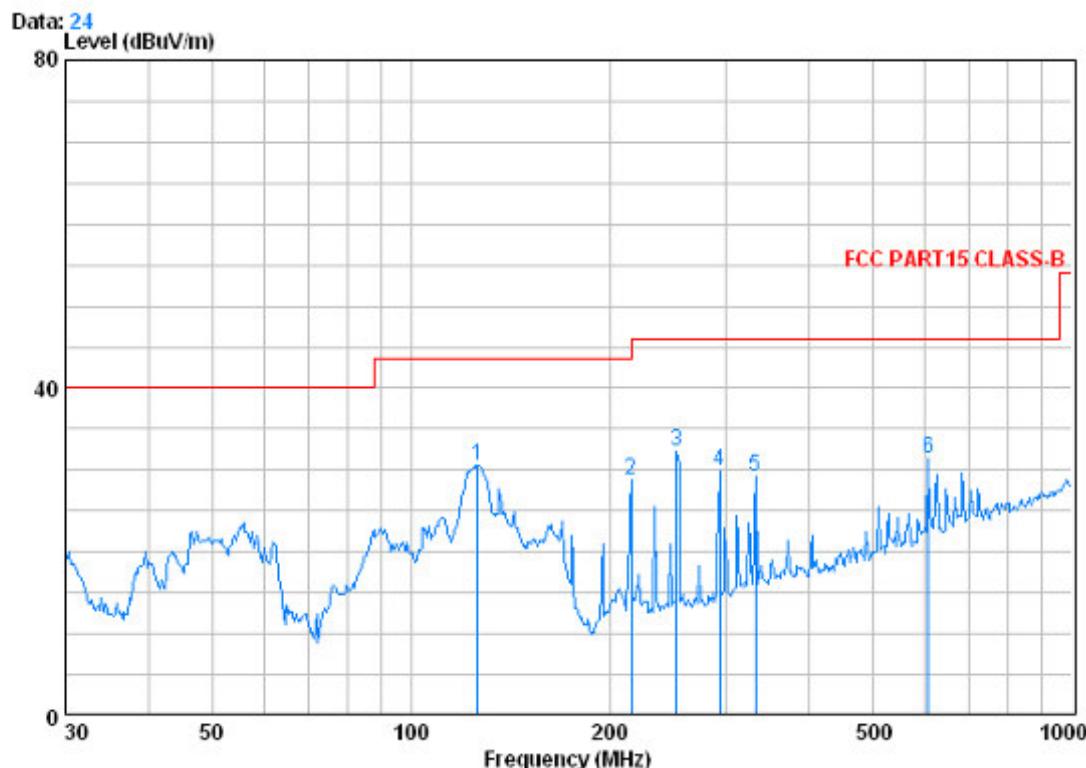

Freq	Cable			Antenna		Preamp	Read	Limit	Over
	Loss	Antenna	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	8	126.329	1.27	7.77	27.03	48.57	30.58	43.50	-12.92
2		215.268	1.49	11.01	26.65	43.02	28.88	43.50	-14.62
3		252.063	1.68	12.34	26.53	44.80	32.30	46.00	-13.70
4		293.084	1.87	13.58	26.42	40.81	29.84	46.00	-16.16
5		332.519	2.01	15.01	26.66	38.76	29.11	46.00	-16.89
6		607.787	2.72	19.99	27.53	36.19	31.36	46.00	-14.64

5.11.2 Transmitter emission above 1GHz

Worst case mode:	GFSK	Test channel:	Lowest	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1587.500	2.57	28.84	39.39	53.98	46.00	74.00	-28.00	Vertical
4595.500	4.55	35.03	41.47	49.64	47.75	74.00	-26.25	Vertical
6475.500	5.25	36.26	40.51	50.78	51.78	74.00	-22.22	Vertical
7803.250	6.22	36.00	39.36	49.77	52.63	74.00	-21.37	Vertical
10000.500	5.97	37.70	37.45	47.25	53.47	74.00	-20.53	Vertical
12350.500	6.56	39.26	38.42	47.95	55.35	74.00	-18.65	Vertical
3749.500	3.95	33.51	40.86	49.83	46.43	74.00	-27.57	Horizontal
4595.500	4.55	35.03	41.47	50.52	48.63	74.00	-25.37	Horizontal
6522.500	5.26	36.28	40.46	50.60	51.68	74.00	-22.32	Horizontal
8449.500	6.18	36.18	38.80	49.60	53.16	74.00	-20.84	Horizontal
10235.500	6.03	37.98	37.54	46.92	53.39	74.00	-20.61	Horizontal
12115.500	6.50	39.02	38.32	47.95	55.15	74.00	-18.85	Horizontal

Worst case mode:	GFSK	Test channel:	Lowest	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	polarization
1587.500	2.57	28.84	39.39	34.28	26.30	54.00	-27.70	Vertical
4595.500	4.55	35.03	41.47	35.80	33.91	54.00	-20.09	Vertical
6475.500	5.25	36.26	40.51	36.44	37.44	54.00	-16.56	Vertical
7803.250	6.22	36.00	39.36	35.37	38.23	54.00	-15.77	Vertical
10000.500	5.97	37.70	37.45	31.99	38.21	54.00	-15.79	Vertical
12350.500	6.56	39.26	38.42	33.60	41.00	54.00	-13.00	Vertical
3749.500	3.95	33.51	40.86	35.25	31.85	54.00	-22.15	Horizontal
4595.500	4.55	35.03	41.47	35.85	33.96	54.00	-20.04	Horizontal
6522.500	5.26	36.28	40.46	36.44	37.52	54.00	-16.48	Horizontal
8449.500	6.18	36.18	38.80	34.50	38.06	54.00	-15.94	Horizontal
10235.500	6.03	37.98	37.54	32.03	38.50	54.00	-15.50	Horizontal
12115.500	6.50	39.02	38.32	33.07	40.27	54.00	-13.73	Horizontal

Worst case mode:	GFSK	Test channel:	Middle	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1599.250	2.58	28.84	39.40	53.08	45.10	74.00	-28.90	Vertical
5206.500	4.85	34.60	41.62	50.01	47.84	74.00	-26.16	Vertical
6710.500	5.31	36.09	40.30	50.08	51.18	74.00	-22.82	Vertical
8085.250	6.20	36.03	39.11	49.03	52.15	74.00	-21.85	Vertical
10388.250	6.07	38.16	37.61	46.96	53.58	74.00	-20.42	Vertical
12174.250	6.51	39.07	38.35	47.79	55.02	74.00	-18.98	Vertical
3373.500	3.62	33.25	40.58	48.96	45.25	74.00	-28.75	Horizontal
4701.250	4.62	34.87	41.56	49.50	47.43	74.00	-26.57	Horizontal
6205.250	5.18	35.94	40.74	50.06	50.44	74.00	-23.56	Horizontal
7791.500	6.22	36.00	39.38	49.14	51.98	74.00	-22.02	Horizontal
8837.250	6.16	36.47	38.47	47.62	51.78	74.00	-22.22	Horizontal
11986.250	6.47	38.88	38.27	46.69	53.77	74.00	-20.23	Horizontal

Worse case mode:	GFSK	Test channel:	Middle	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	polarization
1599.250	2.58	28.84	39.40	33.88	25.90	54.00	-28.10	Vertical
5206.500	4.85	34.60	41.62	35.72	33.55	54.00	-20.45	Vertical
6710.500	5.31	36.09	40.30	35.91	37.01	54.00	-16.99	Vertical
8085.250	6.20	36.03	39.11	34.64	37.76	54.00	-16.24	Vertical
10388.250	6.07	38.16	37.61	31.65	38.27	54.00	-15.73	Vertical
12174.250	6.51	39.07	38.35	33.01	40.24	54.00	-13.76	Vertical
3373.500	3.62	33.25	40.58	34.38	30.67	54.00	-23.33	Horizontal
4701.250	4.62	34.87	41.56	35.35	33.28	54.00	-20.72	Horizontal
6205.250	5.18	35.94	40.74	36.10	36.48	54.00	-17.52	Horizontal
7791.500	6.22	36.00	39.38	34.86	37.70	54.00	-16.30	Horizontal
8837.250	6.16	36.47	38.47	33.30	37.46	54.00	-16.54	Horizontal
11986.250	6.47	38.88	38.27	32.76	39.84	54.00	-14.16	Horizontal





Worse case mode:	GFSK	Test channel:	Highest	Remark:	Peak
------------------	------	---------------	---------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1634.500	2.60	29.09	39.41	52.27	44.55	74.00	-29.45	Vertical
3937.500	4.11	33.74	41.00	49.57	46.42	74.00	-27.58	Vertical
5735.250	5.04	35.29	41.15	50.93	50.11	74.00	-23.89	Vertical
7227.500	5.81	35.89	39.85	49.97	51.82	74.00	-22.18	Vertical
10047.500	5.98	37.76	37.47	45.60	51.87	74.00	-22.13	Vertical
12221.250	6.53	39.12	38.37	47.37	54.65	74.00	-19.35	Vertical
3890.500	4.07	33.68	40.95	49.50	46.30	74.00	-27.70	Horizontal
4795.250	4.68	34.73	41.63	50.38	48.16	74.00	-25.84	Horizontal
6675.250	5.30	36.13	40.33	50.15	51.25	74.00	-22.75	Horizontal
7756.250	6.22	36.00	39.39	49.89	52.72	74.00	-21.28	Horizontal
10047.500	5.98	37.76	37.47	46.36	52.63	74.00	-21.37	Horizontal
12350.500	6.56	39.26	38.42	47.87	55.27	74.00	-18.73	Horizontal

Worse case mode:	GFSK	Test channel:	Highest	Remark:	Average
------------------	------	---------------	---------	---------	---------


Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	polarization
1634.500	2.60	29.09	39.41	33.98	26.26	54.00	-27.74	Vertical
3937.500	4.11	33.74	41.00	34.89	31.74	54.00	-22.26	Vertical
5735.250	5.04	35.29	41.15	36.22	35.40	54.00	-18.60	Vertical
7227.500	5.81	35.89	39.85	35.16	37.01	54.00	-16.99	Vertical
10047.500	5.98	37.76	37.47	31.89	38.16	54.00	-15.84	Vertical
12221.250	6.53	39.12	38.37	33.20	40.48	54.00	-13.52	Vertical
3890.500	4.07	33.68	40.95	34.92	31.72	54.00	-22.28	Horizontal
4795.250	4.68	34.73	41.63	35.56	33.34	54.00	-20.66	Horizontal
6675.250	5.30	36.13	40.33	36.06	37.16	54.00	-16.84	Horizontal
7756.250	6.22	36.00	39.39	35.07	37.90	54.00	-16.10	Horizontal
10047.500	5.98	37.76	37.47	31.89	38.16	54.00	-15.84	Horizontal
12350.500	6.56	39.26	38.42	33.34	40.74	54.00	-13.26	Horizontal

Remark: The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

5.11.3 Band edge (Radiated Emission)


Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak
------------	--------------	---------------	--------	---------	------

Vertical:

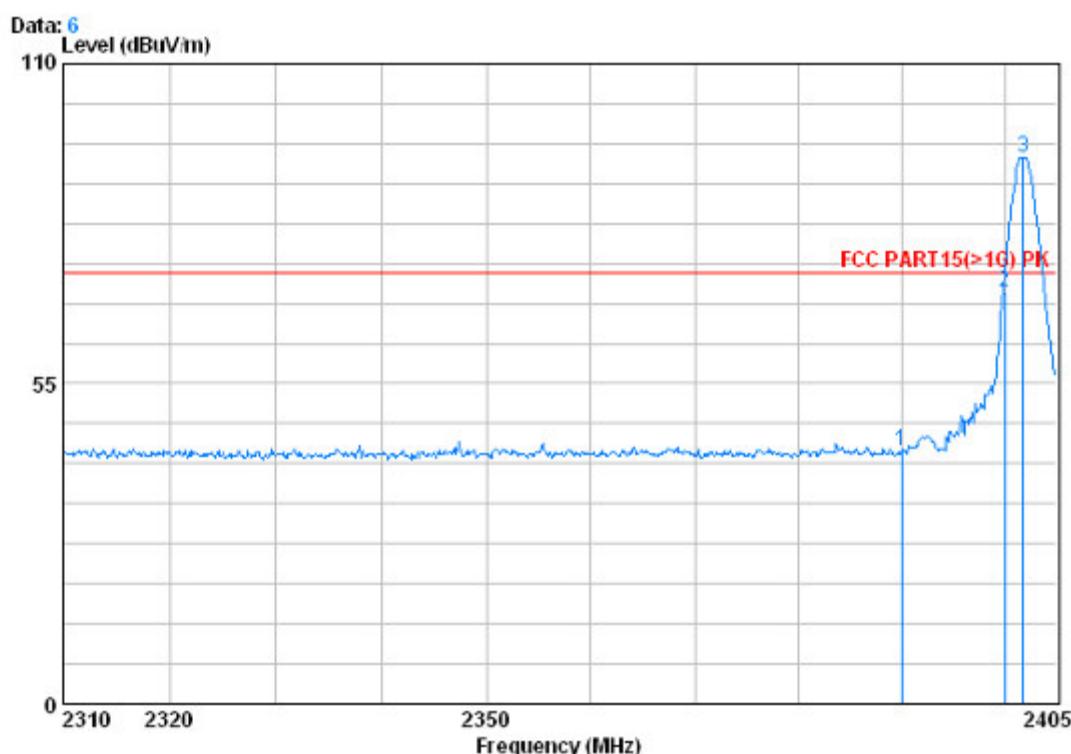

Freq	Cable		Antenna		Preamp	Read	Limit	Over	
	Loss	dB	Factor	dB/m	Factor	Level			
	MHz					dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	47.88	47.88	43.52	74.00	-30.48
2	2400.000	2.98	32.51	39.86	75.16	75.16	70.79	74.00	-3.21
3 X	2401.770	2.98	32.51	39.86	98.27	98.27	93.91	74.00	19.91


Horizontal:

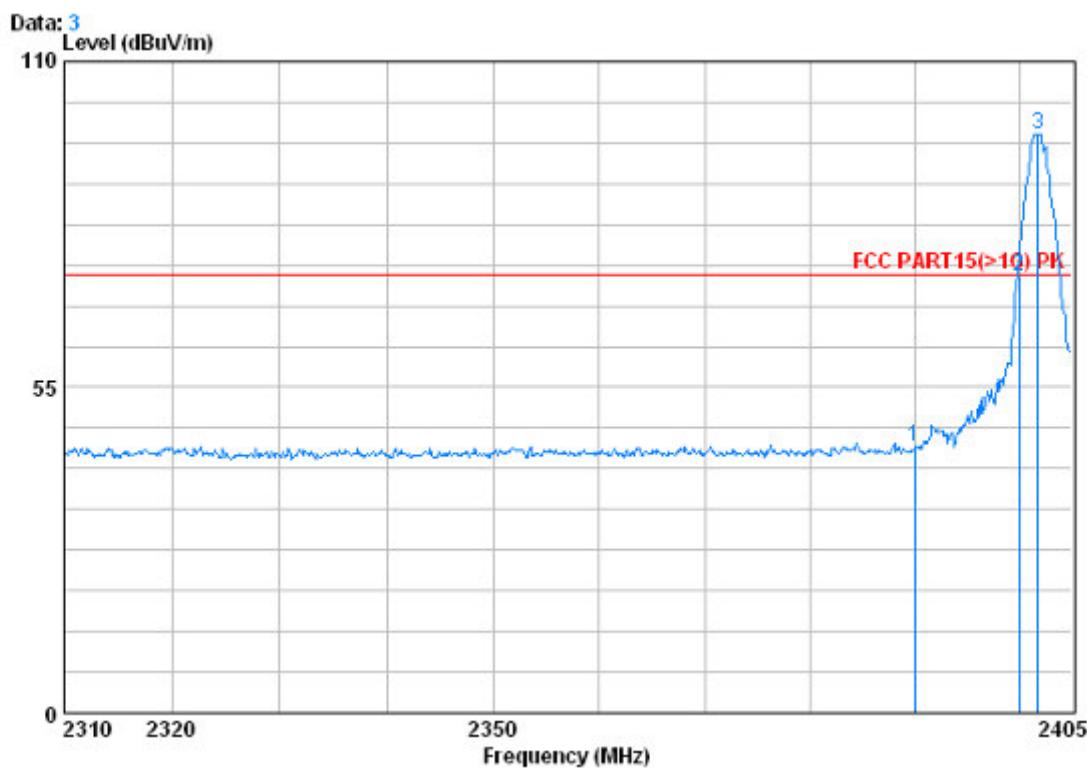

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	49.26	44.91	74.00	-29.09
2	2400.000	2.98	32.51	39.86	77.96	73.59	74.00	-0.41
3	2401.770	2.98	32.51	39.86	102.08	97.72	74.00	23.72


Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average
------------	--------------	---------------	--------	---------	---------

Vertical:

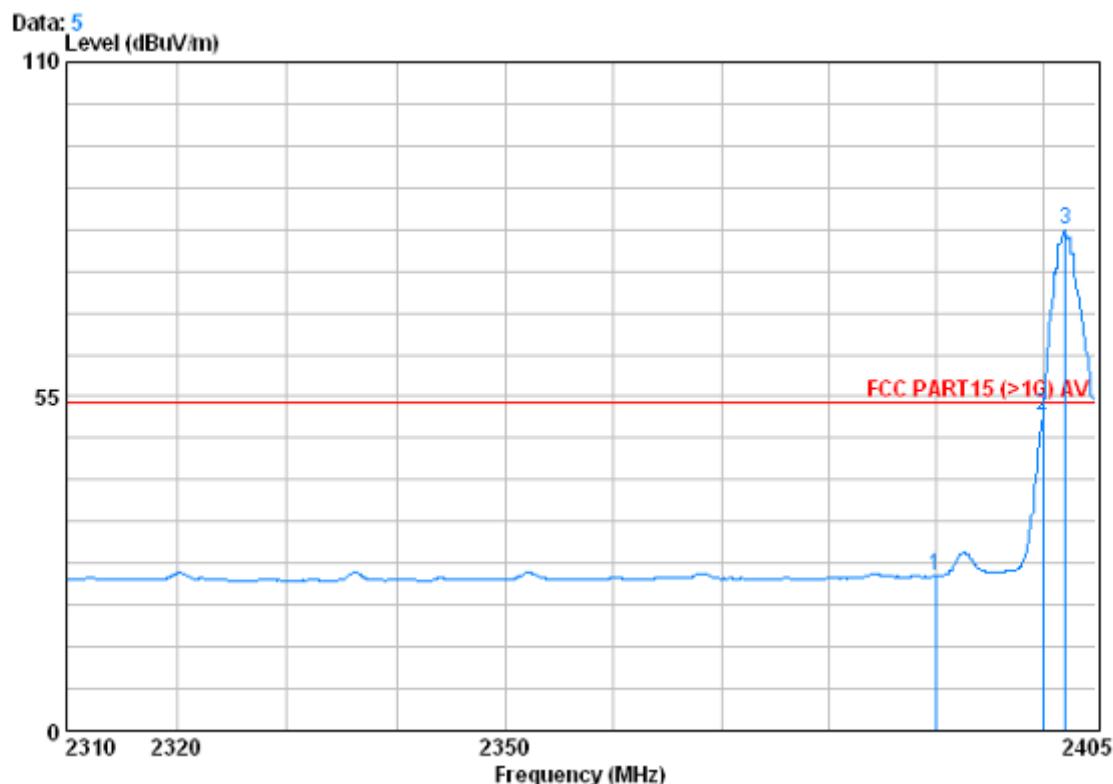

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	29.83	25.47	54.00	-28.53
2	2400.000	2.98	32.51	39.86	56.21	51.85	54.00	-2.15
3	2402.150	2.98	32.51	39.86	86.71	82.34	54.00	28.34


Horizontal:

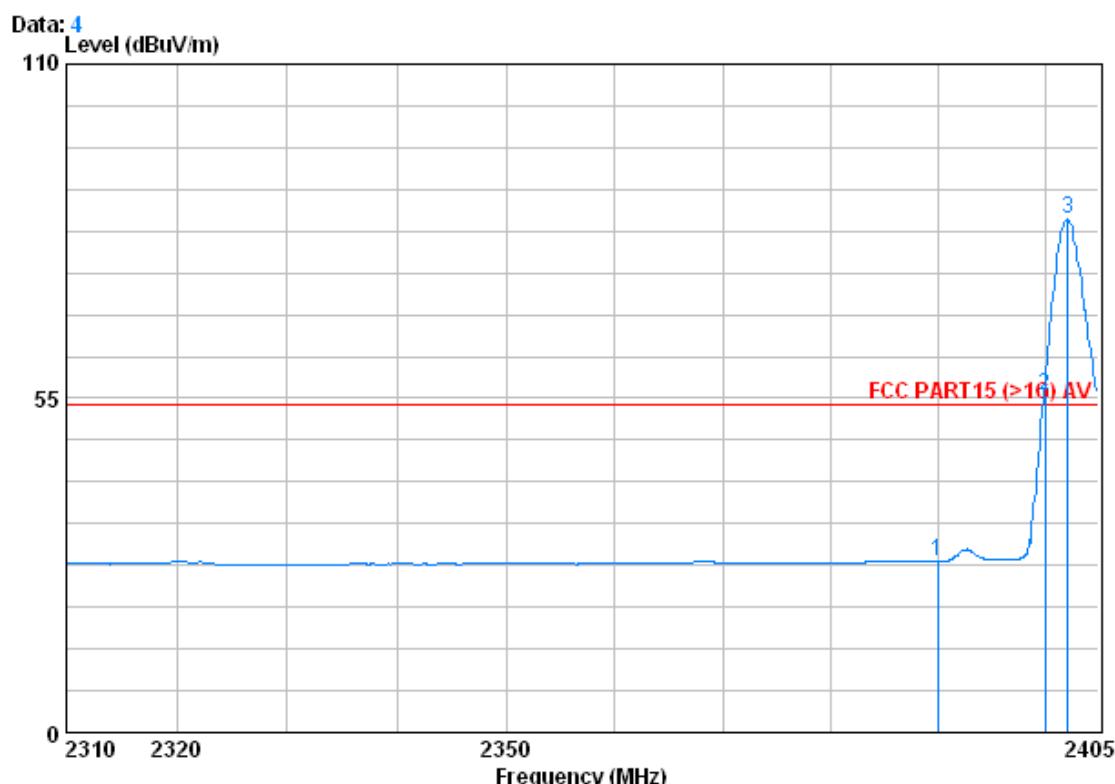

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	32.62	28.27	54.00	-25.73
2 X	2400.000	2.98	32.51	39.86	59.75	55.38	54.00	1.38
3 0	2402.150	2.98	32.51	39.86	89.03	84.66	54.00	30.66


Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak
------------	--------------	---------------	---------	---------	------

Vertical:

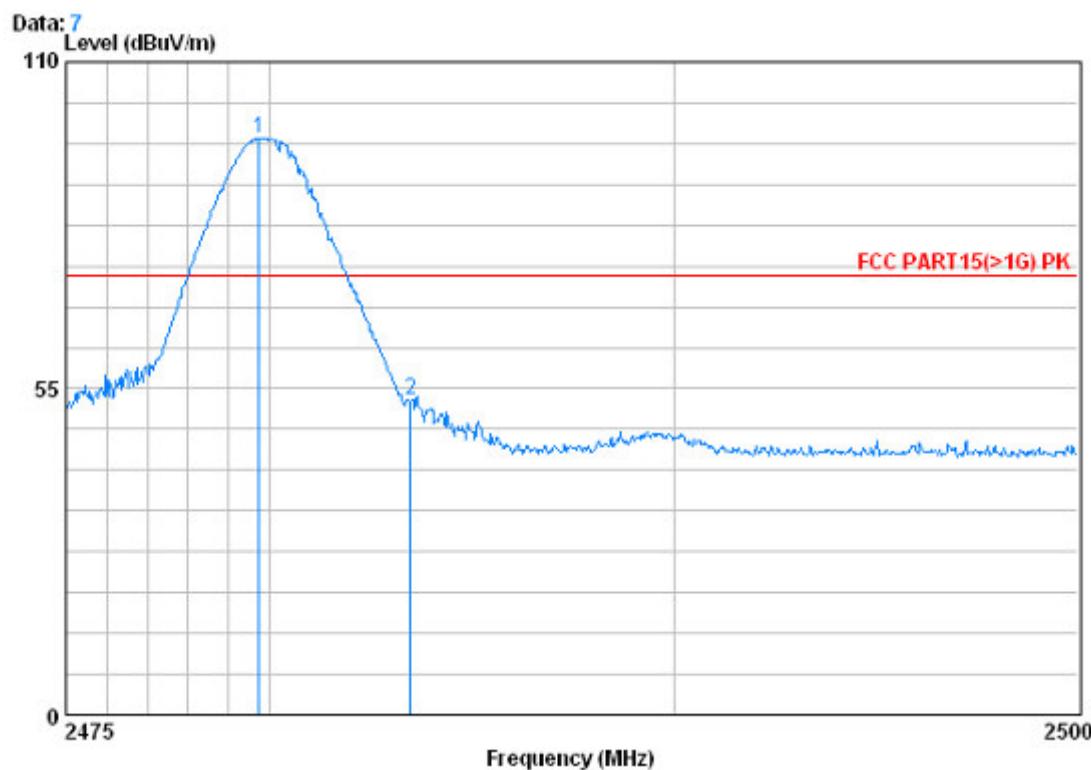

Freq	Cable		Antenna	Preamp	Read		Limit	Over
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2479.750	3.03	32.67	39.92	101.34	97.12	74.00	23.12
2	2483.500	3.03	32.67	39.92	57.13	52.91	74.00	-21.09


Horizontal:

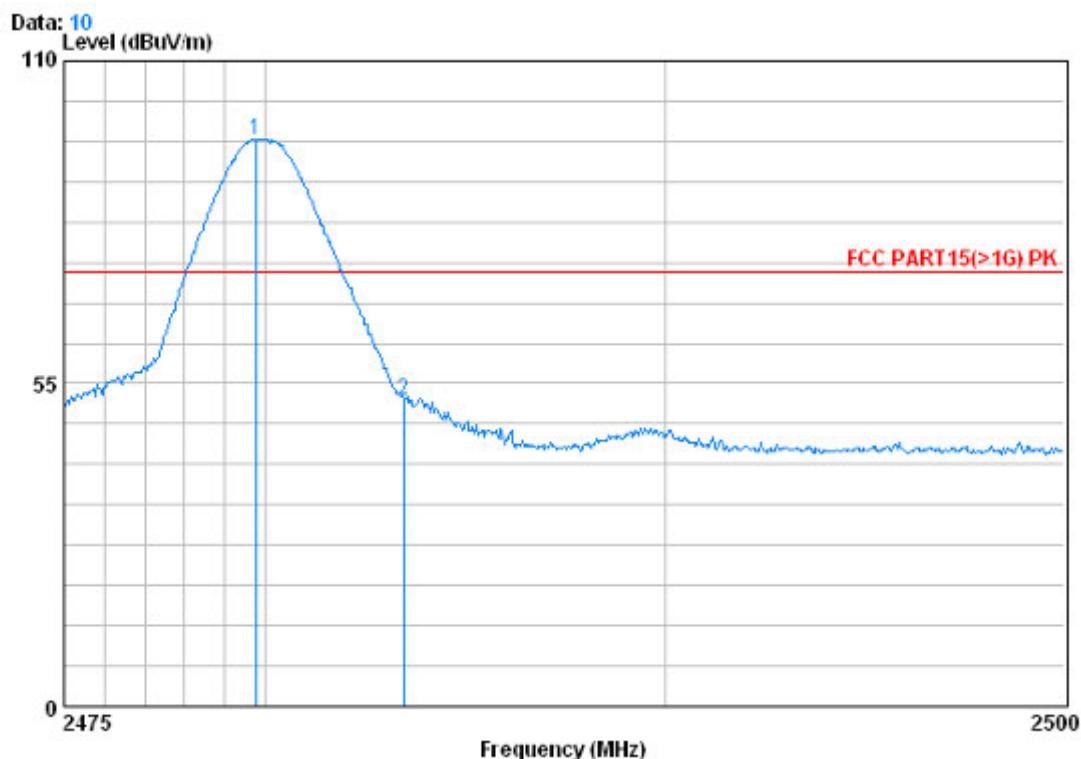

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @	2479.775	3.03	32.67	39.92	100.81	96.59	74.00	22.59
2	2483.475	3.03	32.67	39.92	56.44	52.22	74.00	-21.78


Test mode:	Transmitting	Test channel:	Highest	Remark:	Average
------------	--------------	---------------	---------	---------	---------

Vertical:

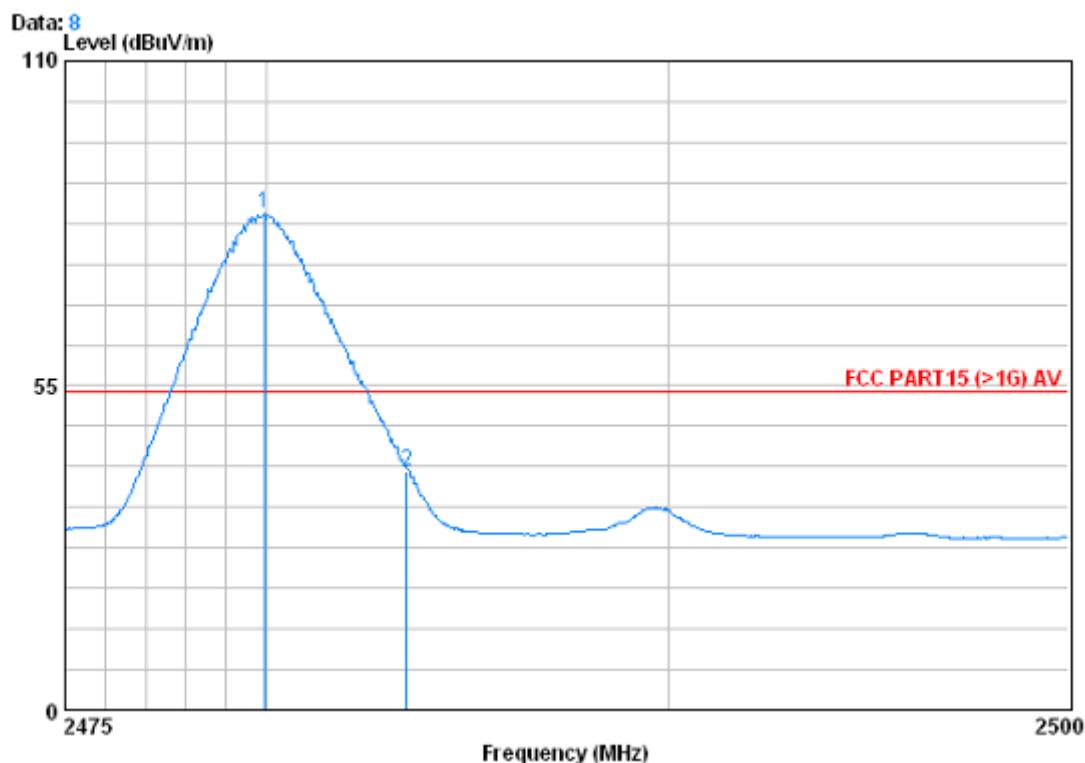

Freq	Cable		Antenna	Preamp	Read		Limit	Over
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2479.950	3.03	32.67	39.92	88.37	84.15	54.00	30.15
2	2483.500	3.03	32.67	39.92	44.69	40.47	54.00	-13.53

Horizontal:

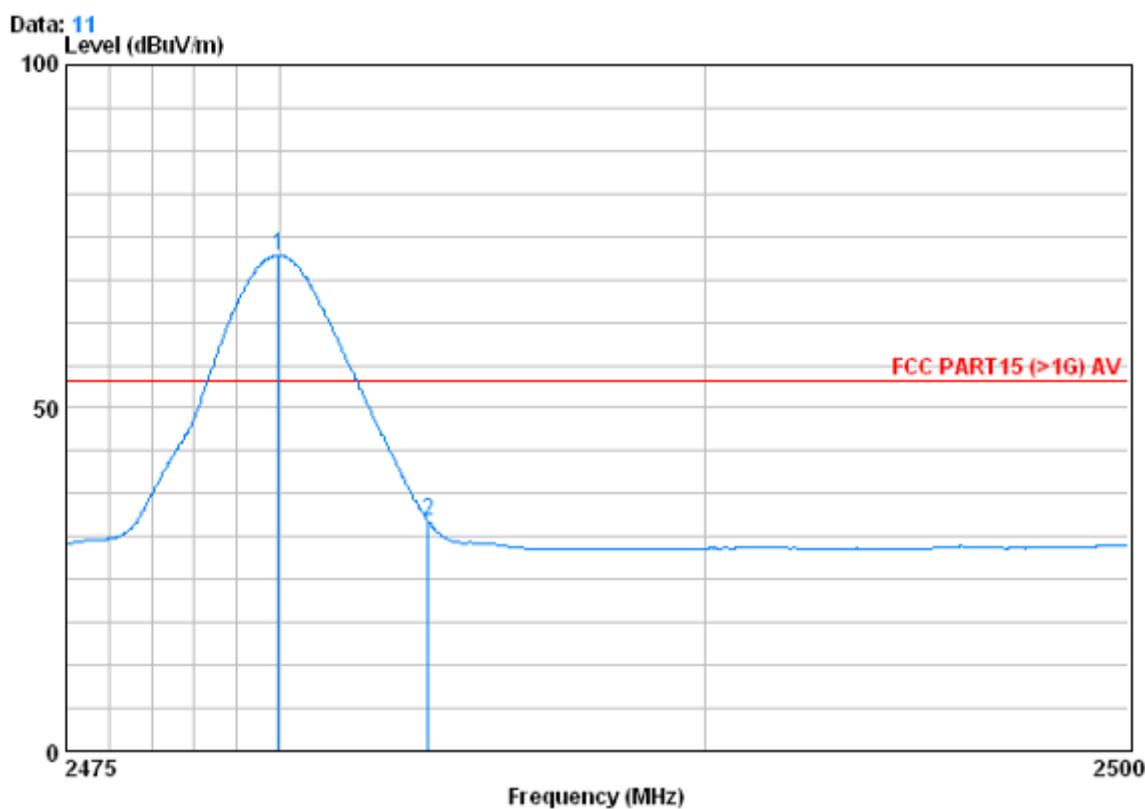

Freq	Cable		Antenna	Preamp	Read	Limit	Over	Line	Over
	Loss	Factor	Factor	Level	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m		
1 X	2479.975	3.03	32.67	39.92	76.46	72.24	54.00	18.24	
2	2483.500	3.03	32.67	39.92	37.67	33.45	54.00	-20.55	