



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E, PART 27 MEASUREMENT AND TEST REPORT

For

Samuelson Enterprises PLLC

16540 Scenic Drive, Barbeau, 49710, Michigan, USA

FCC ID: 2A2CO-FALCON-50

Report Type: Original Report	Product Type: 4G POC Radio
Report Number: SZ1210511-16362E-00C	
Report Date: 2021-07-26	
Reviewed By: Ivan Cao Assistant Manager 	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50- RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	44
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	87
APPLICABLE STANDARD	87
TEST PROCEDURE	87
TEST EQUIPMENT LIST AND DETAILS.....	87
TEST DATA	87
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	126
APPLICABLE STANDARD	126
TEST PROCEDURE	126
TEST EQUIPMENT LIST AND DETAILS.....	127
TEST DATA	127
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	140
APPLICABLE STANDARD	140
TEST PROCEDURE	140
TEST EQUIPMENT LIST AND DETAILS.....	140
TEST DATA	140

FCC §2.1055, §22.355 & §24.235 & §27.54- FREQUENCY STABILITY.....	169
APPLICABLE STANDARD	169
TEST PROCEDURE	169
TEST EQUIPMENT LIST AND DETAILS.....	170
TEST DATA	170

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		4G POC Radio
EUT Model:		Scorpion Falcon 50
Operation modes:		GSM Voice, GPRS/EDGE Data, WCDMA(R99 (Voice+Data), HSDPA,HSUPA Data) FDD-LTE,TDD-LTE
Antenna Gain[▲]:		GSM850/WCDMA B5/LTE B5:2.54 dBi(0.39dBd) PCS1900/WCDMA B2/LTE B2: 0.61 dBi LTE B4: 0.63 dBi LTE B7/B38/B41: 0.65 dBi LTE B17: 2.44 dBi(0.29dBd) LTE B40: 0.56dBi
Modulation Type:		GMSK,8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:		DC 3.8V from battery or 5V form adapter
Adapter Information	Model:	CPW050V2000
	Input:	100-240Vac 50/60Hz 0.35A
	Output:	5.0Vdc 2000mA
Serial Number:		SZ1210511-16362E-S1
EUT Received Date:		2021.05.11
EUT Received Status:		Good

Objective

This report is prepared on behalf of **Samuelson Enterprises PLLC** in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E, Part 27 of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

The Code of federal Regulations Title 47, Part 2, Part 22H, Part 24E, Part 27.

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The test items were performed with the EUT operating at testing mode. The device operates on GSM Band 850/1900MHz, WCDMA Band 2/5, and LTE band 2/4/5/7/17/38/40/41, test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM/GPRS/EDGE850	0.25	824.2	836.6	848.8
GSM/GPRS/EDGE1900	0.25	1850.2	1880	1909.8
WCDMA Band 2	4.2	1852.4	1880	1907.6
WCDMA Band 5	4.2	826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE Band 7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560
LTE Band 17	5	706.5	710	713.5
	10	709	710	711
LTE Band 38	5	2572.5	2595	2617.5
	10	2575	2595	2615
	15	2577.5	2595	2612.5
	20	2580	2595	2610
LTE Band 40 Lower 2305-2315MHz	5	2307.5	2310	2312.5
	10	/	2310	/
LTE Band 40 Upper 2350-2360MHz	5	2352.5	2355	2357.5
	10	/	2355	/
LTE Band 41	5	2537.5	2595	2652.5
	10	2540	2595	2650
	15	2542.5	2595	2647.5
	20	2545	2595	2645


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	106 891
R&S	Wideband Radio Communication Tester	CMW500	147473
Unknown	ANTENNA	Unknown	/

Configuration of Test Setup

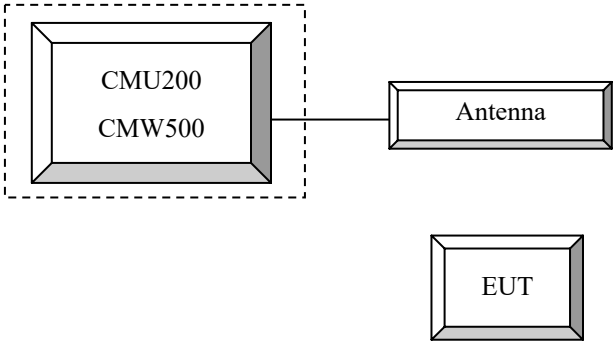

Block Diagram of Test Setup

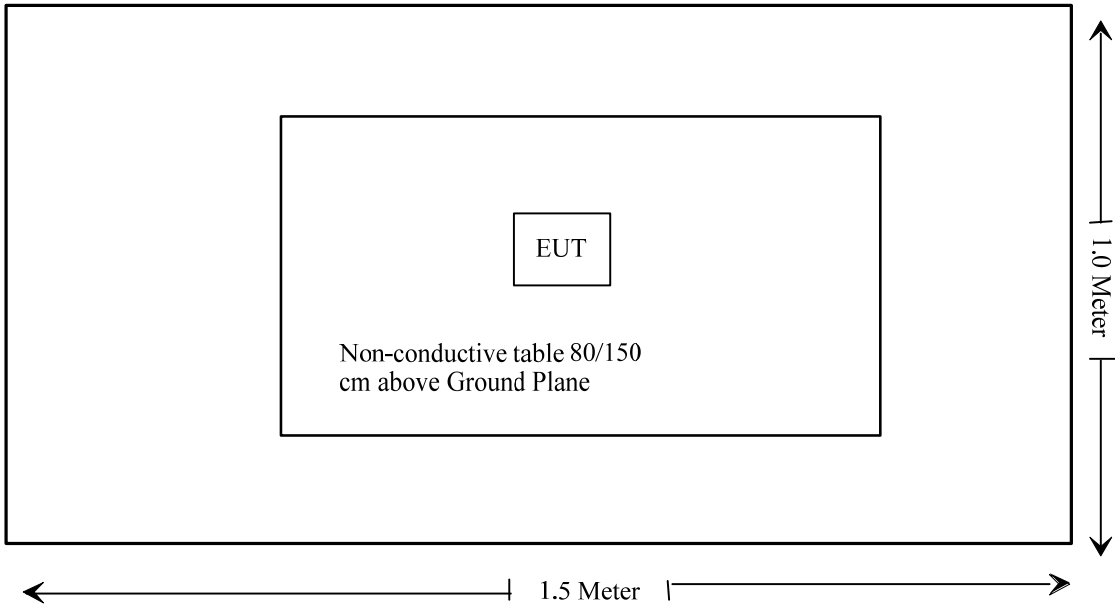

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§1.1310, §2.1093	RF Exposure	Compliance
FCC§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
FCC§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: SZ1210511-16362E-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50- RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(a)(3) Mobile and portable stations. (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 20, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Wideband Radio Communication Tester	CMW500	147473	2020-09-23	2021-09-22
R&S	Universal Radio Communication Tester	CMU200	106 891	2020-09-12	2021-09-12
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.2~27.5 °C
Relative Humidity:	47~70 %
ATM Pressure:	100~100.8kPa
Tester:	Lay Lei
Test Date:	2021.05.22~2021-06-30

Test Result: Compliance

GSM/GPRS/EDGE**Conducted Output Power:**

Band	Channel No.	Conducted Peak Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slots	GPRS 3 TX Slots	GPRS 4 TX Slots	EGPRS 1 TX Slot	EGPRS 2 TX Slots	EGPRS 3 TX Slots	EGPRS 4 TX Slots
Cellular	128	32.8	32.87	30.1	28.81	27.77	27.15	25.61	23.27	22.02
	190	32.7	32.91	30.78	28.83	27.71	27.11	25.76	23.29	21.91
	251	32.5	32.96	30.72	28.88	27.89	27.13	25.71	23.31	21.82
PCS	512	28.2	26.51	24.73	22.73	20.01	26.82	25.52	23.12	21.91
	661	28.2	26.82	24.81	21.7	19.58	26.92	25.58	23.18	21.88
	810	29.1	27.58	24.86	22.63	21.03	26.51	25.21	22.75	21.52

ERP/EIRP:

Band	Mode	Channel	Conducted Power (dBm)	Antenna Gain (dBi/dBd)	Result (dBm)	Limit (dBm)
Cellular	GSM	Low	32.87	0.39	33.26	38.45
		Middle	32.91	0.39	33.30	38.45
		High	32.96	0.39	33.35	38.45
	EDGE	Low	27.15	0.39	27.54	38.45
		Middle	27.11	0.39	27.50	38.45
		High	27.13	0.39	27.52	38.45
PCS	GSM	Low	28.20	0.61	28.81	33
		Middle	28.20	0.61	28.81	33
		High	29.10	0.61	29.71	33
	EDGE	Low	26.82	0.61	27.43	33
		Middle	26.92	0.61	27.53	33
		High	26.51	0.61	27.12	33

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Result = Conducted Power + Antenna Gain
- 3) Antenna gain(dBd)= Antenna gain(dBi)-2.15

WCDMA Band 2**Conducted Output Power and PAR:**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.81	2.87	22.81	2.72	22.71	2.64
HSDPA	1	21.92	3.13	21.82	3.36	21.54	2.96
	2	21.72	3.51	21.67	3.13	21.41	3.31
	3	21.81	3.42	21.83	3.12	21.67	3.23
	4	22.19	3.31	21.66	3.22	21.57	3.16
HSUPA	1	22.22	3.59	22.01	2.90	21.19	3.68
	2	21.91	3.27	21.85	3.31	21.53	3.71
	3	22.08	3.42	21.67	3.24	21.71	3.98
	4	22.07	3.38	21.57	3.41	21.27	3.51
	5	22.11	3.39	21.59	3.33	21.75	3.66
DC-HSDPA	1	22.18	3.32	21.49	3.13	21.81	3.52
	2	22.29	3.31	21.80	3.32	21.66	3.31
	3	22.17	3.14	21.61	3.42	21.87	3.48
	4	22.21	3.31	21.81	3.37	21.92	3.14
HSPA+ (16QAM)	1	21.02	2.36	20.81	2.18	20.52	2.41

EIRP:

Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Result (dBm)	Limit (dBm)
Low	22.81	0.61	23.42	33
Middle	22.81	0.61	23.42	33
High	22.71	0.61	23.32	33

WCDMA Band 5**Conducted Output Power and PAR:**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.81	2.87	22.93	2.67	22.89	2.29
HSDPA	1	21.72	3.94	21.91	3.94	21.82	3.80
	2	21.87	3.16	21.97	3.12	21.75	3.31
	3	21.69	3.28	21.86	3.28	21.83	3.58
	4	21.68	3.42	21.83	3.79	21.81	3.09
HSUPA	1	21.42	4.00	21.61	3.86	21.44	2.75
	2	21.46	3.68	21.75	3.46	21.56	3.01
	3	21.57	3.49	21.69	3.38	21.29	3.46
	4	21.41	3.51	21.51	3.71	21.22	3.46
	5	21.42	3.78	21.52	3.51	21.08	3.59
DC-HSDPA	1	21.53	3.51	21.83	3.64	21.49	3.38
	2	21.46	3.56	21.68	3.62	21.51	3.31
	3	21.42	3.08	21.76	3.47	21.72	3.47
	4	21.38	3.21	21.22	3.26	21.57	3.16
HSPA+ (16QAM)	1	20.75	3.25	20.45	3.32	20.12	3.21

ERP:

Channel	Conducted Power (dBm)	Antenna Gain (dBd)	Result (dBm)	Limit (dBm)
Low	22.81	0.39	23.20	38.45
Middle	22.93	0.39	23.32	38.45
High	22.89	0.39	23.28	38.45

LTE Band 2**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	22.28	22.38	21.50
		RB1#3	22.33	22.14	21.06
		RB1#5	22.32	22.29	20.95
		RB3#0	22.37	22.24	21.26
		RB3#3	22.36	22.22	20.97
		RB6#0	21.31	21.36	20.34
	16QAM	RB1#0	21.28	21.54	20.66
		RB1#3	21.31	21.42	20.35
		RB1#5	21.29	21.58	20.23
		RB3#0	22.63	22.23	21.13
		RB3#3	22.57	21.92	20.78
		RB6#0	20.76	19.93	19.31
3MHz	QPSK	RB1#0	22.15	21.55	21.69
		RB1#8	21.93	21.52	21.03
		RB1#14	22.01	21.66	20.63
		RB6#0	21.08	20.61	20.64
		RB6#9	21.14	20.72	20.02
		RB15#0	21.12	20.68	20.36
	16QAM	RB1#0	21.53	20.69	20.76
		RB1#8	21.51	20.77	20.20
		RB1#14	21.60	20.93	19.83
		RB6#0	20.20	19.72	19.74
		RB6#9	20.24	19.87	19.15
		RB15#0	20.22	19.74	19.58
5MHz	QPSK	RB1#0	22.06	21.74	25.31
		RB1#13	21.43	21.47	24.53
		RB1#24	21.70	21.94	24.00
		RB15#0	20.59	20.50	24.00
		RB15#10	20.56	20.63	23.53
		RB25#0	20.56	20.58	23.75
	16QAM	RB1#0	20.81	21.01	24.44
		RB1#13	20.40	20.85	23.76
		RB1#24	20.73	21.34	23.27
		RB15#0	21.06	21.01	24.07
		RB15#10	20.99	23.79	23.62
		RB25#0	20.08	22.79	22.87

10MHz	QPSK	RB1#0	24.97	22.36	21.97
		RB1#25	24.92	23.13	23.02
		RB1#49	23.89	23.10	22.02
		RB25#0	24.02	21.82	21.73
		RB25#25	23.62	22.31	22.02
		RB50#0	23.81	22.06	21.93
	16QAM	RB1#0	24.35	21.29	21.52
		RB1#25	24.49	22.17	22.65
		RB1#49	23.50	22.15	21.68
		RB25#0	24.66	21.63	21.70
		RB25#25	22.44	22.10	22.00
		RB50#0	21.61	20.96	20.95
15MHz	QPSK	RB1#0	23.32	21.70	22.23
		RB1#38	22.67	22.53	22.75
		RB1#74	21.30	22.56	22.70
		RB36#0	22.15	21.09	21.22
		RB36#39	20.95	21.75	22.29
		RB75#0	21.55	21.44	21.77
	16QAM	RB1#0	22.75	20.87	21.55
		RB1#38	22.26	21.79	22.14
		RB1#74	20.94	21.82	22.10
		RB36#0	22.06	21.89	21.13
		RB36#39	20.88	22.50	22.15
		RB75#0	20.51	21.24	20.69
20MHz	QPSK	RB1#0	23.68	22.00	22.67
		RB1#50	22.50	23.13	21.98
		RB1#99	21.16	22.83	22.46
		RB50#0	22.35	21.56	21.05
		RB50#50	20.56	22.22	21.90
		RB100#0	21.48	21.91	21.48
	16QAM	RB1#0	22.87	21.50	21.97
		RB1#50	21.82	22.71	21.35
		RB1#99	20.47	22.41	21.88
		RB50#0	22.67	21.43	21.02
		RB50#50	20.94	22.10	21.83
		RB100#0	20.89	20.86	20.48

PAR:

Test Modulation		Channel Bandwidth	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.06	4.32	4.41	13.00
	100 RB		4.75	4.72	4.32	13.00
16QAM	1 RB	20 MHz	5.10	4.96	5.62	13.00
	100 RB		5.65	5.71	5.36	13.00

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Result (dBm)	Limit (dBm)
1.4MHz	QPSK	Low	22.37	0.61	22.98	33.00
		Middle	22.38	0.61	22.99	33.00
		High	21.50	0.61	22.11	33.00
	16QAM	Low	22.63	0.61	23.24	33.00
		Middle	22.23	0.61	22.84	33.00
		High	21.13	0.61	21.74	33.00
3MHz	QPSK	Low	22.15	0.61	22.76	33.00
		Middle	21.66	0.61	22.27	33.00
		High	21.69	0.61	22.30	33.00
	16QAM	Low	21.60	0.61	22.21	33.00
		Middle	20.93	0.61	21.54	33.00
		High	20.76	0.61	21.37	33.00
5MHz	QPSK	Low	22.06	0.61	22.67	33.00
		Middle	21.94	0.61	22.55	33.00
		High	25.31	0.61	25.92	33.00
	16QAM	Low	21.06	0.61	21.67	33.00
		Middle	23.79	0.61	24.40	33.00
		High	24.44	0.61	25.05	33.00
10MHz	QPSK	Low	24.97	0.61	25.58	33.00
		Middle	23.13	0.61	23.74	33.00
		High	23.02	0.61	23.63	33.00
	16QAM	Low	24.66	0.61	25.27	33.00
		Middle	22.17	0.61	22.78	33.00
		High	22.65	0.61	23.26	33.00
15MHz	QPSK	Low	23.32	0.61	23.93	33.00
		Middle	22.56	0.61	23.17	33.00
		High	22.75	0.61	23.36	33.00
	16QAM	Low	22.75	0.61	23.36	33.00
		Middle	22.50	0.61	23.11	33.00
		High	22.15	0.61	22.76	33.00
20MHz	QPSK	Low	23.68	0.61	24.29	33.00
		Middle	23.13	0.61	23.74	33.00
		High	22.67	0.61	23.28	33.00
	16QAM	Low	22.87	0.61	23.48	33.00
		Middle	22.71	0.61	23.32	33.00
		High	21.97	0.61	22.58	33.00

LTE Band 4

Conducted Output Power:

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	22.22	23.02	23.29
		RB1#3	21.86	22.76	23.17
		RB1#5	21.97	22.77	23.23
		RB3#0	21.84	22.84	23.19
		RB3#3	21.85	22.70	23.15
		RB6#0	20.89	21.85	22.29
	16QAM	RB1#0	20.96	22.04	22.39
		RB1#3	20.91	21.88	22.42
		RB1#5	21.06	21.93	22.37
		RB3#0	21.93	22.75	23.10
		RB3#3	21.91	22.60	23.06
		RB6#0	19.93	20.80	21.29
3MHz	QPSK	RB1#0	21.93	22.84	23.04
		RB1#8	21.78	22.47	23.05
		RB1#14	22.05	22.34	23.17
		RB6#0	20.81	21.73	22.02
		RB6#9	21.02	21.49	22.22
		RB15#0	20.90	21.58	22.15
	16QAM	RB1#0	21.33	22.03	22.03
		RB1#8	21.40	21.75	22.12
		RB1#14	21.70	21.65	22.23
		RB6#0	19.96	20.86	21.04
		RB6#9	20.18	20.67	21.22
		RB15#0	20.02	20.65	21.23
5MHz	QPSK	RB1#0	21.89	24.91	24.43
		RB1#13	21.57	24.15	24.45
		RB1#24	22.30	24.02	24.99
		RB15#0	20.48	23.28	23.28
		RB15#10	20.77	23.05	23.66
		RB25#0	20.62	23.17	23.46
	16QAM	RB1#0	20.68	23.97	23.28
		RB1#13	20.54	23.27	23.39
		RB1#24	21.32	23.18	24.03
		RB15#0	22.62	23.31	23.47
		RB15#10	22.82	23.03	21.85
		RB25#0	21.65	22.17	20.62
10MHz	QPSK	RB1#0	21.51	23.01	24.02
		RB1#25	22.07	22.97	24.41
		RB1#49	22.50	21.95	25.12
		RB25#0	20.77	22.01	23.13
		RB25#25	21.41	21.50	23.83
		RB50#0	21.13	21.86	23.47
	16QAM	RB1#0	20.90	22.03	22.87
		RB1#25	21.67	22.02	23.41
		RB1#49	22.11	21.02	24.11
		RB25#0	21.36	23.99	22.95
		RB25#25	21.88	23.84	23.70
		RB50#0	20.58	22.99	22.31

15MHz	QPSK	RB1#0	24.05	22.97	22.49
		RB1#38	24.77	23.00	22.23
		RB1#74	25.05	22.50	23.30
		RB36#0	23.31	22.09	21.17
		RB36#39	24.12	22.18	21.83
		RB75#0	23.81	22.14	21.46
	16QAM	RB1#0	23.49	22.52	21.75
		RB1#38	24.35	22.58	21.62
		RB1#74	24.60	22.13	22.60
		RB36#0	22.06	22.11	21.06
		RB36#39	22.11	22.02	21.73
		RB75#0	21.01	21.13	20.35
20MHz	QPSK	RB1#0	22.50	23.07	23.77
		RB1#50	23.06	23.13	22.86
		RB1#99	23.10	21.63	23.91
		RB50#0	21.97	22.01	22.09
		RB50#50	22.03	21.35	22.15
		RB100#0	21.99	22.06	22.08
	16QAM	RB1#0	21.70	22.24	22.96
		RB1#50	22.34	22.30	21.98
		RB1#99	22.40	20.93	23.06
		RB50#0	21.91	21.59	21.02
		RB50#50	22.02	21.68	21.12
		RB100#0	20.95	21.65	21.04

PAR:

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.12	4.23	4.38	13
	100 RB		4.87	4.81	4.81	13
16QAM	1 RB	20 MHz	4.90	5.19	5.59	13
	100 RB		5.83	5.77	5.88	13

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Result (dBm)	Limit (dBm)
1.4MHz	QPSK	Low	22.22	0.63	22.85	30.00
		Middle	23.02	0.63	23.65	30.00
		High	23.29	0.63	23.92	30.00
	16QAM	Low	21.93	0.63	22.56	30.00
		Middle	22.75	0.63	23.38	30.00
		High	23.10	0.63	23.73	30.00
3MHz	QPSK	Low	22.05	0.63	22.68	30.00
		Middle	22.84	0.63	23.47	30.00
		High	23.17	0.63	23.8	30.00
	16QAM	Low	21.70	0.63	22.33	30.00
		Middle	22.03	0.63	22.66	30.00
		High	22.23	0.63	22.86	30.00
5MHz	QPSK	Low	22.30	0.63	22.93	30.00
		Middle	24.91	0.63	25.54	30.00
		High	24.99	0.63	25.62	30.00
	16QAM	Low	22.82	0.63	23.45	30.00
		Middle	23.97	0.63	24.6	30.00
		High	24.03	0.63	24.66	30.00
10MHz	QPSK	Low	22.50	0.63	23.13	30.00
		Middle	23.01	0.63	23.64	30.00
		High	25.12	0.63	25.75	30.00
	16QAM	Low	22.11	0.63	22.74	30.00
		Middle	23.99	0.63	24.62	30.00
		High	24.11	0.63	24.74	30.00
15MHz	QPSK	Low	25.05	0.63	25.68	30.00
		Middle	23.00	0.63	23.63	30.00
		High	23.30	0.63	23.93	30.00
	16QAM	Low	24.60	0.63	25.23	30.00
		Middle	22.58	0.63	23.21	30.00
		High	22.60	0.63	23.23	30.00
20MHz	QPSK	Low	23.10	0.63	23.73	30.00
		Middle	23.13	0.63	23.76	30.00
		High	23.77	0.63	24.4	30.00
	16QAM	Low	22.40	0.63	23.03	30.00
		Middle	22.30	0.63	22.93	30.00
		High	23.06	0.63	23.69	30.00

LTE Band 5

Conducted Output Power:

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	23.22	23.16	23.37
		RB1#3	23.22	23.20	23.48
		RB1#5	23.19	23.17	23.38
		RB3#0	23.27	23.18	23.30
		RB3#3	23.23	23.20	23.33
		RB6#0	22.20	22.17	22.36
	16QAM	RB1#0	22.19	22.23	22.23
		RB1#3	22.20	22.27	22.31
		RB1#5	22.16	22.23	22.25
		RB3#0	22.41	22.09	22.25
		RB3#3	22.43	22.11	22.27
		RB6#0	21.19	21.15	21.14
3MHz	QPSK	RB1#0	23.16	23.13	23.33
		RB1#8	23.16	23.15	23.40
		RB1#14	23.05	23.13	23.36
		RB6#0	22.23	22.16	22.32
		RB6#9	22.12	22.15	22.36
		RB15#0	22.18	22.13	22.27
	16QAM	RB1#0	22.70	22.17	22.21
		RB1#8	22.71	22.21	22.21
		RB1#14	22.63	22.21	22.22
		RB6#0	21.26	21.11	21.13
		RB6#9	21.16	21.15	21.16
		RB15#0	21.23	21.05	21.24
5MHz	QPSK	RB1#0	23.26	23.25	23.31
		RB1#13	23.19	23.21	23.36
		RB1#24	23.16	23.16	23.37
		RB15#0	22.21	22.16	22.29
		RB15#10	22.16	22.13	22.32
		RB25#0	22.16	22.11	22.26
	16QAM	RB1#0	22.12	22.37	22.31
		RB1#13	22.05	22.40	22.30
		RB1#24	22.03	22.41	22.31
		RB15#0	21.24	21.11	21.25
		RB15#10	21.21	21.09	21.24
		RB25#0	21.20	21.10	21.23
10MHz	QPSK	RB1#0	23.27	23.26	23.19
		RB1#25	23.26	23.22	23.28
		RB1#49	23.25	23.19	23.40
		RB25#0	22.20	22.11	22.15
		RB25#25	22.15	22.15	22.20
		RB50#0	22.18	22.14	22.18
	16QAM	RB1#0	22.80	22.25	22.16
		RB1#25	22.70	22.27	22.19
		RB1#49	22.53	22.31	22.25
		RB25#0	21.24	21.09	21.23
		RB25#25	21.16	21.16	21.23
		RB50#0	21.17	21.13	21.18

PAR:

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	4.32	2.93	4.52	13
	50 RB		4.67	4.67	4.72	13
16QAM	1 RB	10 MHz	5.04	3.80	5.30	13
	50 RB		5.57	5.59	5.74	13

ERP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBd)	Result (dBm)	Limit (dBm)
1.4MHz	QPSK	Low	23.27	0.39	23.66	38.45
		Middle	23.2	0.39	23.59	38.45
		High	23.48	0.39	23.87	38.45
	16QAM	Low	22.43	0.39	22.82	38.45
		Middle	22.27	0.39	22.66	38.45
		High	22.31	0.39	22.7	38.45
3MHz	QPSK	Low	23.16	0.39	23.55	38.45
		Middle	23.15	0.39	23.54	38.45
		High	23.4	0.39	23.79	38.45
	16QAM	Low	22.71	0.39	23.1	38.45
		Middle	22.21	0.39	22.6	38.45
		High	22.22	0.39	22.61	38.45
5MHz	QPSK	Low	23.26	0.39	23.65	38.45
		Middle	23.25	0.39	23.64	38.45
		High	23.37	0.39	23.76	38.45
	16QAM	Low	22.12	0.39	22.51	38.45
		Middle	22.41	0.39	22.8	38.45
		High	22.31	0.39	22.7	38.45
10MHz	QPSK	Low	23.27	0.39	23.66	38.45
		Middle	23.26	0.39	23.65	38.45
		High	23.4	0.39	23.79	38.45
	16QAM	Low	22.8	0.39	23.19	38.45
		Middle	22.31	0.39	22.7	38.45
		High	22.25	0.39	22.64	38.45

LTE Band 7

Conducted Output Power:

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5 MHz	QPSK	RB1#0	21.28	21.25	20.37
		RB1#13	21.01	21.01	19.85
		RB1#24	21.73	21.56	20.35
		RB15#0	19.88	19.99	19.13
		RB15#10	20.29	20.33	19.21
		RB25#0	20.04	20.18	19.16
	16QAM	RB1#0	19.75	20.39	19.40
		RB1#13	19.81	20.31	19.05
		RB1#24	20.67	20.97	19.58
		RB15#0	18.81	19.00	18.22
		RB15#10	19.30	19.34	18.32
		RB25#0	19.05	19.22	18.30
10 MHz	QPSK	RB1#0	20.30	20.13	20.34
		RB1#25	21.14	20.74	19.63
		RB1#49	21.43	21.14	19.68
		RB25#0	19.75	19.46	19.05
		RB25#25	20.68	20.25	18.89
		RB50#0	20.22	19.85	18.98
	16QAM	RB1#0	19.59	19.18	19.26
		RB1#25	20.65	19.97	18.78
		RB1#49	20.96	20.47	18.83
		RB25#0	18.80	18.52	18.25
		RB25#25	19.73	19.33	18.10
		RB50#0	19.29	18.95	18.13
15 MHz	QPSK	RB1#0	20.46	19.83	20.96
		RB1#38	21.47	20.57	19.18
		RB1#74	21.28	21.53	19.30
		RB36#0	20.11	19.08	19.17
		RB36#39	20.69	20.33	18.28
		RB75#0	20.41	19.70	18.70
	16QAM	RB1#0	19.81	18.86	20.30
		RB1#38	21.05	19.83	18.66
		RB1#74	20.88	20.90	18.76
		RB36#0	19.15	18.17	18.28
		RB36#39	19.74	19.42	17.36
		RB75#0	19.50	18.82	17.82
20MHz	QPSK	RB1#0	20.42	19.56	21.88
		RB1#50	21.39	20.51	19.49
		RB1#99	20.46	21.52	19.15
		RB50#0	20.25	18.85	20.03
		RB50#50	20.15	20.43	18.28
		RB100#0	20.23	19.65	19.20
	16QAM	RB1#0	19.60	18.67	21.47
		RB1#50	20.74	19.77	19.20
		RB1#99	19.79	20.89	18.83
		RB50#0	19.25	17.91	19.16
		RB50#50	19.23	19.53	17.38
		RB100#0	19.30	18.76	18.37

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Result (dBm)	Limit (dBm)
5MHz	QPSK	Low	21.28	0.65	21.93	33.00
		Middle	21.56	0.65	22.21	33.00
		High	20.37	0.65	21.02	33.00
	16QAM	Low	20.67	0.65	21.32	33.00
		Middle	20.97	0.65	21.62	33.00
		High	19.58	0.65	20.23	33.00
10MHz	QPSK	Low	21.43	0.65	22.08	33.00
		Middle	21.14	0.65	21.79	33.00
		High	20.34	0.65	20.99	33.00
	16QAM	Low	20.96	0.65	21.61	33.00
		Middle	20.47	0.65	21.12	33.00
		High	19.26	0.65	19.91	33.00
15MHz	QPSK	Low	21.47	0.65	22.12	33.00
		Middle	21.53	0.65	22.18	33.00
		High	20.96	0.65	21.61	33.00
	16QAM	Low	21.05	0.65	21.7	33.00
		Middle	20.90	0.65	21.55	33.00
		High	20.30	0.65	20.95	33.00
20MHz	QPSK	Low	21.39	0.65	22.04	33.00
		Middle	21.52	0.65	22.17	33.00
		High	21.88	0.65	22.53	33.00
	16QAM	Low	20.74	0.65	21.39	33.00
		Middle	20.89	0.65	21.54	33.00
		High	21.47	0.65	22.12	33.00

LTE Band 17**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5MHz	QPSK	RB1#0	22.62	22.52	22.50
		RB1#13	22.53	22.51	22.54
		RB1#24	22.42	22.54	22.62
		RB15#0	21.56	21.52	21.58
		RB15#10	21.55	21.53	21.59
		RB25#0	21.49	21.51	21.58
	16QAM	RB1#0	21.45	21.77	21.60
		RB1#13	21.35	21.84	21.62
		RB1#24	21.35	21.84	21.67
		RB15#0	20.57	20.52	20.59
		RB15#10	20.55	20.51	20.58
		RB25#0	20.55	20.52	20.56
10MHz	QPSK	RB1#0	22.60	22.58	22.58
		RB1#25	22.48	22.50	22.48
		RB1#49	22.55	22.63	22.66
		RB25#0	21.49	21.54	21.50
		RB25#25	21.56	21.55	21.57
		RB50#0	21.55	21.58	21.57
	16QAM	RB1#0	22.07	21.63	21.49
		RB1#25	22.07	21.65	21.51
		RB1#49	22.14	21.72	21.64
		RB25#0	20.55	20.51	20.61
		RB25#25	20.63	20.59	20.65
		RB50#0	20.57	20.57	20.58

ERP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBd)	Result (dBm)	Limit (dBm)
5MHz	QPSK	Low	22.62	0.29	22.91	34.77
		Middle	22.54	0.29	22.83	34.77
		High	22.62	0.29	22.91	34.77
	16QAM	Low	21.45	0.29	21.74	34.77
		Middle	21.84	0.29	22.13	34.77
		High	21.67	0.29	21.96	34.77
10MHz	QPSK	Low	22.60	0.29	22.89	34.77
		Middle	22.63	0.29	22.92	34.77
		High	22.66	0.29	22.95	34.77
	16QAM	Low	22.14	0.29	22.43	34.77
		Middle	21.72	0.29	22.01	34.77
		High	21.64	0.29	21.93	34.77

LTE Band 38**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5MHz	QPSK	RB1#0	21.15	20.95	20.84
		RB1#13	20.55	20.69	19.96
		RB1#24	20.84	21.24	20.24
		RB15#0	20.35	19.97	19.85
		RB15#10	20.30	19.95	19.85
		RB25#0	20.27	19.99	19.80
	16QAM	RB1#0	20.34	20.23	19.86
		RB1#13	20.39	20.10	19.83
		RB1#24	20.29	20.13	19.78
		RB15#0	19.30	18.98	18.75
		RB15#10	19.22	18.93	18.70
		RB25#0	19.33	18.91	18.78
10MHz	QPSK	RB1#0	21.29	20.91	20.80
		RB1#25	20.98	21.28	20.45
		RB1#49	20.88	21.34	19.80
		RB25#0	20.26	20.02	19.85
		RB25#25	20.26	19.95	19.80
		RB50#0	20.22	19.96	19.82
	16QAM	RB1#0	20.45	20.20	19.82
		RB1#25	20.41	20.12	19.80
		RB1#49	20.36	20.09	19.80
		RB25#0	19.26	18.94	18.86
		RB25#25	19.18	18.89	18.80
		RB50#0	19.21	18.89	18.78
15MHz	QPSK	RB1#0	21.24	20.99	20.93
		RB1#38	20.77	21.23	20.34
		RB1#74	20.98	21.42	19.65
		RB36#0	20.37	20.13	19.98
		RB36#39	20.30	20.06	19.93
		RB75#0	20.36	20.10	20.98
	16QAM	RB1#0	20.54	20.02	21.15
		RB1#38	20.40	19.91	21.09
		RB1#74	20.33	19.81	21.10
		RB36#0	19.31	19.04	20.00
		RB36#39	19.21	18.94	19.94
		RB75#0	19.24	19.02	19.92
20MHz	QPSK	RB1#0	22.32	22.05	21.87
		RB1#50	21.87	22.30	21.83
		RB1#99	22.18	22.68	21.00
		RB50#0	21.32	21.07	20.87
		RB50#50	21.17	20.94	20.87
		RB100#0	21.22	21.00	20.88
	16QAM	RB1#0	21.51	21.13	21.25
		RB1#50	21.30	20.99	21.19
		RB1#99	21.21	20.96	21.16
		RB50#0	20.25	20.05	19.90
		RB50#50	20.09	19.92	19.84
		RB100#0	20.16	19.95	19.84

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Result (dBm)	Limit (dBm)
5MHz	QPSK	Low	21.15	0.65	21.8	33.00
		Middle	21.24	0.65	21.89	33.00
		High	20.84	0.65	21.49	33.00
	16QAM	Low	20.39	0.65	21.04	33.00
		Middle	20.23	0.65	20.88	33.00
		High	19.86	0.65	20.51	33.00
10MHz	QPSK	Low	21.29	0.65	21.94	33.00
		Middle	21.34	0.65	21.99	33.00
		High	20.8	0.65	21.45	33.00
	16QAM	Low	20.45	0.65	21.1	33.00
		Middle	20.2	0.65	20.85	33.00
		High	19.82	0.65	20.47	33.00
15MHz	QPSK	Low	21.24	0.65	21.89	33.00
		Middle	21.42	0.65	22.07	33.00
		High	20.98	0.65	21.63	33.00
	16QAM	Low	20.54	0.65	21.19	33.00
		Middle	20.02	0.65	20.67	33.00
		High	21.15	0.65	21.8	33.00
20MHz	QPSK	Low	22.32	0.65	22.97	33.00
		Middle	22.68	0.65	23.33	33.00
		High	21.87	0.65	22.52	33.00
	16QAM	Low	21.51	0.65	22.16	33.00
		Middle	21.13	0.65	21.78	33.00
		High	21.25	0.65	21.9	33.00

LTE Band 40 Lower**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5 MHz	QPSK	RB1#0	22.91	22.85	22.81
		RB1#13	23.02	23.02	22.92
		RB1#24	22.98	22.96	22.87
		RB15#0	21.82	21.92	21.89
		RB15#10	21.93	21.95	21.91
		RB25#0	21.79	21.91	21.88
	16QAM	RB1#0	21.83	22.08	21.77
		RB1#13	22.11	22.15	21.87
		RB1#24	21.80	22.04	21.73
		RB15#0	20.92	20.99	20.75
		RB15#10	20.91	21.12	20.82
		RB25#0	20.92	20.88	20.56
10 MHz	QPSK	RB1#0	/	22.93	/
		RB1#25	/	23.18	/
		RB1#49	/	22.97	/
		RB25#0	/	21.99	/
		RB25#25	/	21.94	/
		RB50#0	/	21.92	/
	16QAM	RB1#0	/	22.01	/
		RB1#25	/	22.32	/
		RB1#49	/	22.06	/
		RB25#0	/	20.97	/
		RB25#25	/	21.02	/
		RB50#0	/	20.97	/

Note: the device is a mobile station. For 5MHz mode, the channel power is equal to the test result in dBm/5MHz. For 10MHz mode, the PSD as below:

Channel Bandwidth	Modulation	Resource Block & RB offset	Middle Channel (dBm/5MHz)
10MHz	QPSK	RB1#0	22.93
		RB1#25	23.18
		RB1#49	22.97
		RB25#0	21.99
		RB25#25	21.94
		RB50#0	18.97
	16QAM	RB1#0	22.01
		RB1#25	22.32
		RB1#49	22.06
		RB25#0	20.97
		RB25#25	21.02
		RB50#0	18.23

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm/5MHz)	Antenna Gain (dBi)	Result (dBm/5MHz)	Limit (dBm/5MHz)
5MHz	QPSK	Low	23.02	0.56	23.58	24.00
		Middle	23.02	0.56	23.58	24.00
		High	22.92	0.56	23.48	24.00
	16QAM	Low	22.11	0.56	22.67	24.00
		Middle	22.15	0.56	22.71	24.00
		High	21.87	0.56	22.43	24.00
10MHz	QPSK	Middle	23.18	0.56	23.88	24.00
	16QAM	Middle	22.32	0.56	23.02	24.00

Duty Cycle


Test Modulation	Test Bandwidth	Ton (ms)	Total (ms)	Duty Cycle (%)	Limit (%)
QPSK	5M	1.891	4.997	37.84	38
	10M	1.891	5.101	37.07	
16-QAM	5M	1.953	5.139	38.00	
	10M	1.913	5.066	37.76	

Note: EUT setup is as following:


Uplink Downlink configuration	Subframe number									
	0	1	2	3	4	5	6	7	8	9
3	D	S	U	U	U	D	D	D	D	D

Duty Cycle:


QPSK, 5MHz

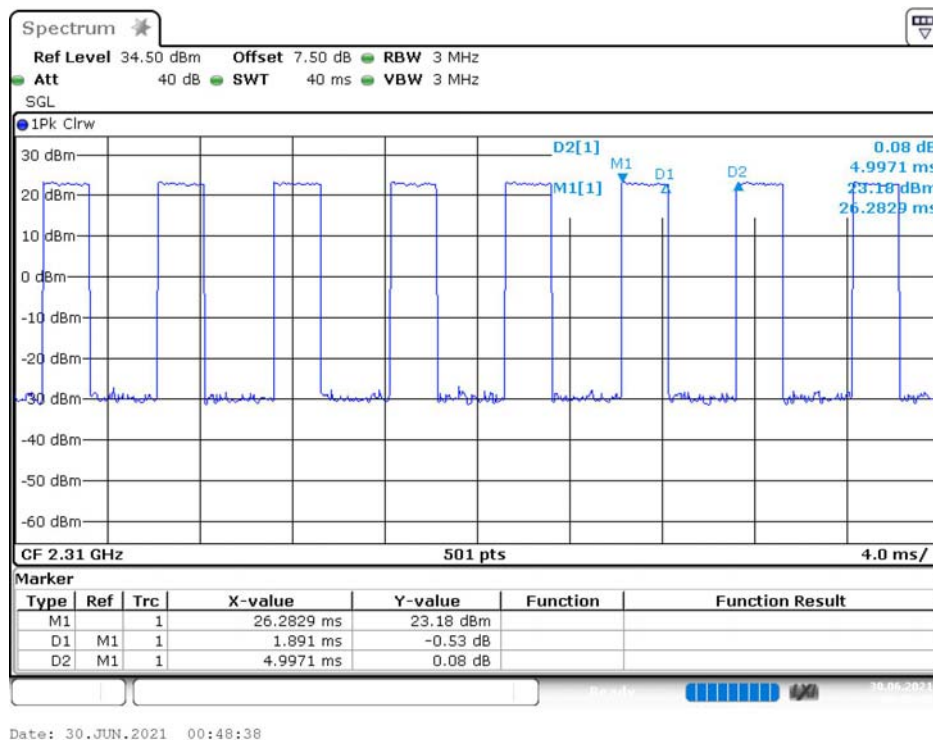


QPSK, 10MHz

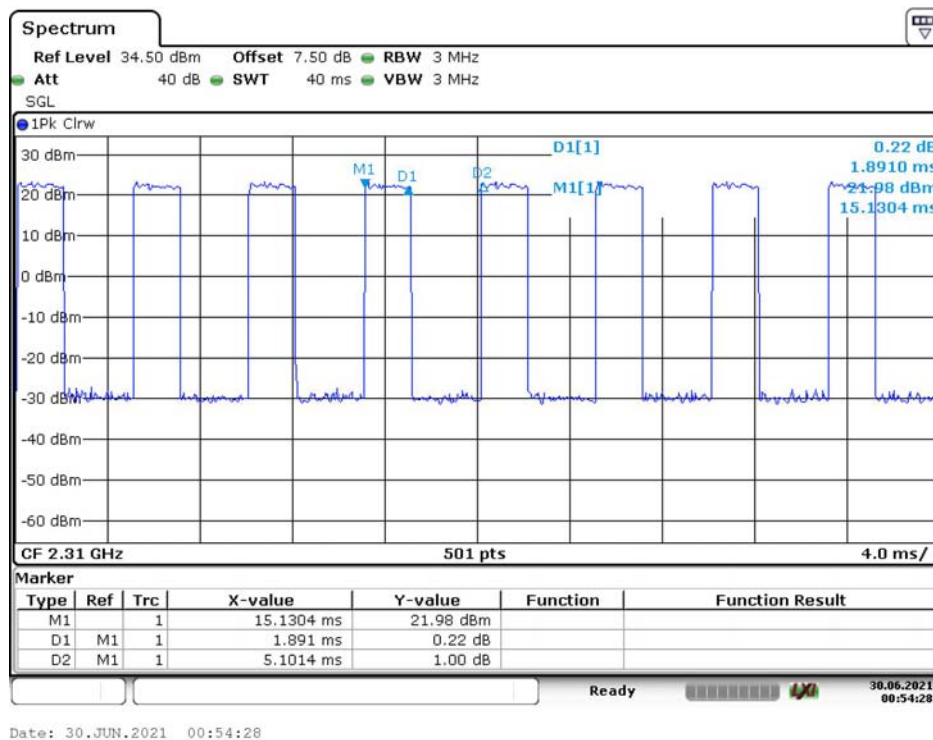

16-QAM, 5MHz

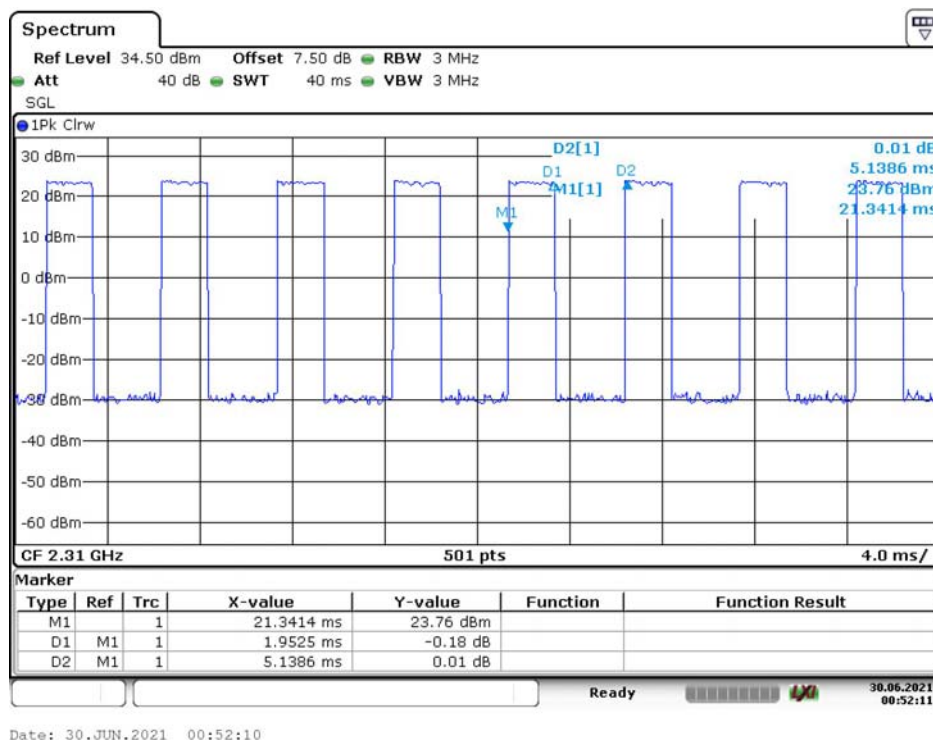

16-QAM, 10MHz

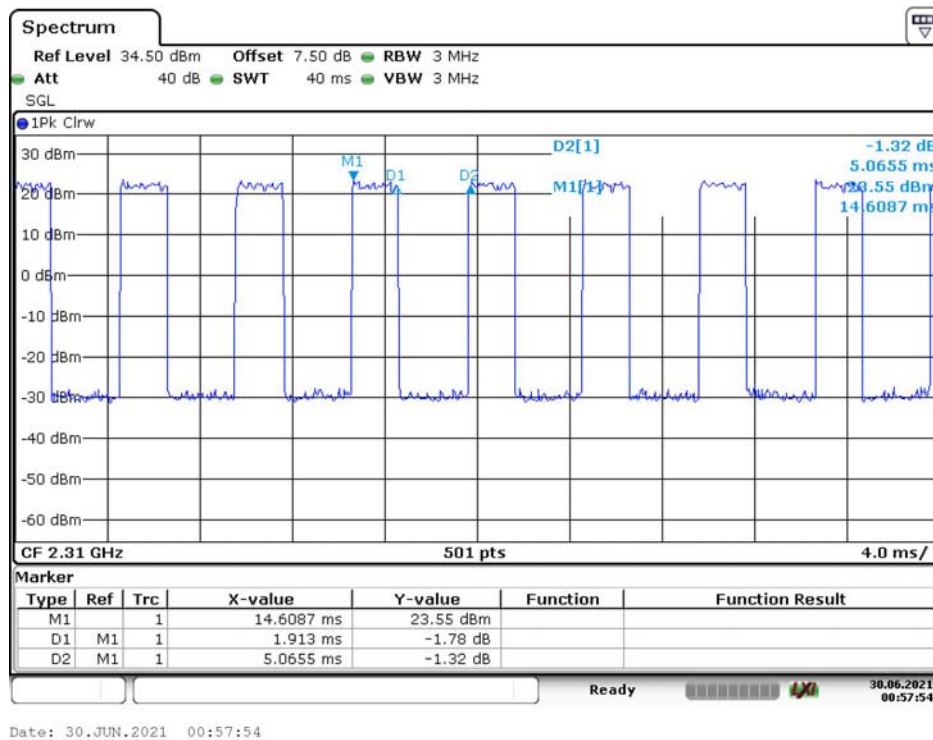

LTE Band 40 Upper**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5 MHz	QPSK	RB1#0	22.91	22.77	22.64
		RB1#13	22.97	22.72	22.61
		RB1#24	22.72	22.47	22.67
		RB15#0	21.91	21.46	21.37
		RB15#10	21.99	21.53	21.52
		RB25#0	21.87	21.61	21.71
	16QAM	RB1#0	21.81	21.30	21.58
		RB1#13	21.96	21.59	21.63
		RB1#24	21.81	21.31	21.57
		RB15#0	20.67	20.52	20.58
		RB15#10	20.86	20.77	20.71
		RB25#0	20.22	20.76	20.69
10 MHz	QPSK	RB1#0	/	22.99	/
		RB1#25	/	22.83	/
		RB1#49	/	22.25	/
		RB25#0	/	21.57	/
		RB25#25	/	21.69	/
		RB50#0	/	21.40	/
	16QAM	RB1#0	/	21.71	/
		RB1#25	/	21.93	/
		RB1#49	/	21.64	/
		RB25#0	/	20.52	/
		RB25#25	/	20.77	/
		RB50#0	/	20.76	/

Note: the device is a mobile station. For 5MHz mode, the channel power is equal to the test result in dBm/5MHz. For 10MHz mode, the PSD as below:

Channel Bandwidth	Modulation	Resource Block & RB offset	Middle Channel (dBm/5MHz)
10MHz	QPSK	RB1#0	22.99
		RB1#25	22.83
		RB1#49	22.25
		RB25#0	21.57
		RB25#25	21.69
		RB50#0	18.49
	16QAM	RB1#0	21.71
		RB1#25	21.93
		RB1#49	21.64
		RB25#0	20.52
		RB25#25	20.77
		RB50#0	17.88

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm/5MHz)	Antenna Gain (dBd)	Result (dBm/5MHz)	Limit (dBm/5MHz)
5MHz	QPSK	Low	22.97	0.56	23.53	24.00
		Middle	22.77	0.56	23.33	24.00
		High	22.67	0.56	23.23	24.00
	16QAM	Low	21.96	0.56	22.52	24.00
		Middle	21.59	0.56	22.15	24.00
		High	21.63	0.56	22.19	24.00
10MHz	QPSK	Middle	22.99	0.56	23.55	24.00
	16QAM	Middle	21.93	0.56	22.49	24.00

Duty Cycle


Test Modulation	Test Bandwidth	Ton (ms)	Total (ms)	Duty Cycle (%)	Limit (%)
QPSK	5M	1.826	5.092	35.86	38
	10M	1.906	5.092	37.43	
16-QAM	5M	1.826	5.092	35.86	
	10M	1.811	4.964	36.48	

Note: EUT setup is as following:


Uplink Downlink configuration	Subframe number									
	0	1	2	3	4	5	6	7	8	9
3	D	S	U	U	U	D	D	D	D	D

Duty Cycle:


QPSK, 5MHz

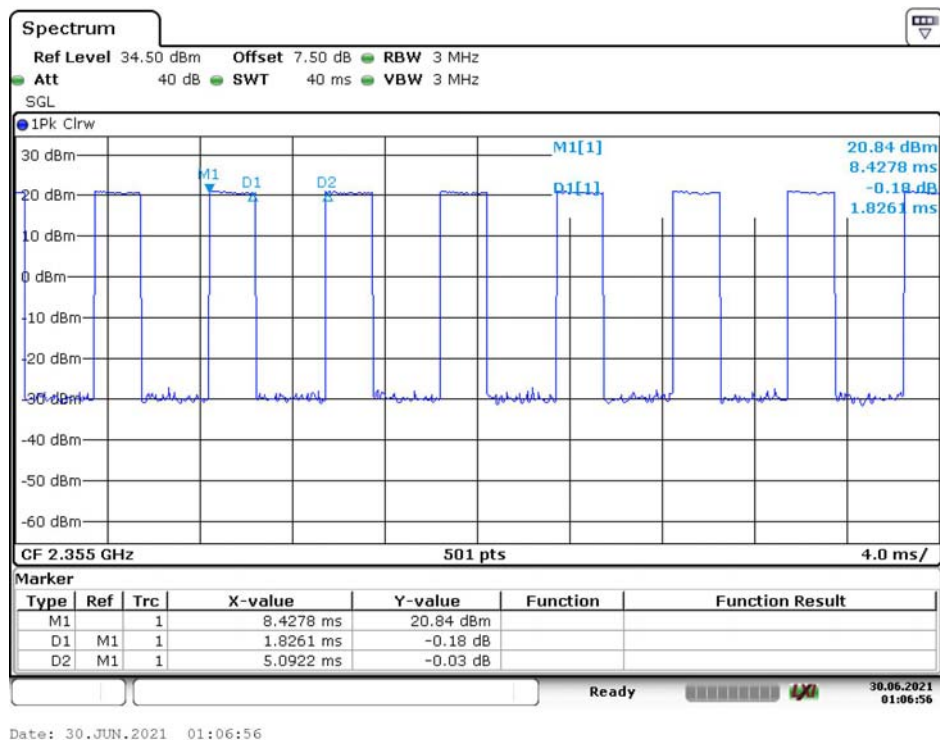


QPSK, 10MHz

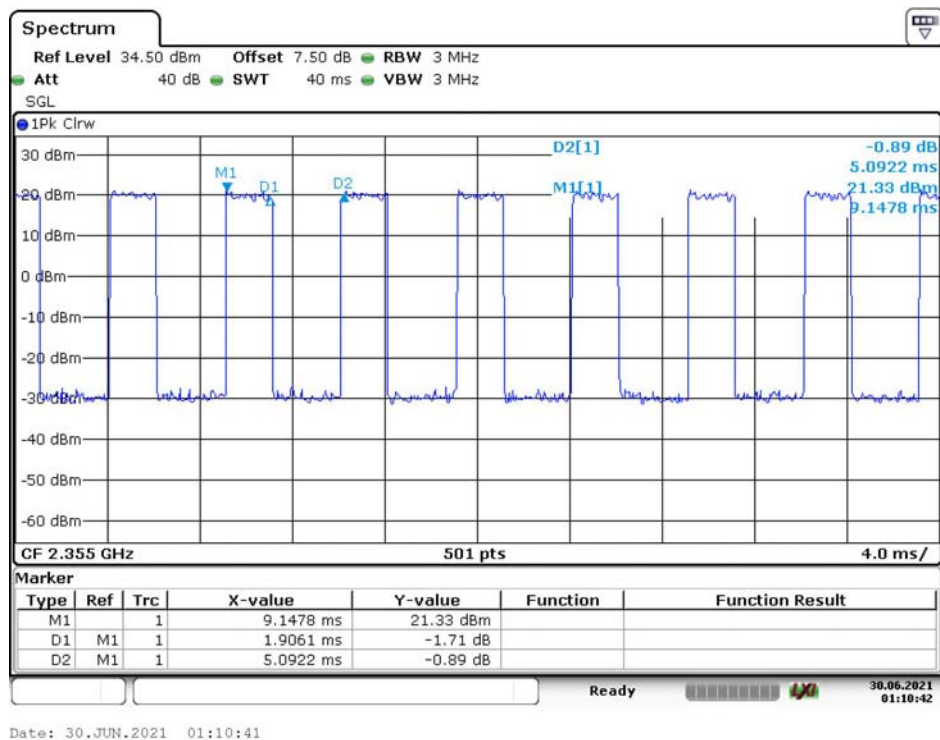

16-QAM, 5MHz

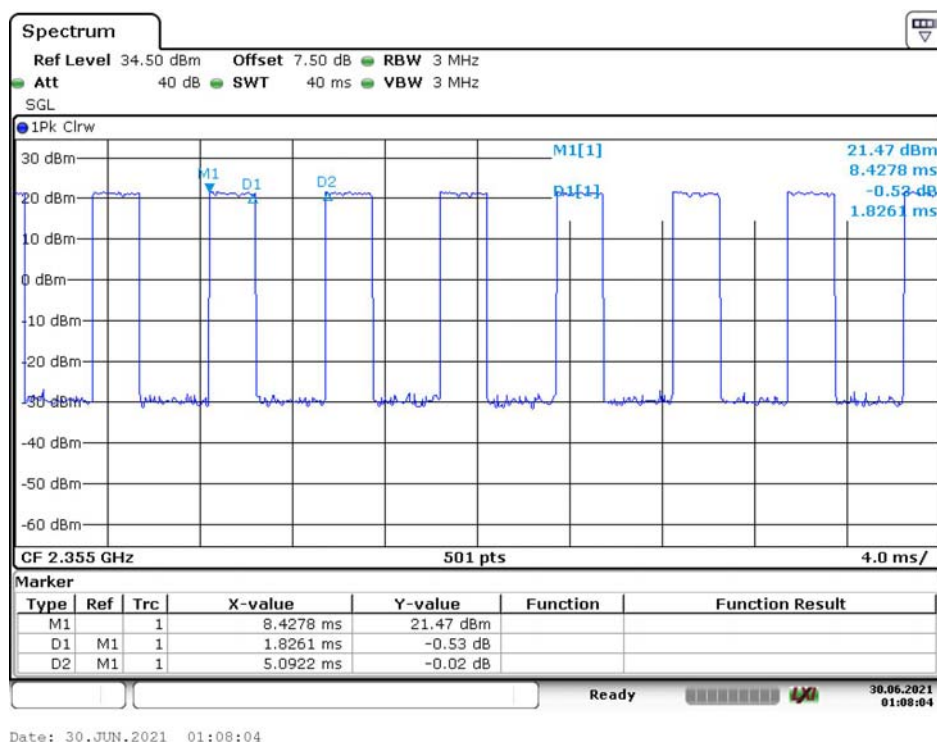

16-QAM, 10MHz

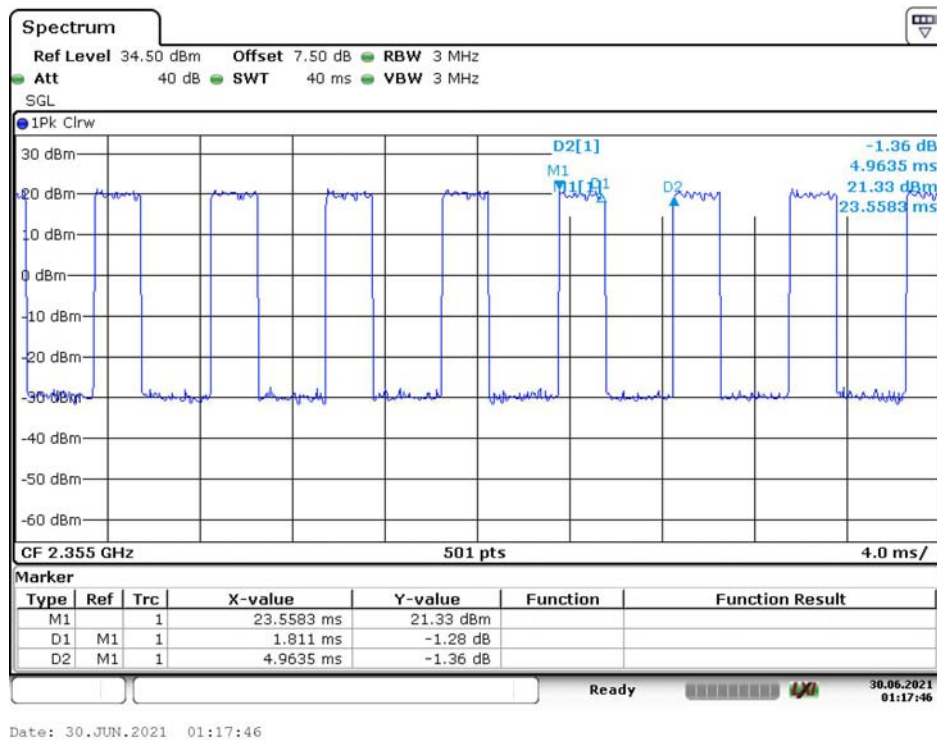

LTE Band 41**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5 MHz	QPSK	RB1#0	21.06	21.94	21.52
		RB1#13	21.10	21.73	21.05
		RB1#24	21.61	22.20	21.36
		RB15#0	20.58	20.98	20.79
		RB15#10	20.54	20.96	20.77
		RB25#0	20.52	20.96	20.72
	16QAM	RB1#0	20.58	21.25	20.67
		RB1#13	20.58	21.13	20.75
		RB1#24	20.52	21.12	20.71
		RB15#0	19.48	19.98	19.58
		RB15#10	19.48	19.92	19.55
		RB25#0	20.46	19.88	19.63
10 MHz	QPSK	RB1#0	22.10	21.88	21.59
		RB1#25	22.61	22.33	21.77
		RB1#49	22.89	22.29	21.59
		RB25#0	21.53	21.02	20.70
		RB25#25	21.54	20.94	20.72
		RB50#0	21.55	20.97	20.69
	16QAM	RB1#0	21.65	20.97	20.79
		RB1#25	21.64	20.88	20.80
		RB1#49	21.64	20.84	20.77
		RB25#0	20.42	19.97	19.64
		RB25#25	20.46	19.91	19.68
		RB50#0	20.42	19.92	19.62
15 MHz	QPSK	RB1#0	22.11	21.93	21.66
		RB1#38	22.66	22.25	21.96
		RB1#74	23.32	22.45	22.01
		RB36#0	21.73	21.15	20.85
		RB36#39	21.68	21.05	20.92
		RB75#0	21.70	21.09	20.87
	16QAM	RB1#0	21.65	20.95	20.91
		RB1#38	21.64	20.88	20.87
		RB1#74	21.62	20.82	20.95
		RB36#0	20.58	20.02	19.79
		RB36#39	20.55	19.92	19.84
		RB75#0	20.52	19.99	19.72
20MHz	QPSK	RB1#0	22.37	22.00	21.64
		RB1#50	23.10	22.30	21.96
		RB1#99	23.71	22.65	22.02
		RB50#0	21.54	21.05	20.72
		RB50#50	21.51	20.96	20.75
		RB100#0	21.53	20.99	20.71
	16QAM	RB1#0	21.58	21.16	21.05
		RB1#50	21.57	21.00	21.01
		RB1#99	21.55	20.93	21.07
		RB50#0	20.44	20.10	19.68
		RB50#50	20.41	19.92	19.70
		RB100#0	20.50	19.93	19.64

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Result (dBm)	Limit (dBm)
5MHz	QPSK	Low	21.61	0.65	22.26	33.00
		Middle	22.2	0.65	22.85	33.00
		High	21.52	0.65	22.17	33.00
	16QAM	Low	20.58	0.65	21.23	33.00
		Middle	21.25	0.65	21.9	33.00
		High	20.75	0.65	21.4	33.00
10MHz	QPSK	Low	22.89	0.65	23.54	33.00
		Middle	22.33	0.65	22.98	33.00
		High	21.77	0.65	22.42	33.00
	16QAM	Low	21.65	0.65	22.3	33.00
		Middle	20.97	0.65	21.62	33.00
		High	20.8	0.65	21.45	33.00
15MHz	QPSK	Low	23.32	0.65	23.97	33.00
		Middle	22.45	0.65	23.1	33.00
		High	22.01	0.65	22.66	33.00
	16QAM	Low	21.65	0.65	22.3	33.00
		Middle	20.95	0.65	21.6	33.00
		High	20.95	0.65	21.6	33.00
20MHz	QPSK	Low	23.71	0.65	24.36	33.00
		Middle	22.65	0.65	23.3	33.00
		High	22.02	0.65	22.67	33.00
	16QAM	Low	21.58	0.65	22.23	33.00
		Middle	21.16	0.65	21.81	33.00
		High	21.07	0.65	21.72	33.00

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Result = Conducted Power + Antenna Gain
- 3) Antenna gain(dBd)= Antenna gain(dBi)-2.15


FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238, §27.53

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

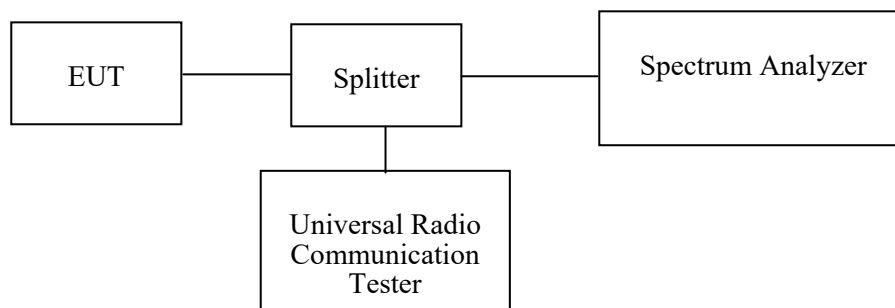**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
R&S	Spectrum Analyzer	FSV40	101474	2021-01-09	2022-01-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each Time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.2~27.5 °C
Relative Humidity:	47~70 %
ATM Pressure:	100~100.8kPa
Tester:	Lay Lei
Test Date:	2021.05.22~2021-07-26

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

GSM:

Band	Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
		Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
Cellular	GPRS	0.246	0.244	0.246	0.318	0.315	0.317
	EDGE	0.251	0.248	0.248	0.319	0.321	0.319
PCS	GPRS	0.246	0.246	0.248	0.32	0.317	0.319
	EDGE	0.251	0.259	0.255	0.327	0.342	0.327

WCDMA:


Band	Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
		Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
Cellular	Rel 99	4.212	4.212	4.212	4.865	4.896	4.947
	HSDPA	4.232	4.232	4.232	4.92	4.885	4.898
	HSUPA	4.212	4.232	4.212	4.907	4.891	4.907
PCS	Rel 99	4.212	4.212	4.192	4.883	4.932	4.929
	HSDPA	4.192	4.232	4.212	4.903	4.923	4.923
	HSUPA	4.212	4.232	4.192	4.912	4.907	4.903

LTE Bands:

Band	Bandwidth (MHz)	Modulation mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
			Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
LTE Band 2	1.4 MHz	QPSK	1.102	1.108	1.102	1.254	1.296	1.284
		16QAM	1.102	1.096	1.102	1.302	1.278	1.284
	3 MHz	QPSK	2.695	2.695	2.683	2.928	2.916	2.964
		16QAM	2.695	2.683	2.683	2.940	2.940	2.928
	5 MHz	QPSK	4.551	4.531	4.511	5.080	5.080	5.100
		16QAM	4.531	4.531	4.551	5.060	5.100	5.080
	10 MHz	QPSK	8.942	8.902	8.942	9.840	9.680	9.680
		16QAM	8.942	8.982	8.942	9.640	9.760	9.760
	15 MHz	QPSK	13.533	13.413	13.473	15.000	14.940	15.000
		16QAM	13.533	13.533	13.473	14.880	14.880	15.000
	20 MHz	QPSK	17.964	17.884	17.964	19.440	19.360	19.680
		16QAM	17.964	17.964	17.964	19.520	19.600	19.520
LTE Band 4	1.4 MHz	QPSK	1.102	1.102	1.108	1.290	1.296	1.272
		16QAM	1.102	1.096	1.102	1.308	1.272	1.284
	3 MHz	QPSK	2.695	2.695	2.683	2.952	2.916	2.964
		16QAM	2.695	2.683	2.683	2.952	2.940	2.928
	5 MHz	QPSK	4.531	4.511	4.511	5.080	5.100	5.060
		16QAM	4.531	4.531	4.531	5.060	5.060	5.100
	10 MHz	QPSK	8.942	8.942	8.942	9.800	9.680	9.720
		16QAM	8.982	8.942	8.942	9.640	9.760	9.800
	15 MHz	QPSK	13.473	13.473	13.533	14.940	14.880	15.060
		16QAM	13.533	13.533	13.593	14.880	14.880	14.880
	20 MHz	QPSK	17.884	17.884	18.044	19.360	19.360	19.760
		16QAM	17.964	17.964	18.044	19.520	19.600	19.680


Band	Bandwidth (MHz)	Modulation mode	99% Occupied Bandwidth(MHz)			26 dB Occupied Bandwidth(MHz)		
			Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
LTE Band 5	1.4 MHz	QPSK	1.102	1.102	1.108	1.272	1.284	1.284
		16QAM	1.102	1.102	1.102	1.296	1.266	1.272
	3 MHz	QPSK	2.695	2.683	2.683	2.928	2.916	2.952
		16QAM	2.695	2.683	2.683	2.952	2.952	2.916
	5 MHz	QPSK	4.531	4.531	4.511	5.080	5.120	5.100
		16QAM	4.531	4.551	4.551	5.080	5.080	5.100
LTE Band 7	5 MHz	QPSK	8.982	8.942	8.942	9.800	9.720	9.840
		16QAM	8.982	8.942	8.982	9.640	9.760	9.840
	10 MHz	QPSK	4.531	4.531	4.531	5.120	5.100	5.160
		16QAM	4.531	4.551	4.531	5.100	5.100	5.120
	15 MHz	QPSK	8.981	8.981	8.942	9.880	9.800	9.840
		16QAM	8.981	8.981	8.942	9.840	9.800	9.840
LTE Band 17	5 MHz	QPSK	13.533	13.473	13.533	15.000	15.120	15.240
		16QAM	13.533	13.593	13.533	15.000	14.940	15.120
	10 MHz	QPSK	17.964	17.964	18.044	19.440	19.600	19.760
		16QAM	17.964	17.964	18.044	19.600	19.840	19.440
	20 MHz	QPSK	4.511	4.531	4.531	5.020	5.060	5.060
		16QAM	4.491	4.551	4.551	5.000	5.020	5.080
LTE Band 38	5 MHz	QPSK	8.982	8.982	8.982	9.720	9.720	9.720
		16QAM	8.982	8.942	8.982	9.680	9.640	9.720
	10 MHz	QPSK	4.511	4.531	4.531	5.060	5.180	5.080
		16QAM	4.531	4.511	4.531	5.220	5.300	5.060
	15 MHz	QPSK	8.982	8.942	8.942	9.800	9.720	9.640
		16QAM	8.942	8.942	8.942	9.600	9.640	9.720
LTE Band 40 Lower	5 MHz	QPSK	13.473	13.473	13.473	14.940	14.820	15.840
		16QAM	13.533	13.593	13.533	14.940	15.060	14.940
	10 MHz	QPSK	17.964	17.964	17.884	19.360	19.520	19.600
		16QAM	17.964	17.964	17.884	19.600	19.600	19.760
	5 MHz	QPSK	4.511	4.511	4.531	5.086	5.333	5.082
		16QAM	4.531	4.531	4.511	5.001	5.744	5.069
LTE Band 40 Upper	10 MHz	QPSK	/	8.982	/	/	10.120	/
		16QAM	/	8.942	/	/	9.660	/
	5 MHz	QPSK	4.511	4.531	4.511	5.005	5.828	5.093
		16QAM	4.511	4.531	4.531	5.048	5.309	5.102
	10 MHz	QPSK	/	8.942	/	/	9.864	/
		16QAM	/	8.942	/	/	9.756	/
LTE Band 41	5 MHz	QPSK	4.511	4.531	4.531	5.080	5.000	5.120
		16QAM	4.531	4.511	4.531	5.100	5.060	5.200
	10 MHz	QPSK	8.982	8.942	8.942	10.160	9.840	9.800
		16QAM	8.982	8.942	8.942	9.680	9.640	9.760
	15 MHz	QPSK	13.533	13.533	13.473	16.080	16.140	14.940
		16QAM	13.593	13.593	13.533	15.660	15.180	14.940
	20 MHz	QPSK	17.964	17.964	17.964	19.440	19.520	19.680
		16QAM	17.964	17.964	17.964	19.520	19.440	19.520

Cellular 850 Band, GSM, Low Channel

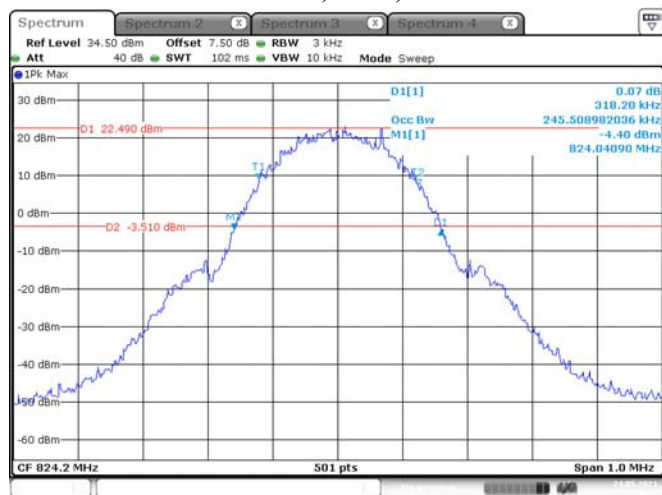


Date: 24.MAY.2021 17:18:28

Cellular 850 Band, GSM, Middle Channel

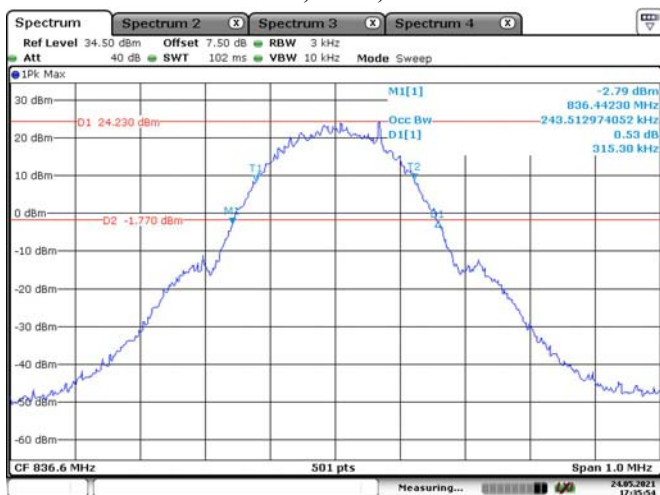


Date: 24.MAY.2021 17:35:14

Cellular 850 Band, GSM, High Channel

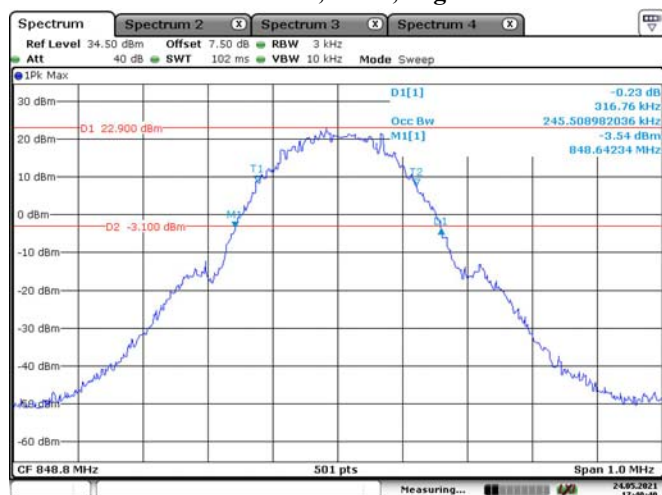


Date: 24.MAY.2021 17:40:40

PCS 1900 Band, GSM, Low Channel

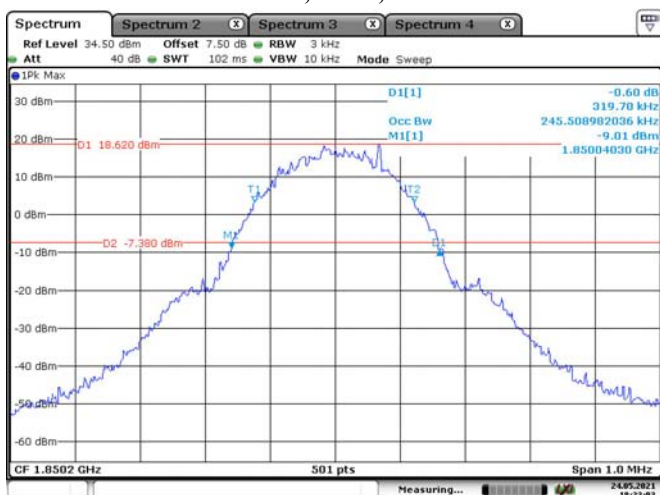


Date: 24.MAY.2021 18:23:03

PCS 1900 Band, GSM, Middle Channel

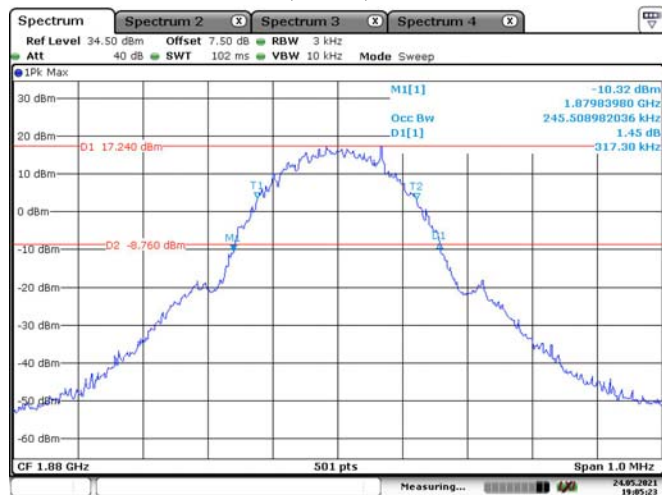


Date: 24.MAY.2021 19:05:23

PCS 1900 Band, GSM, High Channel

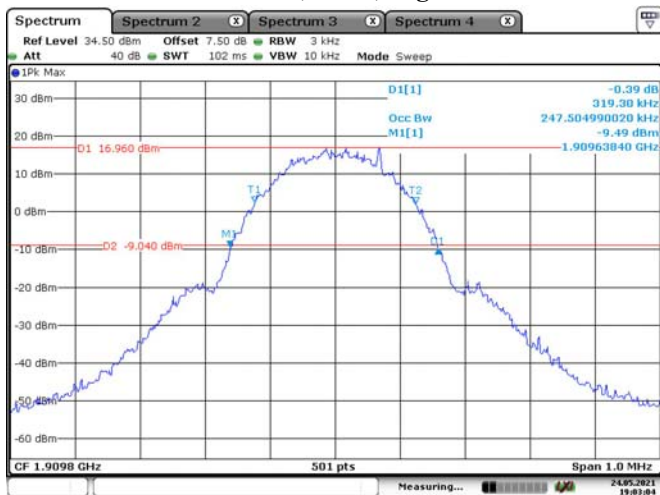


Date: 24.MAY.2021 19:03:04

Cellular 850 Band, EDGE, Low Channel

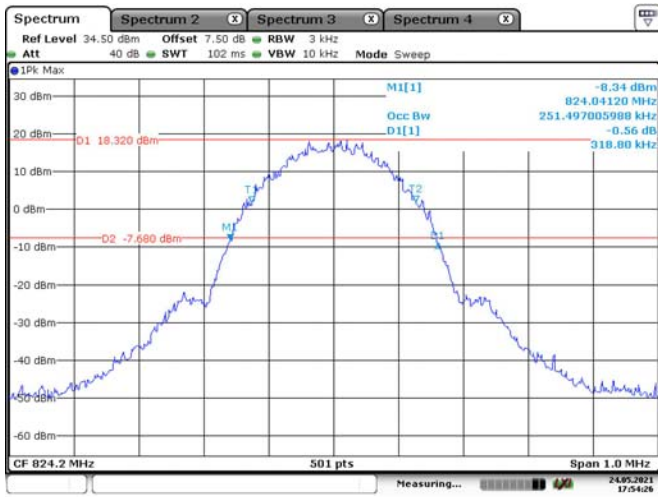


Date: 24.MAY.2021 17:54:26

Cellular 850 Band, EDGE, Middle Channel

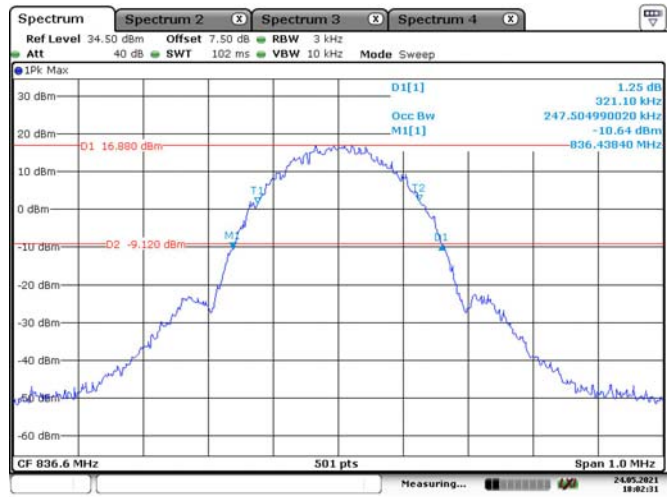


Date: 24.MAY.2021 18:02:32

Cellular 850 Band, EDGE, High Channel

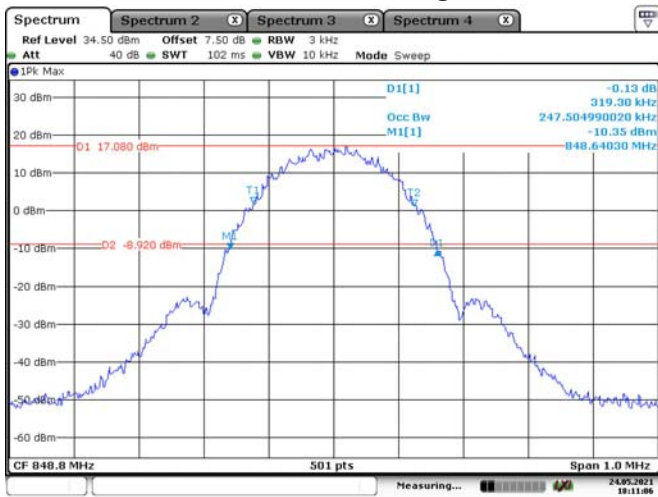


Date: 24.MAY.2021 18:11:06

PCS 1900 Band, EDGE, Low Channel

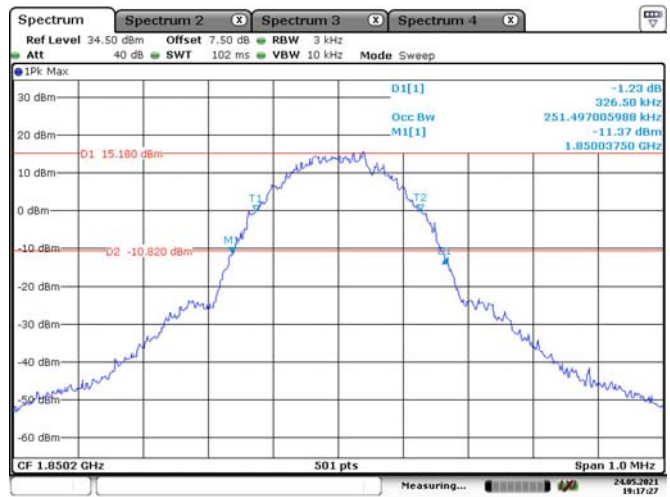


Date: 24.MAY.2021 19:17:27

PCS 1900 Band, EDGE, Middle Channel

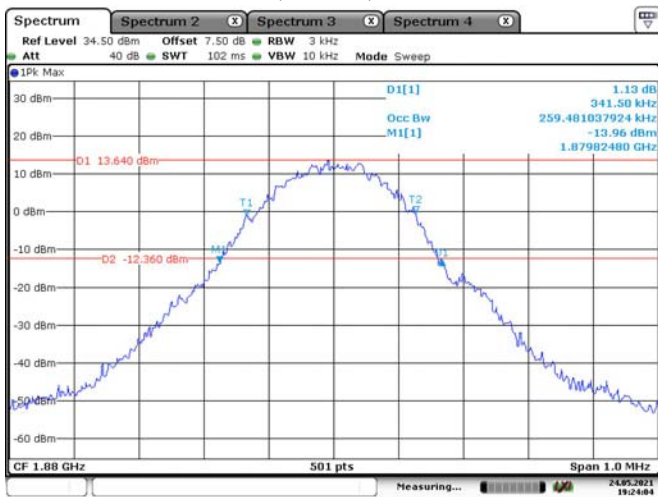


Date: 24.MAY.2021 19:24:04

PCS 1900 Band, EDGE, High Channel

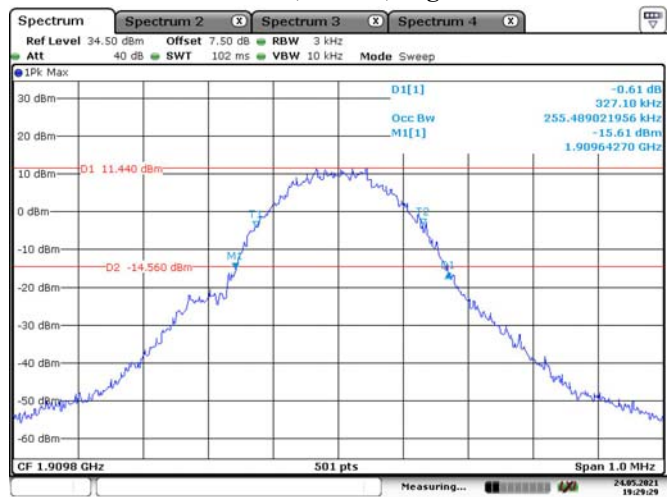


Date: 24.MAY.2021 19:29:29

WCDMA Band II, Rel99, Low Channel

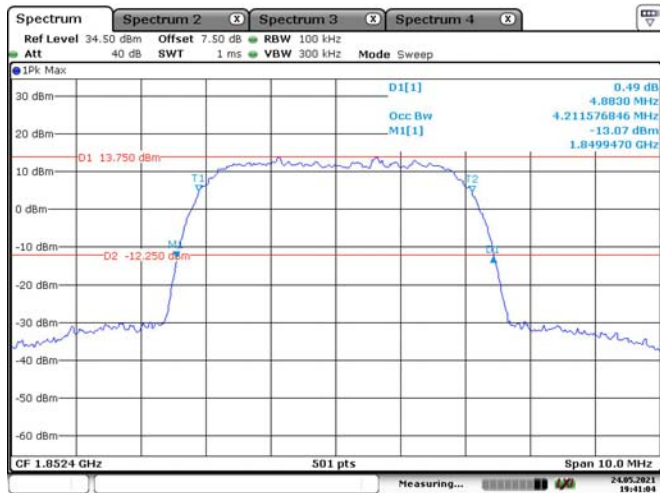


Date: 24.MAY.2021 19:41:05

WCDMA Band II, Rel99, Middle Channel

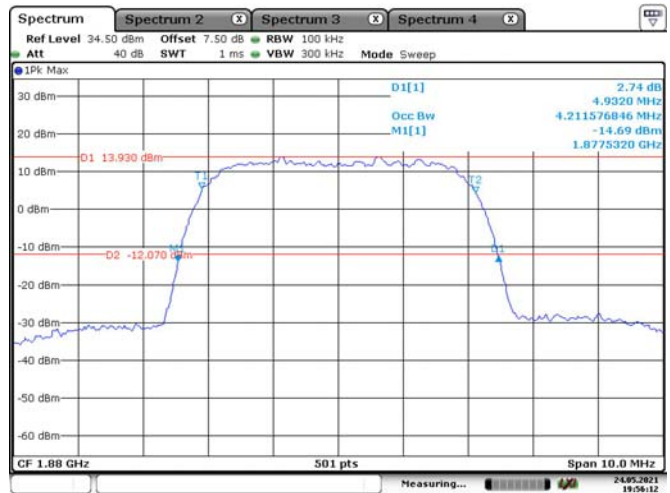


Date: 24.MAY.2021 19:56:12

WCDMA Band II, Rel99, High Channel

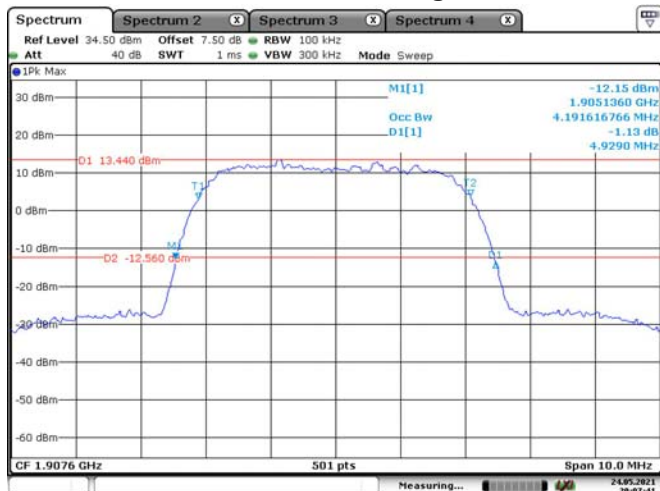


Date: 24.MAY.2021 20:07:42

WCDMA Band II, HSDPA, Low Channel

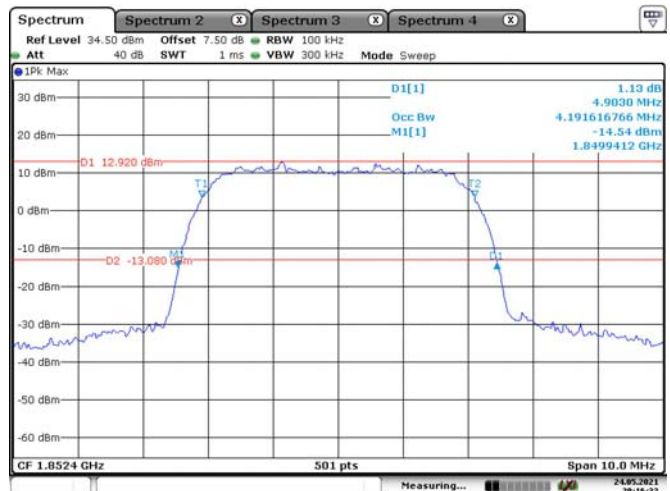


Date: 24.MAY.2021 20:16:33

WCDMA Band II, HSDPA, Middle Channel

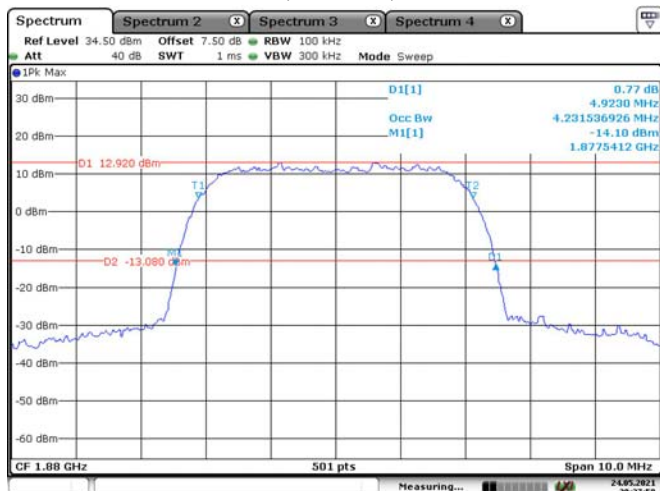


Date: 24.MAY.2021 20:27:59

WCDMA Band II, HSDPA, High Channel

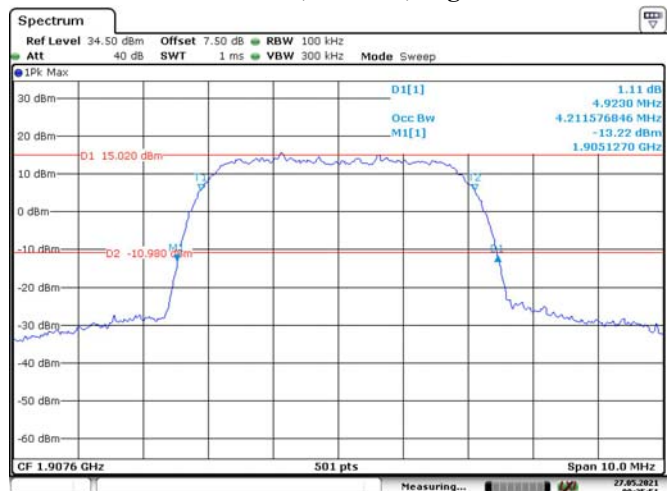


Date: 27.MAY.2021 08:25:51

WCDMA Band II, HSUPA, Low Channel

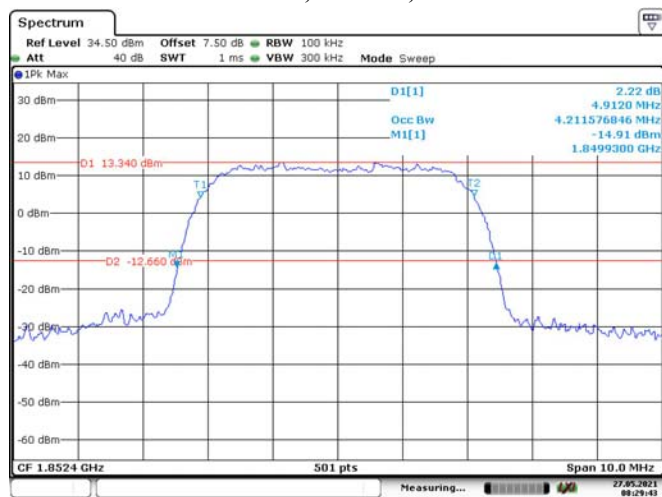


Date: 27.MAY.2021 08:29:43

WCDMA Band II, HSUPA, Middle Channel

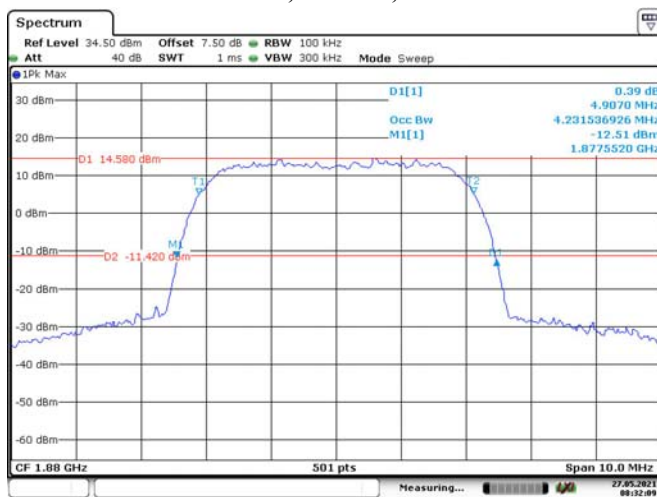


Date: 27.MAY.2021 08:32:09

WCDMA Band II, HSUPA, High Channel

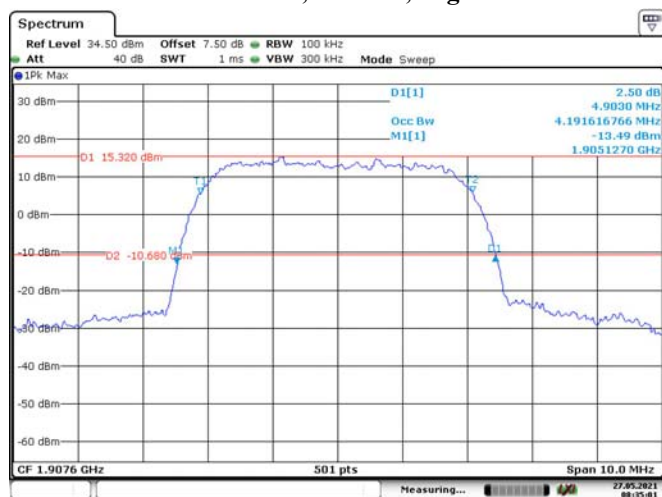


Date: 27.MAY.2021 08:35:02


WCDMA Band V, Rel99, Middle Channel

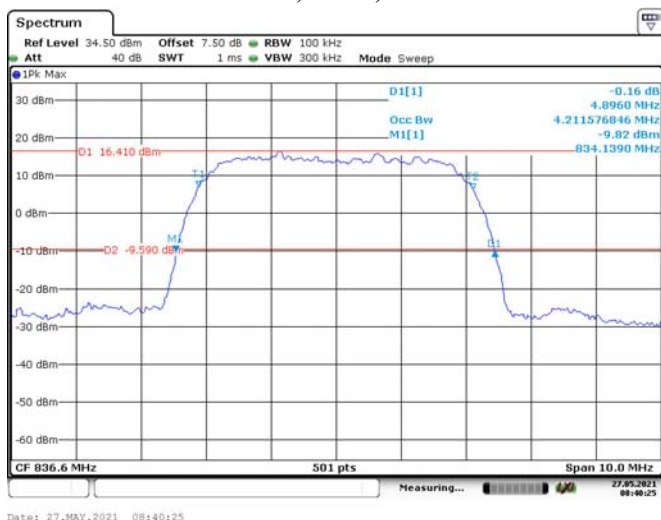


WCDMA Band V, HSDPA, Low Channel

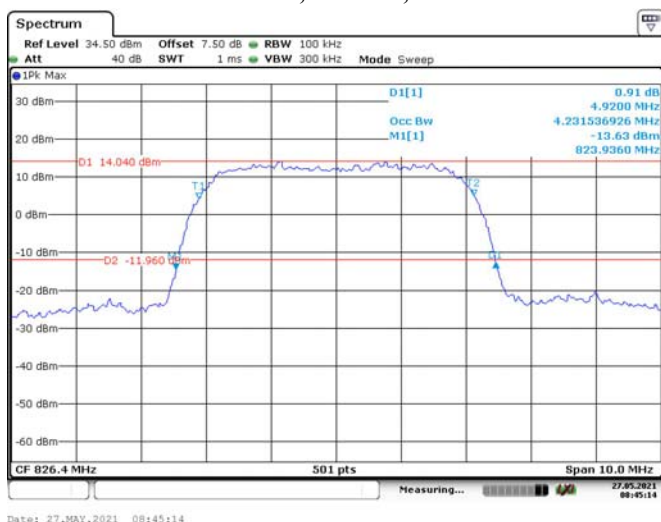

WCDMA Band V, HSDPA, High Channel

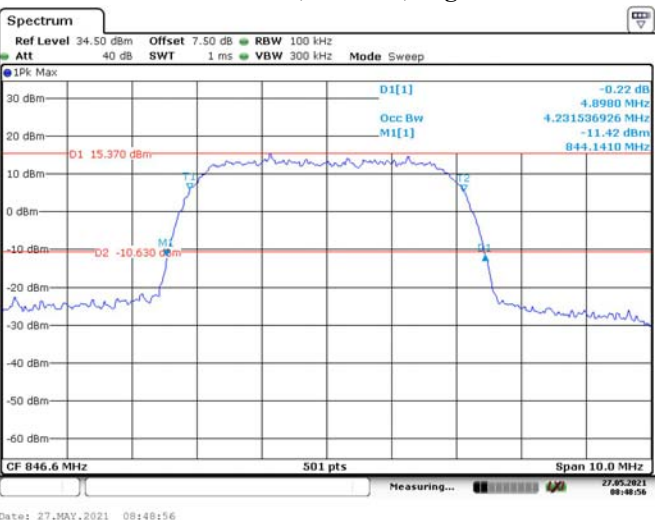


WCDMA Band V, HSUPA, Low Channel

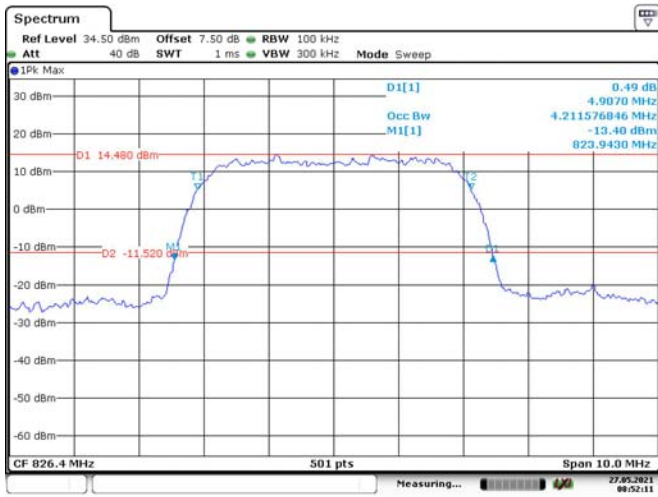


Date: 27.MAY.2021 08:52:12

WCDMA Band V, HSUPA, Middle Channel

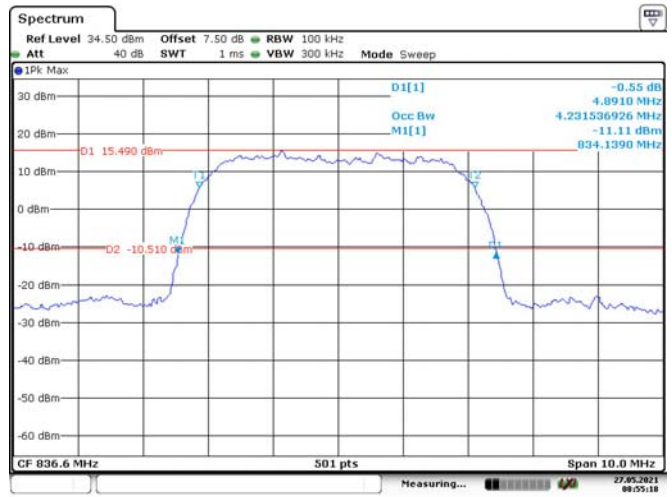

Date: 27.MAY.2021 08:55:19

WCDMA Band V, HSUPA, High Channel

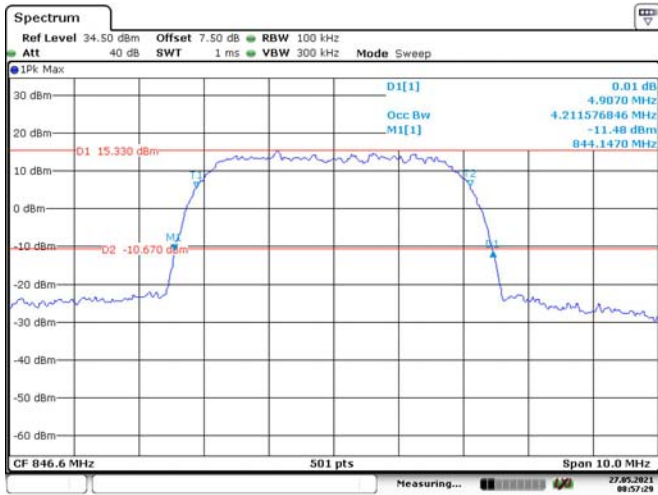


Date: 27.MAY.2021 08:57:30

LTE Band 2**1.4M, QPSK, Low Channel**

Date: 22.MAY.2021 15:02:47

1.4M, 16QAM, Low Channel


Date: 22.MAY.2021 15:03:05

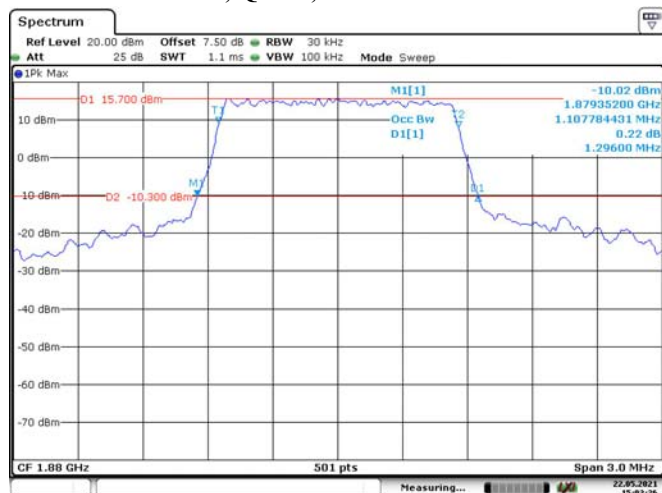1.4M, QPSK, Middle Channel

Date: 22.MAY.2021 15:03:27

1.4M, 16QAM, Middle Channel

Date: 22.MAY.2021 15:03:51

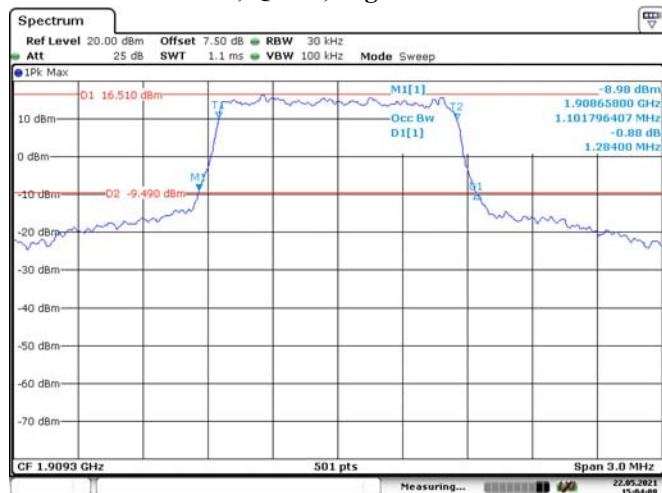
1.4M, QPSK, High Channel

Date: 22.MAY.2021 15:04:09


1.4M, 16QAM, High Channel

Date: 22.MAY.2021 15:04:30


3M, QPSK, Low Channel

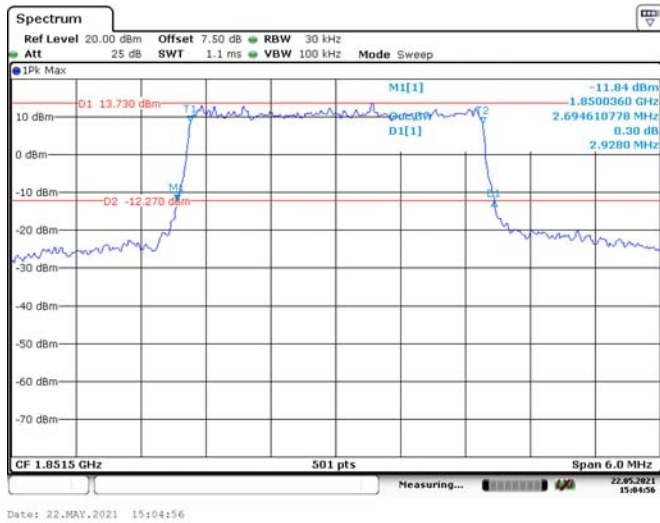


3M, 16QAM, Low Channel

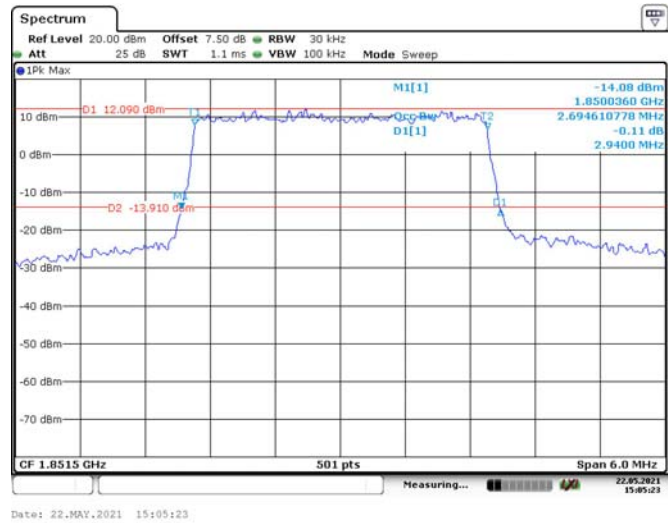


3M, QPSK, Middle Channel

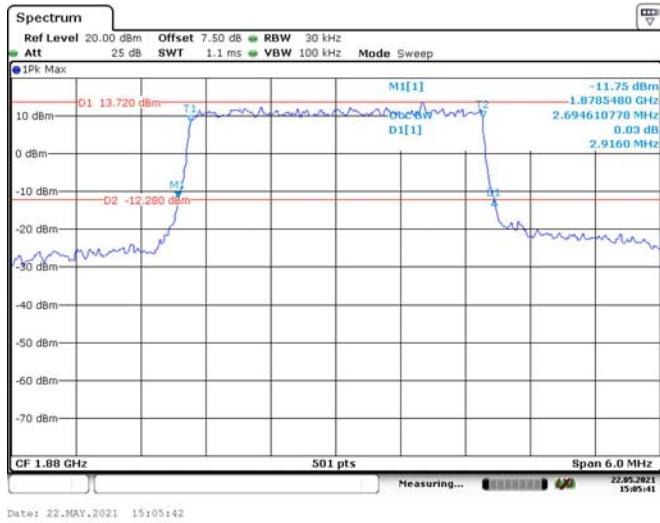


3M, 16QAM, Middle Channel

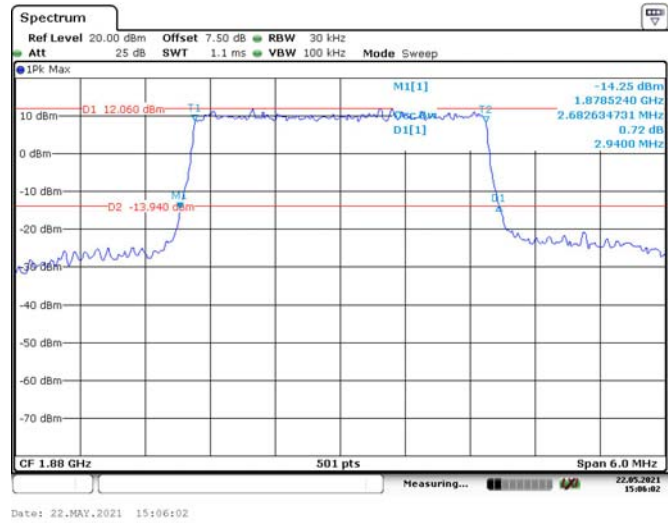


3M, QPSK, High Channel

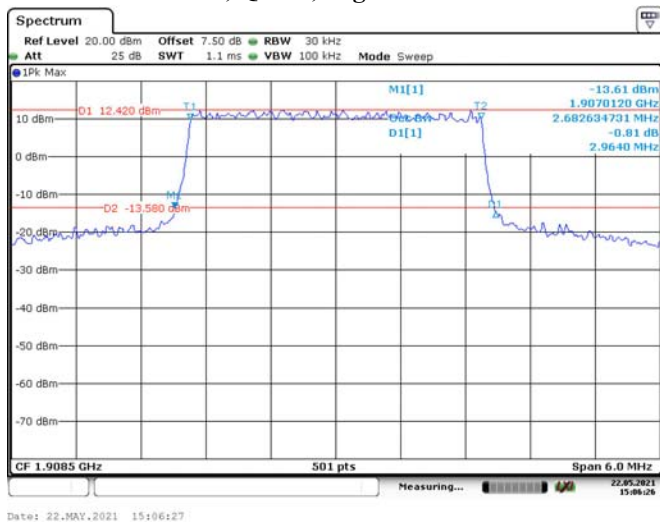


3M, 16QAM, High Channel

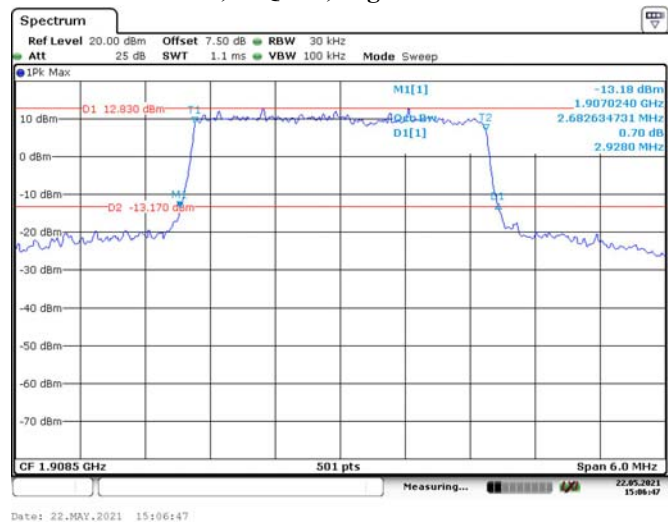


5M, QPSK, Low Channel

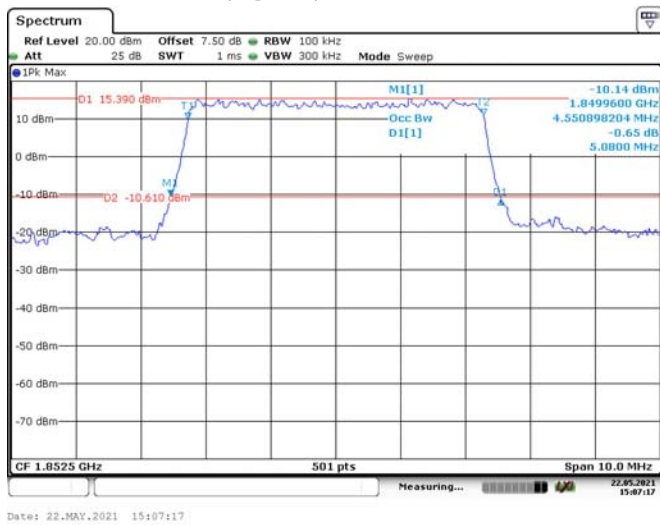


5M, 16QAM, Low Channel

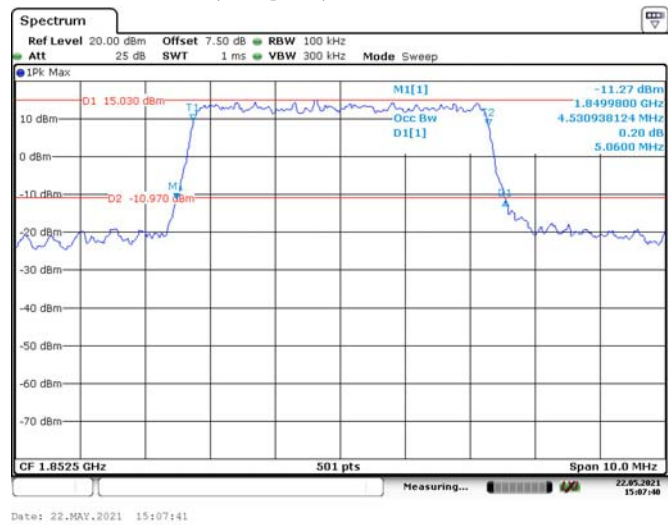


5M, QPSK, Middle Channel

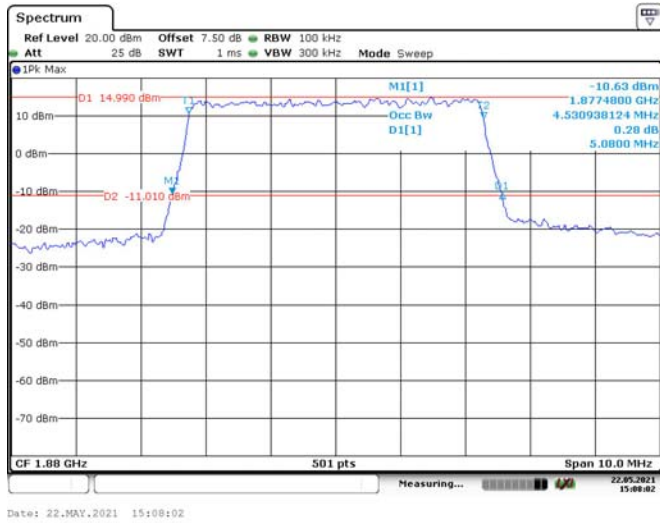


5M, 16QAM, Middle Channel

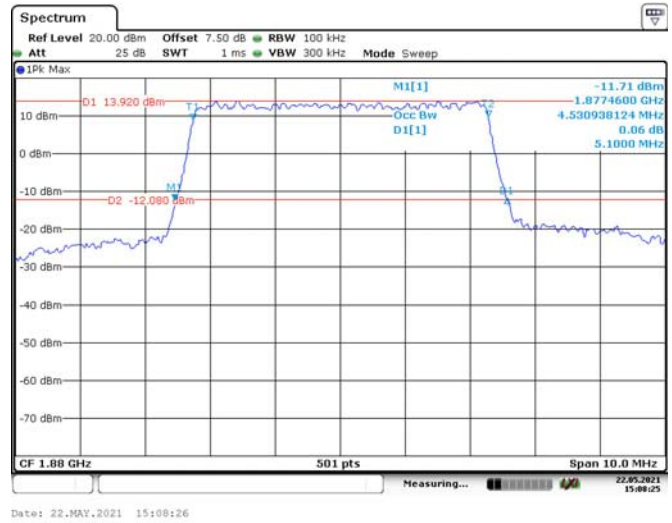


5M, QPSK, High Channel

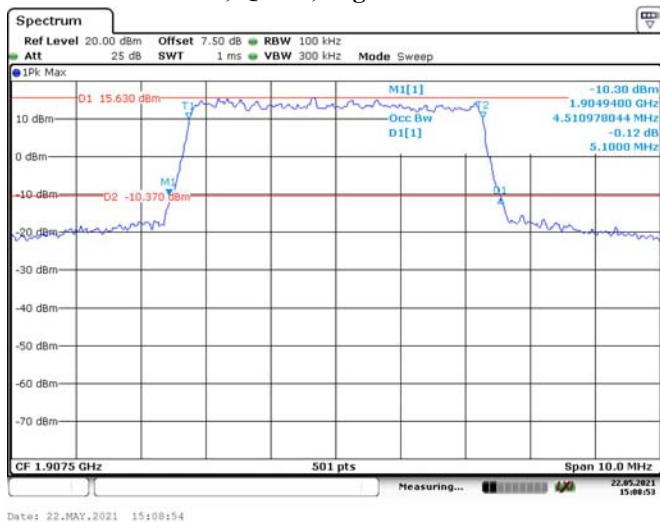

5M, 16QAM, High Channel

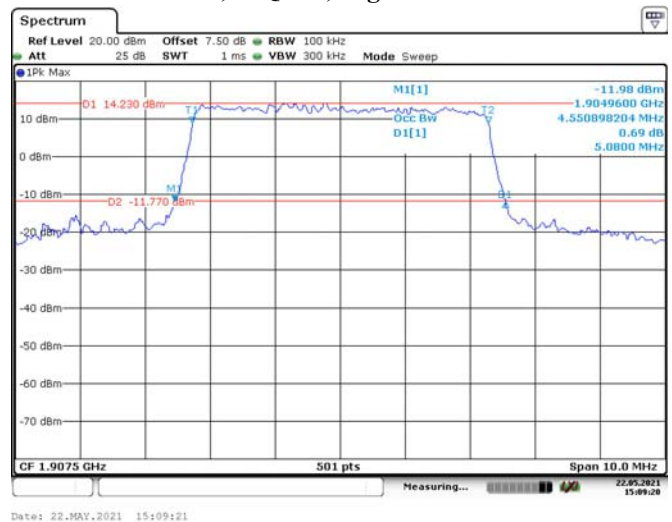


10M, QPSK, Low Channel

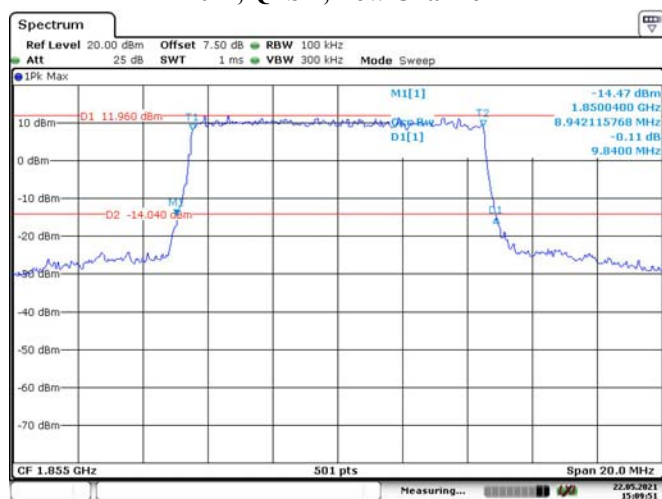


Date: 22.MAY.2021 15:09:52

10M, 16QAM, Low Channel

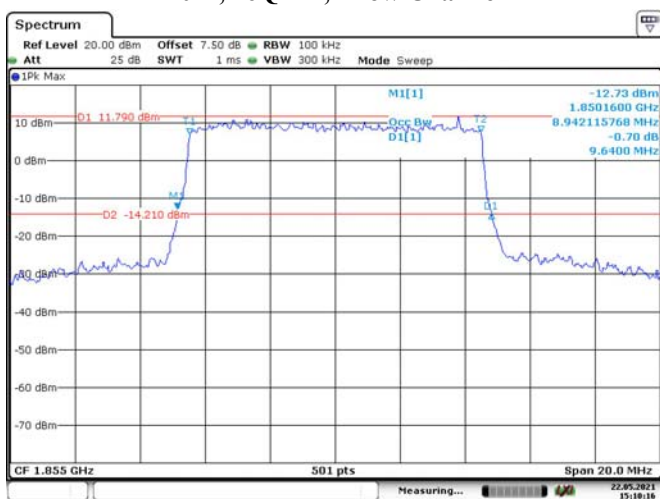


Date: 22.MAY.2021 15:10:17

10M, QPSK, Middle Channel

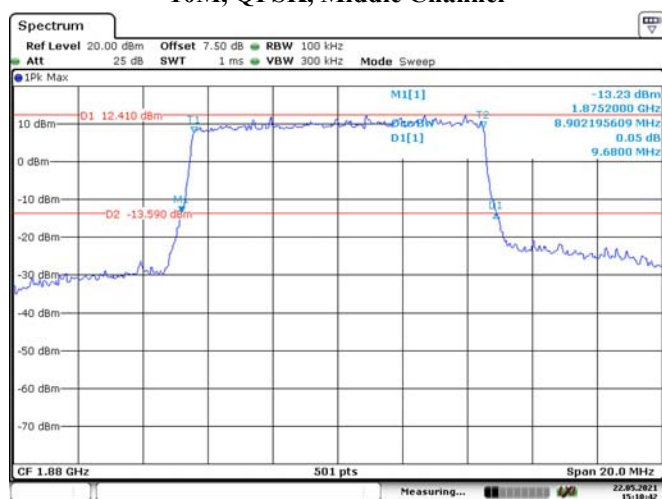


Date: 22.MAY.2021 15:10:42

10M, 16QAM, Middle Channel

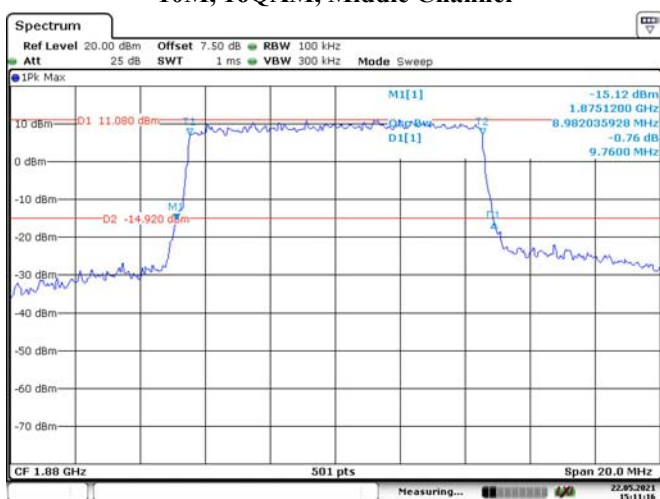


Date: 22.MAY.2021 15:11:17

10M, QPSK, High Channel

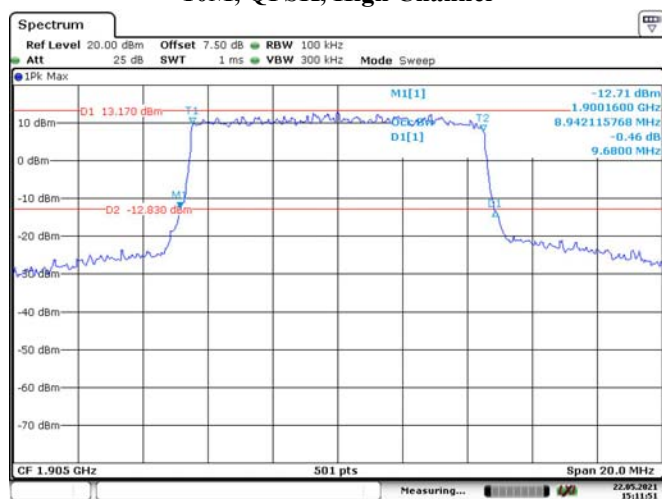


Date: 22.MAY.2021 15:11:51

10M, 16QAM, High Channel

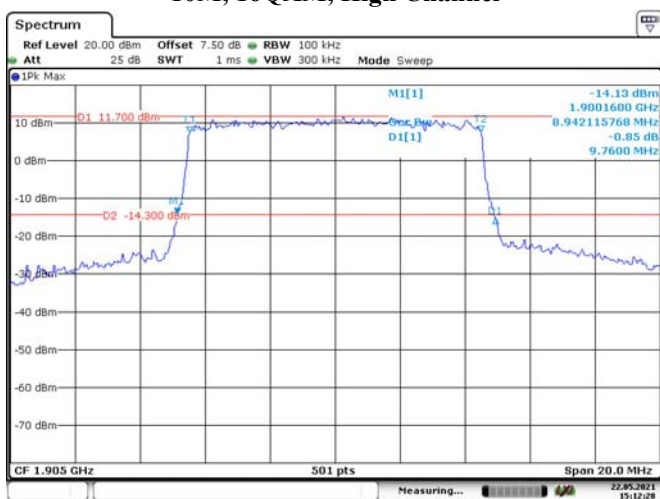


Date: 22.MAY.2021 15:12:29


15M, QPSK, Low Channel

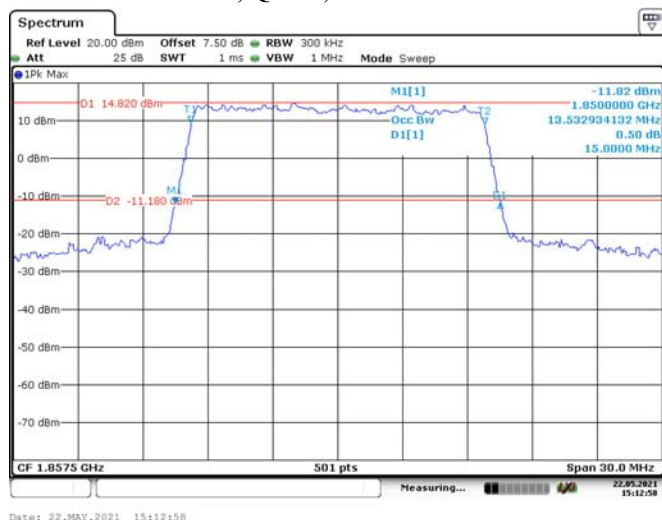


15M, 16QAM, Low Channel

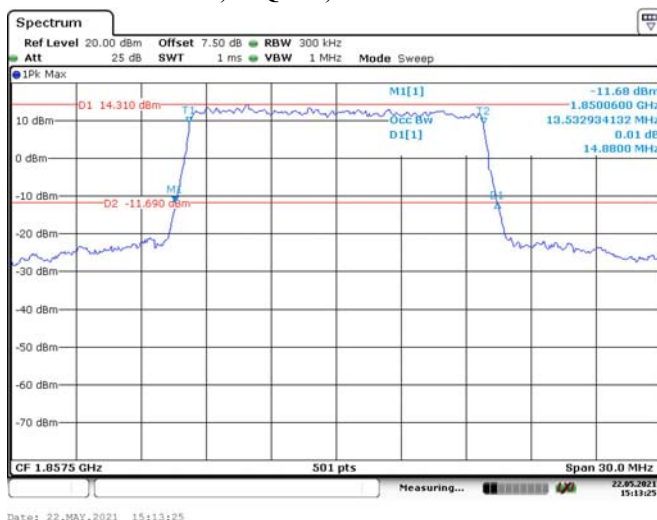


15M, QPSK, Middle Channel

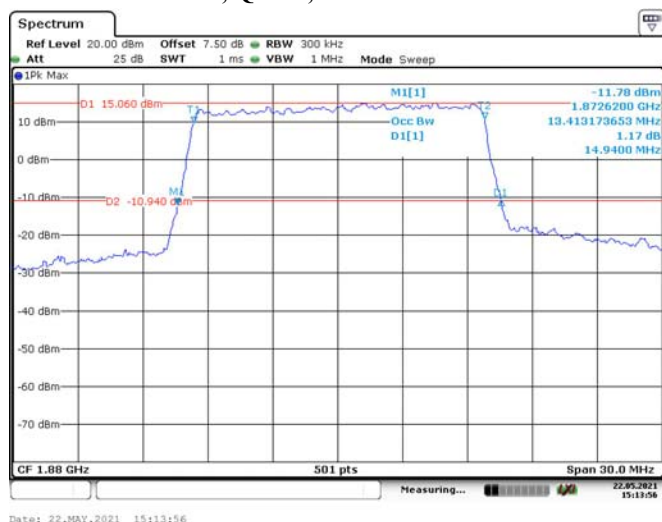


15M, 16QAM, Middle Channel

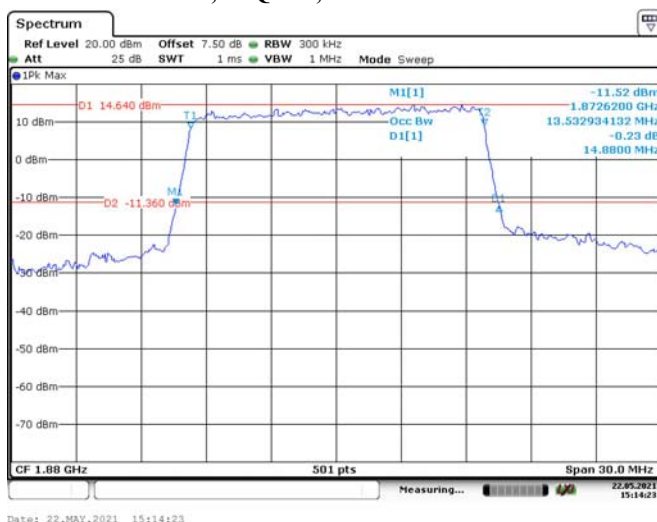


15M, QPSK, High Channel

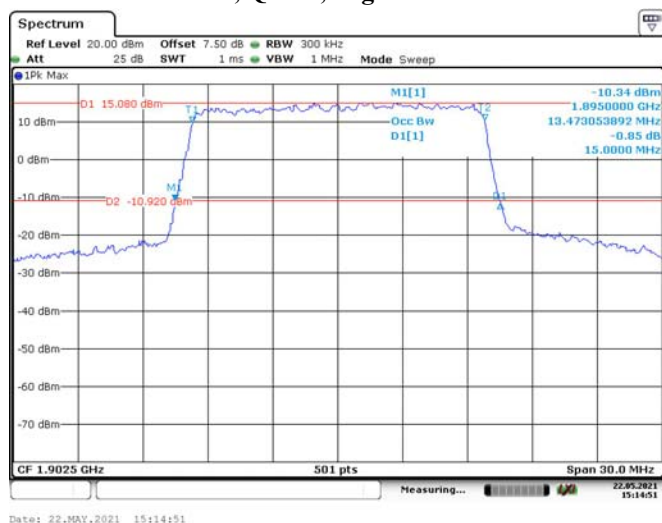


15M, 16QAM, High Channel

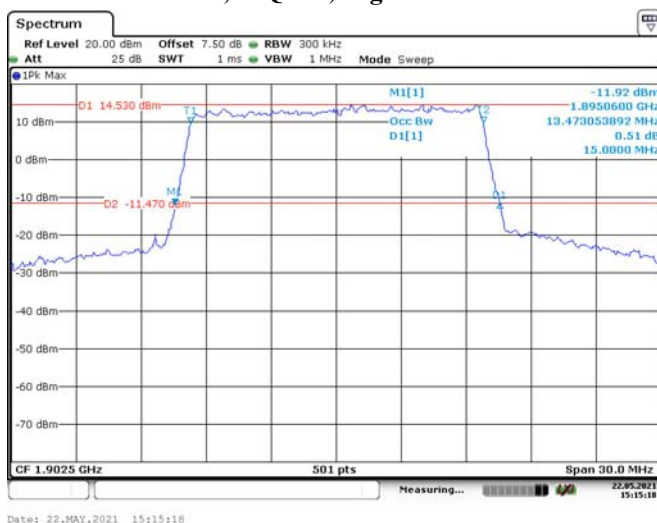


20M, QPSK, Low Channel

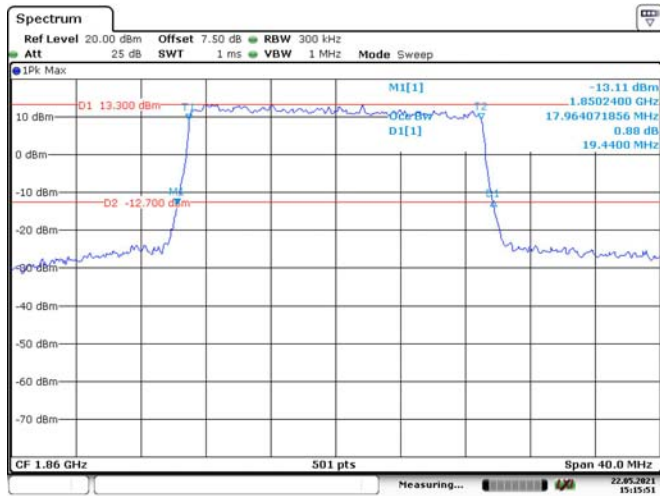


20M, 16QAM, Low Channel

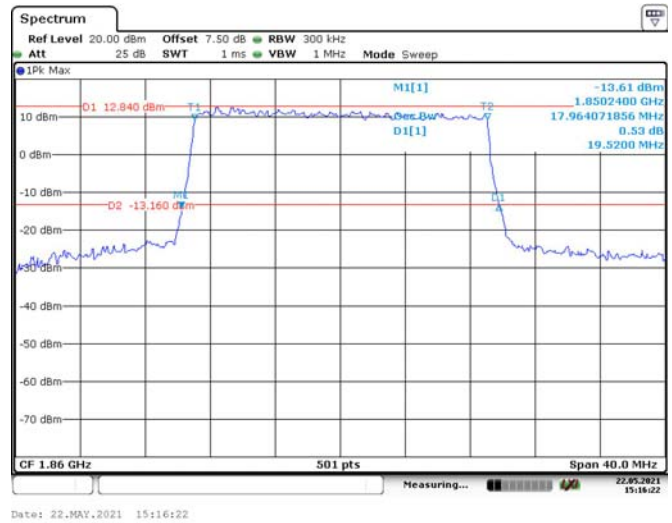


20M, QPSK, Middle Channel

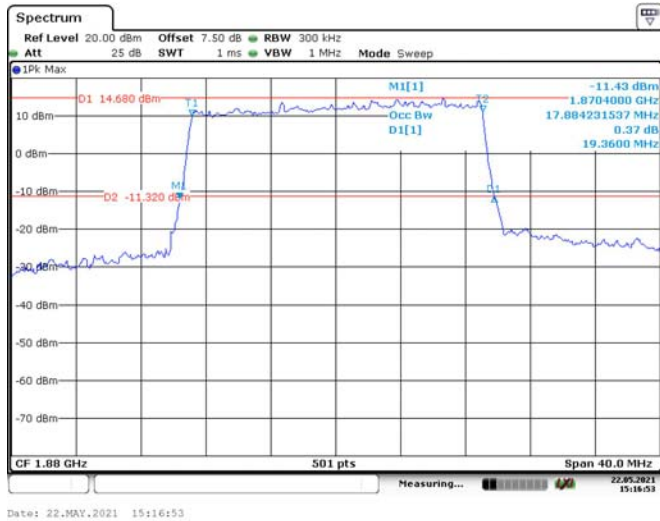


20M, 16QAM, Middle Channel





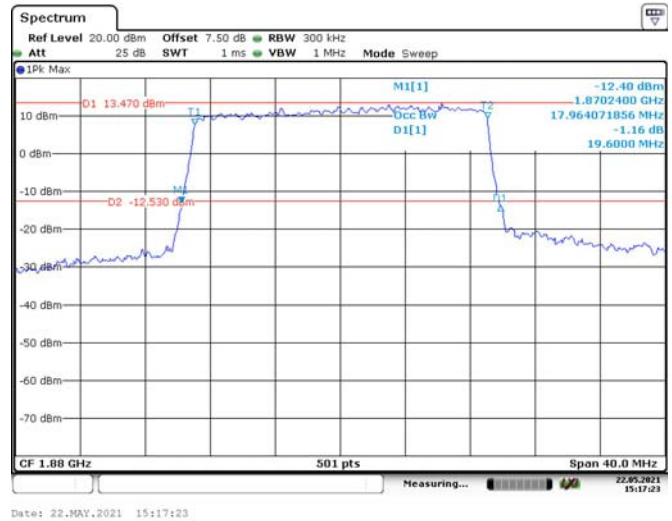


20M, QPSK, High Channel

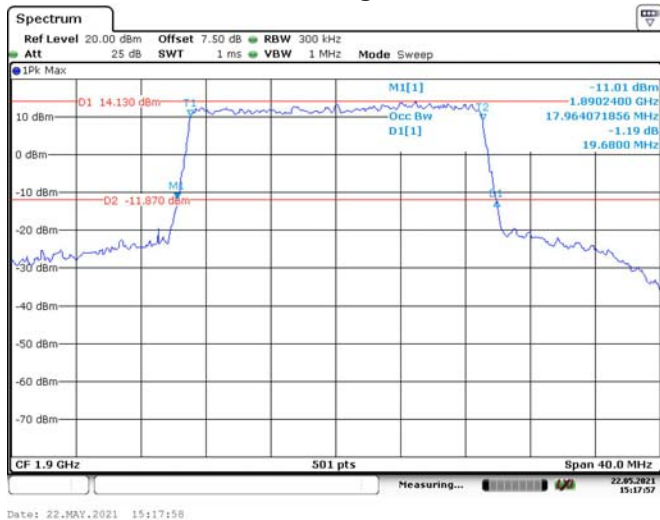


20M, 16QAM, High Channel

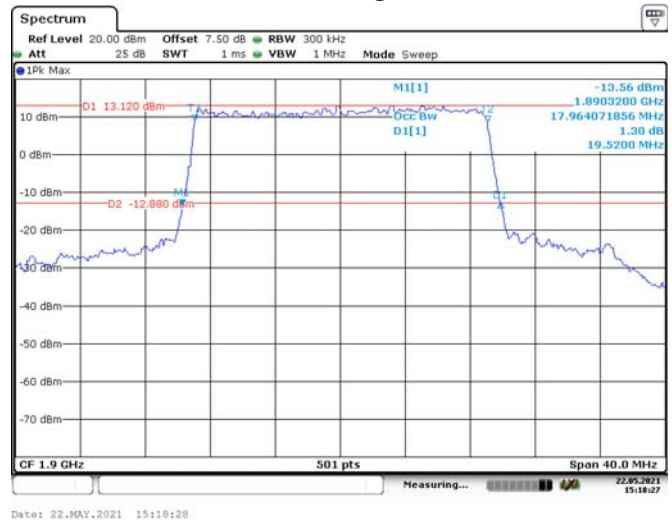

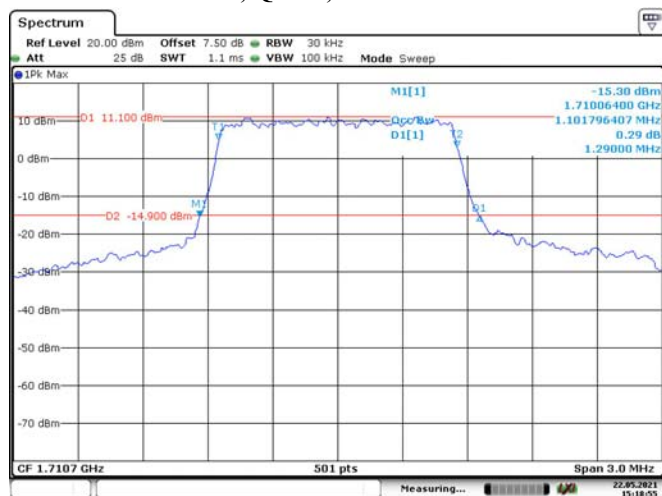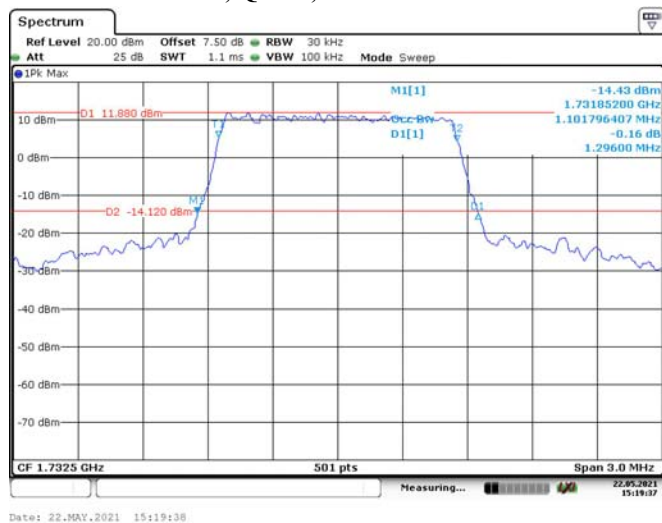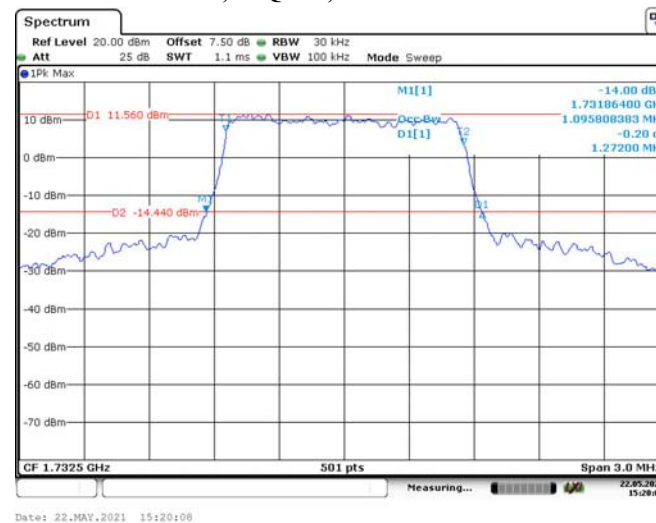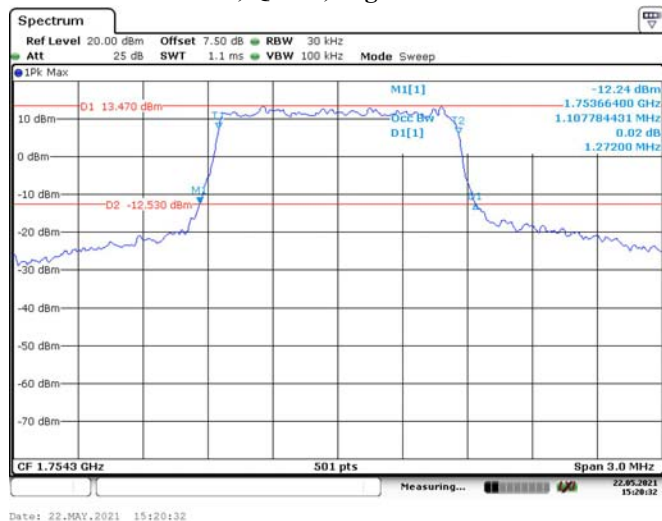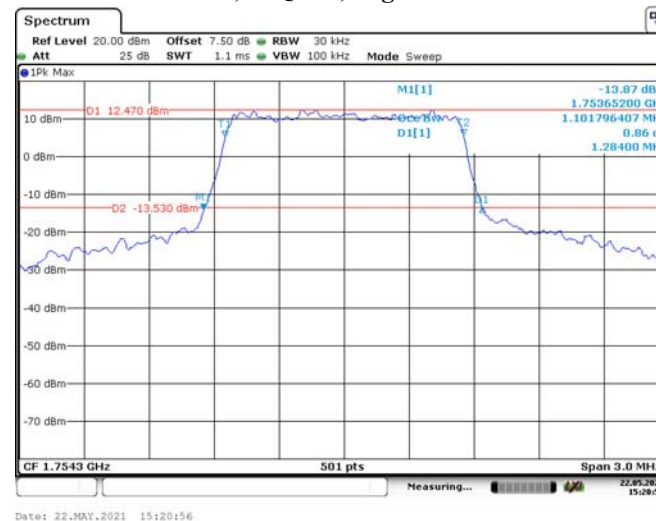
LTE Band 4:**1.4M, QPSK, Low Channel****1.4M, 16QAM, Low Channel****1.4M, QPSK, Middle Channel****1.4M, 16QAM, Middle Channel****1.4M, QPSK, High Channel****1.4M, 16QAM, High Channel**

3M, QPSK, Low Channel

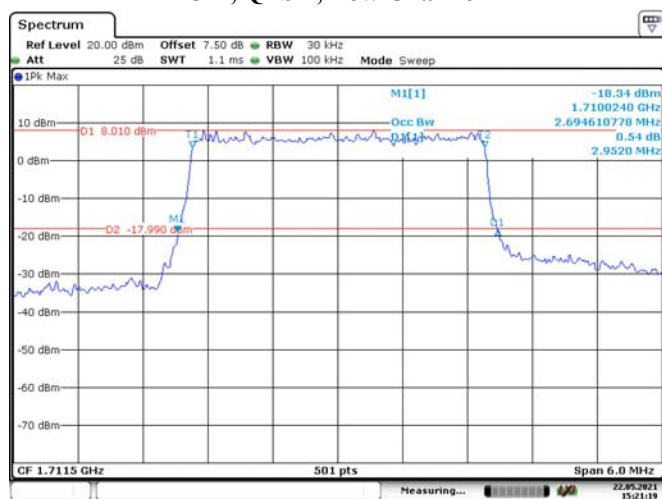


Date: 22.MAY.2021 15:21:20

3M, 16QAM, Low Channel

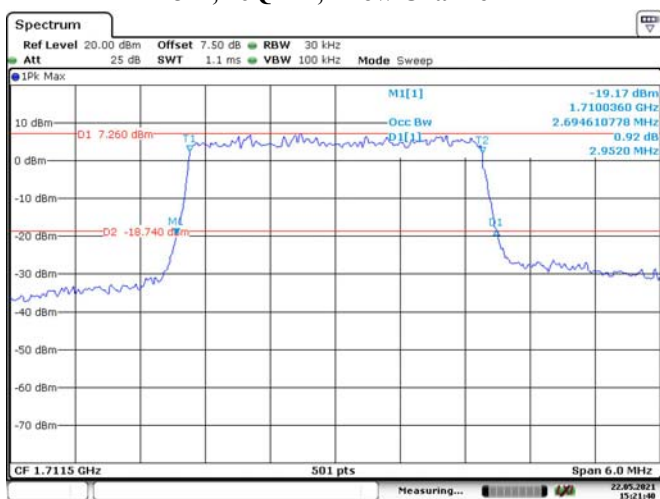


Date: 22.MAY.2021 15:21:40

3M, QPSK, Middle Channel

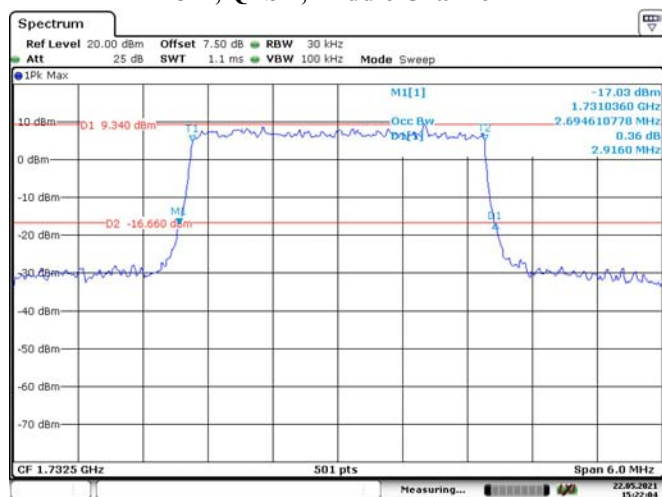


Date: 22.MAY.2021 15:22:05

3M, 16QAM, Middle Channel

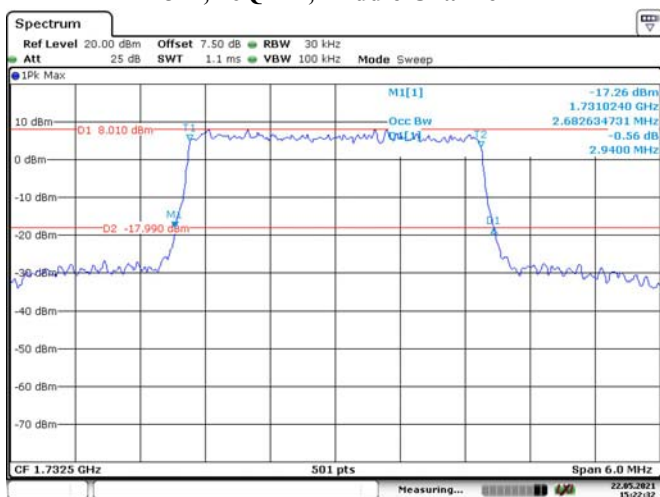


Date: 22.MAY.2021 15:22:32

3M, QPSK, High Channel

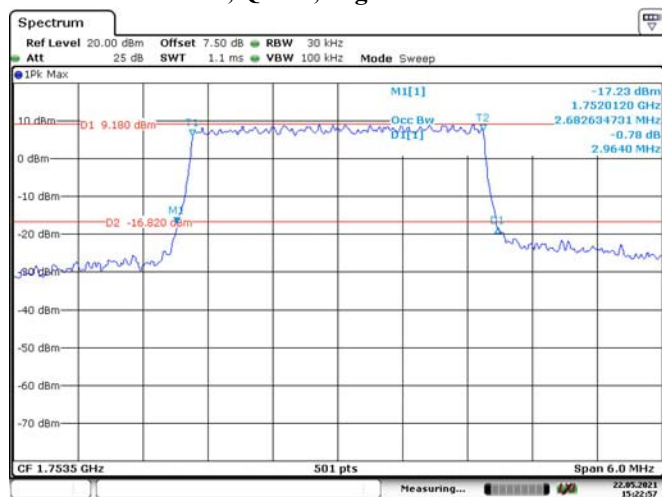


Date: 22.MAY.2021 15:22:56

3M, 16QAM, High Channel

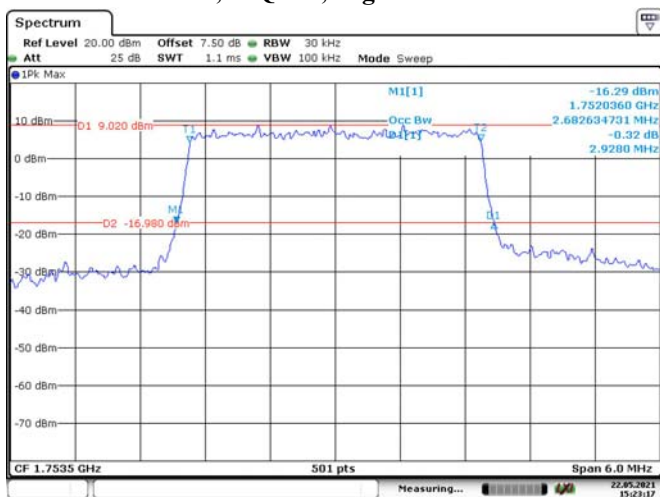


Date: 22.MAY.2021 15:23:17


5M, QPSK, Low Channel

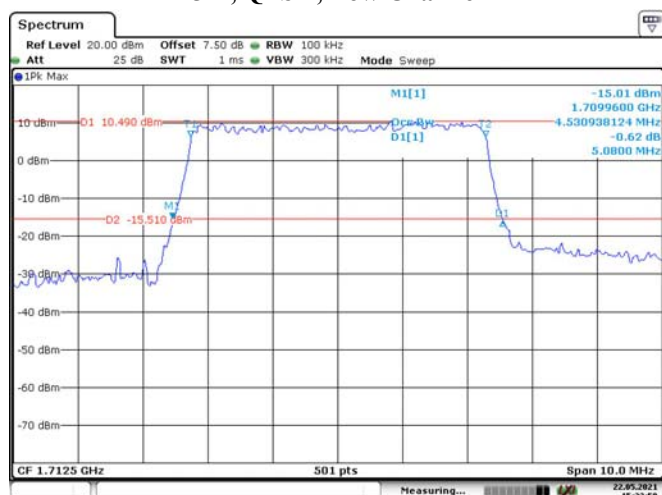


5M, 16QAM, Low Channel

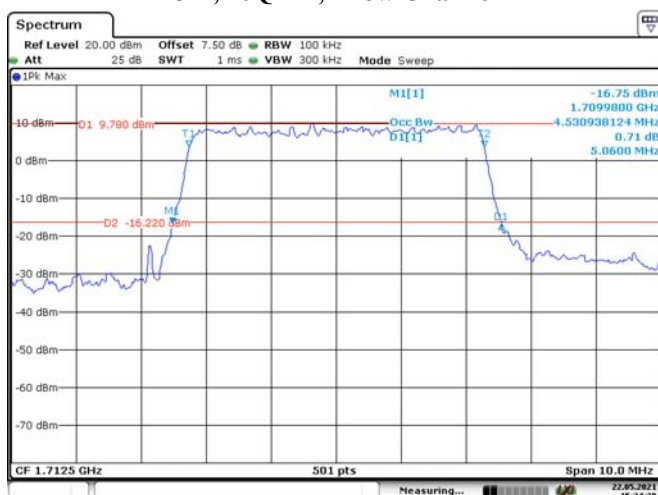


5M, QPSK, Middle Channel

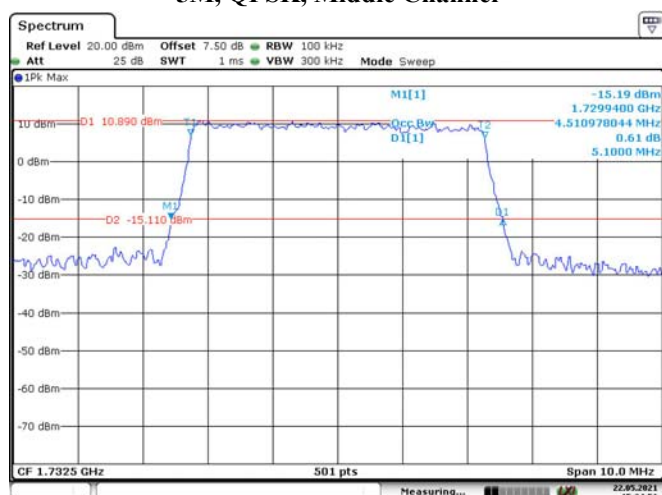


5M, 16QAM, Middle Channel

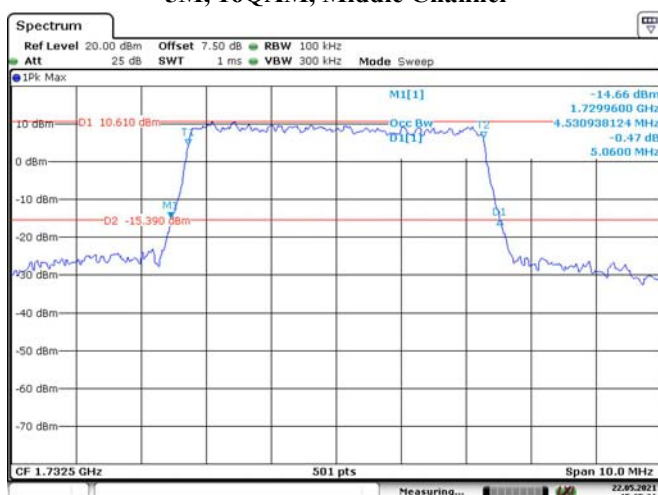


5M, QPSK, High Channel

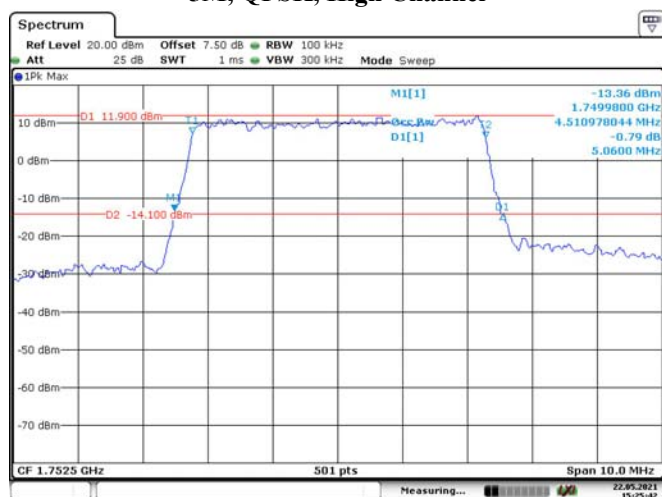


5M, 16QAM, High Channel

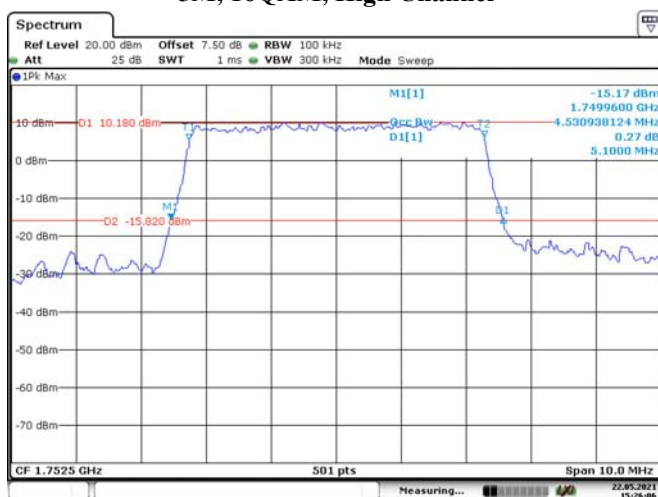


10M, QPSK, Low Channel

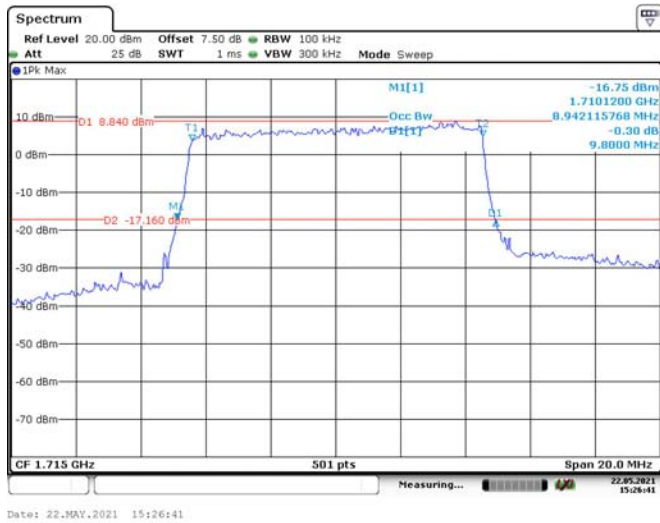


10M, 16QAM, Low Channel

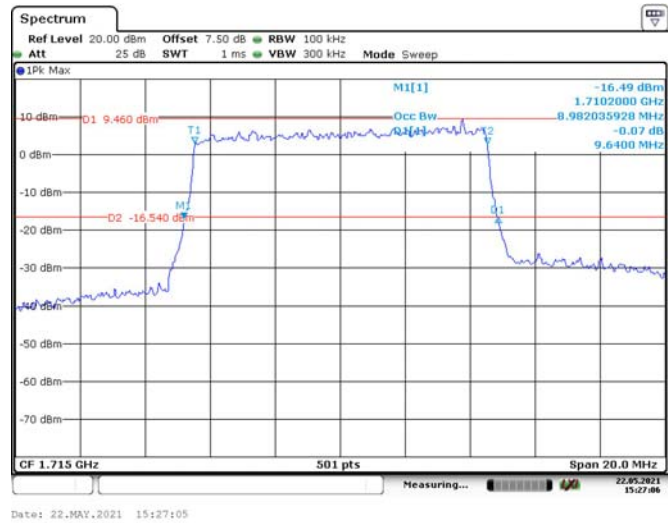


10M, QPSK, Middle Channel

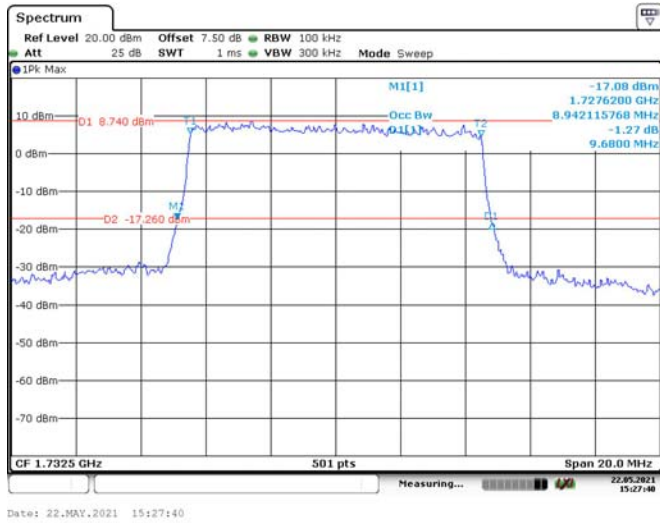


10M, 16QAM, Middle Channel

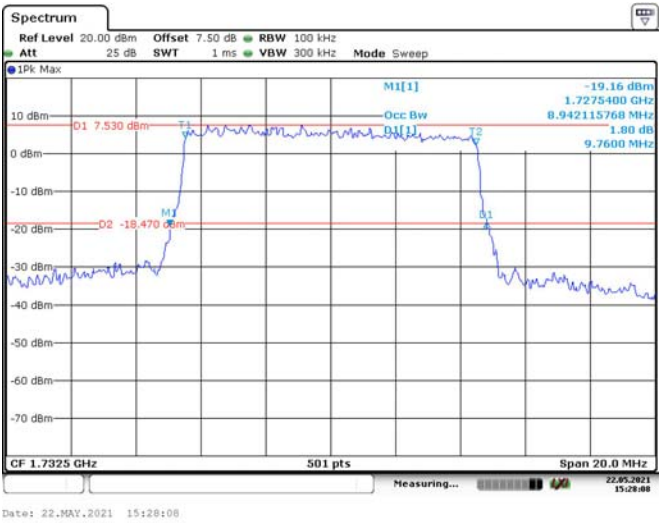


10M, QPSK, High Channel

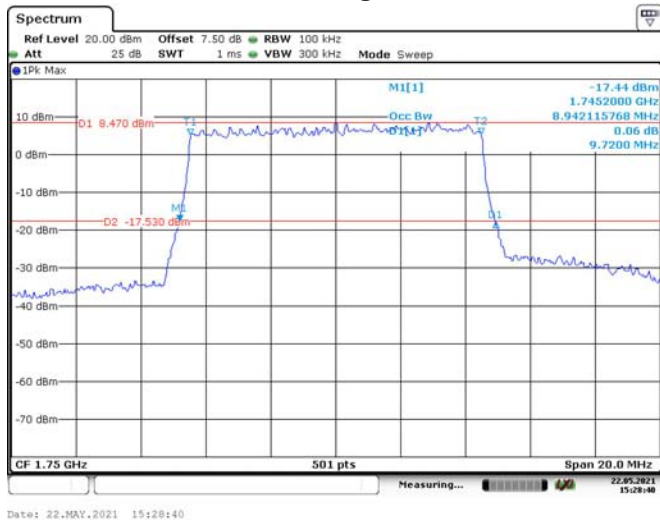


10M, 16QAM, High Channel

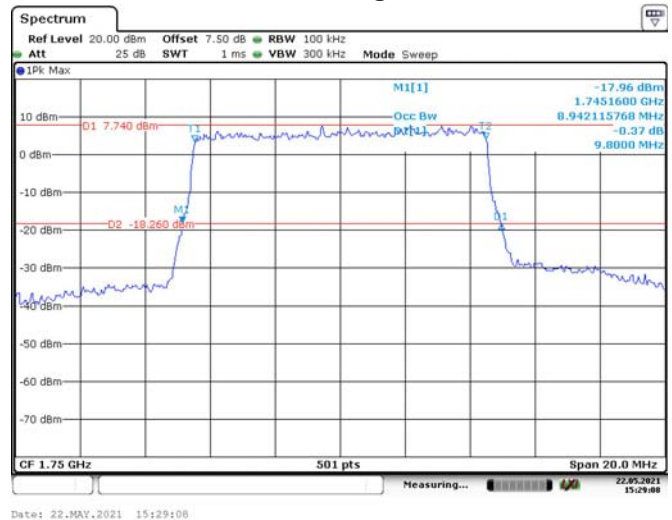


15M, QPSK, Low Channel

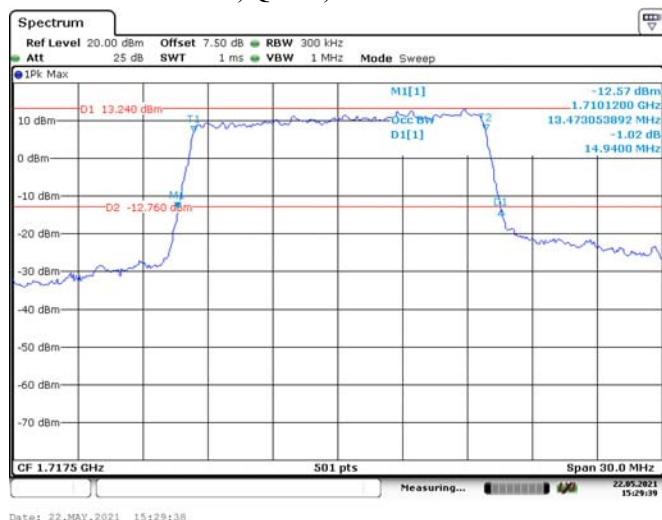


15M, 16QAM, Low Channel

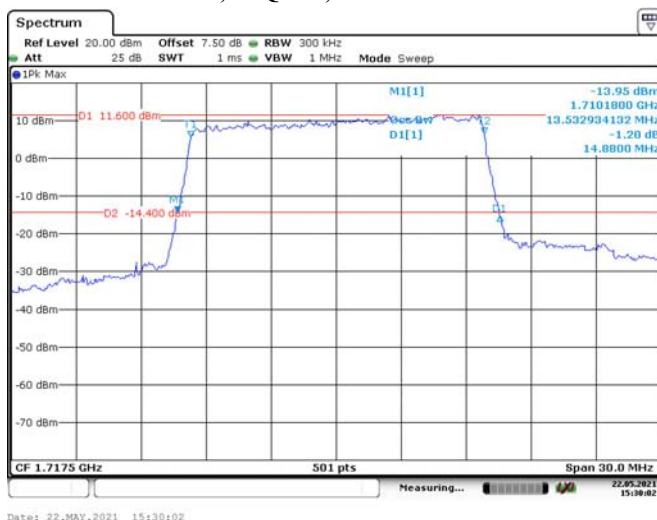


15M, QPSK, Middle Channel

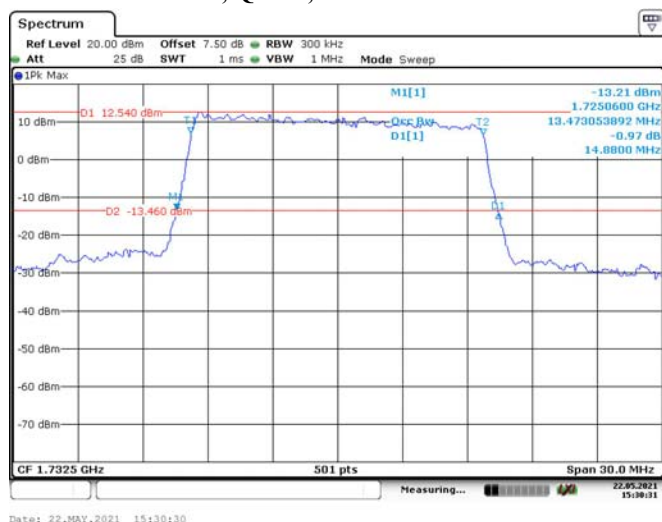


15M, 16QAM, Middle Channel

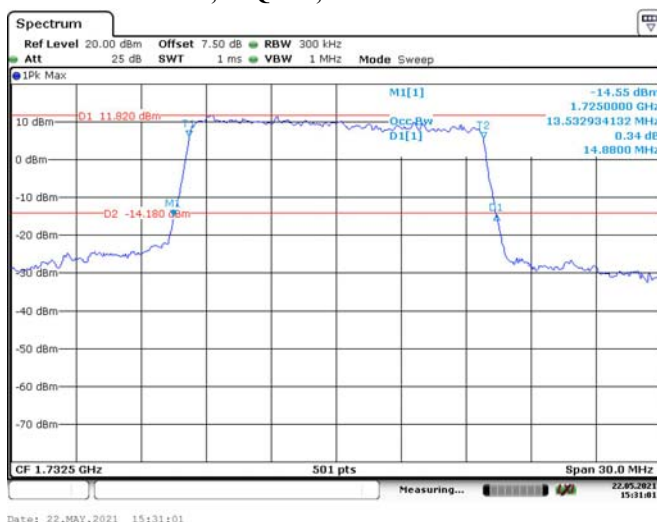


15M, QPSK, High Channel

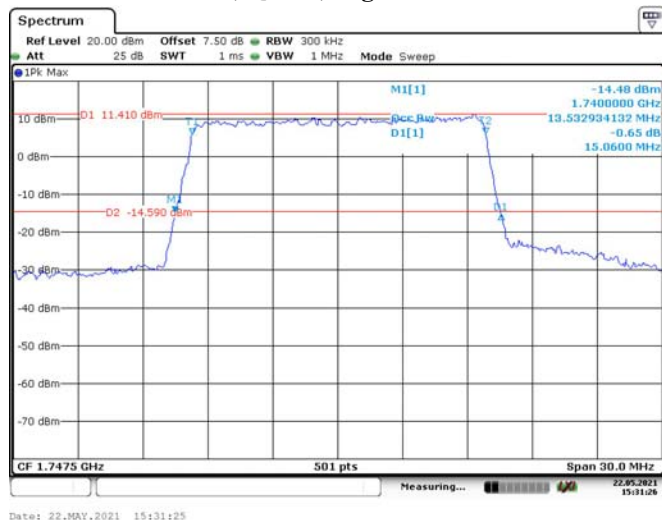


15M, 16QAM, High Channel

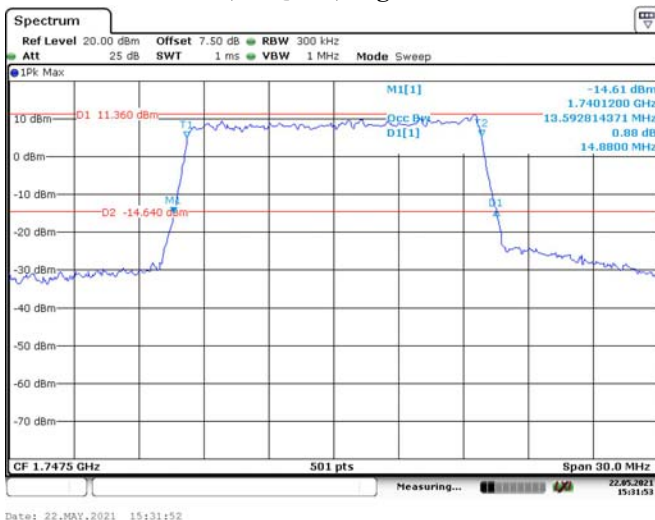


20M, QPSK, Low Channel

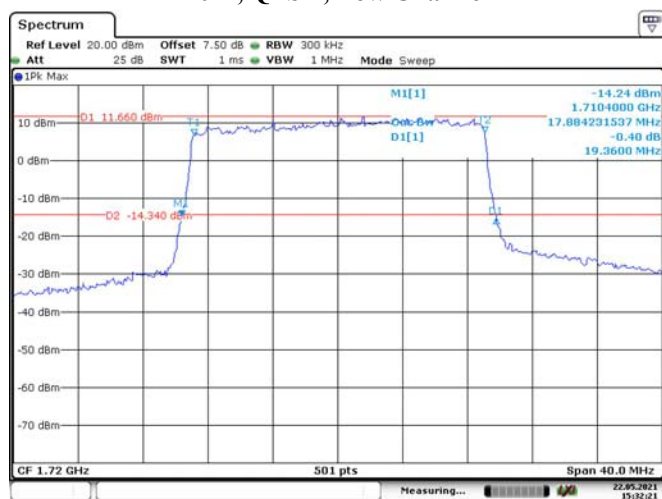


20M, 16QAM, Low Channel

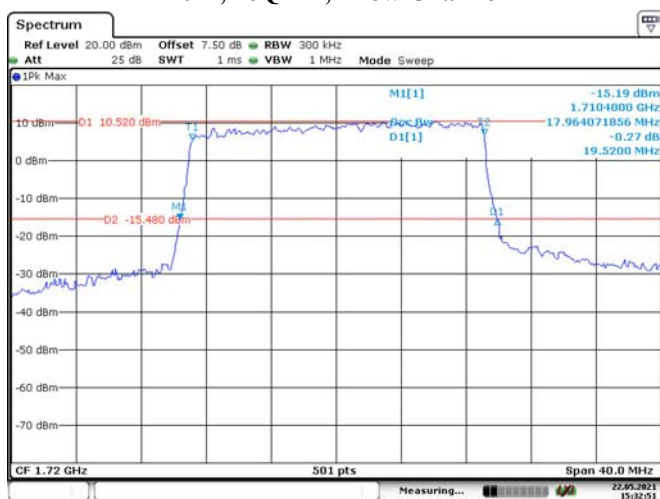

20M, QPSK, Middle Channel

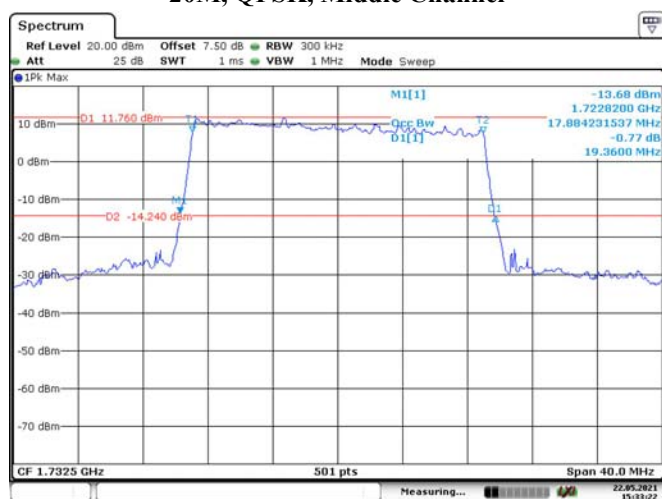


20M, 16QAM, Middle Channel






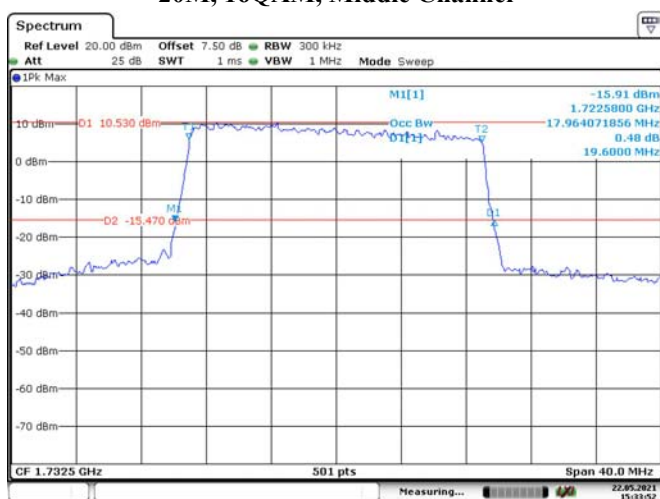


20M, QPSK, High Channel




20M, 16QAM, High Channel

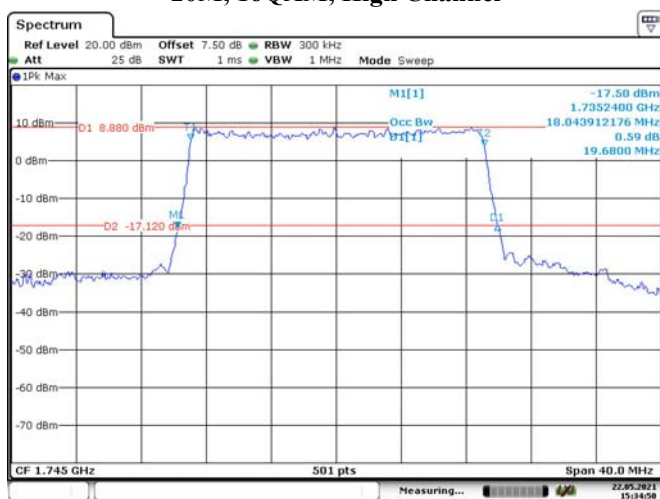

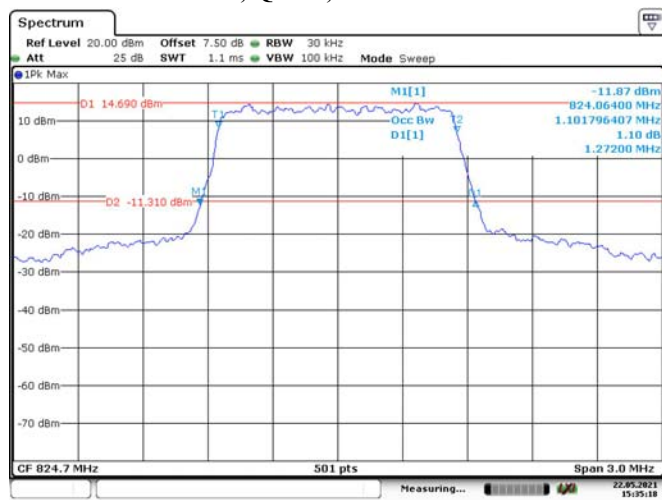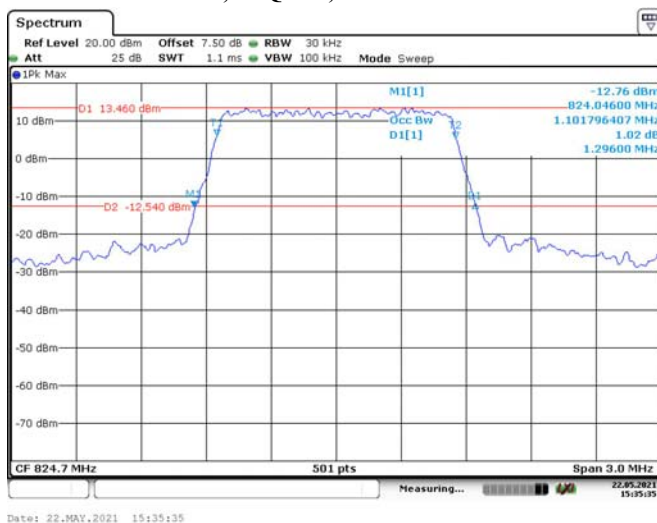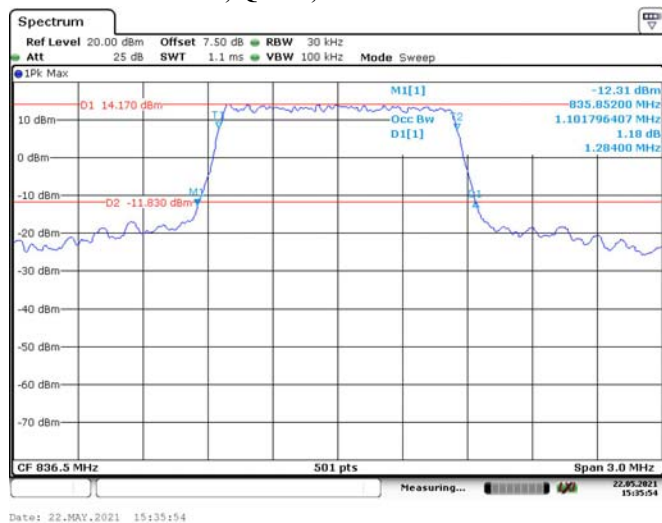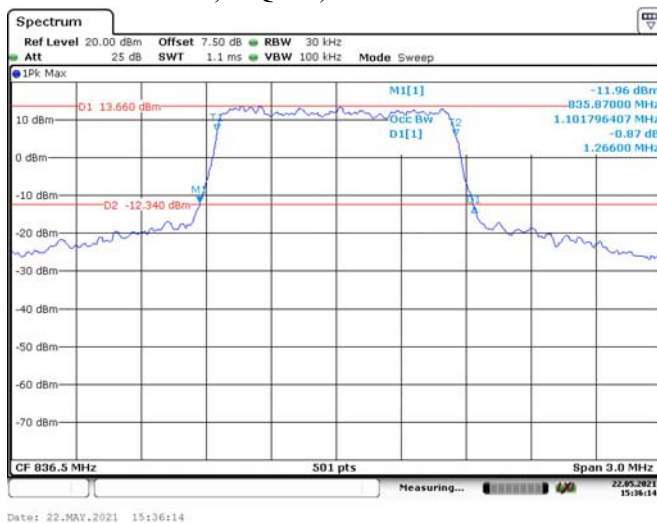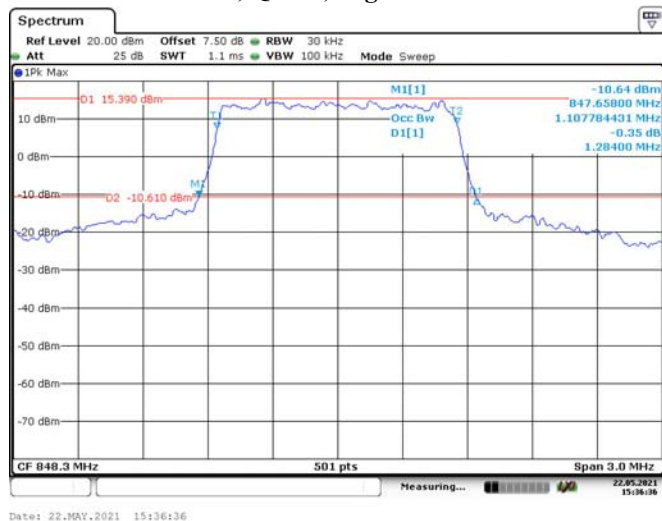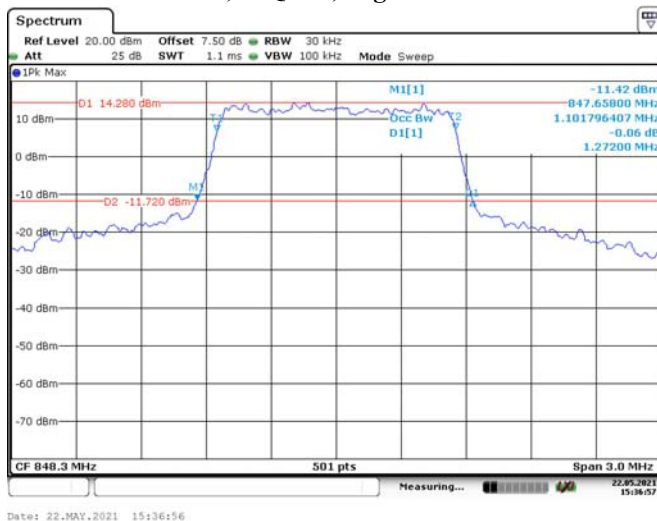
LTE Band 5:**1.4M, QPSK, Low Channel****1.4M, 16QAM, Low Channel****1.4M, QPSK, Middle Channel****1.4M, 16QAM, Middle Channel****1.4M, QPSK, High Channel****1.4M, 16QAM, High Channel**

3M, QPSK, Low Channel

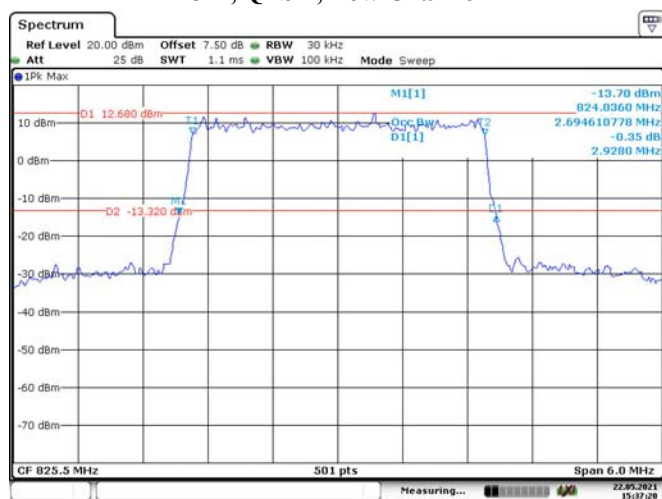


Date: 22.MAY.2021 15:37:20

3M, 16QAM, Low Channel

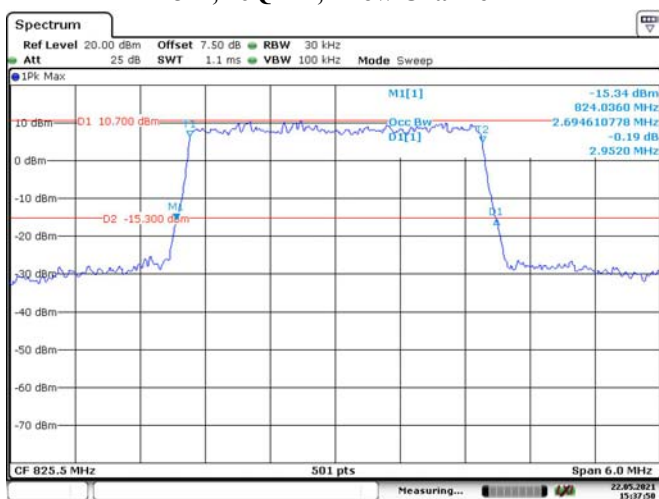


Date: 22.MAY.2021 15:37:50

3M, QPSK, Middle Channel

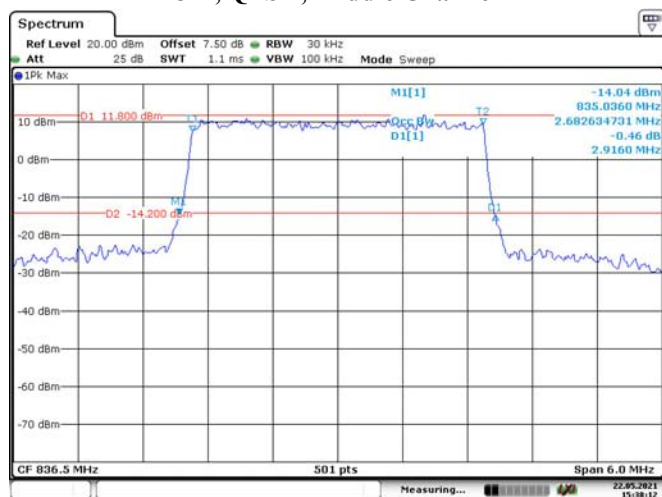


Date: 22.MAY.2021 15:38:12

3M, 16QAM, Middle Channel

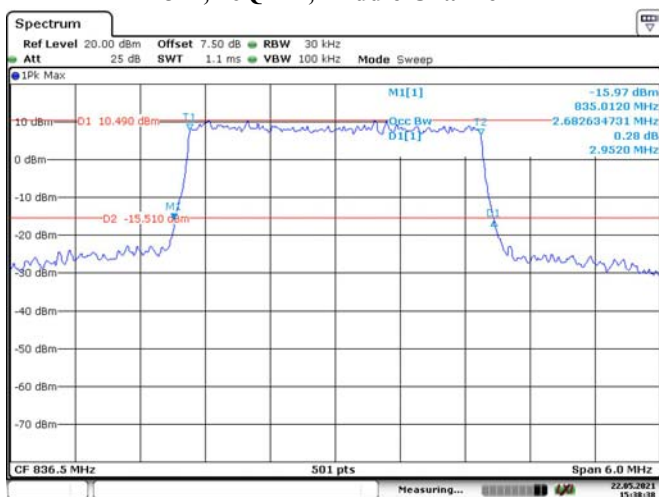


Date: 22.MAY.2021 15:38:36

3M, QPSK, High Channel

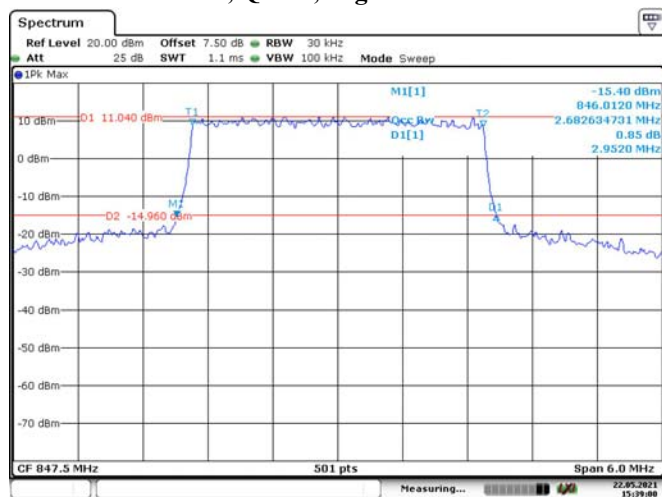


Date: 22.MAY.2021 15:39:00

3M, 16QAM, High Channel

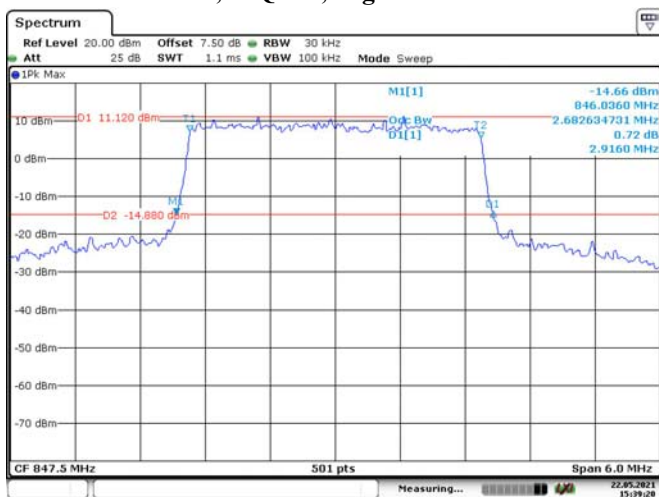


Date: 22.MAY.2021 15:39:28


5M, QPSK, Low Channel

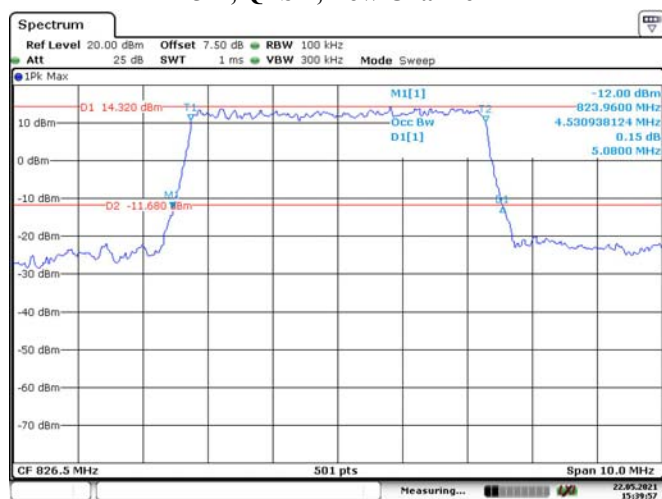


5M, 16QAM, Low Channel

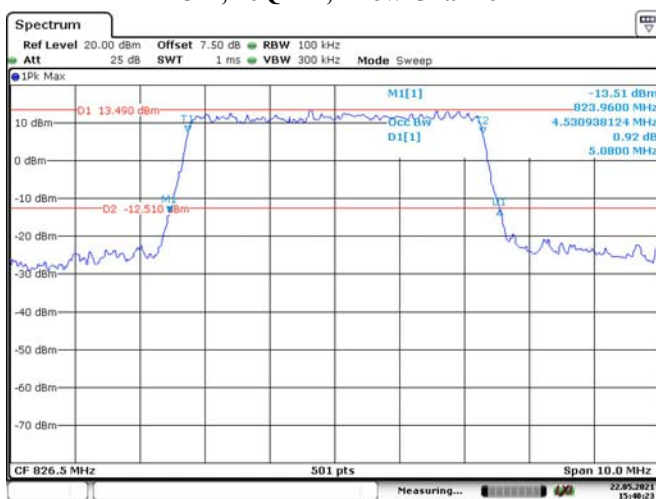


5M, QPSK, Middle Channel

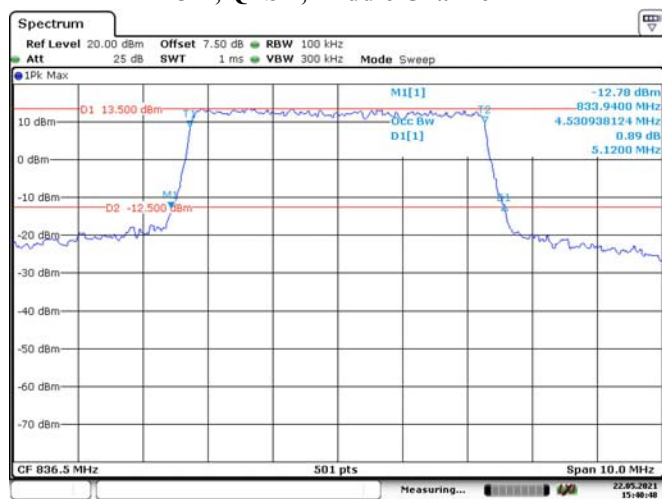


5M, 16QAM, Middle Channel

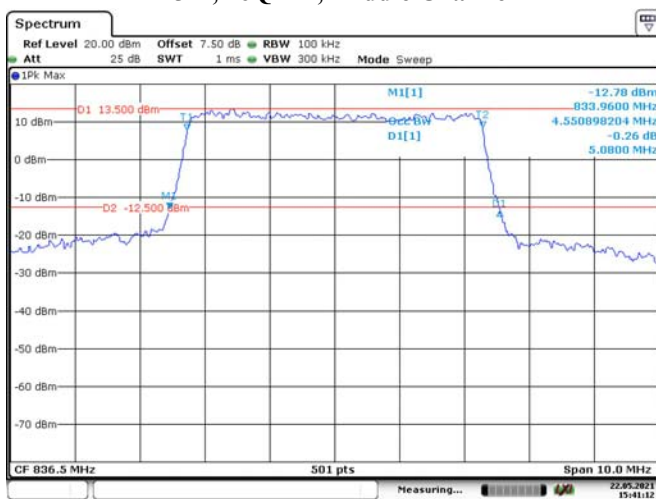


5M, QPSK, High Channel

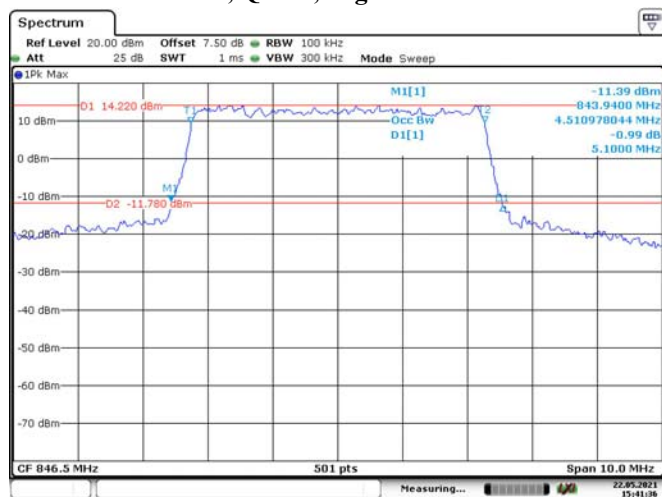

5M, 16QAM, High Channel

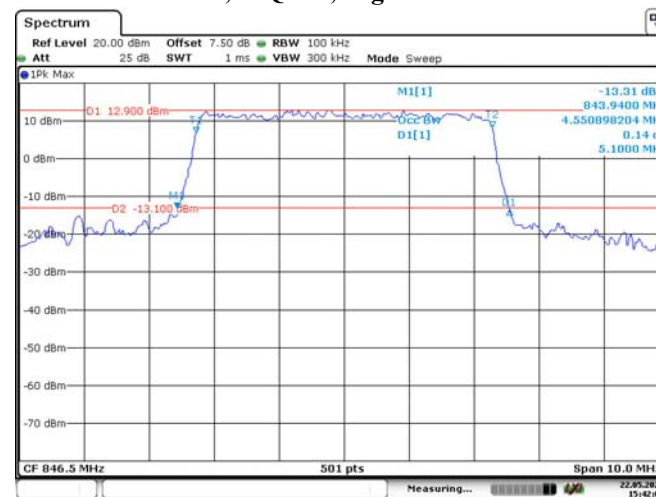


10M, QPSK, Low Channel

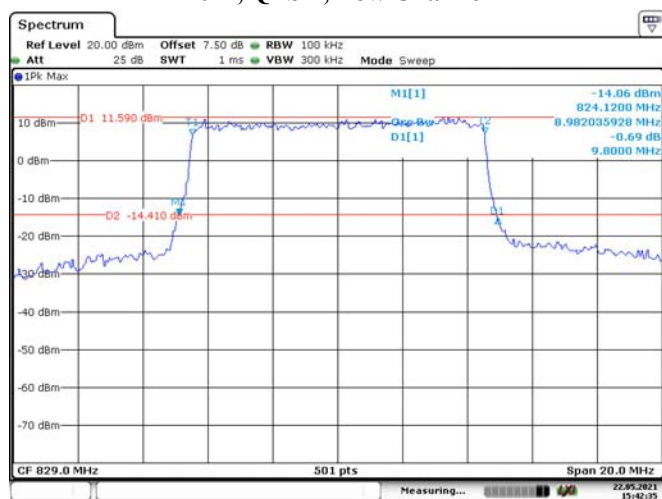


Date: 22.MAY.2021 15:42:35

10M, 16QAM, Low Channel

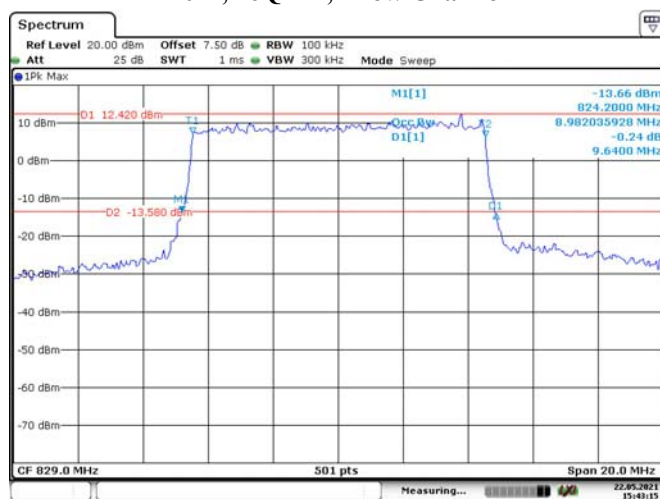


Date: 22.MAY.2021 15:43:15

10M, QPSK, Middle Channel

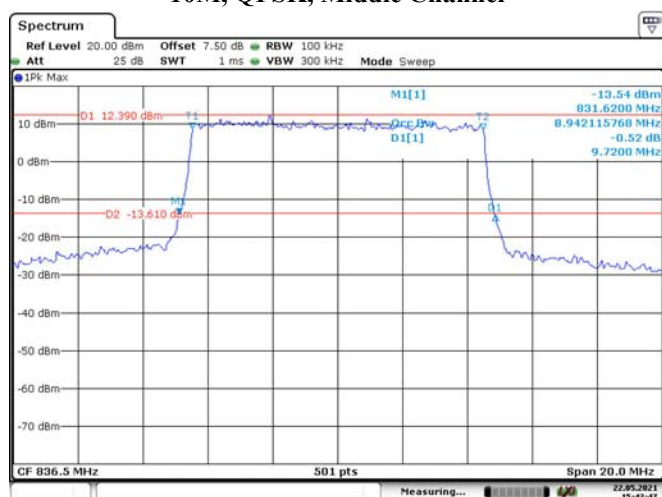


Date: 22.MAY.2021 15:43:47

10M, 16QAM, Middle Channel

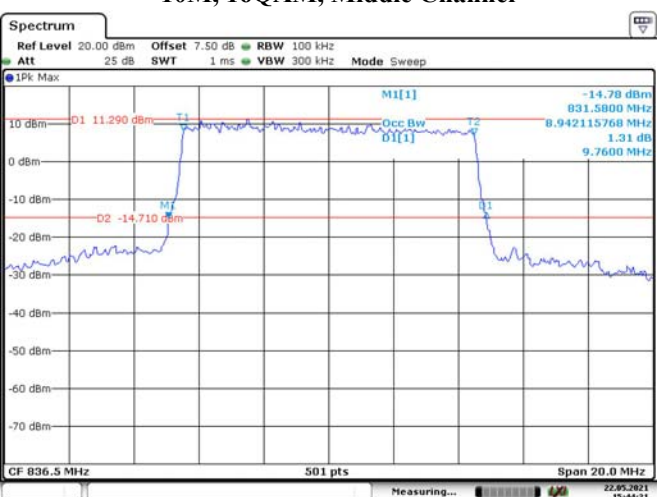

Date: 22.MAY.2021 15:44:21

10M, QPSK, High Channel

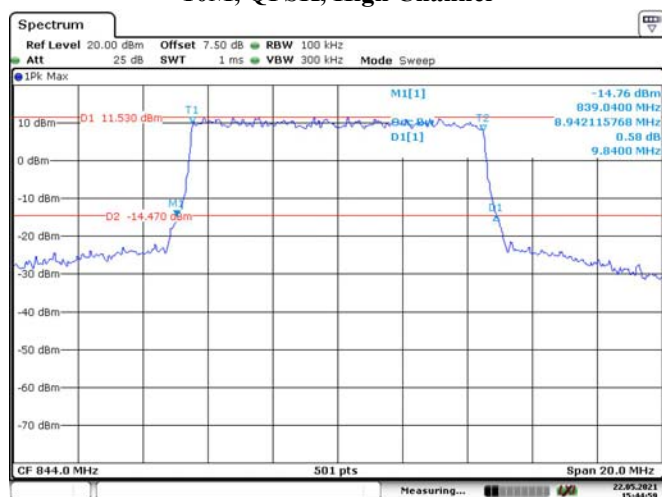


Date: 22.MAY.2021 15:44:59


10M, 16QAM, High Channel



Date: 22.MAY.2021 15:45:24

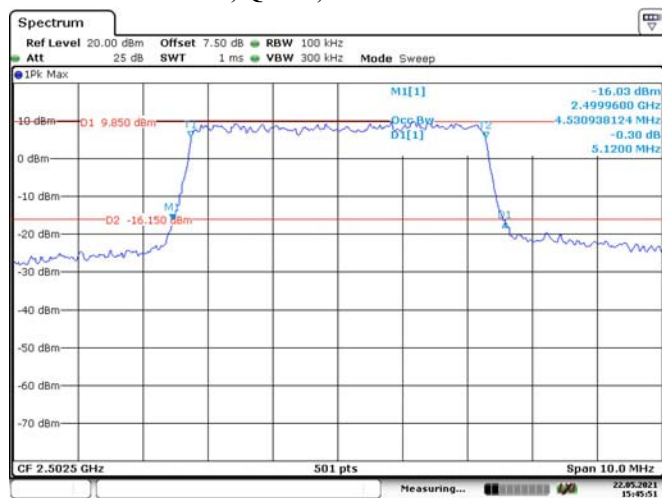LTE Band 7:**5M, QPSK, Low Channel**


Date: 22.MAY.2021 15:45:51

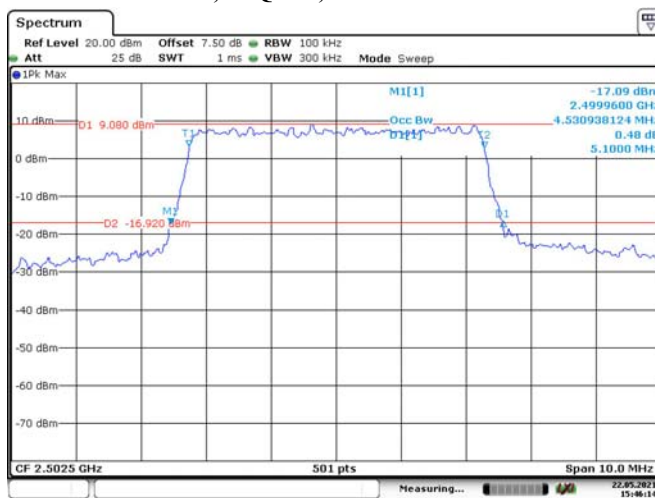5M, 16QAM, Low Channel


Date: 22.MAY.2021 15:46:14

5M, QPSK, Middle Channel


Date: 22.MAY.2021 15:46:42

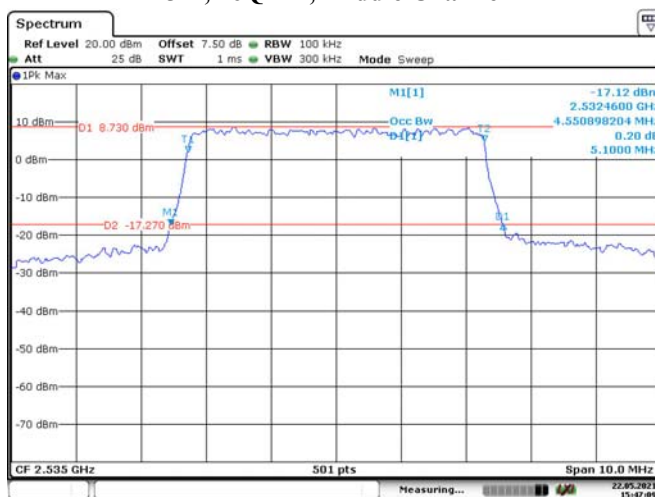5M, 16QAM, Middle Channel

Date: 22.MAY.2021 15:47:09

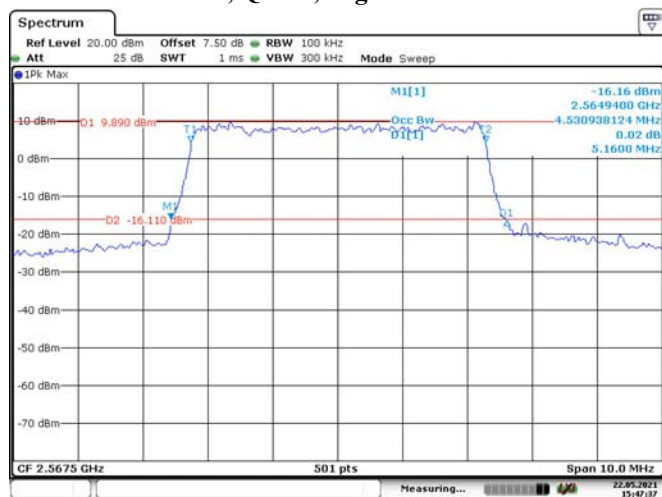
5M, QPSK, High Channel

Date: 22.MAY.2021 15:47:37

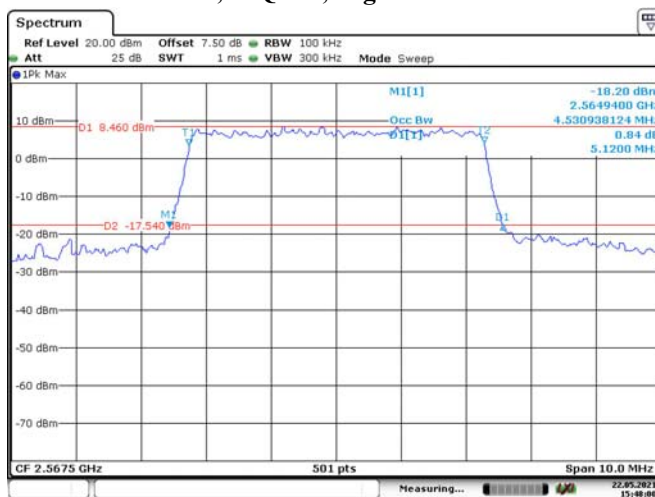
5M, 16QAM, High Channel

Date: 22.MAY.2021 15:48:01


10M, QPSK, Low Channel

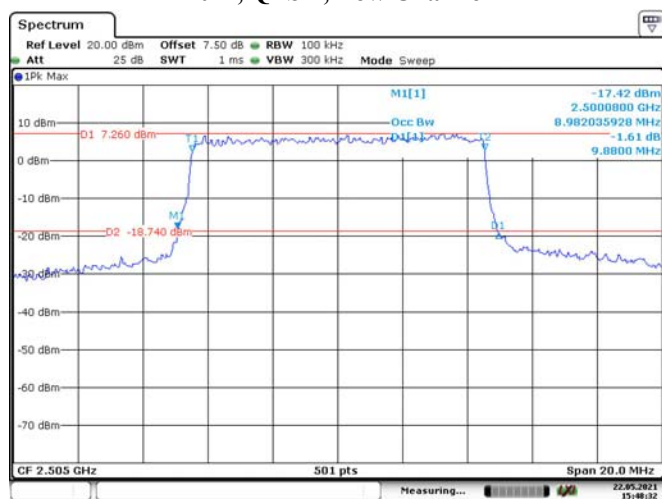


10M, 16QAM, Low Channel

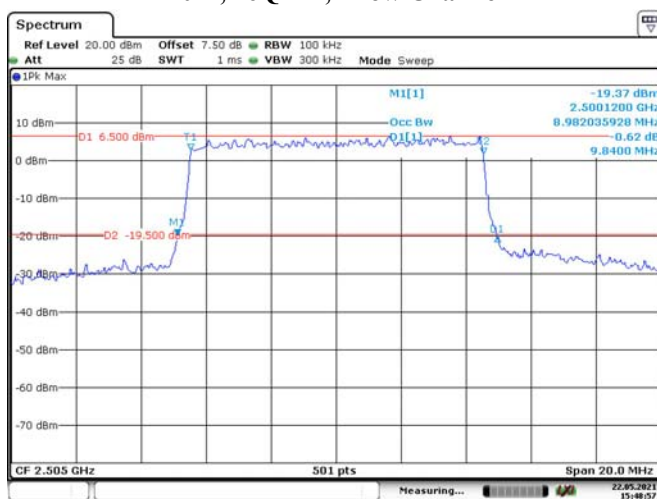


10M, QPSK, Middle Channel

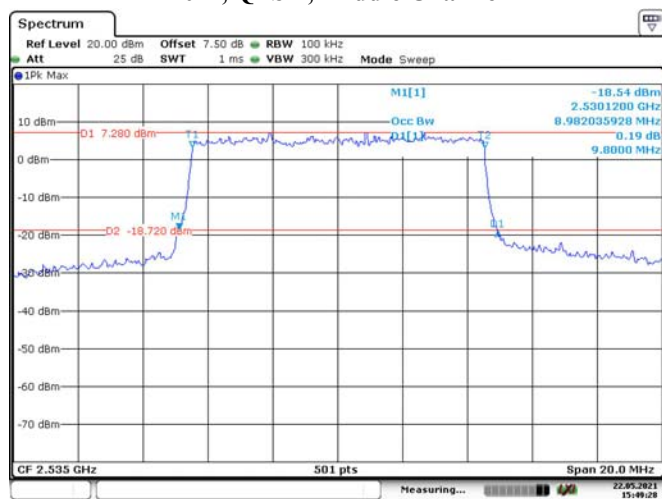

10M, 16QAM, Middle Channel

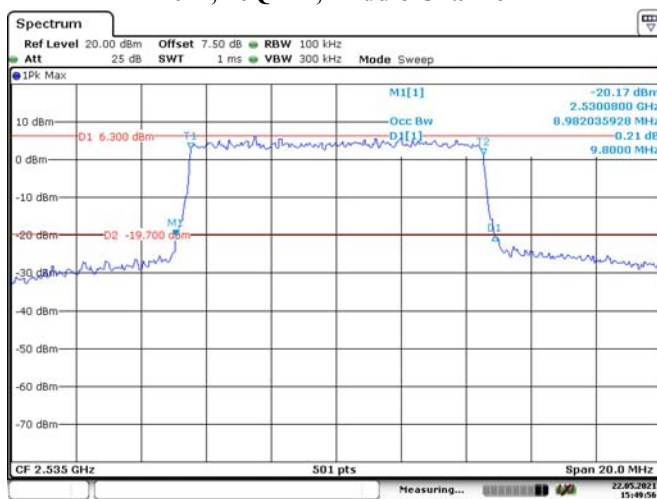

10M, QPSK, High Channel

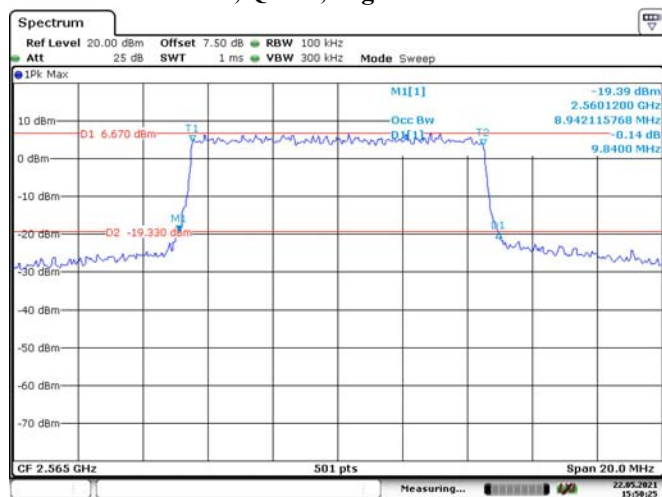

10M, 16QAM, High Channel

