

# 产品规格书/Product specification book



规格编号	20220902006
生效日期	2022/9/2

客户名称	东莞市佳家通塑胶模具有限公司 Dongguan Jiajiatong Plastic Mould Co. , Ltd.
产品类型	8346小模具双线圈
辉博雅料号	HBY20220902006-9T-L80
客户料号	20220902-8346

【新版发行, 版本修订】 【本规范含目录共 3 页】 【RoHS Compliant Parts】

编制	审核	批准
王海琼	/	朱辉

## 安福县辉博雅电子有限公司

工厂地址: 江西省. 安福县学府春天旁辉博雅电子有限公司

电话: 13576651594

本承认书在客户收到30天内, 请务必签章返回, 逾期视为生产时按此承认书的标准执行。

### 【客户核准】

日期:

承认状态: 完全承认 条件承认 拒绝承认

批准	审核	复检	检查

说明:


# 产品规格书/Product specification book

客户名称	东莞市佳家通塑胶模具有限公司 Dongguan Jiajiatong Plastic Mould Co., Ltd.	客户料号	8646小模具双雪狼谷
料号	HBY20220902006-9T-L80	规格编号	20220902006
发行/修订记录			
版本	生效日期	变更内容/原因	核准
01	2022/9/2	新规格发行	
编制	审核		批准
王海琼			朱 辉

# 产品规格书/Product specification book

客户名称	佳家通塑胶模具有限公司 Dongguan Jiajiatong Plastic Mould Co., Ltd.		8646小模具		
料号	HBV20220902006-9T-L80	规格编号	20220902006	版本	01

## ◆、外形尺寸

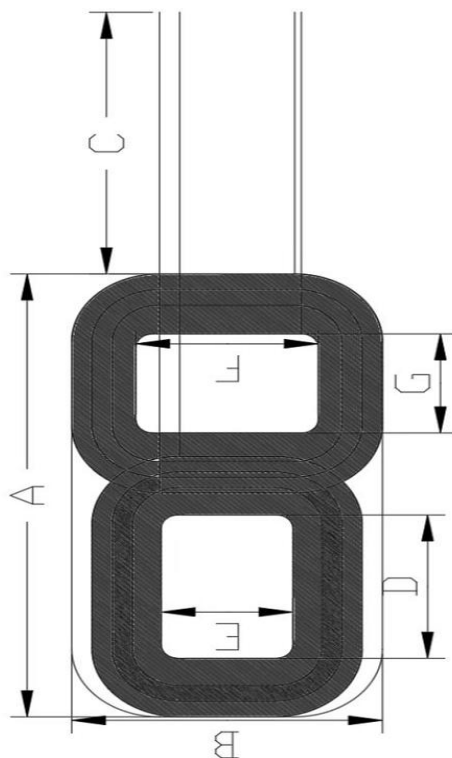

(单位: mm)

A	46.0 ±1
B	83.0 ±1
C	80.0 ±1
D	27 ±0.5
E	19.5 ±0.5
F	19.0 ±0.5
G	19.0 ±0.5

### 备注

- (1)线径: 0.08\*105P丝包线  
(1) Wire diameter: 0.08\*105P silk covered wire
- (2)绕线圈数:9TS  
(2) Winding number :9TS
- (3)起尾线是否交叉: W1是;W2不是  
(3) Whether the start and tail lines cross: W1 Yes; W2 is not
- (4)磁片底部贴双面胶  
(4) Double-sided tape is affixed at the bottom of the magnetic sheet
- (5) 线圈居磁片中间位置贴  
(5) the coil is located in the middle of the magnetic sheet

## ◆、电气特性/electrical specification

参数/parameter	规格/specification	测试条件/test condition	测试仪器/test instrument
L(W1)	6.8 ±10%    μH	100KHz/1V	■TH1816B
L(W2)	6.8 ±10%    μH	100KHz/1V	■TH1817B
DCR(W1)	41.8 Max    mΩ	@ 25℃	■CH-502BC
DCR(W2)	44 Max    mΩ	@ 25℃	■CH-502BC

## ◆、温度等级/temperature grade

操作温度 operating temperature	-40℃~ 125℃
-------------------------------	------------

## ◆、材料清单/bill of materials:

序号 serial number	品名 the name or descript	材料规格 material specification	供应商 supplier	备注 remark
---------------------	----------------------------	--------------------------------	-----------------	--------------

1	磁片 /magnetic sheet	8346*0.8		PC40猛锌隔磁片 PC40 zinc barrier magnetic sheet
2	铜线 copper wire	0.08*105P		标配丙铜丝包线 Standard with copper silk covered wire
3	高温胶带 high- temperatur e tape	8MM		环保胶纸 Environmental adhesive paper
4	锡/tin	107H		环保胶带 Environmental adhesive tape
5	胶/glue	双面胶 double faced adhesive tape		千岛环保锡 Thousand Island environmental protection tin
编制		审核		批准
王海琼				朱辉