


Appendix A: DTS Bandwidth


Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.664	2401.652	2402.316	0.5	PASS
		2440	0.656	2439.660	2440.316	0.5	PASS
		2480	0.652	2479.660	2480.312	0.5	PASS
BLE_2M	Ant1	2404	1.100	2403.432	2404.532	0.5	PASS
		2440	1.132	2439.428	2440.560	0.5	PASS
		2478	1.116	2477.428	2478.544	0.5	PASS

Test Graphs

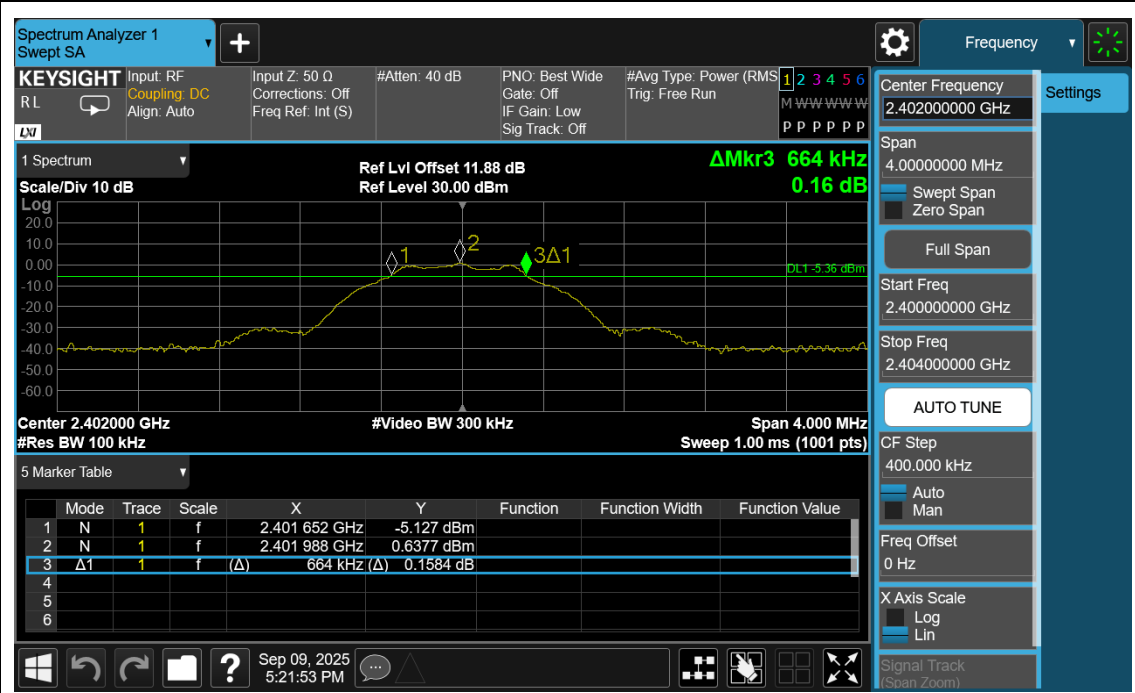

BLE_1M_Ant1_2402

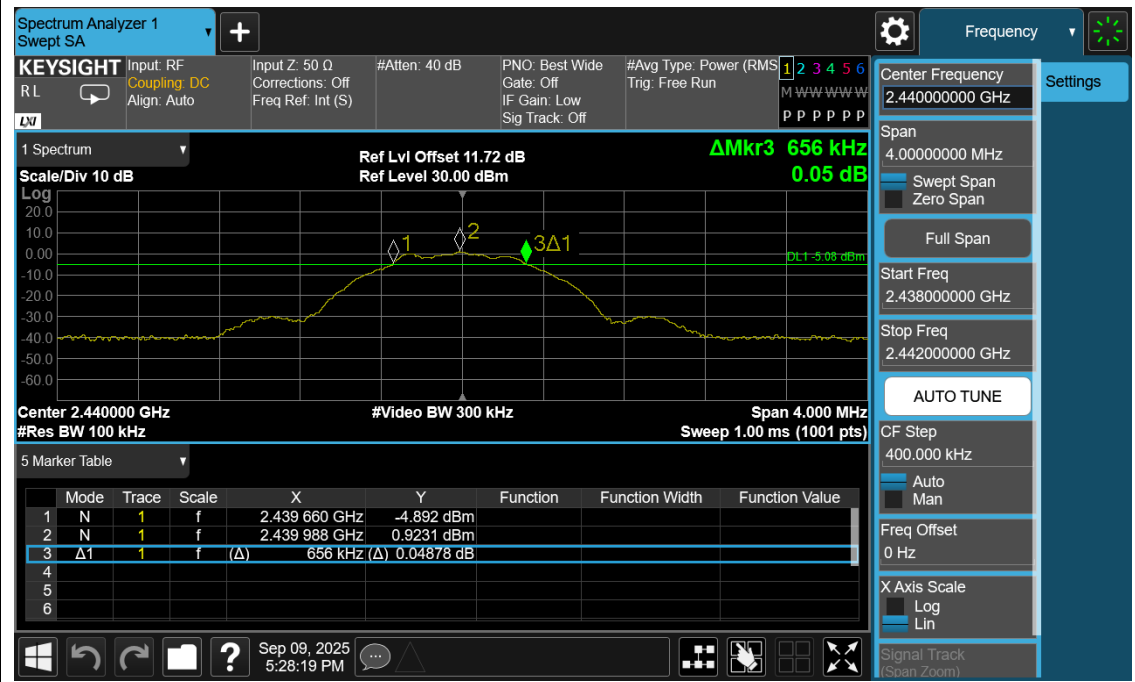

BLE_1M_Ant1_2440



BLE_1M_Ant1_2480



BLE_2M_Ant1_2404



BLE_2M_Ant1_2440




BLE_2M_Ant1_2478

Appendix B: Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0332	2401.4786	2402.5118	---	---
		2440	1.0423	2439.4720	2440.5143	---	---
		2480	1.0376	2479.4746	2480.5122	---	---
BLE_2M	Ant1	2404	2.0743	2402.9722	2405.0465	---	---
		2440	2.0780	2438.9690	2441.0470	---	---
		2478	2.0710	2476.9733	2479.0443	---	---


Test Graphs

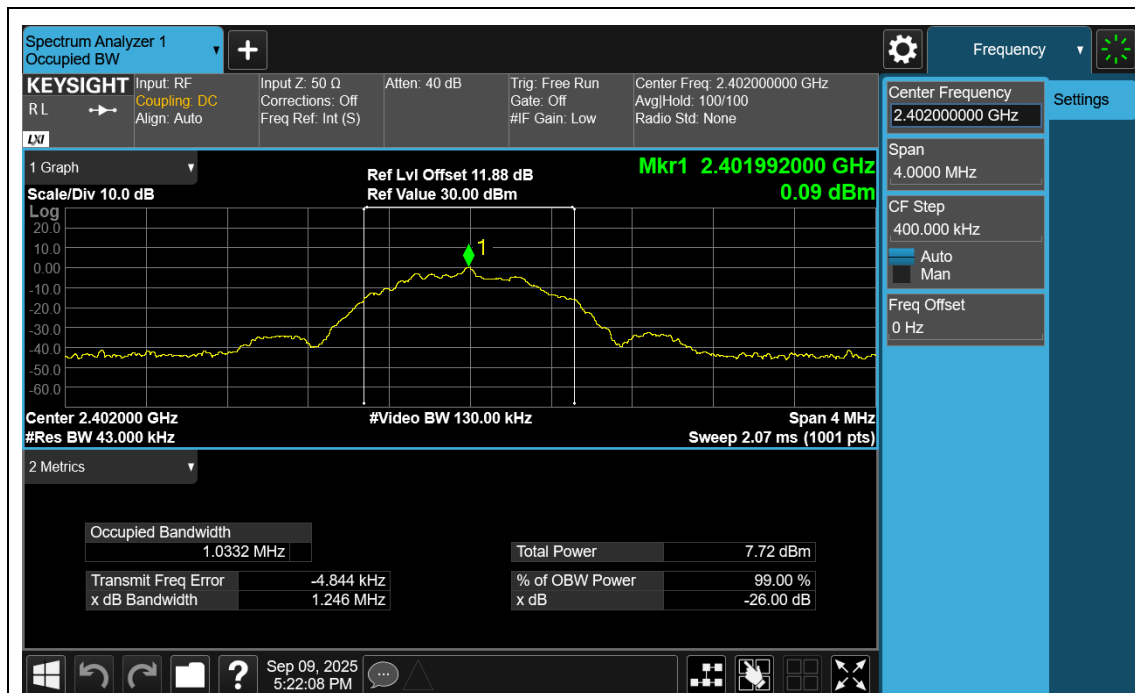


BLE_1M_Ant1_2402

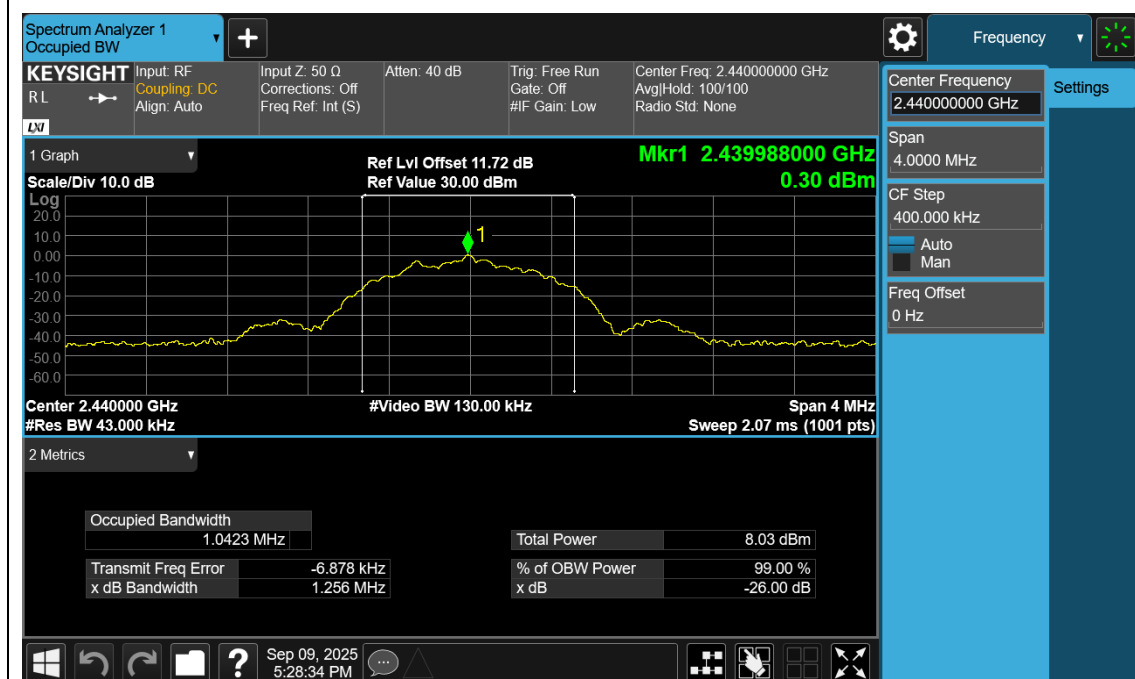


BLE_1M_Ant1_2440

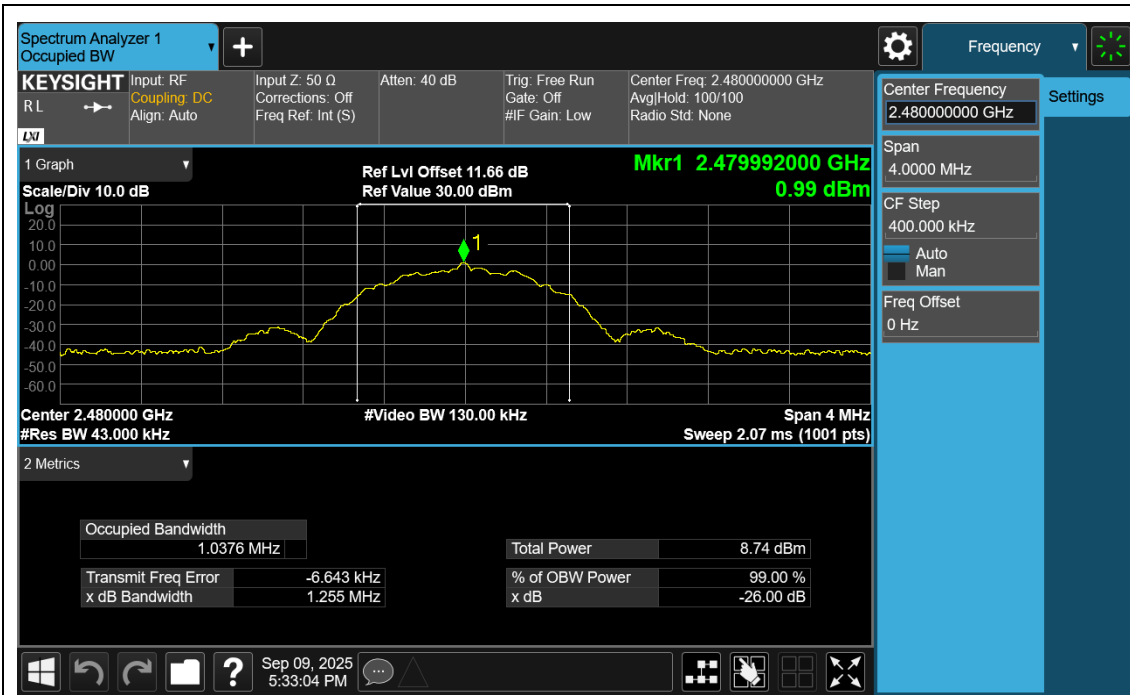

BLE_1M_Ant1_2480

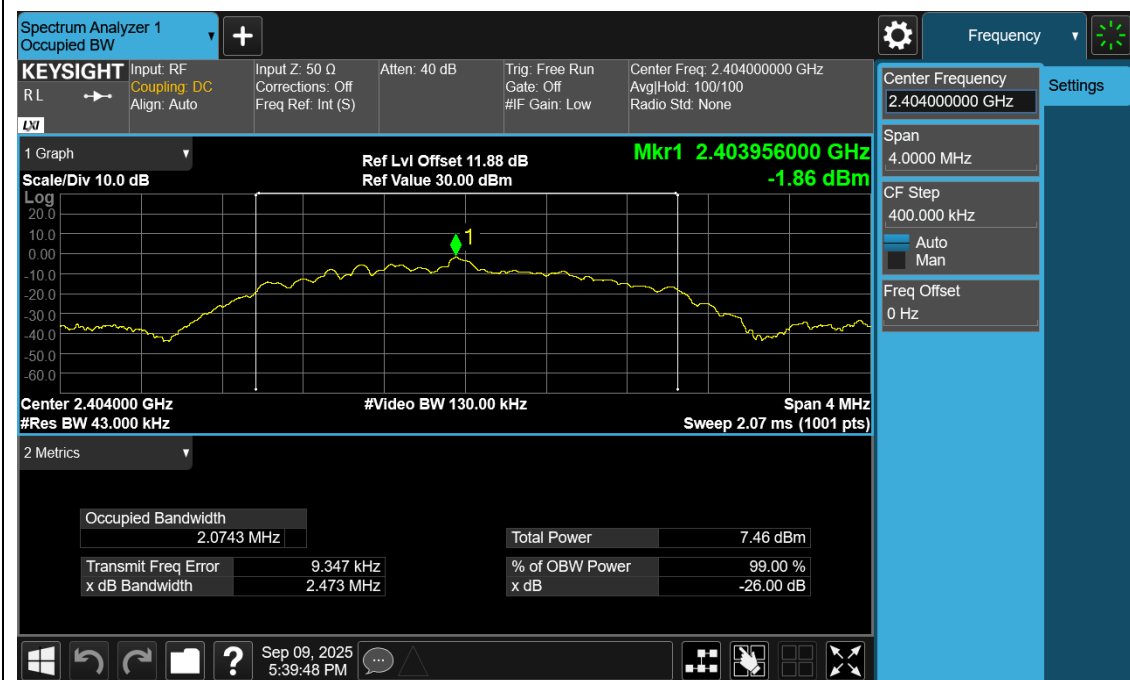

BLE_2M_Ant1_2404

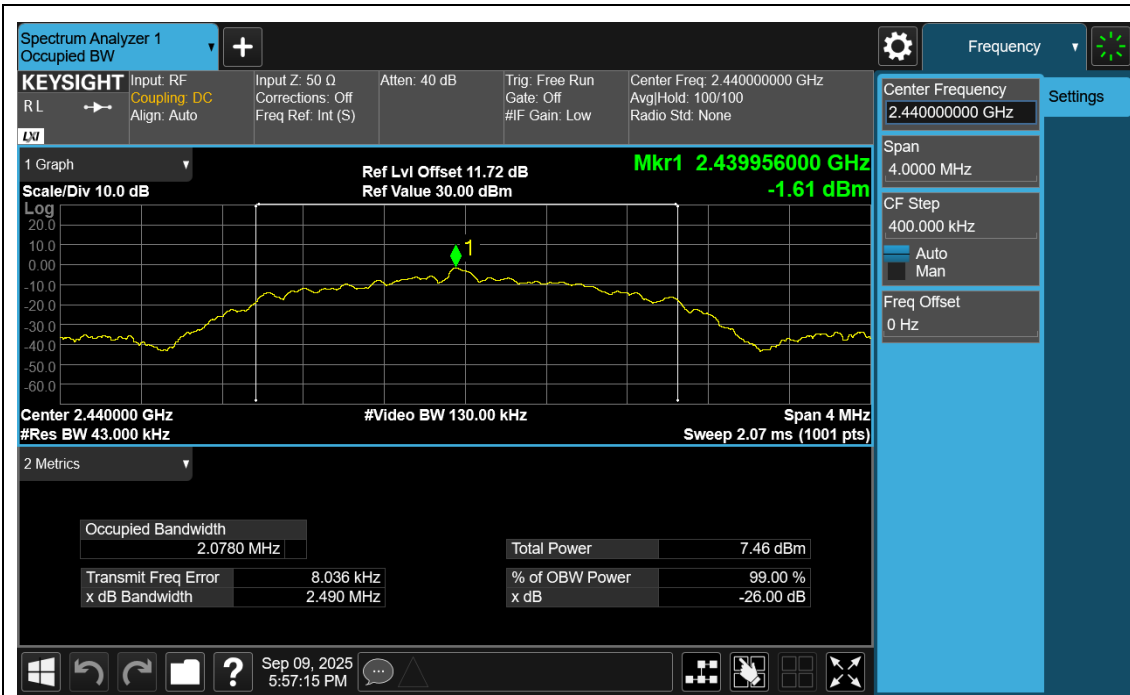

BLE_2M_Ant1_2440




BLE_2M_Ant1_2478

Appendix C: Maximum conducted output power


Test Result Peak

TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	1.09	≤30	3.36	≤36	PASS
		2440	1.35	≤30	3.62	≤36	PASS
		2480	2.00	≤30	4.27	≤36	PASS
BLE_2M	Ant1	2404	1.13	≤30	3.40	≤36	PASS
		2440	1.48	≤30	3.75	≤36	PASS
		2478	2.11	≤30	4.38	≤36	PASS


Test Graphs Peak

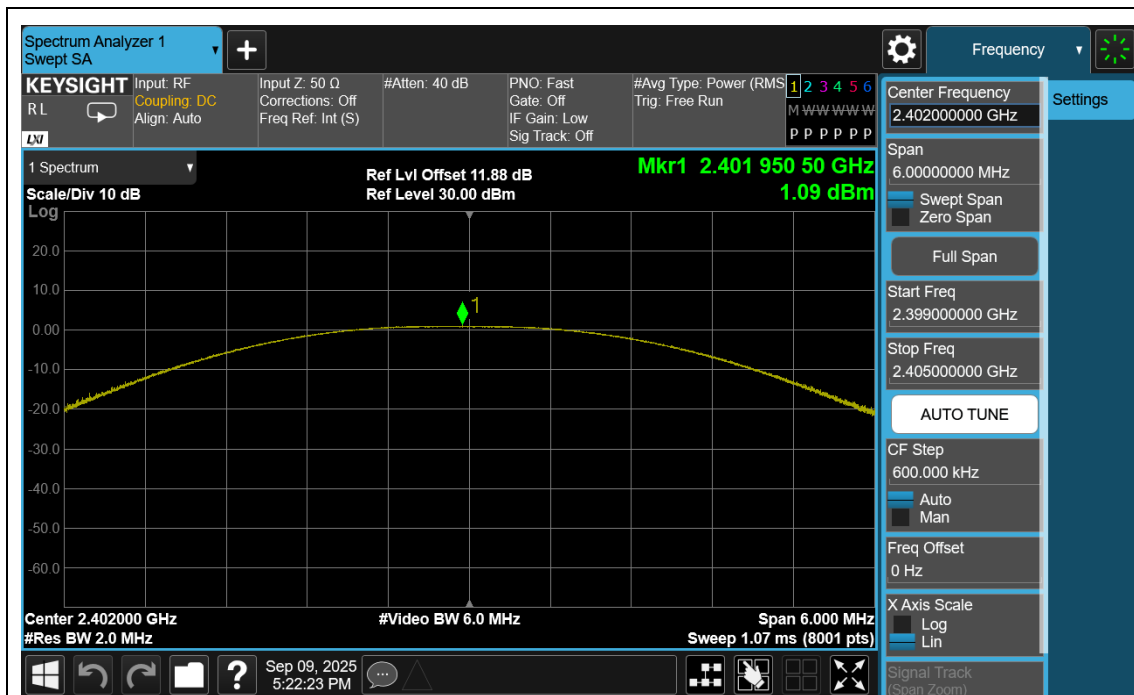


BLE_1M_Ant1_2402

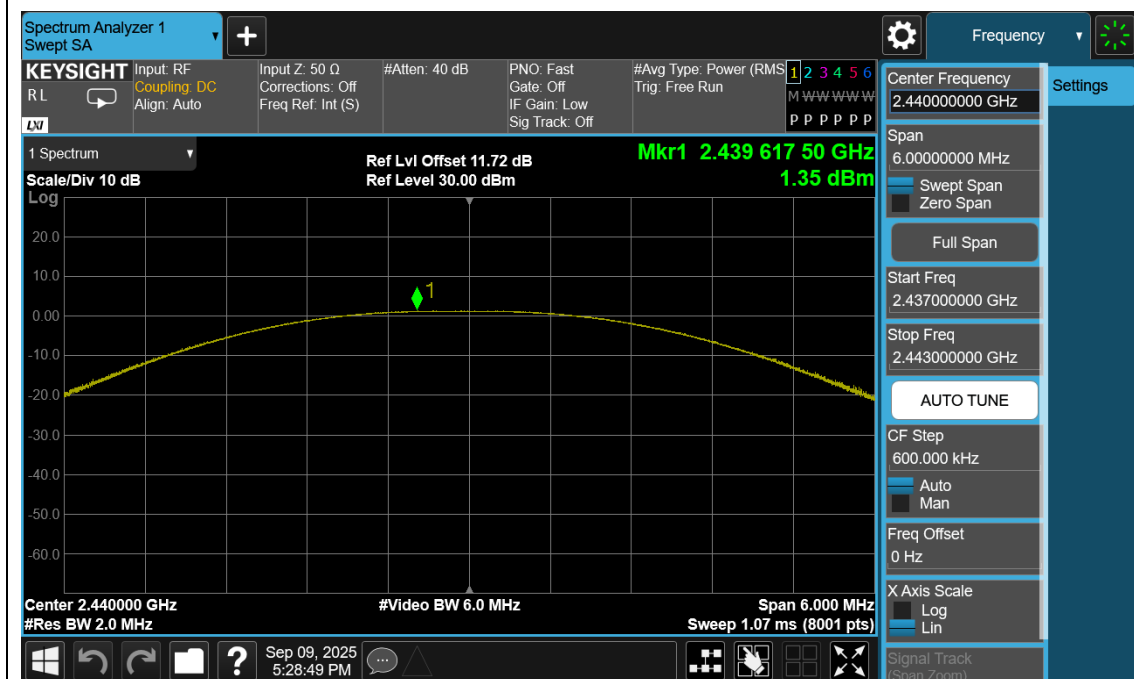


BLE_1M_Ant1_2440

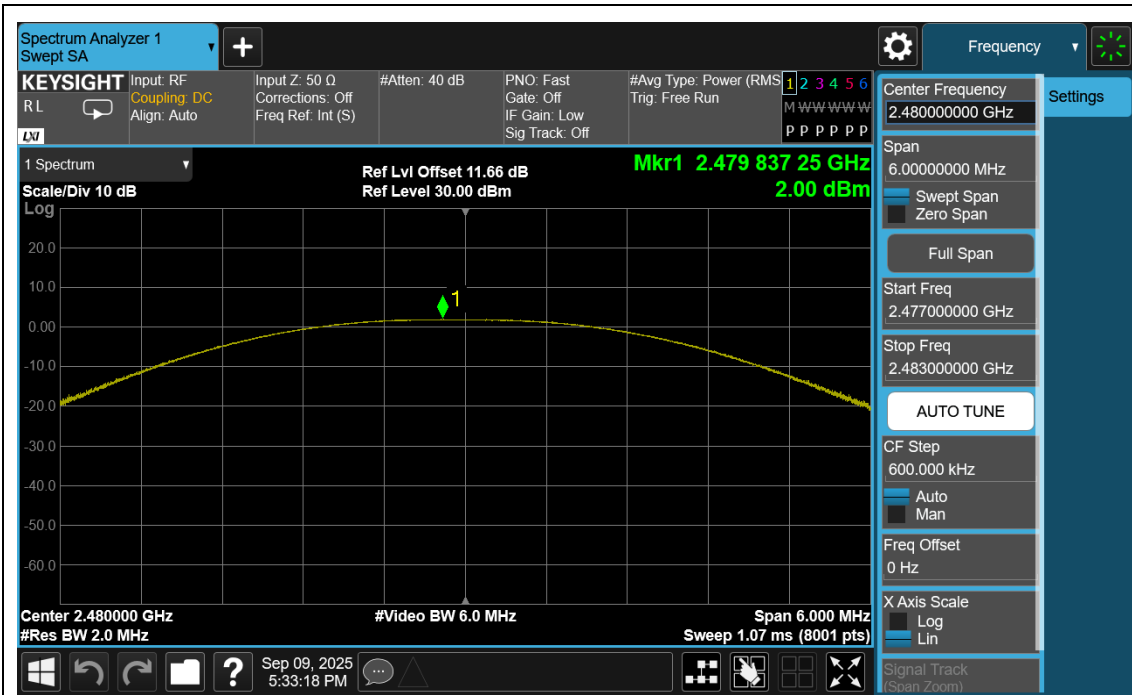


BLE_1M_Ant1_2480

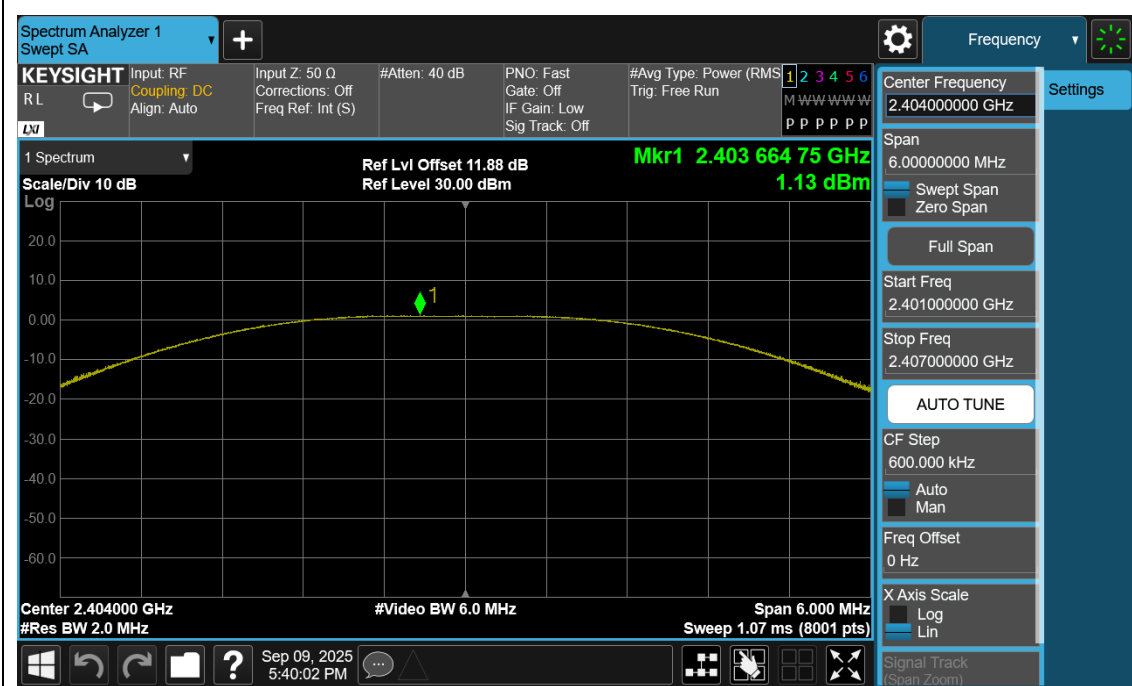

BLE_2M_Ant1_2404

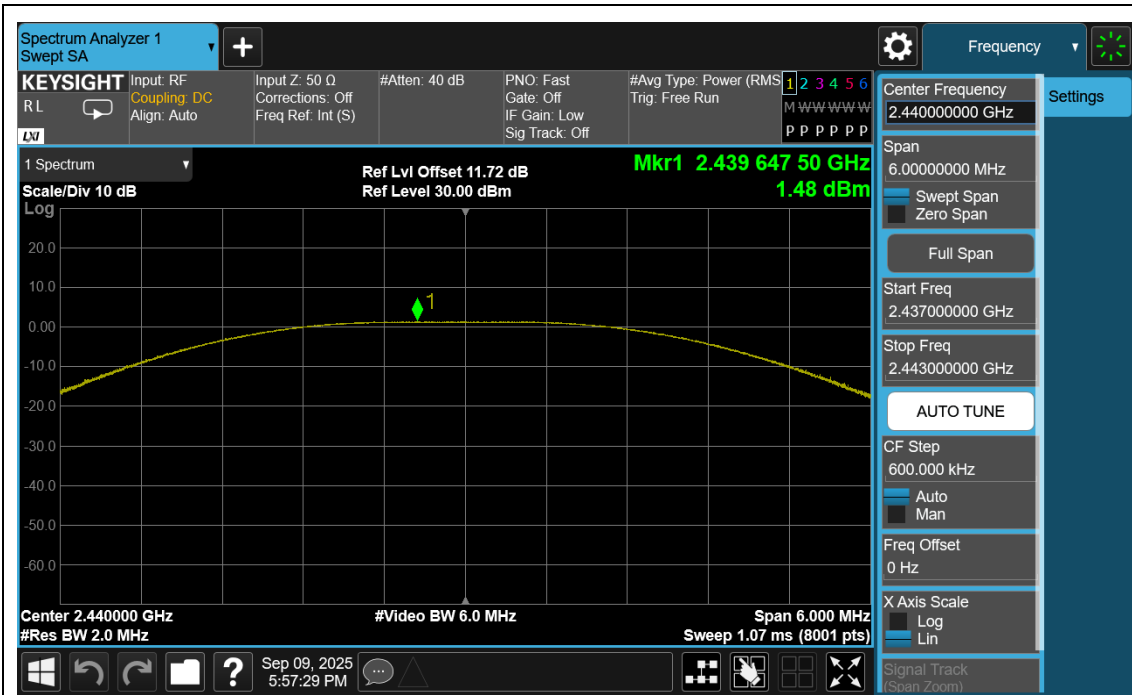

BLE_2M_Ant1_2440

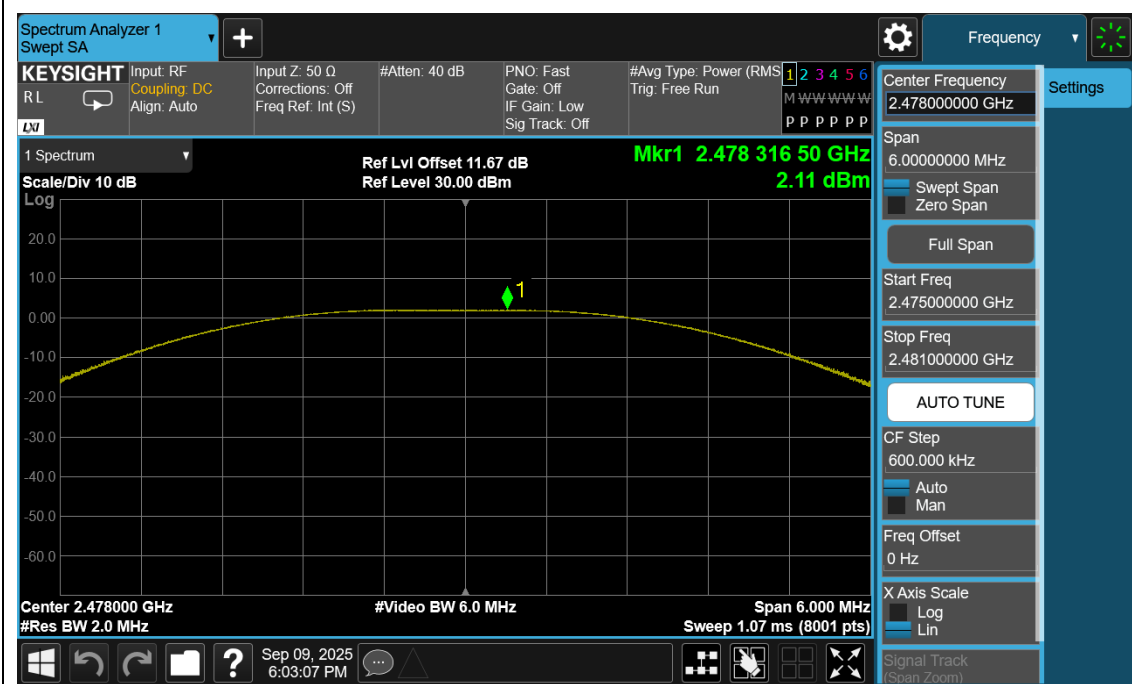

BLE_2M_Ant1_2478

Appendix D: Maximum power spectral density


Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-14.71	≤8.00	PASS
		2440	-14.25	≤8.00	PASS
		2480	-12.36	≤8.00	PASS
BLE_2M	Ant1	2404	-15.75	≤8.00	PASS
		2440	-16.03	≤8.00	PASS
		2478	-16.11	≤8.00	PASS


Test Graphs




BLE_1M_Ant1_2402

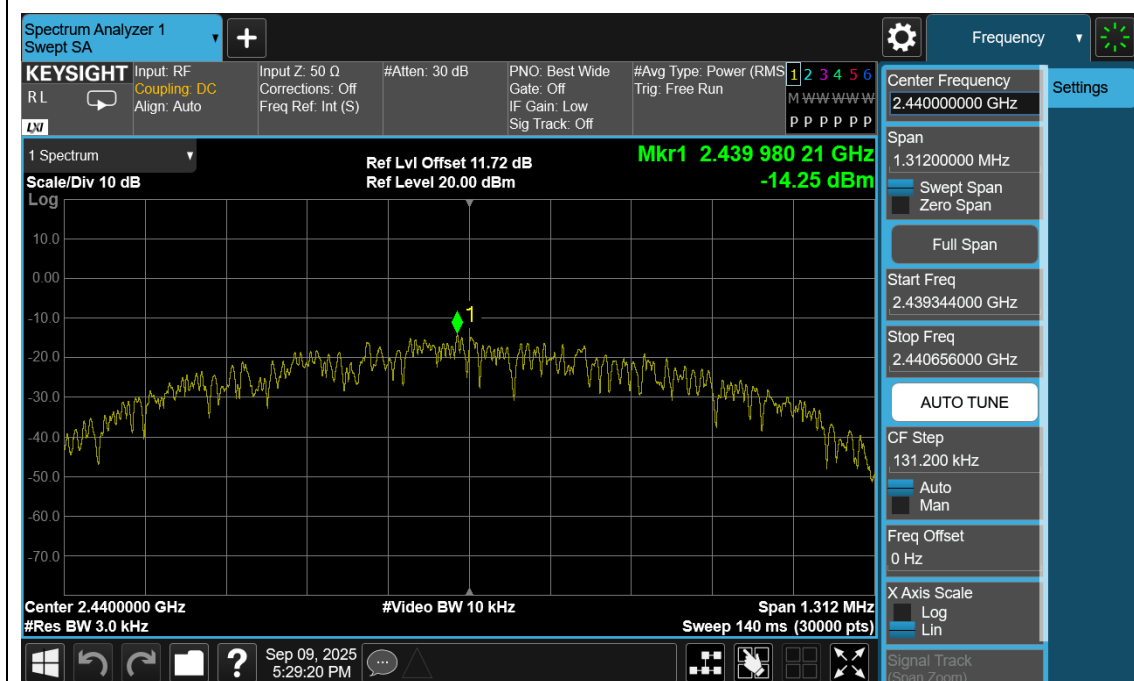


BLE_1M_Ant1_2440

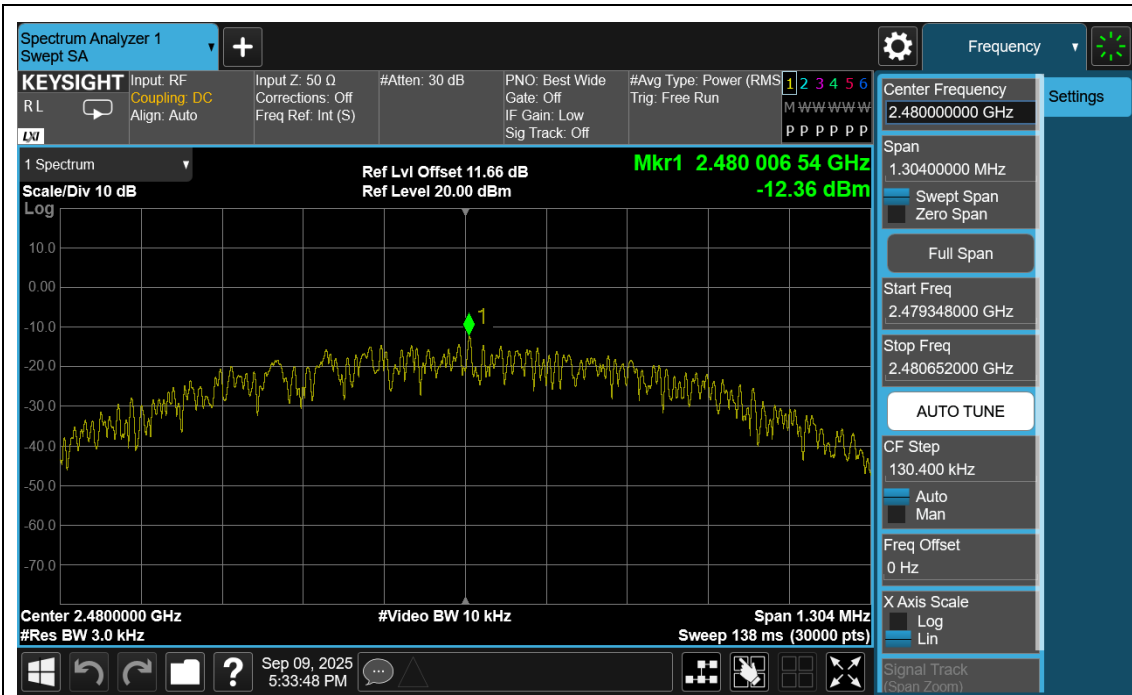


BLE_1M_Ant1_2480

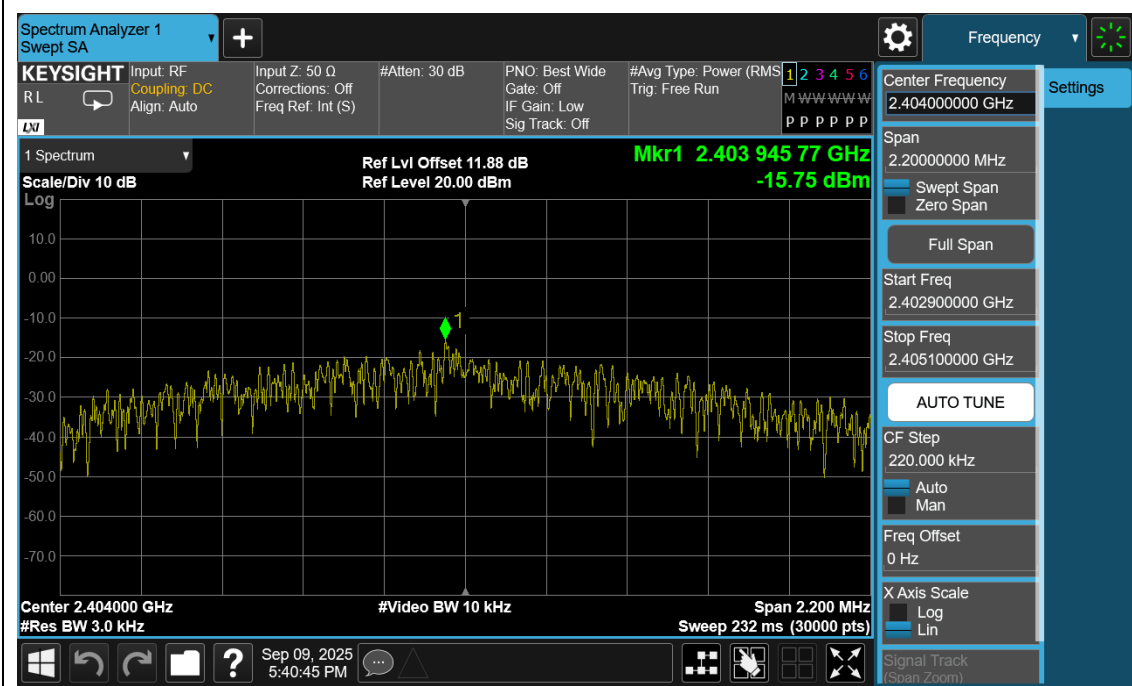

BLE_2M_Ant1_2404

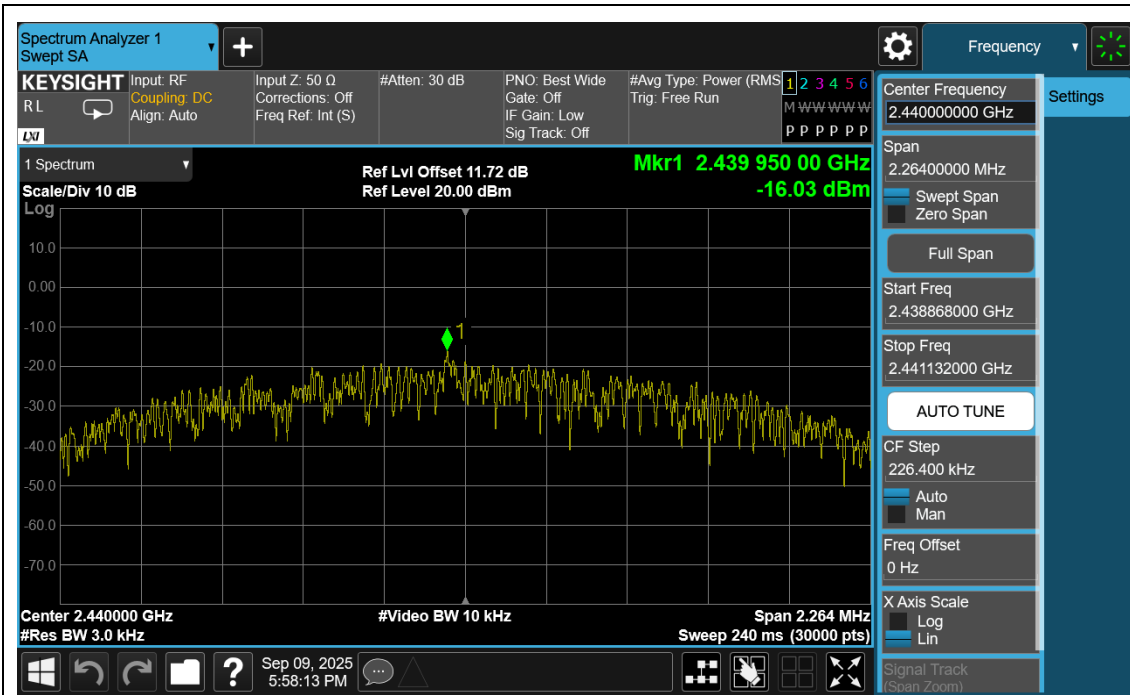

BLE_2M_Ant1_2440

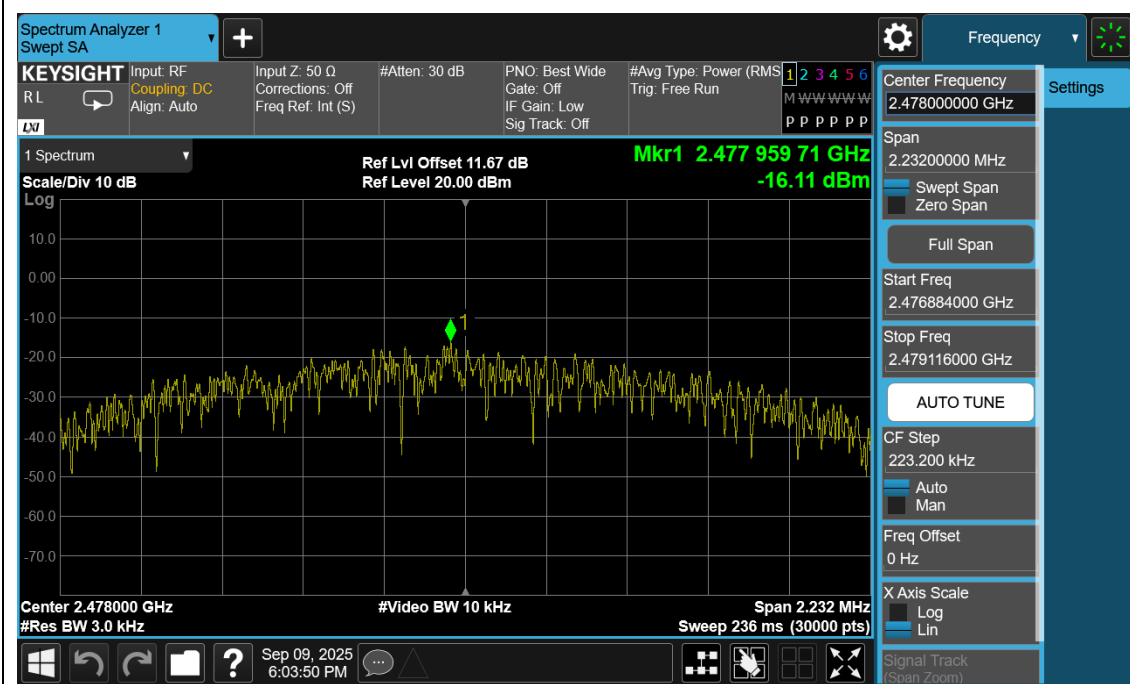


BLE_2M_Ant1_2478


Appendix E: Band edge measurements

Test Result


TestMode	Antenna	Channel	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	0.70	-46.77	≤-19.3	PASS
		High	2480	1.66	-45.85	≤-18.34	PASS
BLE_2M	Ant1	Low	2404	0.73	-46.01	≤-19.27	PASS
		High	2478	1.73	-45.36	≤-18.27	PASS

Test Graphs

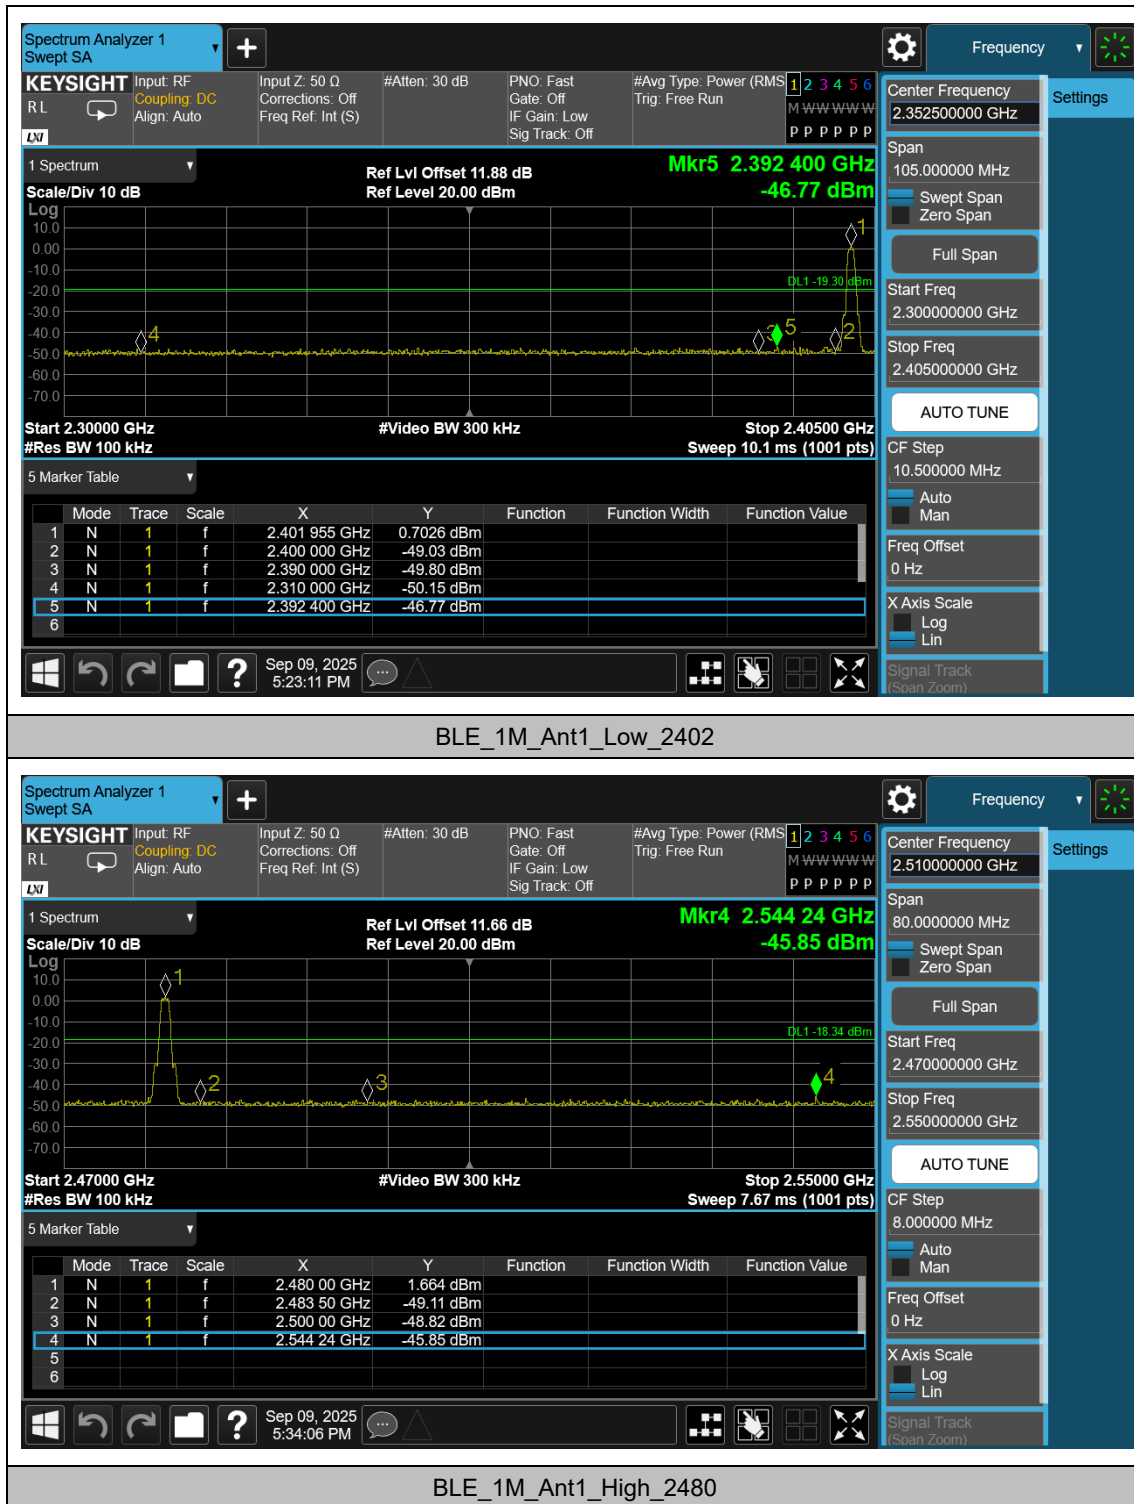

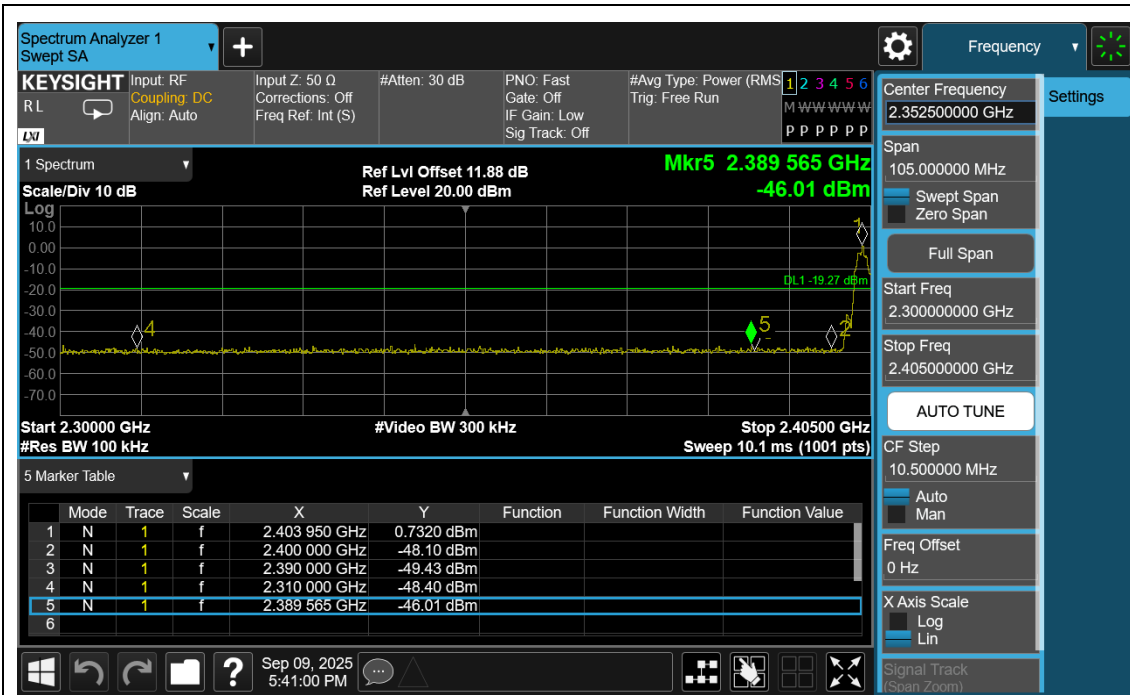

BLE_2M_Ant1_Low_2404

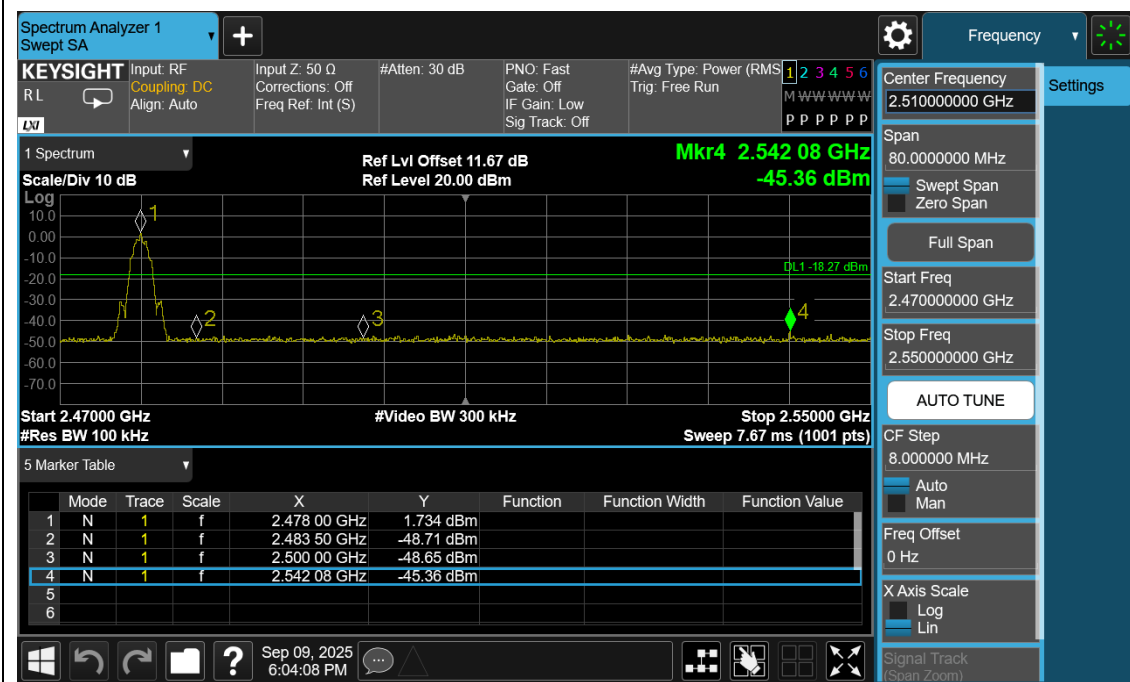

BLE_2M_Ant1_High_2478

Appendix F: Conducted Spurious Emission


Test Result

TestMode	Antenna	Frequency [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	0.64	0.64	---	PASS
			30~1000	0.64	-58.47	≤-19.36	PASS
			1000~26500	0.64	-49.49	≤-19.36	PASS
		2440	Reference	0.95	0.95	---	PASS
			30~1000	0.95	-57.84	≤-19.05	PASS
			1000~26500	0.95	-50.4	≤-19.05	PASS
		2480	Reference	1.55	1.55	---	PASS
			30~1000	1.55	-58.71	≤-18.45	PASS
			1000~26500	1.55	-50.42	≤-18.45	PASS
BLE_2M	Ant1	2404	Reference	0.68	0.68	---	PASS
			30~1000	0.68	-57.84	≤-19.32	PASS
			1000~26500	0.68	-49.63	≤-19.32	PASS
		2440	Reference	1.00	1.00	---	PASS
			30~1000	1.00	-57.75	≤-19	PASS
			1000~26500	1.00	-49.64	≤-19	PASS
		2478	Reference	1.65	1.65	---	PASS
			30~1000	1.65	-58.61	≤-18.35	PASS
			1000~26500	1.65	-49.77	≤-18.35	PASS


Test Graphs



BLE_1M_Ant1_2402_0~Reference

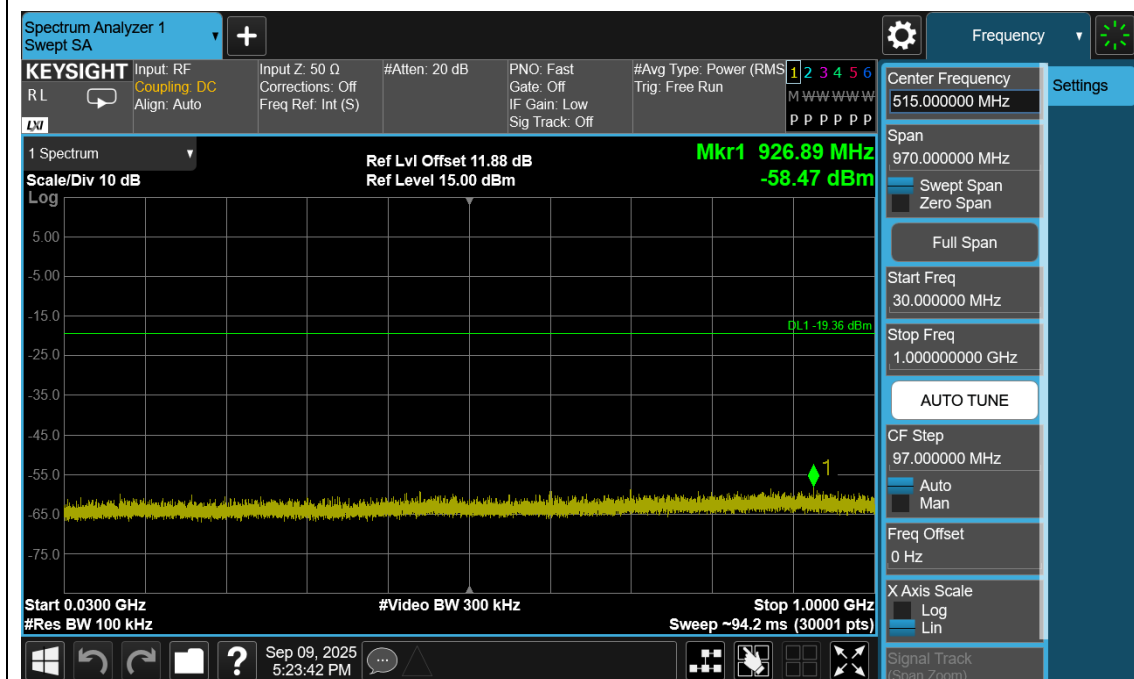


BLE_1M_Ant1_2402_30~1000

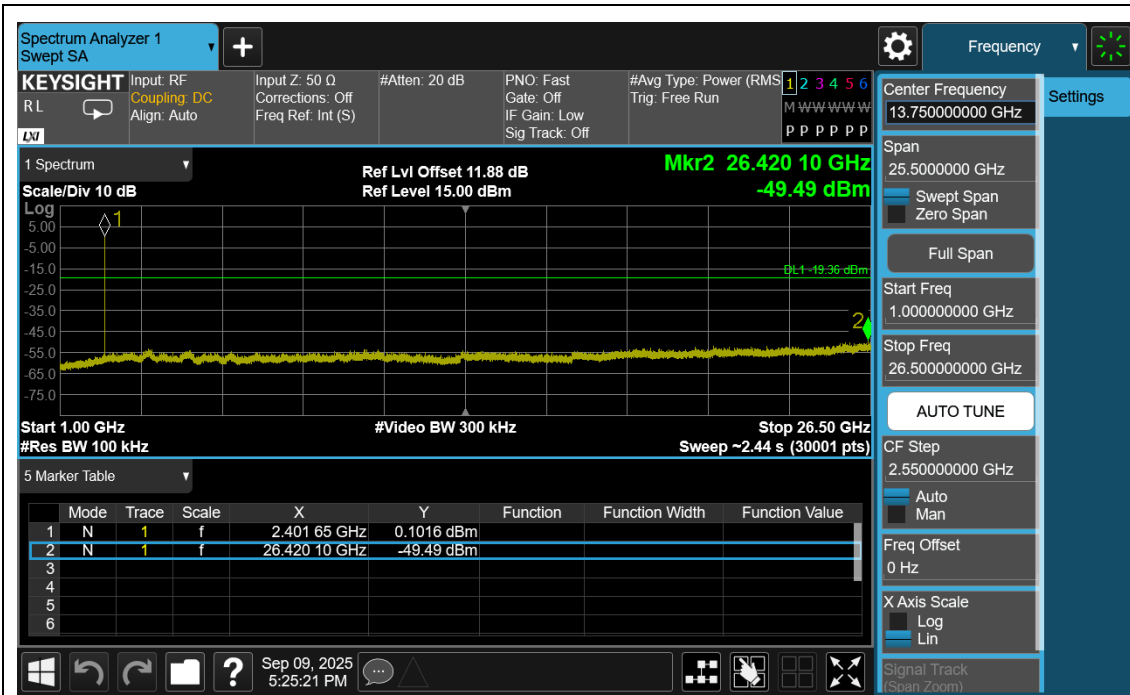


BLE_1M_Ant1_2402_1000~26500



BLE_1M_Ant1_2440_0~Reference

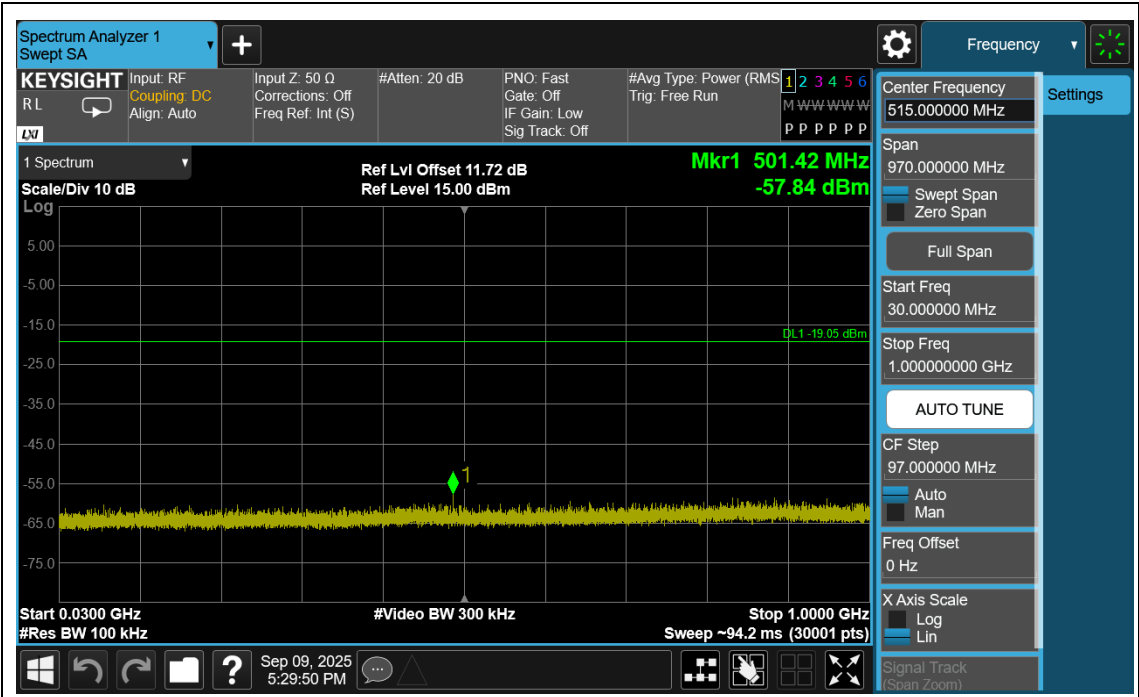


BLE_1M_Ant1_2440_30~1000

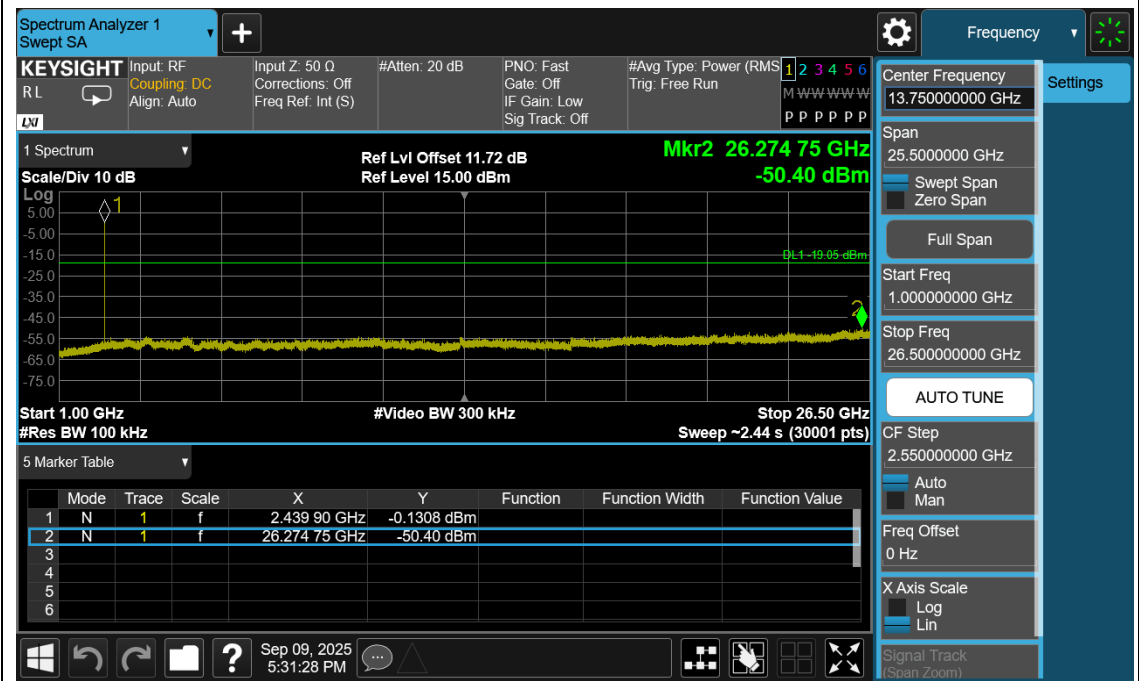


BLE_1M_Ant1_2440_1000~26500




BLE_1M_Ant1_2480_0~Reference

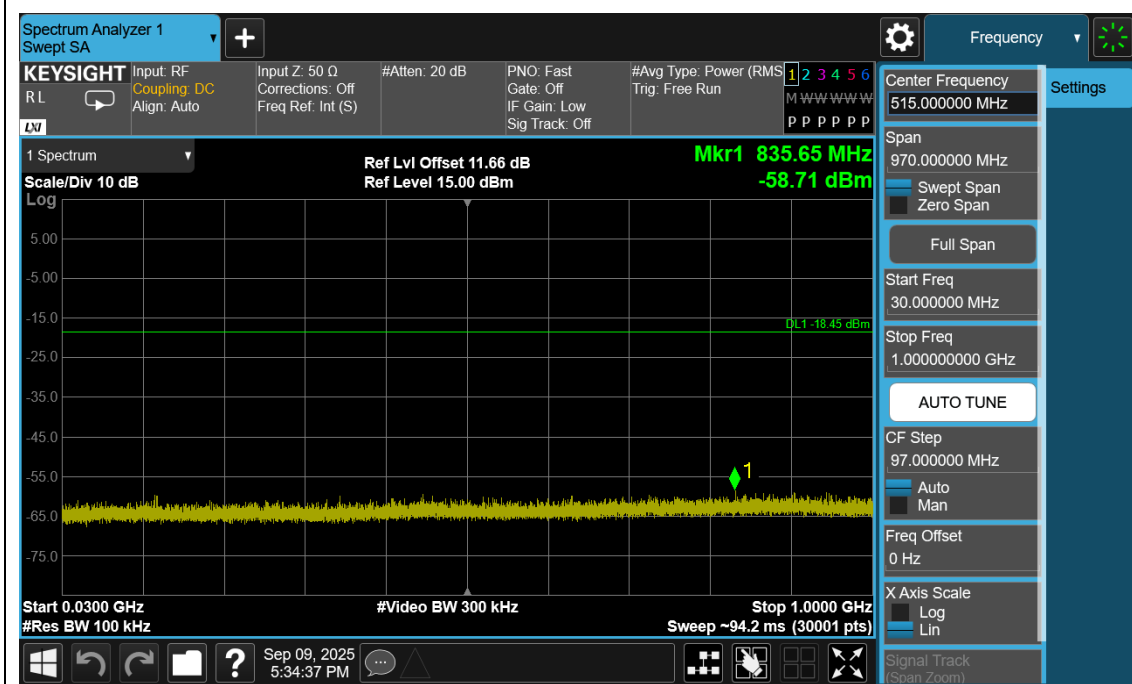


BLE_1M_Ant1_2480_30~1000

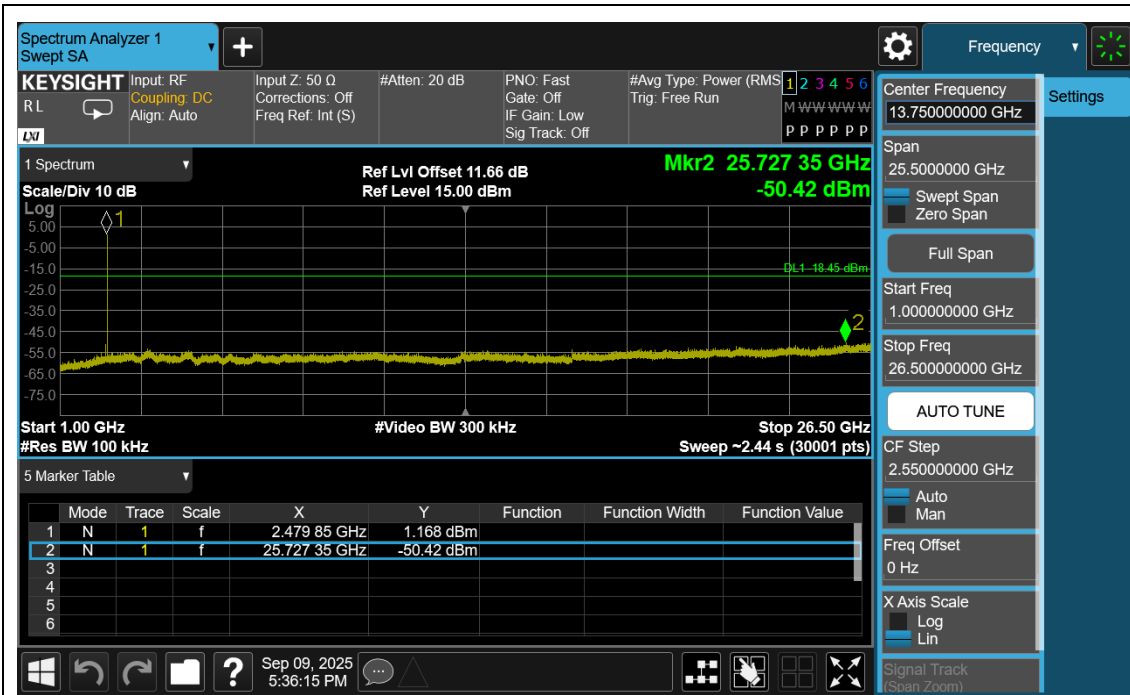


BLE_1M_Ant1_2480_1000~26500

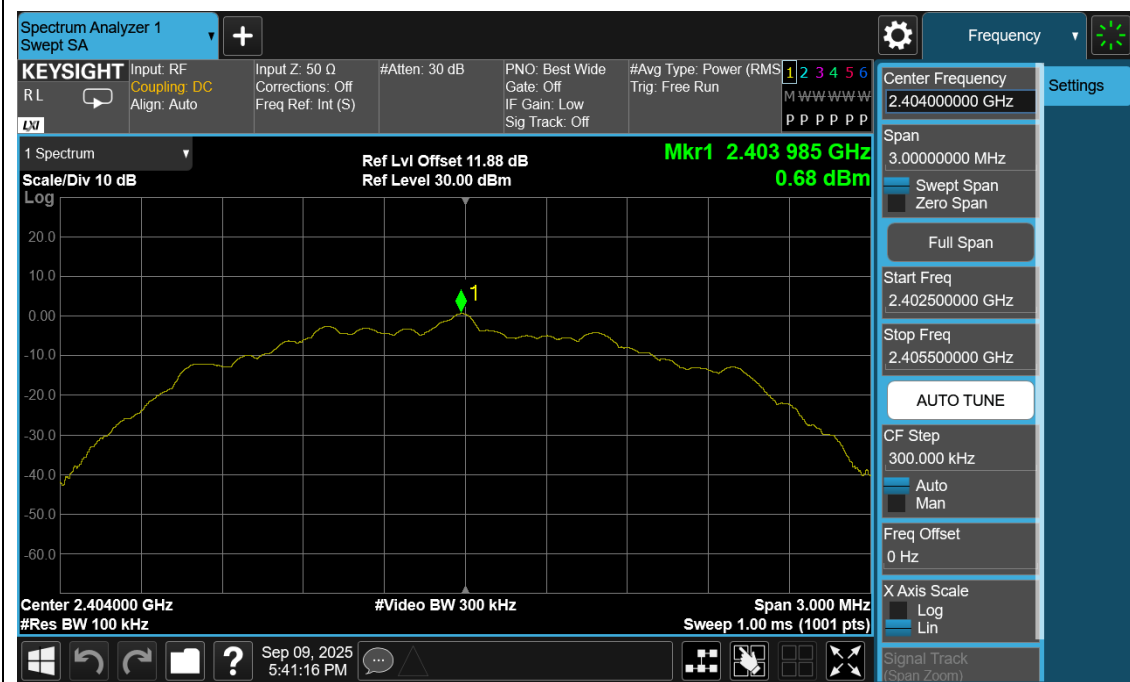


BLE_2M_Ant1_2404_0~Reference

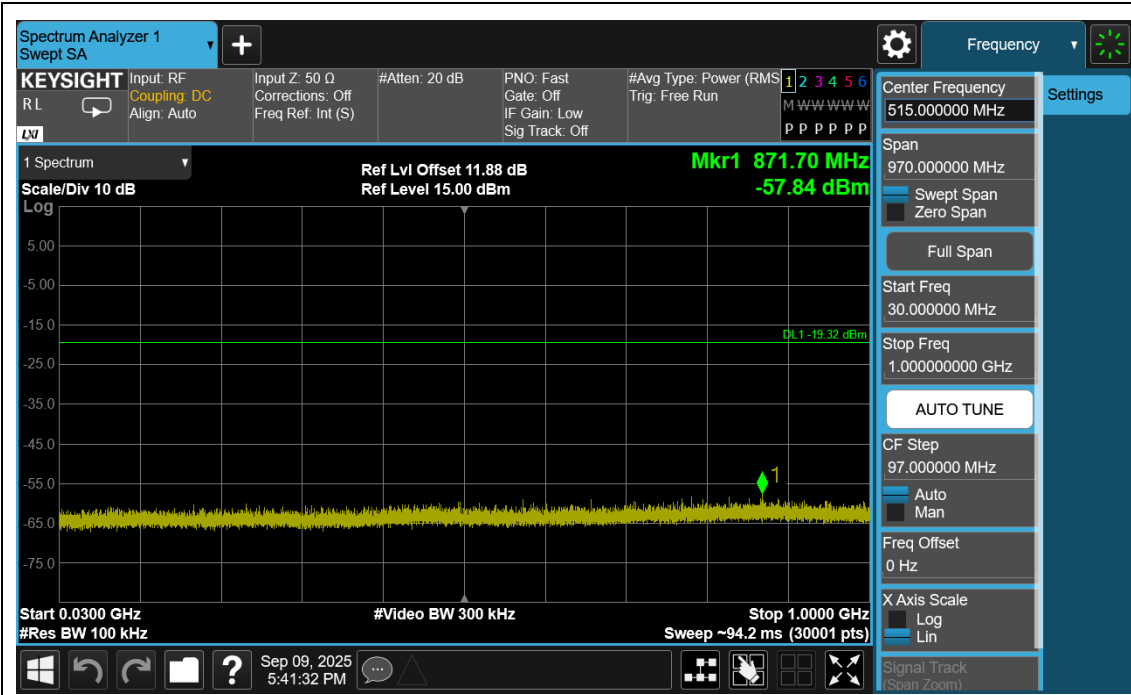


BLE_2M_Ant1_2404_30~1000

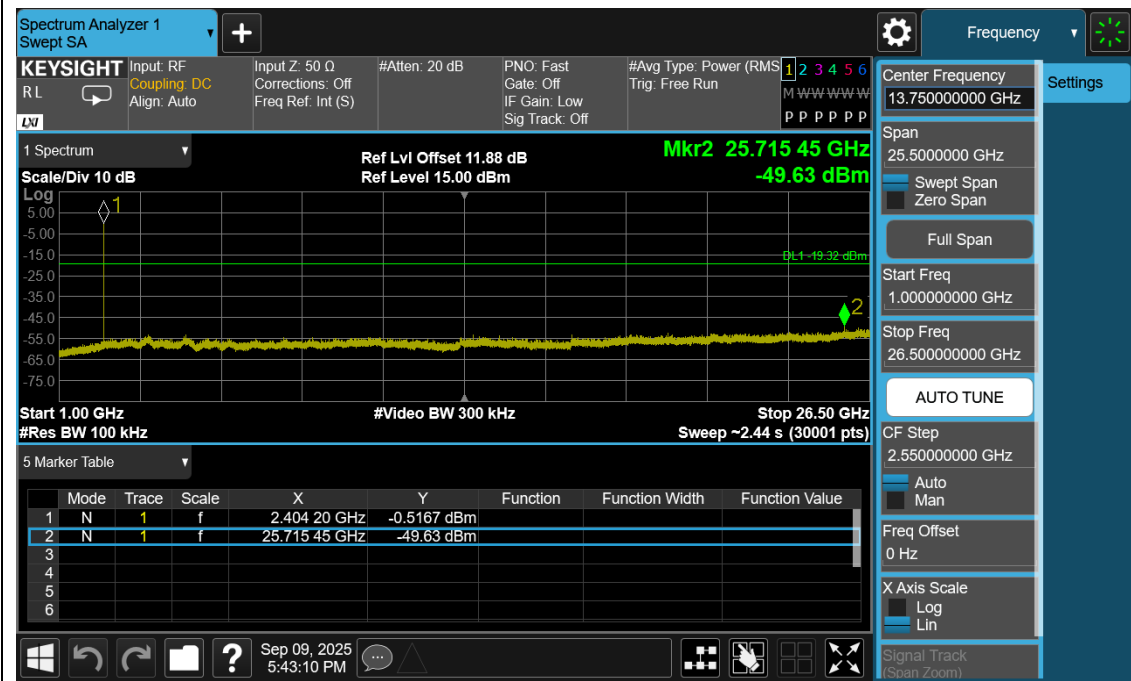


BLE_2M_Ant1_2404_1000~26500

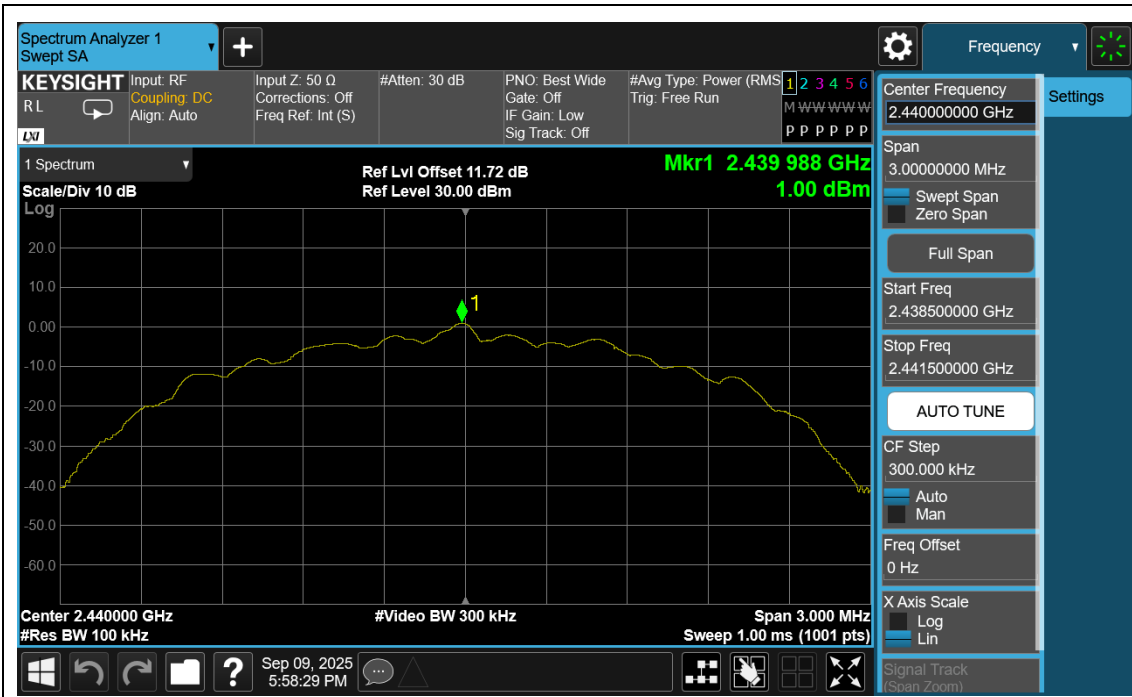

BLE_2M_Ant1_2440_0~Reference

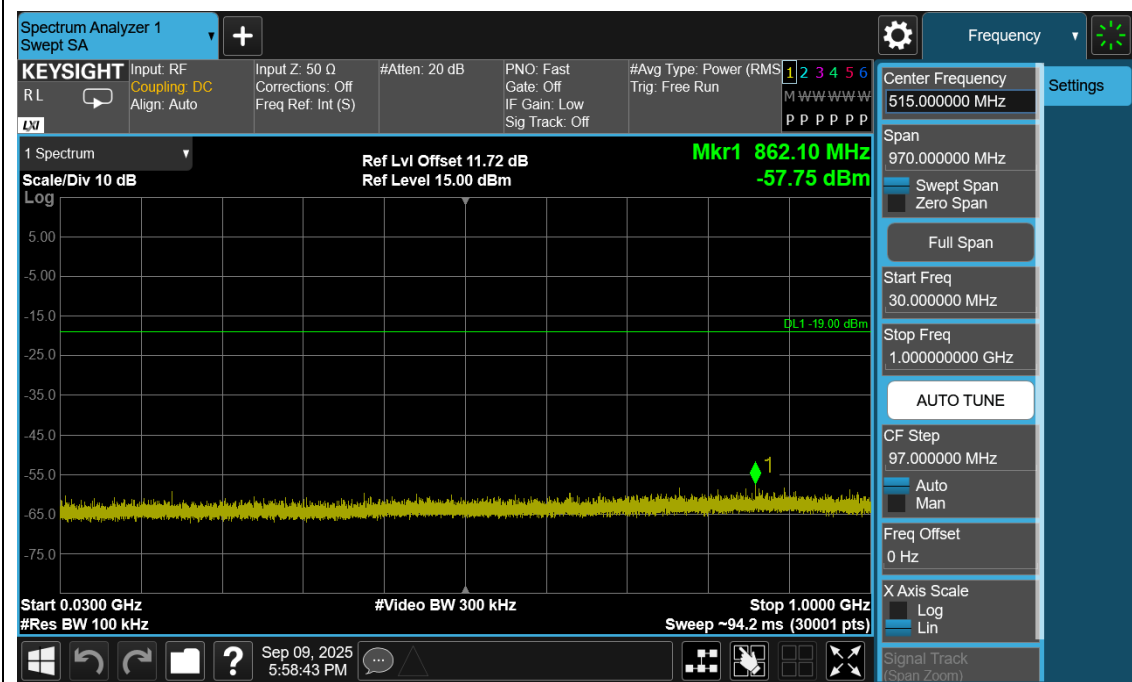


BLE_2M_Ant1_2440_30~1000

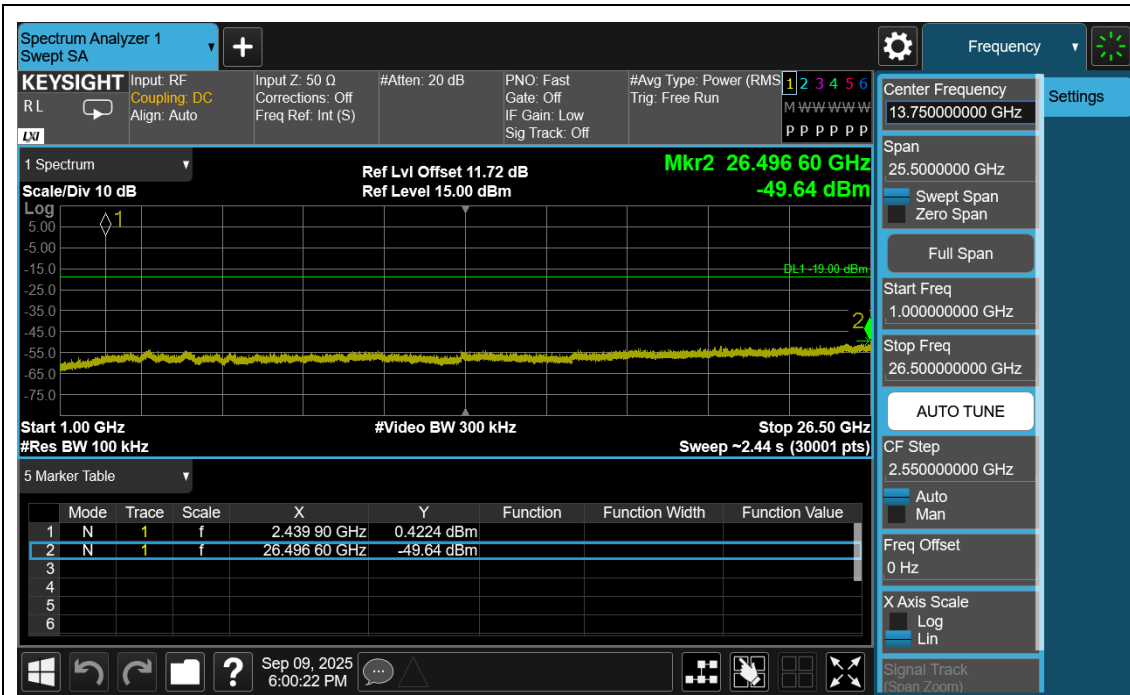


BLE_2M_Ant1_2440_1000~26500



BLE_2M_Ant1_2478_0~Reference

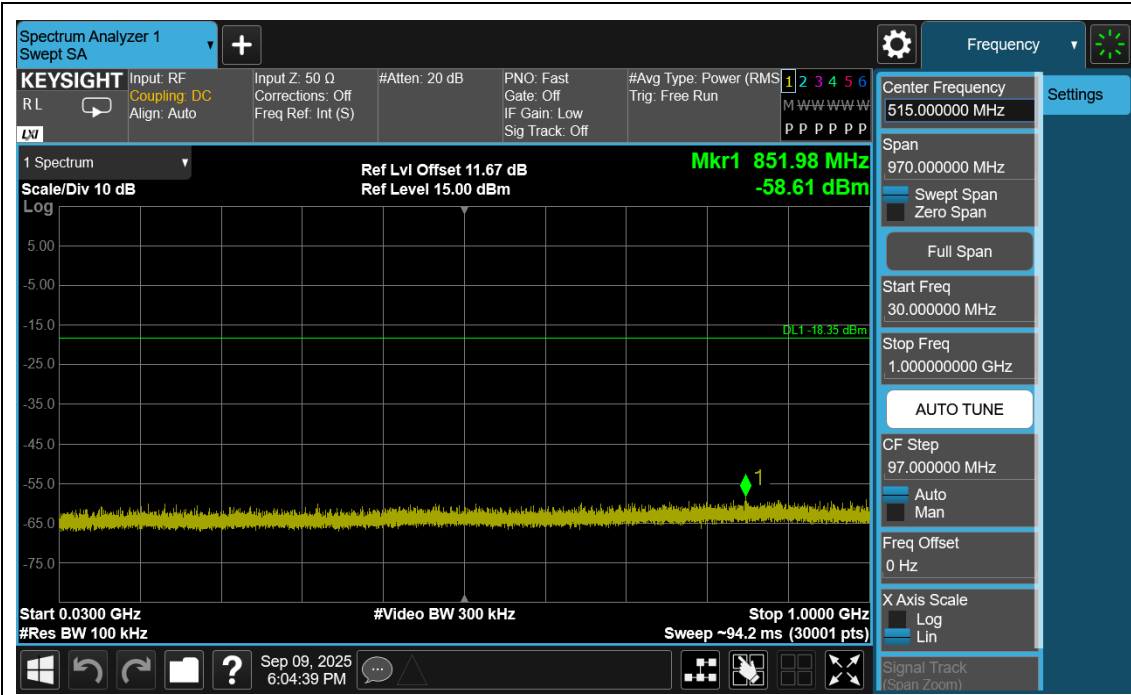

BLE_2M_Ant1_2478_30~1000

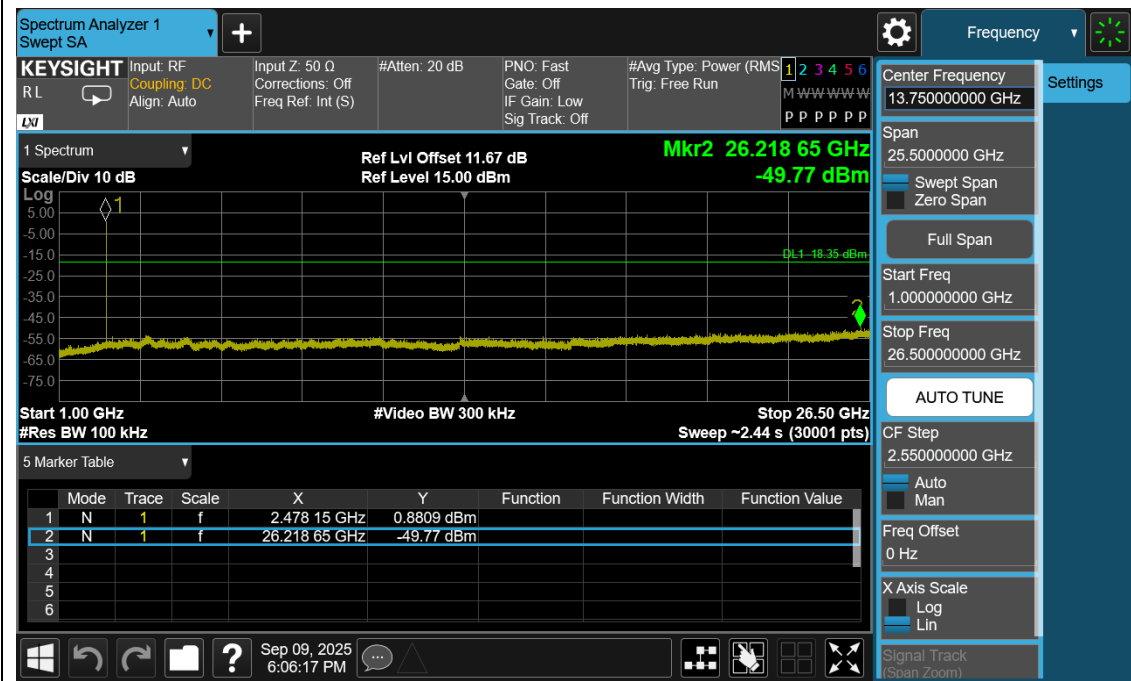


BLE_2M_Ant1_2478_1000~26500

Appendix G: Duty Cycle


Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2402	0.40	0.63	63.49
		2440	0.40	0.63	63.49
		2480	0.40	0.63	63.49
BLE_2M	Ant1	2404	0.21	0.63	33.33
		2440	0.21	0.63	33.33
		2478	0.21	0.63	33.33


Test Graphs

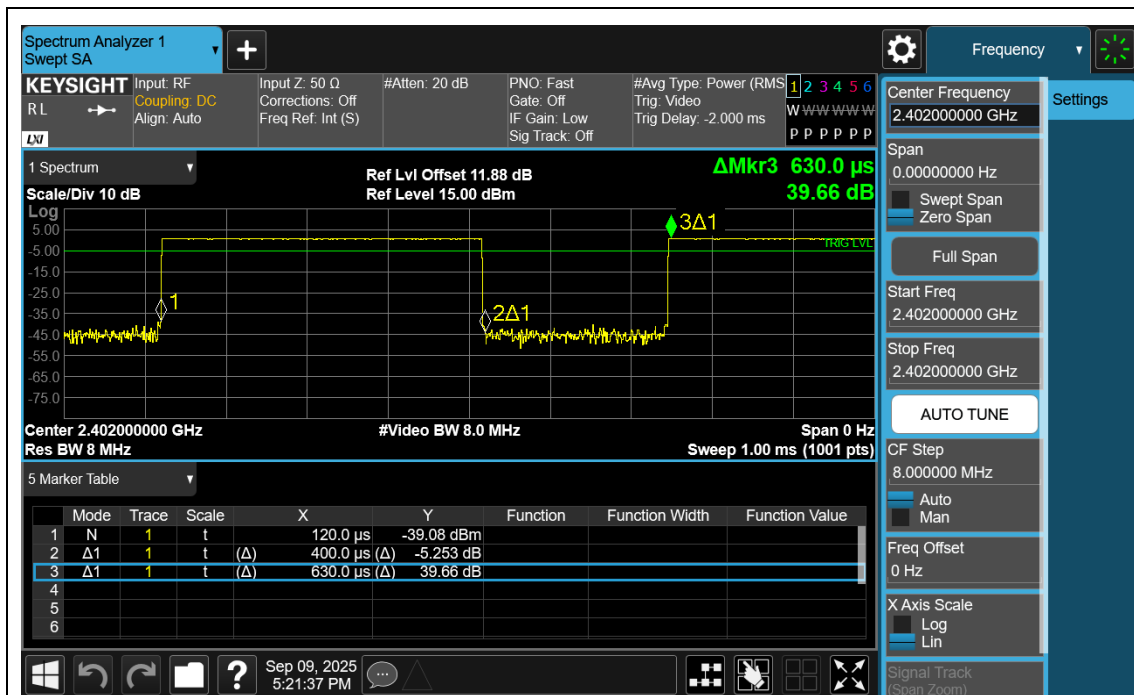


BLE_1M_Ant1_2402

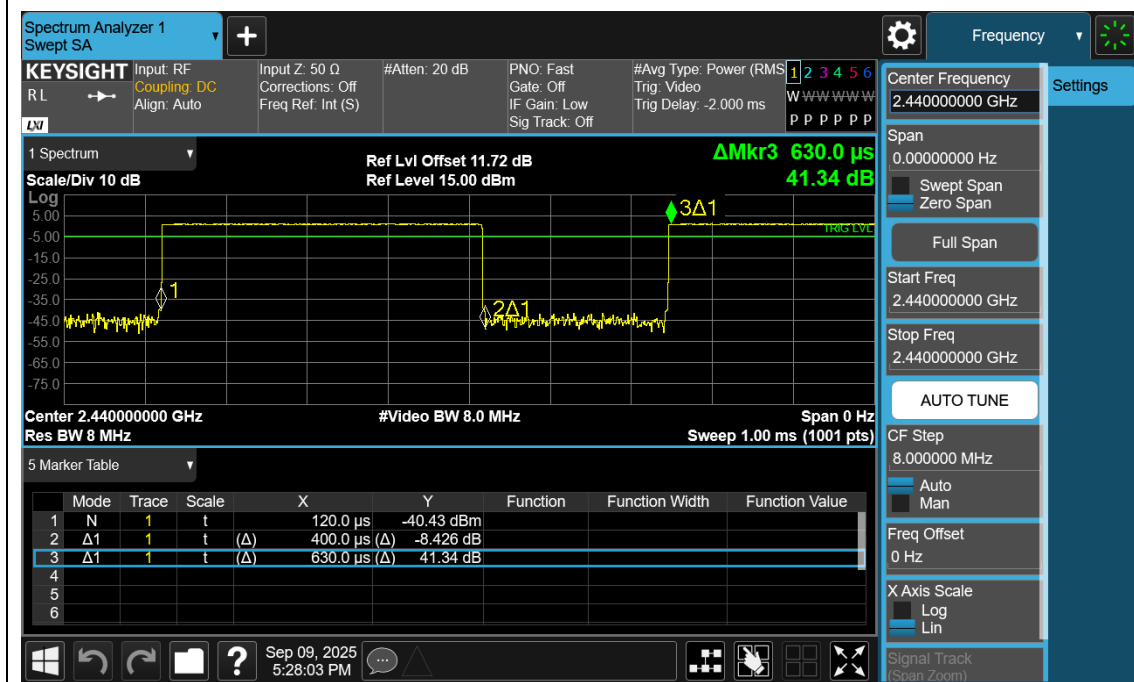


BLE_1M_Ant1_2440

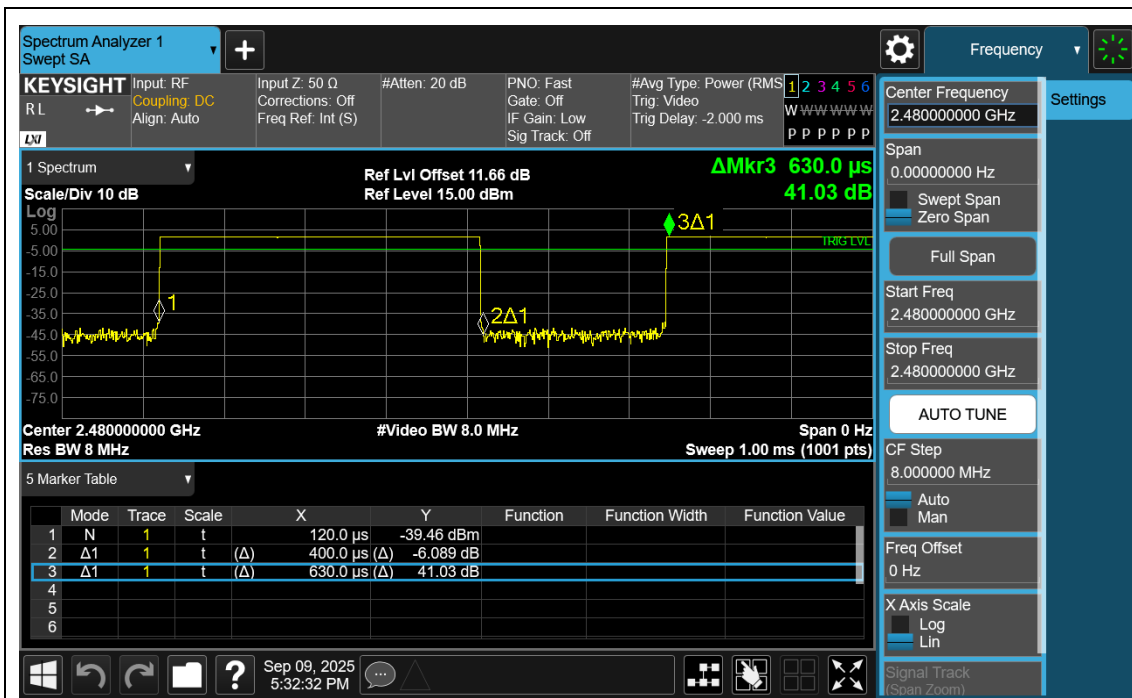


BLE_1M_Ant1_2480

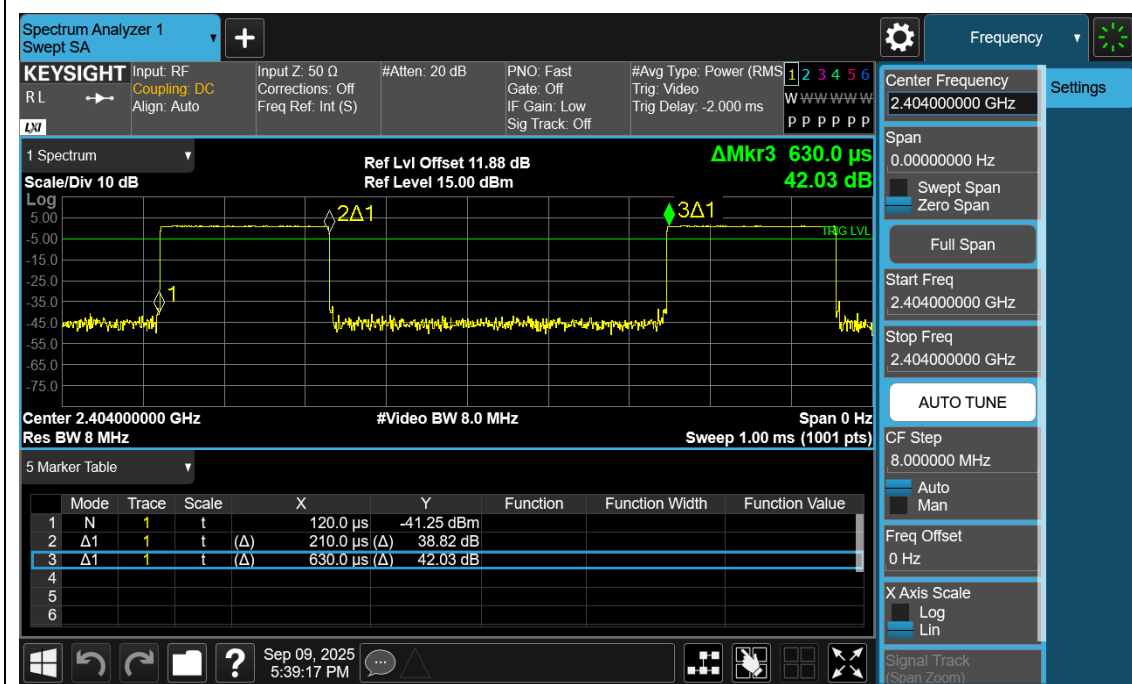

BLE_2M_Ant1_2404

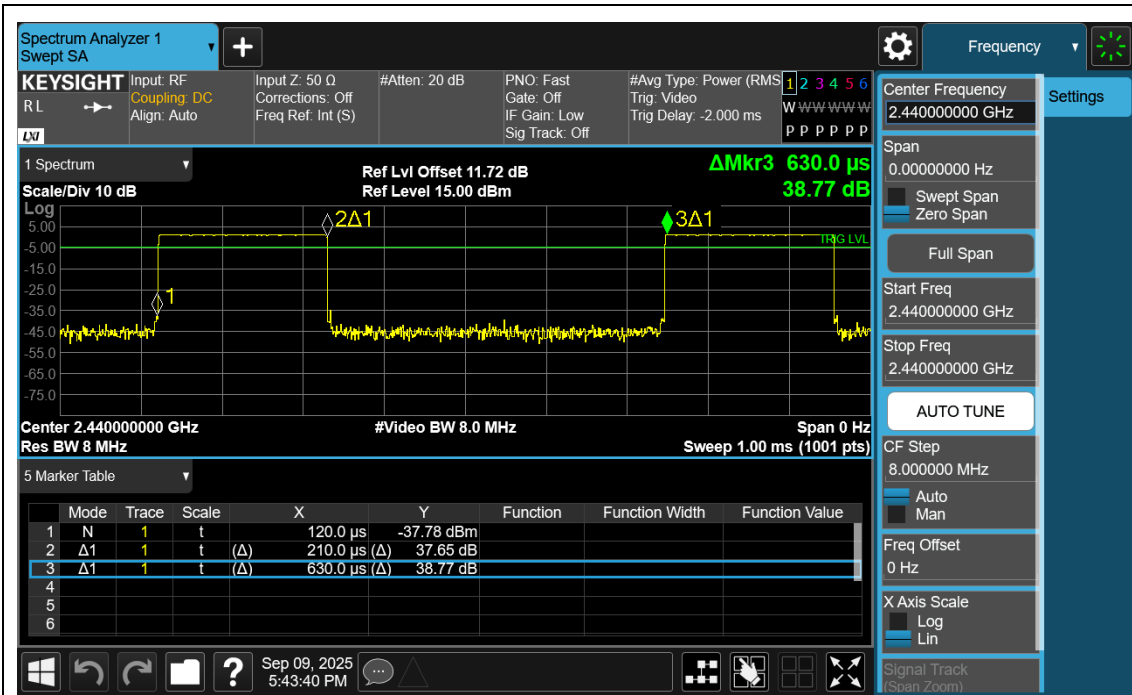

BLE_2M_Ant1_2440

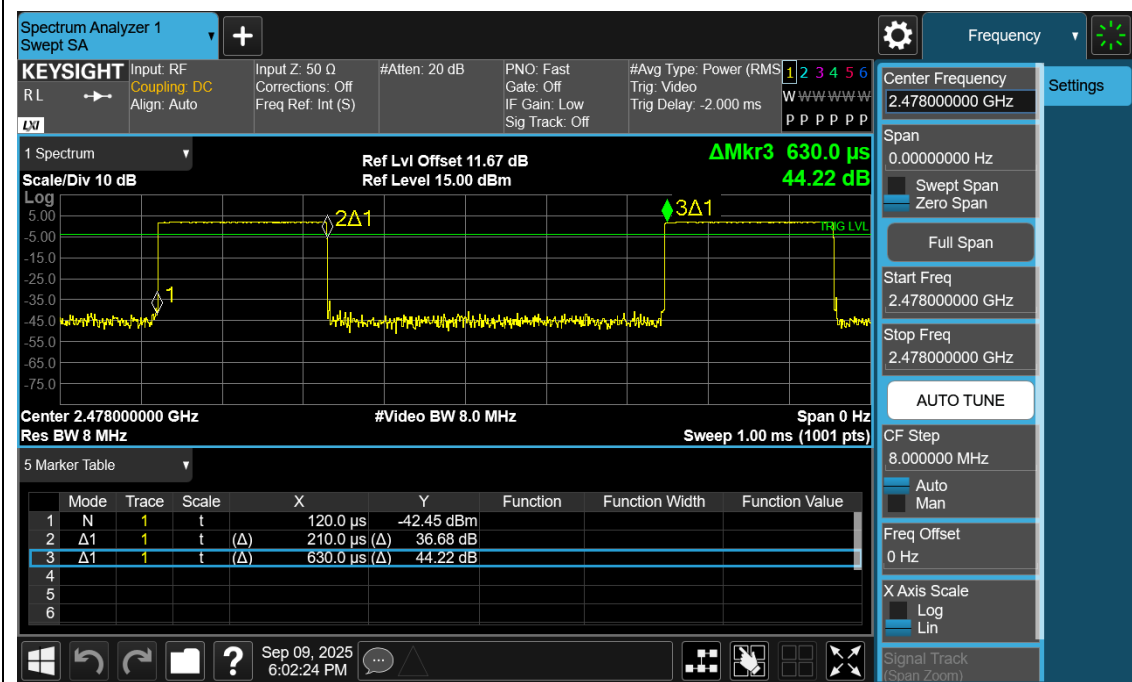

BLE_2M_Ant1_2478

Appendix H: Emissions in Restricted Bands

Test Result

Mode:	BLE 1M-2402
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.96	43.67	74.00	30.33	40.92	54.00	13.08	150	190	Horizontal	PASS
2	2319.36	7.17	45.89	74.00	28.11	42.68	54.00	11.32	150	220	Horizontal	PASS
3	2337.76	7.11	45.18	74.00	28.82	42.14	54.00	11.86	150	100	Horizontal	PASS
4	2359.68	7.36	45.94	74.00	28.06	41.82	54.00	12.18	150	160	Horizontal	PASS
5	2377.44	7.91	45.58	74.00	28.42	42.47	54.00	11.53	150	310	Horizontal	PASS
6	2390	8.28	45.38	74.00	28.62	42.45	54.00	11.55	150	220	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.96	43.70	74.00	30.30	39.81	54.00	14.19	150	240	Vertical	PASS
2	2334.24	7.10	45.90	74.00	28.10	42.69	54.00	11.31	150	60	Vertical	PASS
3	2345.92	7.32	46.23	74.00	27.77	42.73	54.00	11.27	150	350	Vertical	PASS
4	2366.4	7.50	46.29	74.00	27.71	41.81	54.00	12.19	150	100	Vertical	PASS
5	2374.64	7.82	46.53	74.00	27.47	44.76	54.00	9.24	150	330	Vertical	PASS
6	2390	8.28	45.67	74.00	28.33	42.25	54.00	11.75	150	120	Vertical	PASS

Mode:	BLE 1M-2480
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	7.53	51.32	74.00	22.68	48.56	54.00	5.44	150	310	Horizontal	PASS
2	2484.622	7.58	53.86	74.00	20.14	48.36	54.00	5.64	150	170	Horizontal	PASS
3	2486.965	7.62	53.50	74.00	20.50	48.16	54.00	5.84	150	140	Horizontal	PASS
4	2489.176	7.64	53.96	74.00	20.04	49.46	54.00	4.54	150	270	Horizontal	PASS
5	2494.489	7.67	53.11	74.00	20.89	50.58	54.00	3.42	150	160	Horizontal	PASS
6	2500	7.60	51.40	74.00	22.60	48.33	54.00	5.67	150	310	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	7.53	50.75	74.00	23.25	48.26	54.00	5.74	150	150	Vertical	PASS
2	2486.5195	7.59	53.56	74.00	20.44	47.94	54.00	6.06	150	230	Vertical	PASS
3	2488.054	7.54	53.74	74.00	20.26	48.48	54.00	5.52	150	340	Vertical	PASS
4	2491.189	7.63	53.10	74.00	20.90	50.67	54.00	3.33	150	70	Vertical	PASS
5	2494.1095	7.68	53.71	74.00	20.29	47.84	54.00	6.16	150	250	Vertical	PASS
6	2500	7.60	53.58	74.00	20.42	48.58	54.00	5.42	150	240	Vertical	PASS

Mode:	BLE 2M-2402
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.96	44.78	74.00	29.22	40.33	54.00	13.67	150	40	Horizontal	PASS
2	2319.28	7.17	45.28	74.00	28.72	41.08	54.00	12.92	150	310	Horizontal	PASS
3	2335.68	7.10	45.46	74.00	28.54	43.55	54.00	10.45	150	190	Horizontal	PASS
4	2356.8	7.34	45.78	74.00	28.22	41.89	54.00	12.11	150	240	Horizontal	PASS
5	2372.56	7.76	45.92	74.00	28.08	42.65	54.00	11.35	150	70	Horizontal	PASS
6	2390	8.28	44.24	74.00	29.76	42.39	54.00	11.61	150	300	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	6.96	44.76	74.00	29.24	41.94	54.00	12.06	150	90	Vertical	PASS
2	2328.56	7.14	44.44	74.00	29.56	40.64	54.00	13.36	150	130	Vertical	PASS
3	2347.76	7.31	45.76	74.00	28.24	42.03	54.00	11.97	150	210	Vertical	PASS
4	2354.56	7.36	46.39	74.00	27.61	43.49	54.00	10.51	150	190	Vertical	PASS
5	2366.24	7.50	45.89	74.00	28.11	43.71	54.00	10.29	150	130	Vertical	PASS
6	2390	8.28	45.49	74.00	28.51	41.84	54.00	12.16	150	50	Vertical	PASS

Mode:	BLE 2M-2480
-------	-------------


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	7.53	52.72	74.00	21.28	48.39	54.00	5.61	150	160	Horizontal	PASS
2	2486.5195	7.59	54.50	74.00	19.50	49.15	54.00	4.85	150	270	Horizontal	PASS
3	2489.3245	7.64	53.81	74.00	20.19	50.66	54.00	3.34	150	190	Horizontal	PASS
4	2490.793	7.63	53.61	74.00	20.39	50.54	54.00	3.46	150	180	Horizontal	PASS
5	2493.334	7.66	54.09	74.00	19.91	48.15	54.00	5.85	150	100	Horizontal	PASS
6	2500	7.60	51.92	74.00	22.08	48.17	54.00	5.83	150	320	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	7.53	52.12	74.00	21.88	48.46	54.00	5.54	150	310	Vertical	PASS
2	2486.3215	7.57	54.45	74.00	19.55	48.01	54.00	5.99	150	150	Vertical	PASS
3	2487.9055	7.55	53.18	74.00	20.82	49.77	54.00	4.23	150	50	Vertical	PASS
4	2492.6245	7.66	53.92	74.00	20.08	48.42	54.00	5.58	150	100	Vertical	PASS
5	2496.436	7.67	52.66	74.00	21.34	48.98	54.00	5.02	150	110	Vertical	PASS
6	2500	7.60	50.78	74.00	23.22	48.09	54.00	5.91	150	290	Vertical	PASS

Appendix I: Spurious emissions

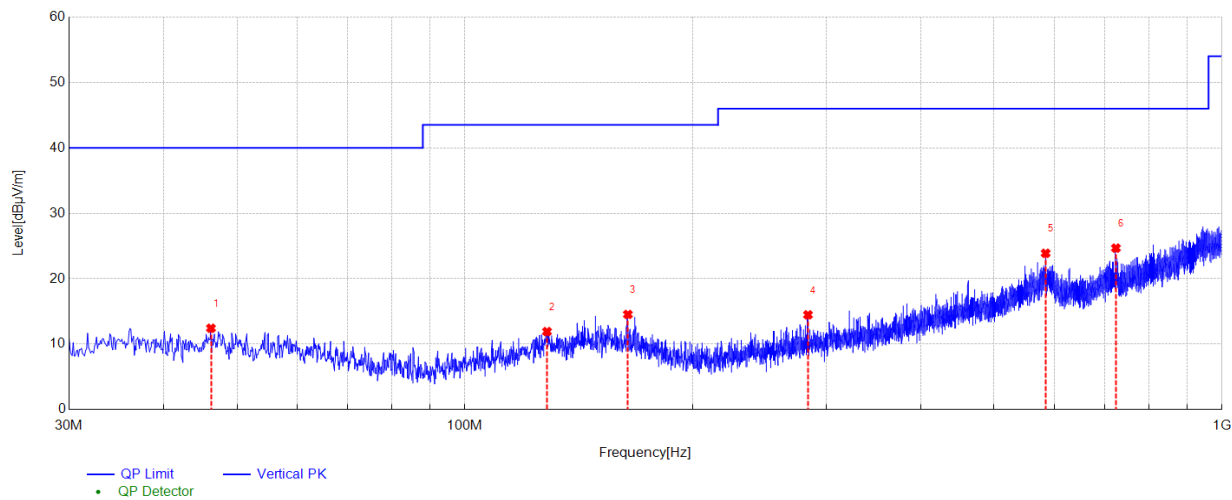

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	46.2006	12.45	-16.21	40.00	27.55	100	240	Vertical	PASS
2	128.367	11.94	-17.19	43.50	31.56	100	190	Vertical	PASS
3	164.164	14.56	-16.21	43.50	28.94	100	310	Vertical	PASS
4	283.874	14.50	-16.82	46.00	31.50	100	360	Vertical	PASS
5	584.895	23.90	-9.14	46.00	22.10	100	150	Vertical	PASS
6	724.201	24.69	-6.62	46.00	21.31	100	350	Vertical	PASS

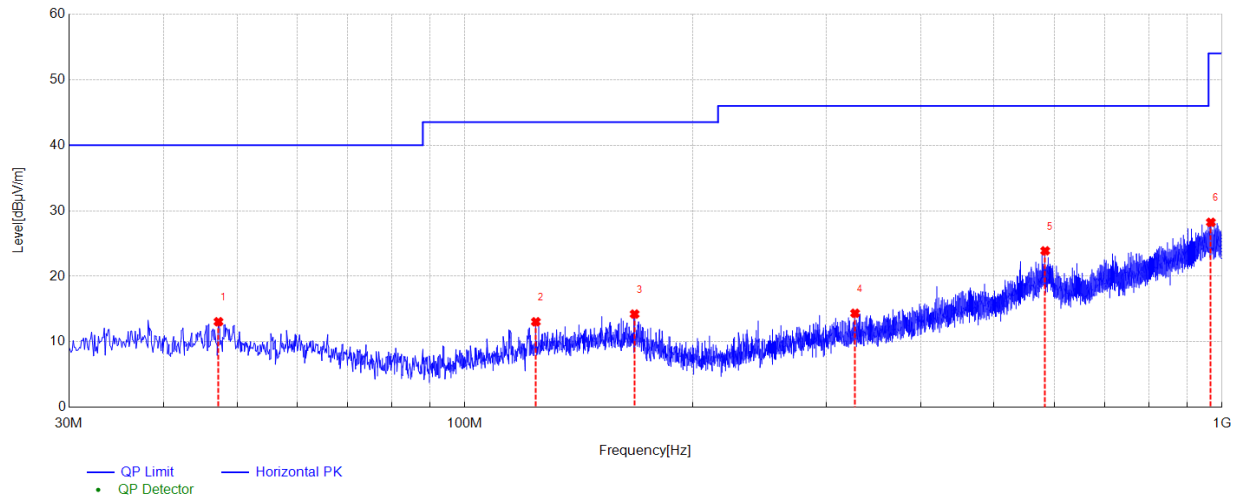

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	47.2677	13.08	-16.27	40.00	26.92	100	20	Horizontal	PASS
2	124.099	13.07	-17.60	43.50	30.43	100	40	Horizontal	PASS
3	167.559	14.25	-16.50	43.50	29.25	100	110	Horizontal	PASS
4	327.625	14.37	-15.25	46.00	31.63	100	50	Horizontal	PASS
5	584.119	23.89	-9.18	46.00	22.11	100	10	Horizontal	PASS
6	966.725	28.24	-1.76	54.00	25.76	100	250	Horizontal	PASS

Mode:	BLE 1M-2402
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1303.2	43.23	2.70	74.00	30.77	150	110	Horizontal
2	1840.4	45.64	5.94	74.00	28.36	150	32	Horizontal
3	3950.25	42.24	-15.41	74.00	31.76	150	76	Horizontal
4	5691.75	44.97	-12.25	74.00	29.03	150	197	Horizontal
5	7686.75	45.65	-9.96	74.00	28.35	150	178	Horizontal
6	10797.7	48.31	-4.82	74.00	25.69	150	8	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1245.6	42.70	2.50	74.00	31.30	150	7	Vertical
2	2034.8	45.54	6.39	74.00	28.46	150	170	Vertical
3	3521.25	42.54	-17.07	74.00	31.46	150	81	Vertical
4	6011.25	44.30	-11.34	74.00	29.70	150	178	Vertical
5	7530	45.25	-10.12	74.00	28.75	150	81	Vertical
6	10627.5	47.33	-5.44	74.00	26.67	150	183	Vertical

Mode:	BLE 1M-2440
-------	-------------

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1256.8	43.30	2.59	74.00	30.70	150	90	Horizontal
2	1980.4	45.28	6.64	74.00	28.72	150	220	Horizontal
3	3592.5	42.15	-16.60	74.00	31.85	150	300	Horizontal
4	4915.5	43.95	-13.06	74.00	30.05	150	10	Horizontal
5	6348.75	44.84	-10.51	74.00	29.16	150	140	Horizontal
6	10139.2	46.65	-5.91	74.00	27.35	150	10	Horizontal

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1336	43.43	2.42	74.00	30.57	150	350	Vertical
2	1947.6	44.95	6.17	74.00	29.05	150	170	Vertical
3	4250.25	42.61	-15.59	74.00	31.39	150	50	Vertical
4	5589	44.09	-12.76	74.00	29.91	150	90	Vertical
5	6498	44.60	-10.81	74.00	29.40	150	40	Vertical
6	10612.5	46.85	-5.25	74.00	27.15	150	330	Vertical

Mode:	BLE 1M-2480
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1372.4	42.25	2.51	74.00	31.75	150	220	Horizontal
2	1978.8	45.82	6.62	74.00	28.18	150	160	Horizontal
3	4177.5	42.08	-15.57	74.00	31.92	150	150	Horizontal
4	4947	43.13	-13.71	74.00	30.87	150	180	Horizontal
5	7149.75	44.49	-10.70	74.00	29.51	150	0	Horizontal
6	9093.75	45.80	-8.05	74.00	28.20	150	120	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1303.6	42.52	2.70	74.00	31.48	150	200	Vertical
2	1880	45.91	6.16	74.00	28.09	150	210	Vertical
3	4293	42.67	-14.85	74.00	31.33	150	70	Vertical
4	6156	44.79	-10.87	74.00	29.21	150	240	Vertical
5	8954.25	46.26	-8.39	74.00	27.74	150	40	Vertical
6	12724.5	48.40	-1.86	74.00	25.60	150	340	Vertical

Mode:	BLE 2M-2402
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1348.8	42.28	2.50	74.00	31.72	150	300	Horizontal
2	1842.8	45.33	5.96	74.00	28.67	150	130	Horizontal
3	4281.75	42.65	-14.93	74.00	31.35	150	70	Horizontal
4	6402.75	44.29	-11.15	74.00	29.71	150	90	Horizontal
5	9304.5	45.81	-7.67	74.00	28.19	150	20	Horizontal
6	11892	48.10	-2.50	74.00	25.90	150	250	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1301.2	43.04	2.73	74.00	30.96	150	130	Vertical
2	1844.4	45.01	5.98	74.00	28.99	150	290	Vertical
3	4496.25	42.21	-14.53	74.00	31.79	150	200	Vertical
4	6154.5	44.76	-10.80	74.00	29.24	150	160	Vertical
5	7236.75	44.73	-10.09	74.00	29.27	150	310	Vertical
6	10600.5	46.63	-5.04	74.00	27.37	150	130	Vertical

Mode:	BLE 2M-2440
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1224	42.01	2.48	74.00	31.99	150	80	Horizontal
2	1990.8	44.76	6.65	74.00	29.24	150	220	Horizontal
3	4209	42.98	-15.68	74.00	31.02	150	210	Horizontal
4	5788.5	43.28	-11.93	74.00	30.72	150	230	Horizontal
5	7929.75	45.46	-9.60	74.00	28.54	150	30	Horizontal
6	11096.2	47.15	-3.88	74.00	26.85	150	40	Horizontal


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1257.2	42.43	2.59	74.00	31.57	150	300	Vertical
2	1730.4	43.73	4.04	74.00	30.27	150	230	Vertical
3	4418.25	42.03	-14.79	74.00	31.97	150	260	Vertical
4	6404.25	44.81	-11.10	74.00	29.19	150	340	Vertical
5	8843.25	45.54	-8.66	74.00	28.46	150	180	Vertical
6	11699.2	47.72	-3.28	74.00	26.28	150	270	Vertical

Mode:	BLE 2M-2480
-------	-------------


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1248	42.71	2.49	74.00	31.29	150	220	Horizontal
2	1935.2	45.18	6.12	74.00	28.82	150	290	Horizontal
3	4286.25	43.02	-14.80	74.00	30.98	150	240	Horizontal
4	7720.5	45.06	-9.68	74.00	28.94	150	130	Horizontal
5	8441.25	46.22	-8.75	74.00	27.78	150	0	Horizontal
6	11037.7	47.44	-3.85	74.00	26.56	150	310	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1315.6	41.96	2.63	74.00	32.04	150	190	Vertical
2	1958	45.01	6.46	74.00	28.99	150	90	Vertical
3	4398	43.03	-14.92	74.00	30.97	150	280	Vertical
4	7659.75	45.37	-9.99	74.00	28.63	150	150	Vertical
5	9099.75	45.74	-8.02	74.00	28.26	150	110	Vertical
6	11154	48.06	-3.78	74.00	25.94	150	210	Vertical

Appendix J: Conducted emission AC power port

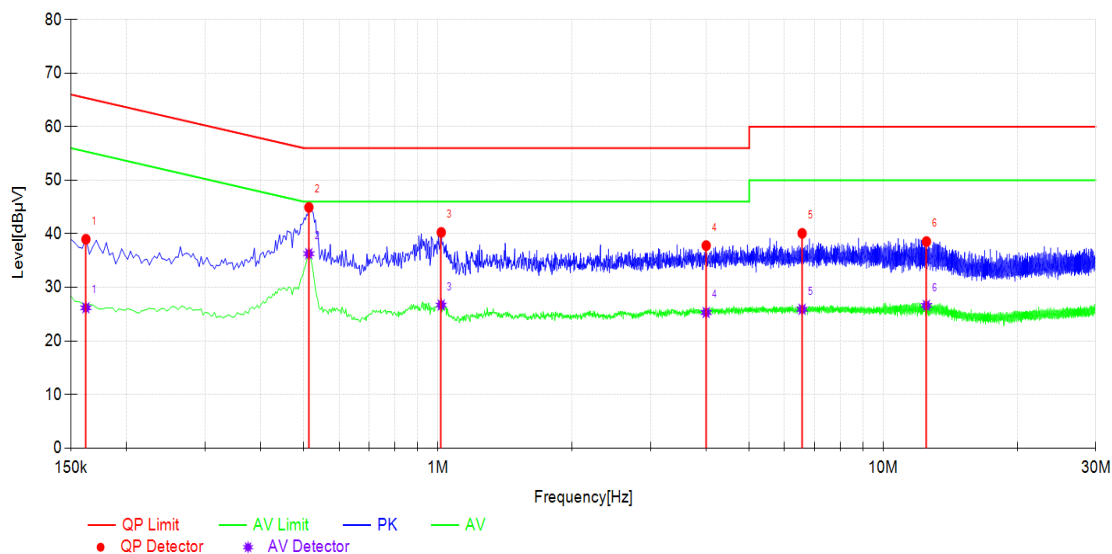

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.162	10.27	38.99	65.36	26.37	26.19	55.36	29.17	L1	PASS
2	0.513	10.25	44.94	56.00	11.06	36.29	46.00	9.71	L1	PASS
3	1.017	10.36	40.27	56.00	15.73	26.72	46.00	19.28	L1	PASS
4	4.002	10.30	37.81	56.00	18.19	25.31	46.00	20.69	L1	PASS
5	6.573	10.40	40.09	60.00	19.91	25.91	50.00	24.09	L1	PASS
6	12.499	10.50	38.56	60.00	21.44	26.64	50.00	23.36	L1	PASS

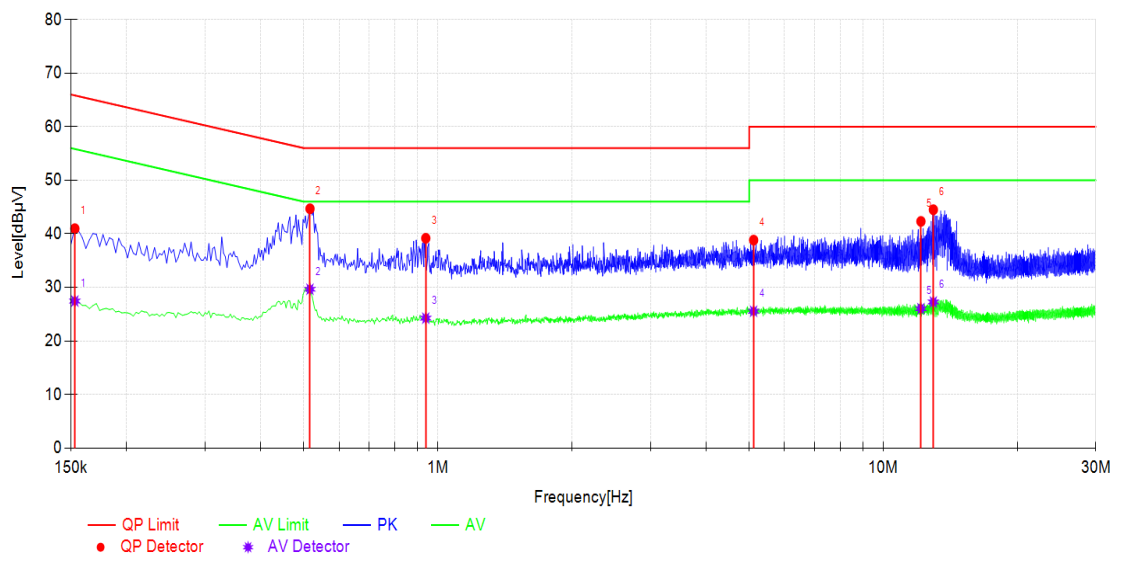

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.153	10.35	40.97	65.84	24.87	27.45	55.84	28.39	N	PASS
2	0.516	10.25	44.69	56.00	11.31	29.66	46.00	16.34	N	PASS
3	0.939	10.26	39.18	56.00	16.82	24.26	46.00	21.74	N	PASS
4	5.115	10.41	38.84	60.00	21.16	25.55	50.00	24.45	N	PASS
5	12.148	10.53	42.33	60.00	17.67	26.03	50.00	23.97	N	PASS
6	12.955	10.57	44.51	60.00	15.49	27.28	50.00	22.72	N	PASS