

**TP-LINK®**

# Archer C3150 User Guide

AC3150 wireless MU-MIMO Gigabit router

# Contents

<b>About This Guide .....</b>	<b>1</b>
<b>Chapter 1. Get to Know About Your Router .....</b>	<b>2</b>
1. 1. Product Overview .....	3
1. 2. Main Features .....	4
1. 3. Panel Layout .....	5
1. 3. 1.Front Panel .....	5
1. 3. 2.The Back Panel .....	6
1. 3. 3.The Side Panel .....	7
<b>Chapter 2. Connect the Hardware.....</b>	<b>9</b>
2. 1. Position Your Router.....	10
2. 2. Connect Your Router .....	10
<b>Chapter 3. Log into Your Router.....</b>	<b>13</b>
<b>Chapter 4. Set Up Internet Connections .....</b>	<b>15</b>
4. 1. Quick Setup.....	16
4. 2. Manually Configure Your Internet Connection Settings .....	19
4. 3. Setting Up an IPv6 Internet Connection .....	23
<b>Chapter 5. Guest Network .....</b>	<b>27</b>
5. 1. Create Guest Network .....	28
5. 2. Customize Guest Network Options.....	28
<b>Chapter 6. USB Application.....</b>	<b>30</b>
6. 1. Local Storage Sharing .....	31
6. 1. 1.Access the USB disk .....	31
6. 1. 2.Customize Your Settings.....	31
6. 2. Remote Access via FTP Server.....	34
6. 2. 1.Access the USB disk .....	34
6. 2. 2.Customize Your Settings.....	36
6. 3. Media Sharing.....	37

6. 3. 1. Access the USB disk .....	37
6. 3. 2. Customize Your Settings.....	38
6. 4. Printer Sharing .....	39
<b>Chapter 7. Parental Controls.....</b>	<b>43</b>
<b>Chapter 8. Bandwidth Control .....</b>	<b>47</b>
<b>Chapter 9. Network Security.....</b>	<b>51</b>
9. 1. Protect the Network from Cyber Attacks .....	52
9. 2. Access Control .....	53
9. 3. IP & MAC Binding.....	55
<b>Chapter 10. NAT Forwarding.....</b>	<b>57</b>
10. 1. Share Local Resources in the Internet by Virtual Server.....	58
10. 2. Open Ports Dynamically by Port Triggering.....	59
10. 3. Make Applications Free from Port Restriction by DMZ .....	60
10. 4. Make Xbox Online Games Run Smoothly by UPnP .....	61
<b>Chapter 11. VPN Server.....</b>	<b>63</b>
11. 1. Use OpenVPN to Access Your Home Network.....	64
11. 2. Use PPTP VPN to Access Your Home Network.....	65
<b>Chapter 12. Customize Your Network Settings .....</b>	<b>70</b>
12. 1. Change the LAN Settings .....	71
12. 2. Configure to Support IPTV Service .....	71
12. 3. Specify DHCP Server Settings.....	73
12. 4. Set Up a Dynamic DNS Service Account.....	74
12. 5. Create Static Routes .....	75
12. 6. Specify Wireless Settings .....	77
12. 7. Use WPS for Wireless Connection .....	80
12. 7. 1. Set the Router's PIN .....	81
12. 7. 2. Use the WPS Wizard for Wi-Fi Connections .....	81
12. 8. Schedule Your Wireless Function.....	82
12. 9. Set up a VPN Connection .....	83
<b>Chapter 13. Manage the Router .....</b>	<b>88</b>

13. 1. Set Up System Time .....	89
13. 2. Test the Network Connectivity.....	90
13. 3. Upgrade the Firmware.....	91
13. 4. Backup and Restore Configuration Settings .....	92
13. 5. Change the Administrator Account .....	93
13. 6. Local Management.....	93
13. 7. Remote Management .....	94
13. 8. System Log .....	95
13. 9. SNMP Settings .....	96
13. 10. Monitor the Internet Traffic Statistics .....	97
13. 11. Control LEDs .....	98
<b>FAQ .....</b>	<b>100</b>
<b>Specifications .....</b>	<b>109</b>

# About This Guide

This guide provides details of each function and shows how to configure the router appropriate to your needs. In addition to this guide, a Quick Installation Guide is also released with each TP-LINK router, you are suggested to configure your router for quick Internet setup by following the published Quick Installation Guide before you get started with a further configuration.

## Conventions

In this guide the following conventions are used:

Convention	Description
router	Stands for AC3150 wireless MU-MIMO Gigabit router without any explanation.
parameters	Parameters provided in the screenshots are just references for setting up the device, which may differ from the actual situation. You can set the parameters according to your demand.
screenshots	The demonstrated screenshots may look a little different from the actual web page of your device due to the various firmware versions. Please just configure your product based on the actual web page.
<i>Blue Italic</i>	Hyperlinks are in blue italic. You can click to redirect to a website or a specific section.
Blue	Contents to be emphasized and texts on the web page are in blue, including the menus, items, buttons, etc.
>	The menu structures to show the path to load the corresponding page. For example, <i>Advanced</i> > <i>Wireless</i> > <i>MAC Filtering</i> means the MAC Filtering function page is under the Wireless menu that is located in the Advanced tab.
 Note:	Ignoring this type of note might result in a malfunction or damage to the device.
 Tips:	Indicates important information that helps you make better use of your device.
symbols on the web page	<ul style="list-style-type: none"><li> click to edit the corresponding entry.</li><li> click to delete the corresponding entry.</li><li> click to enable or disable the corresponding entry.</li></ul>

## Chapter 1

---

# Get to Know About Your Router

---

This chapter introduces what the router can do and shows its main features and appearance.

This chapter contains the following sections:

- *Product Overview*
- *Main Features*
- *Panel Layout*

## 1. 1. Product Overview

### What This Product Does

TP-LINK's AC3150 wireless MU-MIMO Gigabit router integrates 4-port Switch, Firewall, NAT-router and Wireless AP. Powered by 4x4 MIMO technology, this router delivers exceptional range and speed, which can fully meet the need of Small Office/Home Office (SOHO) networks and the users demanding higher networking performance. Your wireless connections are radio band selectable to avoid interference in your area, and the four built-in Gigabit ports supply high-speed connection to your wired devices.

### More Wi-Fi for More Devices

The Archer C3150 uses Dual-Band technology to run two separate Wi-Fi channels at once, creating a network that can connect to more devices without a trade-off in performance.

Smart Connect helps devices run even faster by assigning them to the best available channel to balance network demand.

### Seamless Streaming and Gaming

With the fastest combined Wi-Fi speed of up to 3165Mbps, the Archer C3150 lets you simultaneously game online and stream video in 4K Ultra HD across multiple devices without lag.

### Run All Your Devices At Once

A powerful 1.4GHz dual-core CPU and two co-processors easily handle the demand made on the Archer C3150 's network when multiple users are browsing, streaming, and gaming all at the same time.

### Lightning-Fast Wired Performance

External hard drives can connect directly to the Archer C3150 via its USB 3.0 and 2.0 ports, making it easy to share files, photos, music, and video across your network.

The Archer C3150 is also equipped with four Gigabit Ethernet ports that enable blazing wired speeds 10x greater than Fast Ethernet, helping connected gaming consoles, PCs, and smart TVs achieve their best performance.

### Easy Setup and Use

Set up the Archer C3150 in minutes thanks to its intuitive web interface and the powerful Tether app. Tether also lets you manage its network settings from any Android or iOS device, including parental controls and media sharing.

## 1.2. Main Features

### Wireless and Wired Performance

- Complies with IEEE 802.11ac.
- One 10/100/1000M Auto-Negotiation RJ45 Internet port, four 10/100/1000M Auto-Negotiation RJ45 Ethernet ports, supporting Auto MDI/MDIX.
- Provides a USB 3.0 port and a USB 2.0 port supporting file sharing and print server.
- Provides WPA/WPA2, WPA-PSK/WPA2-PSK authentication, TKIP/AES encryption security.
- Shares data and Internet access for users, supporting Dynamic IP/Static IP/PPPoE/ PPTP/ L2TP Internet access.
- Supports simultaneous 2.4GHz and 5GHz connections for 3165Mbps of total available bandwidth.
- Supports Virtual Server, Special Application and DMZ host.
- Supports UPnP, Dynamic DNS, Static Routing.
- Provides Automatic-connection and Scheduled Connection on certain time to the Internet.
- Built-in NAT and DHCP server supporting static IP address distributing.
- Supports Parental Controls and Access Control.
- Connects Internet on demand and disconnects from the Internet when idle for PPPoE.
- Provides WEP encryption security and wireless LAN ACL (Access Control List).
- Supports Flow Statistics.
- Supports IPv6.
- Supports firmware upgrade and Web management.
- Supports OpenVPN server, PPTP VPN server.

## 1. 3. Panel Layout

### 1.3.1. Front Panel



The router's LEDs are located on the top panel (view from top to bottom). You can check the router's working status by following the LED Explanation table.

## LED Explanation

Name	Status	Indication
█ (LED)	On	All LEDs work normally.
	Off	All LEDs are off without affecting the router's performance.
⟲ (Power)	On	System initialization completes.
	Flashing	System initialization or firmware upgrade is in process. Do not disconnect or power off the router.
	Off	Power is off. Please ensure that the power adapter is connected correctly.
⟲ (Wireless 2.4GHz)	On	The wireless 2.4GHz band is working properly.
	Off	The wireless 2.4 GHz band is disabled.
⟲ (Wireless 5GHz)	On	The wireless 5GHz band is working properly.
	Off	The wireless 5GHz band is disabled.
🔗 (Internet)	White	The router is connected to the Internet.
	Orange	The WAN port is connected, but there is no Internet connection.
	Off	The WAN port is not connected.
🔌 (LAN)	On	At least one LAN port is connected.
	Off	No LAN port is connected.


### LED Explanation

Name	Status	Indication
⬆ (WPS)	On	A wireless device has been successfully added to the network by WPS function.
	Flashing	WPS handshaking is in process and will continue for about 2 minutes. Please press the WPS button on other wireless devices that you want to add to the network while the LED is flashing.
	Off	The router is not in the WPS process.
↔ (USB1)	On	The USB 3.0 device is identified and ready to use.
	Flashing	The USB 3.0 device is being identified.
	Off	No USB 3.0 device is plugged into the USB port or the USB device is not identified or USB device has been safely ejected.
↔ (USB2)	On	The USB 2.0 device is identified and ready to use.
	Flashing	The USB 2.0 device is being identified.
	Off	No USB 2.0 device is plugged into the USB port or the USB device is not identified or USB device has been safely ejected.

■ Note:

After a device is successfully added to the network by WPS function, the WPS LED will keep on for about 5 minutes and then turn off.

### 1.3.2. The Back Panel

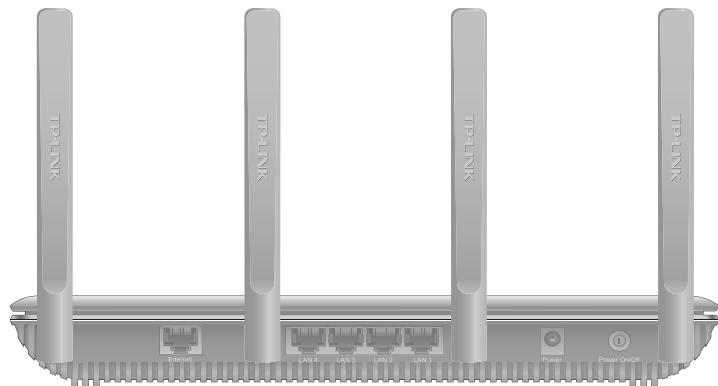


The router's back panel shows the connection ports, buttons and antennas (view from left to right). Refer to the following for detailed instructions.

Item	Description
Internet	This port is where you will connect the DSL/cable Modem, or Ethernet.
LAN1, LAN2, LAN3, LAN4	These ports (1, 2, 3, 4) connect the router to the local PC(s).
Power	For connecting the router to power socket via the provided power adapter.

Item	Description
Power On/Off	The switch for the power. Press it to power on or off the router.
Antennas	Used for wireless operation and data transmit. Upright them for the best Wi-Fi performance.

### 1.3.3. The Side Panel

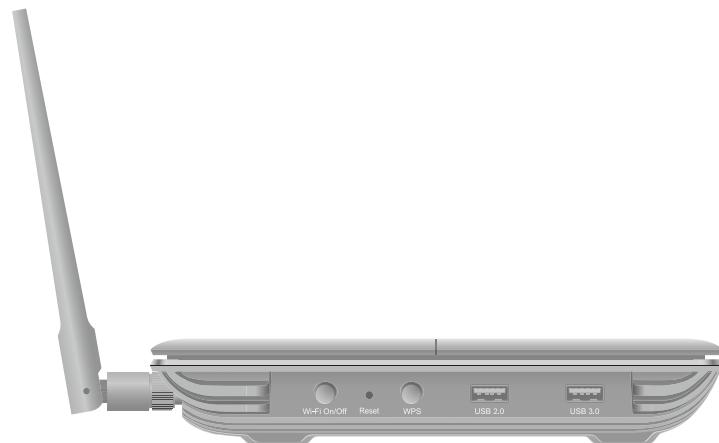

The router's side panel shows the USB ports and buttons (view from left to right). Refer to the following for detailed instructions.

Item	Description
WiFi On/Off	For turning on/off the WiFi function.
Reset	The switch for the reset function. There are two ways to reset the router's factory defaults.  <b>Method one:</b> With the router powered on, press and hold the Reset button for at least 5 seconds until all LEDs light on (wireless LEDs may not light on if the WiFi on/off button is off). And then release the button and wait the router to reboot to its factory default settings.  <b>Method two:</b> Restore the default setting from <a href="#">13.4. Backup and Restore Configuration Settings</a> of the router's Web-based Management.
WPS	The switch for the WPS function. Pressing this button for less than 5 seconds enables the WPS function. If your client devices, such as wireless adapters, that support Wi-Fi Protected Setup, then you can press this button to quickly establish a connection between the router and client devices and automatically configure wireless security for your wireless network.
USB 2.0	For connecting to a 2.0 USB storage device or a 2.0 USB printer.

Item	Description
USB 3.0	For connecting to a 3.0 USB storage device or a 3.0 USB printer. It is also compatible with USB 2.0 devices.

## Chapter 2

---

# Connect the Hardware

---

This chapter contains the following sections:

- *Position Your Router*
- *Connect Your Router*


## 2.1. Position Your Router

- The Product should not be located where it will be exposed to moisture or excessive heat.
- Place the router in a location where it can be connected to the various devices as well as to a power source.
- Make sure the cables and power cord are safely placed out of the way so they do not create a tripping hazard.
- The router can be placed on a shelf or desktop.

## 2.2. Connect Your Router

Follow the steps below to connect your router.

1. If your Internet connection is through an Ethernet cable from the wall instead of through a DSL / Cable / Satellite modem, connect the Ethernet cable directly to the router's Internet port, then follow steps 5) and 6) to complete the hardware connection.

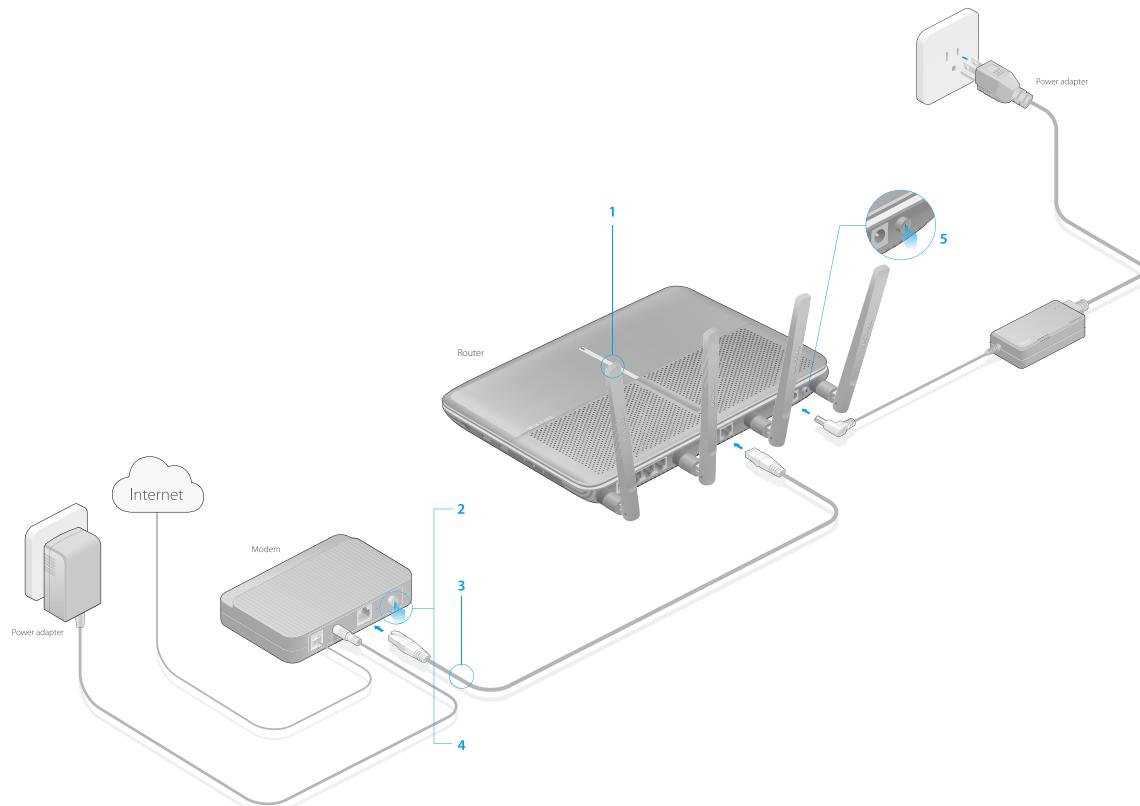

- 1) Install the antennas and position them vertically for best signal reception.
- 2) Turn off the modem, and remove the backup battery if it has one.
- 3) Connect the modem to the Internet port on your router with an Ethernet cable.

- 4) Turn on the modem, and then wait about 2 minutes for it to restart.
- 5) Turn on the router.
- 6) Verify that the following LEDs are on and solid before continuing with the configuration.




**Note:**

If the 2.4G LED and 5G LED are off, please press the Wi-Fi On/Off button on the side panel for 2 seconds and check the LEDs again in a few seconds later.

**Tips:**


For optimum performance, orient the four antennas as shown in the drawing below.

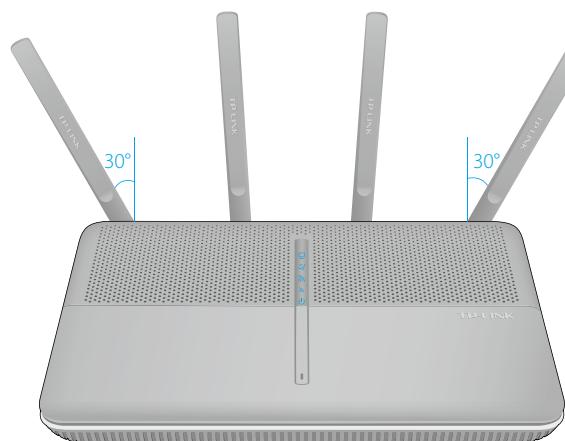

**2. Connect your computer to the router.**

**• Method 1: Wired**

Turn off the Wi-Fi on your computer and connect the devices as shown below.

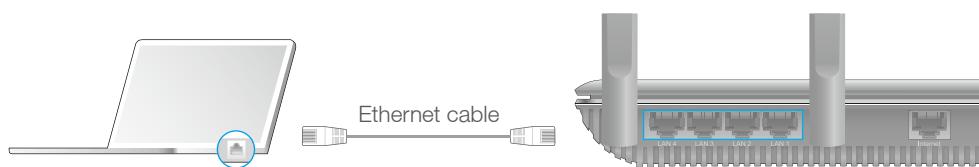

**• Method 2: Wirelessly**

Connect wirelessly by using the SSID (Network Name) and Wireless Password/PIN printed on the product label at the bottom of the router.



- **Method 3: Use the WPS button**

Wireless devices that support WPS, including Android phones, tablets, most USB network cards, can be connected to your router through this method.(WPS is not supported by IOS devices.)

 **Note:**

The WPS function cannot be configured if the wireless function of the router is disabled. Also, the WPS function will be disabled if your wireless encryption is WEP. Please make sure the wireless function is enabled and is configured with the appropriate encryption before configuring the WPS.

1. Tab the WPS icon on the device's screen.
2. Immediately press the WPS button on your router.



## Chapter 3

---


# Log into Your Router

---

With a Web-based utility, it is easy to configure and manage the router. The Web-based utility can be used on any Windows, Macintosh or UNIX OS with a Web browser, such as Microsoft Internet Explorer, Mozilla Firefox or Apple Safari.

Follow the steps below to log into your router.


1. Set up the TCP/IP Protocol in [Obtain an IP address automatically](#) mode on your computer.
2. Launch a web browser and type in <http://tplinkwifi.net> or <http://192.168.0.1>. Use **admin** for both username and password, and click [Login](#).

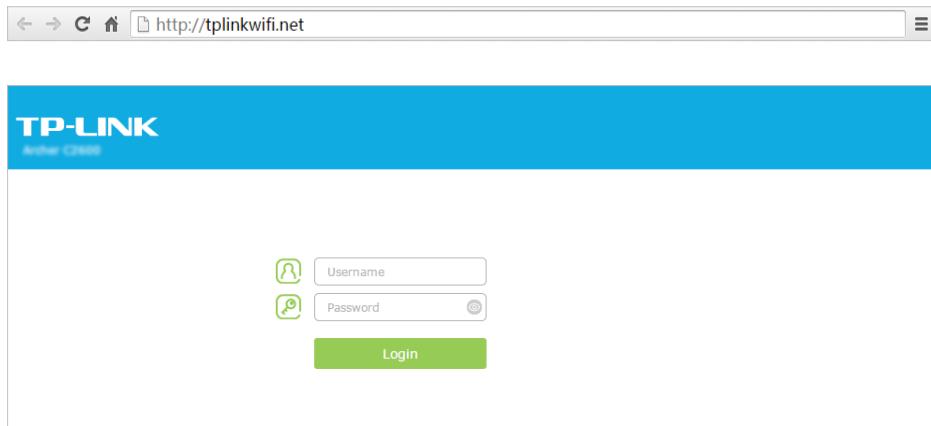

■ Note:

If the login window does not appear, please refer to [FAQ > Q3. I cannot login to the router's web management page, what can I do?](#)

3. Create a new username and password for subsequent login.

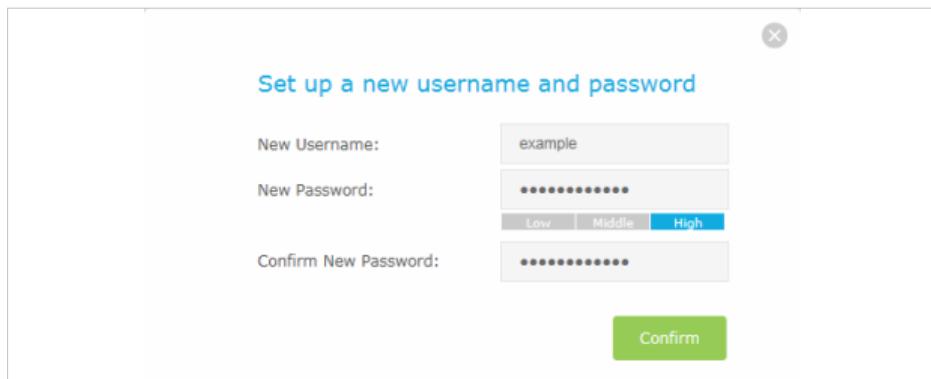

## Chapter 4

---

# Set Up Internet Connections

---

This chapter introduces how to connect your router to the Internet. The router is equipped with a web-based Quick Setup wizard. It has many ISP information built in, automates many of the steps and verifies that those steps have been successfully completed. Furthermore, you can also set up an IPv6 connection if your ISP provided IPv6 service.

This chapter contains the following sections:

- *Quick Setup*
- *Manually Configure Your Internet Connection Settings*
- *Setting Up an IPv6 Internet Connection*

## 4. 1. Quick Setup

The Quick Setup Wizard will guide you through the process to set up your router to access the Internet.


» **Tips:**

If you need the IPv6 Internet connection, please refer to the section of [4.3. Setting Up an IPv6 Internet Connection](#).

Follow the steps below to set up your router to access the Internet.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the router.
2. Go to [Quick Setup](#) on the top of the page.

3. Select your Region and Time Zone from the drop-down list and click [Next](#).

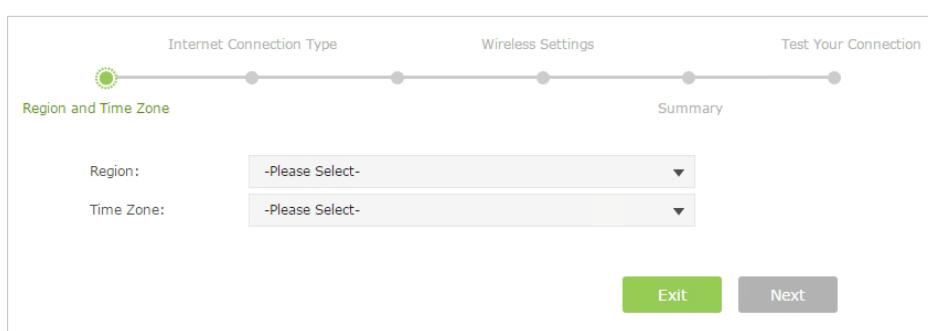

Internet Connection Type      Wireless Settings      Test Your Connection


Region and Time Zone      Summary

Region: -Please Select-      Time Zone: -Please Select-

Exit      Next

■ **Note:**

Per FCC regulations, all Wi-Fi products marketed in the U.S. must be fixed to the U.S. region only.

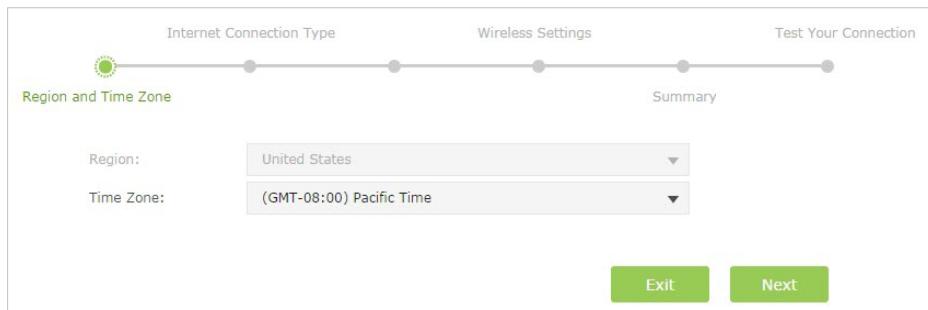

Internet Connection Type      Wireless Settings      Test Your Connection

Region and Time Zone      Summary


Region: United States      Time Zone: (GMT-08:00) Pacific Time

Exit      Next


4. Click [Auto Detect](#) and the router will detect your connection type automatically.

■ **Note:**


You can also choose the connection type manually. If you use DSL line and you are only provided an account name and a password by your ISP, choose PPPoE. If you use cable TV or fiber cable, choose Dynamic IP. If you are provided more information such as IP address, Subnet Mask and Default Gateway, choose Static IP. Contact your ISP if you are not sure about the Internet connection information.

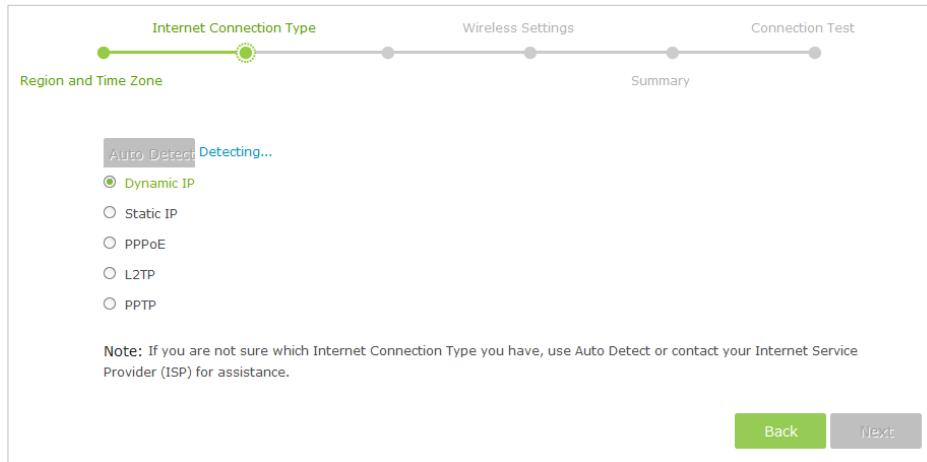


5. In this case, the router automatically detects Dynamic IP as the connection type. Click [Next](#).

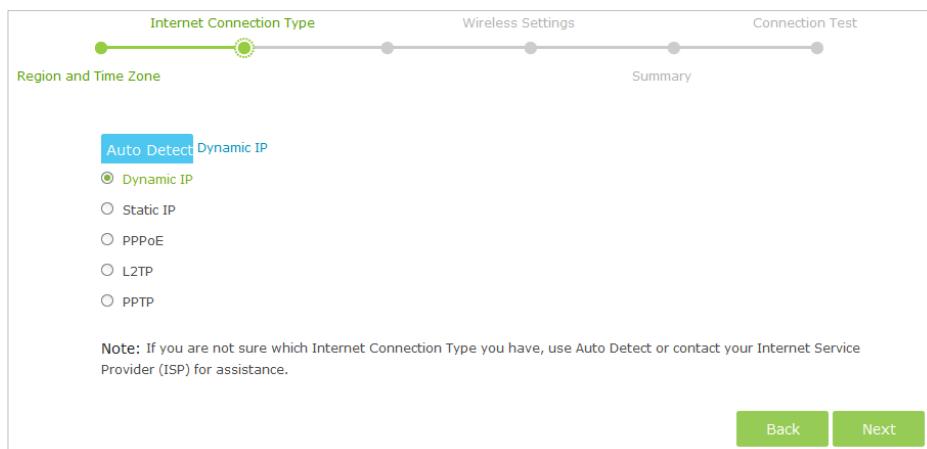

6. Follow the instructions on the page to decide whether to clone MAC Address. Click [Next](#).

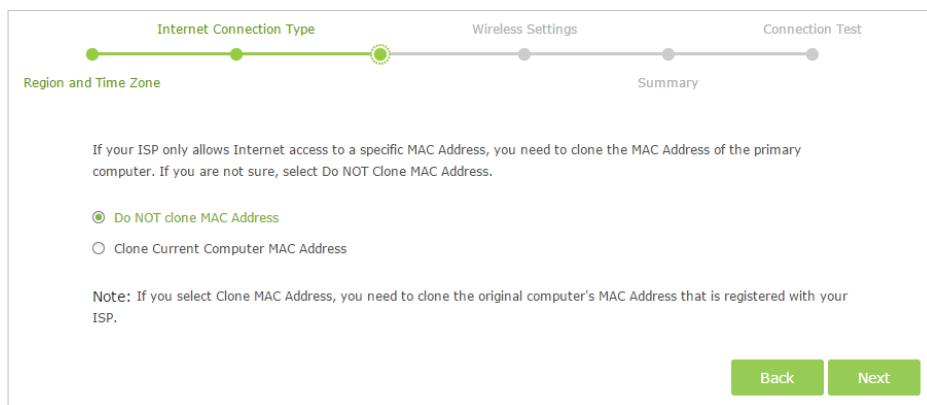


7. Configure your wireless settings and click [Next](#).

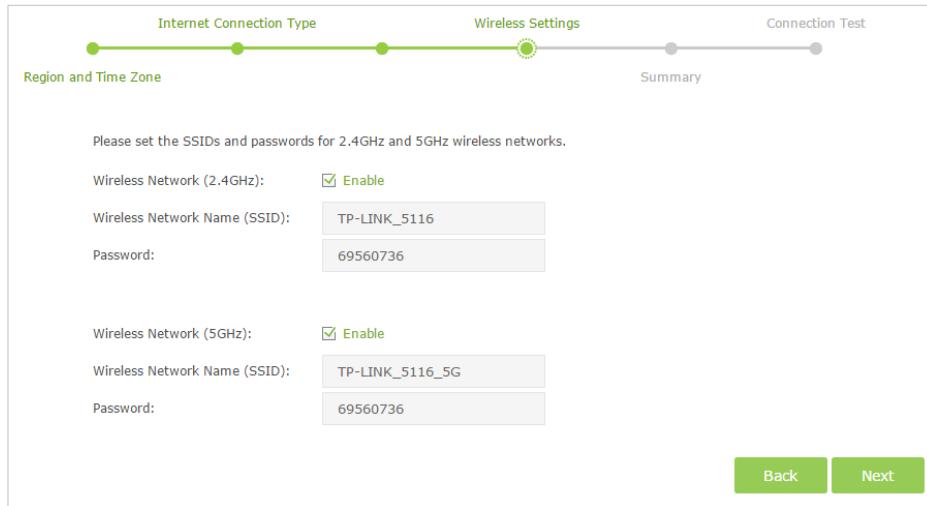

The screenshot shows the 'Wireless Settings' step of a four-step internet setup wizard. The progress bar at the top is green, with 'Region and Time Zone' and 'Internet Connection Type' completed, and 'Connection Test' pending. The 'Wireless Settings' step is currently active, indicated by a green circle on the bar. The main content area displays configuration for 2.4GHz and 5GHz wireless networks. For the 2.4GHz network, 'Enable' is checked, SSID is 'TP-LINK\_5116', and Password is '69560736'. For the 5GHz network, 'Enable' is checked, SSID is 'TP-LINK\_5116\_5G', and Password is '69560736'. At the bottom are 'Back' and 'Next' buttons.


**Note:**

1. You may customize your 2.4GHz/5GHz SSID and password. Once done, the wireless connection will disconnect automatically, and you must then use the new SSID/password to regain access to the Internet.
2. Tick **Hide SSID** if you want to hide this wireless network name.

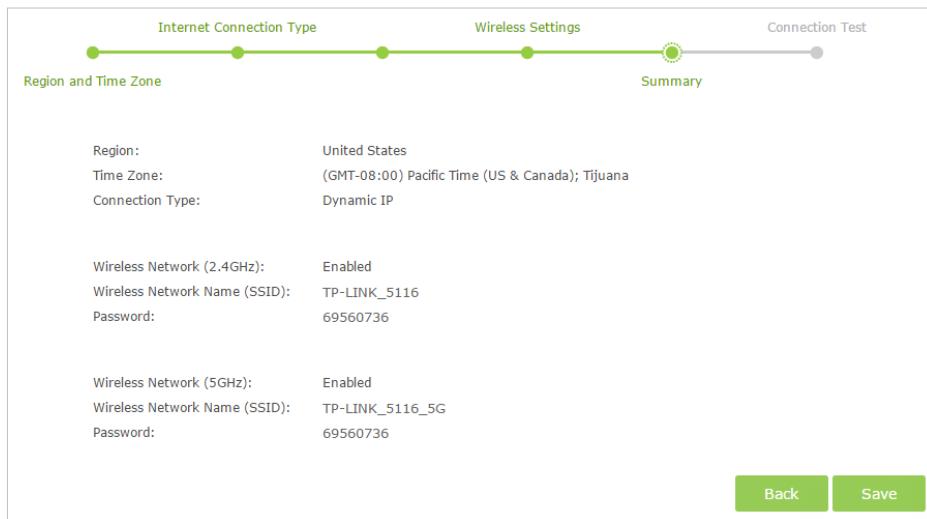**8. Confirm the information and click [Save](#).**

The screenshot shows the 'Summary' step of the internet setup wizard. The progress bar is now grey, with 'Region and Time Zone', 'Internet Connection Type', and 'Wireless Settings' completed, and 'Connection Test' pending. The 'Summary' step is active, indicated by a green circle on the bar. The main content area displays the confirmed configuration: Region is United States, Time Zone is (GMT-08:00) Pacific Time (US & Canada); Tijuana, and Connection Type is Dynamic IP. It also lists the wireless network settings for both 2.4GHz and 5GHz networks. At the bottom are 'Back' and 'Save' buttons.

9. Click **Test Internet Connection**. If you successfully connect to the Internet, the screen will display as follows.

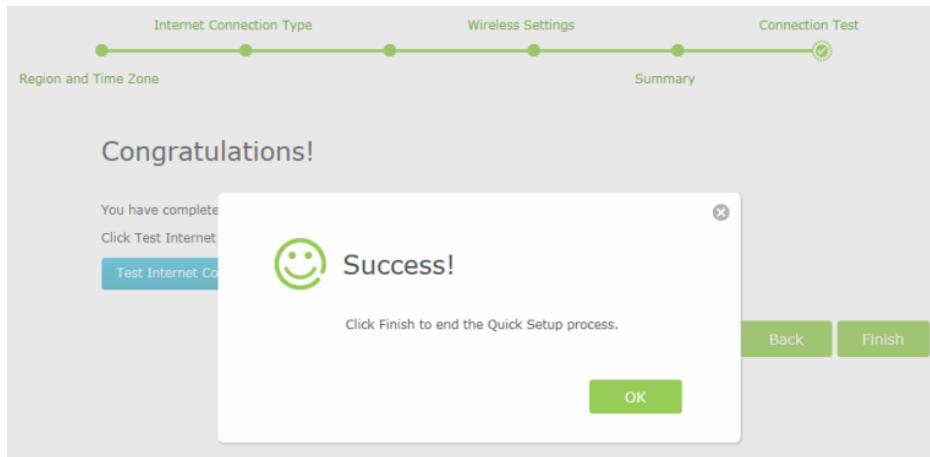

10. Now your computer and WiFi device can connect to the Internet!

 **Tips:**

You can connect your computer to the router's LAN port using an Ethernet cable to join the local area network. You can also find and select the wireless network name on your WiFi device to join the WiFi network.

## 4. 2. Manually Configure Your Internet Connection Settings

In this part, you can check your current Internet connection settings. You can also modify the settings according to the service information provided by your ISP.

Follow the steps below to check or modify your Internet connection settings.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the router.
2. Go to *Basic > Internet* on the left to enter the setting page.
3. Select your Internet connection type from the drop-down list.



 **Note:**

If you are unsure what your connection type is, click **Auto Detect**. Since different connection types need different cables and connection information, you can also refer to the demonstrations in Step 4 to judge your connection type.

4. Follow the instructions on the page to continue the configuration. Parameters on the figures are just used for demonstration.
  - 1) If you choose **Dynamic IP**, you need to select whether to clone the MAC address. Dynamic IP users are usually equipped with cable TV or fiber cable.

Internet


**AutoDetect**

Connection Type: **Dynamic IP**

Do NOT clone MAC Address  
 Clone Current Computer MAC Address

**Note:** If you are not sure which Internet Connection Type you have, use Auto Detect or contact your Internet Service Provider (ISP) for assistance.

**Save**

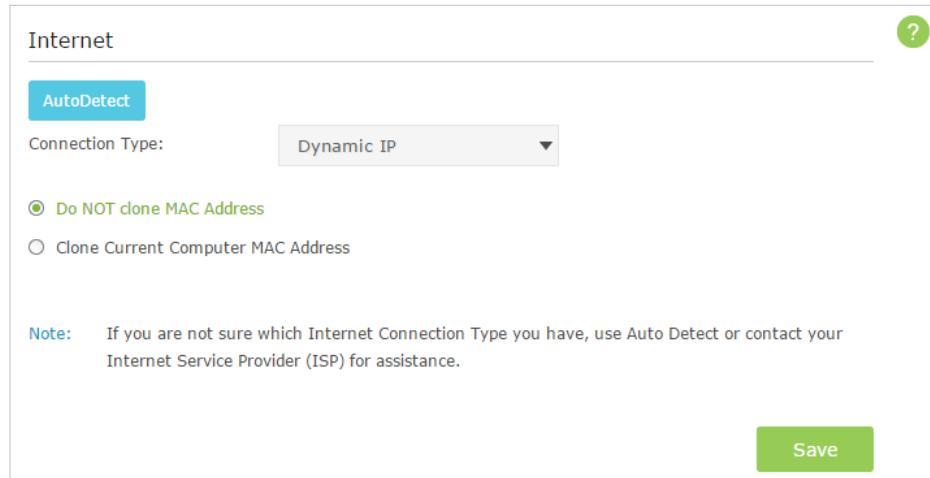

- 2) If you choose **Static IP**, enter the information provided by your ISP in the corresponding fields.

Internet

**AutoDetect**

Connection Type: **Static IP**

IP Address:

Subnet Mask:


Default Gateway:  (optional)

Primary DNS:  (optional)

Secondary DNS:  (optional)

**Note:** If you are not sure which Internet Connection Type you have, use Auto Detect or contact your Internet Service Provider (ISP) for assistance.

**Save**

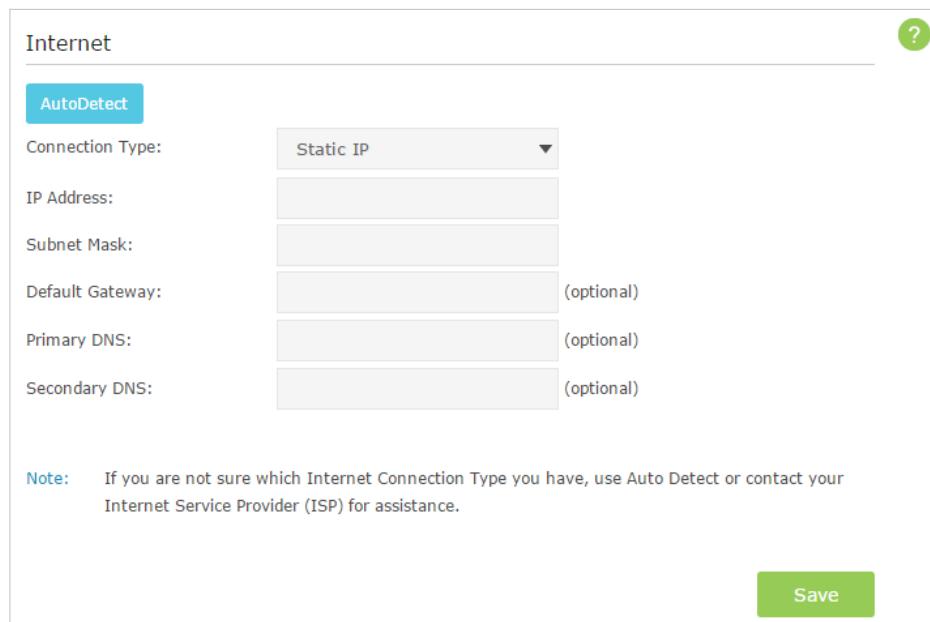

- 3) If you choose **PPPoE**, enter the **username** and **password** provided by your ISP. PPPoE users usually have DSL cable.

Internet

AutoDetect


Connection Type: PPPoE

Username: example

Password: \*\*\*\*\*

**Note:** If you are not sure which Internet Connection Type you have, use Auto Detect or contact your Internet Service Provider (ISP) for assistance.

**Save**

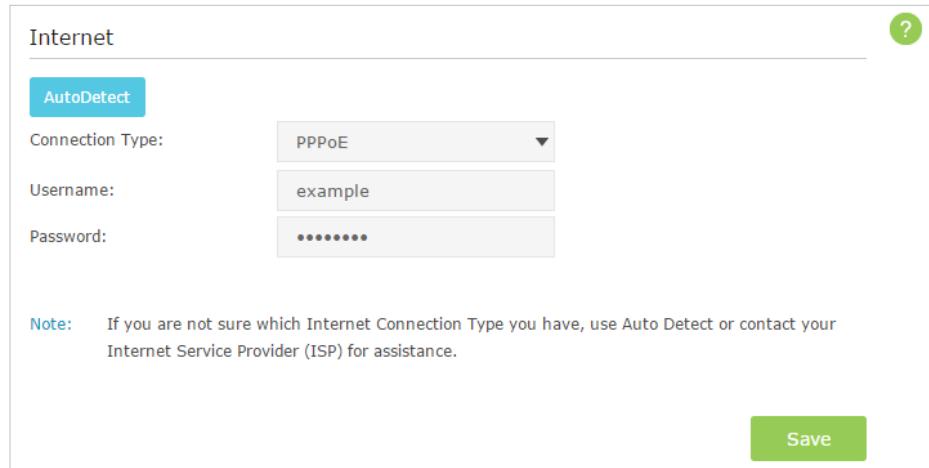

4) If you choose **L2TP**, enter the **username** and **password** and choose the **Secondary Connection** provided by your ISP. Different parameters are needed according to the Secondary Connection.

Internet

AutoDetect

Connection Type: L2TP

Username: L2TP


Password: \*\*\*\*\*

Secondary Connection:  Dynamic IP  Static IP

Server IP Address/Name: 192.168.202.254

**Note:** If you are not sure which Internet Connection Type you have, use Auto Detect or contact your Internet Service Provider (ISP) for assistance.

**Save**

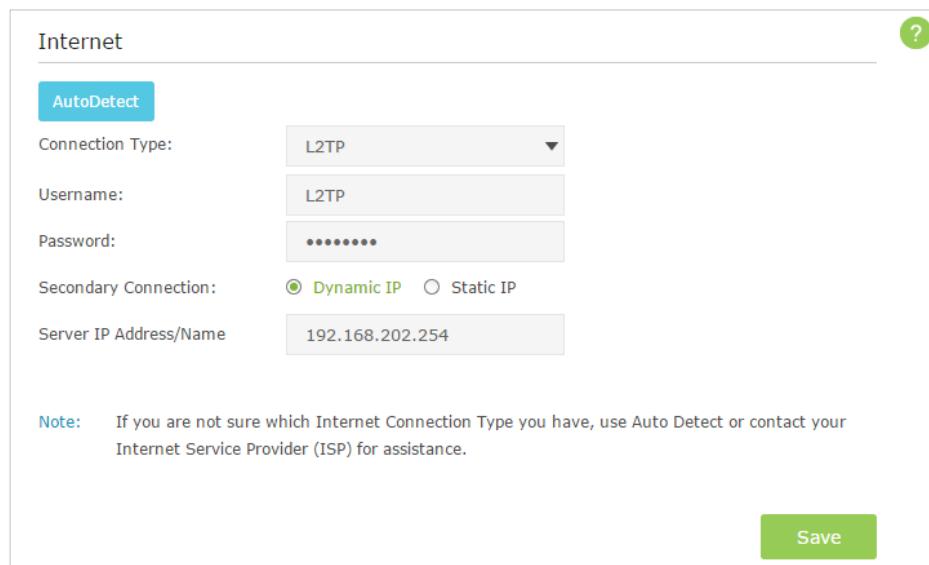

5) If you choose **PPTP**, enter the **username**, **password** and choose the **Secondary Connection** provided by your ISP. Different parameters are needed according to the Secondary Connection.

Internet

AutoDetect

Connection Type: PPTP

Username: PPTP

Password: \*\*\*\*\*

Secondary Connection:  Dynamic IP  Static IP

Server IP Address/Name: 192.168.202.154

**Note:** If you are not sure which Internet Connection Type you have, use Auto Detect or contact your Internet Service Provider (ISP) for assistance.


**Save**

5. Click **Save** to make the settings take effect. To check your Internet connection, click **Network Map** on the left of the page.

**Note:**

It may take 1-2 minutes to make the settings valid.

6. After the connection succeed, the screen will display as follows. Here we take PPPoE as an example.

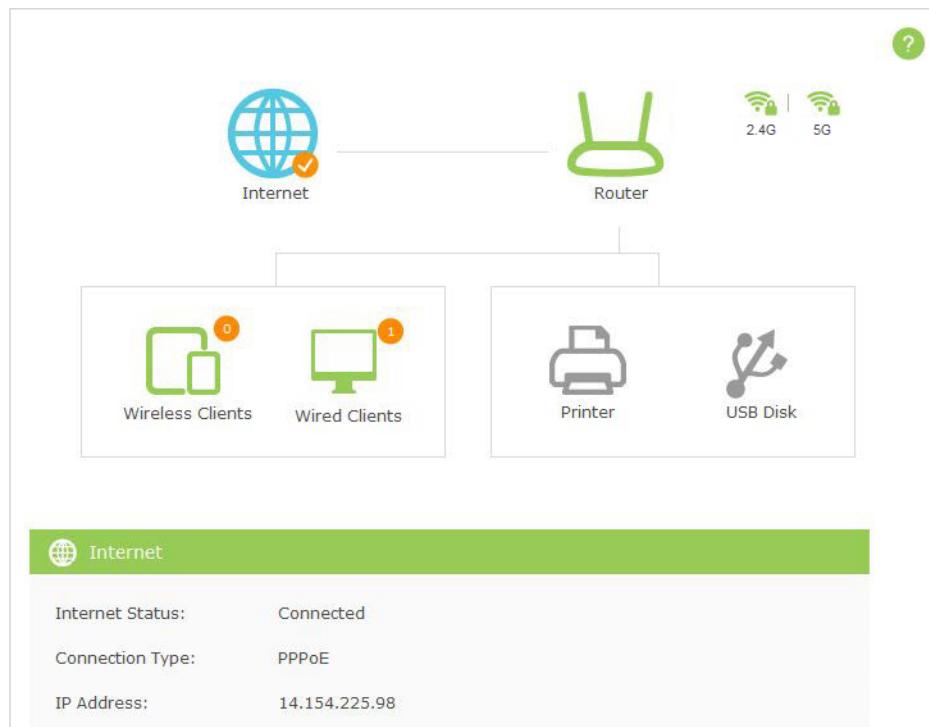


**Tips:**

- If you use **Dynamic IP** and **PPPoE** and you are provided any other parameters that are not required on the page, please go to **Advanced > Network > Internet** to complete the configuration.
- If you still cannot connect to the Internet, refer to **FAQ** for further instructions.

## 4.3. Setting Up an IPv6 Internet Connection

Your ISP provides information about one of the following Internet connection types: PPPoE, Dynamic IP(SLAAC/DHCPv6), Static IP, 6to4 tunnel.

1. Visit <http://tplinkwifi.net>, then log in with the password you set for the router.
2. Go to *Advanced > IPv6* to log into the configuration page.

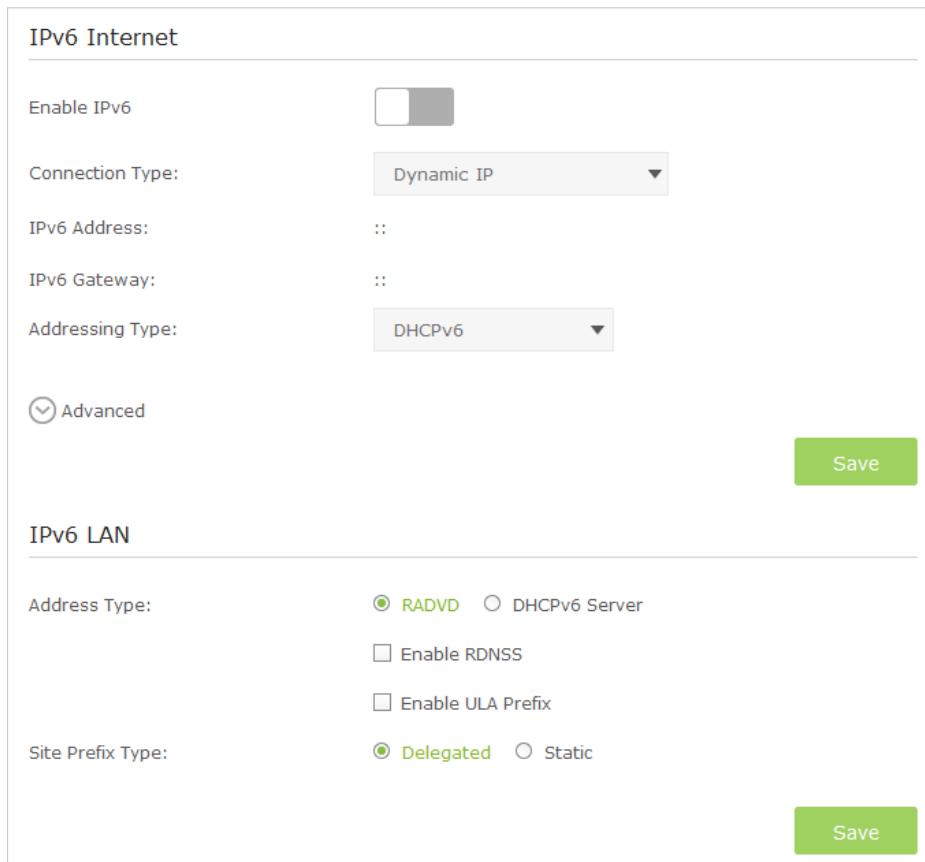

IPv6 Internet

Enable IPv6

Connection Type:

IPv6 Address: ::

IPv6 Gateway: ::

Addressing Type:

Advanced

Save

IPv6 LAN

Address Type:  RADVD  DHCPv6 Server


Enable RDNSS

Enable ULA Prefix

Site Prefix Type:  Delegated  Static

Save

3. Select the Internet connection type provided by ISP.

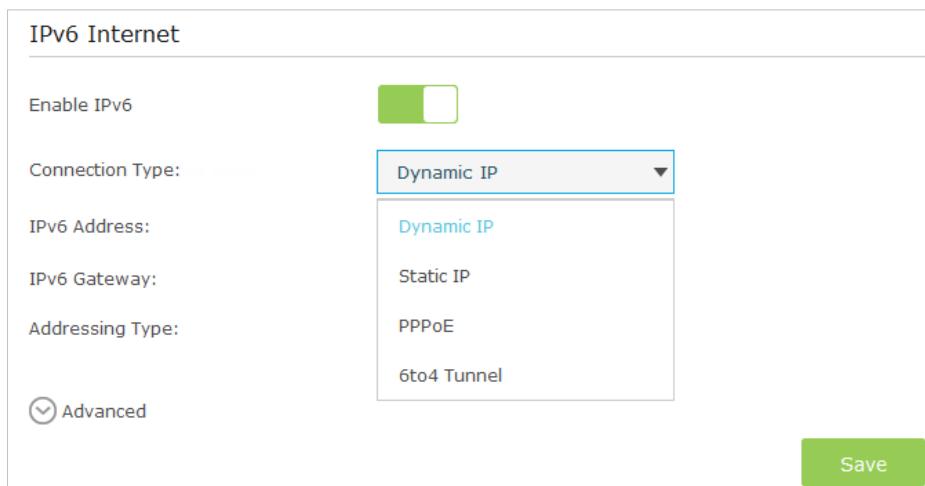

IPv6 Internet

Enable IPv6

Connection Type:

Dynamic IP

IPv6 Address:

IPv6 Gateway:

Addressing Type:

Advanced

Save

**» Tips:**

If you do not know what your Internet connection type is, contact your ISP or judge according to already known information provided by your ISP.

4. Fill in information as required by different connection type. (Red blanks must be filled.)

1) **Static IP:** Fill in blanks and click **Save**.

IPv6 Internet

Enable IPv6

Connection Type: **Static IP**

IPv6 Address: ::


IPv6 Gateway: :: (Optional)

IPv6 DNS Server: :: (Optional)

Secondary IPv6 DNS Server: :: (Optional)

Advanced

**Save**

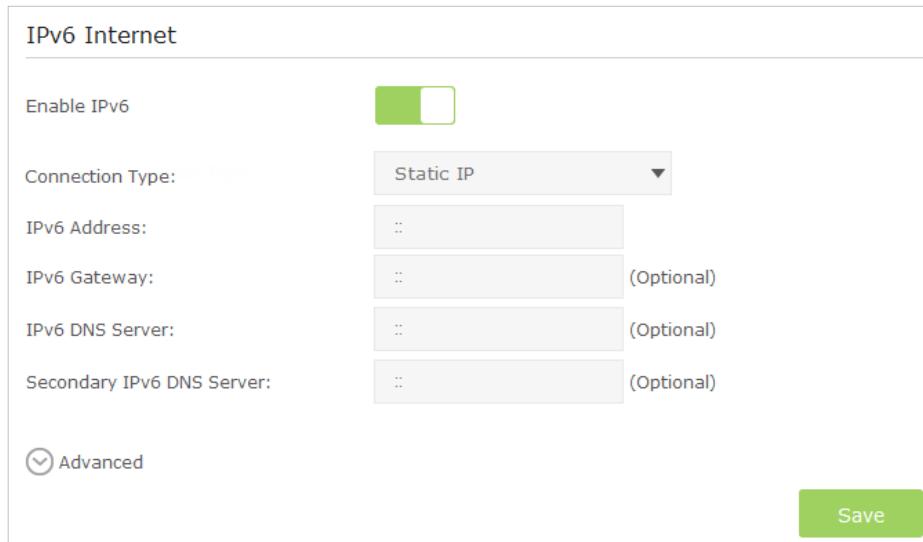

2) **Dynamic IP(SLAAC/DHCPv6):** Click **Advanced** to have more configuration if ISP requires. Click **Save** to save the settings and then click **Renew** to finish the configuration.

IPv6 Internet

Enable IPv6

Connection Type: **Dynamic IP**


IPv6 Address: ::

IPv6 Gateway: ::

Addressing Type: **DHCPv6**

Advanced

**Save**

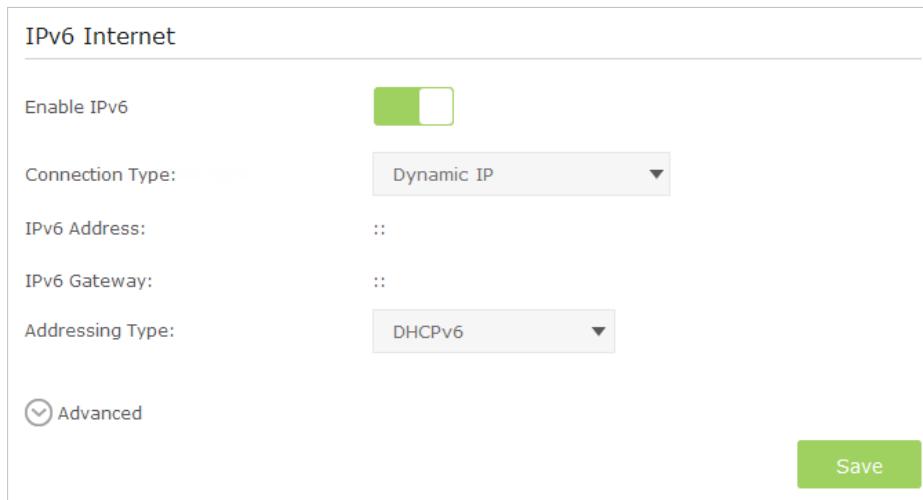

3) **PPPoE:** Fill in the Username and Password. Click **Advanced** to have more configuration if ISP requires. Click **Save** to save the settings and then click **Connect** to finish the configuration.

**IPv6 Internet**

Enable IPv6	<input checked="" type="checkbox"/>
Connection Type:	PPPoE
Username:	<input type="text"/>
Password:	<input type="password"/>
Confirm Password:	<input type="password"/>
Addressing Type:	DHCPv6
<input checked="" type="checkbox"/> Advanced <span style="float: right;"><input type="button" value="Save"/></span>	

4) **6to4 Tunnel:** An IPv4 Internet connection type is a prerequisite for this connection type. (4. 2) Click **Advanced** to have more configuration if ISP requires. Click **Save** to save the settings and then click **Connect** to finish the configuration.

**IPv6 Internet**

Enable IPv6	<input checked="" type="checkbox"/>
Connection Type:	6to4 Tunnel
IPv4 Address:	192.168.0.100
IPv4 Subnet Mask:	255.255.255.0
IPv4 Gateway:	192.168.0.1
<span style="float: right;"><input type="button" value="Save"/></span>	

5. Configure LAN ports. Windows users are recommended to choose from the first two types. Fill in Address Prefix provided by ISP, and click **Save** to save the settings.


☞ **Tips:**

Find **Help** on the management interface to know more about items.

**IPv6 LAN**

Address Type:	<input checked="" type="radio"/> RADVD <input type="radio"/> DHCPv6 Server
<input type="checkbox"/> Enable RDNSS	
<input type="checkbox"/> Enable ULA Prefix	
Site Prefix Type:	<input checked="" type="radio"/> Delegated <input type="radio"/> Static
<span style="float: right;"><input type="button" value="Save"/></span>	

6. Click **Status** to check whether you succeed or not. The following figure is an example of a successful PPPoE configuration.

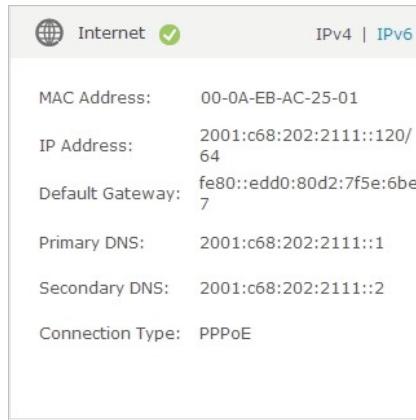

» **Tips:**

Visit [FAQ](#) if there is no Internet connection.

## Chapter 5

---

# Guest Network

---

This function allows you to provide Wi-Fi access for guests without disclosing your main network. When you have guests in your house, apartment, or workplace, you can create a guest network for them. In addition, you can limit the network authorities for guests to ensure network security and privacy.

This chapter contains the following sections:

- [\*Create Guest Network\*](#)
- [\*Customize Guest Network Options\*](#)

## 5. 1. Create Guest Network

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to *Advanced > Guest Network*.
3. Create a 2.4GHz or 5GHz guest network according to your needs.
  - 1) Click **2.4GHz, 5GHz** and select **Enable**.
  - 2) Set an easy-to-identify SSID. Don't select **Hide SSID** unless you want your guests and other people to manually input this SSID for Wi-Fi access.
  - 3) Set **Security** to **WPA/WPA2 Personal**, keep the default **Version** and **Encryption** values, and set an easy-to-remember password.

Wireless

2.4GHz | 5GHz

Enable

Wireless Network Name (SSID): My\_Guests  Hide SSID

Security:  None  WPA/WPA2 Personal

Version:  Auto  WPA2-PSK

Encryption:  Auto  TKIP  AES

Password: Password\_1234

Save


4. Click **Save**. Now your guests can access your guest network using the SSID and password you set!

⌚ Tips:

To view guest network information, go to *Advanced > Status* and find the **Guest Network** section.

## 5. 2. Customize Guest Network Options

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the router.
2. Go to *Advanced > Guest Network*.
3. Customize guest network options according to your needs.

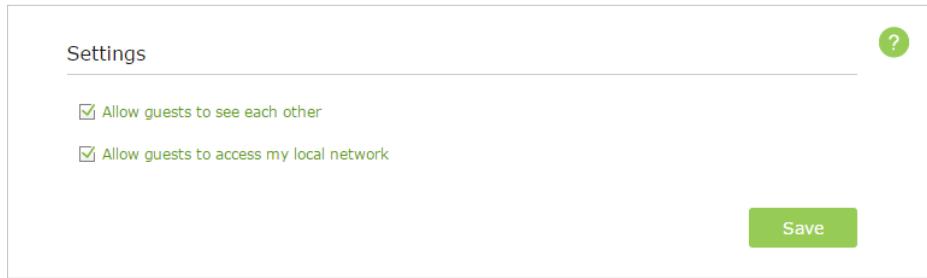

- **Allow guests to see each other**

Select this checkbox to allow the clients in your guest network to access each other.

- **Allow guests to access my local network**

Select this checkbox to allow the clients in your guest network to access your local network, not just Internet access.

4. Click **Save**. Now users in your guest network can enjoy only the network authorities you assigned!

⌚ **Tips:**

To view guest network information, go to [Advanced > Status](#) and find the [Guest Network](#) section.

## Chapter 6

---

# USB Application

---

This chapter describes how to share and access USB devices connected to the router among different clients.

The router only supports USB external flash drives, hard drives and USB printers, and does not support USB 3G/4G modems.

This chapter contains the following sections:

- [\*Local Storage Sharing\*](#)
- [\*Customize Your Settings\*](#)
- [\*Media Sharing\*](#)
- [\*Printer Sharing\*](#)

## 6.1. Local Storage Sharing

Share your USB storage devices with different users on the network.

### 6.1.1. Access the USB disk

#### 1. Connect Your USB Disk

Insert your USB storage device into the router's USB port directly or using a USB cable. Wait several seconds until the USB LED becomes solid on.

⌚ Tips:

- If you use USB hubs, make sure no more than four devices are connected to the router.
- If the USB storage device requires using bundled external power, make sure the external power has been connected.
- If you use a USB hard drive, make sure its file system is FAT32, NTFS.
- Before you physically disconnect a USB device from the router, safely remove it to avoid data damage: Go to [Advanced > USB Settings > Device Settings](#) and click  Safety Remove.

#### 2. Access Your USB Disk

By default all the network clients can access all folders on your USB disk. Refer to the following table for access instructions. You can also customize your sharing content and set a sharing account referring to [6.1.2. Customize Your Settings](#).

Windows computer	1. Press <b>Windows</b> (Windows logo)+ R on the keyboard (or select <b>Start &gt; Run</b> ). 2. Type the server address <b>\\\tplinkwifi.net</b> or <b>ftp://tplinkwifi.net</b> in the dialog box. 3. Click <b>OK</b> .
Mac	1. Select <b>Go &gt; Connect to Server</b> . 2. Type the server address <b>smb://tplinkwifi.net</b> or <b>ftp://tplinkwifi.net</b> . 3. Click <b>Connect</b> .
Pad	Use a third-party app for network files management.

⌚ Tips:

You can also access all folders by using your Network/Media Server Name. Refer to [To Customize the Address of the USB Disk](#) to learn more.


### 6.1.2. Customize Your Settings

#### ➤ To Only Share Specific Content

By default, **Share All** is enabled so all content on the USB disk is shared. If you want to only share specific folders, follow the steps below:

1. Visit <http://tplinkwifi.net>, then log in with the username and password you set for the router.

2. Go to *Basic* or *Advanced* > *USB Settings* > *Sharing Access*. Focus on the **Folder Sharing** section. Click the button to disable **Share All**, then click **Add** to add a new sharing folder.

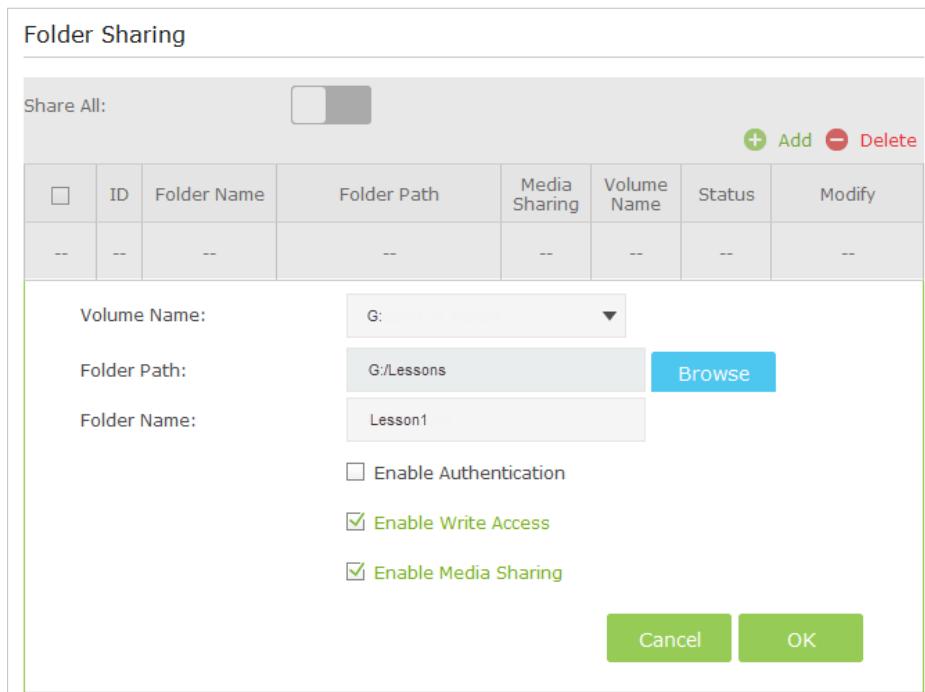

3. Select the **Volume Name** and **Folder Path**, then enter a **Folder Name** as you like.

4. Decide the way you share the folder:

- **Allow Guest Network Access:** If you select this check box, guest network can access to the this folder.
- **Enable Authentication:** Select to enable authentication for this folder sharing, and you will be required to use a username and password to access the USB disk. Refer to [To Set up Authentication for Data Security](#) to learn more.
- **Enable Write Access:** If you select this check box, network clients can modify this folder.
- **Enable Media Sharing:** Select to enable media sharing for this folder, and you can view photos, play music and watch movies stored on the USB disk directly from DLNA-supported devices. Click [Media Sharing](#) to learn more.

5. Click **OK**.


🕒 **Tips:**

The router can share 32 volumes at most. You can click  on the page to detach the corresponding volume you do not need to share.

➤ **To Set up Authentication for Data Security**

If you enable **Authentication**, network clients will be required to enter the username and password you set when accessing the USB disk.

1. Visit <http://tplinkwifi.net>, then log in with the username and password you set for the router.
2. Go to [Advanced](#) > [USB Settings](#) > [Sharing Access](#). Focus on the [Sharing Account](#) section.

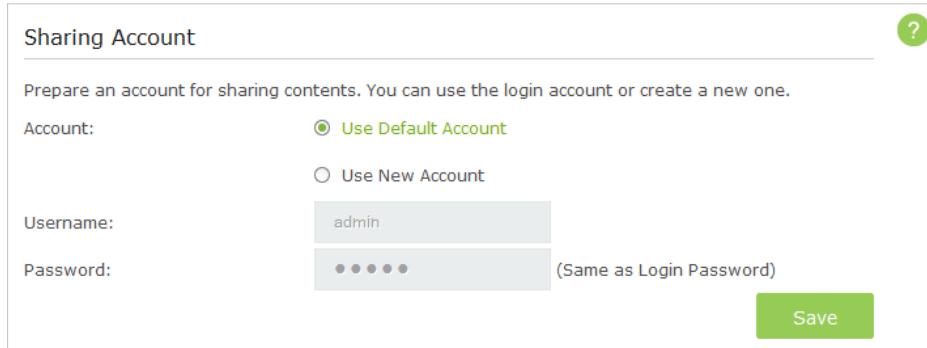

Sharing Account

Prepare an account for sharing contents. You can use the login account or create a new one.

Account:  Use Default Account  
 Use New Account

Username: admin

Password:  (Same as Login Password)

Save

3. Choose to use the default Account (admin) or use a new account and click [Save](#).
4. Enable [Authentication](#) to apply the account you just set.
  - If you leave [Share All](#) enabled, click the button to enable [Authentication](#) for all folders.



Folder Sharing

Share All:

Enable Authentication:

- If [Share All](#) is disabled, enable [Authentication](#) for specific folders.

➤ **To Customize the Address of the USB Disk**

You can customize the server name and use the name to access your USB disk.

1. Visit <http://tplinkwifi.net>, then log in with the username and password you set for the router.
2. Go to [Advanced](#) > [USB Settings](#) > [Sharing Access](#). Focus on the [Sharing Settings](#) section
3. Make sure [Network Neighborhood](#) is ticked, and enter a Network/Media Server Name as you like, such as [My-Share](#), then click [Save](#).

Sharing Settings

Network/Media Server Name:

Enable	Access Method	Access	Port
<input checked="" type="checkbox"/>	Media Server	--	--
<input checked="" type="checkbox"/>	Network Neighborhood	\My-share	--
<input checked="" type="checkbox"/>	FTP	ftp://My-share:21	<input type="text" value="21"/>
<input type="checkbox"/>	FTP(via Internet)	ftp://0.0.0.0:21	21

4. Now you can access the USB disk with [\\My-Share \(smb://My-Share for Mac\)](\\My-Share).

## 6.2. Remote Access via FTP Server

You can access your USB disk outside the local area network.

For example:

- Share photos and other large files with your friends without logging in to (and paying for) a photo-sharing site or email system.
- Get a safe backup for the materials for a presentation.
- Remove the files on your camera's memory card from time to time during the journey.

**Note:**

If your ISP assigns a private WAN IP address (such as 192.168.x.x or 10.x.x.x), you cannot use this feature because private addresses are not routed on the Internet.

### 6.2.1. Access the USB disk

#### 1. Connect Your USB Disk

Insert your USB storage device into the router's USB port directly or using a USB cable. Wait several seconds until the USB LED becomes solid on.


 **Tips:**

- If you use USB hubs, make sure no more than four devices are connected to the router.
- If the USB storage device requires using bundled external power, make sure the external power has been connected.
- If you use a USB hard drive, make sure its file system is FAT32,NTFS.
- Before you physically disconnect a USB device from the router, safely remove it to avoid data damage: Go to [Advanced > USB Settings > Device Settings](#) and click  **Safety Remove**.

#### 2. Enable Authentication for Data Security


It is strongly recommended that you set and apply a sharing account for data security.

- 1) Visit <http://tplinkwifi.net>, then log in with the username and password you set for the router.
- 2) Go to *Advanced > USB Settings > Sharing Access*.
- 3) Choose to **Use default Account** (admin) or **Use New Account** and click **Save**.

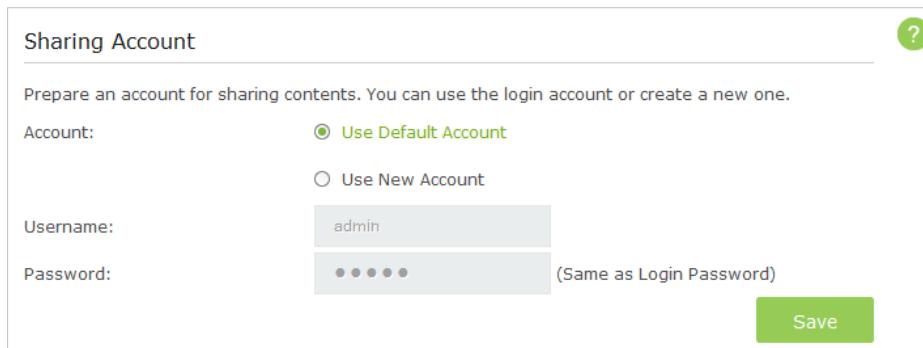

The screenshot shows the 'Sharing Account' configuration page. It includes fields for 'Account' (radio buttons for 'Use Default Account' and 'Use New Account', with 'Use Default Account' selected), 'Username' (text input 'admin'), 'Password' (text input showing '•••••' and a note '(Same as Login Password)'), and a 'Save' button.

- 4) Enable **Authentication** to apply the sharing account.
  - If you leave **Share All** enabled, click the button to enable **Authentication** for all folders.

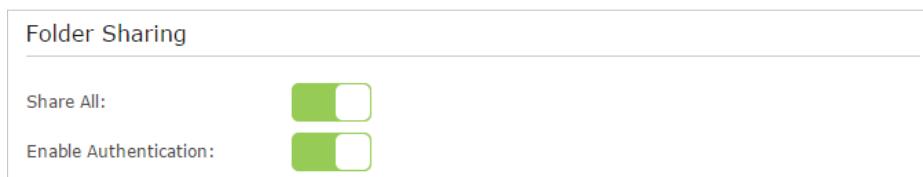


The screenshot shows the 'Folder Sharing' configuration page. It includes two toggle buttons: 'Share All' (disabled) and 'Enable Authentication' (disabled).

- If **Share All** is disabled, enable **Authentication** for specific folders.

### 3. Enable the FTP (via Internet)

Select the check box to enable **FTP (via Internet)**, then click **Save**.

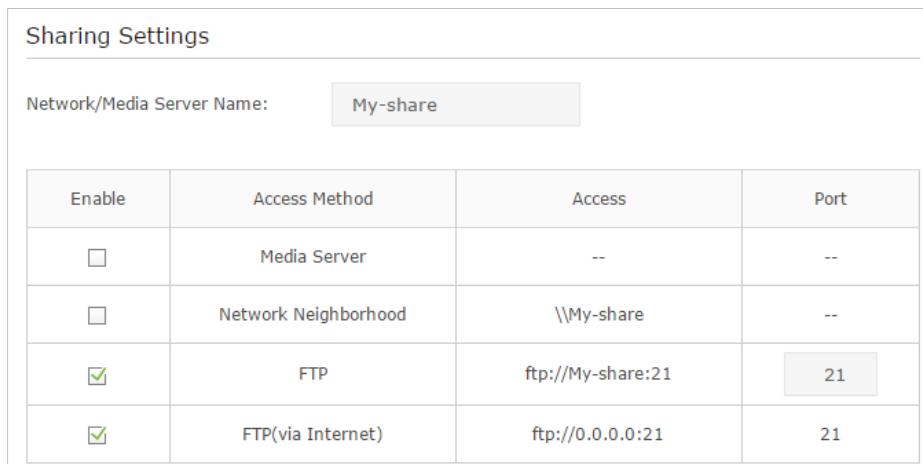

The screenshot shows the 'Sharing Settings' configuration page. It includes a 'Network/Media Server Name' input field set to 'My-share' and a table for sharing methods.

Enable	Access Method	Access	Port
<input type="checkbox"/>	Media Server	--	--
<input type="checkbox"/>	Network Neighborhood	\My-share	--
<input checked="" type="checkbox"/>	FTP	ftp://My-share:21	21
<input checked="" type="checkbox"/>	FTP(via Internet)	ftp://0.0.0.0:21	21

#### 4. Access Your USB Disk via Internet

Now different clients with Internet connection can access the USB disk:

<b>Computer</b>	<ul style="list-style-type: none"><li>• To download, open a web browser and type the server address <code>ftp://&lt;WAN IP address of the router&gt;:&lt;port number&gt;</code> (such as <code>ftp://59.40.2.243:21</code>), or if you set up a domain name for your router you can type the server address <code>ftp://&lt;domain name of the router&gt;:&lt;port number&gt;</code> (such as <code>ftp://MyDomainName:21</code>) in the address bar, then press <b>Enter</b> on the keyboard.</li><li>• To upload, use a third-party app for network files management.</li></ul>
<b>Pad</b>	<ul style="list-style-type: none"><li>• Use a third-party app for network files management.</li></ul>

⌚ **Tips:**

Go to [12.8. Schedule Your Wireless Function](#) to learn how to set up a domain name for your router.

#### 6.2.2. Customize Your Settings

##### ➤ To Only Share Specific Content

By default, **Share All** is enabled so all content on the USB disk is shared. If you want to only share specific folders, follow the steps below:

1. Visit <http://tplinkwifi.net>, then log in with the username and password you set for the router.
2. Go to **Basic** or **Advanced** > **USB Settings** > **Sharing Access**. Focus on the section of **Folder Sharing**. Click the button to disable **Share All**, then click **Add** to add a new sharing folder.
3. Select the **Volume Name** and **Folder Path**, then specify the **Folder Name** as you like.
4. Select **Enable Authentication**. If you allow network clients to modify this folder, select **Enable Write Access**.