



Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: Remote Control

Test Model: AMT-AKB75855501-MR20GA-BLVC-ALL

Environmental Conditions

Temperature:	23.5℃
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	monkey.Li
Supervised by:	Libin





A.1 6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	6 dB Bandwidth (MHz)	Limit 6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.69	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.701	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.703	0.5	Pass






Test Graphs

6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

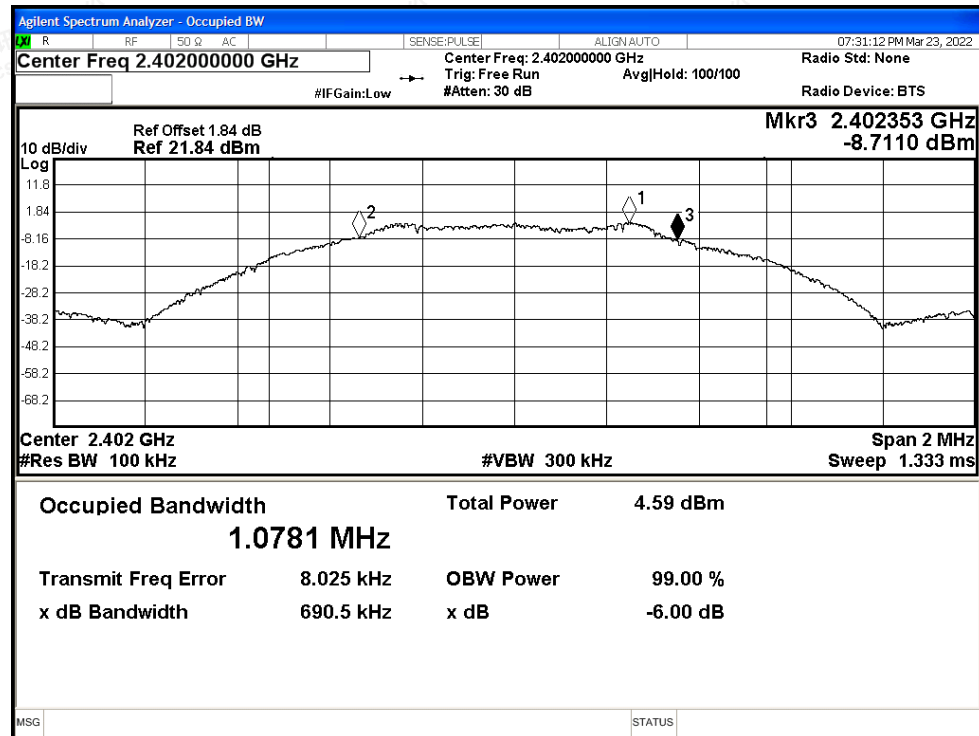

6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

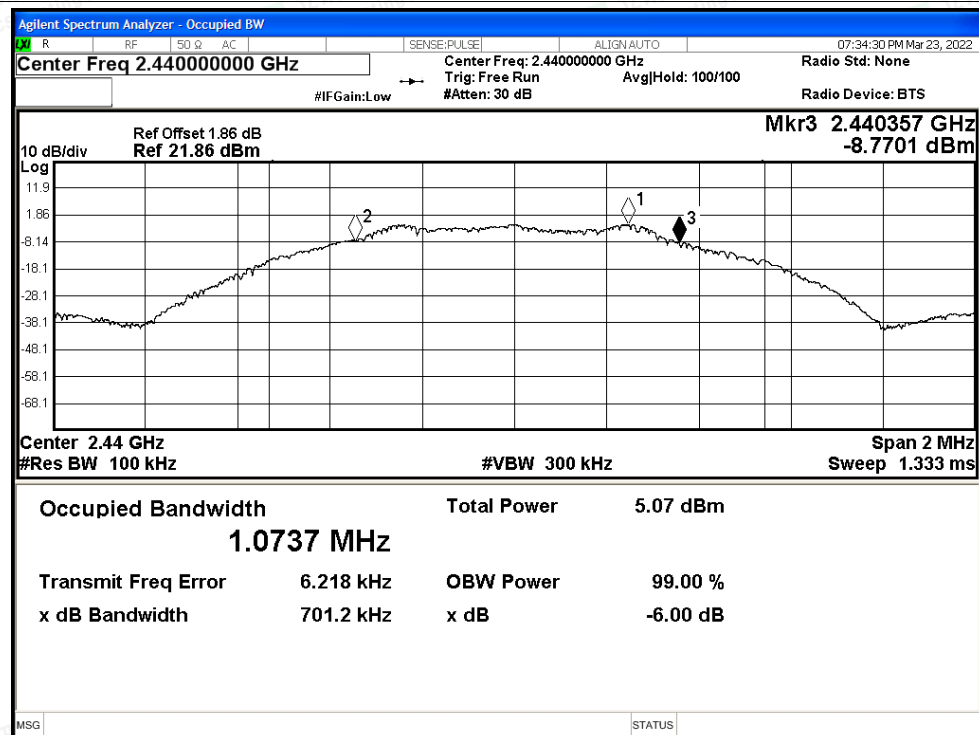


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

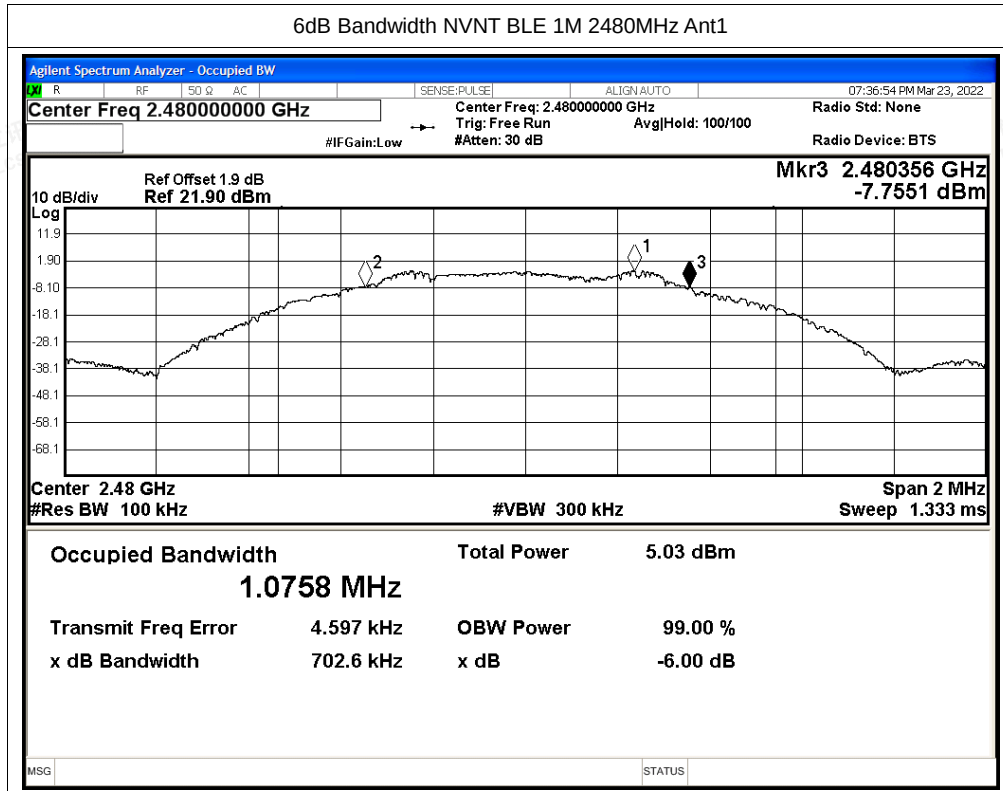



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.11	30	Pass
NVNT	BLE 1M	2440	Ant1	-0.67	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.68	30	Pass






Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

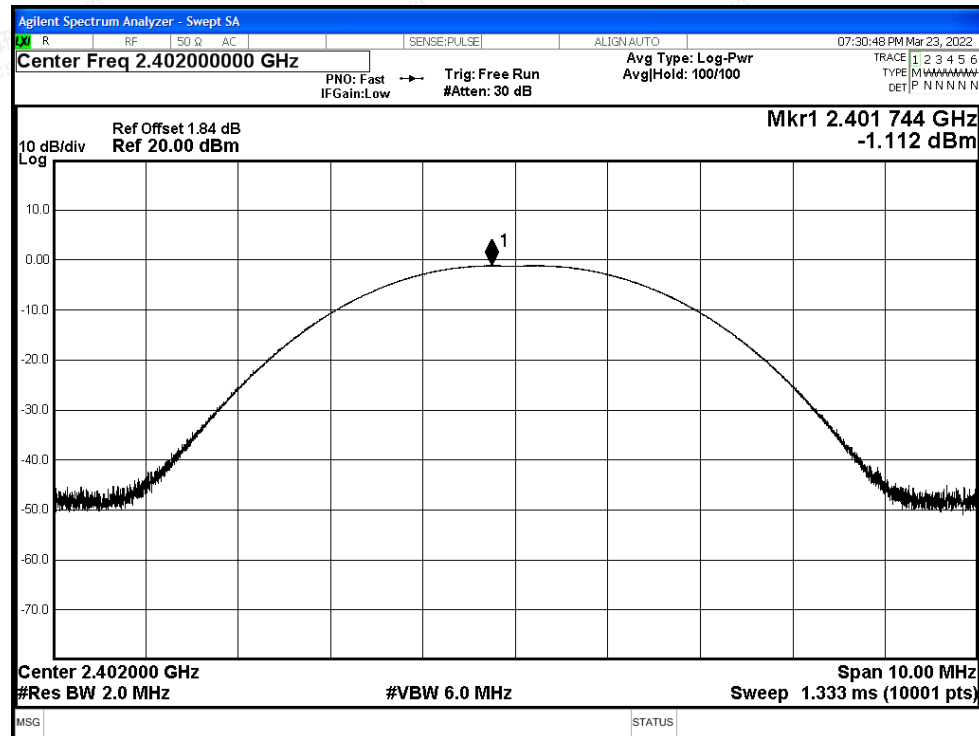

Power NVNT BLE 1M 2440MHz Ant1

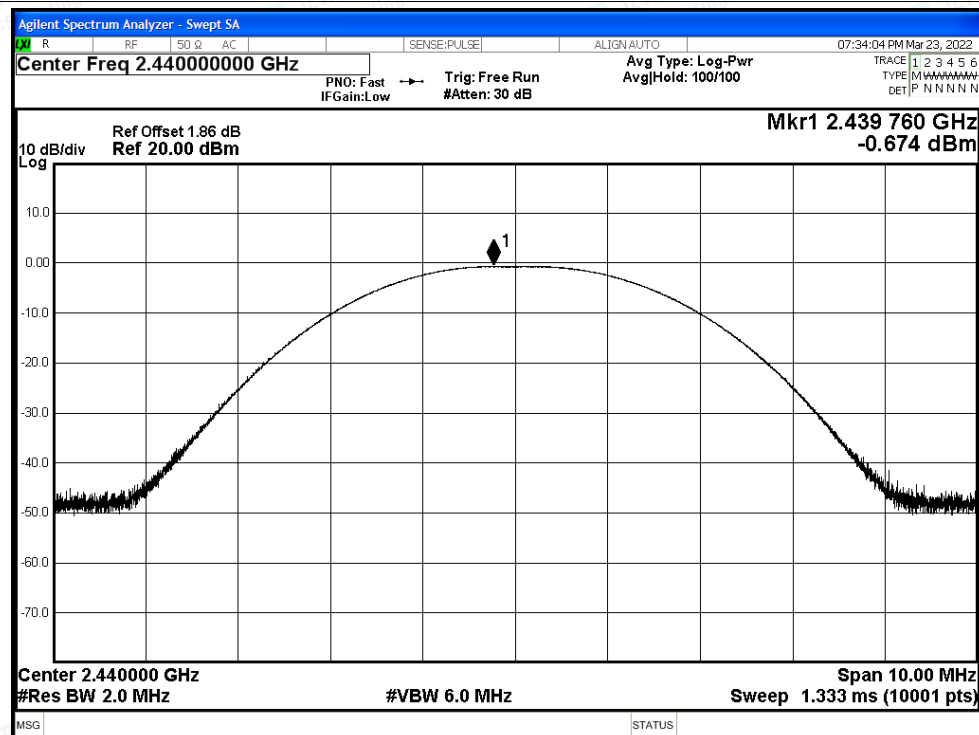


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity


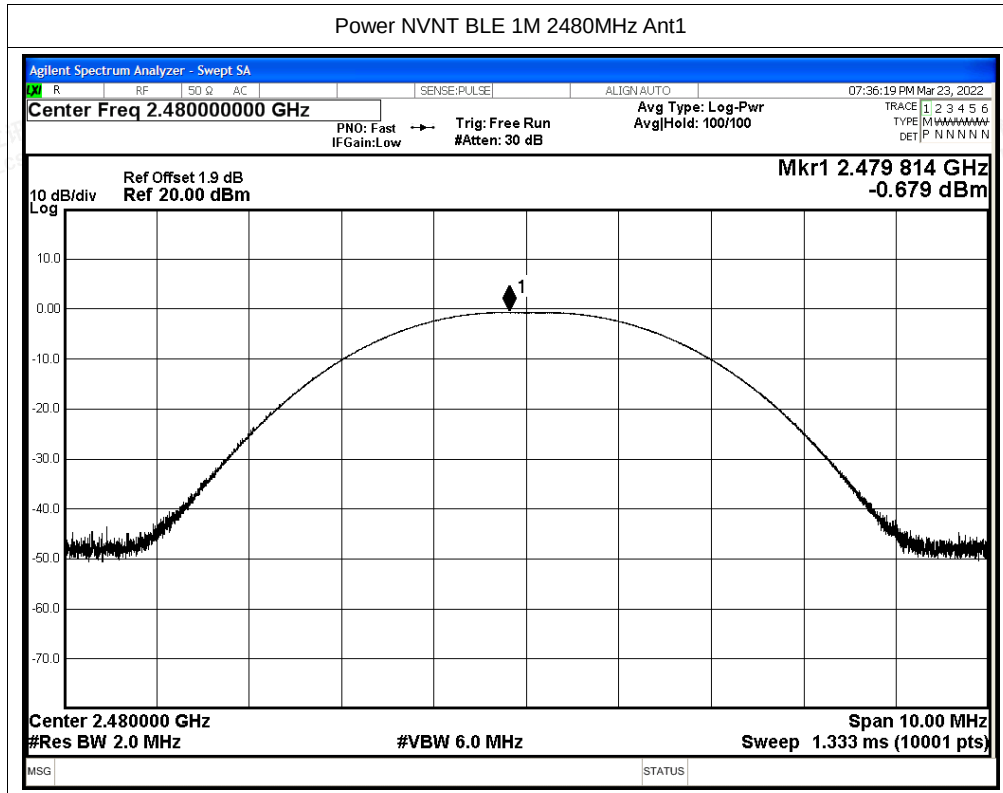





A.3 Maximum Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-16.28	0	-16.28	8	Pass
NVNT	BLE 1M	2440	Ant1	-15.86	0	-15.86	8	Pass
NVNT	BLE 1M	2480	Ant1	-15.82	0	-15.82	8	Pass



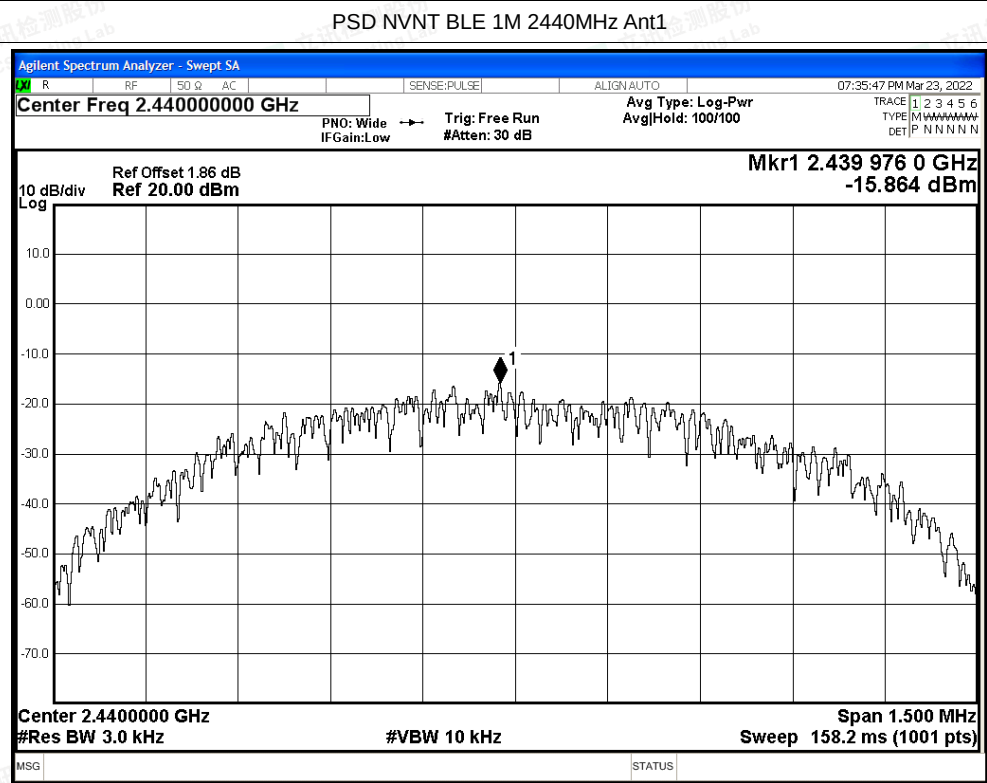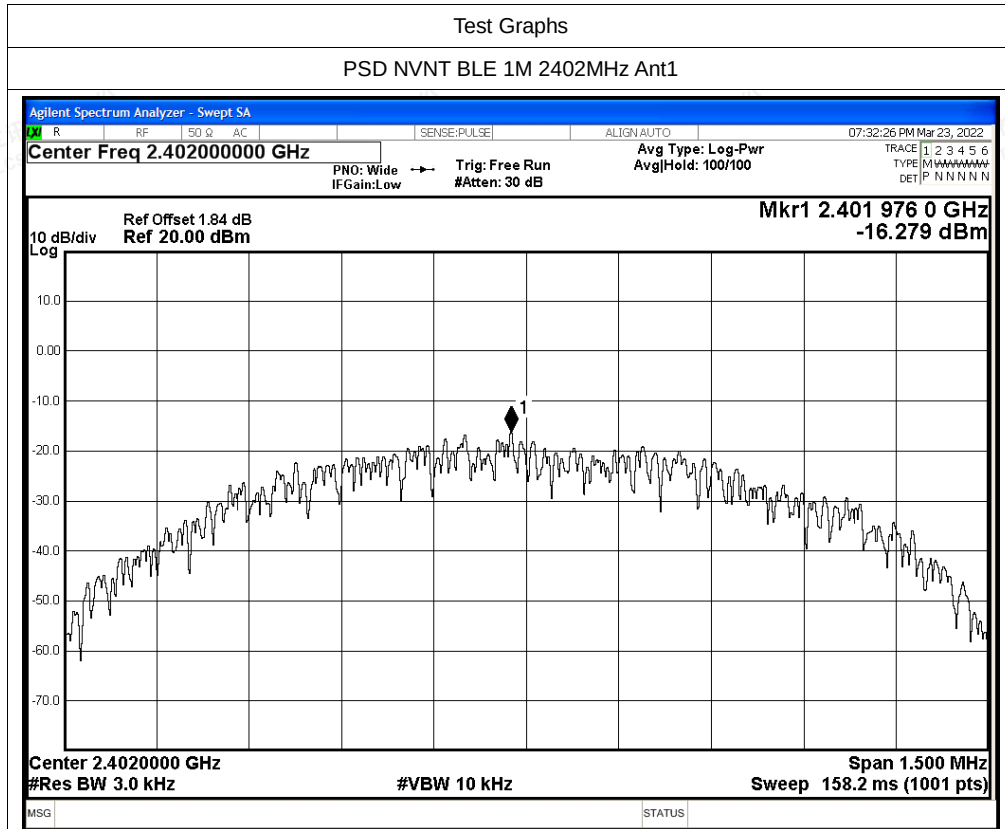


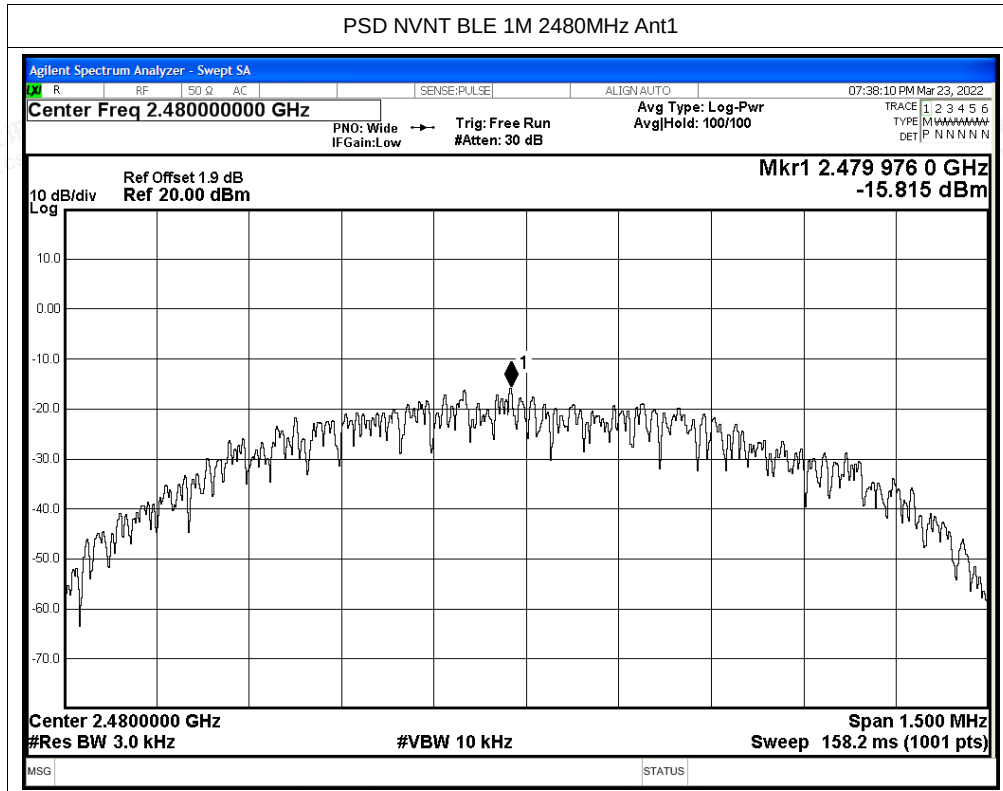






A.4 Band edge measurements

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.87	-20	Pass
NVNT	BLE 1M	2480	Ant1	-56.07	-20	Pass



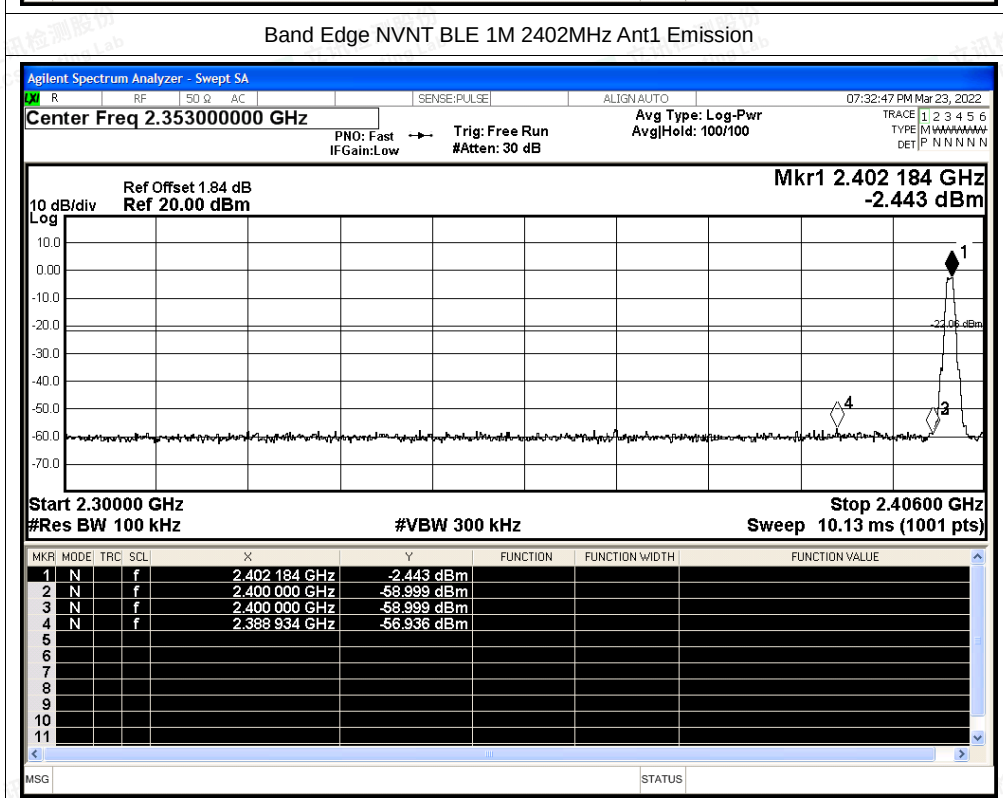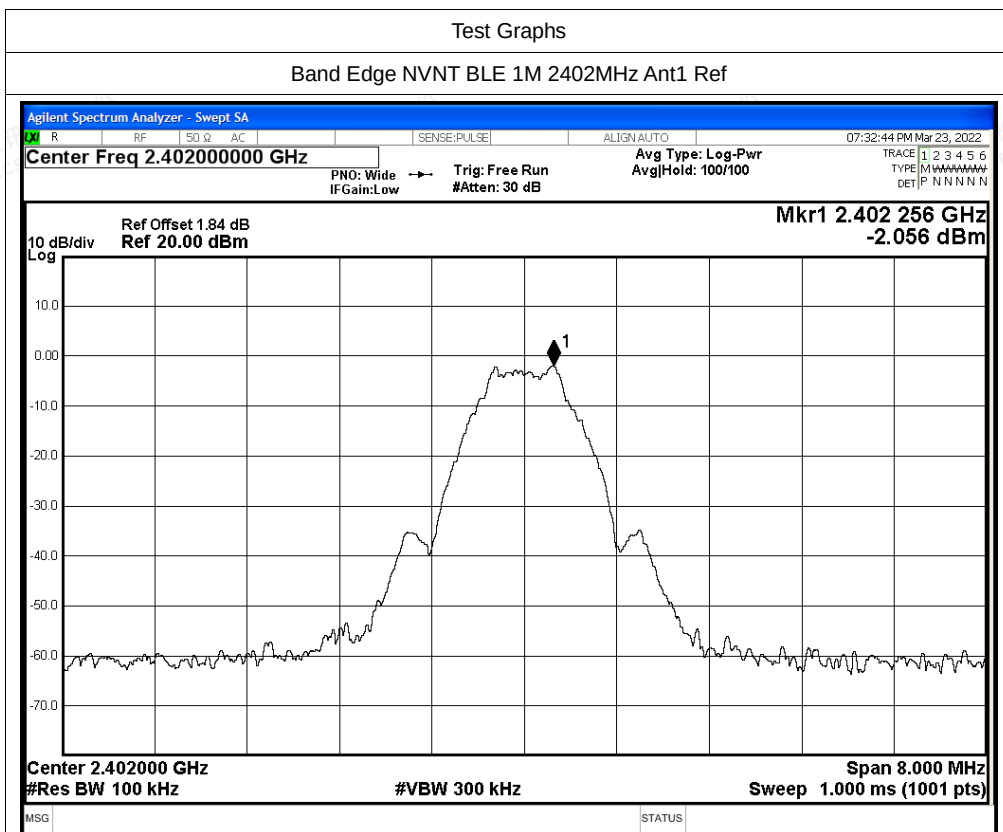

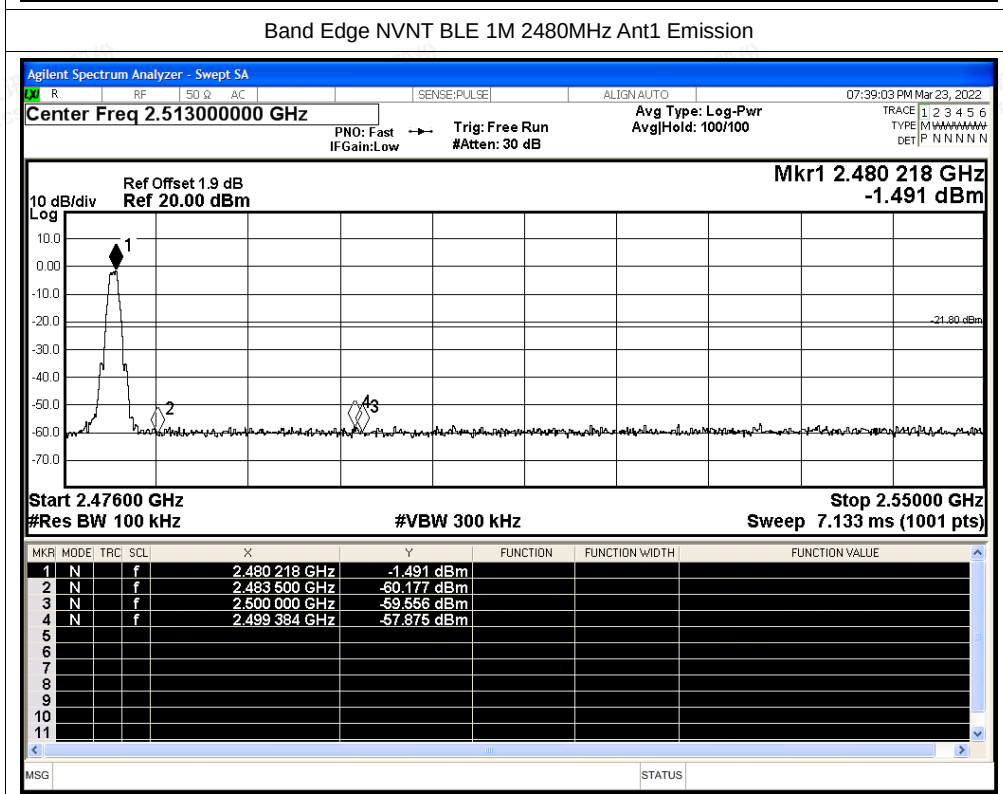
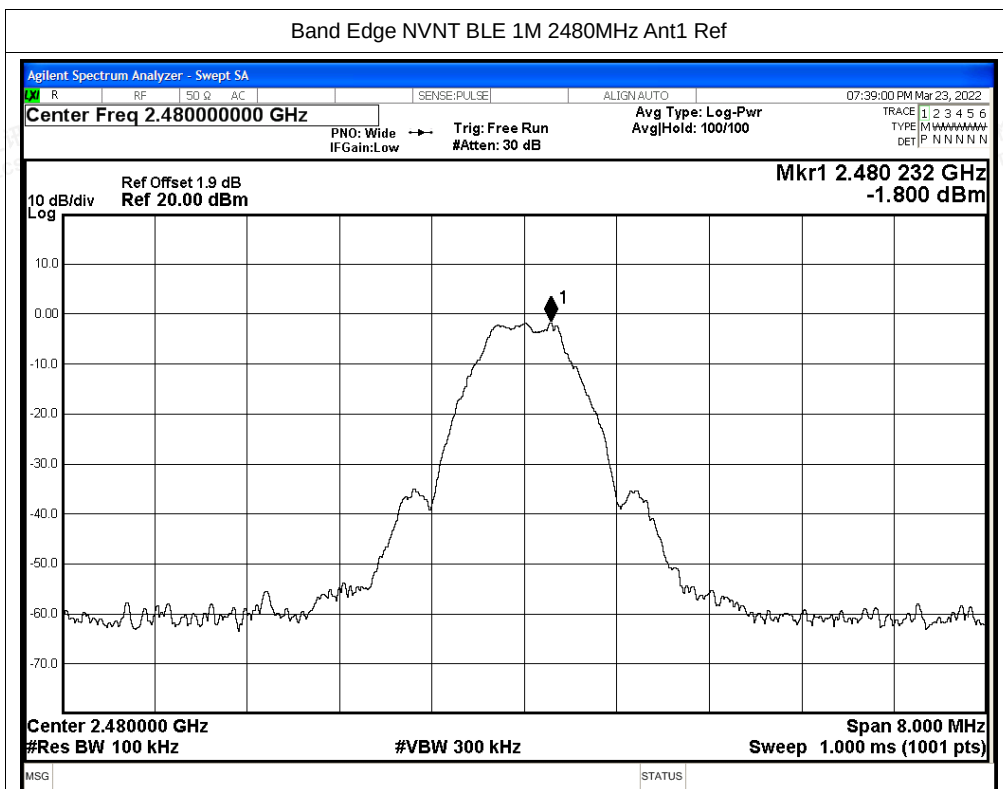




A.5 Conducted Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-52.29	-20	Pass
NVNT	BLE 1M	2440	Ant1	-53.97	-20	Pass
NVNT	BLE 1M	2480	Ant1	-54.33	-20	Pass



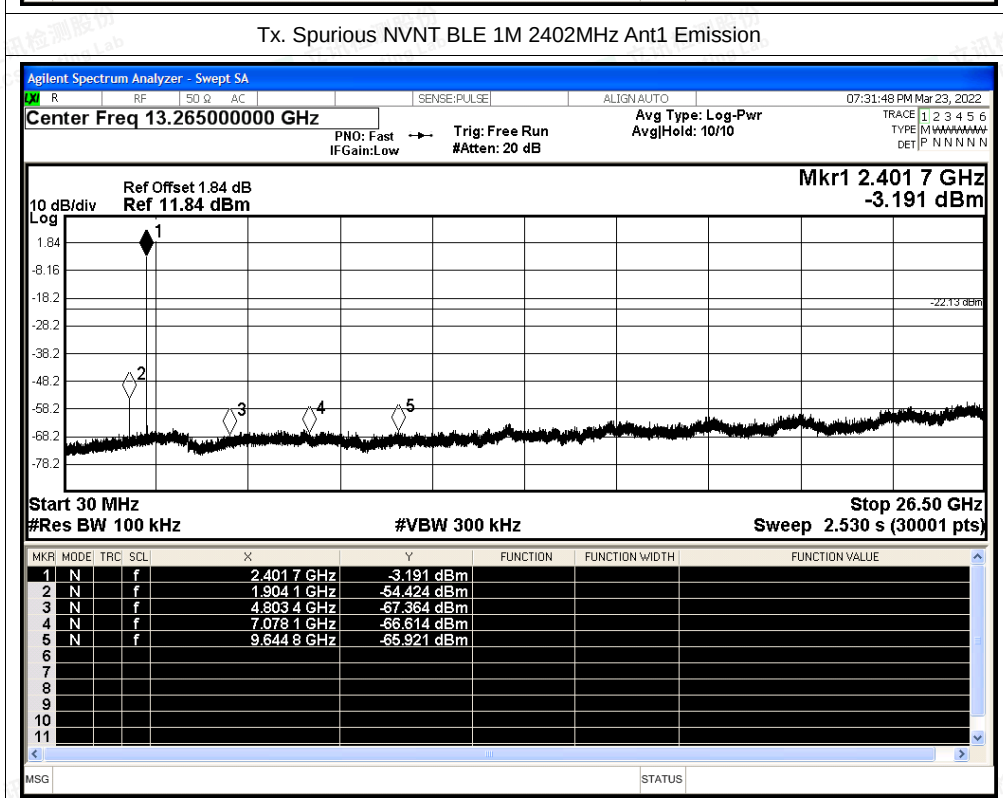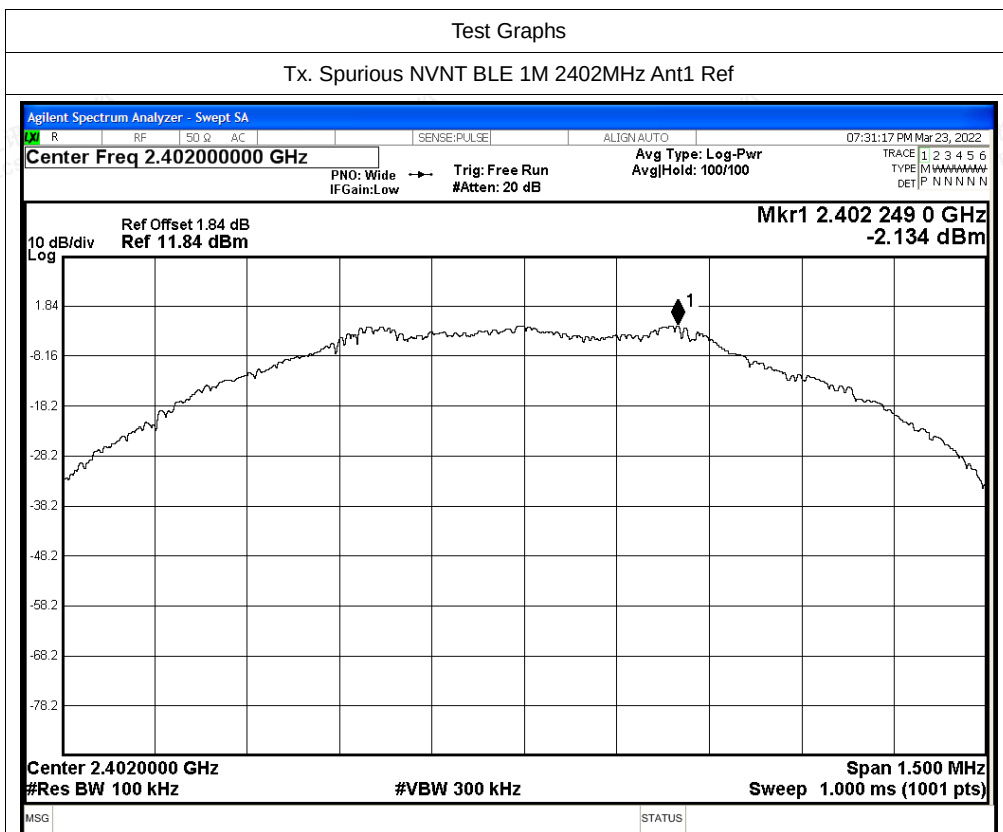




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

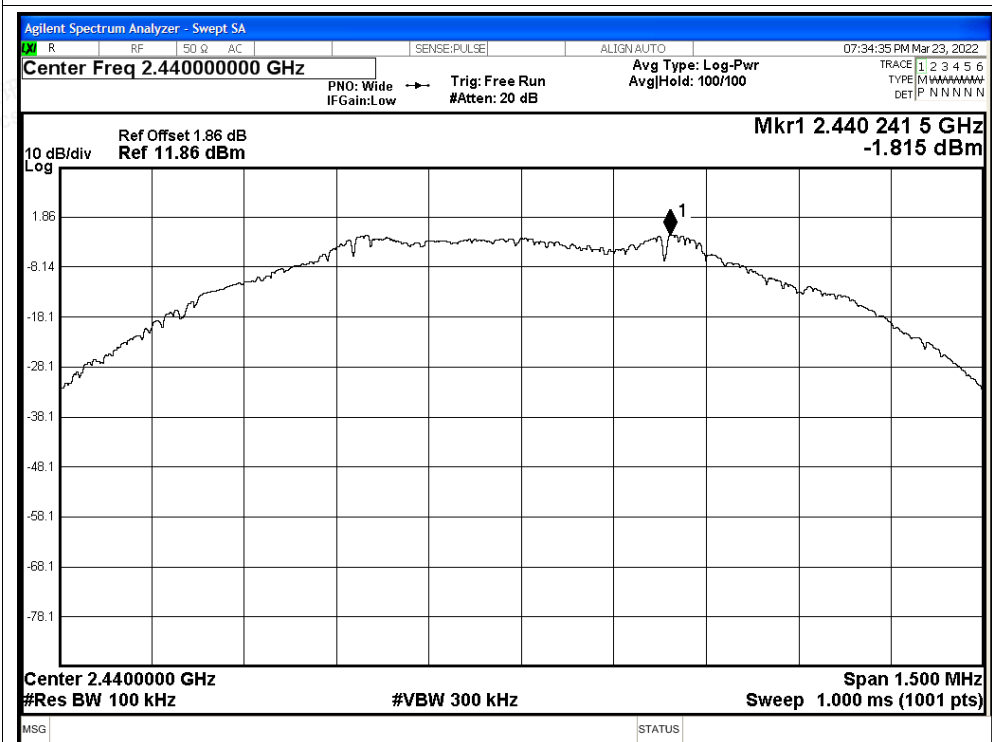


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

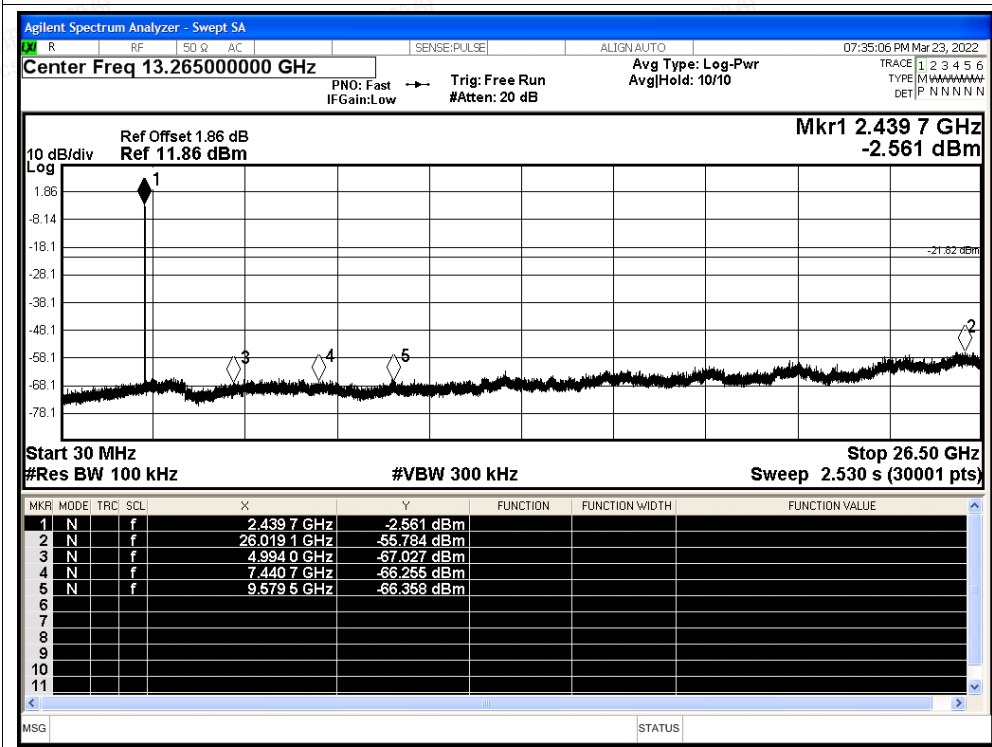




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

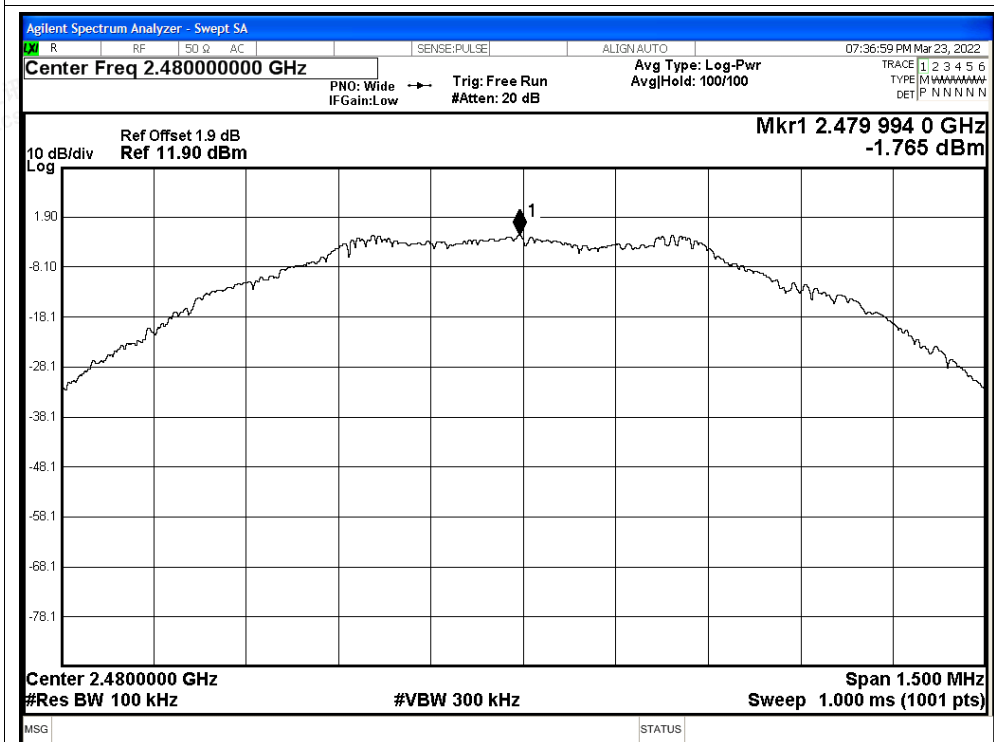

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission


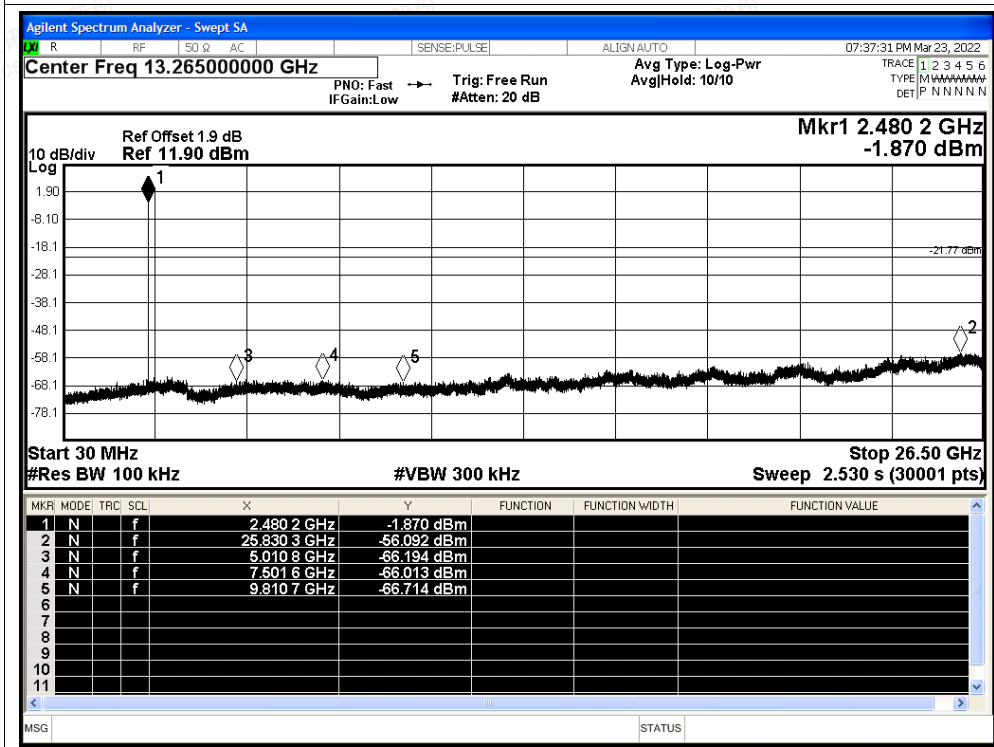





A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.36	2.12	2.61
NVNT	BLE 1M	2440	Ant1	61.39	2.12	2.6
NVNT	BLE 1M	2480	Ant1	61.36	2.12	2.61



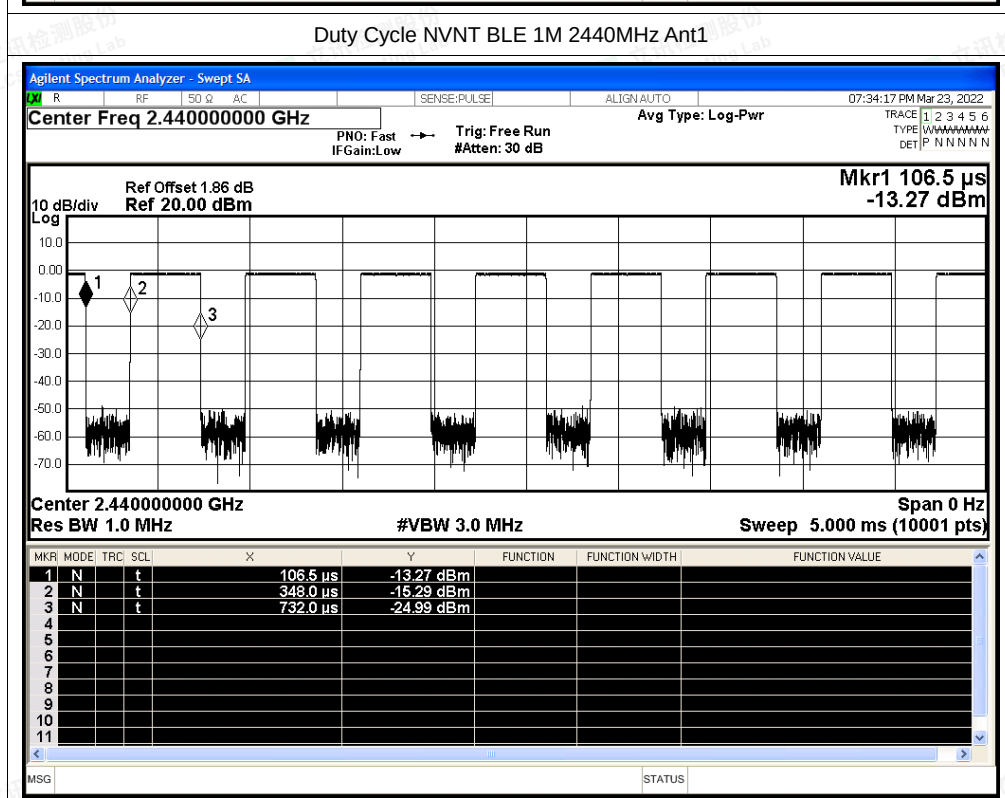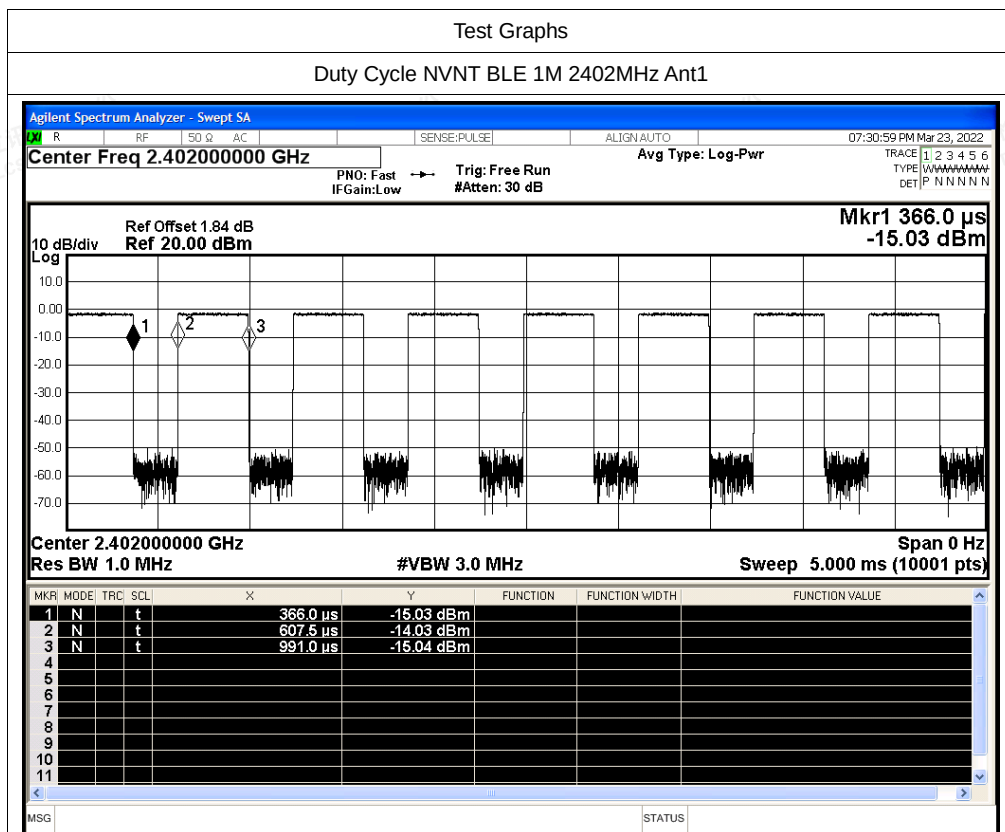

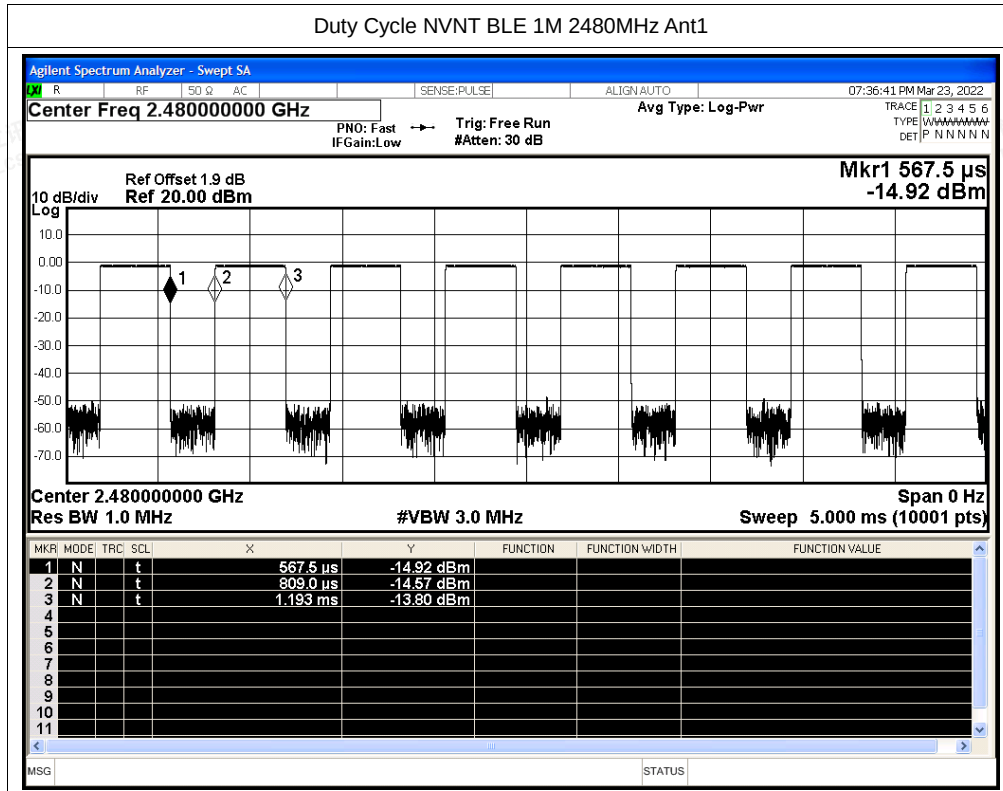

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.7 Emissions in Restricted Bands

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-50.95	2	46.31	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-60.1	2	37.16	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2359.36	-47.99	2	49.27	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2388.298	-59.23	2	38.03	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.62	2	45.64	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-59.31	2	37.95	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-50.93	2	46.33	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-59.33	2	37.93	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2491.762	-48.06	2	49.2	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2488.58	-58.63	2	38.63	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-49.69	2	47.57	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-59.27	2	37.99	Average	54	Pass



