

倍思包装设计稿件信息				Baseus			
基本信息	产品型号	BS-PS026					
	产品名称	倍思 笔畅系列 2 无线充多功能电容手写笔 主动蓝牙版 皓月白 (含主动头*1)					
	产品方案编码						
	物料编码	1100005721	包装编码+版本号	PB4417Z_POA0			
	物料规格描述	说明书\100g悦声高白\双面单色印刷\189*56mm\4页包三折\8P\ROHS					
包装平面设计	刘琪	包装结构设计	王廷兴				
版本历史							
版本	变更日期	变更描述					
POA0	2023.06.19	初始版本					

包装审核区域责任划分		Baseus	
产品相关	产品外观/参数/辅雕 彩盒/说明书文案 执行标准/生产商信息	产品经理/项目主管请在此处签名	
认证相关	认证相关文案 认证相关图标	认证工程师请在此处签名	
品质相关	法律法规相关文案 警示语	品质工程师请在此处签名	
定制需求	定制渠道需求	定制代表请在此处签名	
品类相关	产品功能/图标表达 文案部分/翻译	品类策划/文案策划请在此处签名	
包装设计相关	产品条形码 公司地址信息 文件基于最新量产版 包装设计规范	包装设计师/组长/主管请在此处签名	

温馨提示: 请印刷供应商严格按照倍思的图纸印刷生产。如贵司有生产上的原因需要调整倍思图纸的字体、图形、颜色、刀模尺寸等, 请务必通知倍思相关负责的包装设计师, 并在征得包装设计师同意的情况下修改文档并发回存档。



3.Indicator

Status	Meaning
Lights up blue	Battery level at 70%-100%
Flashes blue	In Bluetooth pairing
Lights up green	Battery level at 30%-69%
Flashes green	In charging Stays on for 30s and goes out after fully charged
Lights up red	Battery level at 10%-29%
Flashes red	Battery level at 0%-9% Reminds you to charge

4.Use Instructions

Bluetooth Connection:

- Press and hold the power button to turn on the stylus, indicator flashes blue, entering pairing mode;
- Go to "Settings" on your iPad, click Bluetooth and select "Baseus-PS026" to pair;
- "Connected" prompts up, and indicator goes out, meaning the pairing is successful, you can check the battery level of the stylus in your iPad.

APP Connection:

- Download the Baseus APP in App Store;
- Turn on the stylus and connect to the Bluetooth of your iPad;
- Add the stylus in the Baseus App, it's under the Lifestyle & Office catalogue;
- Make sure the stylus is not connected to other device and the remaining battery is sufficient during the connection process.

Note: If the connection fails, please restart the stylus and try again.

Customization Function Setup:

Open the Baseus APP, after you add the stylus to the app, go to the stylus page, select "Double-press Setup" and "One-press Setup" to customize the shortcut functions.

Note: Default setup as follows, connect to the Bluetooth of the device to use the shortcut functions.

Button	Operation	Shortcut Function
Up	Press	Previous Page
	Double-press	Quick Screenshot
Down	Press	Next Page (Exit full-screen display in a PPT presentation)
	Double-press	HOME

Use without Connecting to Bluetooth:


Press and hold the power button to turn on the stylus, after 3min of flashing, the indicator stays on, and then you can use the stylus.

Power off:

Press and hold the power button to turn off the stylus.
Note: The stylus will automatically turn itself off after 5 minutes of no operation.

5.Use

1.You can use the stylus instead of your fingers to tap, drag on the screen. Or use it to write, draw in some apps.



- Full-screen palm rejection allows you to place your hand on the screen during writing, and you can adjust the thickness of the stroke by tilting the pen tip.
- Press/double-press the Up/Down button to use the shortcut functions.

6.Battery Charging

You can charge the stylus via the following methods:

- Snap it onto your iPad for magnetic wireless charging.
- Use a compatible charging case to charge the stylus.


Declaration on hazardous substances and elements contained in electronic products

Part Description	Hazardous substances and elements					
	Lead (pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CrVI)	Polybrominated Biphenyls (PBBs)	Polybrominated Diphenyl ethers (PBDE)
PCB	X	0	0	0	0	0
Plastic	0	0	0	0	0	0
Battery	0	0	0	0	0	0
Accessory	0	0	0	0	0	0

This form is compiled in accordance with SJ/T 11364. O: It indicates that the content of the harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X: The content of harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T 26572 standard.

Warm Tip: The 5-year icon refers to the "effective life of environmental protection", not the product quality assurance period. Electronic products all contain harmful substances such as lead, mercury and cadmium. Once they are overused, harmful substances may leak or mutate, cause pollution to the environment, or cause serious damage to people and property. The term of "environmental protection use" means that all electronic products will be required to use within this effective period. We will no longer be responsible for the quality of the products due to the safety risks that arise after the safe use period.




Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.


This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

特此申明: 深圳市倍思科技有限公司的产品型号为: BS-PS026符合指令 2014/53/EU, 2011/65/EU 的规定, 欧盟符合性声明的全文可在以下网站查询: www.baseus.com

It is hereby declared that BS-PS026, a product model of Shenzhen Baseus Technology Co., Ltd., complies with the provisions of Directive 2014/53/EU, Directive 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: www.baseus.com



This equipment complies with the provisions of Directive 2012/19/EU, 2006/66/EU. It is strictly forbidden to dispose of this equipment with ordinary trash; it must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.

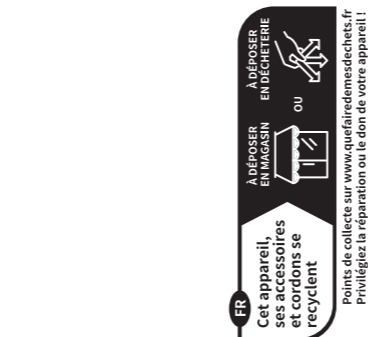

FCC ID: 2A482-B5-PS026



制造商: 深圳市倍思科技有限公司
地址: 深圳市宝安区坂田街道南头社区雪岗路2008号倍思智能园B栋二楼
执行标准: GB 4943.1
网址: 400-071-2711(中国) / +1 800 220 8056(全球)
官方售后服务邮箱地址: service@baseus.com (中国) / care@baseus.com (全球)
Manufacturer: Shenzhen Baseus Technology Co., Ltd.
Add: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangou Community, Bantian Street, Longgang District, Shenzhen
Executive Standard: GB 4943.1
Hotline: 400-071-2711(China) / +1 800 220 8056(Global)
Website: https://www.baseus.com(China) / https://www.baseus.com(Global)
Official After-sales Email Address: service@baseus.com (China) / care@baseus.com (Global)

倍思设计/Designed by Baseus
中国制造/Made in China
PB4417Z-POA0
1100005721

baseus倍思




倍思 笔畅系列 2 无线充多功能电容手写笔 主动蓝牙版

Baseus Smooth Writing 2 Series Wireless Charging Multifunctional Stylus (Active Wireless Version)

使用说明书 User Manual

使用产品前请仔细阅读本使用说明, 并妥善保管
Please read this manual thoroughly prior to use, and keep it for future reference.

一、产品示意图

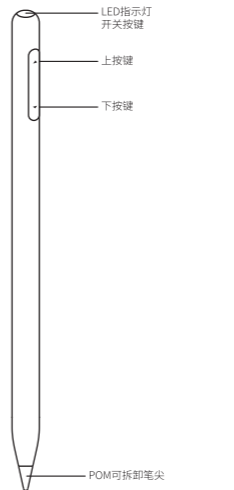

- 上按键、下按键可自定义功能:**
- 上一页
 - 静音
 - 搜索界面
 - 拍照
 - 快速截屏
 - 可编辑触屏
 - 音量加
 - 音量减
 - 下一页
- 空 (操作后不实现任何快捷功能)**

二、产品参数

名称: 倍思 笔畅系列 2 无线充多功能电容手写笔 主动蓝牙版
型号: BS-PS026
材质: 铝合金笔身、POM塑胶笔头
配对名称: Baseus-PS026
充电方式: 磁吸充电
电池容量: 125mAh
配件: 主动笔头×1、说明书×1

通用机型:

平板型号	型号号码	最低版本	屏幕尺寸
Pad 6	A1893/A1954	12.1.4	9.7
Pad 7	A2197/A2198/A2200	13.1	10.2
Pad 8	A2270/A2428/A2429/A2430	14	10.2
Pad 9	A2602/A2604/A2603/A2605	15	10.2
Pad 10	A2696/A2757/A2777	16	10.9
Pad mini 5	A2133/A2124/A2126/A2125	12.2	7.9
Pad mini 6	A2567/A2568/A2569	15	8.3
Pad Air 3	A2152/A2123/A2153/A2154	12.2	10.5
Pad Air 4	A2316/A2324/A2325/A2072	14	10.9
Pad Air 5	A2588/A2589/A2591	15	10.9
Pad Pro	A1980/A2013/A1934/A1979	12.2	11
Pad Pro 2	A1876/A2014/A1895/A1983	12.2	12.9
Pad Pro 3	A2228/A2068/A2230/A2231	13.4	11
Pad Pro 4	A2229/A2069/A2232/A2233	13.4	12.9
Pad Pro 3	A2377/A2459/A2301/A2460	14	11
Pad Pro 5	A2378/A2461/A2379/A2462	14	12.9
Pad Pro 4	A2759/A2435/A2761/A2762	16	11
Pad Pro 6	A2436/A2764/A2437/A2766	16	12.9

三、指示灯

指示灯状态	含义
蓝灯长亮	当前电量约70%-100%
蓝灯闪烁	蓝牙配对中
绿灯长亮	当前电量约30%-69%
绿灯闪烁	充电中 充满长亮30秒后熄灭
红灯长亮	当前电量约10%-29%
红灯闪烁	当前电量约0%-9% 低电量状态建议充电

四、使用指南

连接蓝牙:

- 长按开关按键开机后, 指示灯变蓝灯闪烁, 表示进入配对模式;
- 平板点击设置, 进入蓝牙界面, 点击"Baseus-PS026"连接;
- 蓝牙显示"已连接", 指示灯熄灭, 完成配对, 可通过平板查看电容笔实时电量。

连接APP:

- 到App store下载倍思APP;
- 将电容笔开机后, 连接设备蓝牙;
- 进入APP点击添加设备, 在生活办公类自添加电容笔;
- APP连接电容笔过程, 请确保电容笔没被其他设备连接, 及开机电量充足;

注: 若连接失败后, 请重启电容笔开关再尝试重新连接。

设置上下按键自定义功能:

进入倍思APP, 添加设备成功后, 进入电容笔首页, 双击点击设置、单击设置, 设置自定义快捷功能。

注: 默认设置如下, 只要连接设备蓝牙后, 操作按键即可实现快捷功能。

按键	操作	快捷功能
上按键	单击	上一页
	双击	快速截屏
下按键	单击	下一页 (PPT结束全屏播放)
	双击	HOME 键

不连接蓝牙使用:


长按开关按键开机后, 指示灯闪烁3分钟后, 若未连接设备蓝牙, 指示灯显示当前电量; 无论是否已连接蓝牙, 开机后都可以正常书写。

关闭电容笔:

开机后再次长按开关按键, 电容笔进入关机状态。
注: 电容笔在使用过程中, 静置5分钟会自动进入关机状态。

五、使用方式

- 可以在Pad平板上通过触控笔替代手指完成点击、滑动等操作。也可以在特定应用软件里使用笔的书写、画画等功能。



- 使用过程中, 全屏防误触, 精准不断触, 可以根据倾斜角度调节笔触粗细
- 单击/双击上按键/下按键, 即可使用实现已设置的快捷功能

六、电池充电

您可以通过以下方式对手写电容笔充电。

- 通过磁吸Pad实现磁吸吸附充电
- 通过适配充电仓实现充电

电子信息产品有害物质声明


部件名称	有害物质或元素					
	铅 (pb)	汞 (Hg)	镉 (Cd)	六价铬 (CrVI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB	X	0	0	0	0	0
塑料	0	0	0	0	0	0
电池	0	0	0	0	0	0
附件	0	0	0	0	0	0

本表依据SJ/T 11364的规定编制。
O: 表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572标准规定的限量要求以下。
X: 表示该有害物质在该部件某均质材料中的含量超出GB/T 26572标准规定的限量要求。

温馨提示: 5年图标是指"环保使用期限", 不是产品质量保证期限。电子产品均有铅、汞、镉等有害物质, 一旦超期使用, 有害物质将可能因为发生外泄或突变, 对环境造成污染, 或对人体及人身财产造成严重损害。"环保使用期限", 意为所有的电子产品都将按此要求在有效期限内使用, 超过安全使用期限之后出现的安全风险问题, 我们将不再对产品质量负责。



1.Parts Description

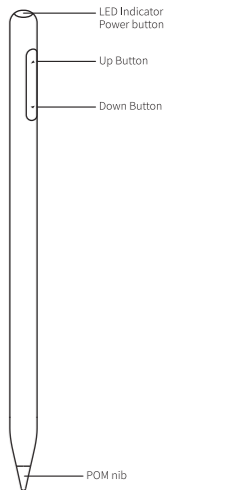

- Customization Functions of Up/Down Button:**
- HOME
 - ON/OFF
 - Brightness+
 - Brightness-
 - Recently Used Apps
 - Volume +
 - Volume -
 - Next Page
 - Previous Page
 - Mute
 - Search
 - Photograph
 - Quick Screenshot
 - Edit Screenshot
 - Blank (No shortcut functions)

2.Product Specifications

Name: Baseus Smooth Writing 2 Series Wireless Charging Multifunctional Stylus (Active Wireless Version)
Model No.: BS-PS026
Material: Aluminum alloy barrel, plastic POM nib
Pairing Name: Baseus-PS026
Pairing Connector: Magnetic charging
Battery Capacity: 125mAh
Accessories: Replaceable tip×1, user manual×1

Compatible model

Model	Model No.	Software Version	Screen Size
Pad 6	A1893/A1954	12.1.4	9.7
Pad 7	A2197/A2198/A2200	13.1	10.2
Pad 8	A2270/A2428/A2429/A2430	14	10.2
Pad 9	A2602/A2604/A2603/A2605	15	10.2
Pad 10	A2696/A2757/A2777	16	10.9
Pad mini 5	A2133/A2124/A2126/A2125	12.2	7.9
Pad mini 6	A2567/A2568/A2569	15	8.3
Pad Air 3	A2152/A2123/A2153/A2154	12.2	10.5
Pad Air 4	A2316/A2324/A2325/A2072	14	10.9
Pad Air 5	A2588/A2589/A2591	15	10.9
Pad Pro	A1980/A2013/A1934/A1979	12.2	11
Pad Pro 2	A1876/A2014/A1895/A1983	12.2	12.9
Pad Pro 3	A2228/A2068/A2230/A2231	13.4	11
Pad Pro 4	A2229/A2069/A2232/A2233	13.4	12.9
Pad Pro 3	A2377/A2459/A2301/A2460	14	11
Pad Pro 5	A2378/A2461/A2379/A2462	14	12.9
Pad Pro 4	A2759/A2435/A2761/A2762	16	11
Pad Pro 6	A2436/A2764/A2437/A2766	16	12.9