

FNFLY
使用说明书

FNFLY

高品质立体声蓝牙耳机

为正确而安全地使用本耳机，请在使用前仔细阅读本手册。

使用耳机时应注意以下事项：

- 1.请合理控制使用耳机的时间和音量。
- 2.请勿在有潜在危险（如雷雨天气）的环境中使用耳机，以确保安全。
- 3.应尽量避免在驾驶途中使用耳机聆听音乐，拨打或接听电话，分散注意力造成危险。
- 4.请将耳机置于儿童无法接触到的地方，避免儿童使用不当造成致命危险。
- 5.避免耳机进水，以免损坏耳机功能。
- 6.避免持续调高音量，导致你听不到四周声音，如出现耳鸣或音量调节过高时，请将音量调低。
- 7.如果使用耳机感觉明显不适，有刺激感或其它不良反应，应立即停止使用。

规格：

工作范围: 10 米
输入电压: 5V-1A
电池: 锂离子3.7V/110mAh
充电环境温度: 0 -45°C
蓝牙版本: 5.2

频率范围: 20Hz-20KHz
喇叭直径及阻抗: 直径10mm & 32欧
支持: A2DP/AVRCP/HSP/HFP
使用环境温度: -20-50°C
净重: 33g

警告：

- 1.充电时请勿佩戴，以免造成触电危险。
- 2.本耳机使用内置式不可拆卸充电电池。不要从耳机中取出电池，以免损坏耳机。


耳机充电：

- 1.充电时耳机会强制自动关机，充电区间无法开机；
- 2.将USB充电线插入耳机充电接口，另一端的USB端口插到USB充电器或电脑的USB端口上，充电时红色LED常亮；
- 3.充电时间2.5小时左右，充满电后蓝灯常亮。

... 1 ...

FNFLY

按键功能

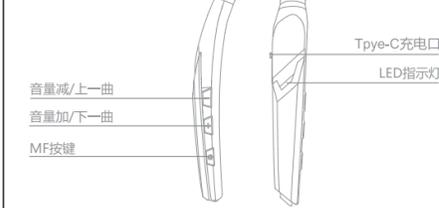

立体声耳机包装清单

耳机成品 1个 FNFLY使用说明书 1份
USB充电线 1条 硅胶耳帽 2对

开机操作：

- 1.关机状态下，长按MF键1秒蓝灯闪烁同时听到“开机”提示音即开机。
- 2.开机状态下，长按MF键5秒红灯常亮同时听到“关机”提示音即关机。

蓝牙连接步骤：

- 1.请将蓝牙耳机和手机（或其它用作连接的装置）的距离控制在1米范围内。
- 2.关机状态下，长按MF键5秒先后听到提示音“开机”和“配对中”同时红蓝LED快速闪烁，即进入配对模式。
- 3.打开手机蓝牙搜索“ENFLY2021-9”点击即自动连接。

注意事项：

- 1.如果耳机已经有连接过手机长按1秒再次开机，会自动连接到最后一次连接过的设备上，此外如果耳机开机后周围无已连接过的设备，10秒后自动进入配对模式，方便用户用新设备（未连接过的设备）配对，当然耳机也支持长按5秒开机后直接进入配对模式，开机直接进入配对模式后重复上述蓝牙连接步骤即可配对成功。

... 2 ...

FNFLY

2.进入配对模式的时间只有5分钟，超时后耳机自动关机，再次使用请重新开机。

蓝牙耳机断开连接后，重新连接：

- 1.当使用距离超出蓝牙接收范围时，蓝牙会断开连接，此时红蓝LED灯交替闪烁，并出现“连接断开配对中”提示音，断开时间超过5分钟后耳机会自动关机，2分钟内耳机重新靠近手机后可以自动回连，并出现“连接成功”提示音。
- 2.如果直接操作手机，关闭手机蓝牙的情况下，蓝牙耳机自动进入配对模式。

接听电话：

来电时短按MF按键一次。

结束通话：

通话区间短按MF按键一次。

拒接来电：

来电时双击MF按键。

来电等候：

通话时，有第二个来电时，双击“MF按键”一次，可保留第一个通话，即接听第二个通话。再双击“MF按键”一次，可保留第二个通话，接听第一个通话。单击“MF按键”可挂断当前通话并接通第二方通话。

音乐模式/游戏模式：

1.在连接状态下，双击“MF按键”，提示音音乐模式/游戏模式切换

LED氛围灯：

1.在连接状态下，三击“MF按键”，长亮-快闪-慢闪-呼吸灯-关闭操作，LED氛围灯切换。

播放暂停：

播放音乐时，短按“MF按键”。

... 3 ...

FNFLY

歌曲选择：

播放音乐时，短按音量加按键跳到下一曲，短按音量减按键跳到上一曲。

音量调节：

听音乐或通话时，长按音量减键音量逐渐减小，同样的长按音量加键音量逐渐增加，最大音量时出现“滴”一声提示音。

恢复出厂设置

关机状态下，长按MF键10s清除配对列表恢复出厂设置，清除配对信息，后自动进入配对模式


切换提示音

耳机设置了中英文提示音，开机未连接手机模式下，五击MF按键，切换中英文提示音。

低电量报警提示：

当耳机电量低于3.3V时红色LED会快速闪烁，重复出现“电量低”提示音继续使用，电量过低时则会自动关机。

... 4 ...

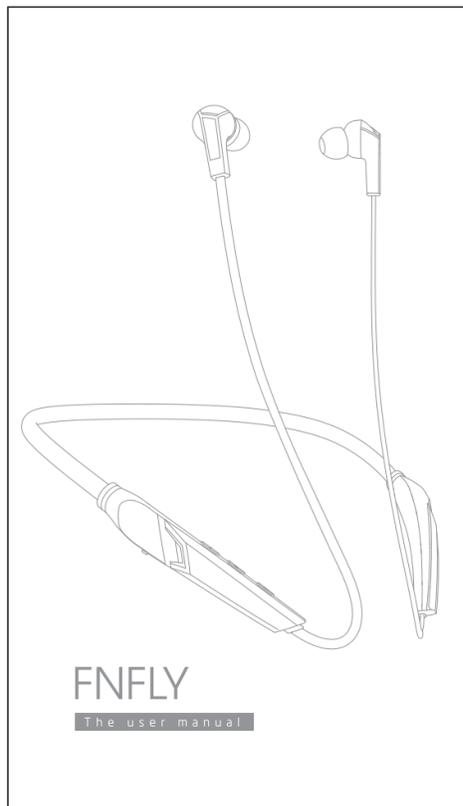

FNFLY
The user manual

FNFLY

High quality stereo Bluetooth headset

For proper and safe use of this headset, please read this manual carefully before use.

The following matters should be noted when using earphones:

1. Please reasonably control the time and volume of using the earphone.
2. To ensure safety, please do not use the earphone in the potentially dangerous environment (such as thunderstorm).
3. Try not to use headphones to listen to music, make or receive phone calls and distract your attention while driving It creates danger.
4. Please keep the earphones out of reach of children to avoid fatal danger caused by improper use of children.
5. Avoid water in the earphone, so as not to damage the earphone function.
6. Avoid constantly turning up the volume, which will cause you to not hear the surrounding sounds, such as tinnitus or too high volume adjustment
7. If you feel obvious discomfort, irritation or other adverse reactions when using the earphone, stop using it immediately.

Specifications:

Working Range: 10 m
Input Voltage: 5V-1A
Battery: 3.7V/110mAh
Charge Temperature: 0 -45°C
BT Version : 5.2

Frequency Response: 20Hz-20KHz
Impedance: 32Ω Speaker: Φ10mm
Support: A2DP/AVRCP/HSP/HFP
Working Temperature : -20-50°C
Net Weight: 33g

Warning :

1. Do not wear it while charging, in case of electric shock.
2. This earphone uses a built-in non-removable rechargeable battery. Do not remove the battery from the headset to avoid damage The headset.


Headphone Charging:

1. The headset will be forced to automatically shut down during charging, and the charging interval cannot be started up;
2. Plug the USB charging cable into the headset charging port, and plug the USB port on the other end into the USB charger or the USB port of the computer. The red LED is always on when charging;
3. Charging time is about 2.5 hours, the blue light is always on after full charge.

... 1 ...

FNFLY

Function Button

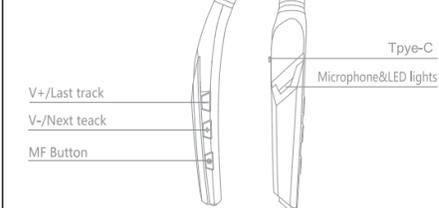

Package list

Headset products 1PC GS2 User Manual 1PC
USB charging line 1PC The silicone ear cap 2PC

NO & OFF:

1. In the OFF state, press MF button for 1 seconds (Blue LED flash while "POWER ON" voice prompts).
2. In the ON state, press MF key for 5 seconds and the red light is steady on. At the same time, the "POWER OFF" prompt tone is heard.

BT pairing steps :

1. Connect BT headphone to your mobile (or other device used connection) in the range of 1 meter.
2. In the OFF state, press MF button for 5 seconds, noted "POWER ON" and "Pairing" then open the Bluetooth function of your mobile
3. Search and choose "ENFLY2021-9" to connect.

PS Note:

1. If the headset has already been connected, press 1 second to turn it on again, it will automatically connect to the last connection
- Devices, moreover if headphones on the boot around after connection of equipment, after 10 seconds into pairing mode automatically, convenient user (not connected devices) with new equipment matching, headphones, of course, also support long press 5 seconds after the boot directly into pairing mode, boot directly into pairing mode after repeat the above steps bluetooth connection can be matched.

... 2 ...

FNFLY

2. The time to enter the pairing mode is only 5 minutes. After the timeout, the headset will shut down automatically. Please restart the headset if you use it again.

Disconnected and reconnecting:

1. Bluetooth will disconnect when the distance is beyond the Bluetooth receiving range. Red and blue LED lights will flash alternately, and "disconnected" prompt voice will appear, then "pairing" prompt voice will appear. After disconnecting more than 5 minutes, the headphone will automatically shut down, and within 3 minutes the headphone can automatically connect back to the phone, and "connected" prompt voice will appear.

2. If you operate the phone directly and turn off the Bluetooth of the phone, the Bluetooth headset will automatically enter the pairing mode.

Phone Call Pick-up:

Short press the MF button once when the call comes.

Phone Call Hang-up:

Short press the MF button once during the call period.

Phone Call Reject:

Double-click the MF button when the call comes in.

Call Waiting:

When there is a second call, double-click the "MF button" once to keep the first call and answer the second call. Double-click "MF button" again to reserve the second call and answer the first call. Click the "MF button" to suspend the current call and connect the second party.

Music Mode/Game Mode :

1. Double-click the "MF button" in the connection state, and the sound will prompt you to switch Game Mode /Music Mode

LED atmosphere light:

1. In the connection state, triple press the "MF button", Long Light - Quick Flash - Slow Flash - Breathing Light - Off operation, LED atmosphere light switch.

Playing/Pause:

Short press the "MF button" when playing music.

... 3 ...

FNFLY

Music Selections:

When playing music, short press the volume plus button to jump to the next song, short press the volume minus button to jump to the previous song.

Volume Control:

When listening to music or talking, long press the volume button to reduce the volume gradually, the same long press the volume button to increase the volume gradually, the maximum volume appears "drop" a prompt tone.

Reset:

Under shutdown state, long press MF key 10S to clear pairing list, restore factory Settings, clear pairing information, and then automatically enter pairing mode

Change the prompt language

The earphone is equipped with Chinese and English prompt tone. When the phone is disconnected from the headset, press the MF button five times to switch the Chinese and English prompt tone.

Low voltage alarm:

When the power of the headset is lower than 3.3V, the red LED will flash quickly, and the "low power" prompt sound will appear repeatedly to continue to use. When the power is too low, it will automatically shut down.

... 4 ...

正反面印刷，80g书纸

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction