

## Electronic Dog Training Collar Instructions

—. Scan the code to download the product APP method:

1. Scan the code to download (see the picture below)



2. Click to open the website to download the APP

[http://qr.maxhom.com/appdown/bttpet\\_new.html](http://qr.maxhom.com/appdown/bttpet_new.html)

3. Directly download the APP in "ios store", "Google store"

English search: BTT pet;btt smart pet

≡、 The specific operation process of the APP:

1. Click to open the website to view the APP operation video

<http://readmedown.maxhom.com/xggen.mp4>

2. Electronic dog training collar wearing operation video

<http://readmedown.maxhom.com/xgqxqen.mp4>

3. Open APP → Dog training bark stop → Settings → Help Center → View video operation

### Briefly

This electronic dog training collar has been proven to be safe, effective and comfortable after long-term market verification and user feedback. It can help you control and train your dog within an effective range, through vibration reminders, sound warnings, static electricity Punishment and other functions to achieve APP control to stop barking, stop barking at regular intervals, stop barking automatically, correct dog running around, recall easily, and prevent dogs from arguing and jumping at people, picking up and eating in the outdoors and other bad

habits. Other complex exercises can also be performed. It will be your right-hand man for managing your dog.

### **Security Information**

★ Check the tightness of the collar. Wearing it too tightly will cause damage to the pet's neck. Wearing it too loosely will cause the electrode contact point (rubber cap) to not touch the dog's skin, resulting in ineffective static electricity.

★ Please do not use the collar of the dog bark trainer to tie the dog leash, this may cause the dog bark trainer to be stretched too tightly, and the rubber cap will put too much pressure on the dog's neck, you can use a separate collar to tie the dog. Leash.

★ Please check the skin of the dog's neck frequently. If you observe any adverse reactions on the skin, please stop using the dog bark stopper for a few days.

★ If erythema is caused by wearing too long or the collar is too tight, it is recommended to use it after recovery.

★ The purpose of the dog bark stopper is to help you train, we recommend no more than 18 hours a day, take it off for a few hours a day to make the dog feel relaxed and free.

★ If it is professional training, check the wearing position of the collar every 1-2 hours as much as possible.

★ Most dogs will not show irritability when wearing it for the first time, only a few will be very sensitive, but they will have good adaptability after a period of time. At this time, it is recommended not to use any function, please let the dog get used to it first carry it.

★ We recommend that you use the vibration function or the warning sound function before using the static function for the dog. After a period of training, the dog will find that there will be static numbness after the vibration or warning sound. In this way, the vibration function or warning sound The function can effectively curb the misbehavior of pets, and the static function as a punitive measure does not have to be used frequently.

★ Thank you very much for choosing the dog training bark stopper. Our purpose is to provide you with tools and technical support to help you train your dog easily and successfully under the premise of safety.

### Product parameters:

Product name: Electronic dog training collar

Receiver material: ABS plastic, rechargeable with lithium battery

Applicable to: all kinds of large and small dogs (recommended for dogs over 4 kg)

### Product description:



#### ① Power switch

Long press--beep, it means power on;

Long press--beep sound, it means shutdown;

#### ② Battery indicator light:

1. Insufficient battery will display blue;

2. When charging, it will display red;

3. When fully charged, the light will be off;

#### ③ Power-on indicator: light blue when power on

④ **Electrostatic column (electrode):** Install a pair of rubber conductive columns (electrode points) suitable for different thicknesses of dog hair, which can effectively conduct static electricity and facilitate training

⑤ **Charging hole:** used to charge the dog bark stopper

### APP function introduction:

**Training mode of dog training bark stopper** (intensity can be adjusted through mobile APP):

1. **Beep mode:** make a beep sound to remind pets, it is recommended to use;

2. **Vibration mode:** the receiver vibrates to remind pets, it is

recommended to use

**3. Shock mode:** shock pets with static electricity to give a serious warning, will not hurt pets, pain is inevitable, only use it as a last resort.

### **APP home page:**

Select the dog training bark suppressor, enter the home page, and click the search button to connect the device (4 dog bark suppressors can be connected at the same time)

### **Dog training bark stop home page:**

#### **1. Manual training mode**

You can choose to combine three modes, sound, electric shock, vibration mode;

One of the modes can be selected individually;

The intensity of each mode can be adjusted from 1 to 99 (it is recommended to slowly increase from the small gear to give pets an adaptation period);

#### **2 Intelligent bark stop mode**

##### **2.1 Timing monitoring**

Select date, opening time, closing time,

Three modes can be selected at the same time or one mode can be used alone

The number of pet barking size set from 1-99 decibels,

When the pet bark reaches the decibel value, the dog bark stopper starts the stop bark mode within a fixed time range

##### **2.2 Real-time monitoring**

Three modes can be selected at the same time or one mode can be used alone

The number of pet barking size set from 1-99 decibels,

When the pet bark reaches the decibel value, the dog bark stopper will start the stop bark mode

#### **3. Find pets**

When the app is successfully connected, turn on this function, the device

will make a sound, which is convenient for the owner to find the pet

#### **4. Pet lost alarm**

Turn on this function: After the device is disconnected from the APP, the device and the APP will emit a warning sound at the same time

Turn off this function: After the device is disconnected from the APP, there will be no warning sound on the device and the APP

#### **Kind tips:**

★Before using the product for the first time, please use a 5v charger to charge, the red light will turn on when charging, and the light will turn off when fully charged (the full time is about 1.5 hours)


★If the power of the product is low, it will display a blue light

★In order to ensure the normal function of the product, if it is not used for a long time, please charge the product once a month

#### **Test dog bark stopper**

##### **1. Electrostatic function test**

The electrostatic function is invisible to the naked eye, please use our test light, the red dot is placed on the Conductive pillar, and it fully touches the conductive column. After the APP is successfully connected to the device, select the electric shock function on the home page, and set the electric shock intensity. The intensity cannot be 0, click the "Start" button, the greater the intensity, the greater the current, and the higher the brightness of the test light

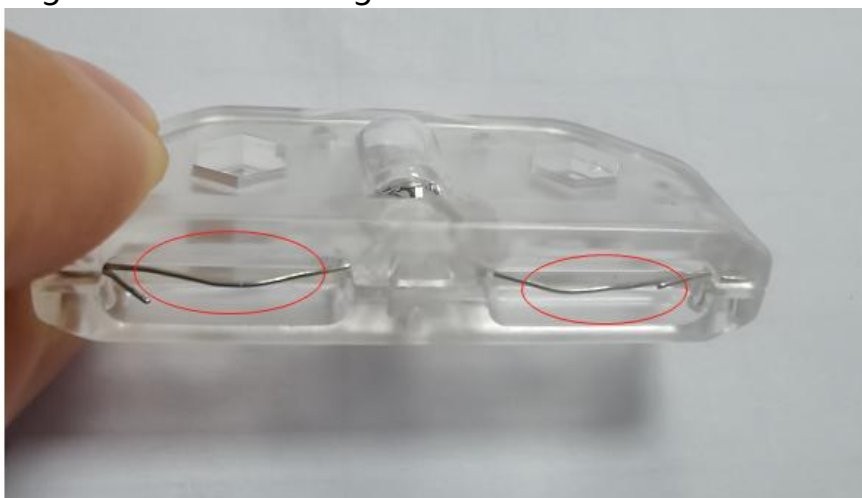

##### **1. Vibration function test**

After the APP is successfully connected to the device, select the vibration function on the home page, set the vibration intensity, the intensity cannot be 0, click the "Start" button, the greater the intensity, the greater the vibration

### **3. Warning sound function test**

After the APP is successfully connected to the device, select the sound function on the home page, set the sound intensity, the intensity cannot be 0, click the "Start" button, the greater the intensity, the louder the sound

### **Wear a dog bark stop properly**

1. The correct wearing position of the dog trainer is helpful for healthy and effective training. The dog trainer must be placed on the bottom of the dog's neck, and the electric posts with rubber caps are in direct contact with the dog's skin.
2. If the hair on the dog's neck is long or thick, please use a longer rubber cap electric post
3. The tightness of the collar should be able to stretch into a finger, not too loose, otherwise it will seriously affect the electrostatic effect.
4. If the collar is too loose or too tight, please adjust the length of the buckle, and then wear it after adjusting it properly.

### **Precautions for use**

1. The dog bark stopper adopts high-end transmission technology, which can penetrate obstacles such as walls, but it will affect the effective distance of the control.
2. The station, magnetic field, obstacles, the strength of its own battery, other wireless devices, terrain, vegetation and other factors may affect the signal transmission and the actual control distance.
3. This product is a pet trainer. It is only through training that a dog can understand your intentions. Good results require a period of training.
4. Active training should be maintained, and each time should not be too long, about 10-15 minutes.
5. At present, this product is an effective and safe pet training tool. When used correctly, a dog can be effectively trained without harming it.

6. If you have other usage questions, you can consult us through Open APP→Dog training bark stop→Settings→Feedback

### **Regular maintenance**

Regularly check the tightness of the dog training bark stopper and check for any external damage. Clean the electrode rubber column with alcohol once a week. Check your dog's neck and clean it weekly

### **Summary of FAQs**

#### **Q: At what age can a dog use a dog trainer?**

A: Your dog can recognize and obey basic commands, such as "sit" or "come here", which is used by dogs of not less than 4 kg.

Most importantly, this product should not be used on unhealthy or aggressive dogs, please consult your veterinarian or certified trainer if you are unsure if this product is suitable for your pet.

.....

#### **Q: How many devices can one APP control?**

A: One app can connect and control up to 4 dog trainers, and one dog trainer is only allowed to be connected by one APP!

.....

#### **Q: How far can the APP remote control?**

A: It can reach 100 meters without any interference and obstacles, but in use, terrain, climate, vegetation, station, magnetic field, obstacles, other radio equipment, the strength of one's own heart and other factors may Affects the effective distance of the remote control.

.....

#### **Q: I want to test the electric shock function of the dog trainer by hand, but it doesn't respond. Is my method wrong?**

A: Please touch two electrostatic poles at the same time, only touching one electrostatic pole will not conduct static electricity.

.....

#### **Q: How long can the electric shock, vibration and sound last after it is turned on?**

A: After it is turned on, its working time is 2 seconds. After this, the dog trainer will stop working and will need to be turned on again to work.

.....  
**Q: Is the dog trainer waterproof?**

A: The dog can use it normally when drinking water or drenching it in rainy days, swimming and diving.

.....  
**Q: What should I do if my dog has red spots on his neck?**

A: Please stop using the dog trainer and observe for a few days. If symptoms persist for more than 48 hours, you can consult a veterinarian. If the dog's skin returns to normal, it should also be checked frequently when using the dog trainer.

.....  
**Q: Can I attach a dog leash to the dog trainer collar?**

A: This may cause the rubber cap to wrap around the dog's neck. A separate collar is recommended for leashes.

.....  
**Q: How do I know the dog trainer needs to be charged?**

A: When the dog trainer needs to be charged, it will display a blue indicator light. If the battery has been completely used up, the blue light will not be displayed, and the device will not be able to turn on. At this time, it needs to be charged.

.....  
**Q: How do I know if the dog trainer is turned on?**

A: After using for a period of time, you can short press the power button, and the indicator light flashes blue once, which means it is in the power-on state.

.....  
**Q: How long is the life of the dog trainer lithium battery?**

A: Our lithium battery can be recharged 1000 times.

.....  
**Q: Can dogs always wear a dog trainer?**

A: We recommend that the dog wear the dog trainer for no more than 18 hours a day. If you wear it for a long time, it is recommended that you check it frequently.

.....  
**Q: How long is the appropriate time for each training?**

A: The recommended duration of each professional training is about 10



to 15 minutes.

.....  
**Q: How long is the collar?**

A: The total length of the collar is 70CM. Adjust the buckle if it is too tight or loose.

.....  
**Q: How much vibration and shock does my dog need to use?**

A: Please find the most suitable vibration gear and static gear for your dog. It is recommended that you start from the lowest gear, and you don't need to use a large gear to make the dog react strongly.

.....  
**Q: Are there any other better training methods?**

A: You can prepare some dog treats as training rewards, which will be more effective during training. You can tell your dog what to do or not to do every time you stop a bad habit, and your dog will learn what you like and what you don't like over time.

.....  
**Q: How long can I train my dog?**

A: It takes a certain amount of time to correct a bad habit or train it to obey orders. Please be patient with your dog. If you want to train quickly, the effect may not be ideal.

.....  
**Q: The dog trainer doesn't work, or the dog doesn't respond after it is put on the dog's neck. How can I troubleshoot the problem?**

A: Please check whether the dog trainer has electricity.  
Please check whether the APP is properly connected to the dog trainer.  
Please check if the vibration or shock function adjusts the gear. Please check if the dog trainer is turned on.  
Please check if you have inadvertently exited the APP. You can try to reopen the APP and it will automatically connect the disconnected dog trainer.  
Please make sure that the dog trainer is in the correct position and the collar cannot be worn too loosely. Trim excessively long dog hair, or use longer contact points.

.....  
**Q: Why doesn't the bark stop function work when the dog barks?**

A: Please first make sure the product fits snugly, but loose enough to allow a finger between the leash and your pet's neck. Some dogs bark very weakly, in which case you will need to lower the decibel value.

.....  
**Q: Why does the product sometimes trigger in a noisy environment, but the dog doesn't bark?**

A: Although we have optimized the bark stop detection to the best, some ambient noises have a frequency and intensity similar to barking, which will trigger the product. Please increase the decibel value in the APP.

.....  
**Q: Can I use this product when other dogs are playing?**

A: Dogs bark and get excited while playing, for your pet's comfort and safety, we do not recommend using this product in this environment.

.....  
**Q: Will this product stop my dog's howling?**

A: After many times of training, the dog will have a conditioned reflex to the dog trainer, which will play a certain role.

.....  
**Q: Can I charge this product with any type of charger?**

A: No, it is recommended that you use a charger with an output voltage of 5V to charge this product, because a charger with an output voltage of 9V, 12V or higher may cause damage to the product.

**packing list:**

- Adjustable collar × 1
- Dog training bark stopper × 1 (A pair of short conductive posts installed )
- USB charging cable × 1
- Long conductive column × 2
- Current test lamp × 1
- Instruction QR code × 1 (affixed to the top of the box)

## FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

\*RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction.