
Android Platform to introduce and use of guidance

2014.03.14

Version 4.2

Directory

How Introduction.....	- 4 -
Introduction phone keys	- 4 -
Information Function	- 5 -
Paste the text / copy Features.....	- 9 -
E-mail Features	- 9 -
Desktop Features	- 12 -
Bluetooth Function	- 15 -
Wifi Features	- 16 -
Flight mode Function	- 17 -
Black unlock	- 17 -
Restore to factory default.....	- 18 -
Storage Settings	- 18 -
GPS Settings.....	- 19 -
English language switching phone	- 19 -
Replacement mobile phone input method.....	- 20 -
Android phone data cable links	- 21 -
Browser Features	- 22 -

Q/A - 24 -

1. How to turn off the software running in the background too much.....	- 24 -
2. How to quickly set up Email	- 24 -
3. How do I view the capacity of SD card case.....	- 24 -
4. How to save electricity PMID705GTV.....	- 24 -
5. How PMID705GTV lock screen, to prevent others from using	- 25 -
6. Why does not the USB data cable links your computer.....	- 25 -
7. How to install a program on a non-Android Market	- 25 -
8. In browsing the web or other applications, how to switch to other applications-	
25 -	
9. How to enter the silent mode quickly	- 25 -
10. How to forward SMS / MMS.....	- 25 -
11. how to paste and copy text.....	- 25 -
12. download and install the application installation path can be set to SD card ..	
26 -	
13. In the phone program group is installed too many applications, how to solve-	
26 -	
14. Contacts are sorted, can change	- 26 -
15. Contacts whether to support the group	- 26 -
16. contacts and SMS storage capacity limits the number of.....	- 26 -
17. How to set the SD card, personalized ring tones.....	- 26 -
18. How to sync the phone contacts to the original PMID705GTV.....	- 26 -
19. How to use the PMID705GTV access Wifi (WLAN)	- 26 -
20. How to Find Contact.....	- 27 -

21. how to download applications for the PMID705GTV	- 27 -
22. What are commonly used android forum	- 27 -
23. How do I delete the downloaded software	- 27 -
24. How to view mobile phone version information	- 27 -
25. How do I copy SIM card contact information	- 28 -
26. why the message has a different time and date display	- 28 -
27. PMID705GTV whether to support the Java	- 28 -

Basic terms

Root: Super Android system is the administrator user account, which has the authority to control the whole system, and only have the privileges to the original system can be refreshed for the revision of the various systems;

APK: Android application types, with the cab and the Windows Mobile platform, like exe files, the user can be installed directly;

Webkit: Core Android platform, browser, and now Apple's Safari, Google's Chrome and FireFox are using this kernel as a web page rendering mechanism;

GPhone: To use Google Android mobile phone operating system developed collectively, PMID705GTV, etc.;

ActiveSync: Push email solution to support Microsoft proprietary technology, pre-primary mailbox servers at Microsoft (Exchange server) to provide support, and now Google's Gmail also provided support

G-Sensor: Is the acceleration sensors for mobile phones can provide the direction of gravity sensors, which begin with the letter G represents the gravity, the latter Snesor meant to represent the sensor

How Introduction

Introduction phone keys




list button: Click on to enter into the other application;;

Home button: Click on the background into the current application will, and enter the main interface; Note that using this key will not really exit the

application, the application will continue to run in the background;
Back button: Click to fall back to previous step of the operation of the interface;


Information Function

To sort the information by contacts, the conversational arrangement, user understanding of the history of the entire communication information, information sorted according to first contacts, including contact name for the first numbers, then letters (A-Z)

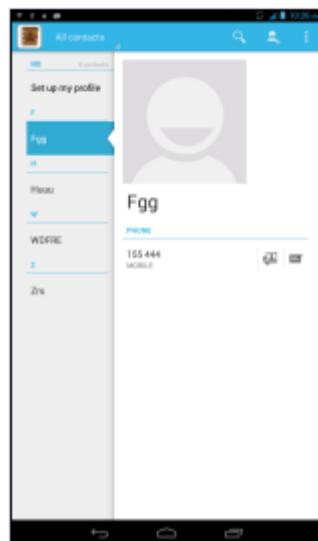


Send MMS

New information -"click +, to select the desired additional content;
New information-click the menu button -add theme

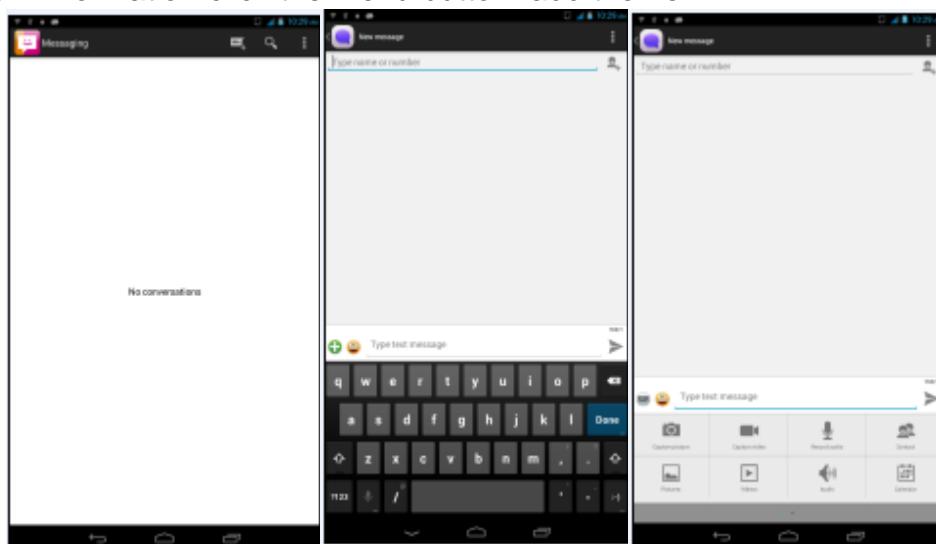

Replacement SMS reminder tone

Access to the information interface - "click the menu button, select "Settings" function - "Select "Select Ringtone"function;

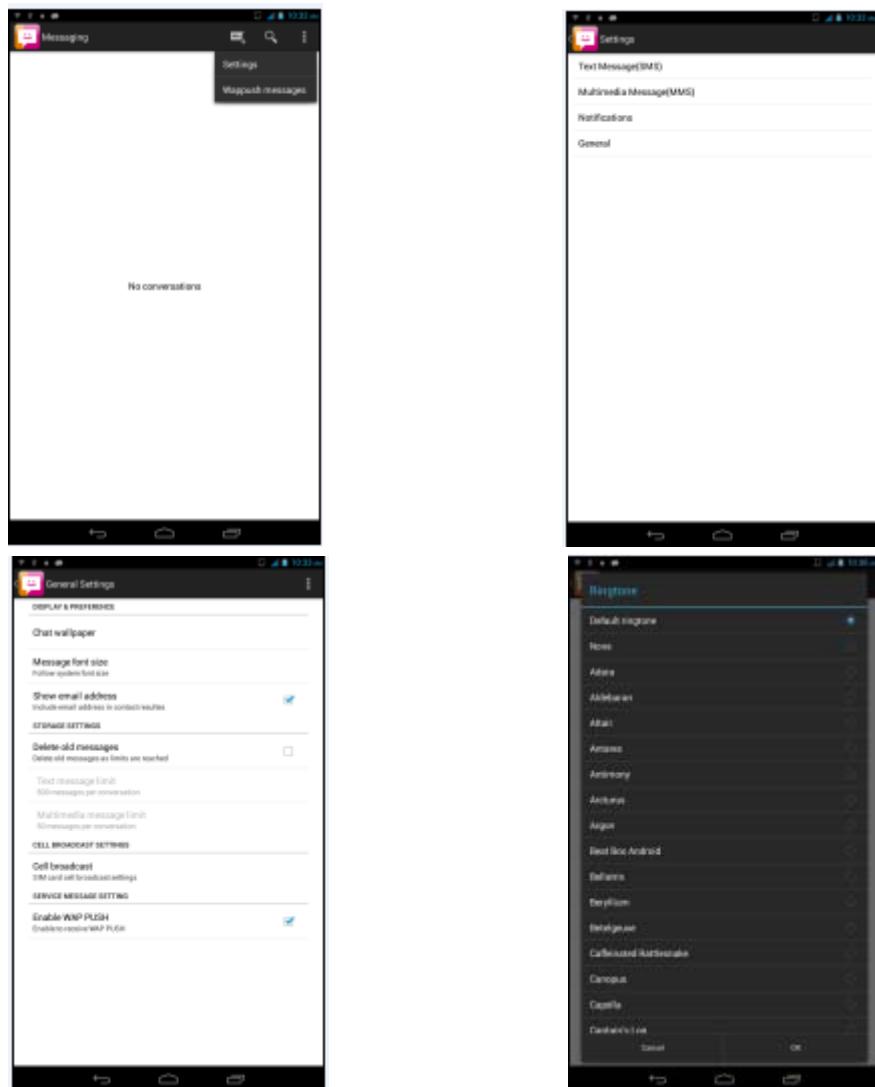


View the sender information

Access to the information screen - "Select the message - " click  - view the sender information




Forwards

Access to the information screen - "Select the message - " Long press the Information, there shortcut keys - "select"Forward "function

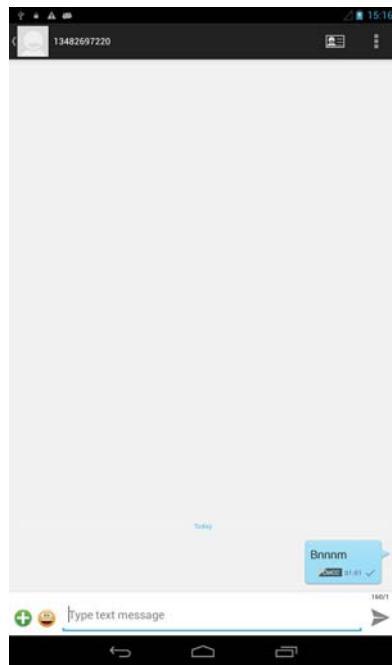

View information details

Access to the information screen- "Select the message- " Long press the Information, there shortcut keys -"select View details "function

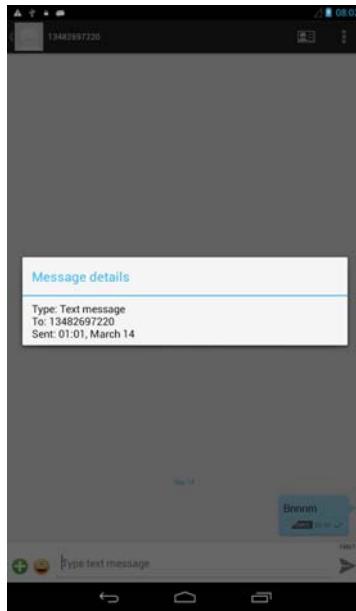


Delete information session specific information on a particular
Access to the information screen - "Select the message - " Long press and
Information, there shortcut keys - "select "Delete "function



Contact Search


Into the contact interface - "click  button

Search supported by the first letter and the entire search string

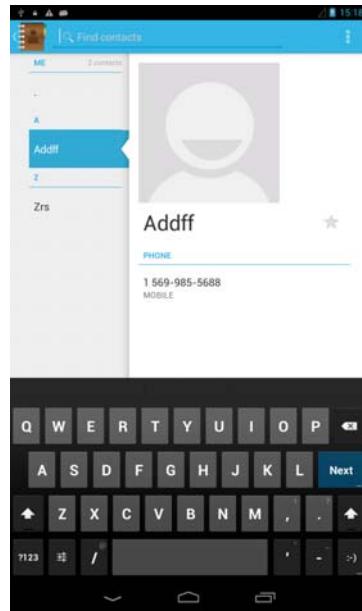

Paste the text / copy Features

Into the input field - "input string, long press and enter the region, there shortcut keys - " select All " " cut All " , "copy All", "paste All"

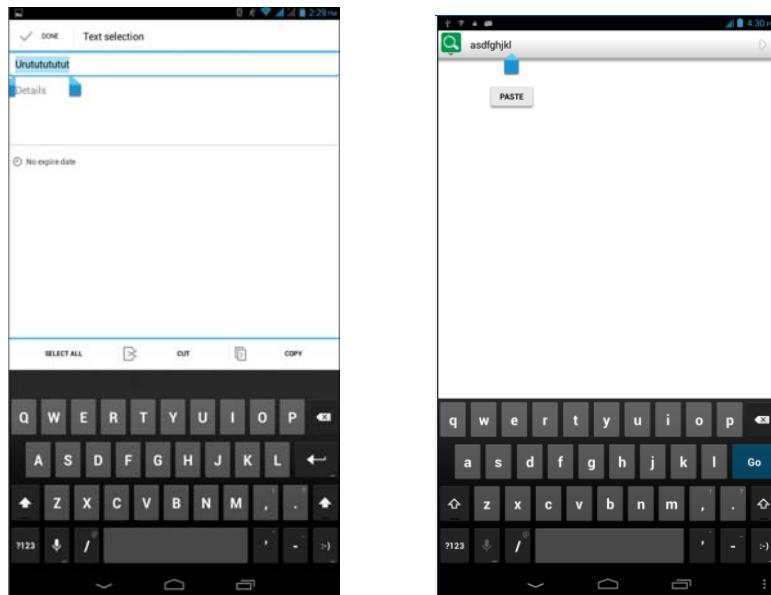

E-mail Features

Configuring mail account

Enter the Program Group screen - "Select"Email"application -"Enter e-mail address and password

If the system automatically recognizes the mailbox information, will

automatically configure; if the system does not recognize, will require users to type IMAP mailbox, or POP3, enter the appropriate configuration information.


Gmail For example:

E-mail Address: xxxxx@gmail.com

Password:

Configure multiple email accounts


Enter the Program Group screen - "Select"Email"application - " Click on the menu button-select setting function -select "Add Account"feature

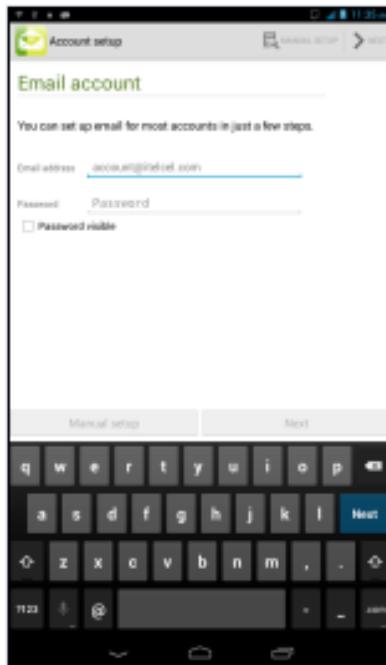

Delete email account


Select "Settings" -" Select "google "function

–select account - " select the "Remove Account"function

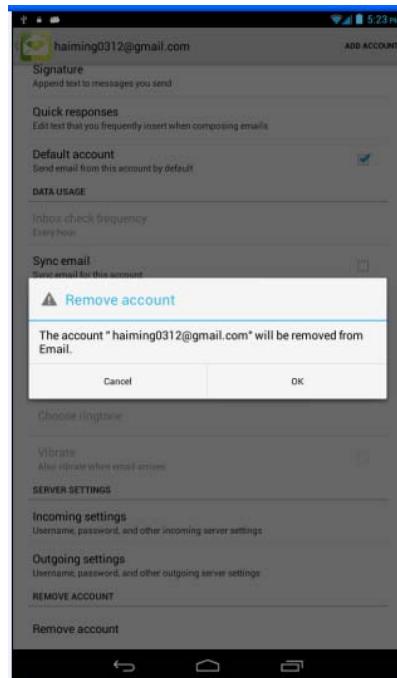

Email check frequency setting

Enter the Program Group screen - "Select"Email"application - Click on the menu button-select setting function –select account - " select I nbox check frequency "function

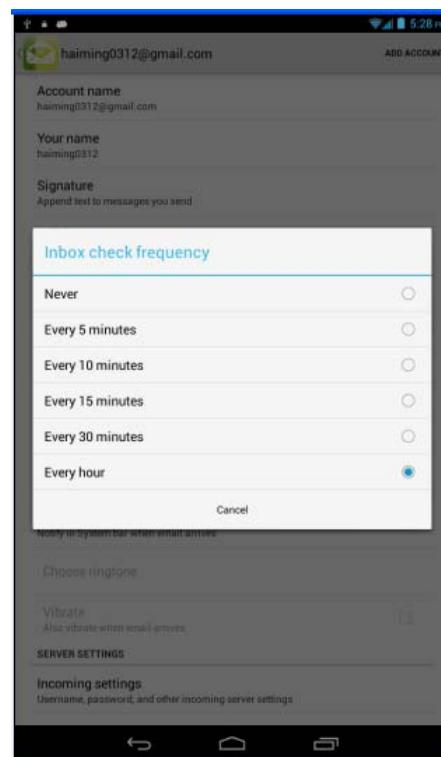

Desktop Features

The common features into the desktop

Interface into the program group - "Select the desktop into the application

-"long by application, the application will be placed to the desktop;



Wallpapers


In the desktop space - the "long Click the desktop, the shortcut keys

-"Select"Wallpaper"feature



Application Packet

In the desktop space – sliding the application to another application – click the application to open New Folder

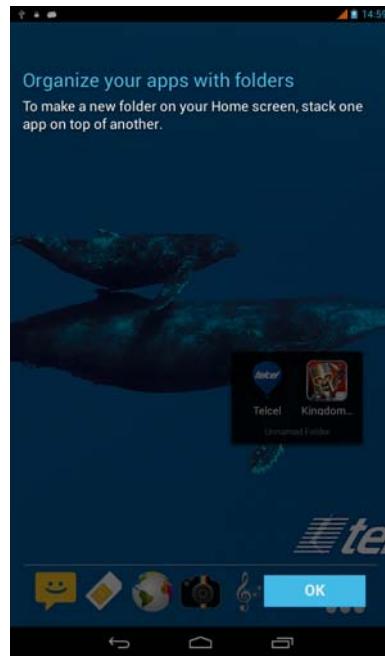


Change the folder name

Open the folder on the desktop - " click Input box - Rename Folder




Add contacts to your desktop

In the widgets space -long press the contact widget -" choose a contact

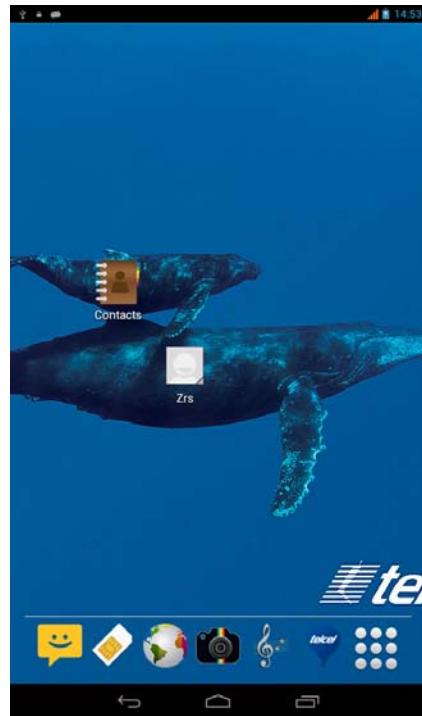

Add URL to the desktop

In the widgets space -long press the Bookmark widget -" choose a bookmark

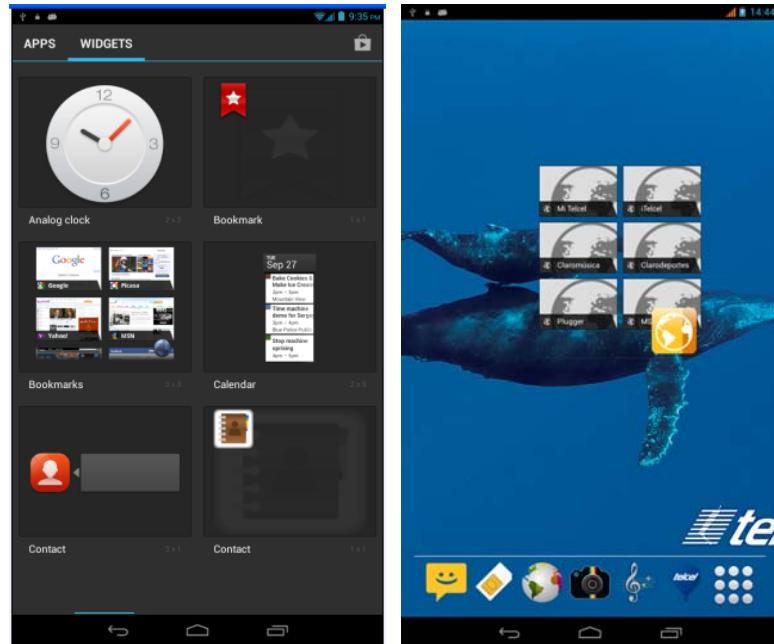

Add a playlist to your desktop

In the widgets space -long press the Music playlist widget -" Select a playlist

(operation method and procedure as above)




Delete the contents of the desktop

Select the desktop content - then "Long press the icon - " into the remove icon in the top of the screen



Bluetooth Function

Select "Settings" -" Select "Bluetooth"function

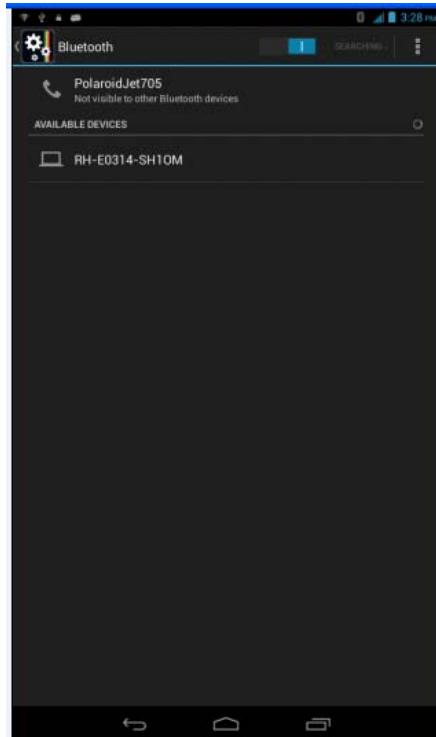


Wifi Features

Select "Settings"- "Select WLAN"- select "Add NETWORK ", select the desired access APN




Flight mode Function

Select "Settings"- "Select More"- " choose "Flight Mode"function

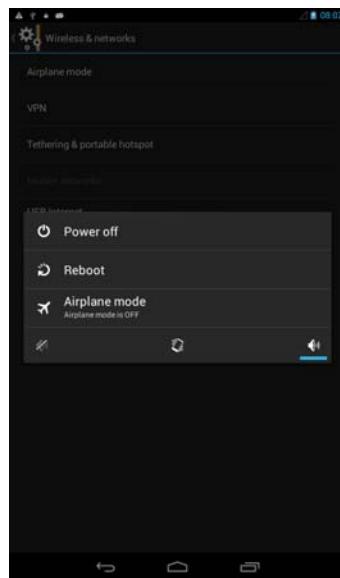


Or select the phone, "Off"button - "select the"Flight Mode "function

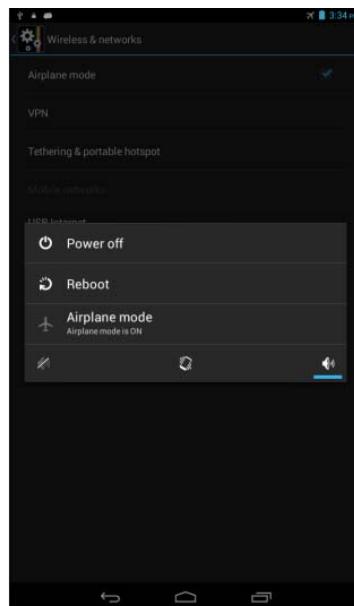


Black unlock

Select "Settings"- "Select " security "- Select the " Screen lock"-Pattern

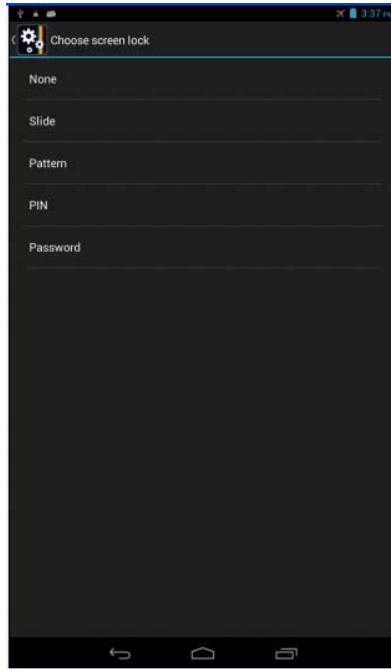


Restore to factory default

Select "Settings"->"Select"Backup&reset"-> select "Factory data reset"

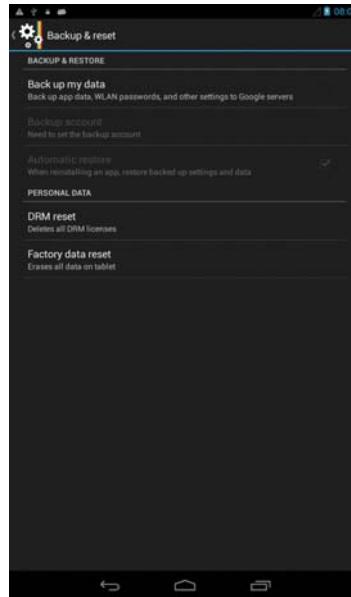


Storage Settings

Select "Settings"->"Select"storage"

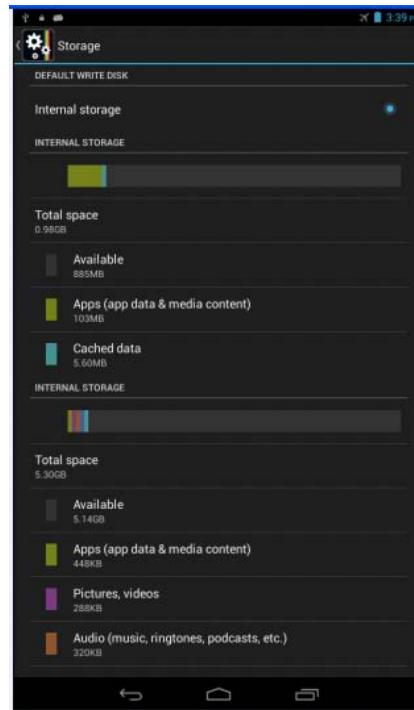


GPS Settings

Select "Settings"- "Select " location services"- " Check the "Enable GPS satellites "

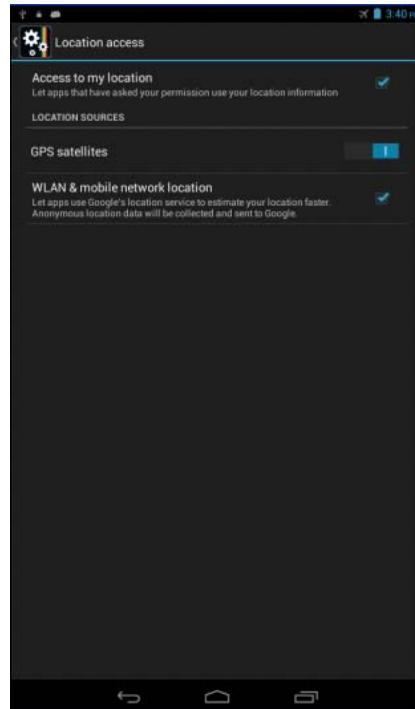


English language switching phone

Select "Settings"- "Language & input "- Select " Language ",Select your desired language

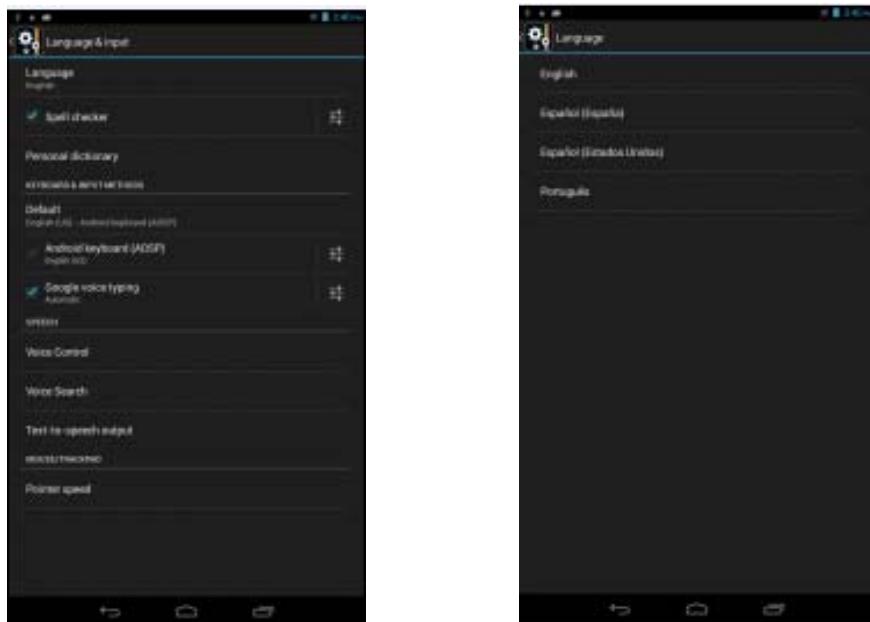


Input set

Select "Settings"- " Language & input "-click 

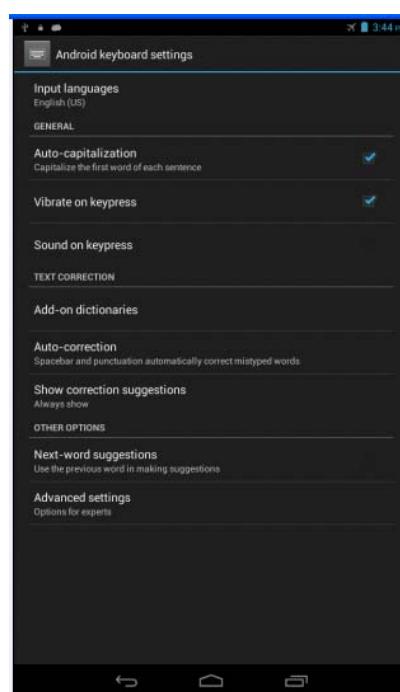


Replacement mobile phone input method

Select "Settings"- " Language & input "-Default

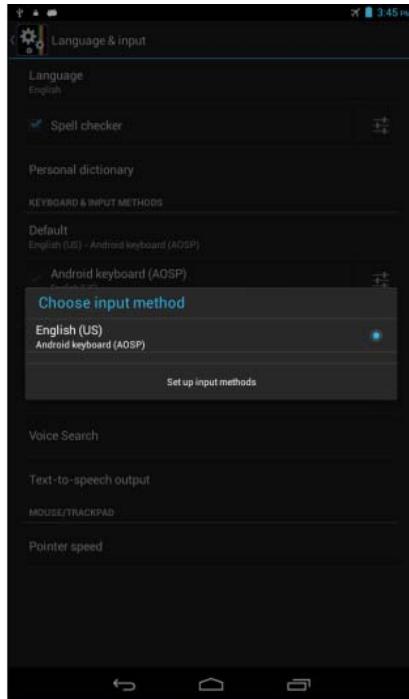

Android phone data cable links


Select "Settings"- "Select"Developer options"- "Check"USB debugging " Products installed on your computer drive, the link on the USB cable;

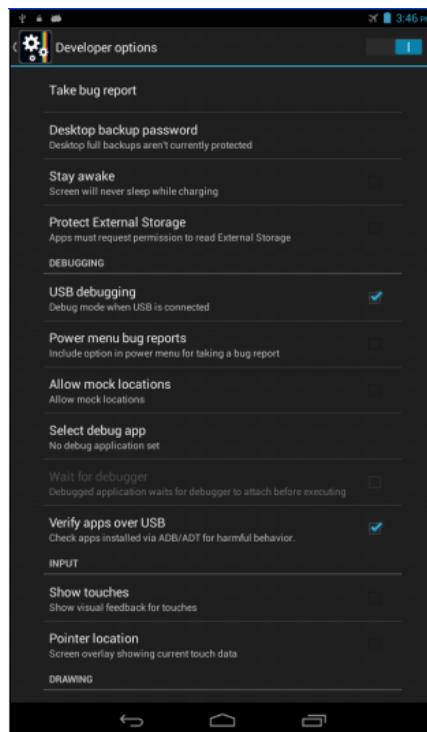

Introduce cross-screen display

Enter the "Settings, select the" auxiliary function "checked" automatic


rotary screen, "and realize the automatic screen rotation

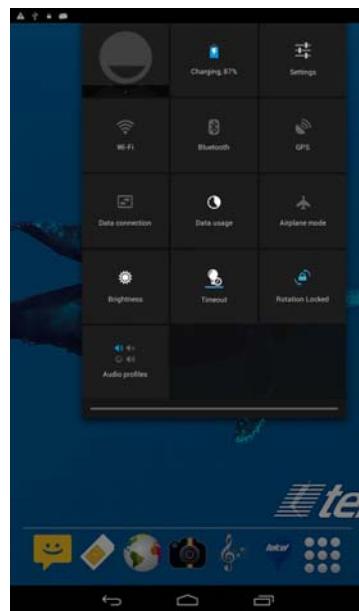

Browser Features


Visit the website

Browser - "Click url input area "-" Enter the URL of web browsing-click  button

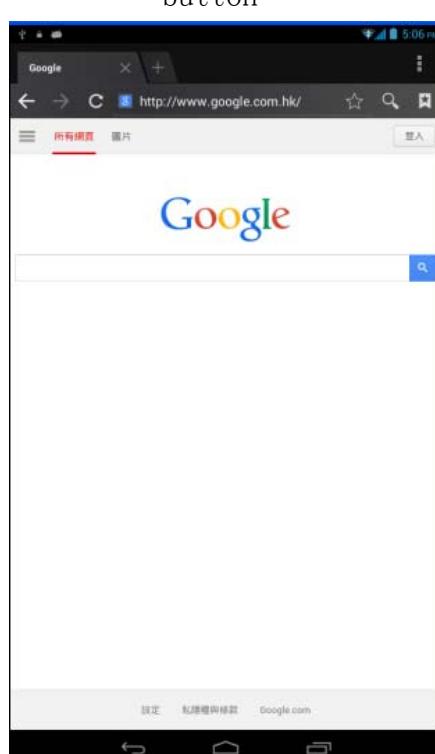


Download Web page images or other objects

Browser - "browse the web, long press on the picture, there shortcut keys, choose "Save Image "function

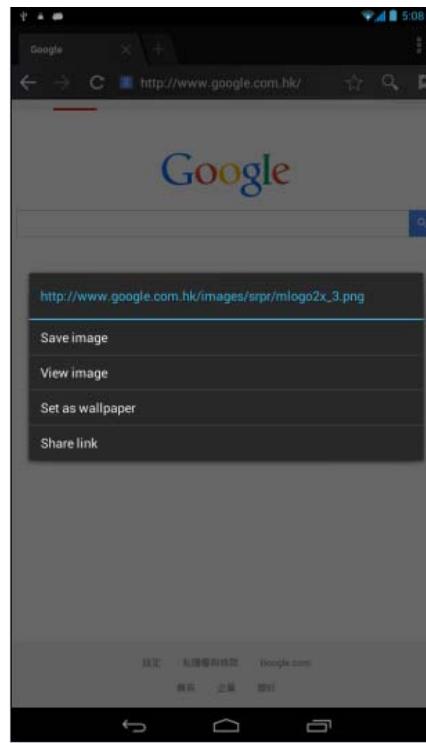

Browser settings / search page

Browser - "browse the web" - click "menu button", -select settings / find on page

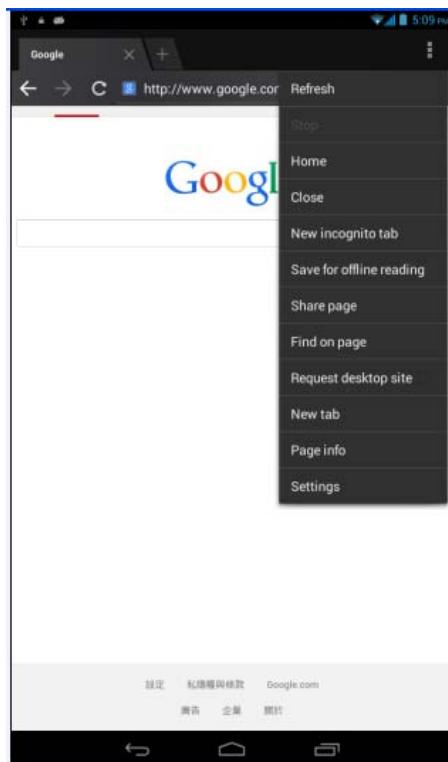

Q/A

1. How to turn off the software running in the background too much

Download Advanced Task Manager Advanced Task Manager and select install, it can help you achieve, automatic end of the program services, to switch between programs, display memory information, exclusion list, an end of all widgets, fast uninstall program and other functions, To free up memory space, reducing the CPU's operation long pressure, increase speed, to extend the purpose of standby time.

Download:

http://m.91.com/soft/detail.aspx?platform=android&f_id=4001520

2. How to quickly set up Email

In the Android system, can automatically set the POP3 or IMAP e-mail most accounts, the e-mail application, directly enter the e-mail address and password, if not automatically fit in the mailbox, the mailbox will be required by user Server information. See details in front of the "E-mail Features"section.

3. How do I view the capacity of SD card case

Select the "Settings"-Select Storage -select "SD card and phone memory", will see the current SD card capacity information phone

4. How to save electricity PMID705GTV

First, reduce the screen brightness can be used in peacetime by reducing the brightness to reduce battery consumption, in the "Settings " in the "sound and display" found on "brightness", and then sliding scale in respect of the brightness can be set Android phones;

Close GPS global positioning, in the "Settings"and select" location services" -uncheck the following "Enable GPS satellite set" can be;

Usually if you do not use the Wi-Fi, Bluetooth headset can be improved by turning off these options to the standby time, turn off the WLAN search can save about 30% to 40% of standby time;

Usually close calls and text messages to remind vibration;

5. How PMID705GTV lock screen, to prevent others from using

In the "Settings", select " Security "and then select "screen lock""pattern", to set individual unlock pattern, to prevent strangers use or purpose of ensuring privacy of confidential documents.

6. Why does not the USB data cable links your computer

Confirmed in the phone's "Settings"-""Developer options"- in the "USB debugging"functionality check; also installed the correct USB driver

7. How to install a program on a non-Android Market

Select "Settings"-"" Security ", the"unknown source "function check

8. In browsing the web or other applications, how to switch to other applications

If you need to open when browsing other applications, you can long press the Home key to achieving long task switch, long press return directly to the desktop (note that the system default task only last 6 months)

9. How to enter the silent mode quickly

In addition to continuing foreign long press the volume down key, and directly Into the status bar select the silent mode.

10. How to forward SMS / MMS

Long press and Information applications in the information content of an item in the list, until the pop-up shortcut menu, select "Forward" can be realized.

11. how to paste and copy text

Into the input field - "input string, long press and enter the region, there shortcut keys - " select All " " cut All " , "copy All", "paste All"

12. download and install the application installation path can be set to SD card

Platform reason, the application can only be installed in the phone flash memory

13. In the phone program group is installed too many applications, how to solve

In the desktop space – sliding the application to another application – click the application to open New Folder

14. Contacts are sorted, can change

Sort of way platform, the first number, then letters, then the Chinese way of sorting; the user can not set their own sort

15. Contacts whether to support the group

In the contacts interface-select group

16. contacts and SMS storage capacity limits the number of

Platform reason, contacts and SMS storage for no clear limit value, depending on the size of the current mobile phone memory space

17. How to set the SD card, personalized ring tones

In the SD card, are established "ringtones" (ringtones) "alarms" (alarm tone) "notifications" (SMS notification tone), the ring tones into a different folder, the phone can be automatically identified.

18. How to sync the phone contacts to the original PMID705GTV

using Bluetooth the way, the two cellphone, sync contacts;

19. How to use the PMID705GTV access Wifi (WLAN)

Wifi signal at the scene to ensure that the premise of the specific see "Wifi

function "

20. How to Find Contact

Into the contact interface, select the "Search"menu, you can search for contacts, you can use the first letter of query letters;

21. how to download applications for the PMID705GTV

- 1) Visit Google Market <http://www.android.com/market/>; need to pay to download some software;
- 2) third-party sites, access to applications, such sites are:

<http://www.waptw.com/>

<http://android.sj.91.com/list/rjyxhj.shtml>

.....

More downloaded software will be installed in the SD card and some software may vary depending on operating system version, network access nodes, size or other reasons can not be used.

22. What are commonly used android forum

<http://www.waptw.com/>

<http://sj.91.com/>

<http://www.android123.com/>

<http://www.android86.com.cn/>

<http://www.androidin.net/bbs/index.php>

<http://bbs.zhiqi.com.cn/forum-33-1.html>

<http://www.androidin.net/bbs/>

<http://www.hiapk.com/bbs/>

23. How do I delete the downloaded software

"Settings" - ""Manage app"- "Select the application to be deleted

24. How to view mobile phone version information

"Settings" - "" About phone "mobile phone version information can be obtained, including the Android version, Linux version, software version, hardware version, etc.

25. How do I copy SIM card contact information

Into the Contacts application, click the menu button, select "Import Contacts", then you can see the SIM card contacts, if only to import one, you can click an item. If all the import needs to long press the menu key, select Import to import all.

26. why the message has a different time and date display

Message displayed on the principle that the display of the day time and date have shown that non-day

27. PMID705GTV whether to support the Java

Platform reason, PMID705GTV does not support Java, if you need to install third-party Java applications, you need to install the Java runtime environment PMID705GTV.

FCC Caution.

§ 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off

and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Specific Absorption Rate (SAR) information:

This Automotive Diagnosis Computer meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.

FCC RF Exposure Information and Statement The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: POLAROID PMID705GTV (**FCC ID: 2ABD2PMID705GTV**) has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the **ear is N/A** and when properly worn on the body is **1.32W/kg**. This device was tested for typical body-worn operations with the back of the handset kept **1.5cm** from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a **1.5cm** separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

Body-worn Operation

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of **1.5 cm** must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.