

FCC PART 15B

TEST REPORT

For

Beijing Noitom Technology Ltd.

Room 432, Main Tower 28 Xijiekouwai Blvd, Beijing, China

FCC ID: 2ABTRRECEIVER

Report Type: Original Report	Product Type: PERCEPTION Receiver
Test Engineer: Dean Liu	<i>Dean Liu</i>
Report Number: R2BJ140604051-00B	
Report Date: 2014-08-11	
Reviewed By: Leon Chen RF Engineer	<i>Leon Chen</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EUT EXERCISE SOFTWARE	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	7
MEASUREMENT UNCERTAINTY	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE	8
CORRECTED AMPLITUDE & MARGIN CALCULATION	8
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.109 - RADIATED EMISSIONS	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Beijing Noitom Technology Ltd.*'s product, model number: *TM-syn-96 (FCC ID:2ABTRRECEIVER)* (the "EUT") in this report was a *PERCEPTION Receiver*, which was measured approximately: 8.0 cm (L) x 5.9 cm (W) x 1.1 cm (H), rated input voltage: 120V_{AC}.

All measurement and test data in this report was gathered from production sample serial number: 140604051 (Assigned by BACL, Dongguan). The EUT was received on 2014-06-11.

Objective

This report is prepared on behalf of *Beijing Noitom Technology Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15C DXX submissions with FCC ID: *2ABTRRECEIVER*.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical mode.

EUT Exercise Software

The software “RF Test Tool” was used in test.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	EX 39L	JP890W1
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Mouse	MOSGUOA	F0Y02P7Y
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
Samsung	Monitor	S22C330H	2XDCHTHD101491K

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	Yes	No	1.2	Serial Port of PC	Modem
Parallel Cable	Yes	No	1.2	Parallel Port of PC	Printer
Keyboard Cable	Yes	No	1.5	USB Port of PC	Keyboard
Mouse cable	Yes	No	1.5	USB Port of PC	Mouse
USB Cable	Yes	No	1.1	USB Port of PC	EUT

Block Diagram of Test Setup

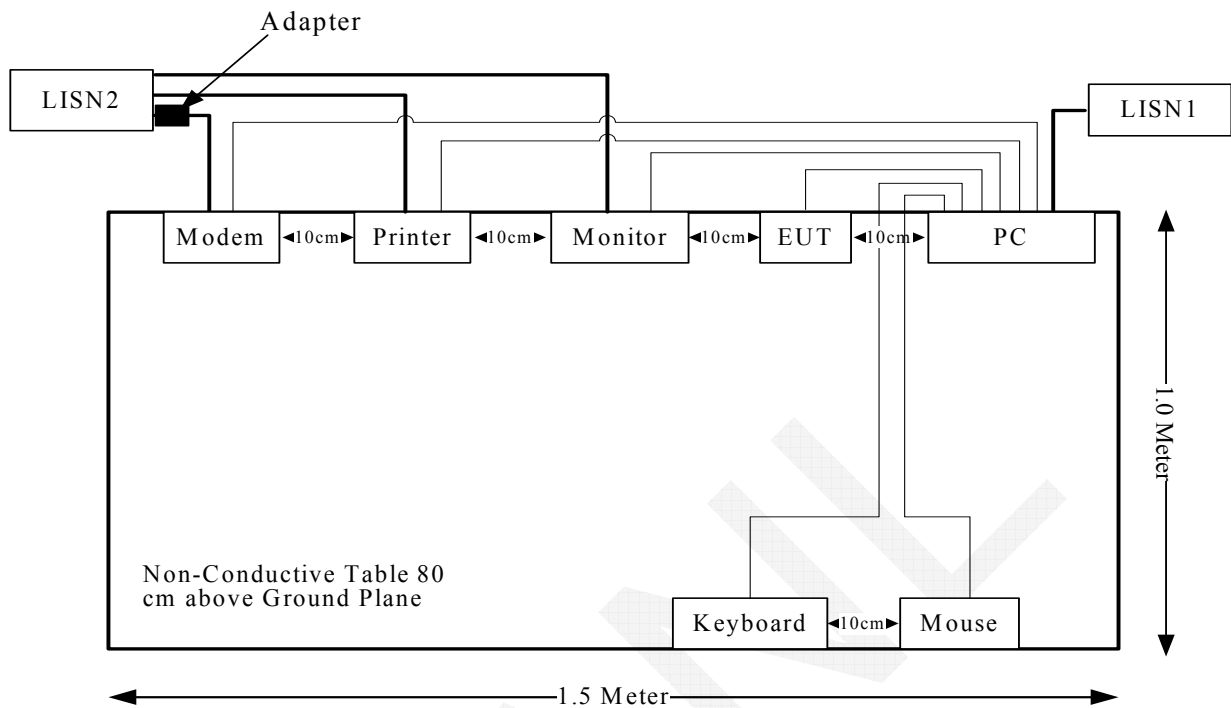

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

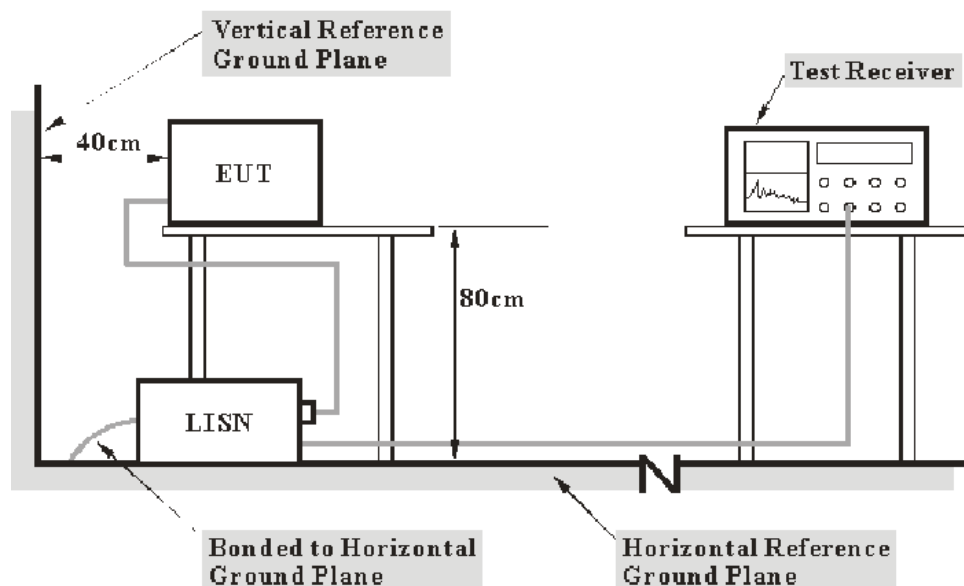

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the PC was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-20
R&S	L.I.S.N	ESH3-Z5	843331/015	2013-09-25	2014-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-01-22	2015-01-22
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

7.7 dB at 0.214692 MHz in the **Line** conducted mode.

Test Data**Environmental Conditions**


Temperature:	27.2 °C
Relative Humidity:	55 %
ATM Pressure:	100.3 kPa

The testing was performed by Dean Liu on 2014-07-01.

Note: The EUT has two types of antenna (terminal antenna and wall mount antenna), the terminal antenna had been applied for the measurement, which was the worst case.


Test mode: Operating

AC 120 V, 60 Hz, Line:

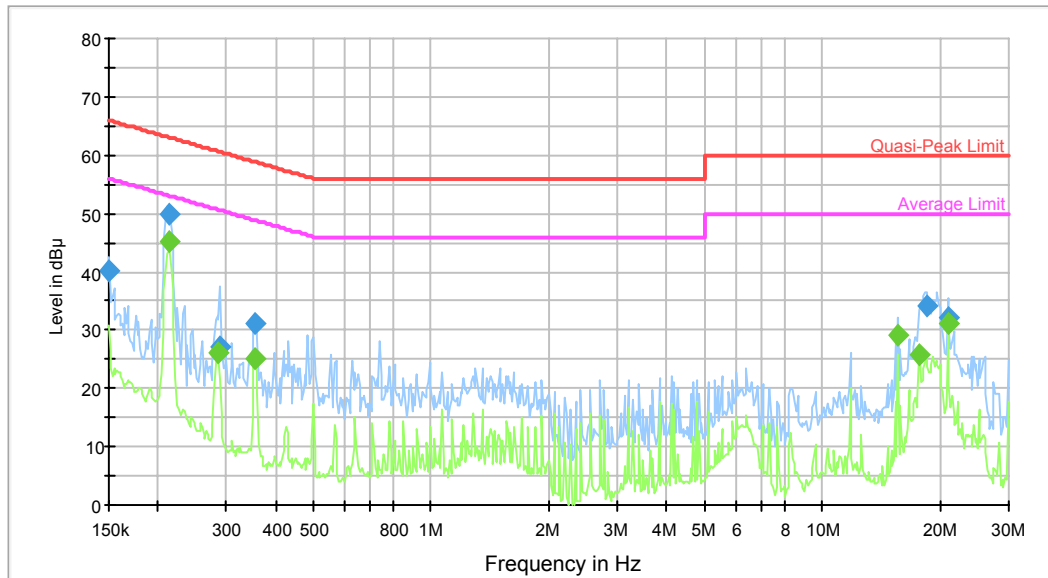

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	40.2	9.000	L1	10.1	25.8	66.0	Compliance
0.214692	50.0	9.000	L1	10.8	13.0	63.0	Compliance
0.288307	27.1	9.000	L1	10.7	33.5	60.6	Compliance
0.354674	31.0	9.000	L1	10.7	27.9	58.9	Compliance
18.460903	34.1	9.000	L1	11.0	25.9	60.0	Compliance
20.971112	32.0	9.000	L1	11.2	28.0	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.214692	45.3	9.000	L1	10.8	7.7	53.0	Compliance
0.286019	26.1	9.000	L1	10.7	24.5	50.6	Compliance
0.354674	25.1	9.000	L1	10.7	23.8	48.9	Compliance
15.616430	29.0	9.000	L1	10.7	21.0	50.0	Compliance
17.739864	25.9	9.000	L1	10.9	24.1	50.0	Compliance
20.971112	31.3	9.000	L1	11.2	18.7	50.0	Compliance

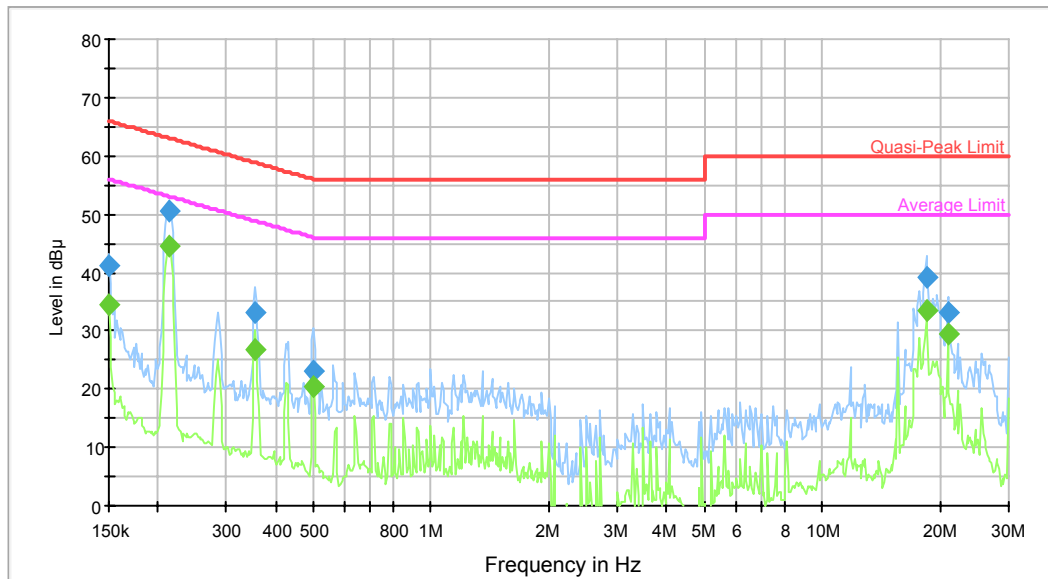AC 120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	41.3	9.000	N	10.3	24.7	66.0	Compliance
0.214692	50.4	9.000	N	11.3	12.6	63.0	Compliance
0.354674	33.0	9.000	N	11.0	25.9	58.9	Compliance
0.499611	23.2	9.000	N	10.4	32.8	56.0	Compliance
18.460903	39.1	9.000	N	11.0	20.9	60.0	Compliance
20.971112	33.0	9.000	N	11.2	27.0	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	34.3	9.000	N	10.3	21.7	56.0	Compliance
0.212988	44.5	9.000	N	11.3	8.6	53.1	Compliance
0.354674	26.8	9.000	N	11.0	22.1	48.9	Compliance
0.499611	20.4	9.000	N	10.4	25.6	46.0	Compliance
18.460903	33.4	9.000	N	11.0	16.6	50.0	Compliance
20.971112	29.4	9.000	N	11.2	20.6	50.0	Compliance

FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

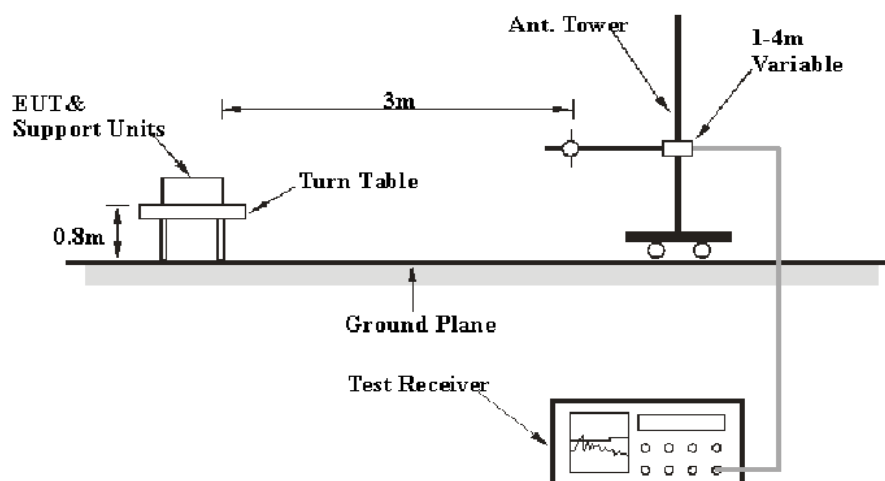

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP

Test Procedure

For the radiated emissions test, the PC was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-09
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-06
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:

4.50 dB at 47.4600 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	62 %
ATM Pressure:	99.8 kPa


The testing was performed by Dean Liu on 2014-08-07.

Note: The EUT has two types of antenna (terminal antenna and wall mount antenna), the terminal antenna had been applied for the measurement, which was the worst case.


Test mode: Operating

Below 1GHz:

Horizontal:

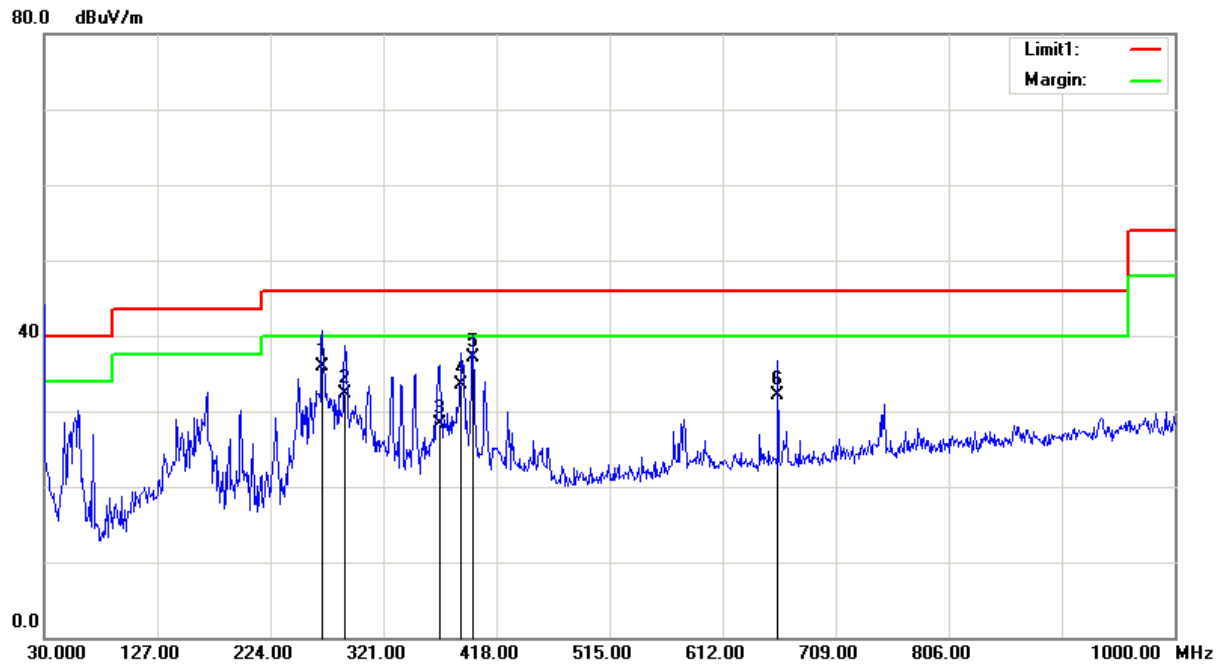

Frequency (MHz)	Receiver Reading (dB μ V/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
268.6200	42.05	QP	-6.15	35.90	46.00	10.10
288.0200	38.10	QP	-5.70	32.40	46.00	13.60
369.5000	32.41	QP	-4.01	28.40	46.00	17.60
387.9300	37.24	QP	-3.74	33.50	46.00	12.50
397.6300	40.64	QP	-3.44	37.20	46.00	8.80
659.5300	31.57	QP	0.63	32.20	46.00	13.80

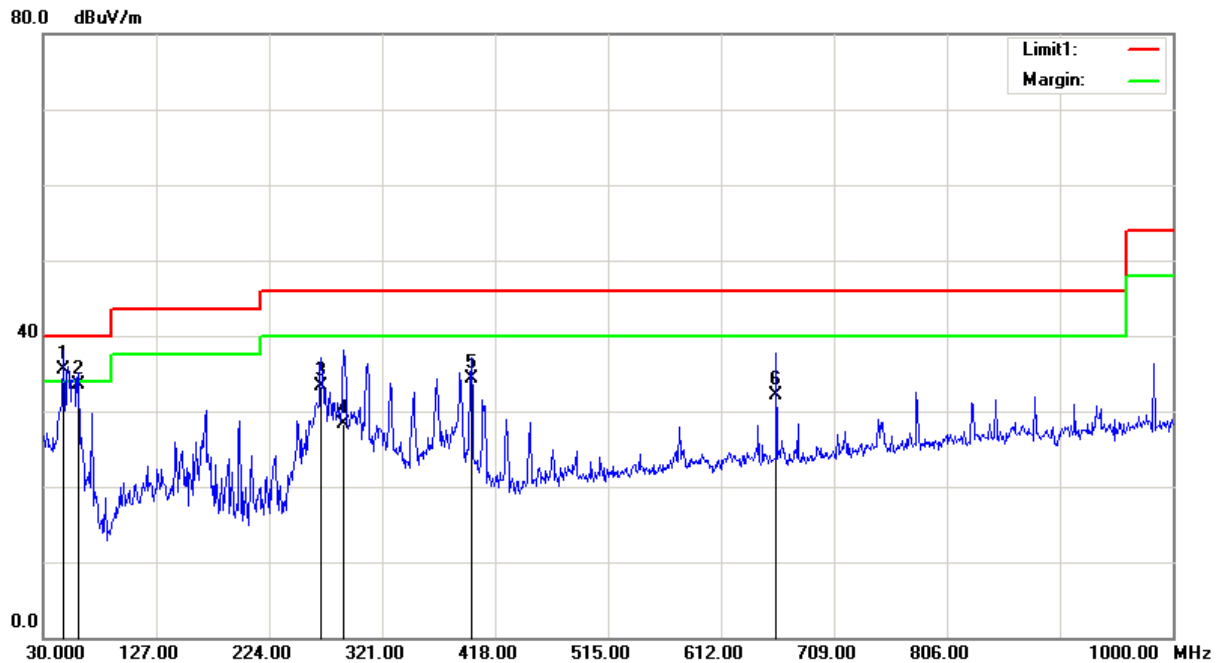Vertical:

Frequency (MHz)	Receiver Reading (dBμV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
47.4600	46.31	QP	-10.81	35.50	40.00	4.50*
60.0700	46.38	QP	-12.88	33.50	40.00	6.50
268.6200	39.55	QP	-6.15	33.40	46.00	12.60
288.0200	34.00	QP	-5.70	28.30	46.00	17.70
397.6300	37.84	QP	-3.44	34.40	46.00	11.60
659.5300	31.47	QP	0.63	32.10	46.00	13.90

*Within measurement uncertainty!

***** END OF REPORT *****