



Antenna Test Report

Project No	P24041G4B	PCB Version	GM002PX_V1.0
Tester	XuNing	Date	2025.4.27
Auditing		Date	
Approval		Date	

Contents

1. Project Information	3rd
2. Technical Specification	4th
3. The shape and size of the antenna	6th
4. The result of the test	8th
4.1. Antenna Gain and Efficiency	8th
4.1.1. Product coordinate axis position	8th
4.1.2. Gain and Efficiency data sheet	9th
4.1.3. Graphs of Gain and Efficiency	23rd
4.2. Radiation Pattern	30th
4.2.1. 3D Radiation Pattern	30th
4.2.2. 2D Radiation Pattern	38th

1. Project Information

- 1.1. Antenna Coding: ANT-BFIL8024023 (BLE) ANT-WFIL8024024 (WiFi1)
- ANT-WFIL8024025 (WiFi2) ANT-FFIL6024026 (4G)
- ANT-LWSNC24027 (Lora915) ANT-LWSNC24028 (Lora868)
- 1.2. Antenna Type: FPC&PCB&Glue stick antenna
- 1.3. Model of the DUT: MG6-A
- 1.4. Test Data : 2025.4.27
- 1.5. Product picture:


Product appearance	
PCB board and antenna	

2. Technical Specification


Electrical Specifications	
Frequency Range	BLE: 2400-2480 MHz WiFi: 2480-2500MHz LoRa868:830-890MHz LoRa915: 900-930MHz LTE: 678-960MHz&1710~2700MHz
Peak Gain(dBi)	BLE0: 3.37 BLE1:4.28 LoRa868:2.22 LoRa915:2.08 WiFi1: 5.24 WiFi2: 4.4 LTE(NA) Band2: 4.11 Band4: 5.29 Band5: 3.7 Band12: -0.07 Band13: 4.27 Band66: 5.29 LTE (EU) Band1: 5.29 Band3: 1.7 Band7: 3.76 Band8: 0.1 Band20: 4.11 Band28: 4.27 LTE(CN) Band1: 5.29 Band3: 1.7 Band5: 3.7 Band8: 0.1 Band34: 3.89 Band39: 3.16 Band40: 3.34 Band41: 3.76
Return Loss	≤-10dB

VSWR	≤3.0
Bandwidth (S11≤-10dB)	MHz
Input Impedance	50Ω
Radiation direction	Omni
Polarization Type	Linear
Lightning Protection	DC grounding
Power Capacity	1000mW (30dBm)
Mechanical Specifications	
Antenna Size	BLE: 25mm× 8 mm WiFi1:39.67mm×11.44mm WiFi2: 44.85mm×9mm LTE: 133.42mm×22.14mm Lora868/915: 195mm×∅ 13mm
Core Radiator	Copper
Coaxial wire	/
Connect Type	/
Operating Temperature	-20 to +60℃
Storage Temperature	-10 to +60℃


3. The shape and size of the antenna

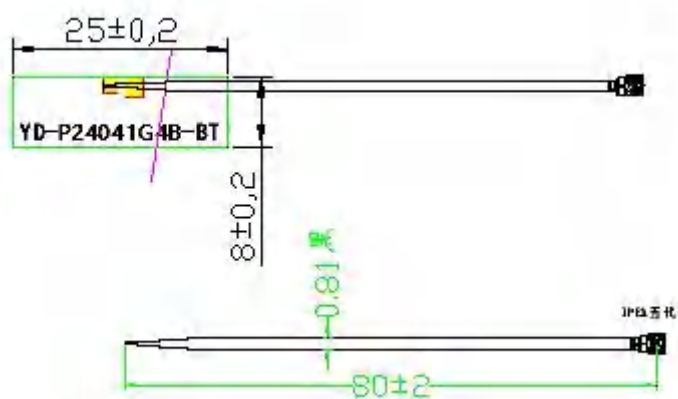


BLE

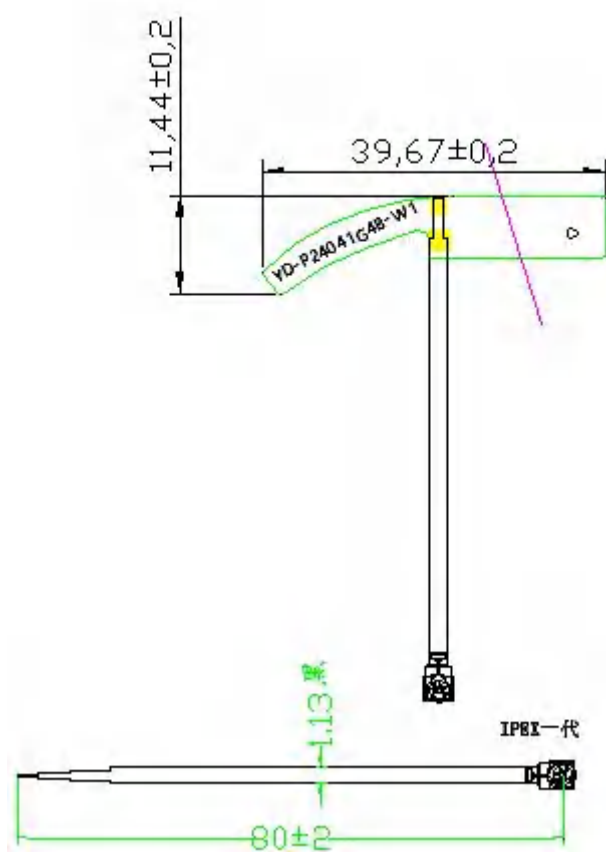


WiFi1

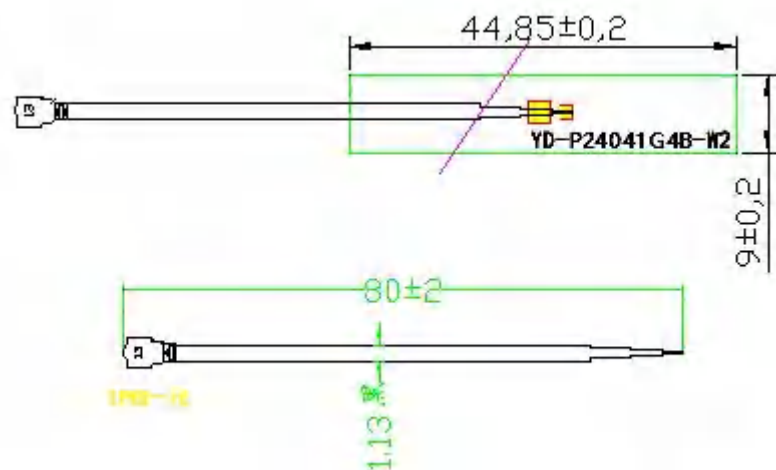

WiFi2

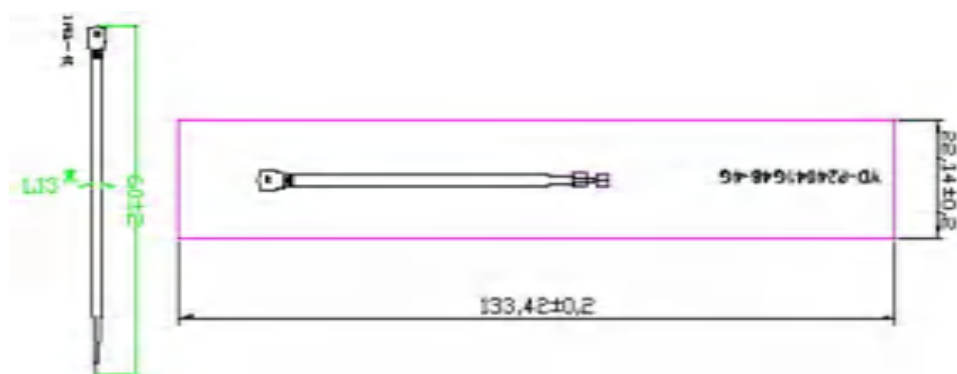

4G

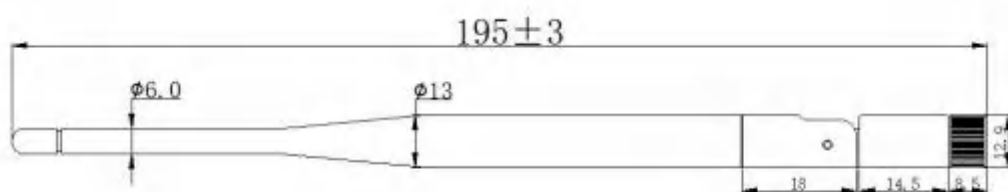

SMA-公头母针



Lora868/915

Unit: mm

4. The result of the test

4.1. Antenna Gain and Efficiency

4.1.1. Product coordinate axis position

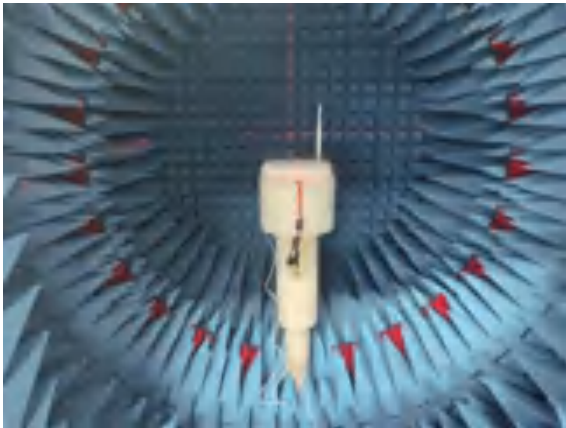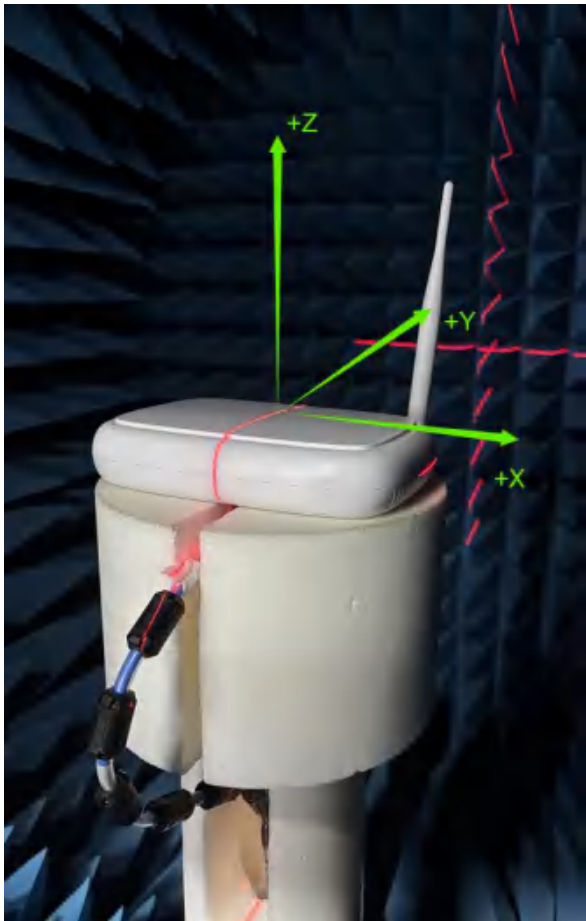Inside the microwave anechoic chamber	Product coordinate axis position
	

4.1.2. Gain and Efficiency data sheet

BLE0

频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)
2400	3.37	-2.6	54.97
2402	3.28	-2.62	54.64
2404	3.19	-2.64	54.39
2406	3.12	-2.67	54.1
2408	3.02	-2.7	53.75
2410	2.92	-2.72	53.43
2412	2.81	-2.76	53
2414	2.72	-2.78	52.72
2416	2.59	-2.79	52.56
2418	2.5	-2.82	52.21
2420	2.38	-2.86	51.75
2422	2.28	-2.89	51.44
2424	2.16	-2.91	51.14
2426	1.91	-2.94	50.77
2428	1.81	-2.96	50.6
2430	1.72	-2.98	50.33
2432	1.67	-2.99	50.27
2434	1.6	-3	50.17
2436	1.41	-3.02	49.88
2438	1.32	-3.02	49.91
2440	1.21	-3.01	50.02
2442	1.1	-2.99	50.27
2444	1	-2.99	50.29
2446	0.91	-3.02	49.93
2448	0.98	-3.02	49.92
2450	1.08	-2.98	50.33
2452	1.18	-2.98	50.37
2454	1.29	-2.96	50.61
2456	1.43	-2.95	50.67
2458	1.5	-2.98	50.4
2460	1.56	-3.01	50
2462	1.61	-3.04	49.68
2464	1.69	-3.04	49.7
2466	1.78	-3.02	49.92
2468	1.87	-2.99	50.26
2470	1.9	-2.99	50.21
2472	1.94	-2.98	50.36
2474	1.97	-2.98	50.34
2476	2	-2.98	50.32
2478	2.05	-2.95	50.68
2480	2.11	-2.91	51.13

BLE1

频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)
2400	3.83	-2.81	52.36
2402	3.86	-2.81	52.31
2404	3.9	-2.81	52.4
2406	3.97	-2.79	52.56
2408	3.99	-2.8	52.49
2410	4.02	-2.8	52.44
2412	4.04	-2.81	52.34
2414	4.06	-2.81	52.32
2416	4.07	-2.79	52.55
2418	4.09	-2.81	52.38
2420	4.11	-2.84	52
2422	4.13	-2.85	51.83
2424	4.15	-2.87	51.7
2426	4.05	-2.88	51.52
2428	4.09	-2.88	51.52
2430	4.12	-2.89	51.36
2432	4.2	-2.89	51.38
2434	4.26	-2.9	51.32
2436	4.21	-2.91	51.12
2438	4.25	-2.9	51.24
2440	4.28	-2.89	51.36
2442	4.27	-2.87	51.63
2444	4.24	-2.87	51.62
2446	4.15	-2.9	51.27
2448	4.15	-2.9	51.29
2450	4.18	-2.86	51.72
2452	4.2	-2.86	51.75
2454	4.21	-2.84	51.96
2456	4.22	-2.84	51.96
2458	4.17	-2.87	51.59
2460	4.12	-2.92	51.07
2462	4.07	-2.96	50.63
2464	4.06	-2.96	50.56
2466	4.06	-2.96	50.62
2468	4.07	-2.95	50.74
2470	4.05	-2.96	50.59
2472	4.05	-2.96	50.56
2474	4.03	-2.98	50.36
2476	3.95	-3	50.09
2478	3.96	-2.99	50.27
2480	3.97	-2.96	50.56

LORA(868Mhz)

频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)	PeakGain (dBi)
863	2.22	-1.38	72.80	2.22
864	2.22	-1.39	72.60	
865	2.21	-1.42	72.18	
866	2.13	-1.41	72.21	
867	2.14	-1.41	72.21	
868	2.16	-1.42	72.11	
869	2.16	-1.43	71.92	
870	2.17	-1.44	71.73	

LORA(915Mhz)

频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
902	2.08	-0.87	81.87	2.08
903	2.06	-0.86	82.03	
904	2.02	-0.88	81.64	
905	1.96	-0.92	80.84	
906	1.96	-0.95	80.38	
907	1.96	-0.93	80.69	
908	1.97	-0.92	80.98	
909	1.97	-0.91	81.17	
910	1.99	-0.88	81.61	
911	2.00	-0.88	81.57	
912	2.01	-0.88	81.63	
913	2.03	-0.88	81.71	
914	2.04	-0.88	81.74	
915	2.04	-0.89	81.52	
916	2.00	-0.92	80.90	
917	2.02	-0.91	81.04	
918	2.03	-0.91	81.11	
919	2.05	-0.90	81.28	
920	2.08	-0.88	81.64	
921	2.04	-0.91	81.11	
922	2.02	-0.92	80.99	
923	2.01	-0.91	81.18	
924	2.03	-0.87	81.77	
925	2.05	-0.83	82.51	
926	2.00	-0.88	81.59	
927	2.02	-0.86	82.00	
928	2.04	-0.84	82.44	

WIFI1

频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)
2400	5.13	-1.09	77.86
2402	5.14	-1.11	77.47
2404	5.15	-1.13	77.14
2406	5.21	-1.13	77.15
2408	5.23	-1.13	77.04
2410	5.24	-1.14	76.90
2412	5.22	-1.16	76.54
2414	5.21	-1.17	76.40
2416	5.20	-1.18	76.21
2418	5.21	-1.18	76.16
2420	5.20	-1.20	75.86
2422	5.20	-1.21	75.75
2424	5.18	-1.22	75.55
2426	5.18	-1.21	75.61
2428	5.15	-1.22	75.49
2430	5.12	-1.23	75.33
2432	5.12	-1.22	75.48
2434	5.10	-1.23	75.42
2436	5.14	-1.22	75.54
2438	5.12	-1.21	75.64
2440	5.10	-1.20	75.83
2442	5.05	-1.17	76.31
2444	4.98	-1.16	76.51
2446	4.91	-1.17	76.46
2448	4.83	-1.16	76.50
2450	4.78	-1.13	77.03
2452	4.73	-1.13	77.13
2454	4.71	-1.10	77.60
2456	4.70	-1.09	77.82
2458	4.64	-1.10	77.66
2460	4.55	-1.13	77.16
2462	4.47	-1.15	76.66
2464	4.42	-1.15	76.77
2466	4.41	-1.12	77.23
2468	4.37	-1.10	77.65
2470	4.30	-1.11	77.53
2472	4.24	-1.10	77.71
2474	4.17	-1.10	77.59
2476	4.13	-1.09	77.73
2478	4.09	-1.07	78.19
2480	4.07	-1.03	78.80
2482	4.03	-1.02	79.08
2484	3.98	-1.02	79.11
2486	4.00	-1.01	79.22
2488	4.01	-1.00	79.38
2490	4.05	-0.98	79.87
2492	4.07	-0.96	80.11
2494	4.07	-0.96	80.15
2496	4.06	-0.96	80.13
2498	4.05	-0.98	79.76
2500	4.05	-0.99	79.58

WIFI2

频率(MHz)	增益(dBi)	效率(dB)	效率(%)
2400	4.40	-1.94	64.01
2402	4.36	-1.95	63.78
2404	4.33	-1.96	63.74
2406	4.31	-1.95	63.77
2408	4.28	-1.95	63.77
2410	4.24	-1.96	63.72
2412	4.18	-1.97	63.50
2414	4.14	-1.98	63.44
2416	4.12	-1.98	63.46
2418	4.09	-1.98	63.39
2420	4.04	-2.00	63.14
2422	3.99	-2.01	62.96
2424	3.94	-2.02	62.84
2426	3.83	-2.03	62.72
2428	3.81	-2.03	62.66
2430	3.79	-2.03	62.59
2432	3.81	-2.02	62.74
2434	3.81	-2.02	62.74
2436	3.73	-2.04	62.56
2438	3.72	-2.03	62.67
2440	3.72	-2.01	62.92
2442	3.70	-1.97	63.49
2444	3.67	-1.95	63.76
2446	3.57	-1.98	63.44
2448	3.53	-1.96	63.65
2450	3.51	-1.92	64.22
2452	3.51	-1.91	64.43
2454	3.52	-1.88	64.86
2456	3.53	-1.88	64.86
2458	3.50	-1.89	64.77
2460	3.45	-1.91	64.45
2462	3.40	-1.93	64.11
2464	3.39	-1.91	64.36
2466	3.41	-1.89	64.75
2468	3.43	-1.86	65.12
2470	3.41	-1.87	65.04
2472	3.40	-1.86	65.22
2474	3.38	-1.85	65.26
2476	3.35	-1.85	65.32
2478	3.36	-1.81	65.86
2480	3.38	-1.77	66.48
2482	3.38	-1.75	66.81
2484	3.38	-1.74	66.96
2486	3.34	-1.75	66.84
2488	3.35	-1.73	67.18
2490	3.38	-1.69	67.74
2492	3.38	-1.67	68.05
2494	3.38	-1.65	68.32
2496	3.32	-1.67	68.00
2498	3.28	-1.69	67.81
2500	3.26	-1.68	67.86

LTE

Band1	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	1920	3	-2.61	54.78	5.29
	1925	3.22	-2.53	55.84	
	1930	3.11	-2.48	56.49	
	1935	3.25	-2.38	57.76	
	1940	3.37	-2.35	58.27	
	1945	3.45	-2.20	60.27	
	1950	3.52	-2.03	62.62	
	1955	3.56	-1.99	63.25	
	1960	3.69	-1.84	65.4	
	1965	3.83	-1.78	66.32	
	1970	3.86	-1.67	68.1	
	1975	3.92	-1.65	68.34	
	1980	3.96	-1.57	69.71	
	2110	5.29	-1.58	69.42	
	2115	5.19	-1.70	67.56	
	2120	5.16	-1.59	69.29	
	2125	5.13	-1.58	69.53	
	2130	5.1	-1.62	68.91	
	2135	5.07	-1.54	70.08	
	2140	4.85	-1.62	68.83	
	2145	4.76	-1.59	69.29	
	2150	4.61	-1.69	67.71	
	2155	4.5	-1.73	67.16	
	2160	4.4	-1.76	66.61	
	2165	4.48	-1.63	68.64	
	2170	4.14	-1.88	64.84	

Band2	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	1850	0.9	-4.07	39.21	4.11
	1855	0.83	-4.08	39.12	
	1860	0.85	-3.89	40.79	
	1865	0.88	-3.82	41.49	
	1870	0.99	-3.69	42.77	
	1875	1.25	-3.48	44.83	
	1880	1.39	-3.41	45.61	
	1885	1.7	-3.33	46.47	
	1890	1.88	-3.29	46.87	
	1895	2.13	-3.09	49.04	
	1900	2.41	-3.00	50.11	
	1905	2.35	-3.02	49.85	
	1910	2.88	-2.79	52.56	
	1930	3.11	-2.48	56.49	
	1935	3.25	-2.38	57.76	
	1940	3.37	-2.35	58.27	
	1945	3.45	-2.20	60.27	
	1950	3.52	-2.03	62.62	
	1955	3.56	-1.99	63.25	
	1960	3.69	-1.84	65.4	
	1965	3.83	-1.78	66.32	
	1970	3.86	-1.67	68.1	
	1975	3.92	-1.65	68.34	
	1980	3.96	-1.57	69.71	
	1985	4.11	-1.37	72.9	
	1990	4.03	-1.41	72.25	

Band3	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	1710	0.53	-4.41	36.21	1.7
	1715	0.72	-4.30	37.14	
	1720	0.81	-4.26	37.51	
	1725	0.98	-4.17	38.31	
	1730	1.12	-4.11	38.79	
	1735	1.18	-4.08	39.11	
	1740	1.3	-4.00	39.82	
	1745	1.22	-4.04	39.42	
	1750	1.29	-3.91	40.63	
	1755	1.51	-3.80	41.68	
	1760	1.59	-3.83	41.44	
	1765	1.7	-3.76	42.02	
	1770	1.65	-3.80	41.73	
	1775	1.64	-3.79	41.8	
	1780	1.57	-3.82	41.46	
	1785	1.43	-3.93	40.48	
	1805	1.59	-3.78	41.88	
	1810	1.45	-3.88	40.95	
	1815	1.48	-3.84	41.33	
	1820	1.32	-3.90	40.71	
	1825	1.04	-4.04	39.46	
	1830	0.81	-4.08	39.1	
	1835	0.91	-4.05	39.33	
	1840	0.93	-4.08	39.1	
	1845	0.97	-4.02	39.66	
	1850	0.9	-4.07	39.21	
	1855	0.83	-4.08	39.12	
	1860	0.85	-3.89	40.79	
	1865	0.88	-3.82	41.49	
	1870	0.99	-3.69	42.77	
	1875	1.25	-3.48	44.83	
	1880	1.39	-3.41	45.61	

Band4	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	1710	0.53	-4.41	36.21	5.29
	1715	0.72	-4.30	37.14	
	1720	0.81	-4.26	37.51	
	1725	0.98	-4.17	38.31	
	1730	1.12	-4.11	38.79	
	1735	1.18	-4.08	39.11	
	1740	1.3	-4.00	39.82	
	1745	1.22	-4.04	39.42	
	1750	1.29	-3.91	40.63	
	1755	1.51	-3.80	41.68	
	2110	5.29	-1.58	69.42	
	2115	5.19	-1.70	67.56	
	2120	5.16	-1.59	69.29	
	2125	5.13	-1.58	69.53	
	2130	5.1	-1.62	68.91	
	2135	5.07	-1.54	70.08	
	2140	4.85	-1.62	68.83	
	2145	4.76	-1.59	69.29	
	2150	4.61	-1.69	67.71	
	2155	4.5	-1.73	67.16	

Band5	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	823	3.7	-2.44	56.98	3.7
	828	3.43	-2.57	55.29	
	833	3.07	-2.90	51.25	
	838	3.07	-2.91	51.21	
	843	2.41	-3.20	47.88	
	848	1.83	-3.55	44.15	
	868	0.79	-3.98	39.99	
	873	0.49	-4.15	38.46	
	878	0.22	-4.27	37.41	
	883	0.03	-4.40	36.32	
	888	0.07	-4.45	35.9	
	893	0.1	-4.50	35.5	

Band7	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	2500	2.54	-2.06	62.19	3.76
	2505	2.59	-2.00	63.11	
	2510	2.58	-2.01	63.01	
	2515	2.6	-1.98	63.38	
	2520	2.5	-1.98	63.41	
	2525	2.22	-2.05	62.36	
	2530	2.39	-1.98	63.36	
	2535	2.41	-1.95	63.89	
	2540	2.54	-1.85	65.3	
	2545	2.67	-1.78	66.39	
	2550	2.74	-1.76	66.67	
	2555	3.01	-1.75	66.87	
	2560	3.34	-1.70	67.55	
	2565	3.41	-1.68	67.94	
	2570	3.46	-1.67	68.09	
	2620	3.65	-1.65	68.44	
	2625	3.68	-1.62	68.83	
	2630	3.61	-1.64	68.5	
	2635	3.61	-1.67	68.1	
	2640	3.63	-1.66	68.3	
	2645	3.76	-1.61	68.99	
	2650	3.69	-1.64	68.63	
	2655	3.66	-1.67	68.03	
	2660	3.72	-1.64	68.55	
	2665	3.58	-1.68	67.87	
	2670	3.63	-1.67	68.02	
	2675	3.4	-1.69	67.79	
	2680	3.16	-1.73	67.18	
	2685	3.27	-1.64	68.5	
	2690	3.33	-1.64	68.61	

Band8	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	883	0.03	-4.40	36.32	0.1
	888	0.07	-4.45	35.9	
	893	0.1	-4.50	35.5	
	898	-0.06	-4.60	34.64	
	903	-0.29	-4.80	33.14	
	908	-0.5	-5.03	31.43	
	913	-0.68	-5.14	30.61	
	928	-1.65	-5.38	28.98	
	933	-1.62	-5.53	27.98	
	938	-1.56	-5.61	27.51	
	943	-1.53	-5.76	26.54	
	948	-1.49	-5.89	25.77	
	953	-1.55	-6.02	24.98	
	958	-1.71	-6.14	24.32	
	960	-1.6	-6.12	24.43	

Band12	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	698	-2.06	-6.57	22.02	-0.07
	703	-2.07	-6.39	22.95	
	708	-1.78	-6.13	24.4	
	713	-1.68	-5.99	25.2	
	728	-1.66	-5.16	30.51	
	733	-1.12	-4.60	34.71	
	738	-0.58	-4.18	38.23	
	743	-0.07	-3.90	40.69	

Band13	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	778	4.27	-2.63	54.54	4.27
	783	3.88	-2.75	53.03	
	788	3.62	-2.69	53.81	
	748	0.49	-3.62	43.4	
	753	0.83	-3.51	44.53	
	758	1.26	-3.29	46.89	

Band20	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	833	3.07	-2.90	51.25	4.11
	838	3.07	-2.91	51.21	
	843	2.41	-3.20	47.88	
	848	1.83	-3.55	44.15	
	853	1.57	-3.66	43.06	
	858	1.37	-3.70	42.64	
	863	1.1	-3.82	41.49	
	793	3.68	-2.59	55.1	
	798	3.9	-2.28	59.15	
	803	4.11	-2.13	61.26	
	808	4.08	-2.17	60.74	
	813	4.09	-2.21	60.18	
	818	3.84	-2.32	58.58	
	823	3.7	-2.44	56.98	

Band28	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	703	-2.07	-6.39	22.95	4.27
	708	-1.78	-6.13	24.4	
	713	-1.88	-5.99	25.2	
	718	-1.85	-5.68	27.01	
	723	-1.99	-5.52	28.05	
	728	-1.66	-5.16	30.51	
	733	-1.12	-4.60	34.71	
	738	-0.58	-4.18	38.23	
	743	-0.07	-3.90	40.69	
	748	0.49	-3.62	43.4	
	753	1.28	-3.29	46.89	
	763	1.79	-3.16	48.33	
	768	2.55	-2.96	50.53	
	773	3.71	-2.75	53.1	
	778	4.27	-2.63	54.54	
	783	3.88	-2.75	53.03	
	788	3.62	-2.69	53.81	
	793	3.68	-2.59	55.1	
	798	3.9	-2.28	59.15	
	803	4.11	-2.13	61.26	

Band34	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	2010	3.87	-1.55	69.93	3.89
	2015	3.89	-1.60	69.14	
	2020	3.88	-1.64	68.55	
	2025	3.83	-1.76	66.69	

Band39	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	1880	1.39	-3.41	45.61	3.16
	1885	1.7	-3.33	46.47	
	1890	1.88	-3.29	46.87	
	1895	2.13	-3.09	49.04	
	1900	2.41	-3.00	50.11	
	1905	2.35	-3.02	49.85	
	1910	2.88	-2.79	52.56	
	1915	3.16	-2.55	55.61	
	1920	3	-2.61	54.78	


Band40	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	2300	3.3	-2.34	58.32	3.34
	2305	3.34	-2.27	59.33	
	2310	3.06	-2.35	58.27	
	2315	3.14	-2.35	58.24	
	2320	3.18	-2.33	58.46	
	2325	3.15	-2.40	57.54	
	2330	3.29	-2.29	58.98	
	2335	3.31	-2.27	59.3	
	2340	3.26	-2.27	59.32	

Band41	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	2535	2.41	-1.95	63.89	3.76
	2540	2.54	-1.85	65.3	
	2545	2.67	-1.78	66.39	
	2550	2.74	-1.76	66.67	
	2555	3.01	-1.75	66.87	
	2560	3.34	-1.70	67.55	
	2565	3.41	-1.68	67.94	
	2570	3.46	-1.67	68.09	
	2575	3.52	-1.60	69.18	
	2580	3.5	-1.60	69.21	
	2585	3.53	-1.61	69.05	
	2590	3.57	-1.59	69.33	
	2595	3.55	-1.64	68.56	
	2600	3.55	-1.63	68.67	
	2605	3.54	-1.63	68.65	
	2610	3.57	-1.61	69.01	
	2615	3.68	-1.59	69.38	
	2620	3.65	-1.65	68.44	
	2625	3.68	-1.62	68.83	
	2630	3.61	-1.64	68.5	
	2635	3.61	-1.67	68.1	
	2640	3.63	-1.66	68.3	
	2645	3.76	-1.61	68.99	
	2650	3.69	-1.64	68.63	
	2655	3.66	-1.67	68.03	
	2660	3.72	-1.64	68.55	
	2665	3.58	-1.68	67.87	
	2670	3.63	-1.67	68.02	
	2675	3.4	-1.69	67.79	



Band66	频率(MHz)	增益(dBi)	效率(dB)	效率(%)	PeakGain (dBi)
	1710	0.53	-4.41	36.21	5.29
	1715	0.72	-4.3	37.14	
	1720	0.81	-4.26	37.51	
	1725	0.98	-4.17	38.31	
	1730	1.12	-4.11	38.79	
	1735	1.18	-4.08	39.11	
	1740	1.3	-4	39.82	
	1745	1.22	-4.04	39.42	
	1750	1.29	-3.91	40.63	
	1755	1.51	-3.8	41.68	
	1760	1.59	-3.83	41.44	
	1765	1.7	-3.76	42.02	
	1770	1.65	-3.8	41.73	
	1775	1.64	-3.79	41.8	
	1780	1.57	-3.82	41.46	
	2110	5.29	-1.58	69.42	
	2115	5.19	-1.7	67.56	
	2120	5.16	-1.59	69.29	
	2125	5.13	-1.58	69.53	
	2130	5.1	-1.62	68.91	
	2135	5.07	-1.54	70.08	
	2140	4.85	-1.62	68.83	
	2145	4.76	-1.59	69.29	
	2150	4.61	-1.69	67.71	
	2155	4.5	-1.73	67.16	
	2160	4.4	-1.76	66.61	
	2165	4.48	-1.63	68.64	
	2170	4.14	-1.88	64.84	
	2175	4.05	-1.86	65.21	
	2180	3.95	-1.91	64.48	
	2185	3.86	-1.91	64.42	
	2190	3.79	-1.87	64.96	
	2195	3.59	-2.06	62.17	
	2200	3.6	-1.99	63.28	

4.1.3. Graphs of Gain and Efficiency



BLE0

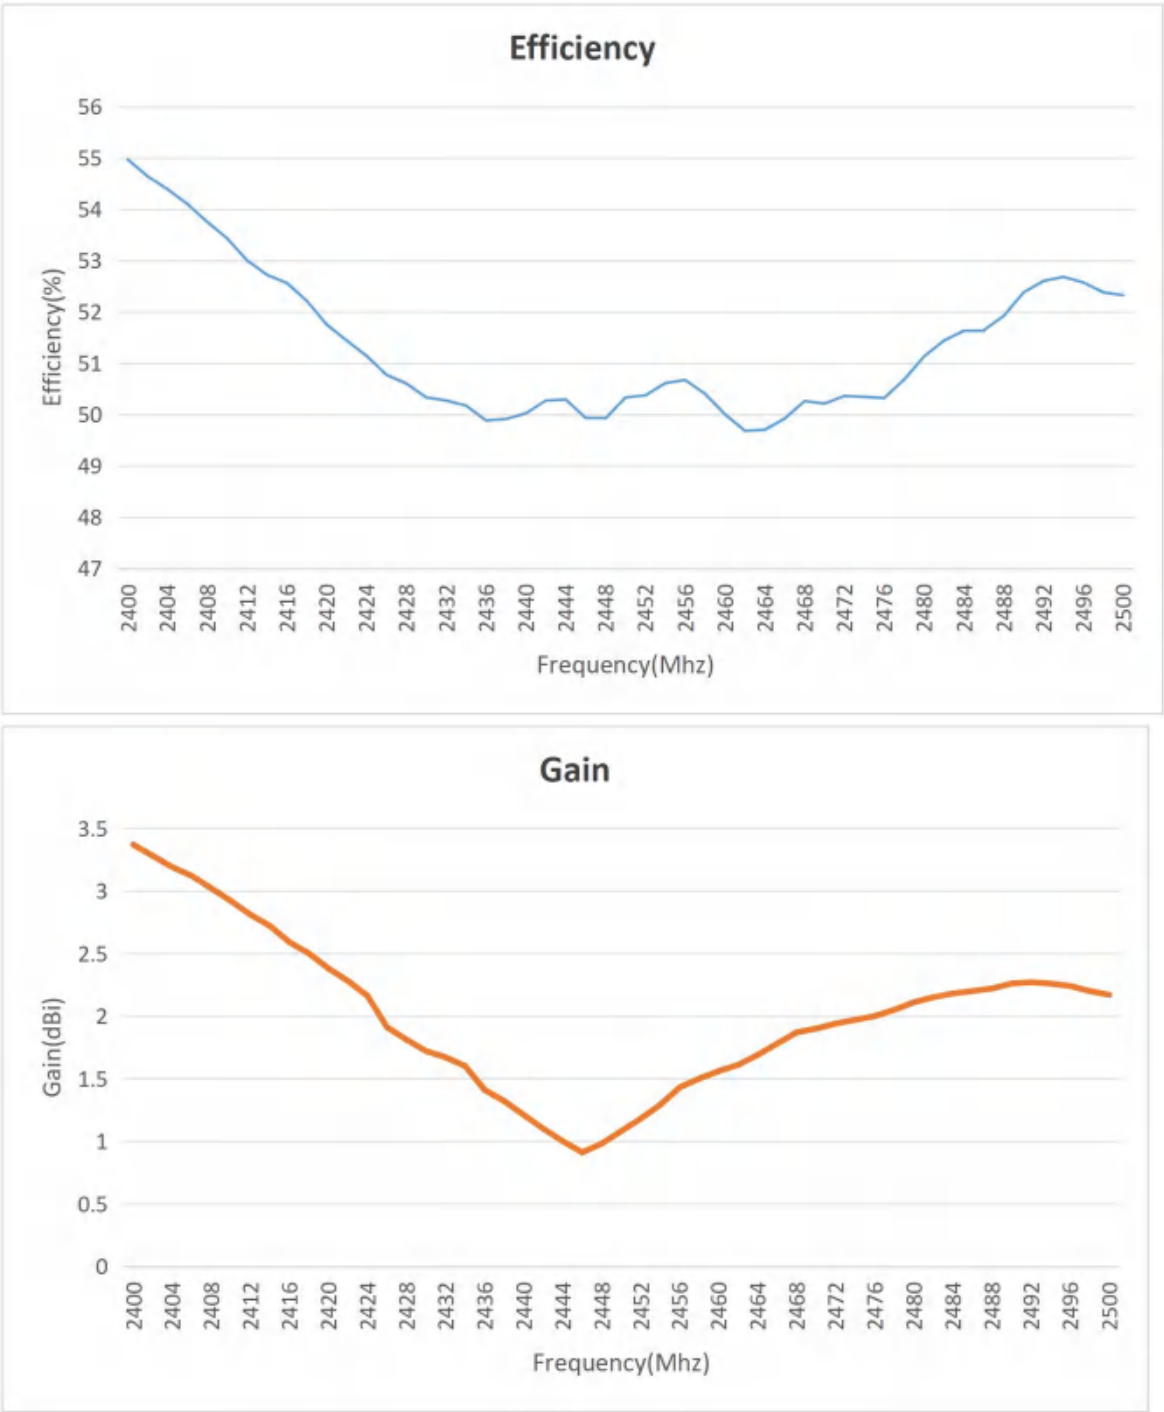


BLE1

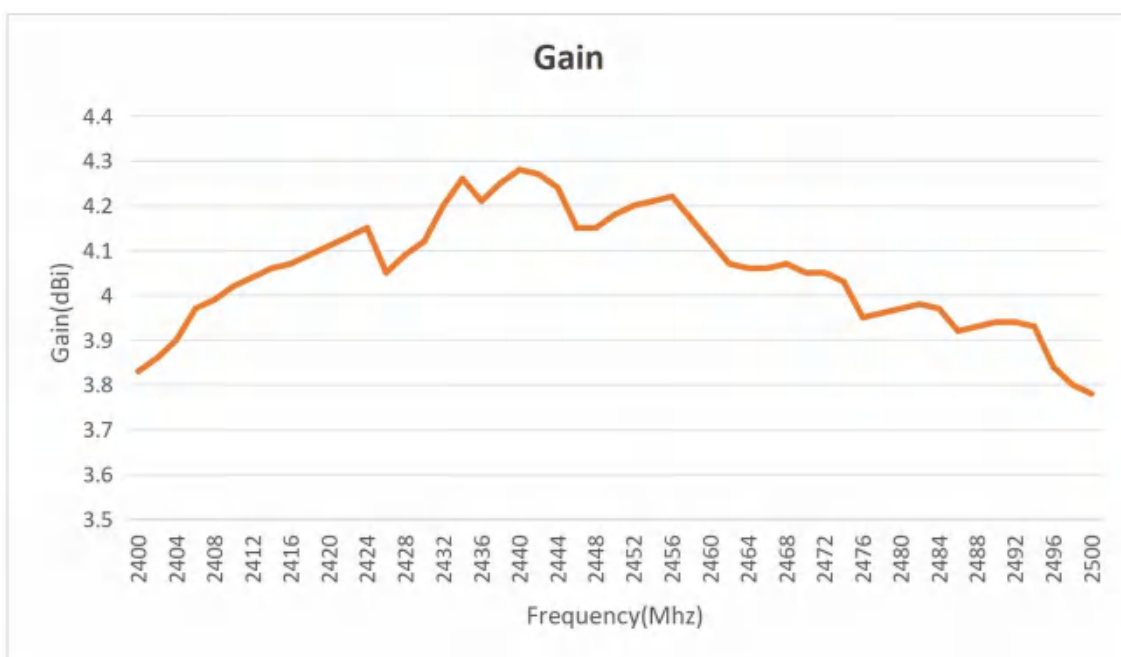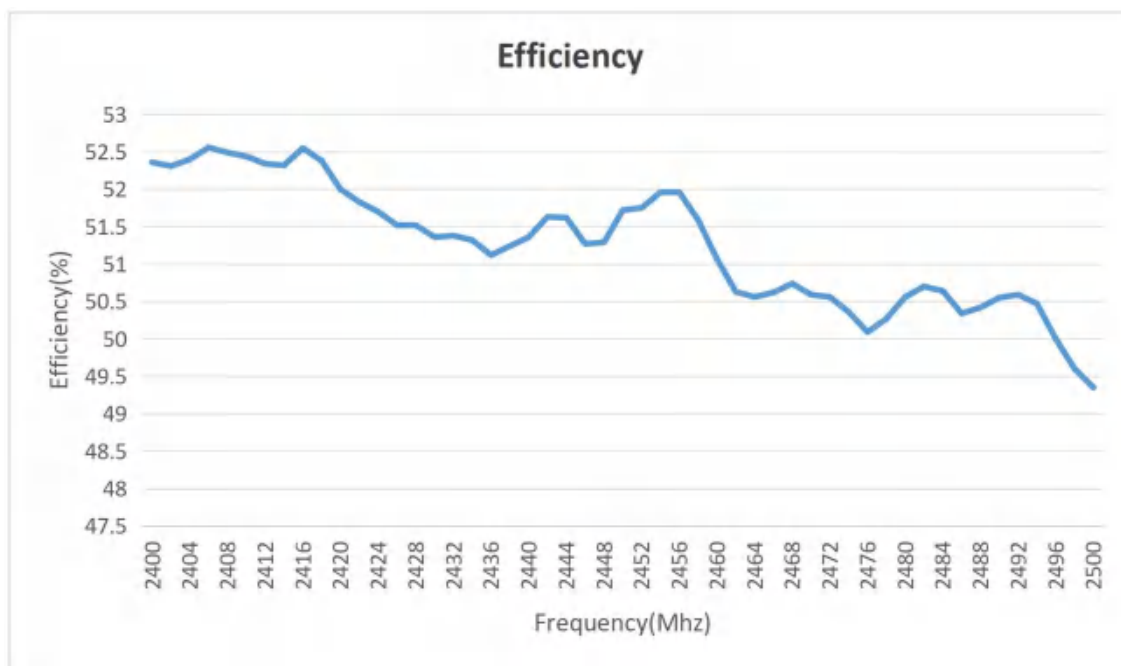


LORA(868Mhz)

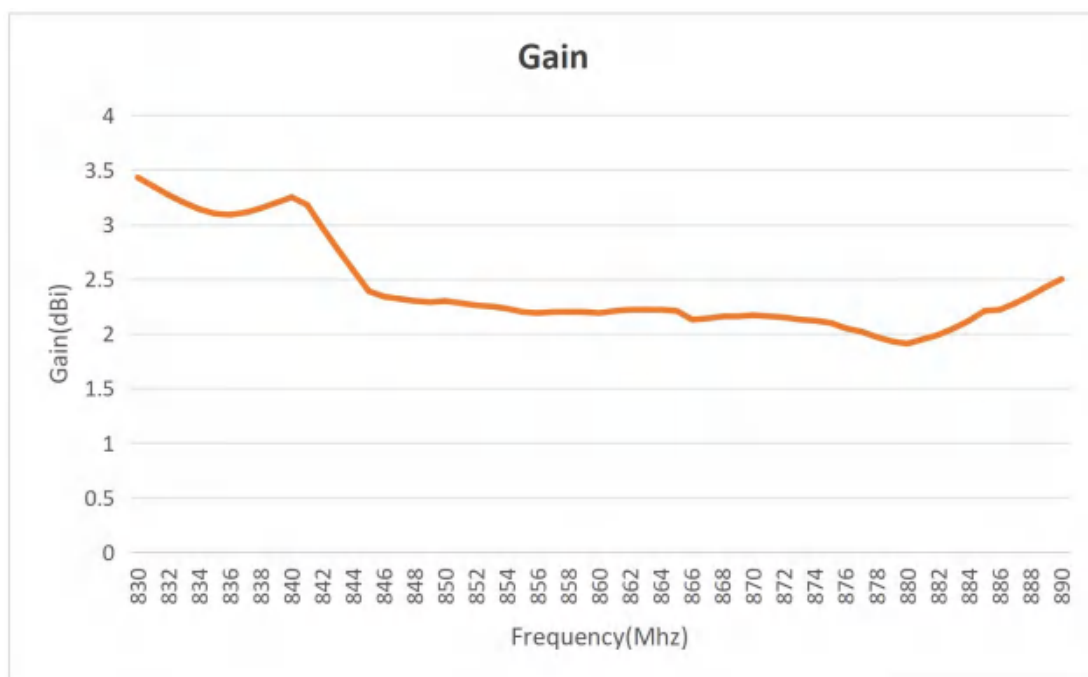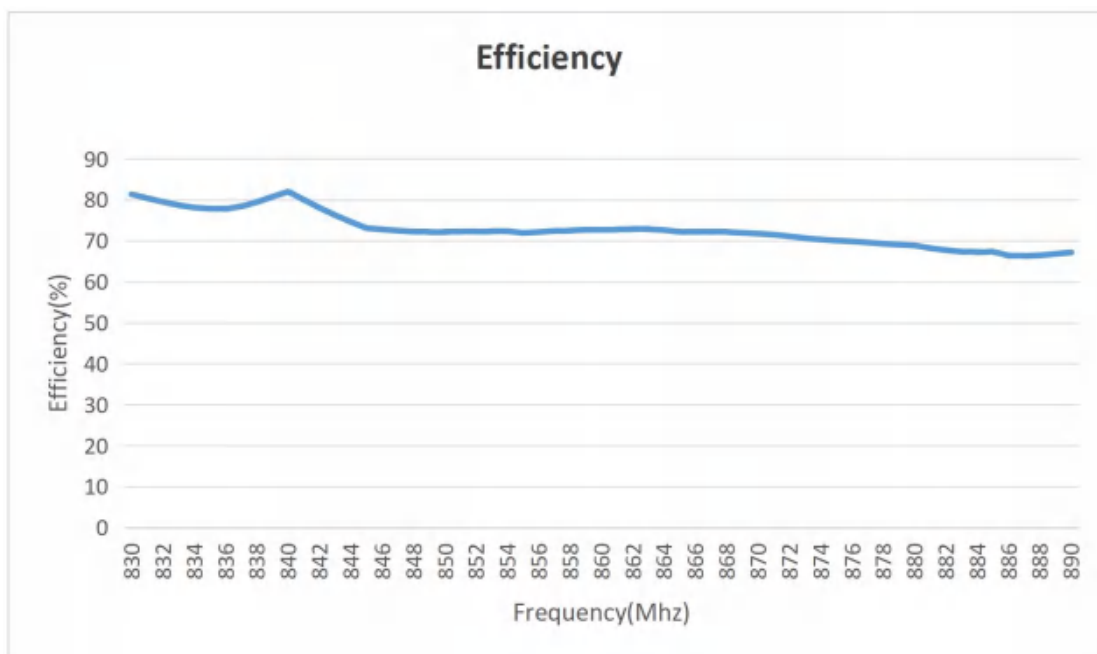


LORA(915Mhz)

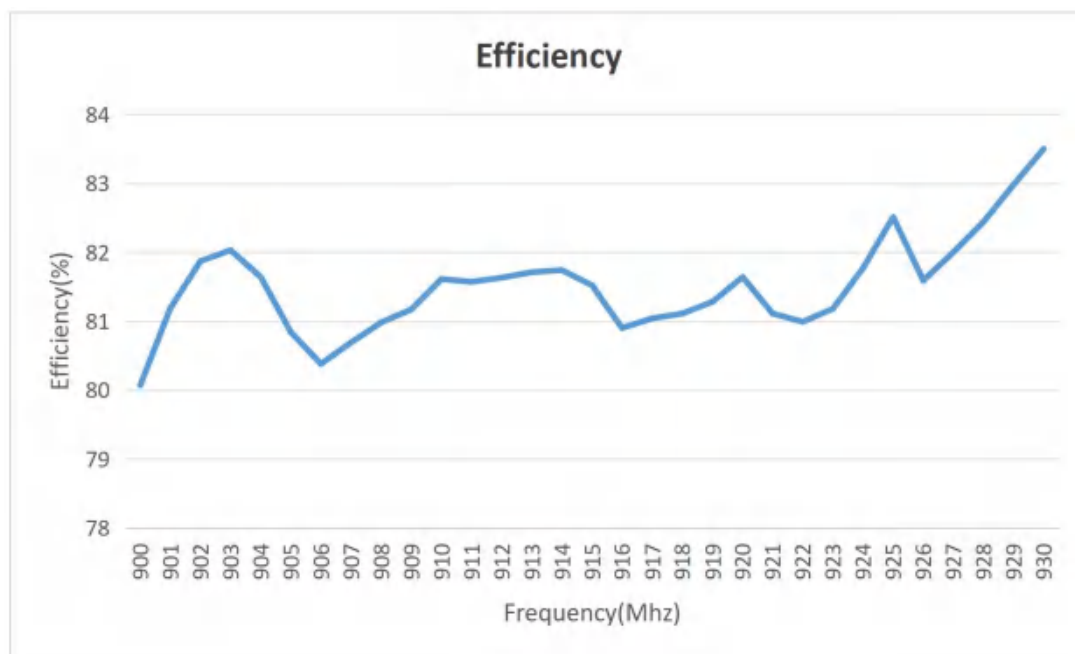



WiFi0

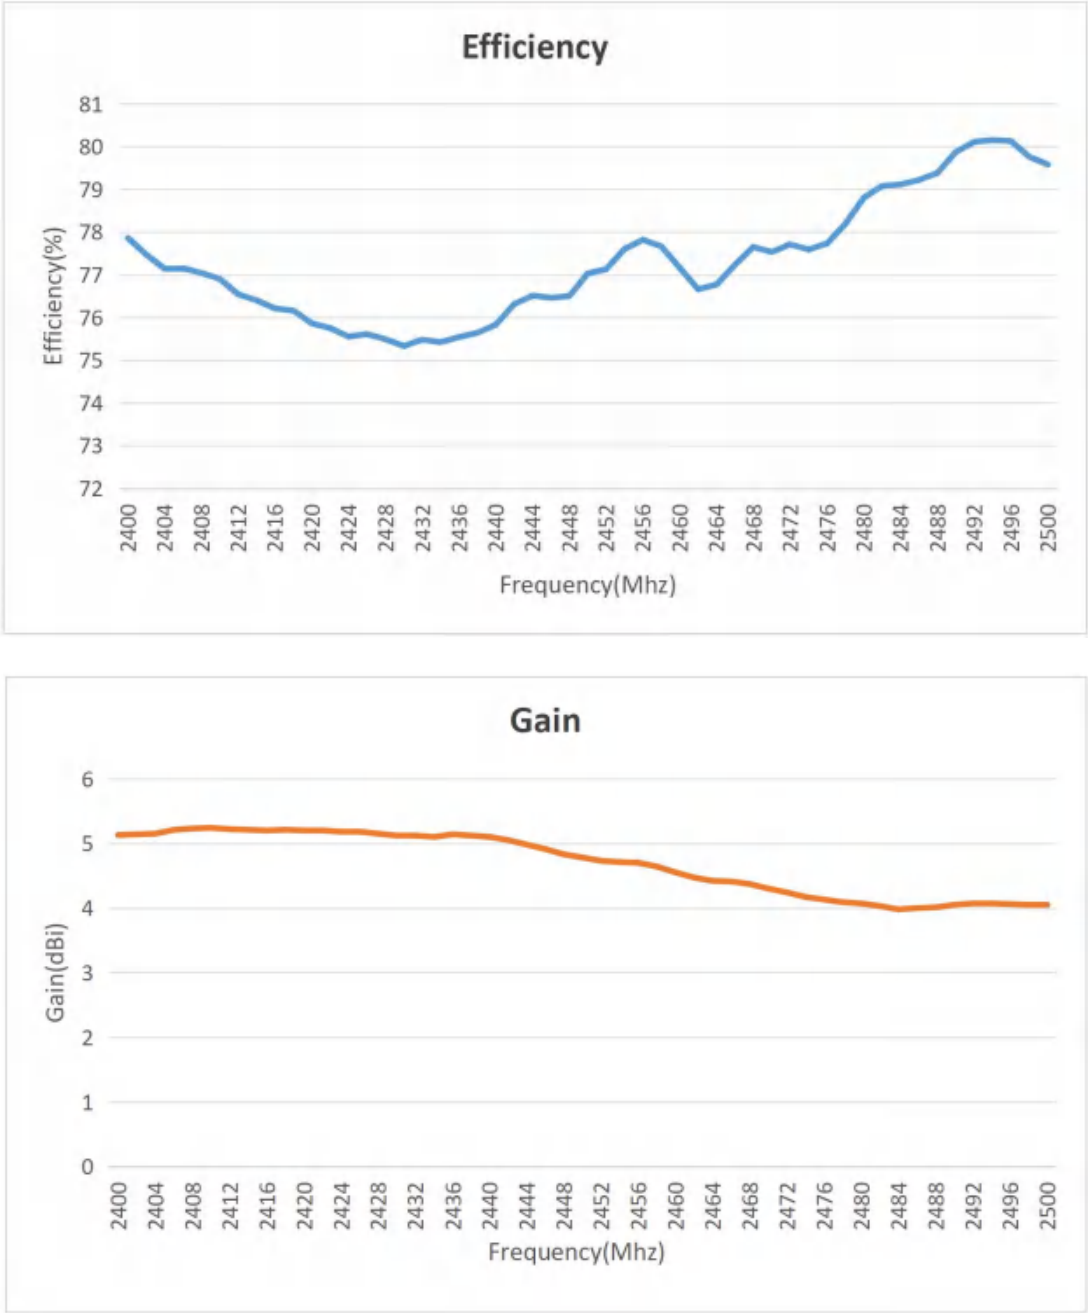

WIFI1

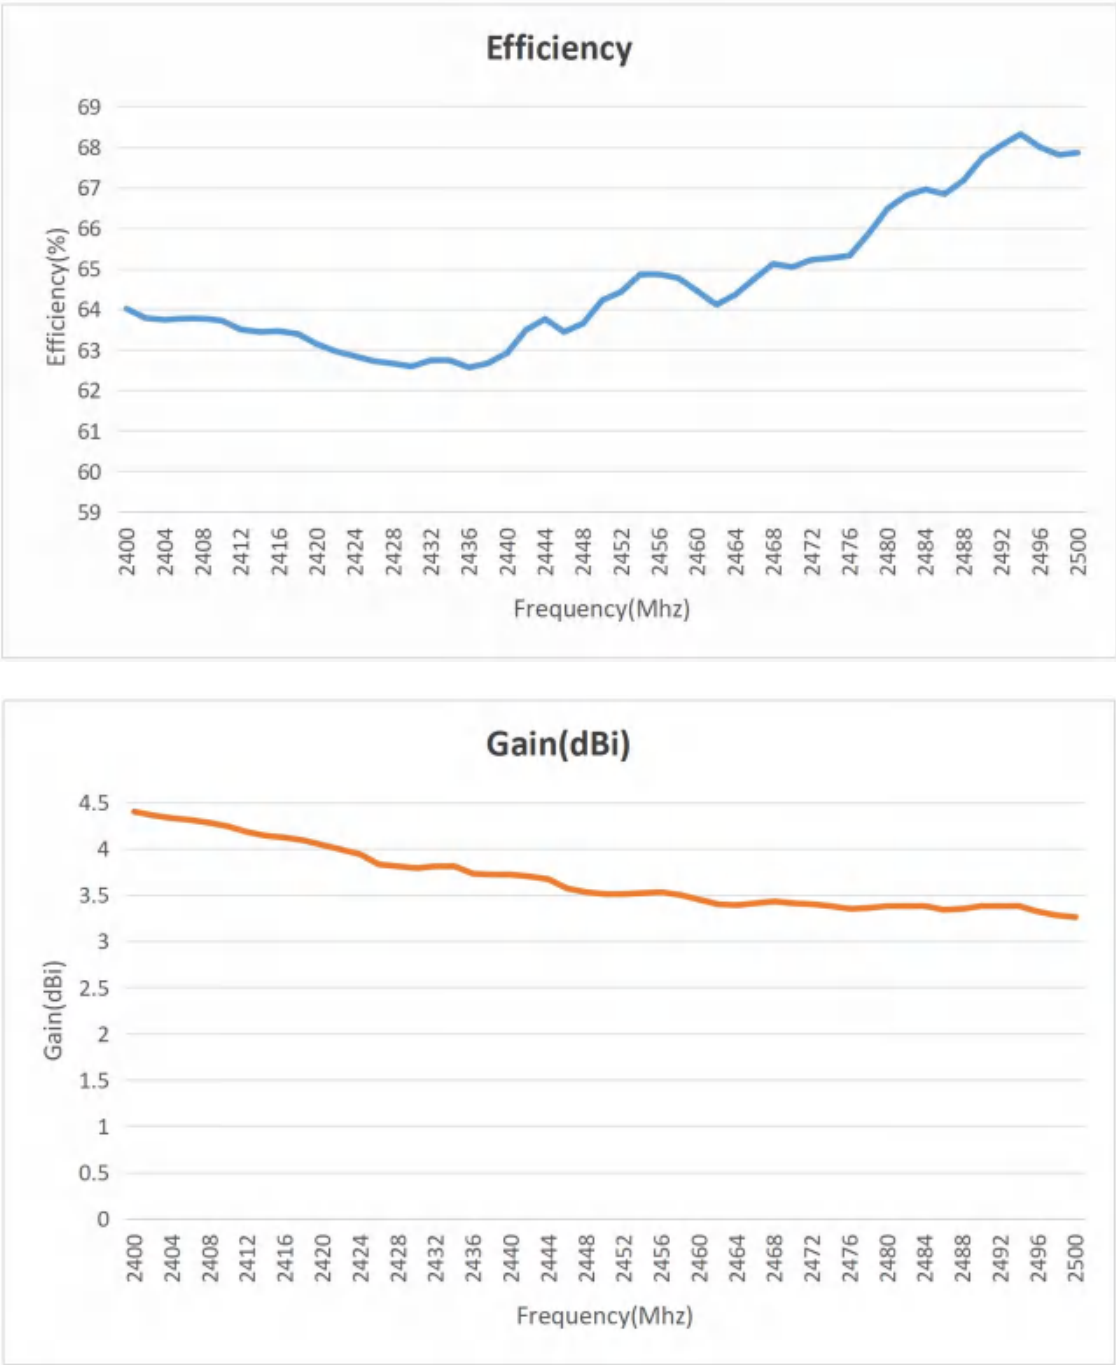


LTE

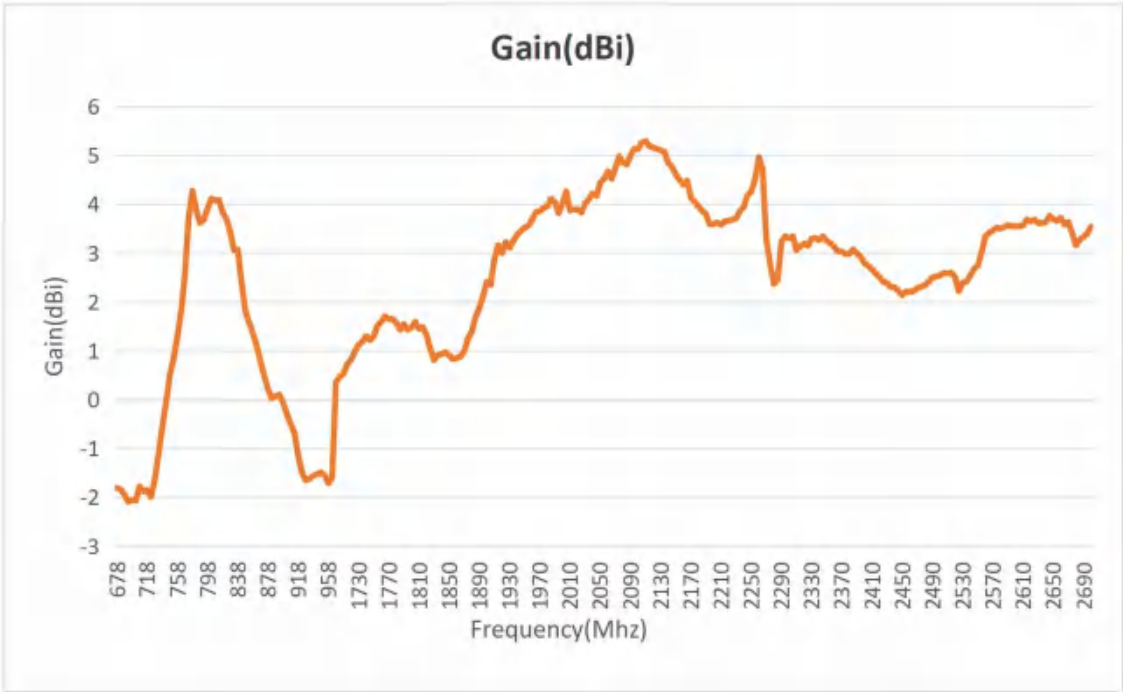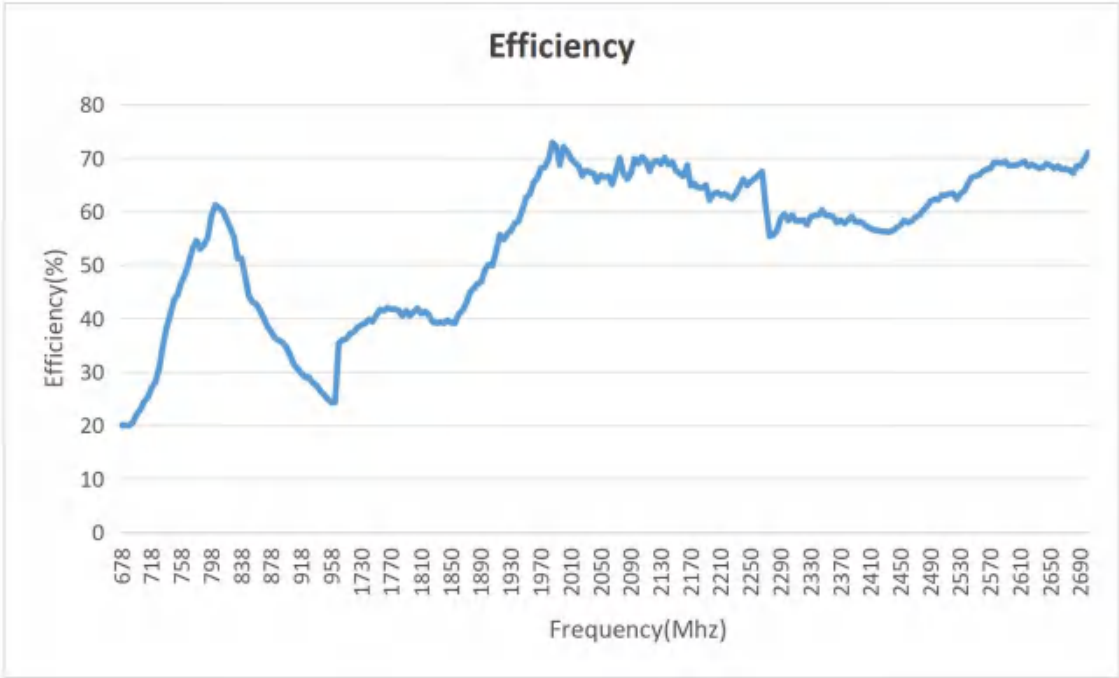


4.2.Radiation Pattern

4.2.1. 3D Radiation Pattern

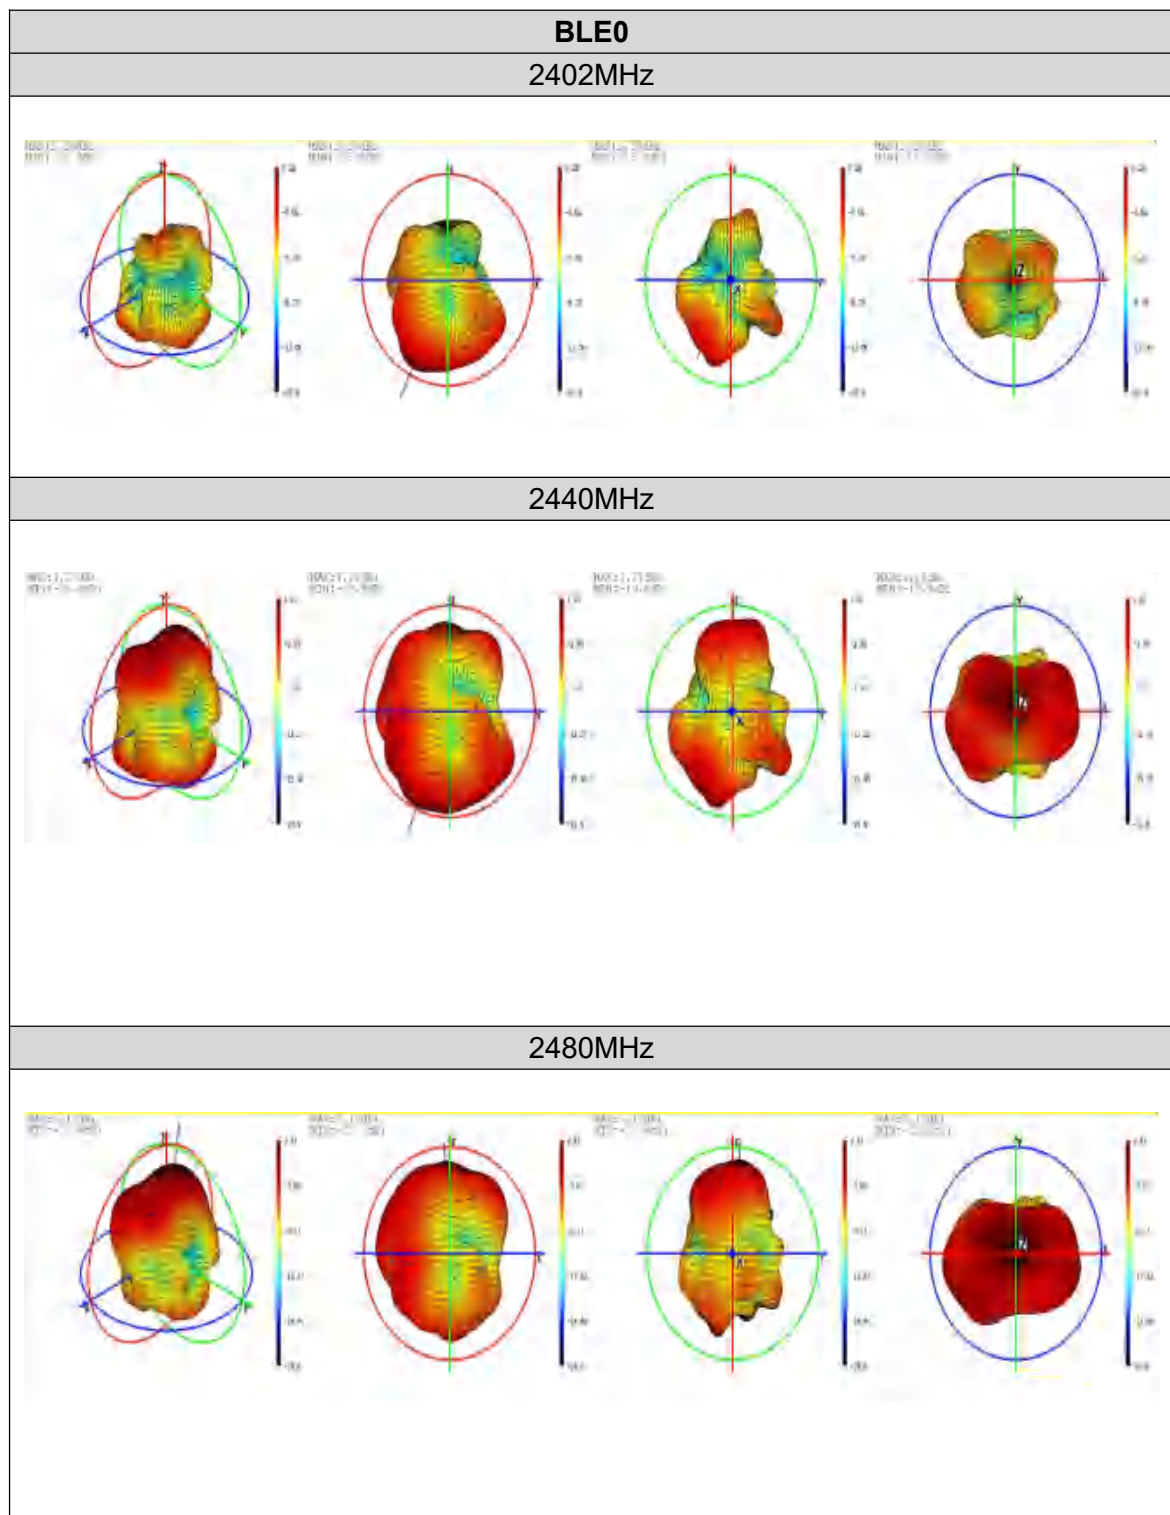


BLE1


2402MHz

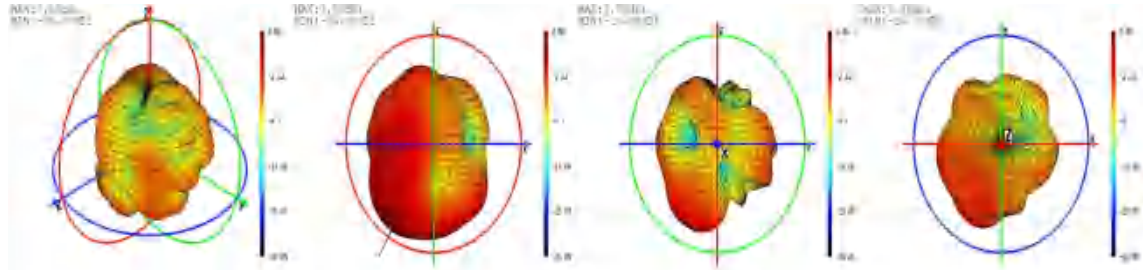

2440MHz

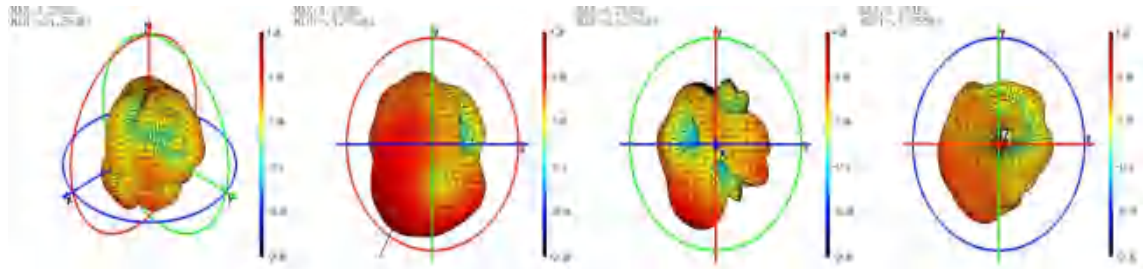


2480MHz

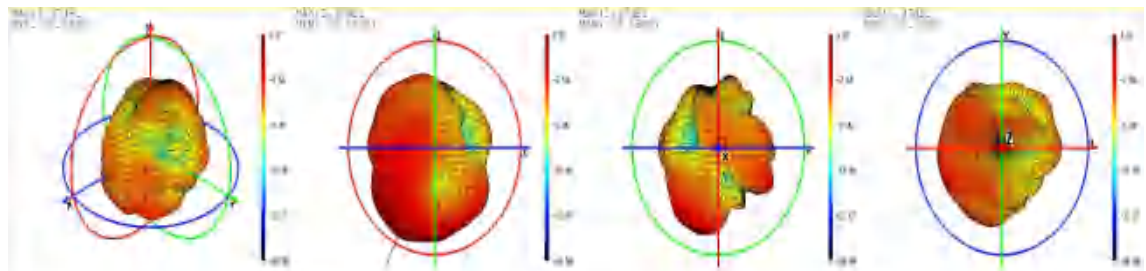


LORA(868Mhz)


863MHz

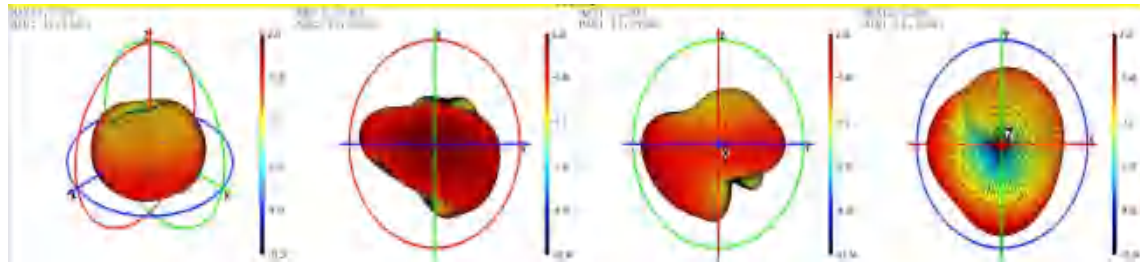





868MHz

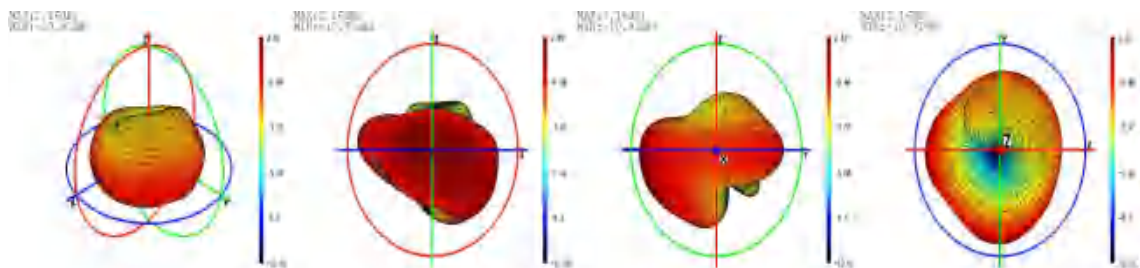



870MHz

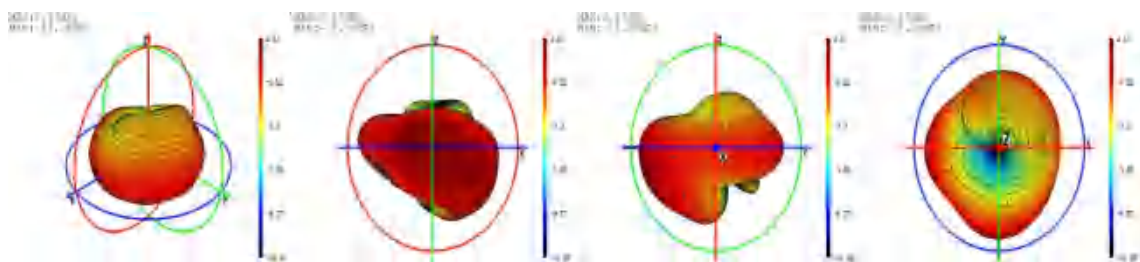


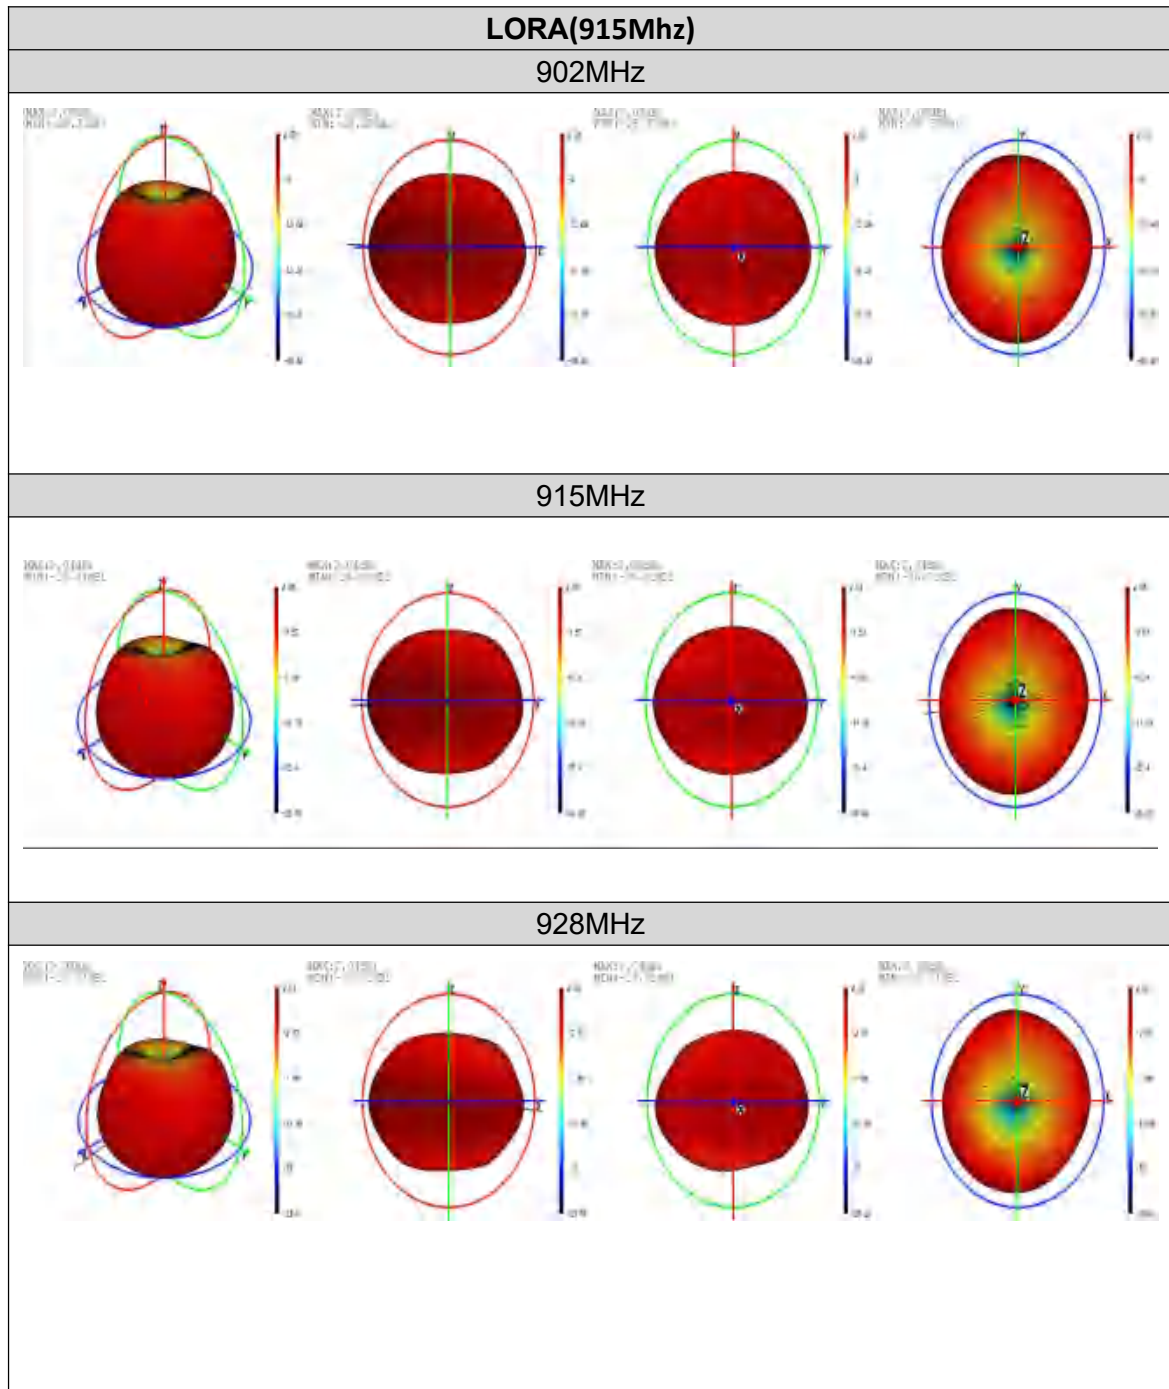

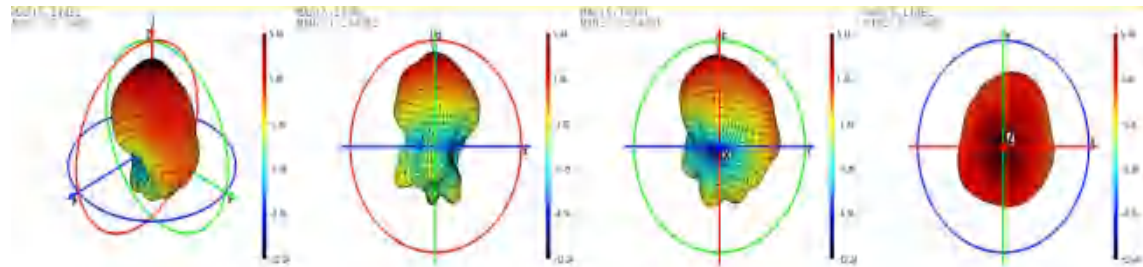
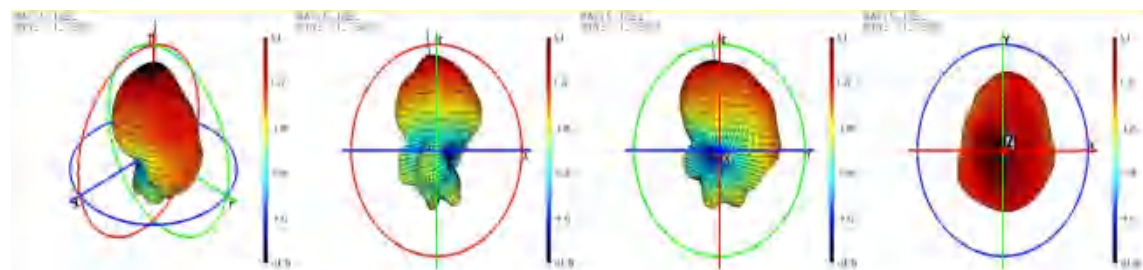
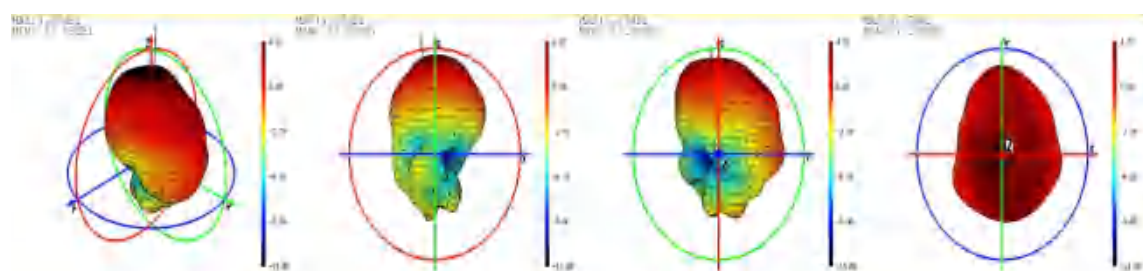
WiFi1**2402MHz****2440MHz****2480MHz**

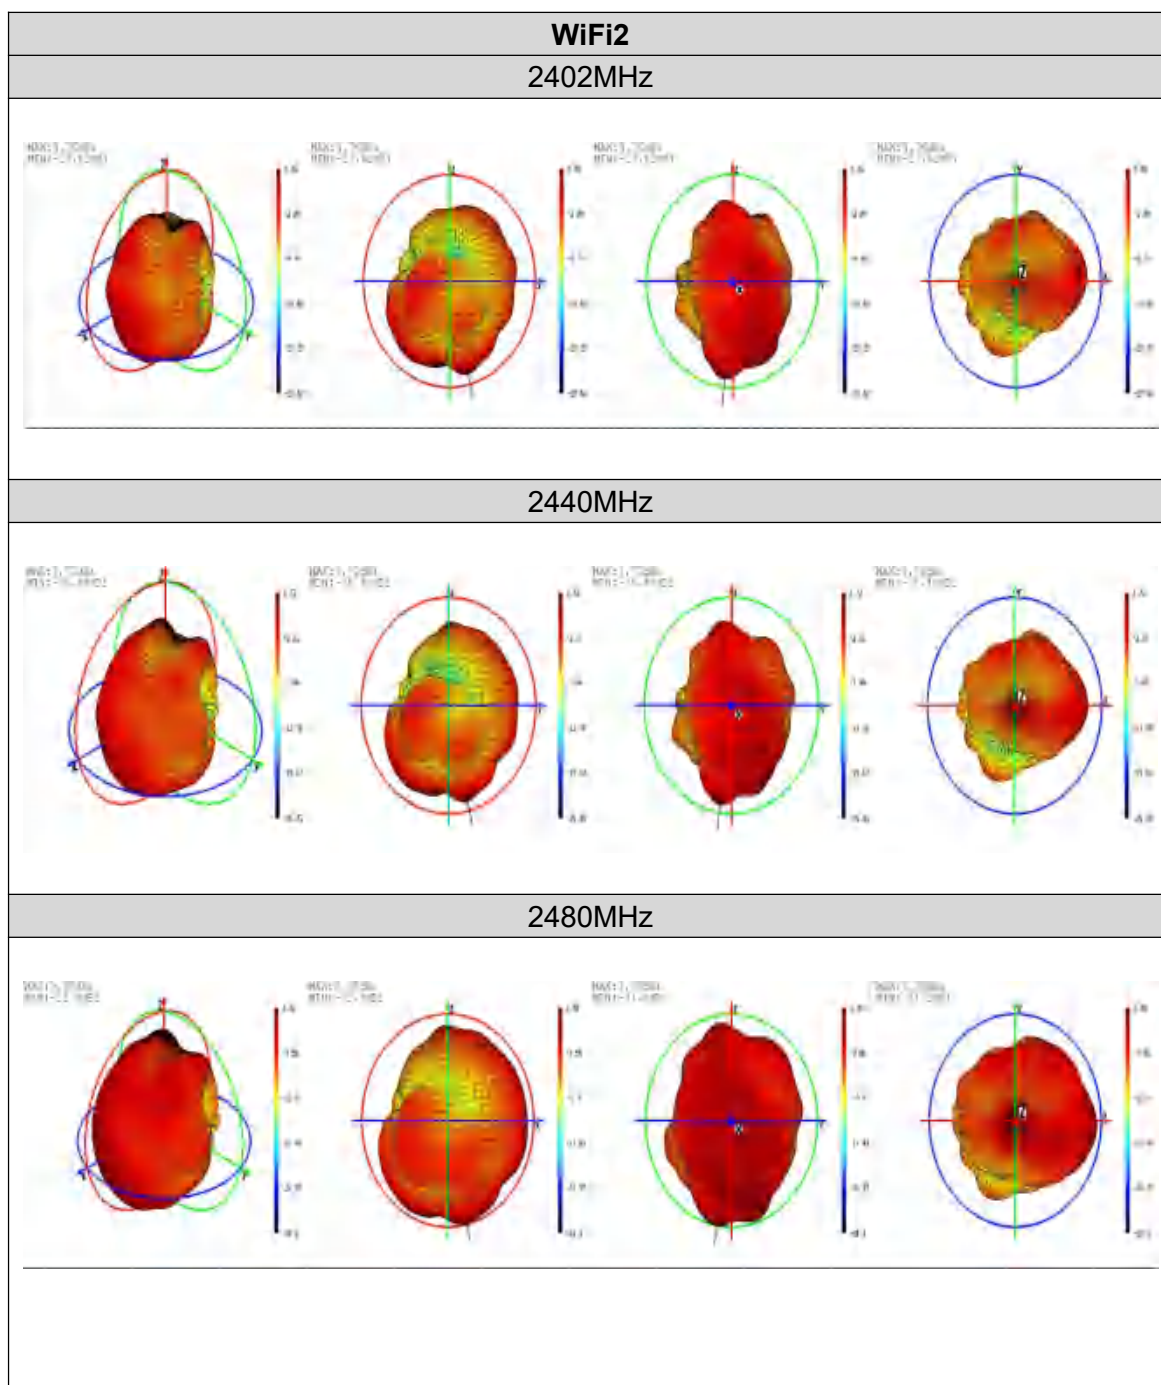

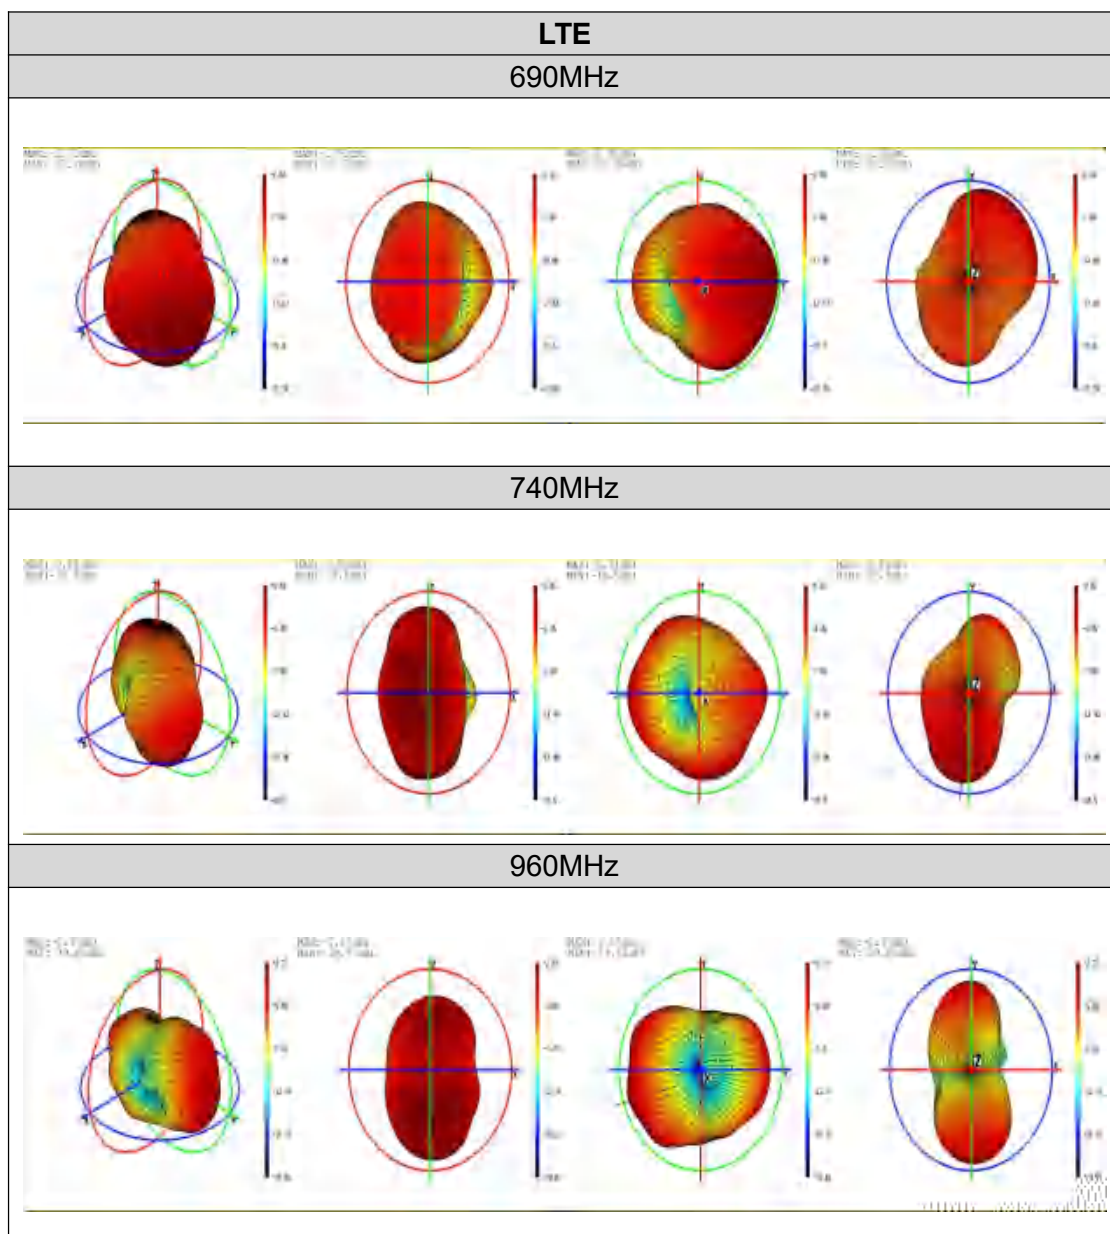

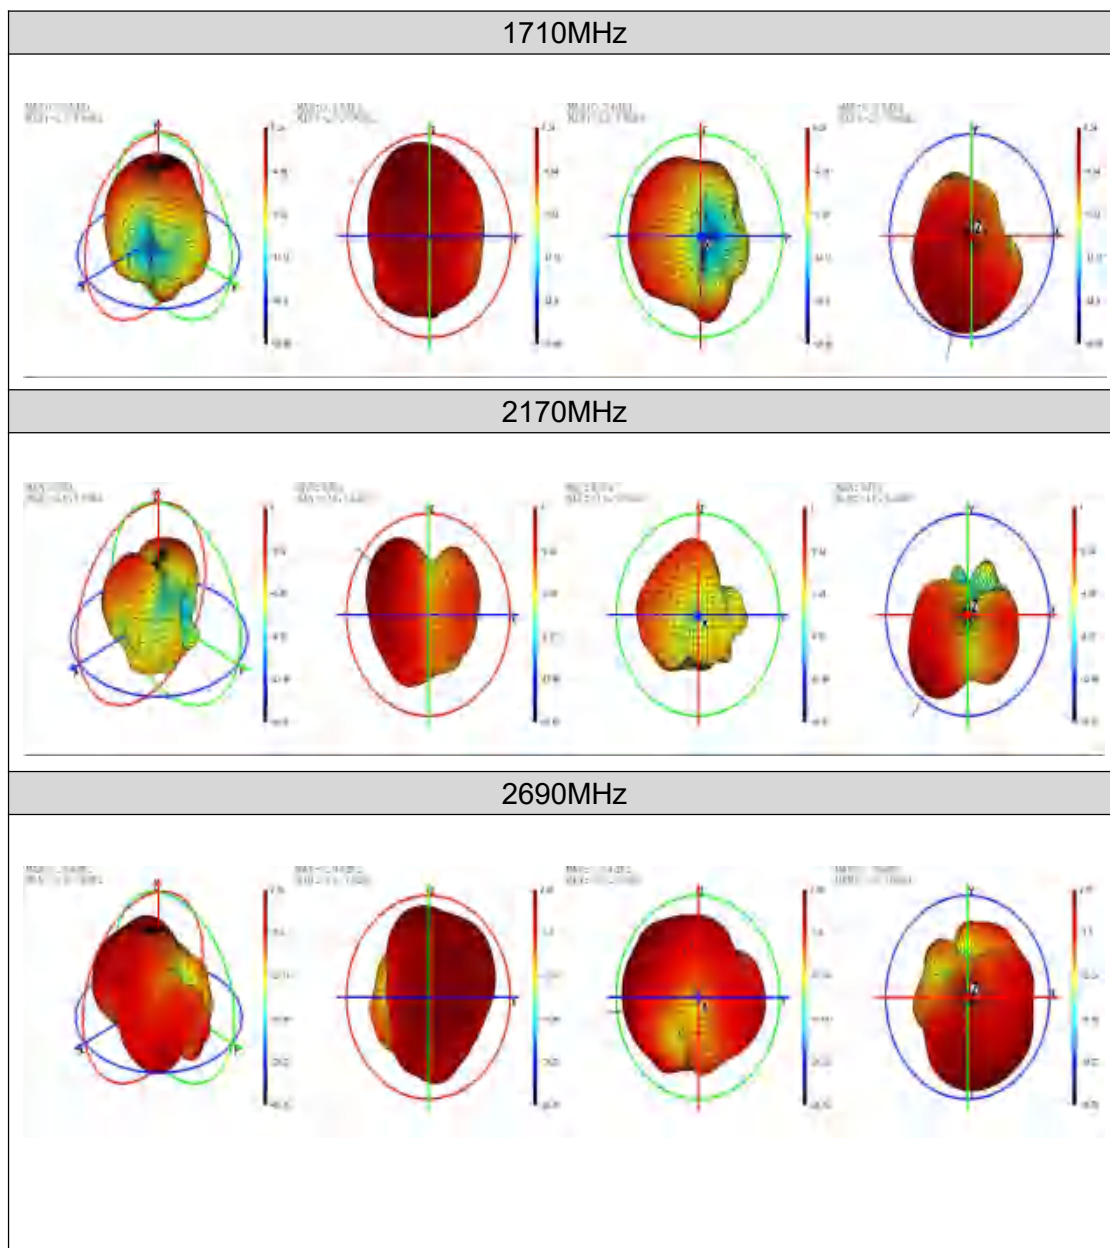


4.2.2. 2D Radiation Pattern

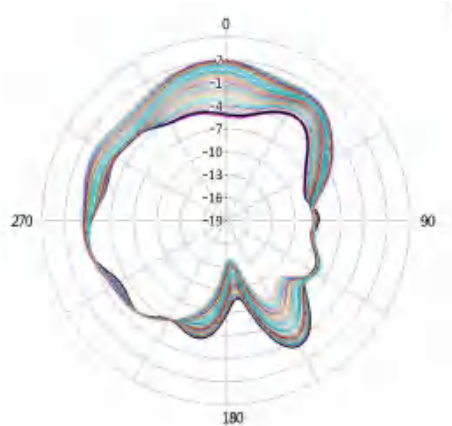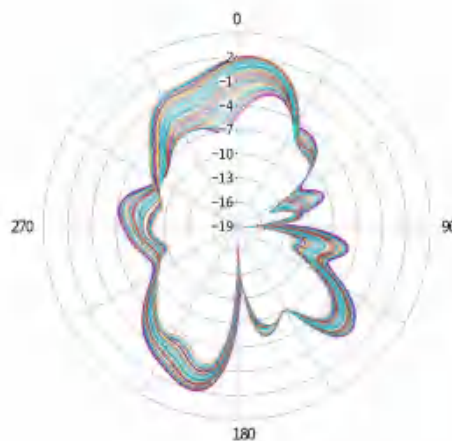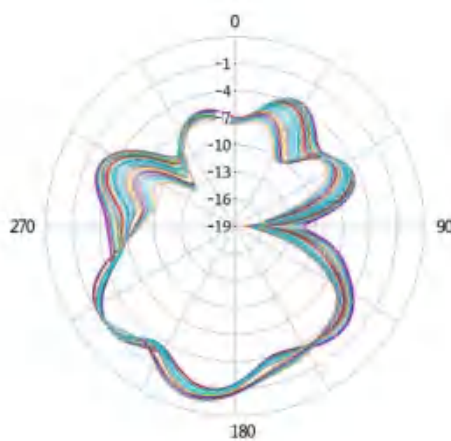
BLE0**E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0^\circ\sim 360^\circ$, $\phi=0^\circ$)****E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0^\circ\sim 360^\circ$, $\phi=90^\circ$)****H, XY-Face, $\theta=90^\circ$; (H, $\phi=0^\circ\sim 360^\circ$, $\theta=90^\circ$)**

BLE1


E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

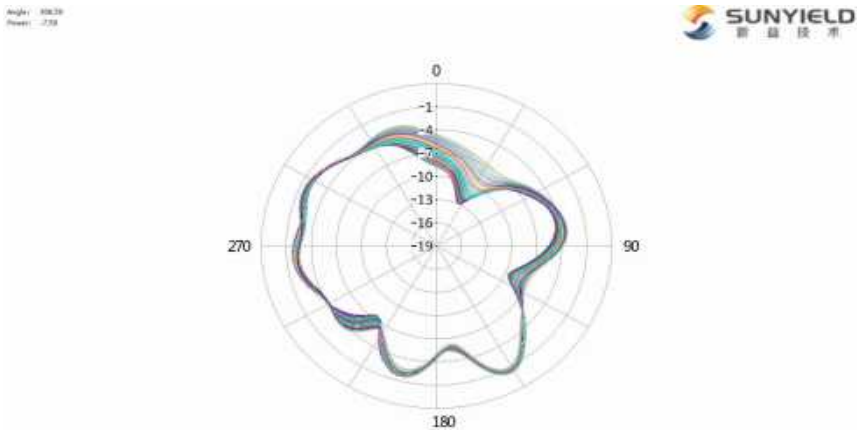

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)

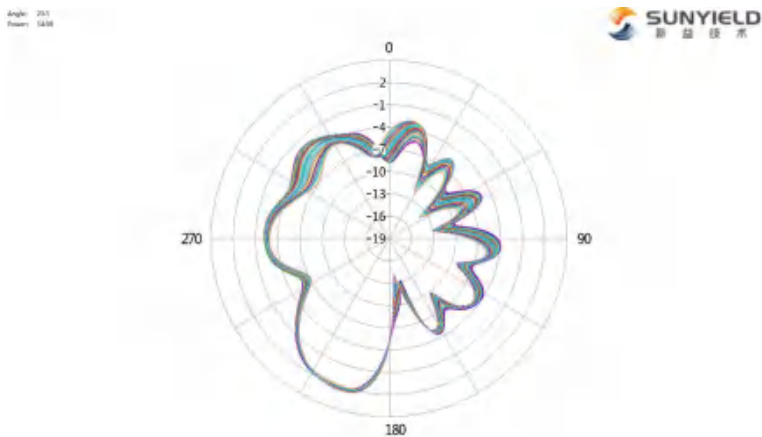


H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)

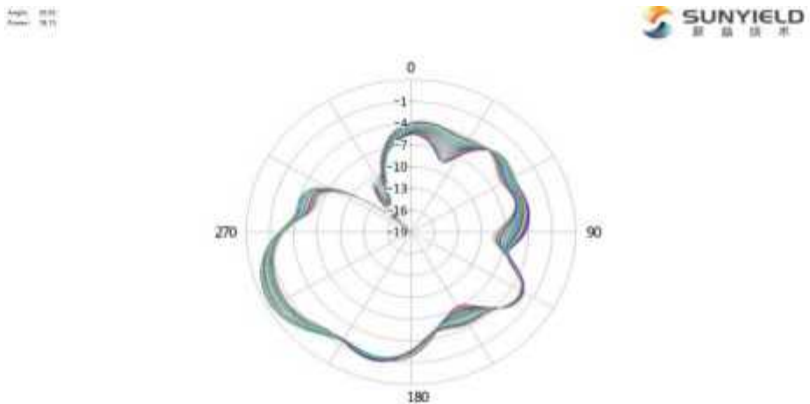

LORA(868Mhz)


E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

Angle: 42.0
Power: 21.76

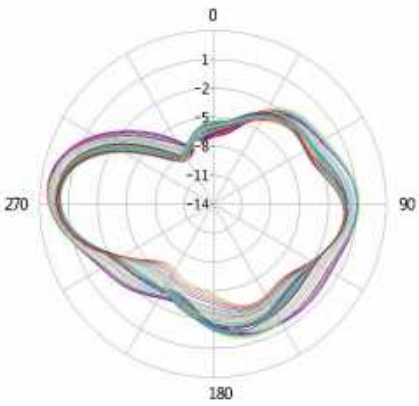


E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)




Angle: 60.03
Power: 1.61

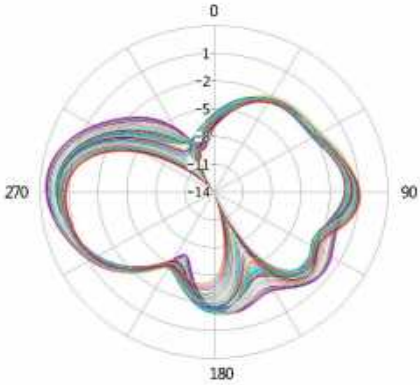

H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)


Angle: 15.00
Power: 0.10

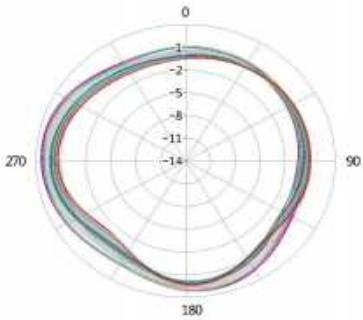

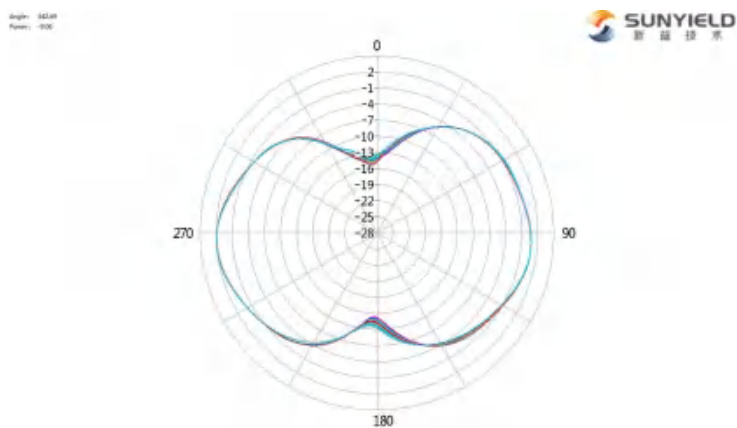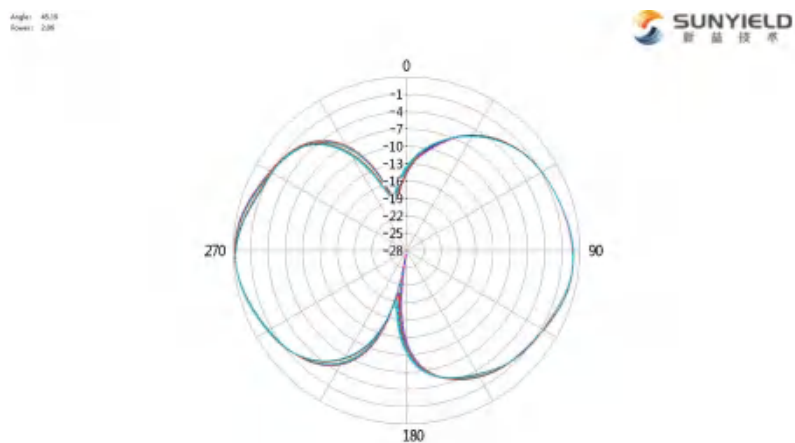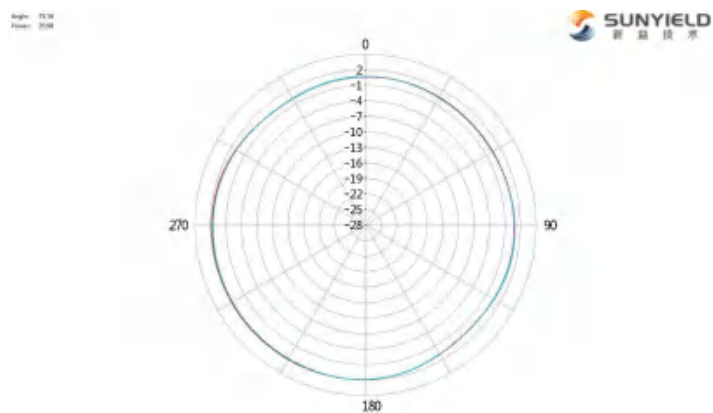
LORA(915Mhz)**E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0^\circ\sim 360^\circ$, $\phi=0^\circ$)****E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0^\circ\sim 360^\circ$, $\phi=90^\circ$)****H, XY-Face, $\theta=90^\circ$; (H, $\phi=0^\circ\sim 360^\circ$, $\theta=90^\circ$)**

WiFi


E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0^\circ\sim 360^\circ$, $\phi=0^\circ$)

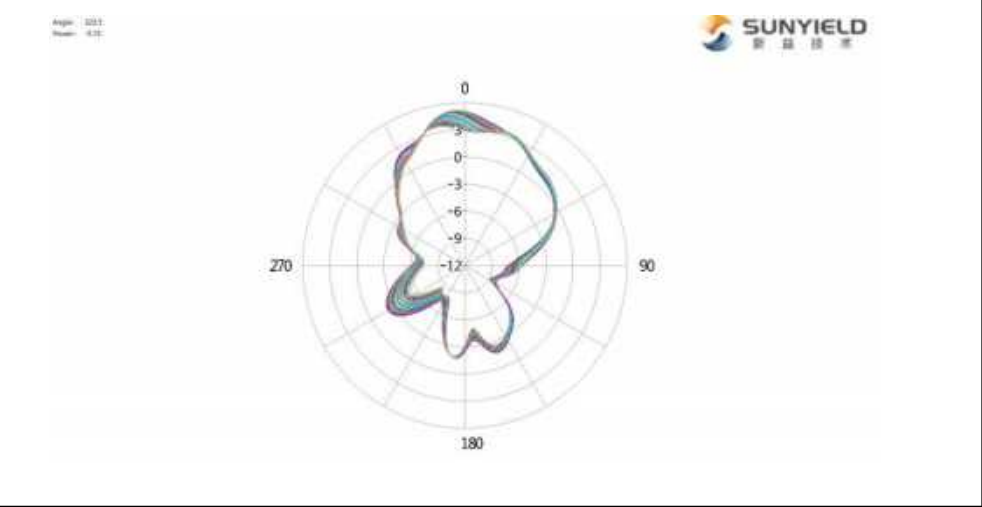

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0^\circ\sim 360^\circ$, $\phi=90^\circ$)

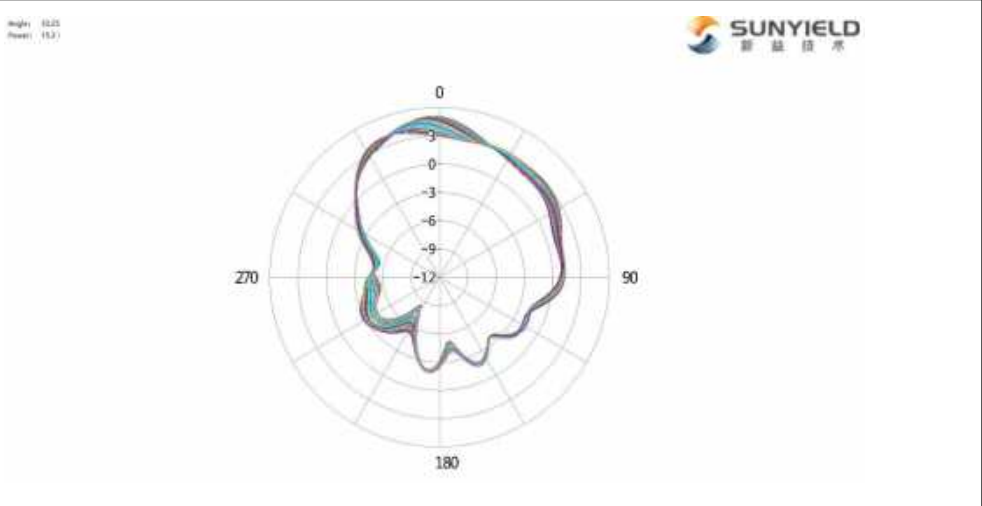


H, XY-Face, $\theta=90^\circ$; (H, $\phi=0^\circ\sim 360^\circ$, $\theta=90^\circ$)

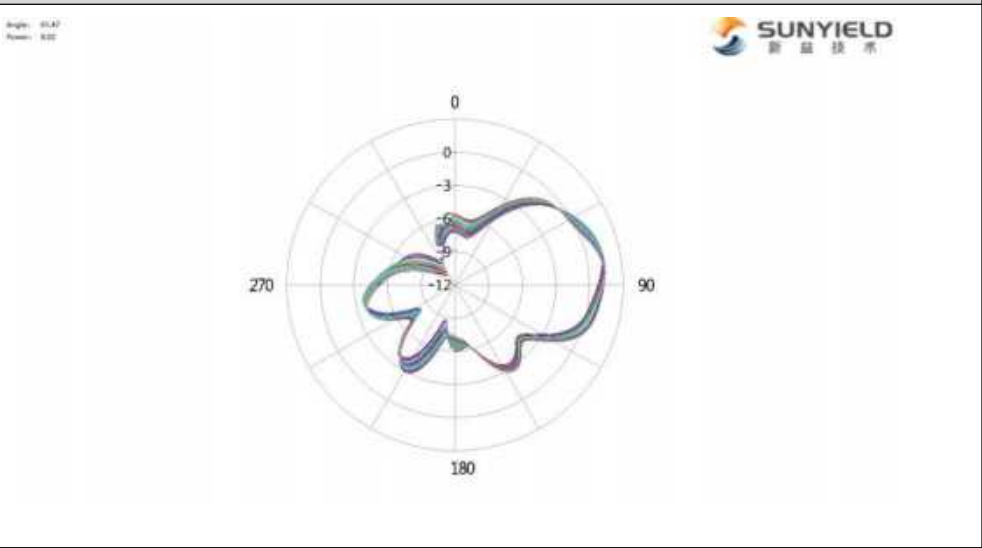


WIFI1


E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

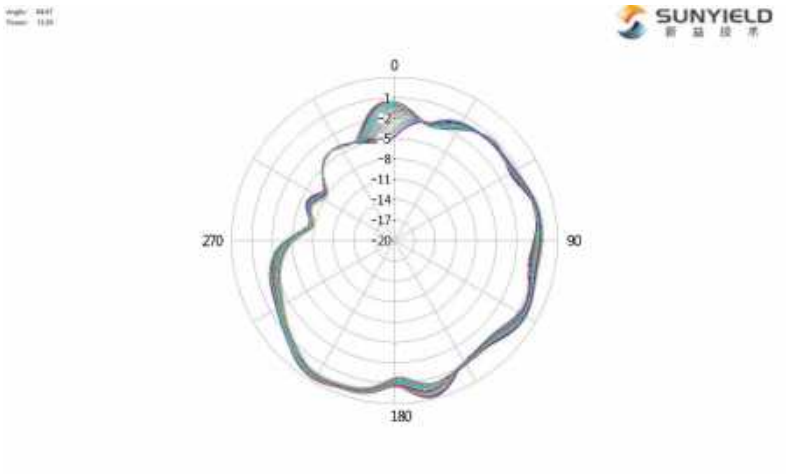

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)

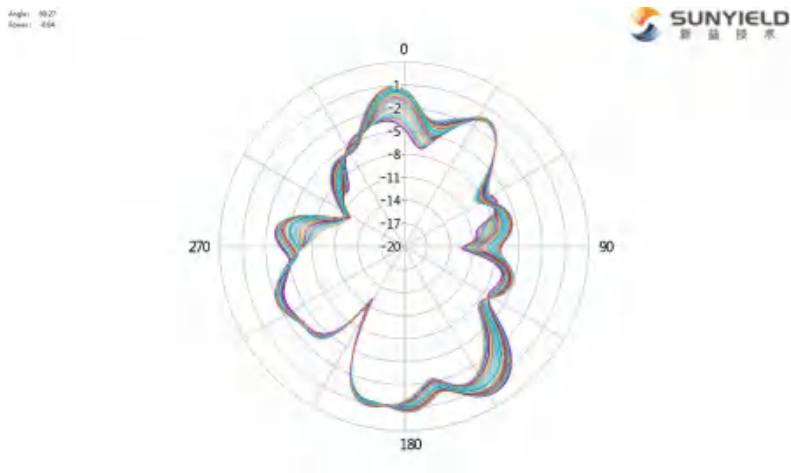


H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)

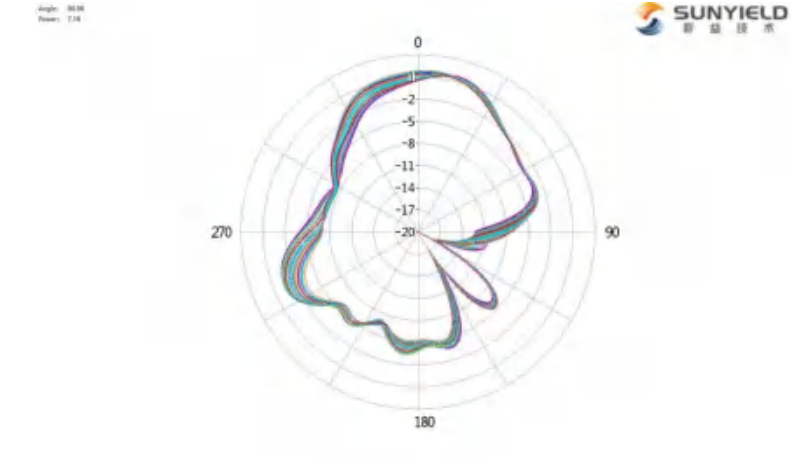


LTE

E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

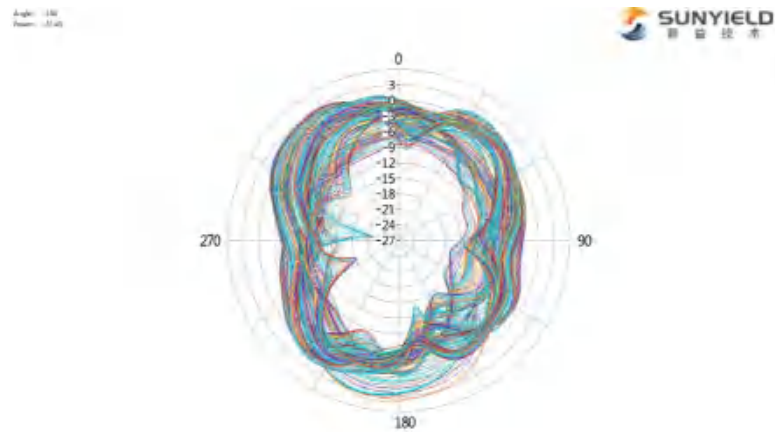

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)

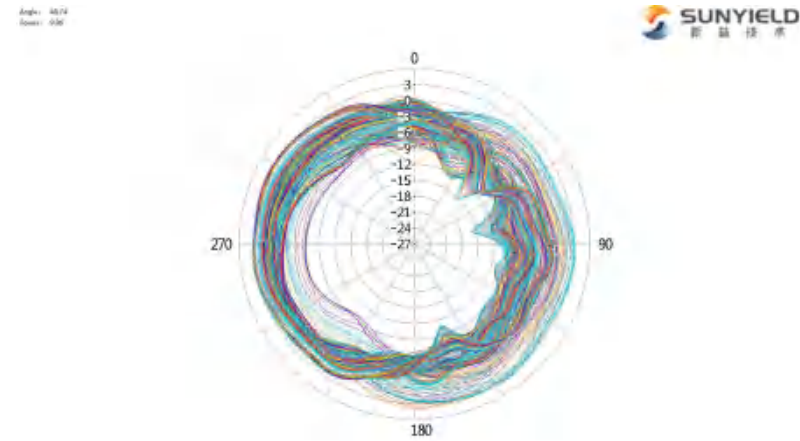

H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)

