




Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

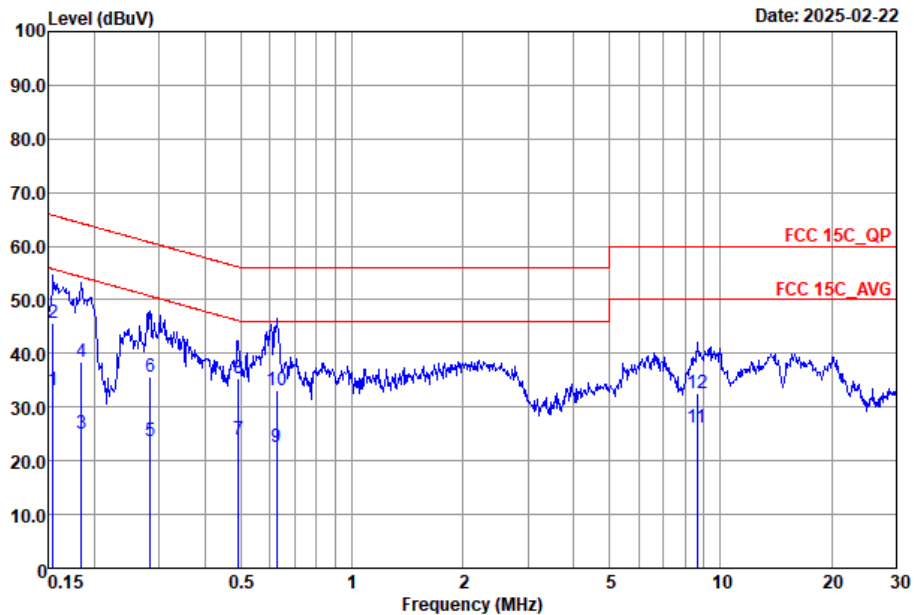

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	33.09	-22.65	55.74	13.30	9.60	10.19	Average
2 *	0.15	45.59	-20.15	65.74	25.80	9.60	10.19	QP
3	0.18	25.19	-29.09	54.28	5.20	9.81	10.18	Average
4	0.18	38.49	-25.79	64.28	18.50	9.81	10.18	QP
5	0.28	23.58	-27.14	50.72	3.60	9.78	10.20	Average
6	0.28	35.78	-24.94	60.72	15.80	9.78	10.20	QP
7	0.49	24.00	-22.14	46.14	3.70	10.06	10.24	Average
8	0.49	35.40	-20.74	56.14	15.10	10.06	10.24	QP
9	0.62	22.50	-23.50	46.00	2.60	9.66	10.24	Average
10	0.62	33.20	-22.80	56.00	13.30	9.66	10.24	QP
11	8.64	26.18	-23.82	50.00	6.30	9.68	10.20	Average
12	8.64	32.68	-27.32	60.00	12.80	9.68	10.20	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	ZhangXu	Relative Humidity :	48~49%
		Temperature :	24℃-25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	0	Bluetooth BR_GFSK	00	2402	1DH5	-	-
Mode 2	2400-2483.5	0	Bluetooth BR_GFSK	39	2441	1DH5	-	-
Mode 3	2400-2483.5	0	Bluetooth BR_GFSK	78	2480	1DH5	-	-
Mode 4	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1DH5	-	-
Mode 5	2400-2483.5	1	Bluetooth BR_GFSK	39	2441	1DH5	-	-
Mode 6	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1DH5	-	-
Mode 7	2400-2483.5	0	Bluetooth BR_GFSK	39	2441	1DH5	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2389.49	49.86	74.00	-24.14	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	42.63	74.00	-31.37	H	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	44.13	74.00	-29.87	V	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2486.73	44.01	74.00	-29.99	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	44.09	74.00	-29.91	H	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK	00	2389.70	48.59	74.00	-25.41	V	PEAK	Pass	Band Edge
4	Bluetooth BR_GFSK	00	4804.00	43.48	74.00	-30.52	H	Peak	Pass	Harmonic
5	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
5	Bluetooth BR_GFSK	39	7323.00	44.42	74.00	-29.58	H	Peak	Pass	Harmonic
6	Bluetooth BR_GFSK	78	2496.81	44.40	74.00	-29.60	V	PEAK	Pass	Band Edge
6	Bluetooth BR_GFSK	78	7440.00	45.19	74.00	-28.81	H	Peak	Pass	Harmonic
7	Bluetooth BR_GFSK	00	30.97	29.84	40.00	-10.16	V	Peak	Pass	LF





Mode	1																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.70</td><td>47.41</td><td>74.00</td><td>-26.59</td><td>45.41</td><td>30.78</td><td>5.36</td><td>34.14</td><td>348</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>2389.70</td><td>22.62</td><td>54.00</td><td>-31.38</td><td>20.62</td><td>30.78</td><td>5.36</td><td>34.14</td><td>348</td><td>250</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.70	47.41	74.00	-26.59	45.41	30.78	5.36	34.14	348	250	PEAK	2	2389.70	22.62	54.00	-31.38	20.62	30.78	5.36	34.14	348	250	AVERAGE	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.19</td><td>-----</td><td>-----</td><td>91.18</td><td>30.78</td><td>5.37</td><td>34.14</td><td>348</td><td>250</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>68.40</td><td>-----</td><td>-----</td><td>66.39</td><td>30.78</td><td>5.37</td><td>34.14</td><td>348</td><td>250</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.19	-----	-----	91.18	30.78	5.37	34.14	348	250	PEAK	2	2402.00	68.40	-----	-----	66.39	30.78	5.37	34.14	348	250	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2389.70	47.41	74.00	-26.59	45.41	30.78	5.36	34.14	348	250	PEAK																																																																																																					
2	2389.70	22.62	54.00	-31.38	20.62	30.78	5.36	34.14	348	250	AVERAGE																																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2402.00	93.19	-----	-----	91.18	30.78	5.37	34.14	348	250	PEAK																																																																																																					
2	2402.00	68.40	-----	-----	66.39	30.78	5.37	34.14	348	250	AVERAGE																																																																																																					





Mode	1																																																																																																																				
	Band Edge																																																																																																																				
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																				
ANT	0																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz)						Level (dBuV/m) Date: 2025-03-04 Frequency (MHz)																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.49</td><td>49.86</td><td>74.00</td><td>-24.14</td><td>47.86</td><td>30.78</td><td>5.36</td><td>34.14</td><td>142</td><td>169</td><td>PEAK</td></tr><tr><td>2</td><td>2389.49</td><td>25.07</td><td>54.00</td><td>-28.93</td><td>23.07</td><td>30.78</td><td>5.36</td><td>34.14</td><td>142</td><td>169</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.49	49.86	74.00	-24.14	47.86	30.78	5.36	34.14	142	169	PEAK	2	2389.49	25.07	54.00	-28.93	23.07	30.78	5.36	34.14	142	169	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>93.21</td><td>-----</td><td>91.20</td><td>30.78</td><td>5.37</td><td>34.14</td><td>142</td><td>169</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>68.42</td><td>-----</td><td>66.41</td><td>30.78</td><td>5.37</td><td>34.14</td><td>142</td><td>169</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.21	-----	91.20	30.78	5.37	34.14	142	169	PEAK	2	2402.00	68.42	-----	66.41	30.78	5.37	34.14	142	169	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	2389.49	49.86	74.00	-24.14	47.86	30.78	5.36	34.14	142	169	PEAK																																																																																																										
2	2389.49	25.07	54.00	-28.93	23.07	30.78	5.36	34.14	142	169	AVERAGE																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	2402.00	93.21	-----	91.20	30.78	5.37	34.14	142	169	PEAK																																																																																																											
2	2402.00	68.42	-----	66.41	30.78	5.37	34.14	142	169	AVERAGE																																																																																																											

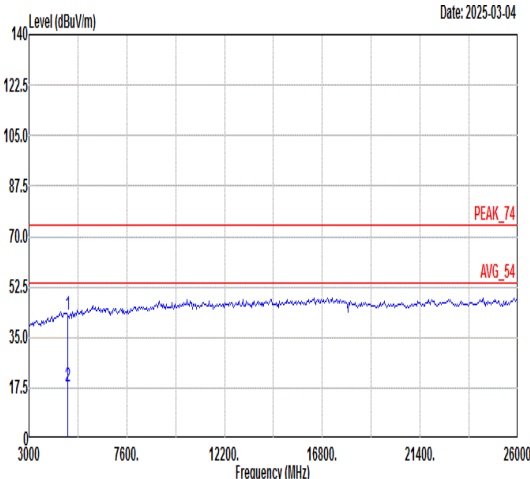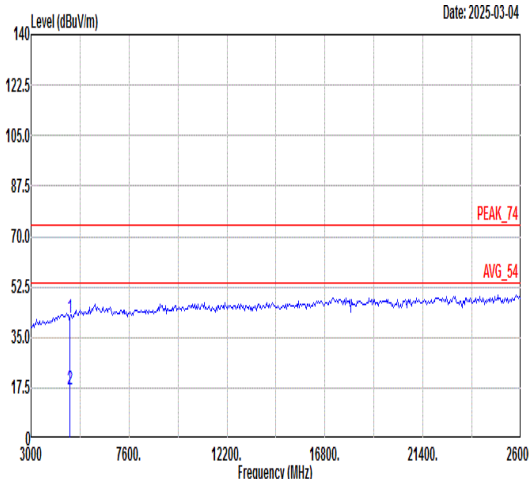

Mode	1																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	0																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>42.63</td><td>74.00</td><td>-31.37</td><td>62.14</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>17.84</td><td>54.00</td><td>-36.16</td><td>37.35</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	42.63	74.00	-31.37	62.14	36.39	8.94	64.84	---	---	Peak	2	4804.00	17.84	54.00	-36.16	37.35	36.39	8.94	64.84	---	---	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>41.73</td><td>74.00</td><td>-32.27</td><td>61.24</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>16.94</td><td>54.00</td><td>-37.06</td><td>36.45</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	41.73	74.00	-32.27	61.24	36.39	8.94	64.84	---	---	Peak	2	4804.00	16.94	54.00	-37.06	36.45	36.39	8.94	64.84	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4804.00	42.63	74.00	-31.37	62.14	36.39	8.94	64.84	---	---	Peak																																																																																																									
2	4804.00	17.84	54.00	-36.16	37.35	36.39	8.94	64.84	---	---	Average																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4804.00	41.73	74.00	-32.27	61.24	36.39	8.94	64.84	---	---	Peak																																																																																																									
2	4804.00	16.94	54.00	-37.06	36.45	36.39	8.94	64.84	---	---	Average																																																																																																									

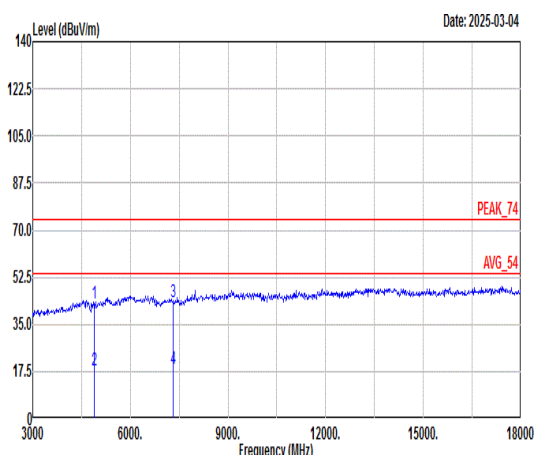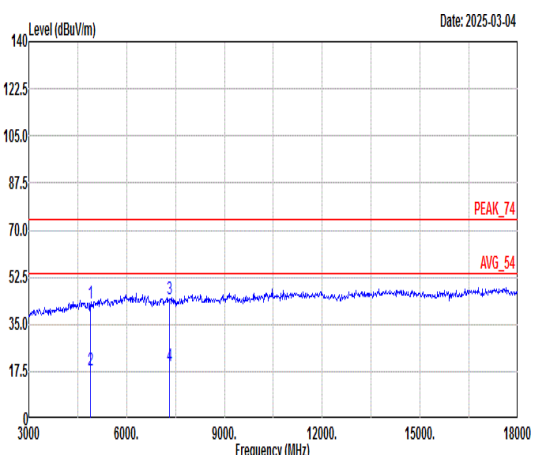

Mode	2																																																																																																																																								
	Harmonic																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																								
ANT	0																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																		
Peak Avg																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4882.00</td><td>42.92</td><td>74.00</td><td>-31.08</td><td>62.53</td><td>36.51</td><td>8.70</td><td>64.82 --- Peak</td></tr><tr><td>2</td><td>4882.00</td><td>18.13</td><td>54.00</td><td>-35.87</td><td>37.74</td><td>36.51</td><td>8.70</td><td>64.82 --- Average</td></tr><tr><td>3</td><td>7323.00</td><td>43.20</td><td>74.00</td><td>-30.80</td><td>61.14</td><td>36.88</td><td>10.18</td><td>65.00 --- Peak</td></tr><tr><td>4</td><td>7323.00</td><td>18.41</td><td>54.00</td><td>-35.59</td><td>36.35</td><td>36.88</td><td>10.18</td><td>65.00 --- Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4882.00	42.92	74.00	-31.08	62.53	36.51	8.70	64.82 --- Peak	2	4882.00	18.13	54.00	-35.87	37.74	36.51	8.70	64.82 --- Average	3	7323.00	43.20	74.00	-30.80	61.14	36.88	10.18	65.00 --- Peak	4	7323.00	18.41	54.00	-35.59	36.35	36.88	10.18	65.00 --- Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4882.00</td><td>42.65</td><td>74.00</td><td>-31.35</td><td>62.26</td><td>36.51</td><td>8.70</td><td>64.82 --- Peak</td></tr><tr><td>2</td><td>4882.00</td><td>17.86</td><td>54.00</td><td>-36.14</td><td>37.47</td><td>36.51</td><td>8.70</td><td>64.82 --- Average</td></tr><tr><td>3</td><td>7323.00</td><td>44.13</td><td>74.00</td><td>-29.87</td><td>62.07</td><td>36.88</td><td>10.18</td><td>65.00 --- Peak</td></tr><tr><td>4</td><td>7323.00</td><td>19.34</td><td>54.00</td><td>-34.66</td><td>37.28</td><td>36.88</td><td>10.18</td><td>65.00 --- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4882.00	42.65	74.00	-31.35	62.26	36.51	8.70	64.82 --- Peak	2	4882.00	17.86	54.00	-36.14	37.47	36.51	8.70	64.82 --- Average	3	7323.00	44.13	74.00	-29.87	62.07	36.88	10.18	65.00 --- Peak	4	7323.00	19.34	54.00	-34.66	37.28	36.88	10.18	65.00 --- Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																	
1	4882.00	42.92	74.00	-31.08	62.53	36.51	8.70	64.82 --- Peak																																																																																																																																	
2	4882.00	18.13	54.00	-35.87	37.74	36.51	8.70	64.82 --- Average																																																																																																																																	
3	7323.00	43.20	74.00	-30.80	61.14	36.88	10.18	65.00 --- Peak																																																																																																																																	
4	7323.00	18.41	54.00	-35.59	36.35	36.88	10.18	65.00 --- Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																		
1	4882.00	42.65	74.00	-31.35	62.26	36.51	8.70	64.82 --- Peak																																																																																																																																	
2	4882.00	17.86	54.00	-36.14	37.47	36.51	8.70	64.82 --- Average																																																																																																																																	
3	7323.00	44.13	74.00	-29.87	62.07	36.88	10.18	65.00 --- Peak																																																																																																																																	
4	7323.00	19.34	54.00	-34.66	37.28	36.88	10.18	65.00 --- Average																																																																																																																																	



Mode	3																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	0																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	Date: 2025-03-04 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.73</td><td>44.01</td><td>74.00</td><td>-29.99</td><td>41.86</td><td>30.80</td><td>5.46</td><td>34.11</td><td>263</td><td>237</td><td>PEAK</td></tr><tr><td>2</td><td>2486.73</td><td>19.22</td><td>54.00</td><td>-34.78</td><td>17.07</td><td>30.80</td><td>5.46</td><td>34.11</td><td>263</td><td>237</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2486.73	44.01	74.00	-29.99	41.86	30.80	5.46	34.11	263	237	PEAK	2	2486.73	19.22	54.00	-34.78	17.07	30.80	5.46	34.11	263	237	AVERAGE	Date: 2025-03-04 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>96.59</td><td>-----</td><td>-----</td><td>94.44</td><td>30.80</td><td>5.46</td><td>34.11</td><td>263</td><td>237</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>71.80</td><td>-----</td><td>-----</td><td>69.65</td><td>30.80</td><td>5.46</td><td>34.11</td><td>263</td><td>237</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.59	-----	-----	94.44	30.80	5.46	34.11	263	237	PEAK	2	2480.00	71.80	-----	-----	69.65	30.80	5.46	34.11	263	237	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2486.73	44.01	74.00	-29.99	41.86	30.80	5.46	34.11	263	237	PEAK																																																																																																			
2	2486.73	19.22	54.00	-34.78	17.07	30.80	5.46	34.11	263	237	AVERAGE																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	96.59	-----	-----	94.44	30.80	5.46	34.11	263	237	PEAK																																																																																																			
2	2480.00	71.80	-----	-----	69.65	30.80	5.46	34.11	263	237	AVERAGE																																																																																																			



Mode	3																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	0																																																																																																													
Pol.	Vertical					Fundamental																																																																																																								
Peak	Level (dBuV/m) Date: 2025-03-04 PEAK_BE_74 Frequency (MHz)					Level (dBuV/m) Date: 2025-03-04 PEAK_74 Frequency (MHz)																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2491.09</td><td>43.50</td><td>74.00</td><td>-30.50</td><td>41.33</td><td>30.80</td><td>5.47</td><td>34.10</td><td>400</td><td>197 PEAK</td></tr><tr><td>2 2491.09</td><td>18.71</td><td>54.00</td><td>-35.29</td><td>16.54</td><td>30.80</td><td>5.47</td><td>34.10</td><td>400</td><td>197 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2491.09	43.50	74.00	-30.50	41.33	30.80	5.47	34.10	400	197 PEAK	2 2491.09	18.71	54.00	-35.29	16.54	30.80	5.47	34.10	400	197 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>96.87</td><td>-----</td><td>-----</td><td>94.72</td><td>30.80</td><td>5.46</td><td>34.11</td><td>400</td><td>197 PEAK</td></tr><tr><td>2 2480.00</td><td>72.08</td><td>-----</td><td>-----</td><td>69.93</td><td>30.80</td><td>5.46</td><td>34.11</td><td>400</td><td>197 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	96.87	-----	-----	94.72	30.80	5.46	34.11	400	197 PEAK	2 2480.00	72.08	-----	-----	69.93	30.80	5.46	34.11	400	197 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 2491.09	43.50	74.00	-30.50	41.33	30.80	5.47	34.10	400	197 PEAK																																																																																																					
2 2491.09	18.71	54.00	-35.29	16.54	30.80	5.47	34.10	400	197 AVERAGE																																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 2480.00	96.87	-----	-----	94.72	30.80	5.46	34.11	400	197 PEAK																																																																																																					
2 2480.00	72.08	-----	-----	69.93	30.80	5.46	34.11	400	197 AVERAGE																																																																																																					





Mode	3																																																																																																																																																																			
	Harmonic																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																			
ANT	0																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>43.50</td><td>74.00</td><td>-30.50</td><td>63.21</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>18.71</td><td>54.00</td><td>-35.29</td><td>38.42</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>62.13</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>19.30</td><td>54.00</td><td>-34.70</td><td>37.34</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.50	74.00	-30.50	63.21	36.64	8.46	64.81	---	---	Peak	2	4960.00	18.71	54.00	-35.29	38.42	36.64	8.46	64.81	---	---	Average	3	7440.00	44.09	74.00	-29.91	62.13	36.76	10.17	64.97	---	---	Peak	4	7440.00	19.30	54.00	-34.70	37.34	36.76	10.17	64.97	---	---	Average	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>43.80</td><td>74.00</td><td>-30.20</td><td>63.51</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>19.01</td><td>54.00</td><td>-34.99</td><td>38.72</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>61.49</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>18.66</td><td>54.00</td><td>-35.34</td><td>36.70</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.80	74.00	-30.20	63.51	36.64	8.46	64.81	---	---	Peak	2	4960.00	19.01	54.00	-34.99	38.72	36.64	8.46	64.81	---	---	Average	3	7440.00	43.45	74.00	-30.55	61.49	36.76	10.17	64.97	---	---	Peak	4	7440.00	18.66	54.00	-35.34	36.70	36.76	10.17	64.97	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
	1	4960.00	43.50	74.00	-30.50	63.21	36.64	8.46	64.81	---	---	Peak																																																																																																																																																								
2	4960.00	18.71	54.00	-35.29	38.42	36.64	8.46	64.81	---	---	Average																																																																																																																																																									
3	7440.00	44.09	74.00	-29.91	62.13	36.76	10.17	64.97	---	---	Peak																																																																																																																																																									
4	7440.00	19.30	54.00	-34.70	37.34	36.76	10.17	64.97	---	---	Average																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																											
1	4960.00	43.80	74.00	-30.20	63.51	36.64	8.46	64.81	---	---	Peak																																																																																																																																																									
2	4960.00	19.01	54.00	-34.99	38.72	36.64	8.46	64.81	---	---	Average																																																																																																																																																									
3	7440.00	43.45	74.00	-30.55	61.49	36.76	10.17	64.97	---	---	Peak																																																																																																																																																									
4	7440.00	18.66	54.00	-35.34	36.70	36.76	10.17	64.97	---	---	Average																																																																																																																																																									





Mode	4																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal					Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz)					Level (dBuV/m) Date: 2025-03-04 Frequency (MHz)																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.70</td><td>47.72</td><td>74.00</td><td>-26.28</td><td>45.72</td><td>30.78</td><td>5.36</td><td>34.14</td><td>315</td><td>69 PEAK</td></tr><tr><td>2</td><td>2389.70</td><td>22.93</td><td>54.00</td><td>-31.07</td><td>20.93</td><td>30.78</td><td>5.36</td><td>34.14</td><td>315</td><td>69 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.70	47.72	74.00	-26.28	45.72	30.78	5.36	34.14	315	69 PEAK	2	2389.70	22.93	54.00	-31.07	20.93	30.78	5.36	34.14	315	69 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>87.41</td><td>-----</td><td>-----</td><td>85.40</td><td>30.78</td><td>5.37</td><td>34.14</td><td>315</td><td>69 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>62.62</td><td>-----</td><td>-----</td><td>60.61</td><td>30.78</td><td>5.37</td><td>34.14</td><td>315</td><td>69 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	(dB)	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.41	-----	-----	85.40	30.78	5.37	34.14	315	69 PEAK	2	2402.00	62.62	-----	-----	60.61	30.78	5.37	34.14	315	69 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		Remark																																																																																																											
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2389.70	47.72	74.00	-26.28	45.72	30.78	5.36	34.14	315	69 PEAK																																																																																																										
2	2389.70	22.93	54.00	-31.07	20.93	30.78	5.36	34.14	315	69 AVERAGE																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		Remark																																																																																																											
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2402.00	87.41	-----	-----	85.40	30.78	5.37	34.14	315	69 PEAK																																																																																																										
2	2402.00	62.62	-----	-----	60.61	30.78	5.37	34.14	315	69 AVERAGE																																																																																																										

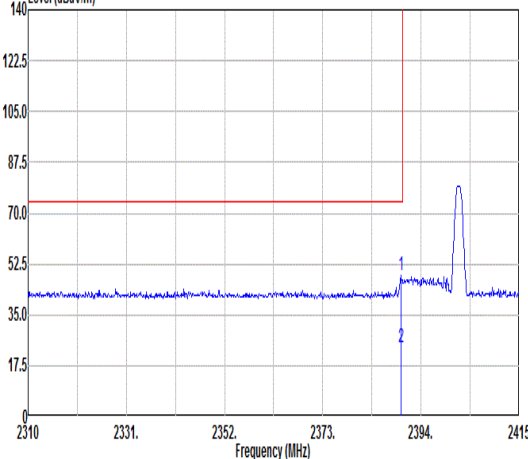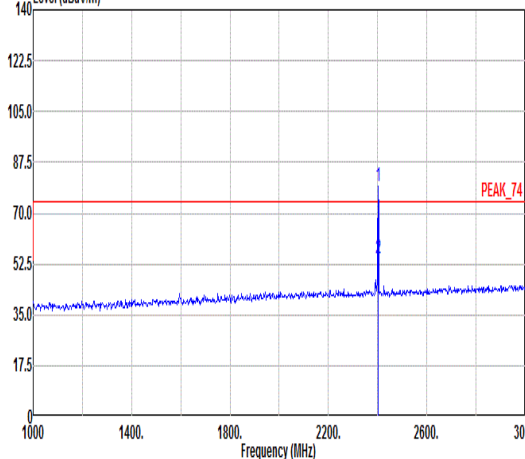

Mode	4																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	Level (dBuV/m) Date: 2025-03-04  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.70</td><td>48.59</td><td>74.00</td><td>-25.41</td><td>46.59</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>304</td><td>PEAK</td></tr><tr><td>2</td><td>2389.70</td><td>23.80</td><td>54.00</td><td>-30.20</td><td>21.80</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>304</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.70	48.59	74.00	-25.41	46.59	30.78	5.36	34.14	100	304	PEAK	2	2389.70	23.80	54.00	-30.20	21.80	30.78	5.36	34.14	100	304	AVERAGE	Level (dBuV/m) Date: 2025-03-04  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>79.45</td><td>-----</td><td>77.44</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>304</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>54.66</td><td>-----</td><td>52.65</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>304</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	79.45	-----	77.44	30.78	5.37	34.14	100	304	PEAK	2	2402.00	54.66	-----	52.65	30.78	5.37	34.14	100	304	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2389.70	48.59	74.00	-25.41	46.59	30.78	5.36	34.14	100	304	PEAK																																																																																																	
2	2389.70	23.80	54.00	-30.20	21.80	30.78	5.36	34.14	100	304	AVERAGE																																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2402.00	79.45	-----	77.44	30.78	5.37	34.14	100	304	PEAK																																																																																																		
2	2402.00	54.66	-----	52.65	30.78	5.37	34.14	100	304	AVERAGE																																																																																																		

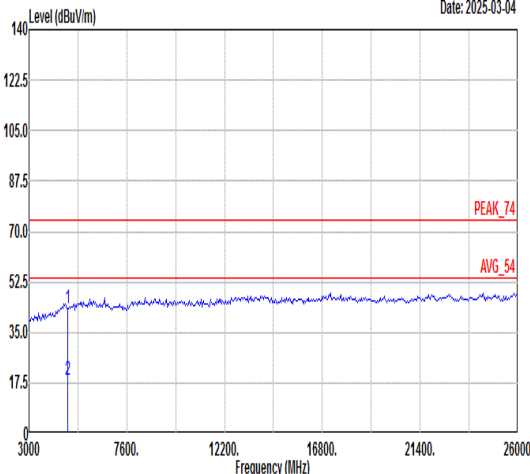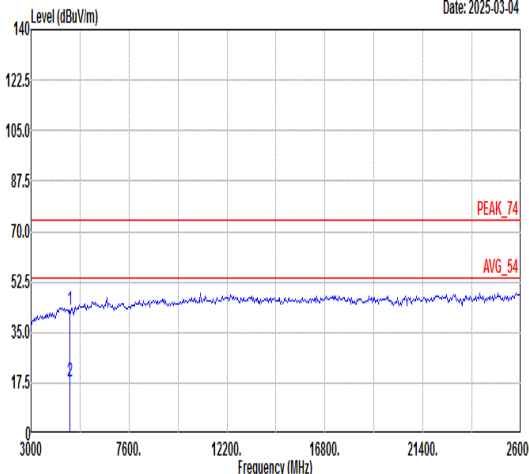

Mode	4																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	 Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) PEAK_74 AVG_54						 Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) PEAK_74 AVG_54																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.48</td><td>74.00</td><td>-30.52</td><td>62.99</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>18.69</td><td>54.00</td><td>-35.31</td><td>38.20</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.48	74.00	-30.52	62.99	36.39	8.94	64.84	---	---	Peak	2	4804.00	18.69	54.00	-35.31	38.20	36.39	8.94	64.84	---	---	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.95</td><td>74.00</td><td>-31.05</td><td>62.46</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>18.16</td><td>54.00</td><td>-35.84</td><td>37.67</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.95	74.00	-31.05	62.46	36.39	8.94	64.84	---	---	Peak	2	4804.00	18.16	54.00	-35.84	37.67	36.39	8.94	64.84	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4804.00	43.48	74.00	-30.52	62.99	36.39	8.94	64.84	---	---	Peak																																																																																																									
2	4804.00	18.69	54.00	-35.31	38.20	36.39	8.94	64.84	---	---	Average																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4804.00	42.95	74.00	-31.05	62.46	36.39	8.94	64.84	---	---	Peak																																																																																																									
2	4804.00	18.16	54.00	-35.84	37.67	36.39	8.94	64.84	---	---	Average																																																																																																									



Mode	5																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																									
ANT	1																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.23</td><td>74.00</td><td>-31.77</td><td>61.84</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>17.44</td><td>54.00</td><td>-36.56</td><td>37.05</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>62.36</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>19.63</td><td>54.00</td><td>-34.37</td><td>37.57</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.23	74.00	-31.77	61.84	36.51	8.70	64.82	---	---	Peak	2	4882.00	17.44	54.00	-36.56	37.05	36.51	8.70	64.82	---	---	Average	3	7323.00	44.42	74.00	-29.58	62.36	36.88	10.18	65.00	---	---	Peak	4	7323.00	19.63	54.00	-34.37	37.57	36.88	10.18	65.00	---	---	Average	Level (dBuV/m) Date: 2025-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>62.46</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4882.00</td><td>18.06</td><td>54.00</td><td>-35.94</td><td>37.67</td><td>36.51</td><td>8.70</td><td>64.82</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7323.00</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>62.20</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7323.00</td><td>19.47</td><td>54.00</td><td>-34.53</td><td>37.41</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.85	74.00	-31.15	62.46	36.51	8.70	64.82	---	---	Peak	2	4882.00	18.06	54.00	-35.94	37.67	36.51	8.70	64.82	---	---	Average	3	7323.00	44.26	74.00	-29.74	62.20	36.88	10.18	65.00	---	---	Peak	4	7323.00	19.47	54.00	-34.53	37.41	36.88	10.18	65.00	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4882.00	42.23	74.00	-31.77	61.84	36.51	8.70	64.82	---	---	Peak																																																																																																																																															
2	4882.00	17.44	54.00	-36.56	37.05	36.51	8.70	64.82	---	---	Average																																																																																																																																															
3	7323.00	44.42	74.00	-29.58	62.36	36.88	10.18	65.00	---	---	Peak																																																																																																																																															
4	7323.00	19.63	54.00	-34.37	37.57	36.88	10.18	65.00	---	---	Average																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4882.00	42.85	74.00	-31.15	62.46	36.51	8.70	64.82	---	---	Peak																																																																																																																																															
2	4882.00	18.06	54.00	-35.94	37.67	36.51	8.70	64.82	---	---	Average																																																																																																																																															
3	7323.00	44.26	74.00	-29.74	62.20	36.88	10.18	65.00	---	---	Peak																																																																																																																																															
4	7323.00	19.47	54.00	-34.53	37.41	36.88	10.18	65.00	---	---	Average																																																																																																																																															



Mode	6																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal	Fundamental																																																																																																										
Peak	Level (dBuV/m) Date: 2025-03-04 PEAK_BE_74 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.72</td><td>43.70</td><td>74.00</td><td>-30.30</td><td>41.55</td><td>30.80</td><td>5.46</td><td>34.11</td><td>203</td><td>228</td><td>PEAK</td></tr><tr><td>2</td><td>2483.72</td><td>18.91</td><td>54.00</td><td>-35.09</td><td>16.76</td><td>30.80</td><td>5.46</td><td>34.11</td><td>203</td><td>228</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.72	43.70	74.00	-30.30	41.55	30.80	5.46	34.11	203	228	PEAK	2	2483.72	18.91	54.00	-35.09	16.76	30.80	5.46	34.11	203	228	AVERAGE	Level (dBuV/m) Date: 2025-03-04 PEAK_74 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.50</td><td>-----</td><td>96.35</td><td>30.80</td><td>5.46</td><td>34.11</td><td>203</td><td>228</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>73.71</td><td>-----</td><td>71.56</td><td>30.80</td><td>5.46</td><td>34.11</td><td>203</td><td>228</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.50	-----	96.35	30.80	5.46	34.11	203	228	PEAK	2	2480.00	73.71	-----	71.56	30.80	5.46	34.11	203	228	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.72	43.70	74.00	-30.30	41.55	30.80	5.46	34.11	203	228	PEAK																																																																																																	
2	2483.72	18.91	54.00	-35.09	16.76	30.80	5.46	34.11	203	228	AVERAGE																																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2480.00	98.50	-----	96.35	30.80	5.46	34.11	203	228	PEAK																																																																																																		
2	2480.00	73.71	-----	71.56	30.80	5.46	34.11	203	228	AVERAGE																																																																																																		





Mode	6																																																																																																																		
	Band Edge																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Vertical						Fundamental																																																																																																												
Peak	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.81</td><td>44.40</td><td>74.00</td><td>-29.60</td><td>42.23</td><td>30.80</td><td>5.47</td><td>34.10</td><td>400</td><td>166</td><td>PEAK</td></tr><tr><td>2</td><td>2496.81</td><td>19.61</td><td>54.00</td><td>-34.39</td><td>17.44</td><td>30.80</td><td>5.47</td><td>34.10</td><td>400</td><td>166</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2496.81	44.40	74.00	-29.60	42.23	30.80	5.47	34.10	400	166	PEAK	2	2496.81	19.61	54.00	-34.39	17.44	30.80	5.47	34.10	400	166	AVERAGE	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.60</td><td>-----</td><td>-----</td><td>94.45</td><td>30.80</td><td>5.46</td><td>34.11</td><td>400</td><td>166</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>71.81</td><td>-----</td><td>-----</td><td>69.66</td><td>30.80</td><td>5.46</td><td>34.11</td><td>400</td><td>166</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.60	-----	-----	94.45	30.80	5.46	34.11	400	166	PEAK	2	2480.00	71.81	-----	-----	69.66	30.80	5.46	34.11	400	166	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	2496.81	44.40	74.00	-29.60	42.23	30.80	5.47	34.10	400	166	PEAK																																																																																																								
2	2496.81	19.61	54.00	-34.39	17.44	30.80	5.47	34.10	400	166	AVERAGE																																																																																																								
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2480.00	96.60	-----	-----	94.45	30.80	5.46	34.11	400	166	PEAK																																																																																																								
2	2480.00	71.81	-----	-----	69.66	30.80	5.46	34.11	400	166	AVERAGE																																																																																																								



Mode	6																																																																																																																																																																							
	Harmonic																																																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																							
ANT	1																																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2025-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.02</td><td>74.00</td><td>-30.98</td><td>62.73</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>18.23</td><td>54.00</td><td>-35.77</td><td>37.94</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>63.23</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>20.40</td><td>54.00</td><td>-33.60</td><td>38.44</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	43.02	74.00	-30.98	62.73	36.64	8.46	64.81	---	---	Peak	2	4960.00	18.23	54.00	-35.77	37.94	36.64	8.46	64.81	---	---	Average	3	7440.00	45.19	74.00	-28.81	63.23	36.76	10.17	64.97	---	---	Peak	4	7440.00	20.40	54.00	-33.60	38.44	36.76	10.17	64.97	---	---	Average	Level (dBuV/m) Date: 2025-03-04 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.58</td><td>74.00</td><td>-30.42</td><td>63.29</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>18.79</td><td>54.00</td><td>-35.21</td><td>38.50</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>44.56</td><td>74.00</td><td>-29.44</td><td>62.60</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7440.00</td><td>19.77</td><td>54.00</td><td>-34.23</td><td>37.81</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4960.00	43.58	74.00	-30.42	63.29	36.64	8.46	64.81	---	---	Peak	2	4960.00	18.79	54.00	-35.21	38.50	36.64	8.46	64.81	---	---	Average	3	7440.00	44.56	74.00	-29.44	62.60	36.76	10.17	64.97	---	---	Peak	4	7440.00	19.77	54.00	-34.23	37.81	36.76	10.17	64.97	---	---	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																														
1	4960.00	43.02	74.00	-30.98	62.73	36.64	8.46	64.81	---	---	Peak																																																																																																																																																													
2	4960.00	18.23	54.00	-35.77	37.94	36.64	8.46	64.81	---	---	Average																																																																																																																																																													
3	7440.00	45.19	74.00	-28.81	63.23	36.76	10.17	64.97	---	---	Peak																																																																																																																																																													
4	7440.00	20.40	54.00	-33.60	38.44	36.76	10.17	64.97	---	---	Average																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																														
1	4960.00	43.58	74.00	-30.42	63.29	36.64	8.46	64.81	---	---	Peak																																																																																																																																																													
2	4960.00	18.79	54.00	-35.21	38.50	36.64	8.46	64.81	---	---	Average																																																																																																																																																													
3	7440.00	44.56	74.00	-29.44	62.60	36.76	10.17	64.97	---	---	Peak																																																																																																																																																													
4	7440.00	19.77	54.00	-34.23	37.81	36.76	10.17	64.97	---	---	Average																																																																																																																																																													

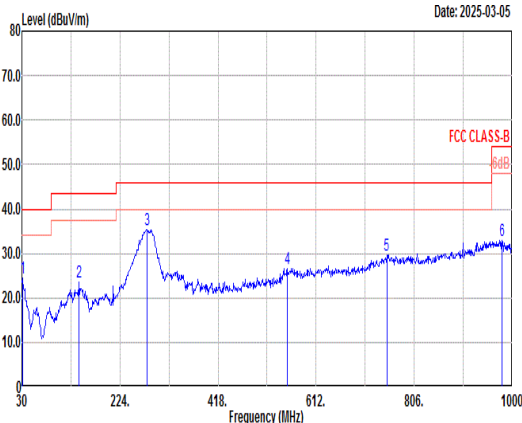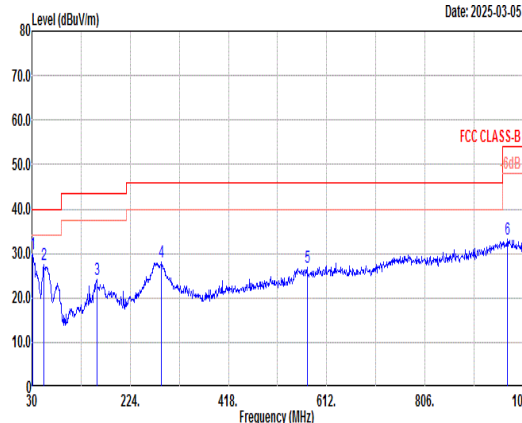


Mode	7																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																																																																			
ANT	0																																																																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																																																																													
QPI/ Peak																																																																																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>24.59</td><td>40.00</td><td>-15.41</td><td>30.87</td><td>24.72</td><td>0.54</td><td>31.54</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>143.49</td><td>23.59</td><td>43.50</td><td>-19.91</td><td>36.59</td><td>17.38</td><td>1.23</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>277.35</td><td>35.36</td><td>46.00</td><td>-10.64</td><td>46.34</td><td>18.84</td><td>1.73</td><td>31.55</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>555.74</td><td>26.67</td><td>46.00</td><td>-19.33</td><td>28.57</td><td>26.91</td><td>2.47</td><td>31.28</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>751.68</td><td>29.58</td><td>46.00</td><td>-16.42</td><td>28.93</td><td>28.80</td><td>2.85</td><td>31.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>979.63</td><td>32.88</td><td>54.00</td><td>-21.12</td><td>29.10</td><td>31.26</td><td>3.28</td><td>30.76</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	24.59	40.00	-15.41	30.87	24.72	0.54	31.54	---	---	Peak	2	143.49	23.59	43.50	-19.91	36.59	17.38	1.23	31.61	---	---	Peak	3	277.35	35.36	46.00	-10.64	46.34	18.84	1.73	31.55	---	---	Peak	4	555.74	26.67	46.00	-19.33	28.57	26.91	2.47	31.28	---	---	Peak	5	751.68	29.58	46.00	-16.42	28.93	28.80	2.85	31.00	---	---	Peak	6	979.63	32.88	54.00	-21.12	29.10	31.26	3.28	30.76	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>29.84</td><td>40.00</td><td>-10.16</td><td>36.12</td><td>24.72</td><td>0.54</td><td>31.54</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>53.28</td><td>27.60</td><td>40.00</td><td>-12.40</td><td>45.39</td><td>13.18</td><td>0.73</td><td>31.70</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>158.04</td><td>24.16</td><td>43.50</td><td>-19.34</td><td>37.84</td><td>16.62</td><td>1.28</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>286.08</td><td>27.95</td><td>46.00</td><td>-18.05</td><td>38.69</td><td>19.07</td><td>1.76</td><td>31.57</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>573.20</td><td>26.81</td><td>46.00</td><td>-19.19</td><td>29.20</td><td>26.31</td><td>2.51</td><td>31.21</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>967.99</td><td>33.28</td><td>54.00</td><td>-20.72</td><td>29.12</td><td>31.70</td><td>3.26</td><td>30.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	29.84	40.00	-10.16	36.12	24.72	0.54	31.54	---	---	Peak	2	53.28	27.60	40.00	-12.40	45.39	13.18	0.73	31.70	---	---	Peak	3	158.04	24.16	43.50	-19.34	37.84	16.62	1.28	31.58	---	---	Peak	4	286.08	27.95	46.00	-18.05	38.69	19.07	1.76	31.57	---	---	Peak	5	573.20	26.81	46.00	-19.19	29.20	26.31	2.51	31.21	---	---	Peak	6	967.99	33.28	54.00	-20.72	29.12	31.70	3.26	30.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																										
	1	30.97	24.59	40.00	-15.41	30.87	24.72	0.54	31.54	---	---	Peak																																																																																																																																																																																																								
	2	143.49	23.59	43.50	-19.91	36.59	17.38	1.23	31.61	---	---	Peak																																																																																																																																																																																																								
	3	277.35	35.36	46.00	-10.64	46.34	18.84	1.73	31.55	---	---	Peak																																																																																																																																																																																																								
	4	555.74	26.67	46.00	-19.33	28.57	26.91	2.47	31.28	---	---	Peak																																																																																																																																																																																																								
	5	751.68	29.58	46.00	-16.42	28.93	28.80	2.85	31.00	---	---	Peak																																																																																																																																																																																																								
6	979.63	32.88	54.00	-21.12	29.10	31.26	3.28	30.76	---	---	Peak																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	30.97	29.84	40.00	-10.16	36.12	24.72	0.54	31.54	---	---	Peak																																																																																																																																																																																																									
2	53.28	27.60	40.00	-12.40	45.39	13.18	0.73	31.70	---	---	Peak																																																																																																																																																																																																									
3	158.04	24.16	43.50	-19.34	37.84	16.62	1.28	31.58	---	---	Peak																																																																																																																																																																																																									
4	286.08	27.95	46.00	-18.05	38.69	19.07	1.76	31.57	---	---	Peak																																																																																																																																																																																																									
5	573.20	26.81	46.00	-19.19	29.20	26.31	2.51	31.21	---	---	Peak																																																																																																																																																																																																									
6	967.99	33.28	54.00	-20.72	29.12	31.70	3.26	30.80	---	---	Peak																																																																																																																																																																																																									


Appendix D. Duty Cycle Plots

Ant 0

DH5 on time (One Pulse) Plot on Channel 39

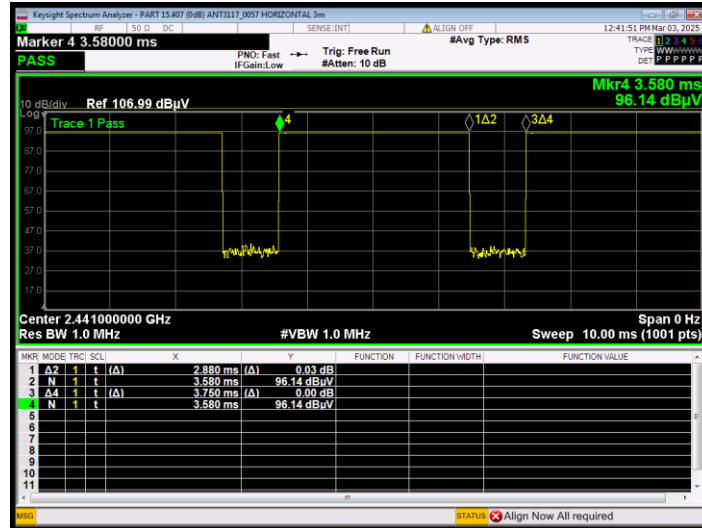

DH5 on time (Count Pulses) Plot on Channel 39

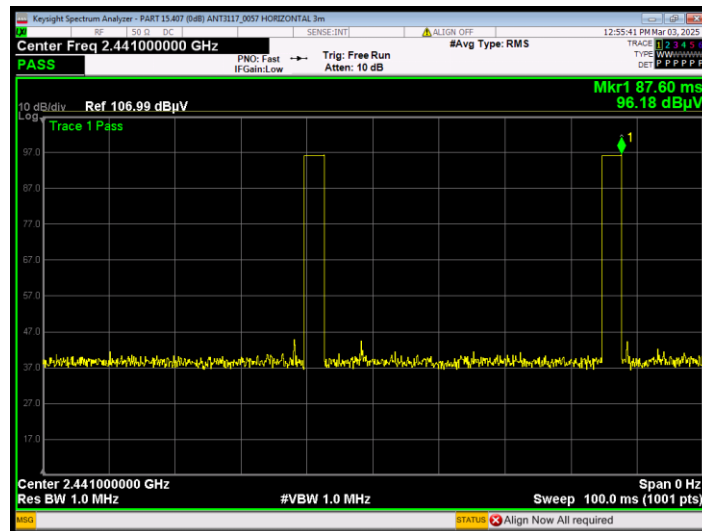


Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Ant 1

DH5 on time (One Pulse) Plot on Channel 39

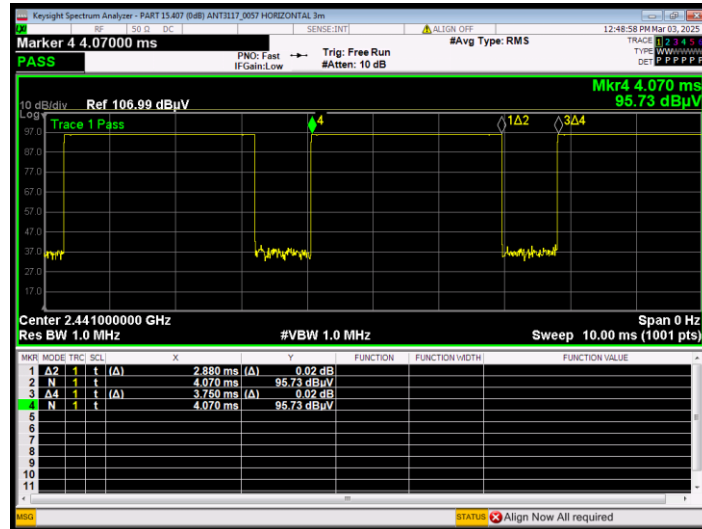

DH5 on time (Count Pulses) Plot on Channel 39

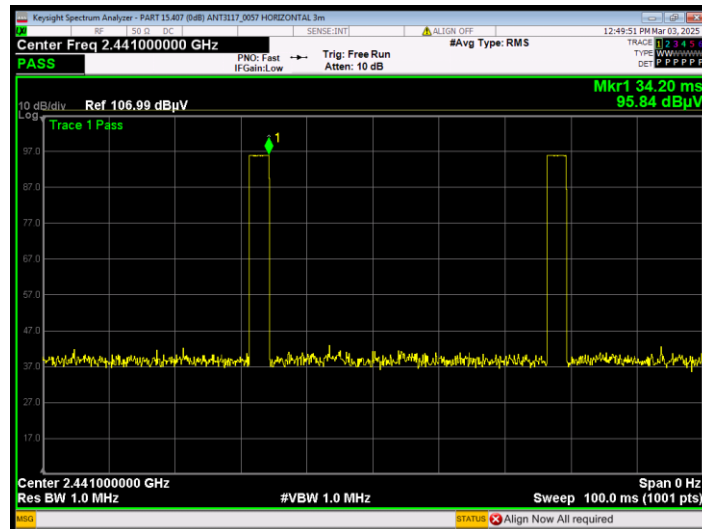

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.