




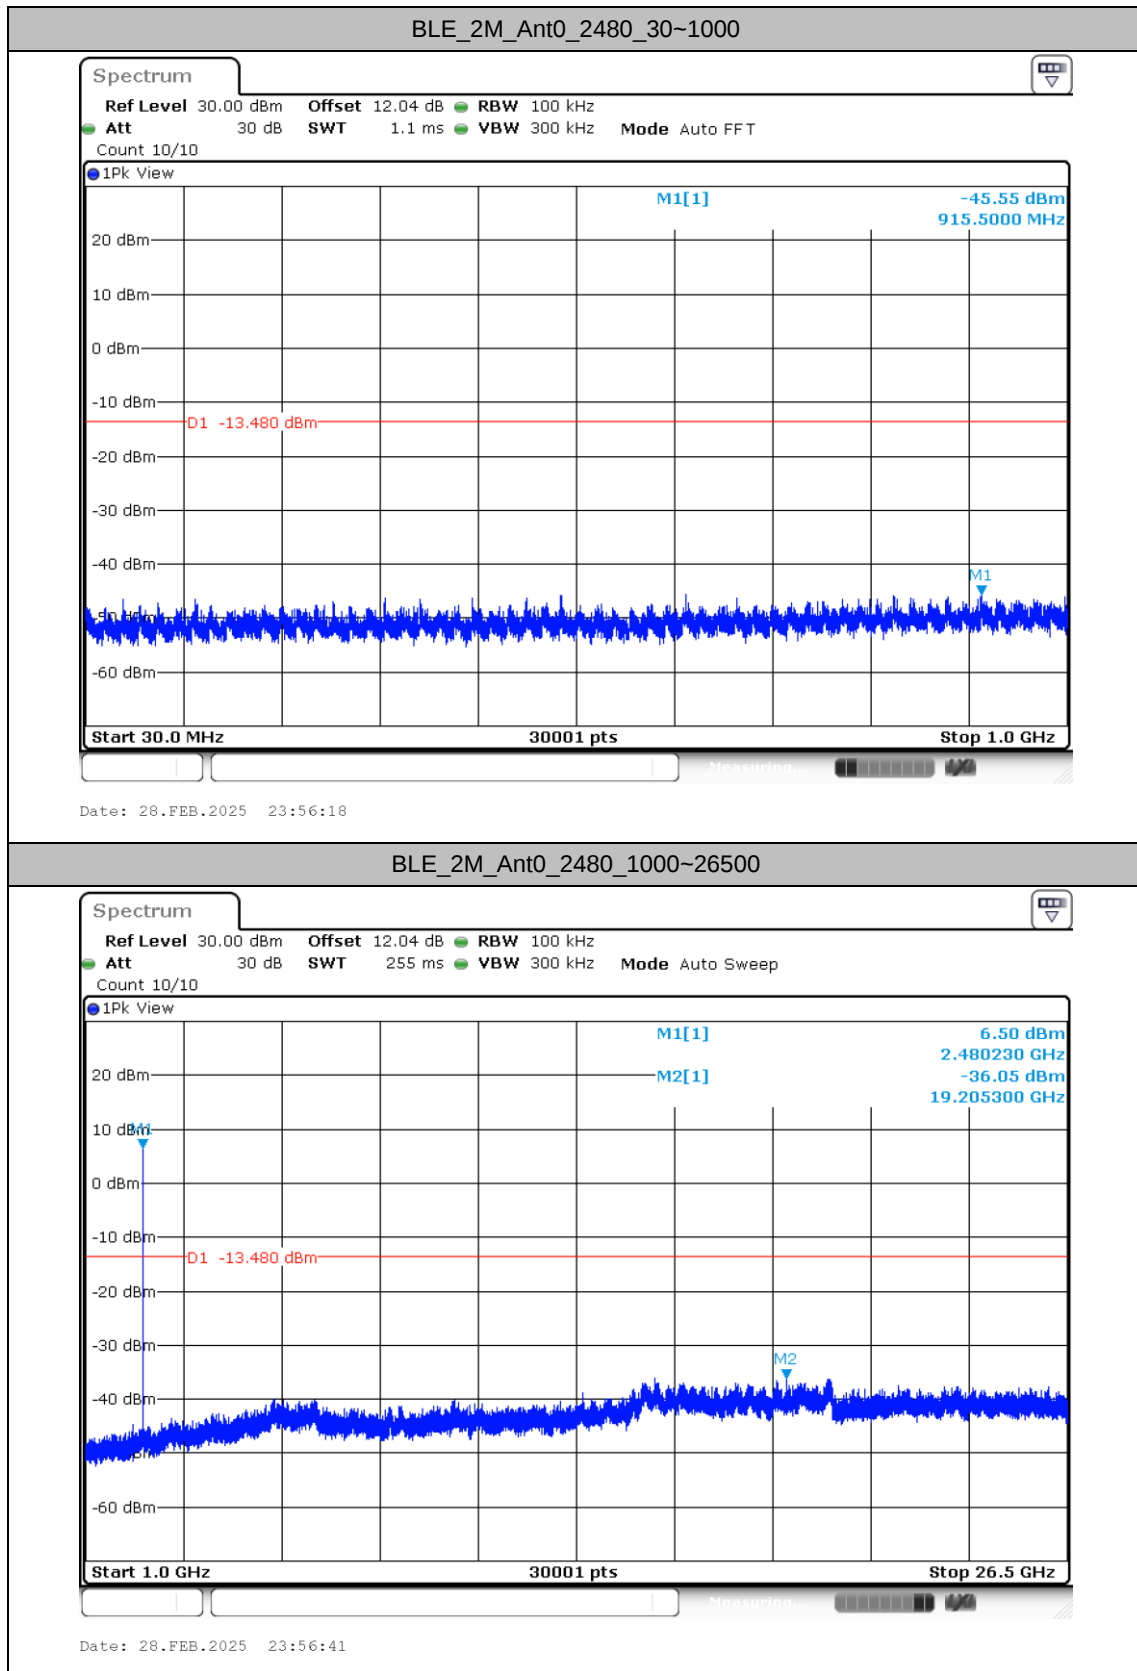
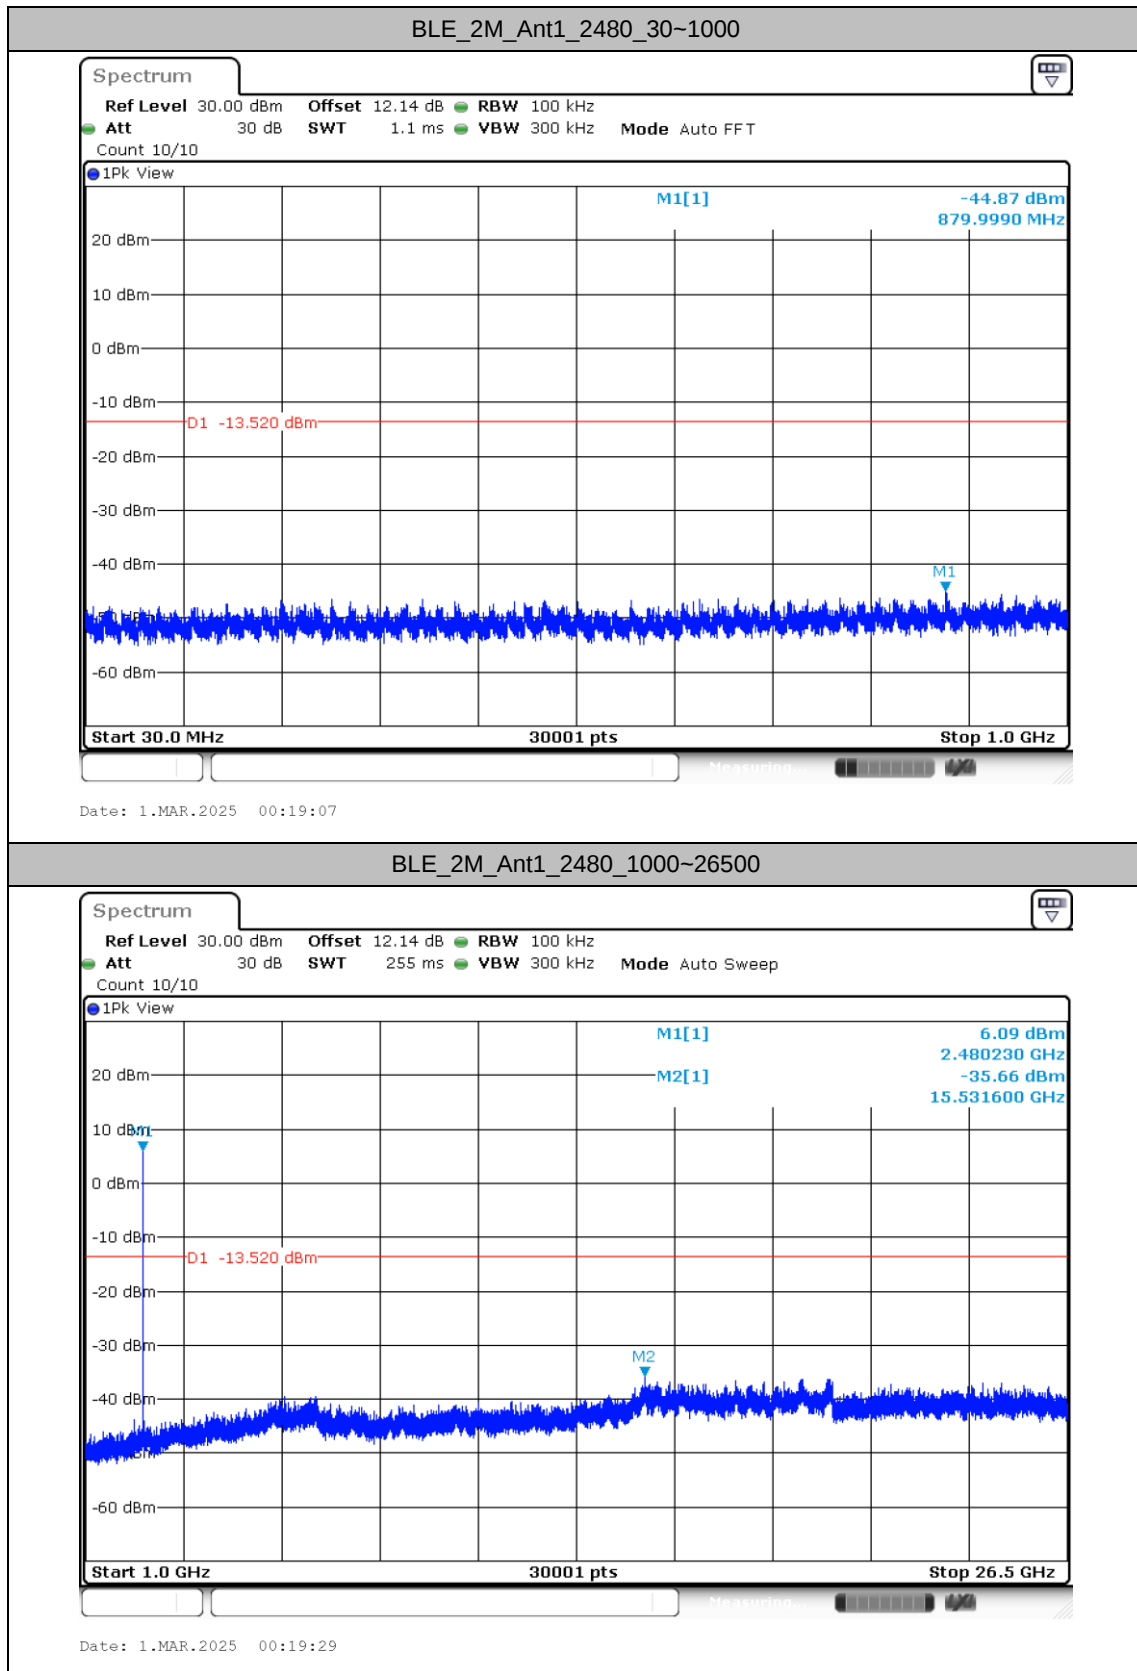
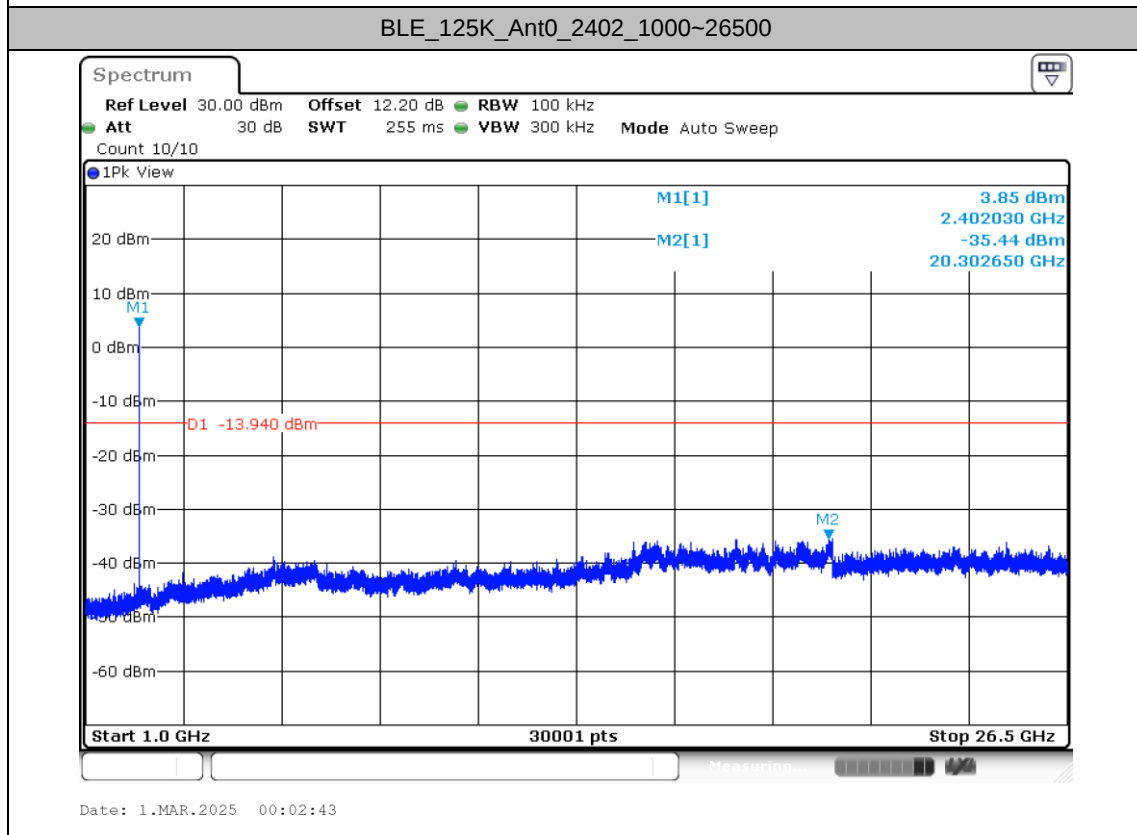


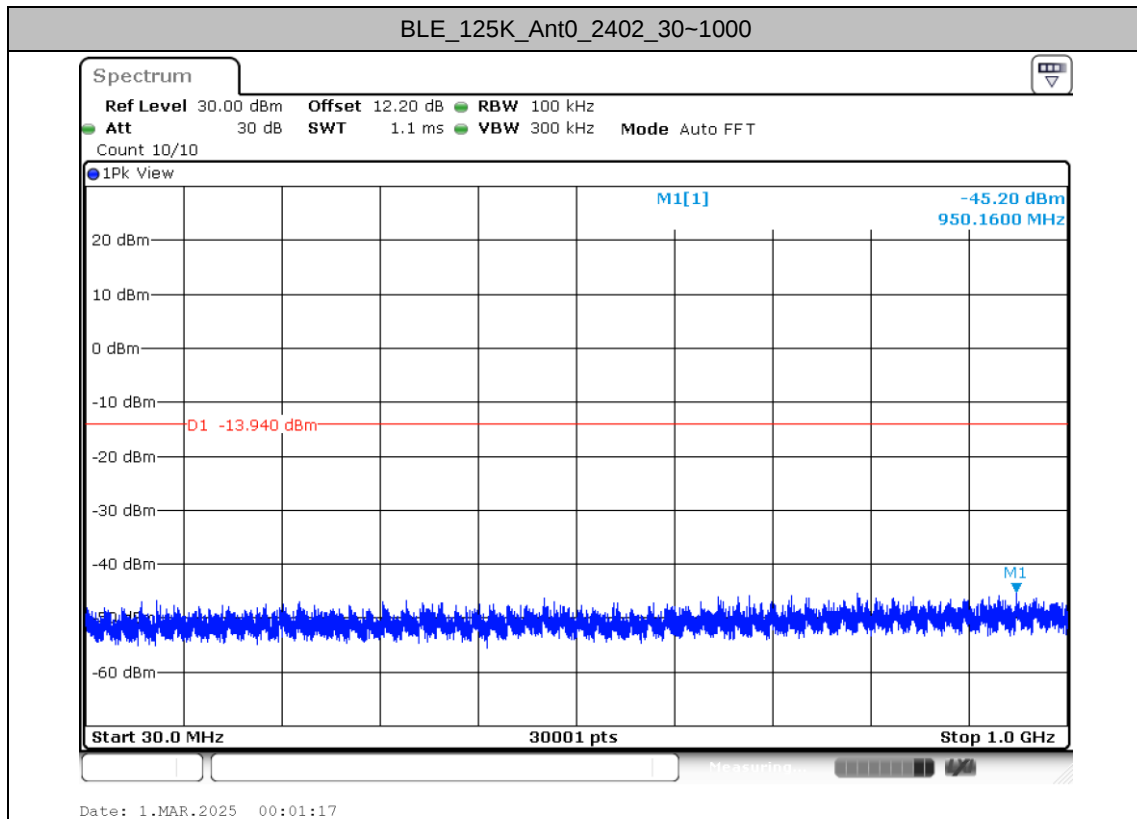



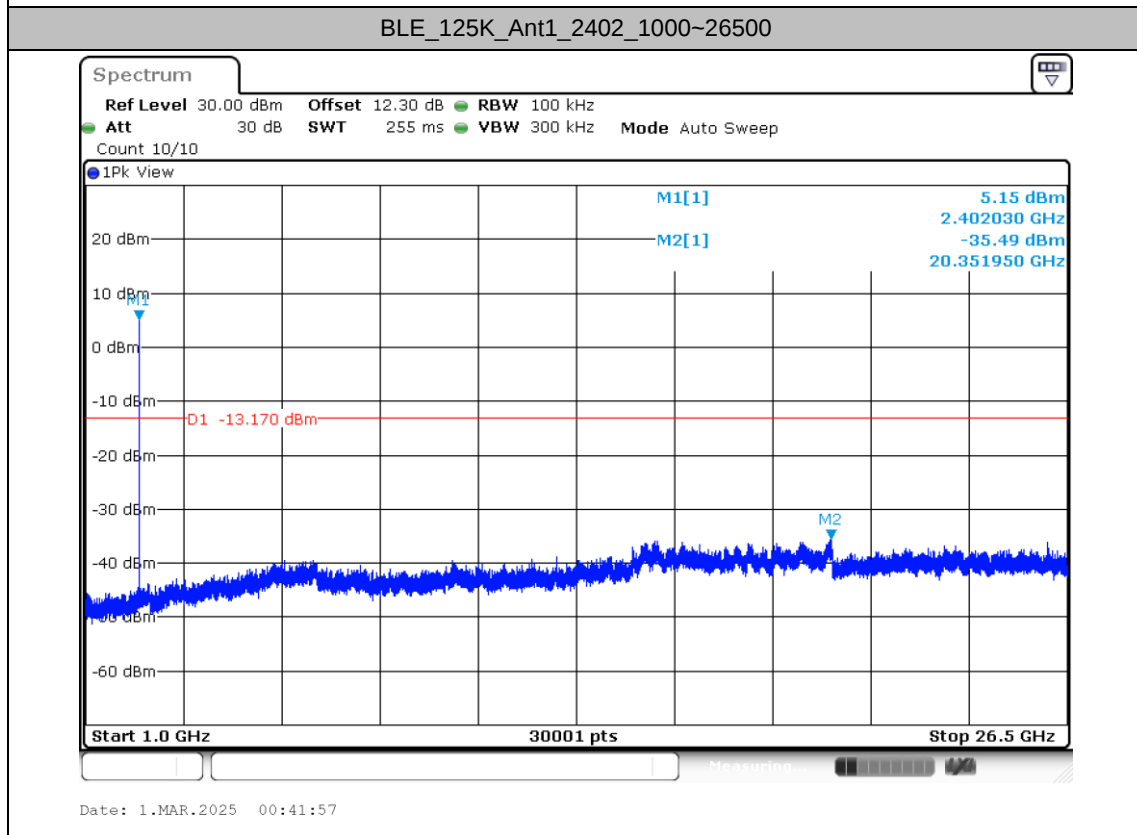


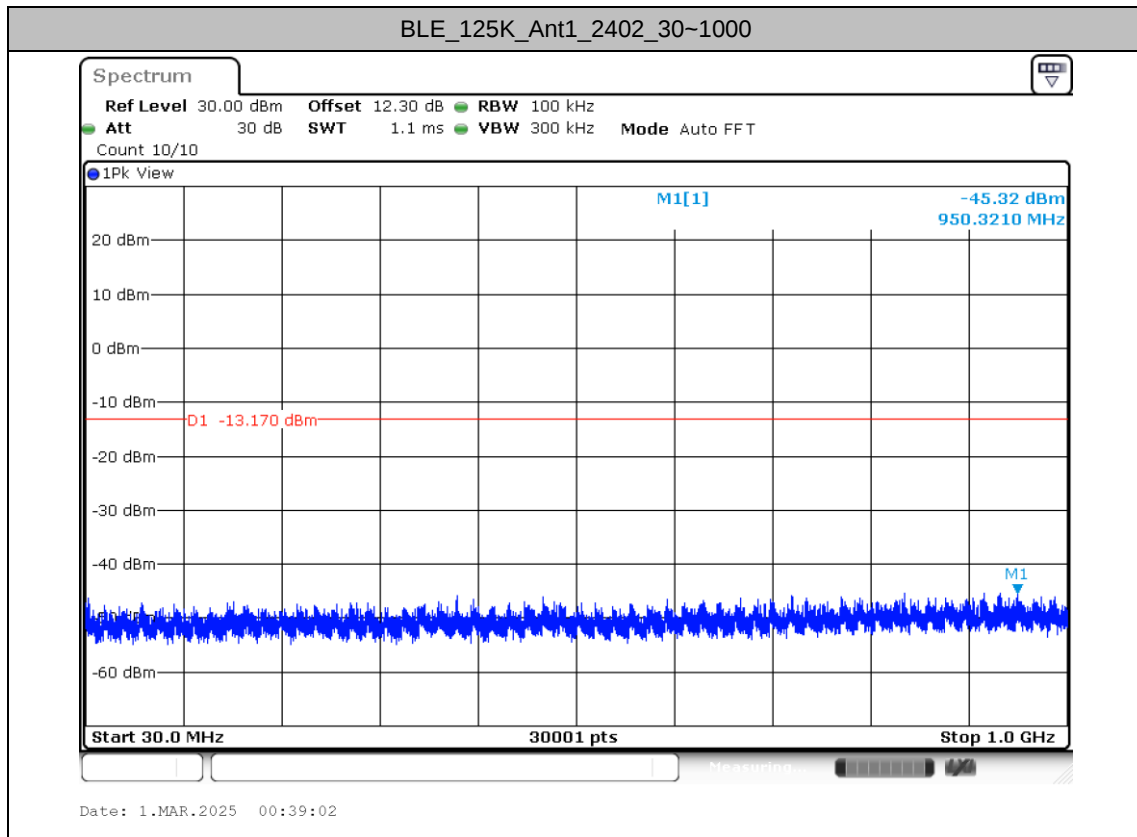


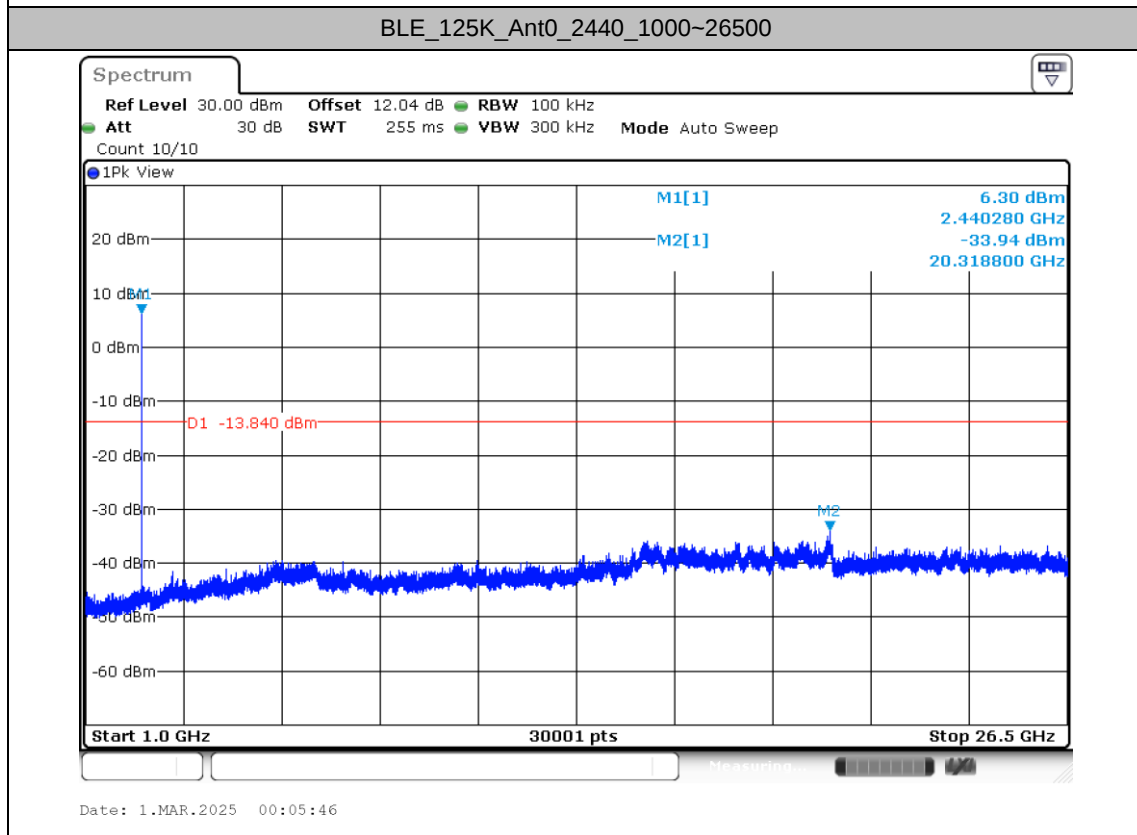

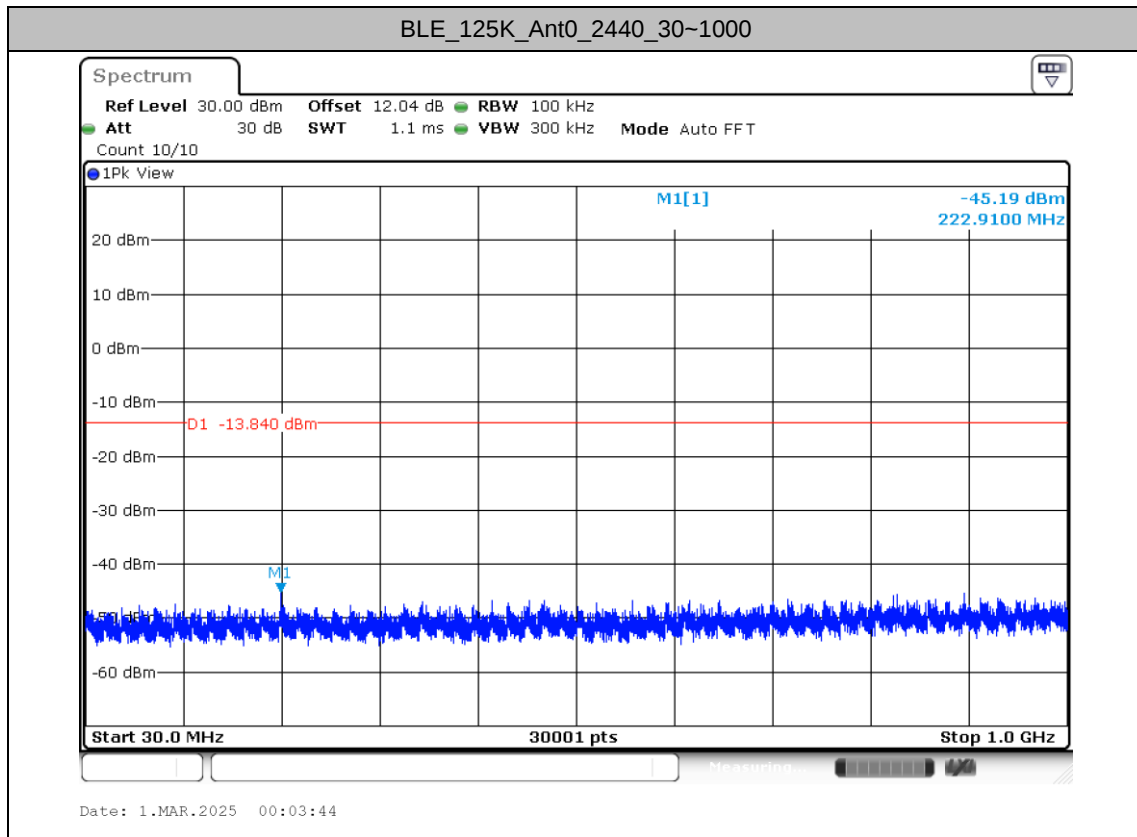

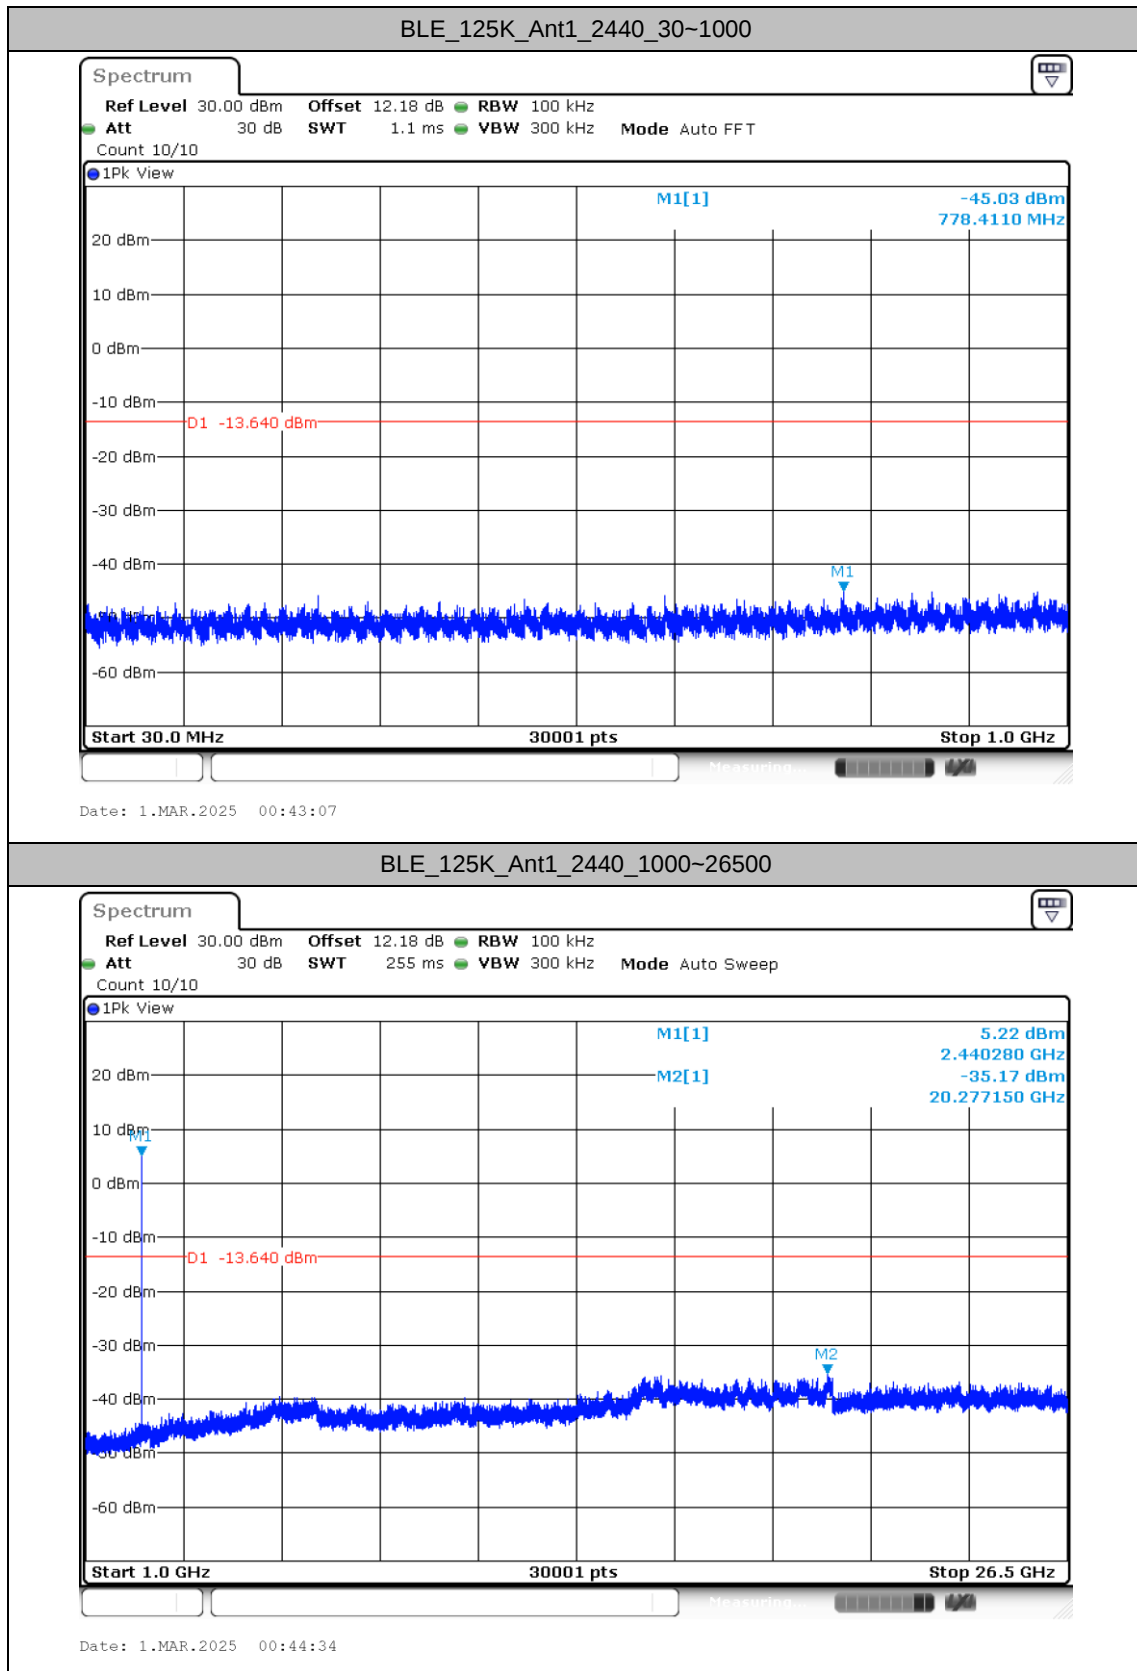


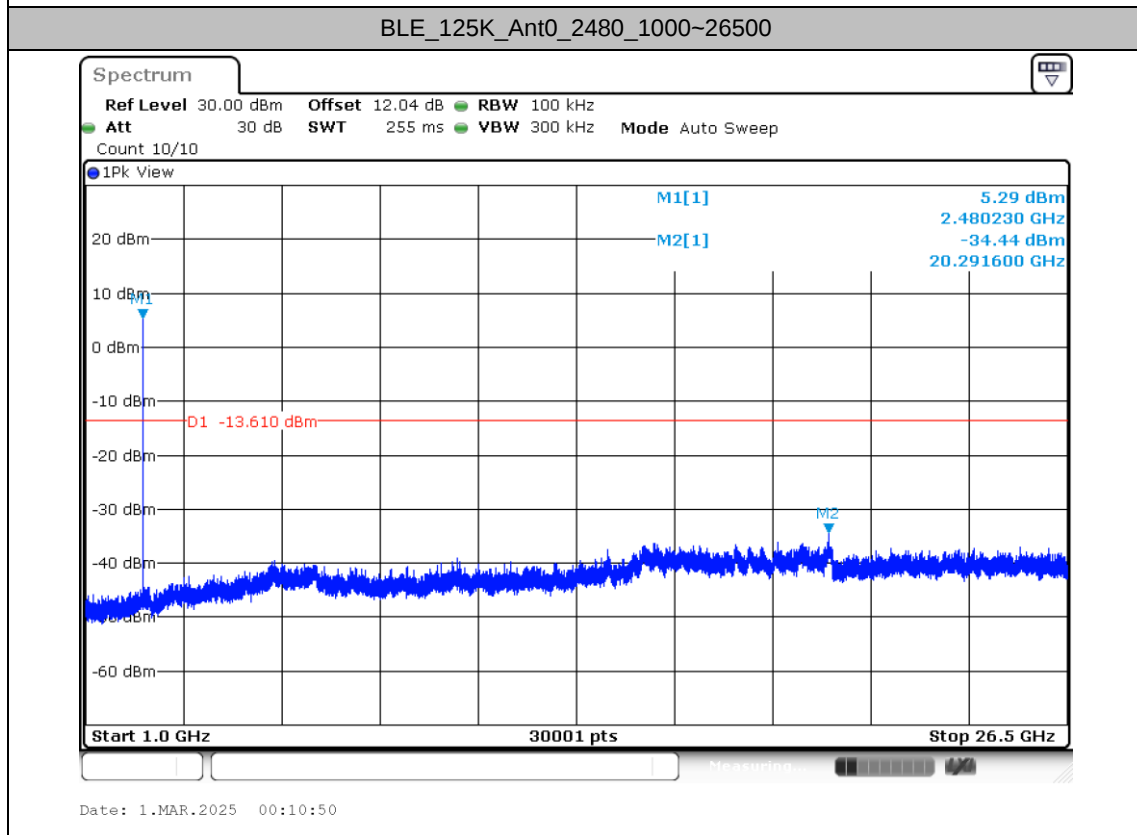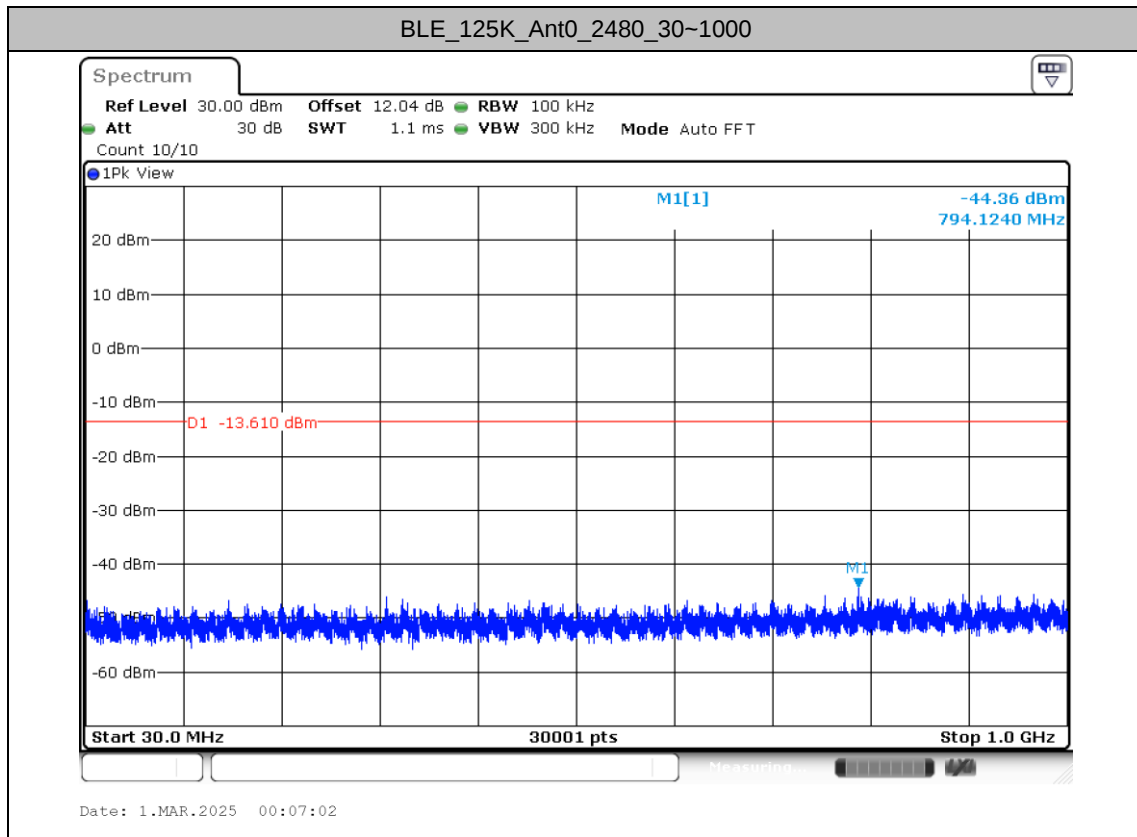

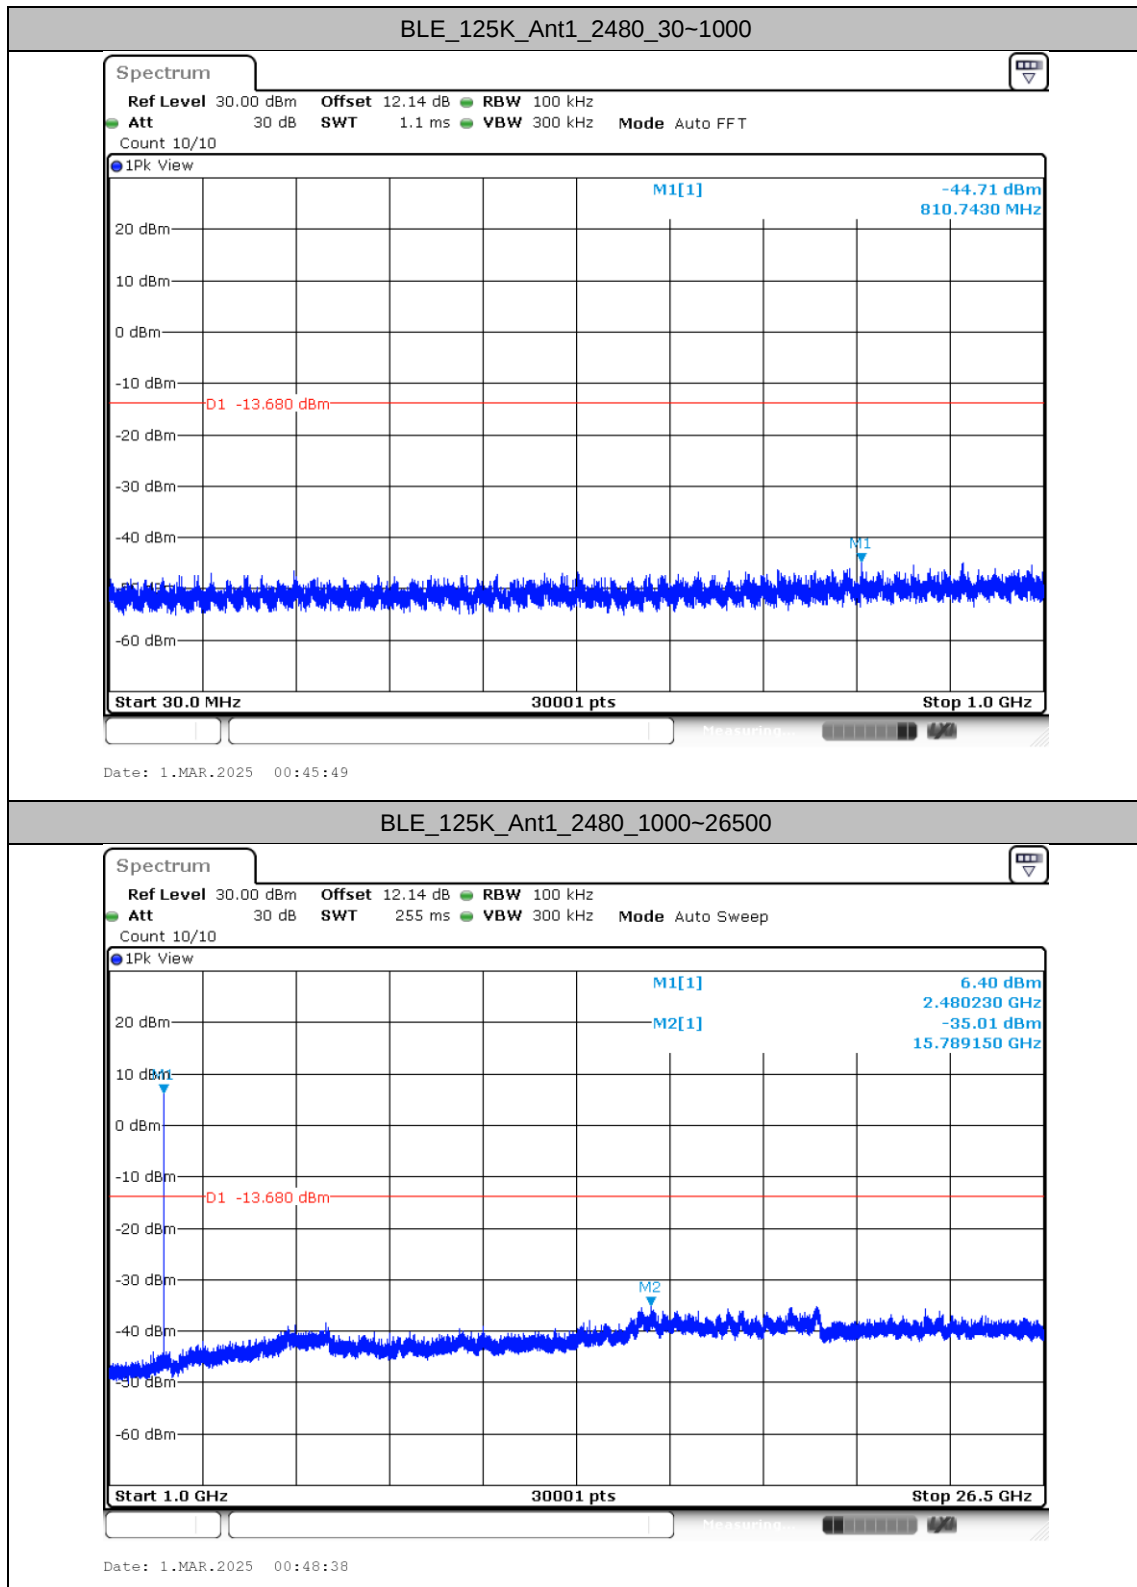




Appendix B. AC Conducted Emission Test Results

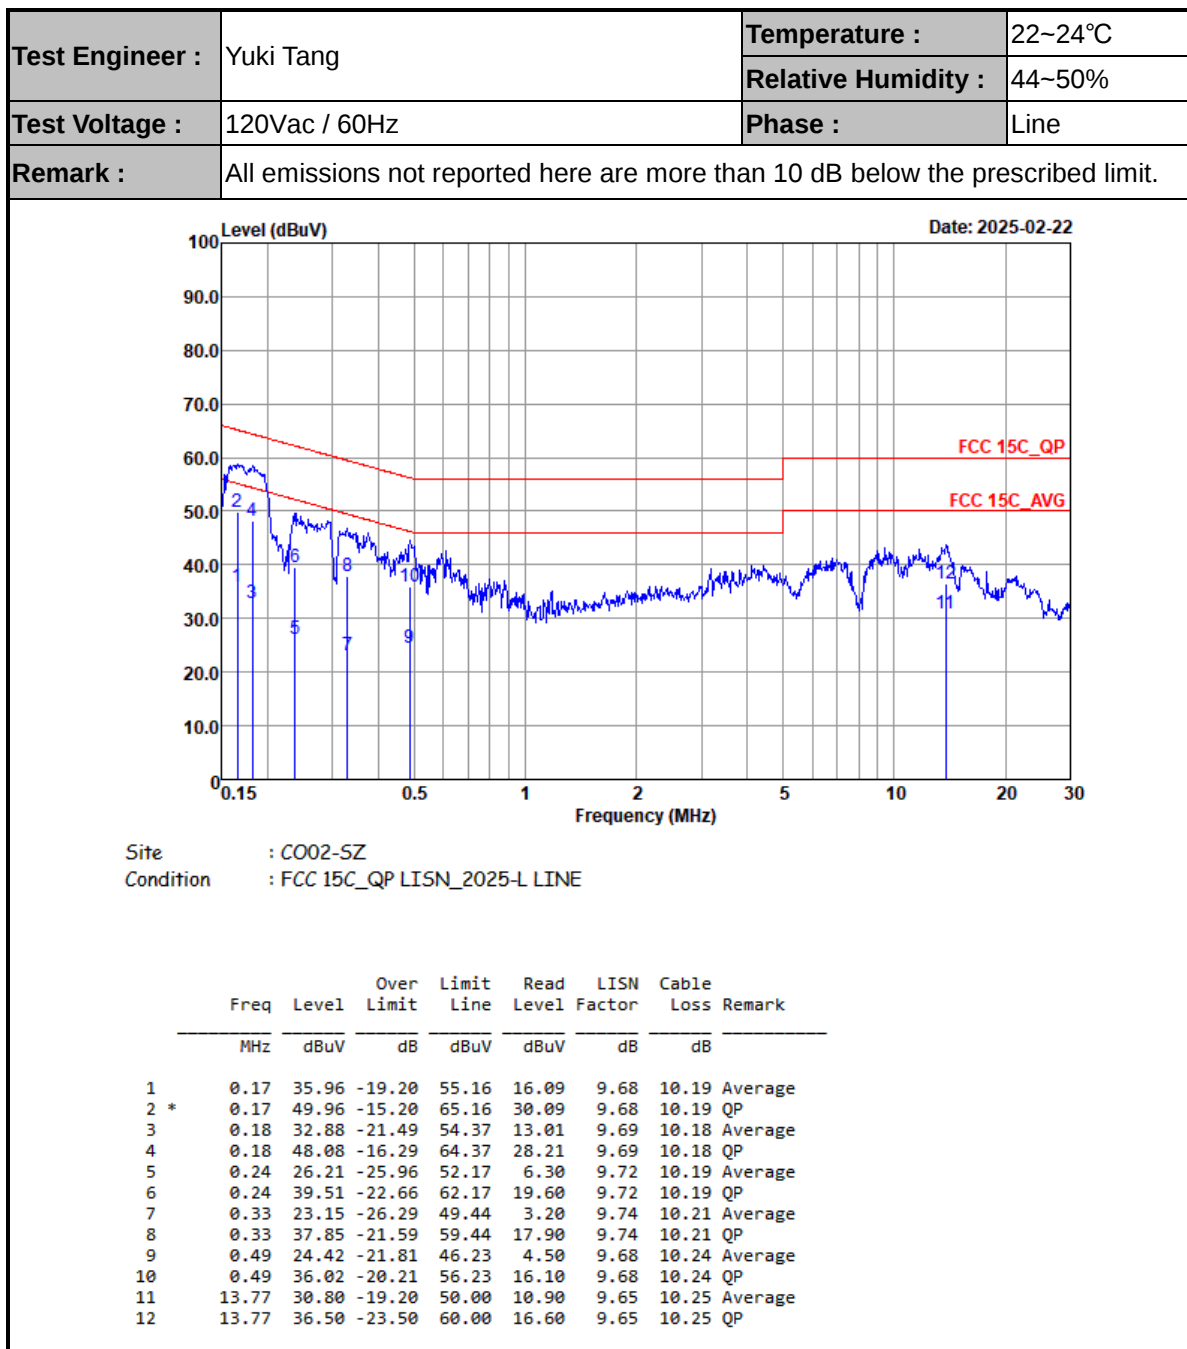



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

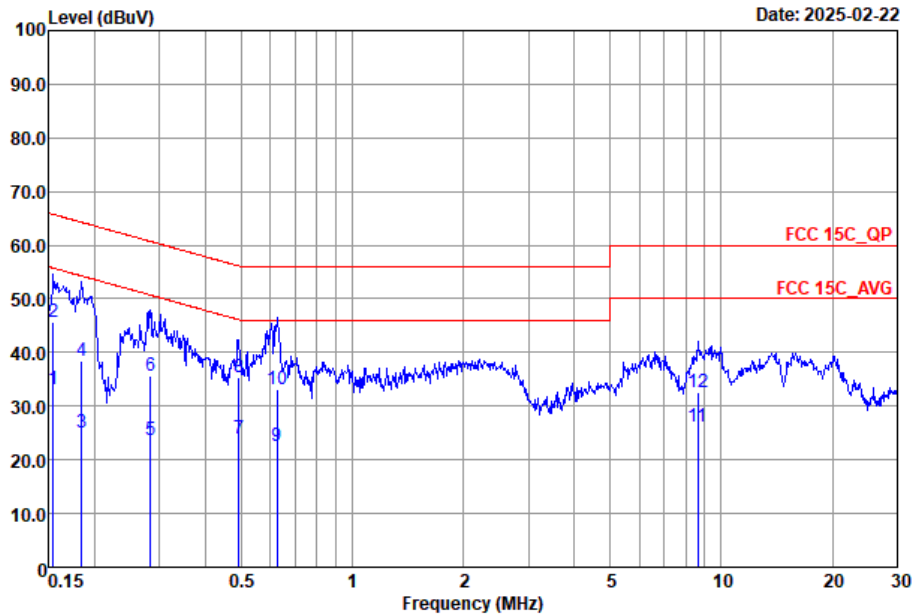

Site : C002-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	33.09	-22.65	55.74	13.30	9.60	10.19	Average
2 *	0.15	45.59	-20.15	65.74	25.80	9.60	10.19	QP
3	0.18	25.19	-29.09	54.28	5.20	9.81	10.18	Average
4	0.18	38.49	-25.79	64.28	18.50	9.81	10.18	QP
5	0.28	23.58	-27.14	50.72	3.60	9.78	10.20	Average
6	0.28	35.78	-24.94	60.72	15.80	9.78	10.20	QP
7	0.49	24.00	-22.14	46.14	3.70	10.06	10.24	Average
8	0.49	35.40	-20.74	56.14	15.10	10.06	10.24	QP
9	0.62	22.50	-23.50	46.00	2.60	9.66	10.24	Average
10	0.62	33.20	-22.80	56.00	13.30	9.66	10.24	QP
11	8.64	26.18	-23.82	50.00	6.30	9.68	10.20	Average
12	8.64	32.68	-27.32	60.00	12.80	9.68	10.20	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	ZhangXu	Relative Humidity :	48~49%
		Temperature :	24℃-25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	0	Bluetooth-LE	00	2402	125kbps	-	-
Mode 2	2400-2483.5	0	Bluetooth-LE	19	2440	125kbps	-	-
Mode 3	2400-2483.5	0	Bluetooth-LE	39	2480	125kbps	-	-
Mode 4	2400-2483.5	0	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	0	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE	00	2402	125kbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE	19	2440	125kbps	-	-
Mode 8	2400-2483.5	1	Bluetooth-LE	39	2480	125kbps	-	-
Mode 9	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 10	2400-2483.5	1	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 11	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2360.30	32.95	54.00	-21.05	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	44.07	74.00	-29.93	V	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	7320.00	44.51	74.00	-29.49	H	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2486.12	33.46	54.00	-20.54	V	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	7440.00	44.22	74.00	-29.78	V	Peak	Pass	Harmonic
4	Bluetooth-LE	00	2331.53	35.39	54.00	-18.61	V	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	00	4804.00	46.11	74.00	-27.89	V	Peak	Pass	Harmonic
5	Bluetooth-LE	39	2483.56	37.47	54.00	-16.53	V	AVERAGE	Pass	Band Edge
5	Bluetooth-LE	39	-	-	-	-	-	-	-	Harmonic
6	Bluetooth-LE	00	2389.91	37.25	54.00	-16.75	V	AVERAGE	Pass	Band Edge
6	Bluetooth-LE	00	4804.00	44.22	74.00	-29.78	V	Peak	Pass	Harmonic
7	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
7	Bluetooth-LE	19	7320.00	44.19	74.00	-29.81	H	Peak	Pass	Harmonic
8	Bluetooth-LE	39	2483.56	33.94	54.00	-20.06	V	AVERAGE	Pass	Band Edge
8	Bluetooth-LE	39	7440.00	44.84	74.00	-29.16	H	Peak	Pass	Harmonic
9	Bluetooth-LE	00	2389.80	40.84	54.00	-13.16	H	AVERAGE	Pass	Band Edge
9	Bluetooth-LE	00	4804.00	44.00	74.00	-30.00	H	Peak	Pass	Harmonic
10	Bluetooth-LE	39	2489.82	36.09	54.00	-17.91	H	AVERAGE	Pass	Band Edge
10	Bluetooth-LE	39	-	-	-	-	-	-	-	Harmonic
11	Bluetooth-LE	00	30.00	29.49	40.00	-10.51	V	Peak	Pass	LF



		1																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT		0																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) Site : 03CH04-SZ Condition: PEAK_BE_74_3m HF_3117_ANT_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2364.60</td><td>44.23</td><td>74.00</td><td>-29.77</td><td>42.27</td><td>30.77</td><td>5.34</td><td>34.15</td><td>100</td><td>320 PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2364.60	44.23	74.00	-29.77	42.27	30.77	5.34	34.15	100	320 PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) Site : 03CH04-SZ Condition: PEAK_74_3m HF_3117_ANT_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>71.91</td><td>-----</td><td>69.90</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>320</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2402.00	71.91	-----	69.90	30.78	5.37	34.14	100	320	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 2364.60	44.23	74.00	-29.77	42.27	30.77	5.34	34.15	100	320 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 2402.00	71.91	-----	69.90	30.78	5.37	34.14	100	320	PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) Site : 03CH04-SZ Condition: AVG_BE_54_3m HF_3117_ANT_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2363.13</td><td>32.92</td><td>54.00</td><td>-21.08</td><td>30.96</td><td>30.77</td><td>5.34</td><td>34.15</td><td>100</td><td>320 AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2363.13	32.92	54.00	-21.08	30.96	30.77	5.34	34.15	100	320 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) Site : 03CH04-SZ Condition: AVG_54_3m HF_3117_ANT_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>70.66</td><td>-----</td><td>68.65</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>320</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2402.00	70.66	-----	68.65	30.78	5.37	34.14	100	320	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 2363.13	32.92	54.00	-21.08	30.96	30.77	5.34	34.15	100	320 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor			Remark																																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 2402.00	70.66	-----	68.65	30.78	5.37	34.14	100	320	AVERAGE																																																																																		



		1																																																																											
Mode	Band Edge																																																																												
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																												
ANT	0																																																																												
Pol.	Vertical										Fundamental																																																																		
Peak	Level (dBuV/m) Date: 2025-03-03 Site : 03CH04-SZ Condition: PEAK_BE_74_3m HF_3117_ANT_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2347.17</td><td>43.31</td><td>74.00</td><td>-30.69</td><td>41.38</td><td>30.77</td><td>5.32</td><td>34.16</td><td>298</td><td>360 PEAK</td></tr></table>										Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2347.17	43.31	74.00	-30.69	41.38	30.77	5.32	34.16	298	360 PEAK	Level (dBuV/m) Date: 2025-03-03 Site : 03CH04-SZ Condition: PEAK_74_3m HF_3117_ANT_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>90.34</td><td>-----</td><td>88.33</td><td>30.78</td><td>5.37</td><td>34.14</td><td>298</td><td>360</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	90.34	-----	88.33	30.78	5.37	34.14	298	360	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2347.17	43.31	74.00	-30.69	41.38	30.77	5.32	34.16	298	360 PEAK																																																																			
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2402.00	90.34	-----	88.33	30.78	5.37	34.14	298	360	PEAK																																																																			
Avg	Level (dBuV/m) Date: 2025-03-03 Site : 03CH04-SZ Condition: AVG_BE_54_3m HF_3117_ANT_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2360.30</td><td>32.95</td><td>54.00</td><td>-21.05</td><td>31.01</td><td>30.77</td><td>5.33</td><td>34.16</td><td>298</td><td>360 AVERAGE</td></tr></table>										Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2360.30	32.95	54.00	-21.05	31.01	30.77	5.33	34.16	298	360 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Site : 03CH04-SZ Condition: AVG_54_3m HF_3117_ANT_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : Plane : X with Accessories : H621521000015ECA0017 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>89.18</td><td>-----</td><td>87.17</td><td>30.78</td><td>5.37</td><td>34.14</td><td>298</td><td>360</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	89.18	-----	87.17	30.78	5.37	34.14	298	360	AVERAGE
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2360.30	32.95	54.00	-21.05	31.01	30.77	5.33	34.16	298	360 AVERAGE																																																																			
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2402.00	89.18	-----	87.17	30.78	5.37	34.14	298	360	AVERAGE																																																																			



Mode	1																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	0																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.07</td><td>74.00</td><td>-30.93</td><td>62.58</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.07	74.00	-30.93	62.58	36.39	8.94	64.84	---	---	Peak	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.07</td><td>74.00</td><td>-29.93</td><td>63.58</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	44.07	74.00	-29.93	63.58	36.39	8.94	64.84	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	43.07	74.00	-30.93	62.58	36.39	8.94	64.84	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	44.07	74.00	-29.93	63.58	36.39	8.94	64.84	---	---	Peak																																																																																	







Mode	2																																																													
	Harmonic																																																													
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																													
ANT	0																																																													
Pol.	Horizontal						Vertical																																																							
Peak Avg	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz)						Level (dBuV/m) Date: 2025-03-04 Frequency (MHz)																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>63.12</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>62.45</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	43.52	74.00	-30.48	63.12	36.51	8.71	64.82	---	---	Peak	2	7320.00	44.51	74.00	-29.49	62.45	36.88	10.18	65.00	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																					
1	4880.00	43.52	74.00	-30.48	63.12	36.51	8.71	64.82	---	---	Peak																																																			
2	7320.00	44.51	74.00	-29.49	62.45	36.88	10.18	65.00	---	---	Peak																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>41.98</td><td>74.00</td><td>-32.02</td><td>61.58</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>61.87</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	41.98	74.00	-32.02	61.58	36.51	8.71	64.82	---	---	Peak	2	7320.00	43.93	74.00	-30.07	61.87	36.88	10.18	65.00	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																					
1	4880.00	41.98	74.00	-32.02	61.58	36.51	8.71	64.82	---	---	Peak																																																			
2	7320.00	43.93	74.00	-30.07	61.87	36.88	10.18	65.00	---	---	Peak																																																			





Mode	3																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																											
ANT	0																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.28</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>42.09</td><td>30.80</td><td>5.47</td><td>34.10</td><td>100</td><td>275</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2490.28	44.26	74.00	-29.74	42.09	30.80	5.47	34.10	100	275	PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>74.19</td><td>74.00</td><td>0.19</td><td>72.04</td><td>30.80</td><td>5.46</td><td>34.11</td><td>100</td><td>275</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	74.19	74.00	0.19	72.04	30.80	5.46	34.11	100	275	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2490.28	44.26	74.00	-29.74	42.09	30.80	5.47	34.10	100	275	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2480.00	74.19	74.00	0.19	72.04	30.80	5.46	34.11	100	275	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.22</td><td>33.41</td><td>54.00</td><td>-20.59</td><td>31.24</td><td>30.80</td><td>5.47</td><td>34.10</td><td>100</td><td>275</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2489.22	33.41	54.00	-20.59	31.24	30.80	5.47	34.10	100	275	AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>72.90</td><td>54.00</td><td>18.90</td><td>70.75</td><td>30.80</td><td>5.46</td><td>34.11</td><td>100</td><td>275</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	72.90	54.00	18.90	70.75	30.80	5.46	34.11	100	275	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2489.22	33.41	54.00	-20.59	31.24	30.80	5.47	34.10	100	275	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2480.00	72.90	54.00	18.90	70.75	30.80	5.46	34.11	100	275	AVERAGE																																																																																	

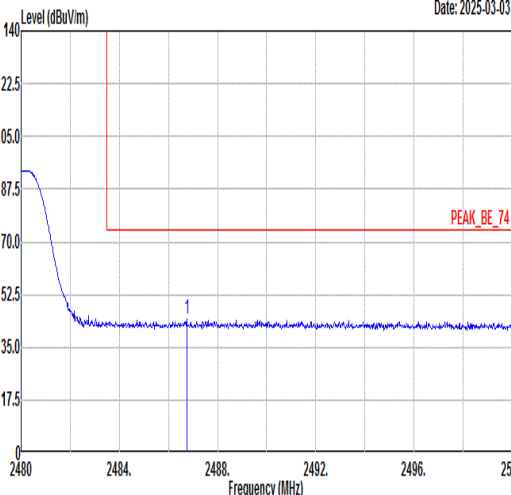
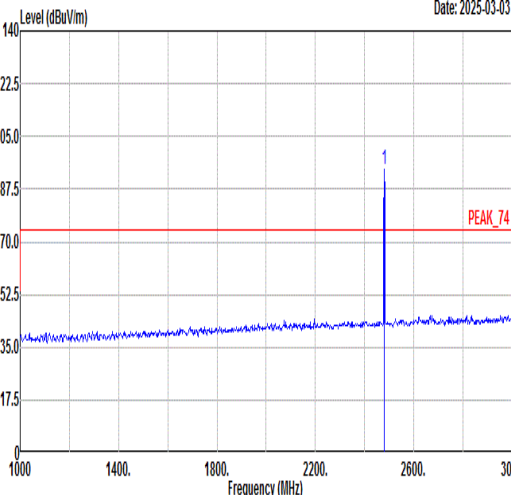
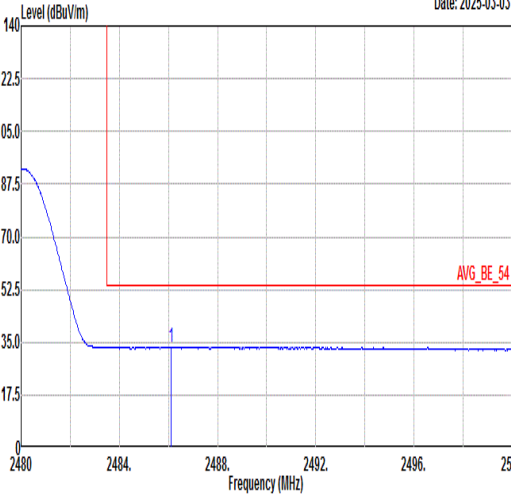
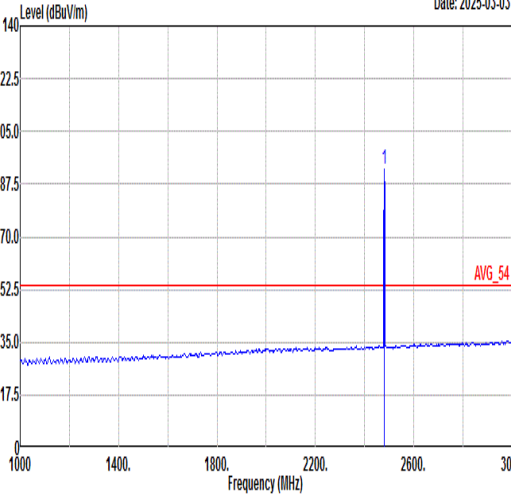


Mode	3																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																											
ANT	0																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.74</td><td>44.58</td><td>74.00</td><td>-29.42</td><td>42.43</td><td>30.80</td><td>5.46</td><td>34.11</td><td>300</td><td>325</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.74	44.58	74.00	-29.42	42.43	30.80	5.46	34.11	300	325	PEAK	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>93.85</td><td>-----</td><td>-----</td><td>91.70</td><td>30.80</td><td>5.46</td><td>34.11</td><td>300</td><td>325</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	93.85	-----	-----	91.70	30.80	5.46	34.11	300	325	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2486.74	44.58	74.00	-29.42	42.43	30.80	5.46	34.11	300	325	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2480.00	93.85	-----	-----	91.70	30.80	5.46	34.11	300	325	PEAK																																																																																	
Avg	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.12</td><td>33.46</td><td>54.00</td><td>-20.54</td><td>31.31</td><td>30.80</td><td>5.46</td><td>34.11</td><td>300</td><td>325</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.12	33.46	54.00	-20.54	31.31	30.80	5.46	34.11	300	325	AVERAGE	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>92.65</td><td>-----</td><td>-----</td><td>90.50</td><td>30.80</td><td>5.46</td><td>34.11</td><td>300</td><td>325</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	92.65	-----	-----	90.50	30.80	5.46	34.11	300	325	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2486.12	33.46	54.00	-20.54	31.31	30.80	5.46	34.11	300	325	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2480.00	92.65	-----	-----	90.50	30.80	5.46	34.11	300	325	AVERAGE																																																																																	



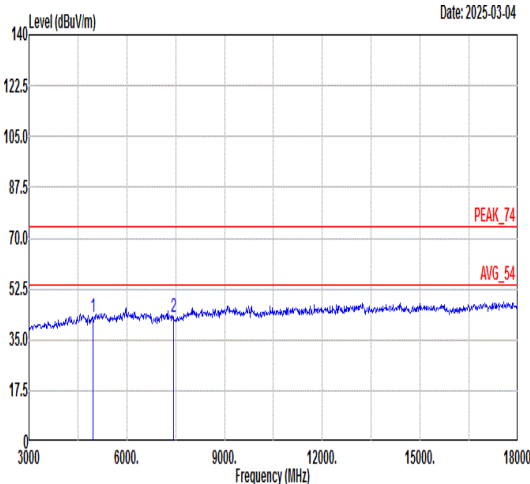
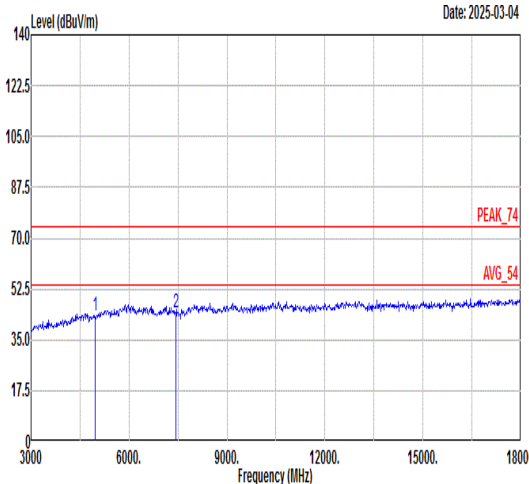


Mode	3																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>42.61</td><td>74.00</td><td>-31.39</td><td>62.32</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>42.64</td><td>74.00</td><td>-31.36</td><td>60.68</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4960.00	42.61	74.00	-31.39	62.32	36.64	8.46	64.81	---	---	Peak	2	7440.00	42.64	74.00	-31.36	60.68	36.76	10.17	64.97	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>43.51</td><td>74.00</td><td>-30.49</td><td>63.22</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.22</td><td>74.00</td><td>-29.78</td><td>62.26</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4960.00	43.51	74.00	-30.49	63.22	36.64	8.46	64.81	---	---	Peak	2	7440.00	44.22	74.00	-29.78	62.26	36.76	10.17	64.97	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	4960.00	42.61	74.00	-31.39	62.32	36.64	8.46	64.81	---	---	Peak																																																																																																					
2	7440.00	42.64	74.00	-31.36	60.68	36.76	10.17	64.97	---	---	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	4960.00	43.51	74.00	-30.49	63.22	36.64	8.46	64.81	---	---	Peak																																																																																																					
2	7440.00	44.22	74.00	-29.78	62.26	36.76	10.17	64.97	---	---	Peak																																																																																																					

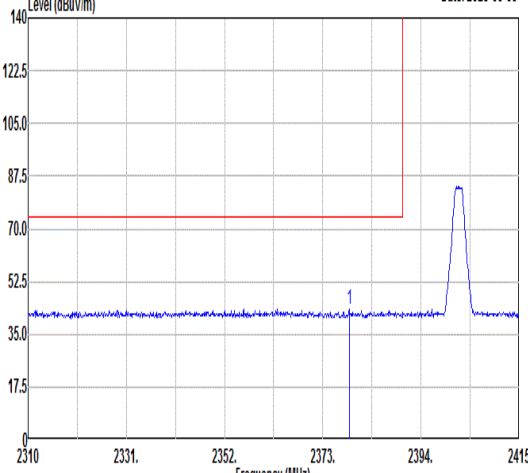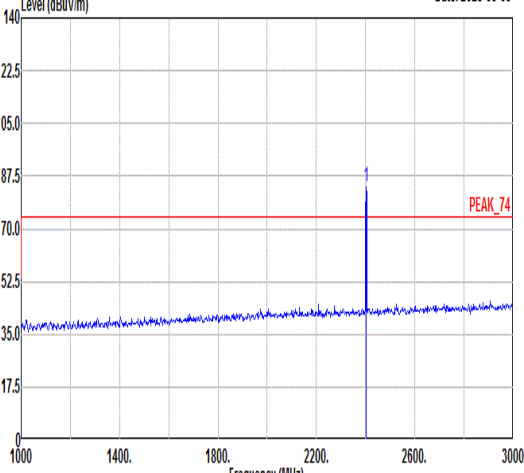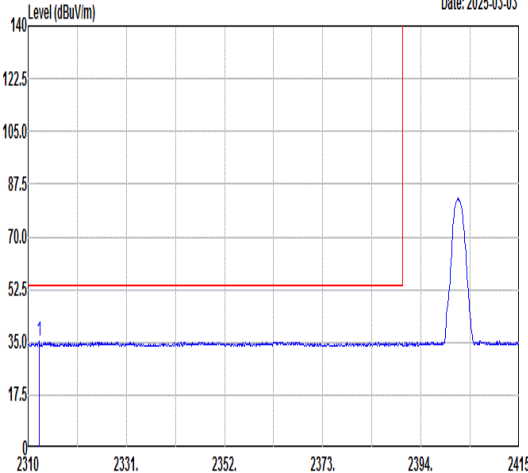
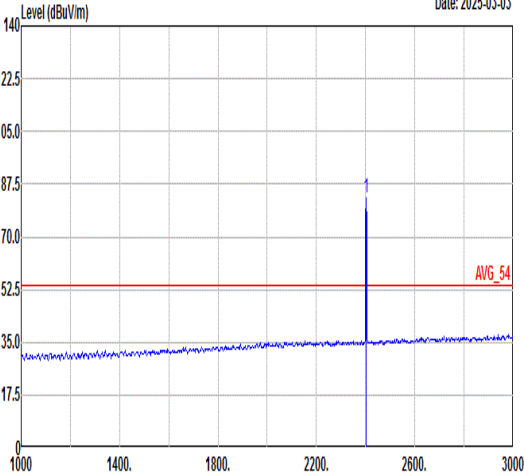


Mode	4																																																																														
	Band Edge																																																																														
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																														
ANT	0																																																																														
Pol.	Horizontal					Fundamental																																																																									
Peak	Level (dBuV/m) Date: 2025-03-03 					Level (dBuV/m) Date: 2025-03-03 																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2378.67</td><td>43.28</td><td>74.00</td><td>-30.72</td><td>41.30</td><td>30.78</td><td>5.35</td><td>34.15</td><td>200</td><td>259 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2378.67	43.28	74.00	-30.72	41.30	30.78	5.35	34.15	200	259 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>84.09</td><td>-----</td><td>-----</td><td>82.08</td><td>30.78</td><td>5.37</td><td>34.14</td><td>200</td><td>259 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	84.09	-----	-----	82.08	30.78	5.37	34.14	200
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	2378.67	43.28	74.00	-30.72	41.30	30.78	5.35	34.15	200	259 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	2402.00	84.09	-----	-----	82.08	30.78	5.37	34.14	200	259 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2025-03-03 					Level (dBuV/m) Date: 2025-03-03 																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2312.31</td><td>35.14</td><td>54.00</td><td>-18.86</td><td>33.27</td><td>30.76</td><td>5.29</td><td>34.18</td><td>200</td><td>259 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2312.31	35.14	54.00	-18.86	33.27	30.76	5.29	34.18	200	259 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>82.69</td><td>-----</td><td>-----</td><td>80.68</td><td>30.78</td><td>5.37</td><td>34.14</td><td>200</td><td>259 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	82.69	-----	-----	80.68	30.78	5.37	34.14	200
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	2312.31	35.14	54.00	-18.86	33.27	30.76	5.29	34.18	200	259 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	2402.00	82.69	-----	-----	80.68	30.78	5.37	34.14	200	259 AVERAGE																																																																					

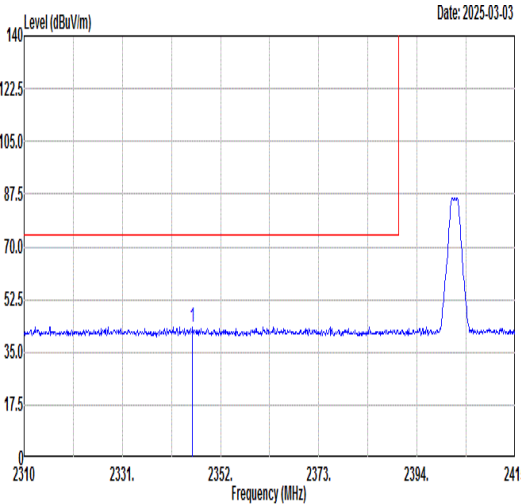
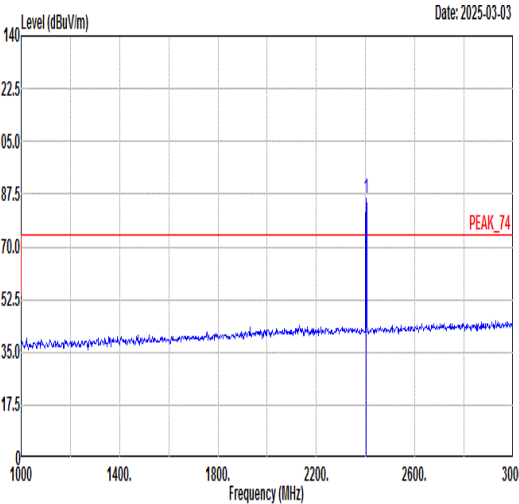
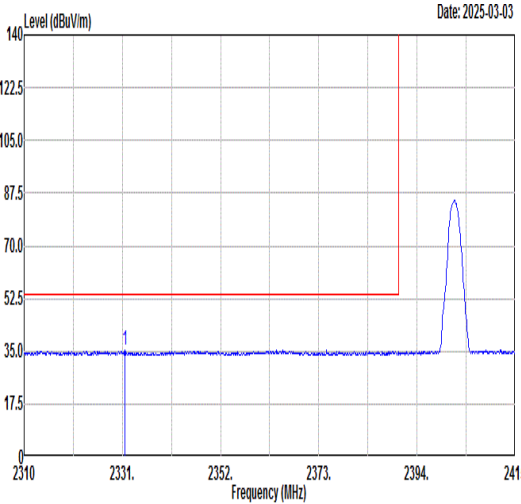
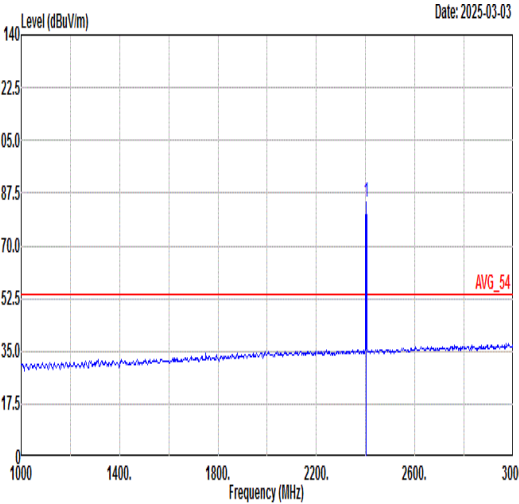


Mode	4																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																							
ANT	0																																																																																							
Pol.	Vertical					Fundamental																																																																																		
Peak	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2346.02</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>41.52</td><td>30.77</td><td>5.32</td><td>34.16</td><td>100</td><td>351 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2346.02	43.45	74.00	-30.55	41.52	30.77	5.32	34.16	100	351 PEAK	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>86.31</td><td>-----</td><td>-----</td><td>84.30</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>351 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	86.31	-----	-----	84.30	30.78	5.37	34.14	100	351 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2346.02	43.45	74.00	-30.55	41.52	30.77	5.32	34.16	100	351 PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2402.00	86.31	-----	-----	84.30	30.78	5.37	34.14	100	351 PEAK																																																																														
Avg	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2331.53</td><td>35.39</td><td>54.00</td><td>-18.61</td><td>33.48</td><td>30.77</td><td>5.31</td><td>34.17</td><td>100</td><td>351 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2331.53	35.39	54.00	-18.61	33.48	30.77	5.31	34.17	100	351 AVERAGE	 Date: 2025-03-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>84.43</td><td>-----</td><td>-----</td><td>82.42</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>351 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	84.43	-----	-----	82.42	30.78	5.37	34.14	100	351 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2331.53	35.39	54.00	-18.61	33.48	30.77	5.31	34.17	100	351 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2402.00	84.43	-----	-----	82.42	30.78	5.37	34.14	100	351 AVERAGE																																																																														

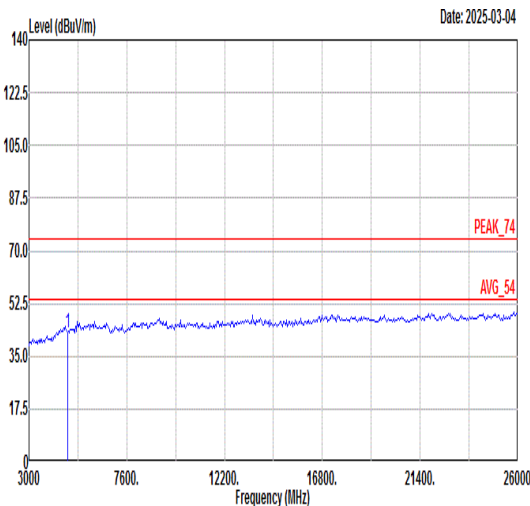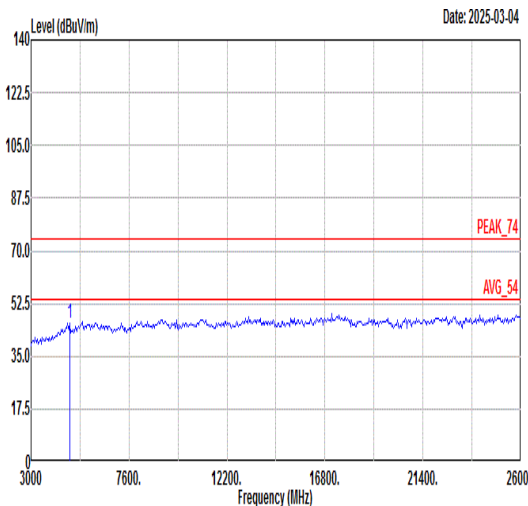

Mode	4																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	0																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.59</td><td>74.00</td><td>-31.41</td><td>62.10</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	42.59	74.00	-31.41	62.10	36.39	8.94	64.84	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>46.11</td><td>74.00</td><td>-27.89</td><td>65.62</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	46.11	74.00	-27.89	65.62	36.39	8.94	64.84	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	42.59	74.00	-31.41	62.10	36.39	8.94	64.84	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	46.11	74.00	-27.89	65.62	36.39	8.94	64.84	---	---	Peak																																																																																	

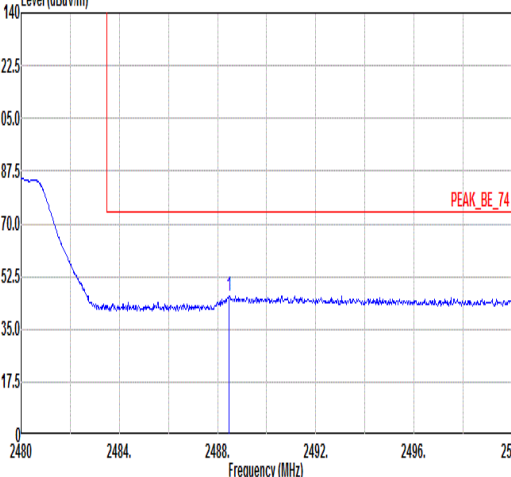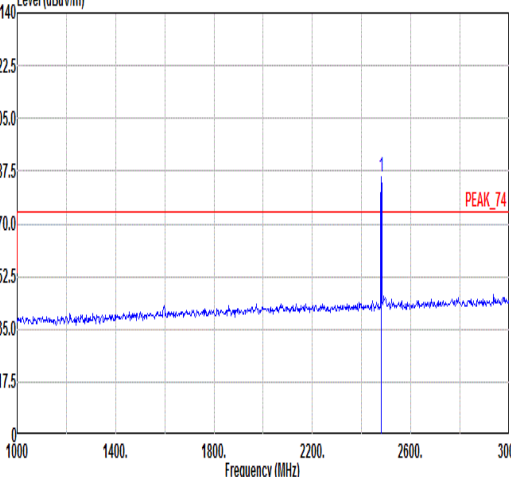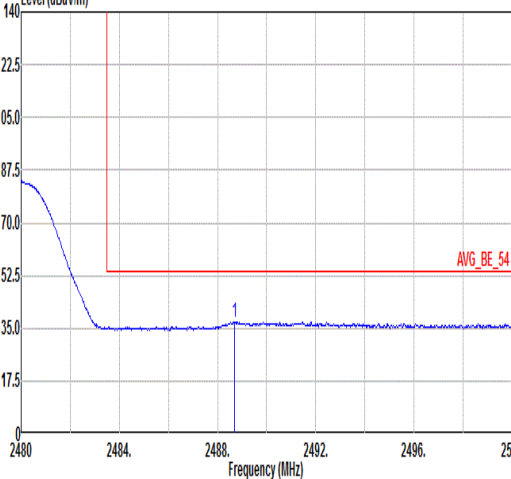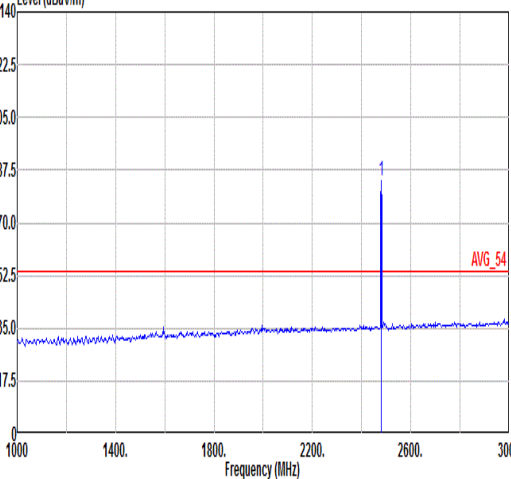

Mode	5																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	0																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-03-05  PEAK_BE_74 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2488.46</td><td>46.14</td><td>74.00</td><td>-27.86</td><td>43.97</td><td>30.80</td><td>5.47</td><td>34.10</td><td>212 200 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2488.46	46.14	74.00	-27.86	43.97	30.80	5.47	34.10	212 200 PEAK	Level (dBuV/m) Date: 2025-03-05  PEAK_74 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>85.41</td><td>-----</td><td>-----</td><td>83.26</td><td>30.80</td><td>5.46</td><td>34.11</td><td>212 200 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	85.41	-----	-----	83.26	30.80	5.46	34.11	212 200 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 2488.46	46.14	74.00	-27.86	43.97	30.80	5.47	34.10	212 200 PEAK																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 2480.00	85.41	-----	-----	83.26	30.80	5.46	34.11	212 200 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-03-05  AVG_BE_54 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2488.70</td><td>37.05</td><td>54.00</td><td>-16.95</td><td>34.88</td><td>30.80</td><td>5.47</td><td>34.10</td><td>212 200 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2488.70	37.05	54.00	-16.95	34.88	30.80	5.47	34.10	212 200 AVERAGE	Level (dBuV/m) Date: 2025-03-05  AVG_54 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>83.89</td><td>-----</td><td>-----</td><td>81.74</td><td>30.80</td><td>5.46</td><td>34.11</td><td>212 200 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	83.89	-----	-----	81.74	30.80	5.46	34.11	212 200 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 2488.70	37.05	54.00	-16.95	34.88	30.80	5.47	34.10	212 200 AVERAGE																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1 2480.00	83.89	-----	-----	81.74	30.80	5.46	34.11	212 200 AVERAGE																																																																										



Mode	5																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																			
ANT	0																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>46.27</td><td>74.00</td><td>-27.73</td><td>44.12</td><td>30.80</td><td>5.46</td><td>34.11</td><td>352</td><td>289 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	46.27	74.00	-27.73	44.12	30.80	5.46	34.11	352	289 PEAK	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.52</td><td>-----</td><td>-----</td><td>95.37</td><td>30.80</td><td>5.46</td><td>34.11</td><td>352</td><td>289 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.52	-----	-----	95.37	30.80	5.46	34.11	352	289 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.52	46.27	74.00	-27.73	44.12	30.80	5.46	34.11	352	289 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	97.52	-----	-----	95.37	30.80	5.46	34.11	352	289 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>37.47</td><td>54.00</td><td>-16.53</td><td>35.32</td><td>30.80</td><td>5.46</td><td>34.11</td><td>352</td><td>289 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	37.47	54.00	-16.53	35.32	30.80	5.46	34.11	352	289 AVERAGE	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.85</td><td>-----</td><td>-----</td><td>93.70</td><td>30.80</td><td>5.46</td><td>34.11</td><td>352</td><td>289 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.85	-----	-----	93.70	30.80	5.46	34.11	352	289 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.56	37.47	54.00	-16.53	35.32	30.80	5.46	34.11	352	289 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	95.85	-----	-----	93.70	30.80	5.46	34.11	352	289 AVERAGE																																																																										



Mode	6																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.80</td><td>44.93</td><td>74.00</td><td>-29.07</td><td>42.93</td><td>30.78</td><td>5.36</td><td>34.14</td><td>296</td><td>49 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.80	44.93	74.00	-29.07	42.93	30.78	5.36	34.14	296	49 PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>88.70</td><td>-----</td><td>-----</td><td>86.69</td><td>30.78</td><td>5.37</td><td>34.14</td><td>296</td><td>49 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	88.70	-----	-----	86.69	30.78	5.37	34.14	296	49 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.80	44.93	74.00	-29.07	42.93	30.78	5.36	34.14	296	49 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	88.70	-----	-----	86.69	30.78	5.37	34.14	296	49 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.70</td><td>33.30</td><td>54.00</td><td>-20.70</td><td>31.30</td><td>30.78</td><td>5.36</td><td>34.14</td><td>296</td><td>49 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.70	33.30	54.00	-20.70	31.30	30.78	5.36	34.14	296	49 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>87.50</td><td>-----</td><td>-----</td><td>85.49</td><td>30.78</td><td>5.37</td><td>34.14</td><td>296</td><td>49 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.50	-----	-----	85.49	30.78	5.37	34.14	296	49 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.70	33.30	54.00	-20.70	31.30	30.78	5.36	34.14	296	49 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	87.50	-----	-----	85.49	30.78	5.37	34.14	296	49 AVERAGE																																																																																		





Mode	6																																									
	Band Edge																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-03-03 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.70</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>47.53</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>167 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.70	49.53	74.00	-24.47	47.53	30.78	5.36	34.14	100	167 PEAK	Level (dBuV/m) Date: 2025-03-03 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2402.00</td><td>91.84</td><td>-----</td><td>-----</td><td>89.83</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>167 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2402.00	91.84	-----	-----	89.83	30.78	5.37	34.14	100	167 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2389.70	49.53	74.00	-24.47	47.53	30.78	5.36	34.14	100	167 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2402.00	91.84	-----	-----	89.83	30.78	5.37	34.14	100	167 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-03-03 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.91</td><td>37.25</td><td>54.00</td><td>-16.75</td><td>35.25</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>167 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.91	37.25	54.00	-16.75	35.25	30.78	5.36	34.14	100	167 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2402.00</td><td>90.70</td><td>-----</td><td>-----</td><td>88.69</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>167 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2402.00	90.70	-----	-----	88.69	30.78	5.37	34.14	100	167 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.91	37.25	54.00	-16.75	35.25	30.78	5.36	34.14	100	167 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2402.00	90.70	-----	-----	88.69	30.78	5.37	34.14	100	167 AVERAGE																																	



Mode	6																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE _CH00_2402MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>62.98</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.47	74.00	-30.53	62.98	36.39	8.94	64.84	---	---	Peak	Level (dBuV/m) Date: 2025-03-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.22</td><td>74.00</td><td>-29.78</td><td>63.73</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	44.22	74.00	-29.78	63.73	36.39	8.94	64.84	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	43.47	74.00	-30.53	62.98	36.39	8.94	64.84	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4804.00	44.22	74.00	-29.78	63.73	36.39	8.94	64.84	---	---	Peak																																																																																	

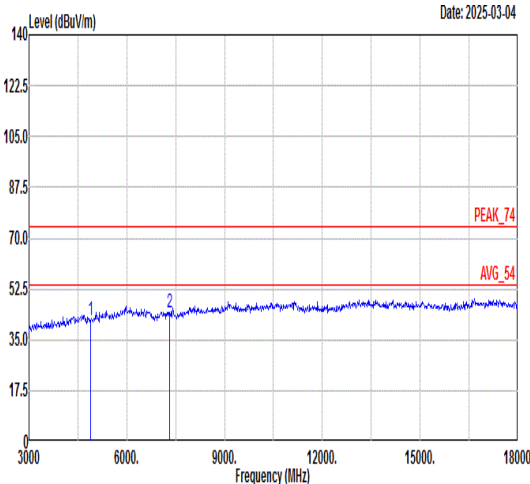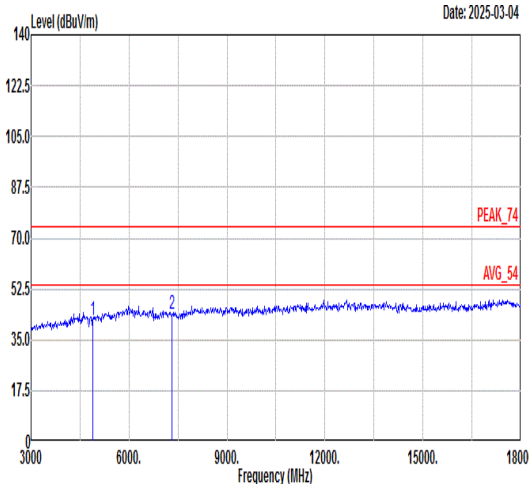

Mode	7																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>61.45</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.19</td><td>74.00</td><td>-29.81</td><td>62.13</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	41.85	74.00	-32.15	61.45	36.51	8.71	64.82	---	---	Peak	2	7320.00	44.19	74.00	-29.81	62.13	36.88	10.18	65.00	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.89</td><td>74.00</td><td>-32.11</td><td>61.49</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>43.92</td><td>74.00</td><td>-30.08</td><td>61.86</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	41.89	74.00	-32.11	61.49	36.51	8.71	64.82	---	---	Peak	2	7320.00	43.92	74.00	-30.08	61.86	36.88	10.18	65.00	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4880.00	41.85	74.00	-32.15	61.45	36.51	8.71	64.82	---	---	Peak																																																																																																																							
2	7320.00	44.19	74.00	-29.81	62.13	36.88	10.18	65.00	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4880.00	41.89	74.00	-32.11	61.49	36.51	8.71	64.82	---	---	Peak																																																																																																																							
2	7320.00	43.92	74.00	-30.08	61.86	36.88	10.18	65.00	---	---	Peak																																																																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>61.45</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.19</td><td>74.00</td><td>-29.81</td><td>62.13</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	41.85	74.00	-32.15	61.45	36.51	8.71	64.82	---	---	Peak	2	7320.00	44.19	74.00	-29.81	62.13	36.88	10.18	65.00	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.89</td><td>74.00</td><td>-32.11</td><td>61.49</td><td>36.51</td><td>8.71</td><td>64.82</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>43.92</td><td>74.00</td><td>-30.08</td><td>61.86</td><td>36.88</td><td>10.18</td><td>65.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	41.89	74.00	-32.11	61.49	36.51	8.71	64.82	---	---	Peak	2	7320.00	43.92	74.00	-30.08	61.86	36.88	10.18	65.00	---	---	Peak
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4880.00	41.85	74.00	-32.15	61.45	36.51	8.71	64.82	---	---	Peak																																																																																																																							
2	7320.00	44.19	74.00	-29.81	62.13	36.88	10.18	65.00	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4880.00	41.89	74.00	-32.11	61.49	36.51	8.71	64.82	---	---	Peak																																																																																																																							
2	7320.00	43.92	74.00	-30.08	61.86	36.88	10.18	65.00	---	---	Peak																																																																																																																							





Mode	8																																																	
	Band Edge																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																	
ANT	1																																																	
Pol.	Horizontal																																																	
Peak	Fundamental																																																	
	Level (dBuV/m) Date: 2025-03-03 PEAK_BE_74 Level (dBuV/m) Date: 2025-03-03 PEAK_74																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.94</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>42.16</td><td>30.80</td><td>5.47</td><td>34.10</td><td>287</td><td>27 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.94	44.33	74.00	-29.67	42.16	30.80	5.47	34.10	287	27 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	2488.94	44.33	74.00	-29.67	42.16	30.80	5.47	34.10	287	27 PEAK																																								
Avg	Level (dBuV/m) Date: 2025-03-03 AVG_BE_54 Level (dBuV/m) Date: 2025-03-03 AVG_54																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.24</td><td>33.50</td><td>54.00</td><td>-20.50</td><td>31.35</td><td>30.80</td><td>5.46</td><td>34.11</td><td>287</td><td>27 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.24	33.50	54.00	-20.50	31.35	30.80	5.46	34.11	287	27 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	2487.24	33.50	54.00	-20.50	31.35	30.80	5.46	34.11	287	27 AVERAGE																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>89.05</td><td>-----</td><td>-----</td><td>86.90</td><td>30.80</td><td>5.46</td><td>34.11</td><td>287</td><td>27 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	89.05	-----	-----	86.90	30.80	5.46	34.11	287	27 PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	2480.00	89.05	-----	-----	86.90	30.80	5.46	34.11	287	27 PEAK																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>87.86</td><td>-----</td><td>-----</td><td>85.71</td><td>30.80</td><td>5.46</td><td>34.11</td><td>287</td><td>27 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.86	-----	-----	85.71	30.80	5.46	34.11	287	27 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	2480.00	87.86	-----	-----	85.71	30.80	5.46	34.11	287	27 AVERAGE																																								



Mode	8																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.64</td><td>44.14</td><td>74.00</td><td>-29.86</td><td>41.97</td><td>30.80</td><td>5.47</td><td>34.10</td><td>336</td><td>320</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2496.64	44.14	74.00	-29.86	41.97	30.80	5.47	34.10	336	320	PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.71</td><td>-----</td><td>-----</td><td>93.56</td><td>30.80</td><td>5.46</td><td>34.11</td><td>336</td><td>320</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	95.71	-----	-----	93.56	30.80	5.46	34.11	336	320	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2496.64	44.14	74.00	-29.86	41.97	30.80	5.47	34.10	336	320	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2480.00	95.71	-----	-----	93.56	30.80	5.46	34.11	336	320	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>33.94</td><td>54.00</td><td>-20.06</td><td>31.79</td><td>30.80</td><td>5.46</td><td>34.11</td><td>336</td><td>320</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.56	33.94	54.00	-20.06	31.79	30.80	5.46	34.11	336	320	AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.52</td><td>-----</td><td>-----</td><td>92.37</td><td>30.80</td><td>5.46</td><td>34.11</td><td>336</td><td>320</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	94.52	-----	-----	92.37	30.80	5.46	34.11	336	320	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.56	33.94	54.00	-20.06	31.79	30.80	5.46	34.11	336	320	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2480.00	94.52	-----	-----	92.37	30.80	5.46	34.11	336	320	AVERAGE																																																																																	

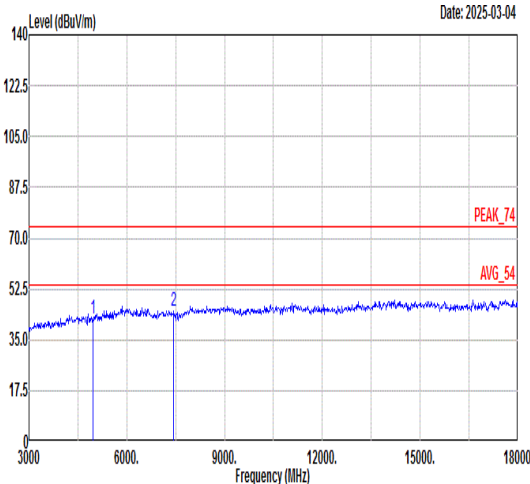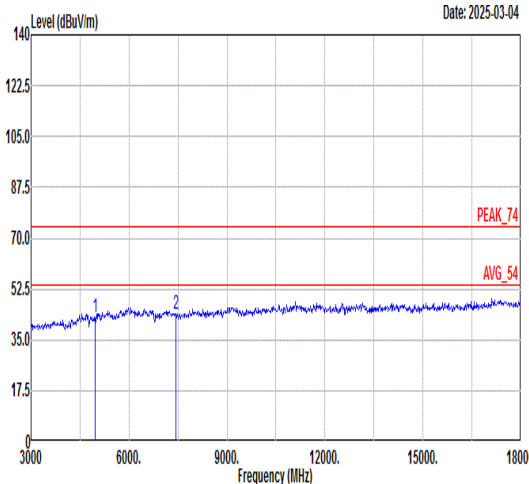

Mode	8																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																											
ANT	1																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak Avg																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>42.28</td><td>74.00</td><td>-31.72</td><td>61.99</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.84</td><td>74.00</td><td>-29.16</td><td>62.88</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	42.28	74.00	-31.72	61.99	36.64	8.46	64.81	---	---	Peak	2	7440.00	44.84	74.00	-29.16	62.88	36.76	10.17	64.97	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>62.75</td><td>36.64</td><td>8.46</td><td>64.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>62.13</td><td>36.76</td><td>10.17</td><td>64.97</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	43.04	74.00	-30.96	62.75	36.64	8.46	64.81	---	---	Peak	2	7440.00	44.09	74.00	-29.91	62.13	36.76	10.17	64.97	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4960.00	42.28	74.00	-31.72	61.99	36.64	8.46	64.81	---	---	Peak																																																																																																	
2	7440.00	44.84	74.00	-29.16	62.88	36.76	10.17	64.97	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4960.00	43.04	74.00	-30.96	62.75	36.64	8.46	64.81	---	---	Peak																																																																																																	
2	7440.00	44.09	74.00	-29.91	62.13	36.76	10.17	64.97	---	---	Peak																																																																																																	





Mode	9																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.70</td><td>49.60</td><td>74.00</td><td>-24.40</td><td>47.60</td><td>30.78</td><td>5.36</td><td>34.14</td><td>393</td><td>74 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.70	49.60	74.00	-24.40	47.60	30.78	5.36	34.14	393	74 PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>79.19</td><td>-----</td><td>-----</td><td>77.18</td><td>30.78</td><td>5.37</td><td>34.14</td><td>393</td><td>74 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	79.19	-----	-----	77.18	30.78	5.37	34.14	393	74 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.70	49.60	74.00	-24.40	47.60	30.78	5.36	34.14	393	74 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	79.19	-----	-----	77.18	30.78	5.37	34.14	393	74 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.80</td><td>40.84</td><td>54.00</td><td>-13.16</td><td>38.84</td><td>30.78</td><td>5.36</td><td>34.14</td><td>393</td><td>74 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.80	40.84	54.00	-13.16	38.84	30.78	5.36	34.14	393	74 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>77.35</td><td>-----</td><td>-----</td><td>75.34</td><td>30.78</td><td>5.37</td><td>34.14</td><td>393</td><td>74 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	77.35	-----	-----	75.34	30.78	5.37	34.14	393	74 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.80	40.84	54.00	-13.16	38.84	30.78	5.36	34.14	393	74 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	77.35	-----	-----	75.34	30.78	5.37	34.14	393	74 AVERAGE																																																																																		



Mode	9																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical					Fundamental																																																																																					
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.91</td><td>49.27</td><td>74.00</td><td>-24.73</td><td>47.27</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>322 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.91	49.27	74.00	-24.73	47.27	30.78	5.36	34.14	100	322 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>89.47</td><td>-----</td><td>-----</td><td>87.46</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>322 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	89.47	-----	-----	87.46	30.78	5.37	34.14	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.91	49.27	74.00	-24.73	47.27	30.78	5.36	34.14	100	322 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	89.47	-----	-----	87.46	30.78	5.37	34.14	100	322 PEAK																																																																																	
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.91</td><td>39.63</td><td>54.00</td><td>-14.37</td><td>37.63</td><td>30.78</td><td>5.36</td><td>34.14</td><td>100</td><td>322 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.91	39.63	54.00	-14.37	37.63	30.78	5.36	34.14	100	322 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>88.17</td><td>-----</td><td>-----</td><td>86.16</td><td>30.78</td><td>5.37</td><td>34.14</td><td>100</td><td>322 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	88.17	-----	-----	86.16	30.78	5.37	34.14	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.91	39.63	54.00	-14.37	37.63	30.78	5.36	34.14	100	322 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	88.17	-----	-----	86.16	30.78	5.37	34.14	100	322 AVERAGE																																																																																	

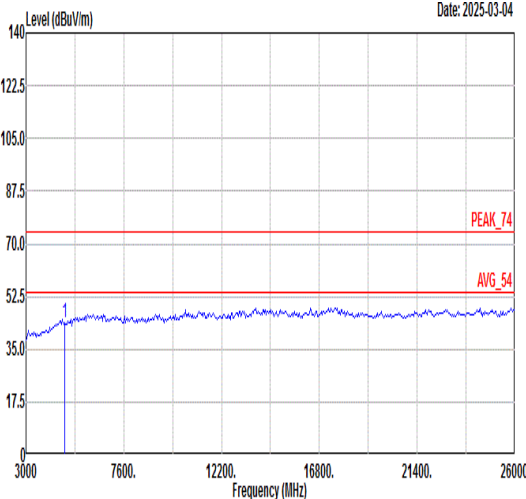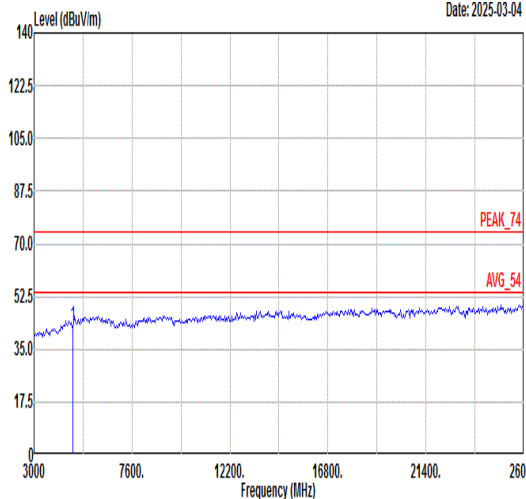

Mode	9																																																			
	Harmonic																																																			
	2400-2483.5_Bluetooth-LE _CH00_2402MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Vertical																																													
Peak Avg	Level (dBuV/m) Date: 2025-03-04 						Level (dBuV/m) Date: 2025-03-04 																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>63.51</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	44.00	74.00	-30.00	63.51	36.39	8.94	64.84	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	4804.00	44.00	74.00	-30.00	63.51	36.39	8.94	64.84	---	---	Peak																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.65</td><td>74.00</td><td>-31.35</td><td>62.16</td><td>36.39</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	42.65	74.00	-31.35	62.16	36.39	8.94	64.84	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	4804.00	42.65	74.00	-31.35	62.16	36.39	8.94	64.84	---	---	Peak																																									



Mode	10																																																																								
	Band Edge																																																																								
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																								
ANT	1																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2485.16</td><td>44.61</td><td>74.00</td><td>-29.39</td><td>42.46</td><td>30.80</td><td>5.46</td><td>34.11</td><td>200 197 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2485.16	44.61	74.00	-29.39	42.46	30.80	5.46	34.11	200 197 PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>78.30</td><td>-----</td><td>76.15</td><td>30.80</td><td>5.46</td><td>34.11</td><td>200 197 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	78.30	-----	76.15	30.80	5.46	34.11	200 197 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 2485.16	44.61	74.00	-29.39	42.46	30.80	5.46	34.11	200 197 PEAK																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 2480.00	78.30	-----	76.15	30.80	5.46	34.11	200 197 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2489.82</td><td>36.09</td><td>54.00</td><td>-17.91</td><td>33.92</td><td>30.80</td><td>5.47</td><td>34.10</td><td>200 197 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2489.82	36.09	54.00	-17.91	33.92	30.80	5.47	34.10	200 197 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>76.52</td><td>-----</td><td>74.37</td><td>30.80</td><td>5.46</td><td>34.11</td><td>200 197 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	76.52	-----	74.37	30.80	5.46	34.11	200 197 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 2489.82	36.09	54.00	-17.91	33.92	30.80	5.47	34.10	200 197 AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 2480.00	76.52	-----	74.37	30.80	5.46	34.11	200 197 AVERAGE																																																																		



Mode	10																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical					Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.72</td><td>44.57</td><td>74.00</td><td>-29.43</td><td>42.40</td><td>30.80</td><td>5.47</td><td>34.10</td><td>400</td><td>171 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2493.72	44.57	74.00	-29.43	42.40	30.80	5.47	34.10	400	171 PEAK	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>86.72</td><td>-----</td><td>-----</td><td>84.57</td><td>30.80</td><td>5.46</td><td>34.11</td><td>400</td><td>171 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	86.72	-----	-----	84.57	30.80	5.46	34.11	400	171 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2493.72	44.57	74.00	-29.43	42.40	30.80	5.47	34.10	400	171 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2480.00	86.72	-----	-----	84.57	30.80	5.46	34.11	400	171 PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.72</td><td>36.07</td><td>54.00</td><td>-17.93</td><td>33.90</td><td>30.80</td><td>5.47</td><td>34.10</td><td>400</td><td>171 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.72	36.07	54.00	-17.93	33.90	30.80	5.47	34.10	400	171 AVERAGE	Level (dBuV/m) Date: 2025-03-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>85.19</td><td>-----</td><td>-----</td><td>83.04</td><td>30.80</td><td>5.46</td><td>34.11</td><td>400</td><td>171 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	85.19	-----	-----	83.04	30.80	5.46	34.11	400	171 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2488.72	36.07	54.00	-17.93	33.90	30.80	5.47	34.10	400	171 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2480.00	85.19	-----	-----	83.04	30.80	5.46	34.11	400	171 AVERAGE																																																																																		




Mode	11																																																																																																																																																																			
	LF																																																																																																																																																																			
	2400-2483.5_ Bluetooth-LE _CH00_2402MHz																																																																																																																																																																			
ANT	1																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																		
QPI/ Peak	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.00</td><td>24.88</td><td>40.00</td><td>-15.12</td><td>30.56</td><td>25.29</td><td>0.53</td><td>31.50 --- Peak</td></tr><tr><td>2</td><td>138.64</td><td>22.39</td><td>43.50</td><td>-21.11</td><td>35.15</td><td>17.65</td><td>1.21</td><td>31.62 --- Peak</td></tr><tr><td>3</td><td>286.08</td><td>35.02</td><td>46.00</td><td>-10.98</td><td>45.76</td><td>19.07</td><td>1.76</td><td>31.57 --- Peak</td></tr><tr><td>4</td><td>559.62</td><td>26.85</td><td>46.00</td><td>-19.15</td><td>28.61</td><td>27.02</td><td>2.48</td><td>31.26 --- Peak</td></tr><tr><td>5</td><td>759.44</td><td>30.01</td><td>46.00</td><td>-15.99</td><td>29.28</td><td>28.88</td><td>2.87</td><td>31.02 --- Peak</td></tr><tr><td>6</td><td>969.93</td><td>33.56</td><td>54.00</td><td>-20.44</td><td>29.43</td><td>31.66</td><td>3.26</td><td>30.79 --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	30.00	24.88	40.00	-15.12	30.56	25.29	0.53	31.50 --- Peak	2	138.64	22.39	43.50	-21.11	35.15	17.65	1.21	31.62 --- Peak	3	286.08	35.02	46.00	-10.98	45.76	19.07	1.76	31.57 --- Peak	4	559.62	26.85	46.00	-19.15	28.61	27.02	2.48	31.26 --- Peak	5	759.44	30.01	46.00	-15.99	29.28	28.88	2.87	31.02 --- Peak	6	969.93	33.56	54.00	-20.44	29.43	31.66	3.26	30.79 --- Peak	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.00</td><td>29.49</td><td>40.00</td><td>-10.51</td><td>35.17</td><td>25.29</td><td>0.53</td><td>31.50 --- Peak</td></tr><tr><td>2</td><td>59.10</td><td>27.71</td><td>40.00</td><td>-12.29</td><td>46.64</td><td>12.00</td><td>0.77</td><td>31.70 --- Peak</td></tr><tr><td>3</td><td>158.04</td><td>23.65</td><td>43.50</td><td>-19.85</td><td>37.33</td><td>16.62</td><td>1.28</td><td>31.58 --- Peak</td></tr><tr><td>4</td><td>274.44</td><td>28.27</td><td>46.00</td><td>-17.73</td><td>39.25</td><td>18.85</td><td>1.72</td><td>31.55 --- Peak</td></tr><tr><td>5</td><td>560.59</td><td>26.71</td><td>46.00</td><td>-19.29</td><td>28.49</td><td>27.00</td><td>2.48</td><td>31.26 --- Peak</td></tr><tr><td>6</td><td>965.08</td><td>33.61</td><td>54.00</td><td>-20.39</td><td>29.41</td><td>31.75</td><td>3.25</td><td>30.80 --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	30.00	29.49	40.00	-10.51	35.17	25.29	0.53	31.50 --- Peak	2	59.10	27.71	40.00	-12.29	46.64	12.00	0.77	31.70 --- Peak	3	158.04	23.65	43.50	-19.85	37.33	16.62	1.28	31.58 --- Peak	4	274.44	28.27	46.00	-17.73	39.25	18.85	1.72	31.55 --- Peak	5	560.59	26.71	46.00	-19.29	28.49	27.00	2.48	31.26 --- Peak	6	965.08	33.61	54.00	-20.39	29.41	31.75	3.25	30.80 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																												
1	30.00	24.88	40.00	-15.12	30.56	25.29	0.53	31.50 --- Peak																																																																																																																																																												
2	138.64	22.39	43.50	-21.11	35.15	17.65	1.21	31.62 --- Peak																																																																																																																																																												
3	286.08	35.02	46.00	-10.98	45.76	19.07	1.76	31.57 --- Peak																																																																																																																																																												
4	559.62	26.85	46.00	-19.15	28.61	27.02	2.48	31.26 --- Peak																																																																																																																																																												
5	759.44	30.01	46.00	-15.99	29.28	28.88	2.87	31.02 --- Peak																																																																																																																																																												
6	969.93	33.56	54.00	-20.44	29.43	31.66	3.26	30.79 --- Peak																																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																												
1	30.00	29.49	40.00	-10.51	35.17	25.29	0.53	31.50 --- Peak																																																																																																																																																												
2	59.10	27.71	40.00	-12.29	46.64	12.00	0.77	31.70 --- Peak																																																																																																																																																												
3	158.04	23.65	43.50	-19.85	37.33	16.62	1.28	31.58 --- Peak																																																																																																																																																												
4	274.44	28.27	46.00	-17.73	39.25	18.85	1.72	31.55 --- Peak																																																																																																																																																												
5	560.59	26.71	46.00	-19.29	28.49	27.00	2.48	31.26 --- Peak																																																																																																																																																												
6	965.08	33.61	54.00	-20.39	29.41	31.75	3.25	30.80 --- Peak																																																																																																																																																												



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 125Kbps	82.71	3.11	0.322	1KHz
Bluetooth LE 2Mbps	33.33	0.21	4.762	10KHz

Bluetooth LE 125Kbps

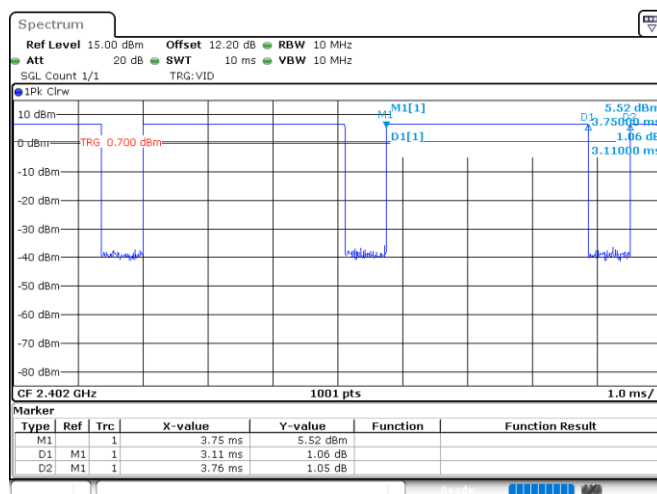

Bluetooth LE 2Mbps

