

Bluetooth headphone

Manual

L6



SPECIFICATIONS

| | |
|-------------------------------|---|
| Bluetooth version: | Bluetooth V3.0 |
| Effective transmission range: | 8m |
| Battery: | 380mAh Li-polymer battery |
| Charging time: | 2.5 hours (maximum) |
| Playing time: | 8 hours |
| Stand-by time: | up to 30 days |
| LED indicator status: | Blue LED for power and BT pairing indicator Red LED for charging indicator |
| Diameter of driver unit: | 40mm |
| Frequency range: | 20Hz~20kHz |
| Sensitivity at 1KHz | 110+/-5 dB |
| Impedance: | 32+/-15% Ω |
| Distortion: | $\leq 1\%$ at 1KHz |
| Rated power input | 10mW |
| Net Weight: | Approx. 160g |

ACCESSORIES

Micro USB charging cable

3.5mm audio cable

Instruction Manual

Important Safety Information

Listen Responsibly

To avoid hearing damage, make sure that the volume on your music player is turned down before connecting your headphones. After placing headphones in/on your ears, gradually turn up the volume until you reach a comfortable listening level. Noise levels are measured in decibels (dB), exposure to any noise at or above 85 dB can cause gradual hearing loss. Monitor your use; hearing loss is a function of loudness versus time. The louder it is, the less time you can be exposed to it. The softer it is, the more time you can listen to it


Use Responsibly

Do not use headphones when it's unsafe to do so—while operating a vehicle, crossing streets, or during any activity or in an environment where your full attention to your surroundings is required

It's dangerous to drive while wearing headphones, and in many places, illegal because it decreases your chances of hearing life-saving sounds outside of your vehicle, such as another car's horn and emergency vehicle sirens. Please avoid wearing your headphones while driving

CHARGING THE HEADPHONES

Use the Micro USB cable and connect headphones to you computer or adaptor device made for USB charging. A red LED indicator will turn on when the headphones are charging. The red LED light will turn off when headphones are fully charged.

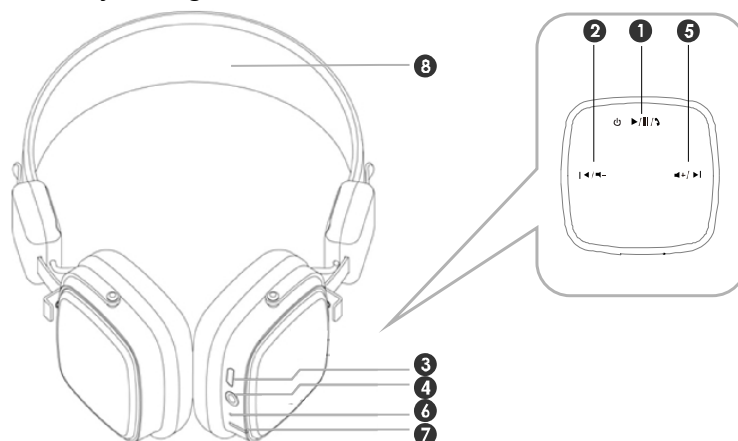

1. On / Off / Call / Play / Pause
2. Volume Down / Fast Forward
3. Micro USB charging port
4. 3.5mm audio jack
5. Volume Up / Rewind

- 6. Microphone
- 7. LED indicator

PAIRING

1. Make sure your phone, computer or music device is turned on and within 1 meter of each other.
2. Hold down Multifunction On/Off button (1) for about 3 seconds until LED light starts to flash BLUE quickly.
3. Activate the Bluetooth feature on your phone or device and set it to search for Bluetooth devices (Discoverable).
4. Select 'L6' from the list of found devices.
5. If necessary, enter passcode '0000' to pair and connect the headphones to your device.
6. Once successfully paired, the LED light will flash BLUE once every few seconds

PLAYBACK / CONTROLS

1. Press Multifunction button Play/Pause (1) to start and pause audio.
2. Press (button 5) to skip forward to next track. Press and hold down button to increase volume.
3. Press (button 2) to go back to previous track. Press and hold down button to decrease volume.

Note: The controls will not function when charging.

CALLS

1. To answer an incoming call, press the Multifunction Play/Pause (button 1)
2. To end call, press the same button again
3. To decrease or increase the volume during the call, press and hold down button 2 or button 5


POWER ON

Press and hold the Multifunction button (1) to turn the headphones on. The LED indicator will flash BLUE when headphones are on.


POWER OFF

Press and hold the Multifunction button (1) to turn the headphones off. The LED indicator will stop flashing when off.

How to Fold the headphone

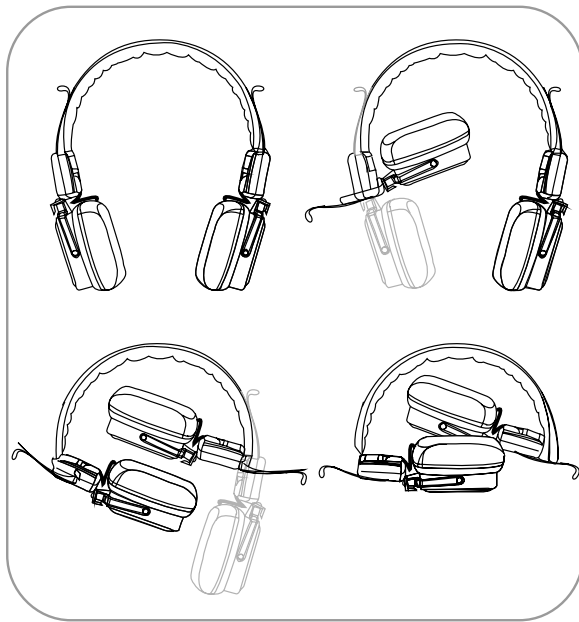


How to keep it in a bag(if there is)

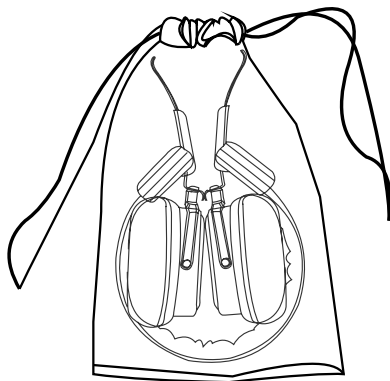

Using headphones in Passive Mode (Wired)

You can use the headphones as a wired headphone to save battery. Simply connect one end of the 3.5mm cable to the bottom of the ear cushion and the other end to your phone or device.

Note: Inserting an audio cable disables wireless functionality.

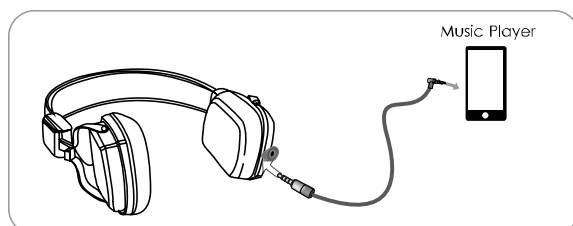

FCC Information and Copyright

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,

uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC RF warning statement: the device has been evaluated to meet general RF exposure requirement , The device can be used in portable exposure condition without restriction.