



amarey

A980 ROBOTIC VACUUM CLEANER

User Manual

Meet our amarey A980 Robot

Thank you for purchasing our amarey Robotic Vacuum Cleaner.

And welcome to amarey Robotic Family.

If you have any problem, please do not hesitate to contact our amarey Customer Service Center by email.

You can also subscribe us on website (<https://www.iamarey.com>) to get the latest information for new arrivals.

Life can be so easy with amarey.

Table of Contents

Important Safety Instructions	01
About Your Amarey A980	02
Using Your Amarey A980	08
Amarey A980 Robot Maintenance	14
Troubleshooting	17
Amarey Customer Care	18

1. Important Safety Instructions

Read all instructions before operating Robot. Save these instructions for future reference.

- If you have special objects that could potentially be damaged by the bumping, remove these objects from the floor.
- Do not let kids sit or stand on Robot. Children and pets should be supervised when Robot is operating.
- Do not make Robot for outdoor use.
- Do not clean wet messes with your Robot.
- Do not use Robot to pick up spills of water bleach, paint, and other chemicals.
- Do not keep Robot at a freezing temperatures .
- Do not use Robot to pick up flammable or combustible materials such as gasoline, printer, etc.
- Ensure that Robot cannot get caught on clothing, socks, pull cords for blinds or curtains, power cords, etc.
- If the power cord is damaged, do not use any other power supply cord. For replacement cords, please contact amarey Customer Service Team.
- Only charge the following amarey batterie: maximum 14.4V, 2600mAh Lithium-ion battery. Other type of batteries may burst causing injury. Always contact amarey Customer Service Center for the correct replacement of battery.
- Always remove the battery from Robot and accessories before long-term storage or transportation.
- The battery must be removed before Robot is disposed. Remove Robot's two Battery Door's screws, and then remove the battery by disconnecting the quick connector.
- Contact your local waste management authority for battery recycling and disposal regulations in your area.

-  **WARNING** Chemical Exposure: If the battery pack is leaking, do not allow the liquid to come in contact with skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice. Place the battery (the used battery pack included when the robot will be disposed) in a sealed plastic bag and dispose of safely according to local environmental regulation.
-  **WARNING** Fire or Explosion Hazard: Do not crush or dismantle battery packs. Do not heat or place the battery pack near any heat source or direct sunlight. Do not incinerate or short-circuit the battery pack. Do not subject batteries to mechanical shock.

Battery and Charging / Information

Lithium-ion Battery

Important: Lithium-ion batteries and products that contain Lithium-ion are subject to stringent transportation regulations. If you need to ship this product (with the battery included) for service, travel or any other reason, you MUST comply with the following shipping instructions:

- Remove the Lithium-ion battery from the product.
- Place a piece of tape over the battery's metal charging contacts.
- Reinstall the battery (with the tape on it) in the product and secure the battery door.
- Package the product in its original packaging or in your own packaging that prevents any movement during transportation.
- Ship via ground transportation only (no air shipping).

Battery Storage

- If storing Robot off the Charging Dock, remove the battery firstly. Then store Robot and the battery in a cool, dry place.




The symbol on the product or its packaging indicates:

Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local authority for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps hazardous substances can leak into the groundwater and get into the food Chain, damaging your health and well-being. Please contact your local or regional waste authority for more information on collection, reuse and recycling programs.


2. About Your Amarey A980

1 Robot


Top View

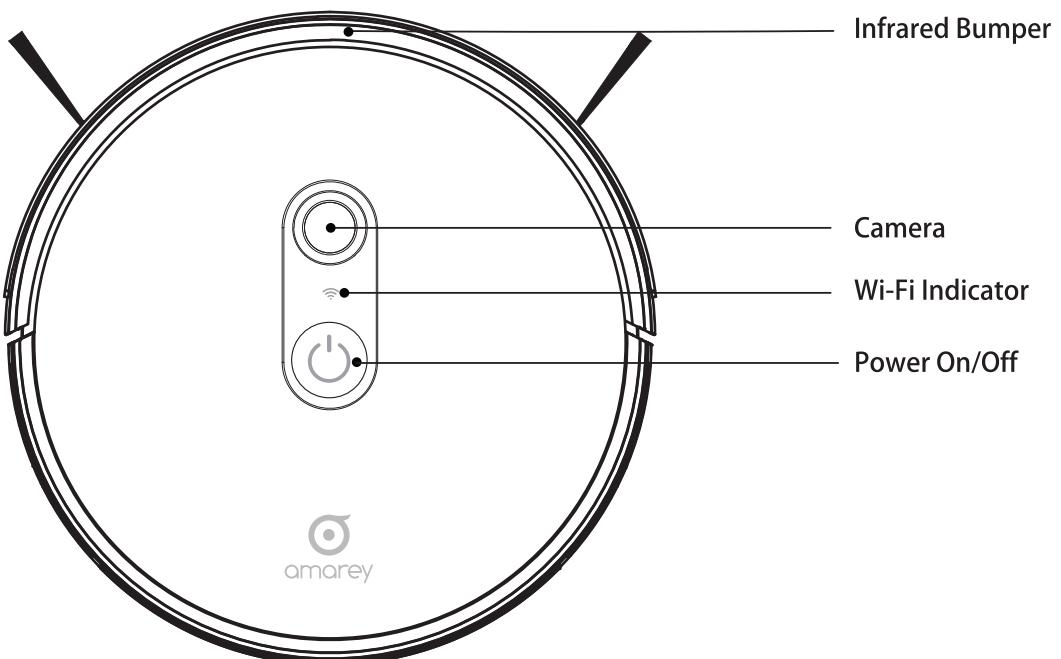


Bottom View

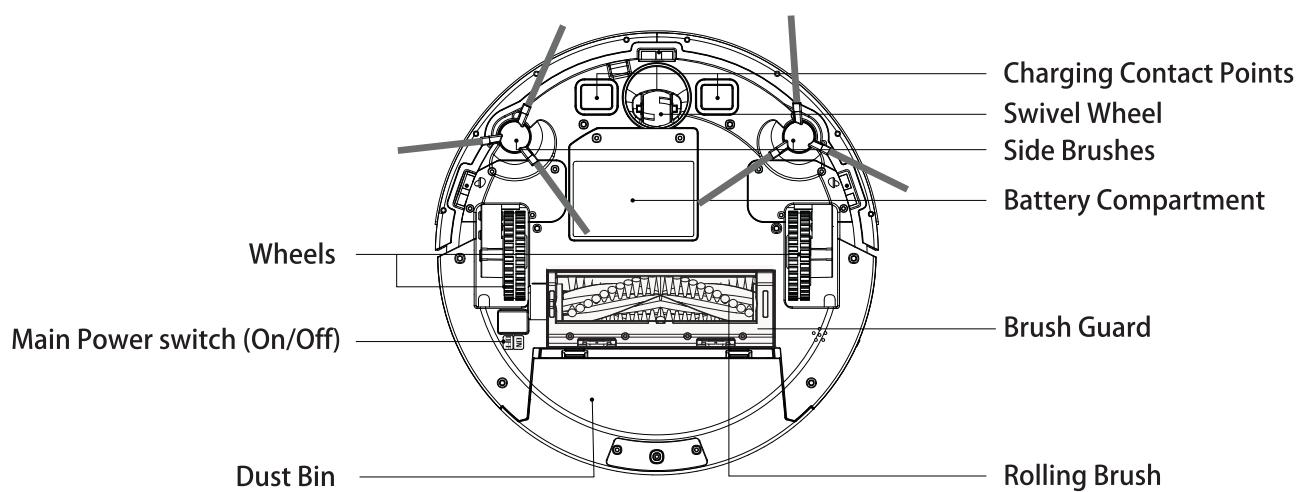

② Charging Dock/Adapter

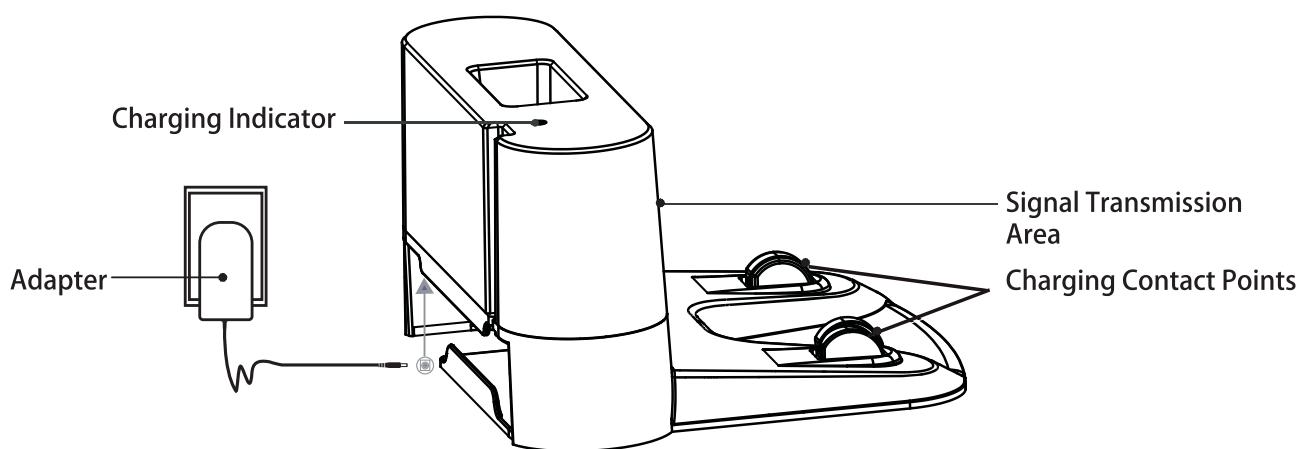


③ Dust Bin

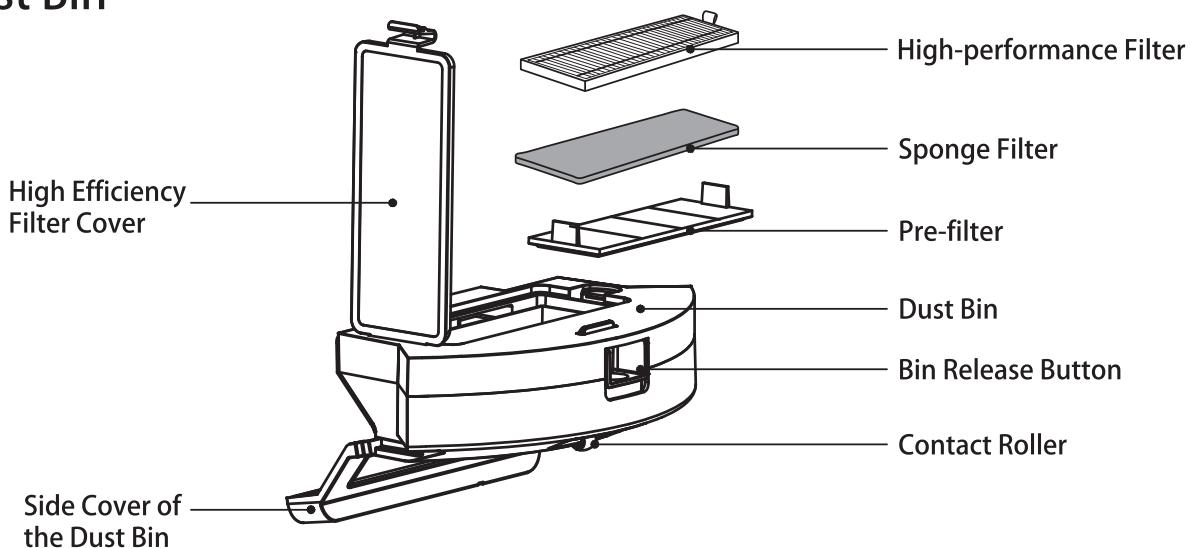

4 Remote Control

Notice: Please press "Stop" button before changing to another cleaning mode.

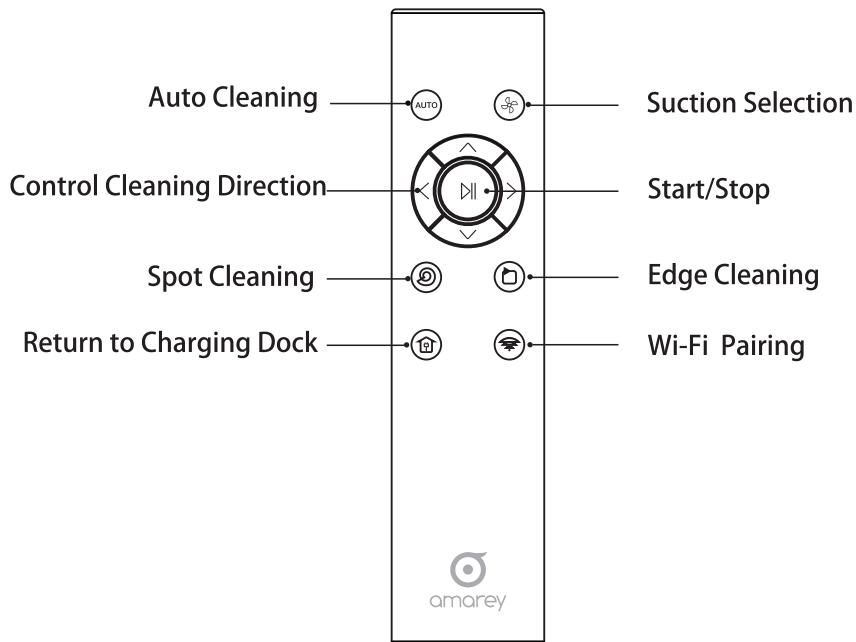

Install 2 AAA batteries before using the Remote Control for the first time. Ensure the positive and negative ends are facing the correct polarity direction as marked in the battery compartment. Please aim the Remote Control directly at the Robot within 5m/16ft when pressing.

1. Auto Cleaning

Press "Auto" on the Remote Control to start cleaning in Auto mode when A900 is turned on.

2. Suction Selection

In Auto mode, press the "  " on the Remote Control repeatedly to select the three suction power levels.

3. Control Cleaning Direction

You can press the directional buttons on the Remote Control to move Robot in standby mode .

("  " Move forward / "  " Move backward / "  " turn left / "  " turn right). In other modes the directional buttons do not work in order not to disturb its automatic routing.

4. Start/Stop

Press "  " on the Remote Control to start/stop cleaning.

5. Spot Cleaning

Press "  " on the Remote Control to start cleaning in Spot mode. A900 will stop cleaning after 2 minutes or less.

6. Edge Cleaning

Press "  " on the Remote Control to start cleaning in Edge mode.

7. Return the Charging Dock

Press "  " on the Remote Control to start recharging mode.


8. Wi-Fi Pairing

Press "  " on the Remote Control about 3 seconds to start Wi-Fi Connecting.


5 What's in the Box




amarey A980



Charging Dock




4 × Side Brushes




Adapter




Cleaning Tool



Remote Control 2 AAA batteries



Sponge Filter and HEPA Filter



Boundary Strip 1×2m/6ft

6 Indicator

	Mode	Indicator
Power indicator	Sleep mode	Off
	Standby mode	Solid blue
	Return to the Charging Dock	Solid pink
	Charging	Breath pink
	Fully charged	Solid blue
	Cleaning	Solid blue
	Error mode	Quick blink red
Wi-Fi indicator	Wi-Fi is searching	Quick blink blue
	Wi-Fi is connecting	Slow blink blue
	Connecting is successful	Solid blue

7 Specifications

Product Model	A980
Battery Type	2600 mAh
Charging Type	Auto Recharge
Dust Bin Capacity	0.5L
Cleaning Mode	Auto, Edge, Spot, Schedule
Adapter Input Voltage	AC 100 ~ 120V
Rated Power	28W
Noise	<60dB
APP Controll	Yes
Boundary Strip	Yes