
What's Include?


1 X Power Adapter

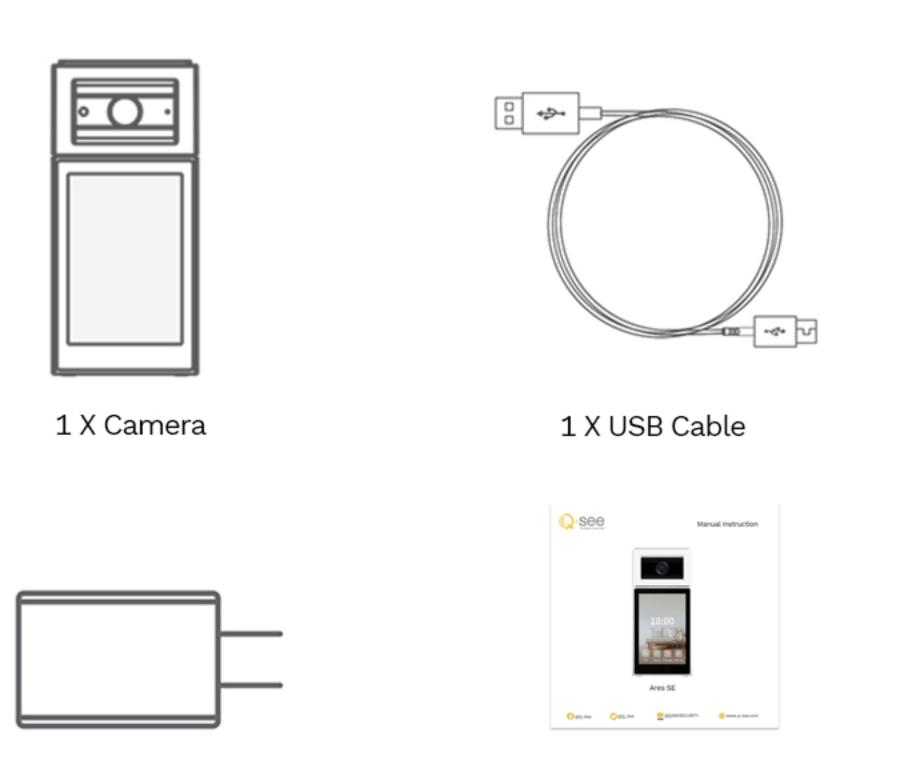

NOTE:-After unboxing, check that the console is intact and fully equipped.

1 X Manual Instruction

Get to Know Your Camera

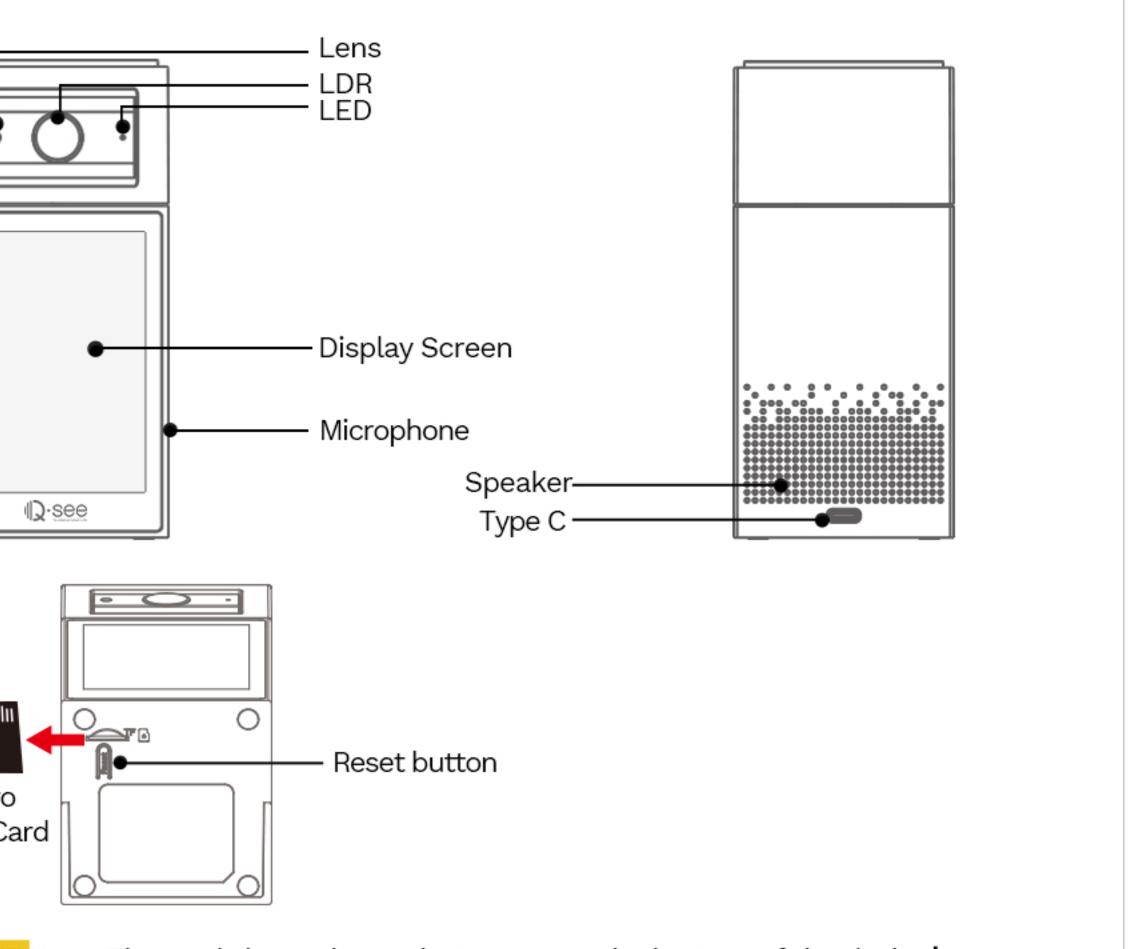

NOTE: Note: The card slot and reset button are at the bottom of the device!

Specification

Model	Ares SE, Ares, Ares Pro, AresXY(X=A-Z, Y=V1-V9, representing different versions.)		
System	Image Sensor	5MP	
	Image Compression	H.265	
	Resolution	2880*1620(UHD)1920*1080(HD)640*360(SD)	
	Frame	20fps	
Lens	Fixed 4mm	Angle Viewing 90°	
LED	8 pcs IR LED	Night Vision 3-7m	
Connect	Wireless Network	2.4GHz/5.8GHZ(IEEE802.11b/g/n)	
	WIFI Rate	150M bps(Max)	
Pan&Tilt	Horizontal/ Vertical	355°/90°	
	Features	Human Dectection/Human tracking/Fall warming/	
		OK gesture/Message/Memorandum/Two-way video/	
		Device-to-Device-Call/Dual band WiFI	
Storage	Local Storage	MicroSD Card(Max128G)	
	Cloud Storage	Qsee Cloud	
Other	Version of Phone	Android 6.0 above,IOS 12.0 above	
	Power Supply	5V/2A	
General	Working Temperature	-10'Cto 50°C	


90% or less

Connection Set Up

Indicator Light

Instructions	LED definition		
Steady red light ON	Device is powered on.		
lashing blue light	Device's WiFi is outage; Device is under configuration; Device is connecting to WiFi.		
Steady blue light	Device is connected to WiFi and App successfully.		
lashing red light	Device is reseted; The WIFI network is interrupted, Device needs to be reconnected to WiFi.		

Power on the device with USB cable and power adapter.

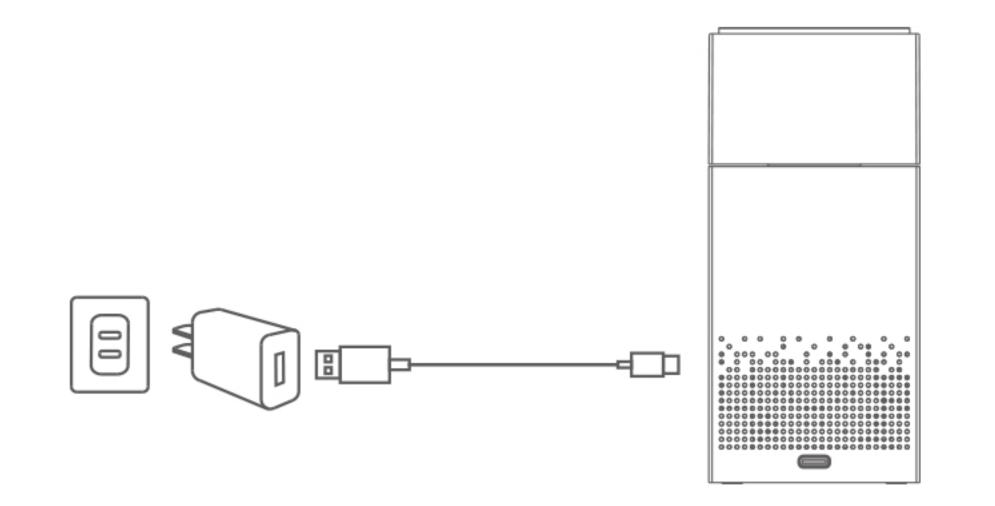

FAQ's

Q: Why can't the device connect with WiFi? A: Please make sure the WiFi signal of the router the camera is connected to is

within the coverage area.

Q: Can I watch the playback without a SD card? A: If you have subscribed to Qsee Cloud Service, you can watch the palyback

through cloud storage without a SD card.

Q: Can I view video recordings from App using the SD card without paying subscription? Does the card rewind automatically?

A: Yes, and yes (if by "rewind" you mean it automatically overwrites the oldest data with the newest once it reaches capacity).

Q: What kind of micro SD card can I use?

A: This camera supports up to 128GB micro SD card with FAT32 format and C10.

Q: What format will be the video stored in? Can you transfer the video files to a computer for playback? Or can it only be viewed using the App?

A: You can download the video from the App and it will automatically will save to your phone into your gallery with .MP4 format. and with the SD card storage, you

can also transfer videos to computer with card reader.

If you encounter any troubles in product information, product installation and use, please email us at support@q-see.com.

Congratulations!

Your security camera is ready to use. Thank you for choosing Qsee as your security partner. Want to know more about Qsee products?




www.q-see.com

Working Humidty

Install Qsee-Smart Home APP to Remote Access

Search for Qsee-Smart Home in App strore or Scan the QR code to download. Register your app account (Login with name and password which will require email verification).







Device Connection


Make sure your phone is connected to WiFi.

- 1. Plug in the camera and wait for it to complete its initial setup.
- 2. Launch App, tap on "o" to add device.
- 3. Select "Wi-Fi" camera.
- 4. Connect camera to same WiFi as your phone and enter the password.
- 5. Press the Reset button for 1 second to hear a beep voice.
- 6. Scan the QR code displayed on the App while facing the lens of the camera.
- 7. Wait for the device voice prompt.

NOTE: If you have any questions about above steps, click the " ____ " to view the connection guide video.

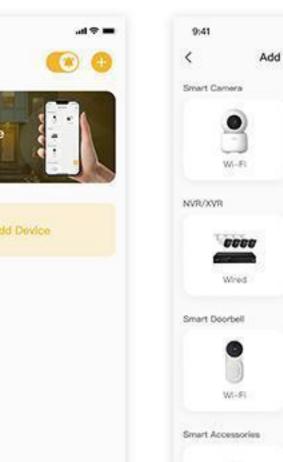

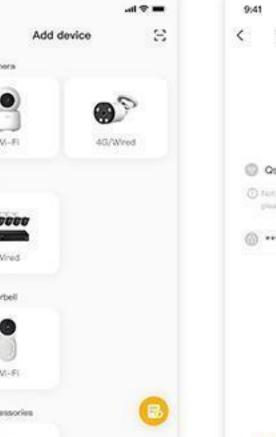

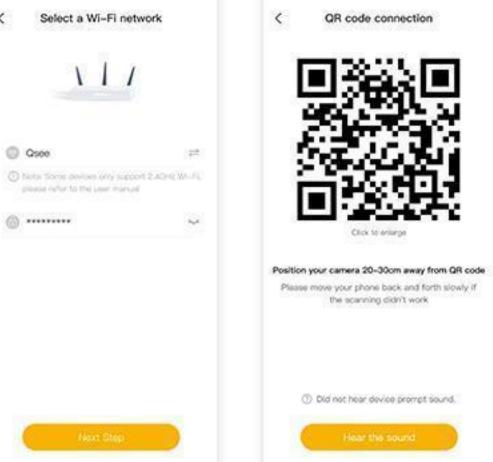

Notification of Compliance

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful inter-Manufacturer: ference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following mea-

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Radiation Exposure Statement:
- 1. This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.
- 2. The device has been evaluated to meet general RF exposure requirement.
- "Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment."

CE Declaration

Qsee declares that this device in compliance with essential requirements and other relevant provisions of RED directive 2014/53/EU.

WiFi Parameter: WiFi 2.4G(2412~2462MHz): 15.50dBm

WiFi 5G(5180~5825MHz): 17.18dBm

Applicant:

QSEE TECHNOLOGY

17890 Castleton St, ste398, City of Industry CA91748

Wanjiaan Interconnected Technology Co., Ltd

2-3F, Block 3, Jinrui Zhonghe High-Tech Industrial Zone, Huawang Rd, Dalang Street, Longhua District, Shenzhen City, Guangdong Province, P.R.China

5150 -5350MHz is

indoor use only.

RoHS Compliance declaration

Qsee products delivered to our customers confirm to the RoHS requirements, in which six banned substances are not detected or are under the limitation. The Restriction of Hazardous Substances Directive (EU) 2015/863 and (EU)2017/2102 amending Annex II to Directive 2011/65/EU. This declaration is based on Qsee's understanding of the RoHS directive and knowledge of the materials that go into products.

Warranty


This product comes with 2-year warranty under certain conditions. Learn more:

NOTE:-If you are not satisfied with Qsee product purchase, we suggest you to reset the camera and return it under specific conditions.











Ares SE, Ares, Ares Pro, AresXY(X=A-Z, Y=V1-V9, representing different versions.)









Manual Instruction

© ⊙ Message Me