


BH60

Wireless Office Headset


User Manual

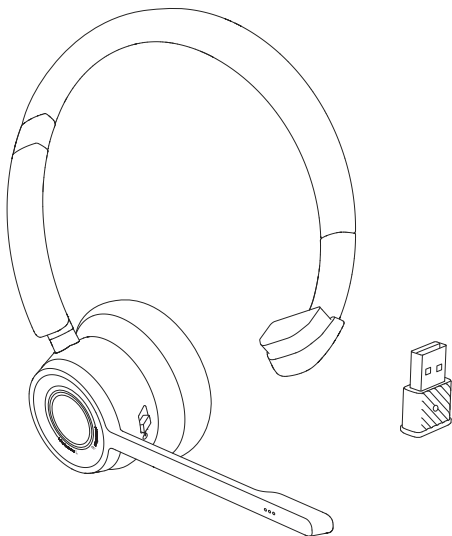

Contents

Product Diagram	3
Button Function Description	3
Headset Buttons	3
Power on / off	3
Volume Control / Music Control	4
Answer a call / Hang up	4
Redial last phone number	4
Reject a call	4
Voice assistant	5
Restore Factory Settings	5
Bluetooth Transmitter Button	5
LED Indicator	6
Headset LED Indicator	6
Bluetooth Transmitter LED Indicator	6
Connect to Computer	7
Connect to Cellphone	9
Microphone Mute	10
Charge The Headset	10
Common Problems	11
Safety Notes	12

Product Diagram

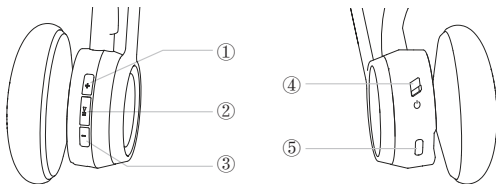

① Volume Up Button


② Multifunctional Button




③ Volume Down Button



④ Power Button / LED Indicator




⑤ Charging Port

Button Function Description

Headset		
Pic.	Name	Function
	Power Button	<p>① Power On</p> <ul style="list-style-type: none"> • Operation: Push the power button up to turn on the headset. • LED Status: Blue light flashes for 5 seconds. • Voice Prompt: Power On <p>② Power Off</p> <ul style="list-style-type: none"> • Operation: Push the power button down to turn off the headset. • LED Status: The LED indicator goes out. • Voice Prompt: Power Off

	<p>Volume Up Button</p>	<p>① Volume Up : Click the button to increase the volume.</p> <p>② Next Song : Long press the button for 2 seconds to skip to next song.</p>
	<p>Volume Down Button</p>	<p>① Volume Down: Click the button to decrease the volume.</p> <p>② Previous Song : Long press the button for 2 seconds to skip to previous song.</p>
	<p>Multifunction Button</p>	<p>① Pause Music: When playing music, click this button once to pause/play music.</p> <p>② Answer A Call: Click the button once when there is an incoming call.</p> <p>③ Hang up: Click the button once during a call.</p> <p>④ Reject A Call: Press and hold the button for 2 seconds when there is an incoming call.</p> <p>⑤ Redial Last Phone Number: Press and hold the button for 2 seconds when not in a call.</p>

	<p>Multifunctional Button</p>	<p>⑥Voice Assistant: Double-click the button when not in a call.</p>
	<p>Volume Up Button & Multifunctional Button</p>	<p>Restore Factory Settings Press the volume up button and multifunctional button at the same time for 6 seconds, when hearing the voice prompt of 'dudu', the Bluetooth function has been reset.</p>

Bluetooth Transmitter		
Pic.	Operation	Function
		<p>When connected, double-click this button to disconnect the transmitter from the headset. Double-click this button again, the transmitter and headset will be reconnected.</p>
		<p>In the power-on state, press and hold this button for 3 seconds to restore the factory settings.</p>


LED Indicator

Headset LED Indicator	
LED Status	What They Mean
Keep flashing in blue for 5 seconds	Power on
Flashing red and blue alternately	Pairing
The LED indicator goes out	Power off
Keep flashing in blue every 30 seconds	Connected
Solid red	Charging
Solid blue	Fully charged


Bluetooth Transmitter LED Indicator	
LED Status	Fully charged
Flashing red and blue alternately	Pairing
Solid blue	Connected

The LED indicator goes out	Disconnect
Flashing blue for 3 times, then turns into red and blue flashing alternately	Restore Factory Settings

Connect to Computer

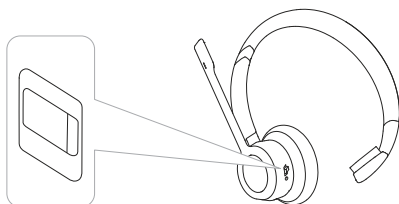

Step 1: Turn on the headset and make it enter pairing mode, the headset LED indicator keeps flashing in **red** and **blue** alternately.

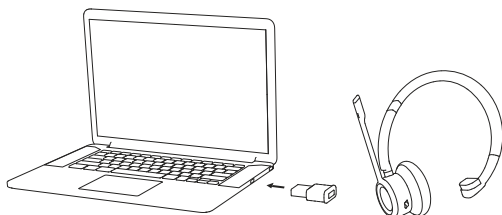

Step 2: Plug the Bluetooth transmitter into the USB port of computer. The Bluetooth transmitter LED indicator keeps flashing in **red** and **blue** and it will automatically search and

connect to the headset. When hearing the voice prompt '**connected**', it means the connection is successful.





Step 3: After the connection is successful, the headset LED indicator flashes **blue** every **30 seconds** and the Bluetooth transmitter LED indicator is **solid blue**.

NOTE:



1. **The headset can't connect to two devices at the same time.** When both the cellphone and the transmitter have connection records, the cellphone will be connected first after the headset is turned on. If you want to connect the transmitter, please turn off the Bluetooth function of cellphone first.

2. If the device does not work normally after the connection is successful, please check whether the sound settings of the device are selected correctly.

Operation Steps: Open the 'sound settings' of the device, find 'Playback and Recording Devices', and select 'BTD-Q2'. If there are multiple enabled devices (Windows system), please set all other audio devices to the disabled state except the device 'BTD-Q2'.




(Windows)




(Mac)

Connect to Cellphone

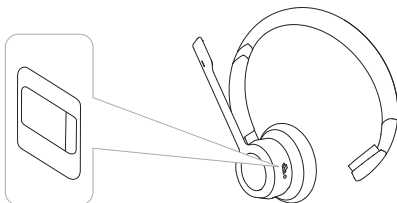

Step 1: Turn on the headset and make it enter pairing mode, the headset LED indicator keeps flashing in **red** and **blue** alternately.

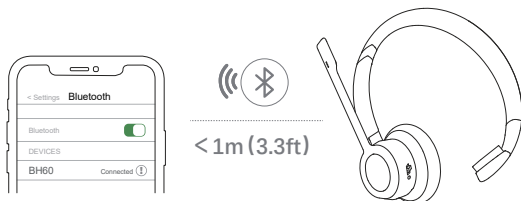

Step 2: Open the Bluetooth function of cellphone, find "BH60" and click to connect. When hearing the voice prompt '**connected**', it means the connection is successful.

NOTE:

The headset can't connect to two devices at the same time. Before the headset connects to the cellphone for the first time, please ensure that the headset is disconnected from the transmitter if there is a connection record between the headset and the transmitter.

Microphone Mute




Figure 1



Figure 2


1.Mute On (Figure 1)

Rotate the microphone boom upward and the microphone mute function is turned on.

2.Mute Off (Figure 2)

Rotate the microphone boom downward and the microphone mute function will be turned off. At this time, the voice content output is normal.

Charge The Headset



Charge the headset with USB cable

When the headset is charging, the red light is on. When the headset is fully charged, the blue light is on.

Common Problems

1.Low battery may cause disconnection, in order not to affect normal use, please charge the headset in time.

2. If the headset fails to turn on, please try to charge it up first, and turn it on after fully charged.

3. If the battery runs out or has not been used for a long time, there may be no signal lights at the beginning of charging, but the indicator will normally light up in red after a few minutes.

4. No Sound from the headset:

——Make sure the headset connects to the electronic device successfully.

——Make sure that the effective distance between the headset and the device is less than 10 meters.

——Make sure you choose this Bluetooth device for music playback.

——Make sure your electronic device is within a range of strong signal without external interference.

——Check whether your electronic device has been connected to other Bluetooth devices.

5.The model of this headset can not be searched.

——Make sure the headset is in the pairing mode you want (Cellphone /Bluetooth Transmitter)

——There may be a program error on the headset and device.Please reset the headset and Bluetooth transmitter.

6.No sound can be heard from the headset when in a call.

——Make sure your headset and device are connected successfully.

——Make sure the call is selected in the state of the Bluetooth device.

Safety Notes

1. Please use original accessories provided for this product, otherwise, it may cause low performance, headset damage, or a short circuit, and all of these are out of our warranty support.
2. Disassembling personally may damage the headset and this is not covered by warranty.
3. The headset is not waterproof. Do not use it in a humid or dusty environment.
4. Please clean the headset with a clean, soft, and dry cloth.
5. Do not place the product in an extreme environment, otherwise, it may be temporarily unavailable for use. The normal use temperature is -5°C to 45°C .

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.

- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

ISED Canada Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development

Canada 's licence-exempt RSS(s). Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

Radiation Exposure: This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment

RF Exposure Statement

To maintain compliance with IC's RF Exposure guidelines, The installation and operation of the device should meet the requirements for portable devices. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter

Déclaration du Canada

Ce dispositif contient des transmetteurs/récepteurs transmetteurs exemptés de licence qui sont conformes à l'innovation, à la Science et au développement économique

Les flux RSS du Canada exempts de licences. L'exploitation est soumise aux deux conditions suivantes:

- 1) cet appareil ne doit pas causer d'interférences et
- 2) ce dispositif doit accepter toute interférence, y compris toute interférence pouvant entraîner un fonctionnement indésirable du dispositif.

Exposition au rayonnement: cet équipement est conforme aux limites d'exposition au rayonnement établies par le Canada pour un environnement non contrôlé

Déclaration d'exposition aux RF

Pour rester en conformité avec les lignes directrices d'exposition RF d'IC, Cet équipement doit être installé et actionné conformément aux exigences de l'équipement portable. Ce dispositif et ses antennes ne doivent pas être co-localisés ni fonctionner en conjonction avec une autre antenne ou un autre émetteur



Happy?

Thank you for choosing our products! We sincerely hope it will be your new-found happiness.

If you are fully satisfied with your using experience, could you please kindly share to your friends?

We also engage with our fans to learn how we can do better by offering free pre-release products. If you are interested, do not hesitate to follow us on



Not Happy?

If you have any questions, concerns, or just not satisfied with our products, please feel free to contact us through e-mail at:

✉ E-mail: **support@anewbee.com**

☎ Tel: (USA) **1-626-701-7623** (UK) **07845854035**

📍 Address: 3rd Fl, Bldg E, Guanghao Ind., No. 23, Yunfeng Rd,
Dalang St., Longhua Dist., Shenzhen City,
Guangdong Prov., China